

FCC Test Report

Report No.: RFBDYS-WTW-P21091150

FCC ID: A8J-SP938HC

Test Model: SP-938 HC

Series Model: DuraFon Roam HC (refer to item 3.1 for more details)

Received Date: Oct. 14, 2021

Test Date: Oct. 28 ~ Dec. 15, 2021

Issued Date: Feb. 10, 2022

Applicant: EnGenius Technologies, Inc.

Address: 1580 Scenic Avenue, Costa Mesa, CA92626

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location (1): No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City
33383, TAIWAN

Test Location (2): No. 70, Wenming Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)

FCC Registration / 788550 / TW0003
Designation Number (1):

FCC Registration / 281270 / TW0032
Designation Number (2):



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Modification Record	6
3 General Information	7
3.1 General Description of EUT	7
3.2 Description of Test Modes	9
3.2.1 Test Mode Applicability and Tested Channel Detail	10
3.1 Duty Cycle of Test Signal	11
3.2 Description of Support Units	12
3.2.1 Configuration of System under Test	12
3.3 General Description of Applied Standards and References	12
4 Test Types and Results	13
4.1 Radiated Emission and Bandedge Measurement	13
4.1.1 Limits of Radiated Emission and Bandedge Measurement	13
4.1.2 Test Instruments	14
4.1.3 Test Procedures	15
4.1.4 Deviation from Test Standard	15
4.1.5 Test Setup	16
4.1.6 EUT Operating Conditions	17
4.1.7 Test Results	18
4.2 Conducted Emission Measurement	48
4.2.1 Limits of Conducted Emission Measurement	48
4.2.2 Test Instruments	48
4.2.3 Test Procedures	49
4.2.4 Deviation from Test Standard	49
4.2.5 Test Setup	49
4.2.6 EUT Operating Conditions	49
4.2.7 Test Results	50
4.3 Number of Hopping Frequency Used	58
4.3.1 Limits of Hopping Frequency Used Measurement	58
4.3.2 Test Setup	58
4.3.3 Test Instruments	58
4.3.4 Test Procedure	58
4.3.5 Deviation from Test Standard	58
4.3.6 Test Results	58
4.4 Dwell Time on Each Channel	59
4.4.1 Limits of Dwell Time on Each Channel Measurement	59
4.4.2 Test Setup	59
4.4.3 Test Instruments	59
4.4.4 Test Procedures	59
4.4.5 Deviation from Test Standard	59
4.4.6 Test Results	60
4.5 Channel Bandwidth	61
4.5.1 Limits of Channel Bandwidth Measurement	61
4.5.2 Test Setup	61
4.5.3 Test Instruments	61
4.5.4 Test Procedure	61
4.5.5 Deviation from Test Standard	61
4.5.6 EUT Operating Condition	61
4.5.7 Test Results	62
4.6 Hopping Channel Separation	63

4.6.1 Limits of Hopping Channel Separation Measurement.....	63
4.6.2 Test Setup.....	63
4.6.3 Test Instruments	63
4.6.4 Test Procedure	63
4.6.5 Deviation from Test Standard	63
4.6.6 Test Results	64
4.7 Maximum Output Power.....	65
4.7.1 Limits of Maximum Output Power Measurement	65
4.7.2 Test Setup.....	65
4.7.3 Test Instruments	65
4.7.4 Test Procedure	65
4.7.5 Deviation from Test Standard	65
4.7.6 EUT Operating Condition	65
4.7.7 Test Results	66
4.8 Conducted Out of Band Emission Measurement.....	67
4.8.1 Limits Of Conducted Out Of Band Emission Measurement.....	67
4.8.2 Test Instruments	67
4.8.3 Test Procedure	67
4.8.4 Deviation from Test Standard	67
4.8.5 EUT Operating Condition	67
4.8.6 Test Results	67
5 Pictures of Test Arrangements.....	69
Appendix – Information of the Testing Laboratories	70

Release Control Record

Issue No.	Description	Date Issued
RFBDYS-WTW-P21091150	Original release	Feb. 10, 2022

1 Certificate of Conformity

Product: Digital Long Range SIP Cordless Telephone

Brand: EnGenius

Test Model: SP-938 HC

Series Model: DuraFon Roam HC (refer to item 3.1 for more details)


Sample Status: Engineering sample

Applicant: EnGenius Technologies, Inc.

Test Date: Oct. 28 ~ Dec. 15, 2021

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10:2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by : , **Date:** Feb. 10, 2022
Polly Chien / Specialist

Approved by : , **Date:** Feb. 10, 2022
Jeremy Lin / Project Engineer

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	Pass	Meet the requirement of limit. Minimum passing margin is -11.76dB at 0.19000 MHz.
15.247(a)(1) (i)	Number of Hopping Frequency Used	Pass	Meet the requirement of limit.
15.247(a)(1) (i)	Dwell Time on Each Channel	Pass	Meet the requirement of limit.
15.247(a)(1) (i)	1. Hopping Channel Separation 2. Spectrum Bandwidth of a Frequency Hopping Sequence Spread Spectrum System	Pass	Meet the requirement of limit.
15.247(b)(2)	Maximum Peak Output Power	Pass	Meet the requirement of limit.
15.205 & 209 & 15.247(d)	Radiated Emissions & Band Edge Measurement	Pass	Meet the requirement of limit. Minimum passing margin is -11.6dB at 247.90 MHz.
15.247(d)	Antenna Port Emission	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	Antenna connector is Reverse-polarity SMA not a standard connector.

Note:

- 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period.
- Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150kHz ~ 30MHz	2.79 dB
Radiated Emissions up to 1 GHz	9kHz ~ 30MHz	3.00 dB
	30MHz ~ 200MHz	2.91 dB
	200MHz ~ 1000MHz	2.93 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	1.76 dB
	18GHz ~ 40GHz	1.77 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Digital Long Range SIP Cordless Telephone
Brand	EnGenius
Test Model	SP-938 HC
Series Model	DuraFon Roam HC
Model Difference	Refer to note as below
Sample Status	Engineering sample
Power Supply Rating	5Vdc or 5.5Vdc from adapter 3.7Vdc from battery
Modulation Type	MSK
Channel Spacing	404 kHz
Operating Frequency	902.3839 ~ 927.4656 MHz
Number of Channel	50
Output Power	814.704mW
Antenna Type	Refer to note
Antenna Connector	Refer to note
Accessory Device	Refer to note
Cable Supplied	NA

Note:

1. All models are listed as below.

Brand	Model	Difference
EnGenius	SP-938 HC	All models are electrically identical, different model names are for marketing purpose.
	DuraFon Roam HC	

2. The EUT contains following accessory devices.

Product	Brand	Model	Description
AC Adapter for Portable Handset Charger used 1	AOEM	ADS012T-W055150	I/P: 100-240 Vac, 50-60 Hz, 0.2 A O/P: 5.5 Vdc, 1.5 A DC Output Cable: 1.5 m cable w/o core attached on adapter
AC Adapter for Portable Handset Charger used 2	Powertron Electronics Corp.	PS1010-055HUB150	I/P: 100-240 Vac, 50-60 Hz, 0.4 A O/P: 5.5 Vdc, 1.5 A DC Output Cable: 1.5 m cable w/o core attached on adapter
Battery for Portable Handset used	EnGenius	N/A	3.7 Vdc, 1700 mAh
Charger Cradle for Portable Handset used	EnGenius	N/A	--

3. The EUT use following accessory devices. (Support unit)

Product	Brand	Model	Description
AC Adapter for Portable Handset Charger used 3	AOEM	ADS012T-W050200	I/P: 100-240 Vac, 50-60 Hz, 0.2 A O/P: 5 Vdc, 2 A DC Output Cable: 1.5 m cable w/o core attached on adapter
AC Adapter for Portable Handset Charger used 4	UNIFIVE	UV313-0520	I/P: 100-240 Vac, 50-60 Hz, 0.3 A O/P: 5 Vdc, 2 A DC Output Cable: 1.5 m cable w/o core attached on adapter
Earphone	N/A	N/A	0.6 m
Bluetooth Earphone	Plantronics	N20	--

4. The following antennas were provided to the EUT.

Antenna No	Antenna type	Connector	Brand	Model	Gain (dBi)
Long Ant. Portable Handset	Dipole	Reverse-polarity SMA	JOYMAX ELECTRONICS CO., LTD	GHX-1302RSGX-100	2.5
Short Ant. Portable Handset	Dipole	Reverse-polarity SMA	JOYMAX ELECTRONICS CO., LTD	GHX-1302XXBX-101	1.5

* The maximum antenna gain is chosen for final test.

* The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

3.2 Description of Test Modes

50 channels are provided to this EUT:

Channel	Freq. (MHz)	Channel	Freq. (MHz)
1	902.383959	26	915.329342
2	902.788502	27	915.733885
3	903.193045	28	916.542971
4	903.597589	29	916.947514
5	904.406675	30	917.352058
6	904.811218	31	917.756601
7	905.215761	32	918.161144
8	905.620305	33	918.970231
9	906.024848	34	919.374774
10	906.833934	35	919.779317
11	907.238477	36	920.183860
12	907.643021	37	920.588403
13	908.047564	38	921.397490
14	908.452107	39	921.802033
15	909.261193	40	922.206576
16	909.665737	41	922.611119
17	910.070280	42	923.015663
18	910.474823	43	923.824749
19	910.879366	44	924.229292
20	911.688453	45	925.038379
21	912.092996	46	925.442922
22	912.497539	47	926.252008
23	912.902082	48	926.656551
24	914.115712	49	927.061095
25	914.924798	50	927.465638

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable to				Description
	RE $\geq$ 1G	RE<1G	PLC	APCM	
A1	√	√	√	√	EUT power from adapter 4
A2	-	√	√	-	EUT power from adapter 3
B1	-	√	√	-	EUT power from cradle + adapter 2
B2	-	√	√	-	EUT power from cradle + adapter 1

Where RE $\geq$ 1G: Radiated Emission above 1GHz & Bandedge Measurement

PLC: Power Line Conducted Emission

RE<1G: Radiated Emission below 1GHz

APCM: Antenna Port Conducted Measurement

Note:

1. The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **Z-plane**.
2. Radiated emission test (below 1GHz) and power line conducted emission test items chosen the worst maximum power.
3. "-" means no effect.

Radiated Emission Test (Above 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type
A1	1 to 50	1, 25, 50	MSK

Radiated Emission Test (Below 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type
A1, A2, B1, B2	1 to 50	1, 25, 50	MSK

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type
A1, A2, B1, B2	1 to 50	1	MSK

Antenna Port Conducted Measurement:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.


EUT Configure Mode	Available Channel	Tested Channel	Modulation Type
A1	1 to 50	1, 25, 50	MSK

Test Condition:

Applicable to	Environmental Conditions	Input Power (System)	Tested by
RE $\geq$ 1G	23 deg. C, 66% RH	120Vac, 60Hz	Adair Peng, Titan Hsu
RE<1G	23 deg. C, 66% RH	120Vac, 60Hz	Adair Peng
PLC	25 deg. C, 75% RH	120Vac, 60Hz	Edson Wang
APCM	25 deg. C, 60% RH	120Vac, 60Hz	Chris Lin

3.3 Duty Cycle of Test Signal

Duty cycle = $(0.942)/100 = 0.00942$, Duty factor = $20 * \log(0.00942) = -40.51$

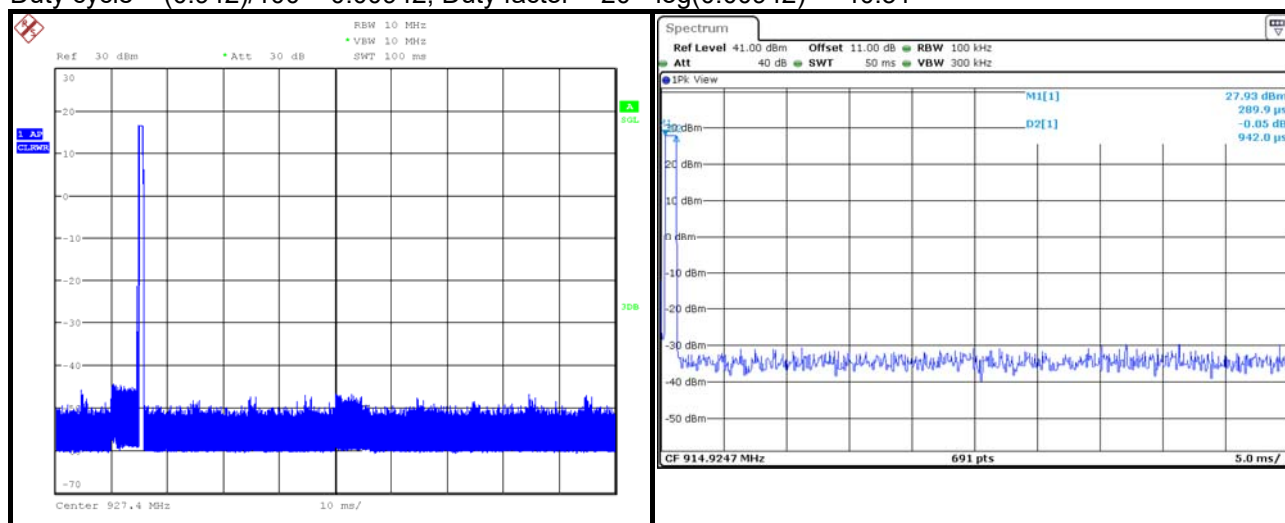

3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Adapter	AOEM	ADS012T-W050200	N/A	N/A	Provided by client (For Mode A2)
	Adapter	UNIFIVE	UV313-0520	N/A	N/A	Provided by client (For Mode A1)

Note: All power cords of the above support units are non-shielded (1.8m).


ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	DC Cable	1	1.5	N	0	Provided by client

3.4.1 Configuration of System under Test

Mode A1, A2



Mode B1, B2

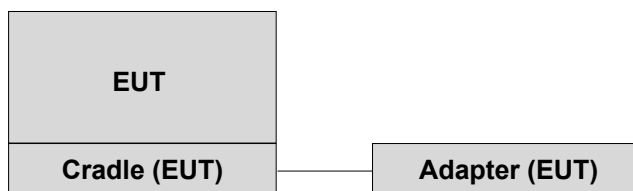

3.5 General Description of Applied Standards and References

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

Test standard:

FCC Part 15, Subpart C (15.247)

ANSI C63.10:2013

All test items have been performed and recorded as per the above standards.

References Test Guidance:

KDB 558074 D01 15.247 Meas Guidance v05r02

All test items have been performed as a reference to the above KDB test guidance.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver Rohde & Schwarz	ESR3	102782	Dec. 21, 2020	Dec. 20, 2021
Spectrum Analyzer Rohde & Schwarz	FSW43	101582	Apr. 01, 2021	Mar. 31, 2022
BILOG Antenna SCHWARZBECK	VULB9168	9168-1213	Oct. 27, 2021	Oct. 26, 2022
HORN Antenna RF SPIN	DRH18-E	210103A18E	Jan. 08, 2021	Jan. 07, 2022
HORN Antenna SCHWARZBECK	BBHA 9170	9170-1048	Dec. 10, 2020 Nov. 14, 2021	Dec. 09, 2021 Nov. 13, 2022
Loop Antenna TESEQ	HLA 6121	45745	Jul. 21, 2021	Jul. 20, 2022
Preamplifier EMCI	EMC330N	980782	Jan. 19, 2021	Jan. 18, 2022
Preamplifier EMCI	EMC118A45SE	980808	Jan. 03, 2021	Jan. 02, 2022
Preamplifier EMCI	EMC184045SE	980788	Jan. 18, 2021	Jan. 17, 2022
RF signal cable EMCI	EMC104-SM-SM-(9000+2000+1000)	201243+ 201231+ 210102	Jan. 18, 2021	Jan. 17, 2022
RF signal cable EMCI	EMCCFD400-NM-NM-(9000+300+500)	201236+ 201235+ 201233	Jan. 18, 2021	Jan. 17, 2022
RF signal cable EMCI	EMC101G-KM-KM-(5000+3000+2000)	201260+201257+201254	Jan. 18, 2021	Jan. 17, 2022
Software BV ADT	ADT_Radiated_V7.6.15.9.5	NA	NA	NA
Antenna Tower Max-Full	MFT-151SS-0.5T	NA	NA	NA
Turn Table Max-Full	MF-7802BS	NA	NA	NA
Turn Table Controller Max-Full	MF-7802BS	MF780208674	NA	NA
Peak Power Analyzer KEYSIGHT	8990B	MY51000485	Jan. 19, 2021	Jan. 18, 2022
Wideband Power Sensor KEYSIGHT	N1923A	MY58020002	Jan. 11, 2021	Jan. 10, 2022
Spectrum Analyzer ROHDE & SCHWARZ	FSV40	100979	Mar. 29, 2021	Mar. 28, 2022

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in WM Chamber 8.
3. Radiated emissions test date: Oct. 28 ~ Dec. 15, 2021.
4. Except for the radiated emissions test items, the test date of other items: Nov. 11, 2021.

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) and Average detection (AV) at frequency above 1GHz. For fundamental and harmonic signal measurement, according to ANSI C63.10 section 7.5, the average value = peak value + duty cycle correction factor. The duty cycle correction factor refer to Chapter 3.3 of this report.
3. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup


For Radiated emission below 30MHz

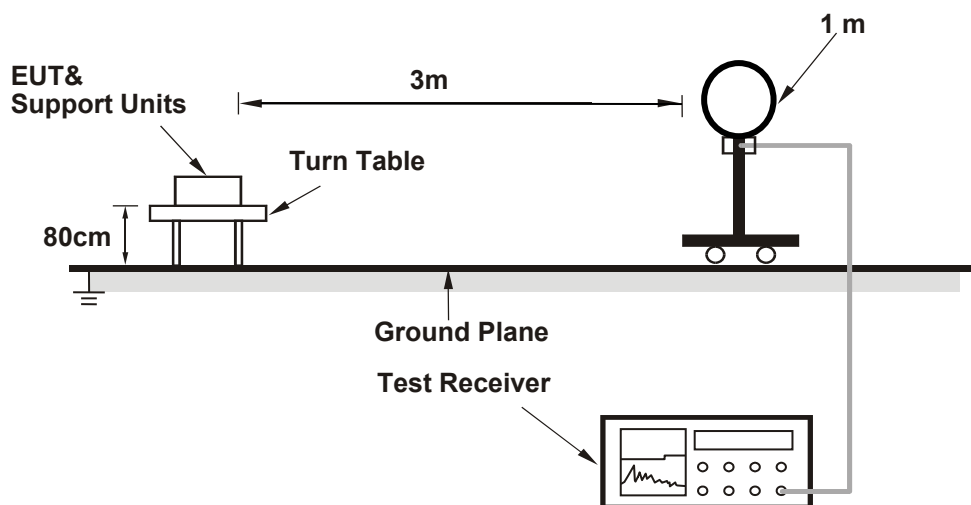

For Radiated emission 30MHz to 1GHz

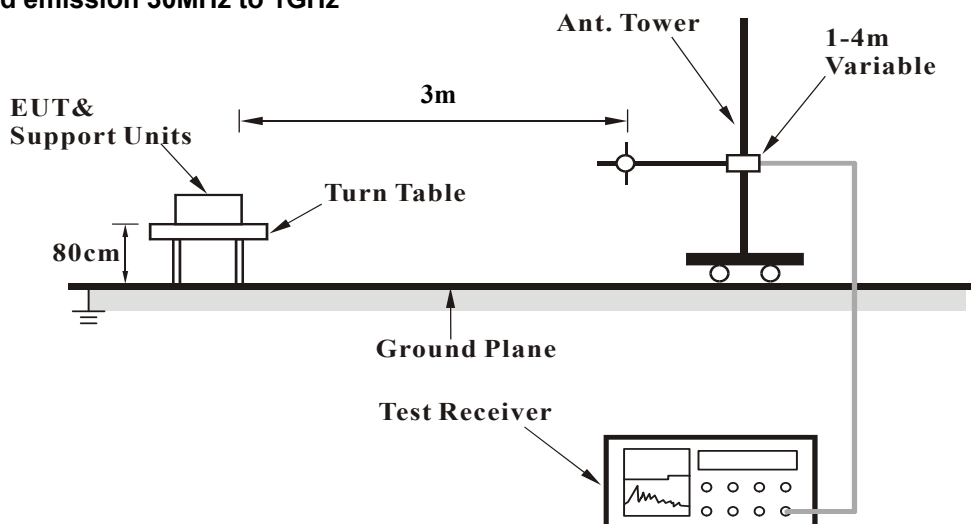

For Radiated emission above 1GHz

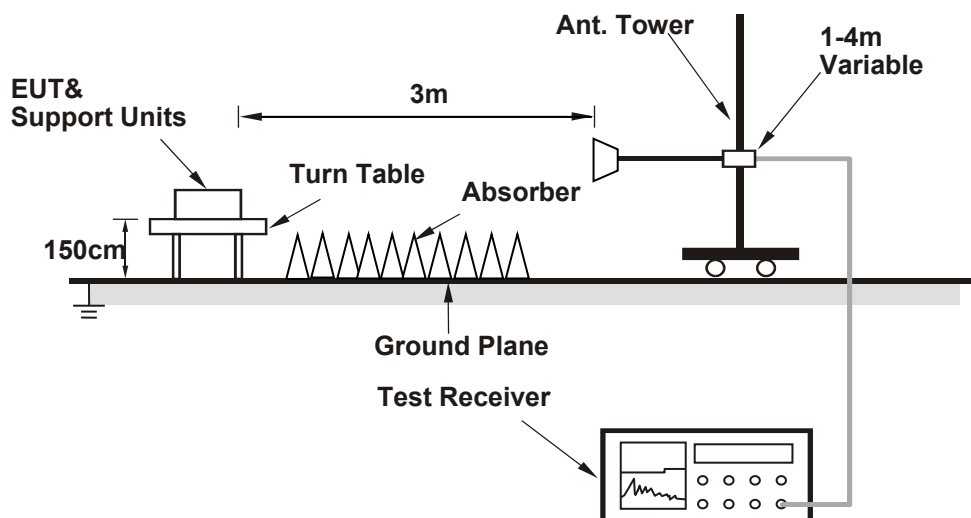

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- a. Set the EUT under transmission condition continuously at specific channel frequency.

4.1.7 Test Results

RF Mode	TX RFID	Channel	CH 1 : 902.3839 MHz
Frequency Range	902MHz ~ 928MHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#902.0000	54.1 QP	87.0	-32.9	1.54	161	29.6	24.5
2	*902.3839	107.0 QP			1.54	161	82.5	24.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#902.0000	68.6 QP	100.8	-32.2	1.13	168	44.1	24.5
2	*902.3839	120.8 QP			1.13	168	96.3	24.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX RFID	Channel	CH 25 : 914.9247 MHz
Frequency Range	902MHz ~ 928MHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*914.9247	109.2 QP			1.42	177	84.3	24.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*914.9247	121.4 QP			1.10	168	96.5	24.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX RFID	Channel	CH 50 : 927.4656 MHz
Frequency Range	902MHz ~ 928MHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*927.4656	108.8 QP			1.00	223	83.7	25.1
2	#928.0000	51.1 QP	88.8	-37.7	1.00	223	26.0	25.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*927.4656	120.1 QP			1.00	162	95.0	25.1
2	#928.0000	62.6 QP	100.1	-37.5	1.00	162	37.5	25.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

Above 1GHz data:

RF Mode	TX RFID	Channel	CH 1 : 902.3839 MHz
Frequency Range	1GHz ~ 10GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2707.1517	46.9 PK	74.0	-27.1	2.07 H	164	50.5	-3.6
2	2707.1517	6.4 AV	54.0	-47.6	2.07 H	164	10.0	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2707.1517	47.8 PK	74.0	-26.2	2.41 V	208	51.4	-3.6
2	2707.1517	7.3 AV	54.0	-46.7	2.41 V	208	10.9	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value.
5. " # ": The radiated frequency is out of the restricted band.
6. for Fundamental frequency and bandedge & harmonic:
The average value of fundamental frequency is :average = peak value + 20log(Duty cycle)
where the duty factor is calculated from following formula:
 $20\text{Log}(\text{Duty cycle}) = 20 \log (0.942\text{ms}/100) = -40.51\text{dB}$ please refer to the plotted duty
(see section 3.3)

RF Mode	TX RFID	Channel	CH 25 : 914.9247 MHz
Frequency Range	1GHz ~ 10GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2744.7741	46.4 PK	74.0	-27.6	1.42 H	129	49.8	-3.4
2	2744.7741	5.9 AV	54.0	-48.1	1.42 H	129	9.3	-3.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2744.7741	49.3 PK	74.0	-24.7	1.34 V	41	52.7	-3.4
2	2744.7741	8.8 AV	54.0	-45.2	1.34 V	41	12.2	-3.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value.
5. " # ": The radiated frequency is out of the restricted band.
6. for Fundamental frequency and bandedge & harmonic:
The average value of fundamental frequency is :average = peak value + 20log(Duty cycle)
where the duty factor is calculated from following formula:
 $20\text{Log}(\text{Duty cycle}) = 20 \log (0.942\text{ms}/100) = -40.51\text{dB}$ please refer to the plotted duty
(see section 3.3)

RF Mode	TX RFID	Channel	CH 50 : 927.4656 MHz
Frequency Range	1GHz ~ 10GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2782.3968	48.0 PK	74.0	-26.0	1.98 H	347	51.2	-3.2
2	2782.3968	7.5 AV	54.0	-46.5	1.98 H	347	10.7	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2782.3968	50.8 PK	74.0	-23.2	2.44 V	204	54.0	-3.2
2	2782.3968	10.3 AV	54.0	-43.7	2.44 V	204	13.5	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value.
5. " # ": The radiated frequency is out of the restricted band.
6. for Fundamental frequency and bandedge & harmonic:
The average value of fundamental frequency is :average = peak value + 20log(Duty cycle)
where the duty factor is calculated from following formula:
 $20\text{Log}(\text{Duty cycle}) = 20 \log (0.942\text{ms}/100) = -40.51\text{dB}$ please refer to the plotted duty
(see section 3.3)

Below 1GHz worst-case data:


Mode A1

RF Mode	TX RFID	Channel	CH 1 : 902.3839 MHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	152.30	26.7 QP	43.5	-16.8	1.50 H	288	44.7	-18.0
2	170.58	23.3 QP	43.5	-20.2	1.50 H	288	41.9	-18.6
3	236.65	31.1 QP	46.0	-14.9	1.50 H	0	51.1	-20.0
4	247.90	23.2 QP	46.0	-22.8	1.00 H	243	42.8	-19.6
5	325.22	20.6 QP	46.0	-25.4	1.00 H	262	37.5	-16.9
6	#654.17	31.0 QP	87.0	-56.0	1.99 H	18	40.8	-9.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.
6. " # ": The radiated frequency is out of the restricted band.

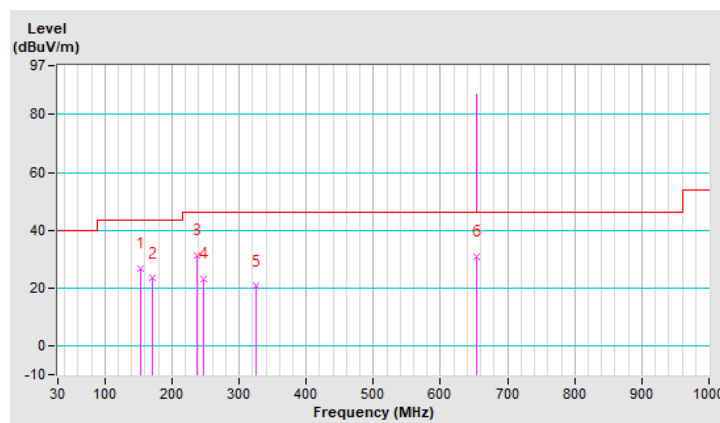


RF Mode	TX RFID	Channel	CH 1 : 902.3839 MHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	135.43	23.9 QP	43.5	-19.6	1.51 V	102	42.9	-19.0
2	152.30	28.1 QP	43.5	-15.4	1.00 V	119	46.1	-18.0
3	236.65	28.2 QP	46.0	-17.8	2.00 V	9	48.2	-20.0
4	312.57	25.4 QP	46.0	-20.6	2.00 V	28	42.7	-17.3
5	#654.17	43.4 QP	100.8	-57.4	1.51 V	4	53.2	-9.8
6	745.55	27.0 QP	46.0	-19.0	2.00 V	112	35.1	-8.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.
6. " # ": The radiated frequency is out of the restricted band.

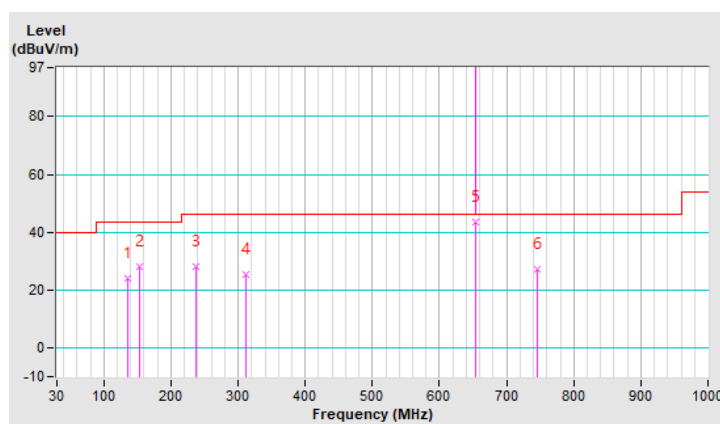


RF Mode	TX RFID	Channel	CH 25 : 914.9247 MHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	41.25	20.9 QP	40.0	-19.1	2.00 H	115	39.4	-18.5
2	134.03	25.2 QP	43.5	-18.3	1.50 H	265	44.3	-19.1
3	153.71	27.2 QP	43.5	-16.3	1.50 H	219	45.1	-17.9
4	236.65	30.3 QP	46.0	-15.7	1.00 H	341	50.3	-20.0
5	247.90	24.5 QP	46.0	-21.5	1.50 H	79	44.1	-19.6
6	#666.83	30.9 QP	89.2	-58.3	1.00 H	18	40.6	-9.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.
6. " # ": The radiated frequency is out of the restricted band.

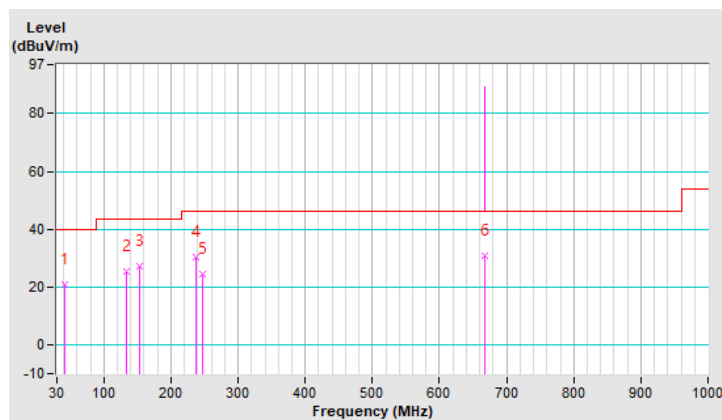


RF Mode	TX RFID	Channel	CH 25 : 914.9247 MHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	152.30	26.6 QP	43.5	-16.9	1.00 V	323	44.6	-18.0
2	236.65	26.6 QP	46.0	-19.4	1.50 V	338	46.6	-20.0
3	302.72	24.5 QP	46.0	-21.5	2.00 V	227	42.1	-17.6
4	418.00	25.1 QP	46.0	-20.9	1.50 V	250	39.9	-14.8
5	496.72	22.8 QP	46.0	-23.2	1.50 V	18	35.7	-12.9
6	#666.48	43.6 QP	101.4	-57.8	1.50 V	8	53.3	-9.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.
6. " # ": The radiated frequency is out of the restricted band.

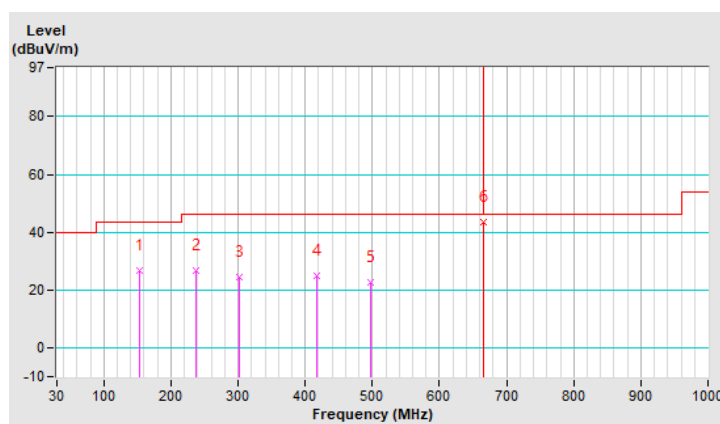


RF Mode	TX RFID	Channel	CH 50 : 927.4656 MHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	135.43	25.5 QP	43.5	-18.0	1.00 H	289	44.5	-19.0
2	152.30	27.6 QP	43.5	-15.9	1.50 H	229	45.6	-18.0
3	169.17	22.1 QP	43.5	-21.4	1.50 H	280	40.6	-18.5
4	236.65	30.4 QP	46.0	-15.6	1.00 H	338	50.4	-20.0
5	302.72	18.2 QP	46.0	-27.8	2.00 H	244	35.8	-17.6
6	#679.48	30.1 QP	88.8	-58.7	1.50 H	359	39.7	-9.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.
6. " # ": The radiated frequency is out of the restricted band.

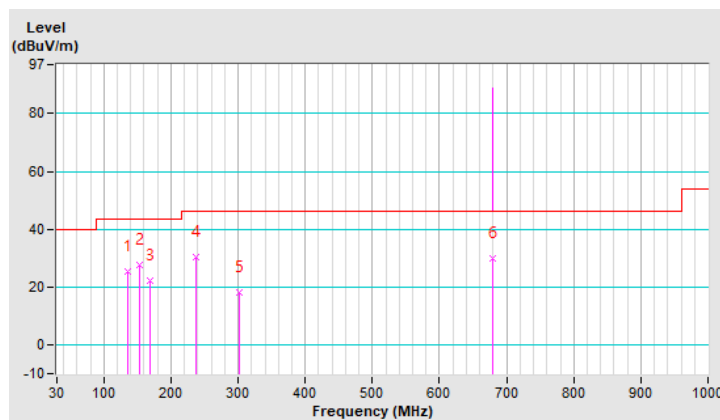


RF Mode	TX RFID	Channel	CH 50 : 927.4656 MHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	46.87	25.1 QP	40.0	-14.9	1.00 V	127	43.3	-18.2
2	100.00	21.7 QP	43.5	-21.8	1.50 V	6	44.4	-22.7
3	135.43	23.8 QP	43.5	-19.7	1.50 V	322	42.8	-19.0
4	152.30	24.0 QP	43.5	-19.5	1.50 V	2	42.0	-18.0
5	236.65	27.6 QP	46.0	-18.4	2.00 V	3	47.6	-20.0
6	#679.02	44.7 QP	100.1	-55.4	1.50 V	276	54.3	-9.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.
6. " # ": The radiated frequency is out of the restricted band.

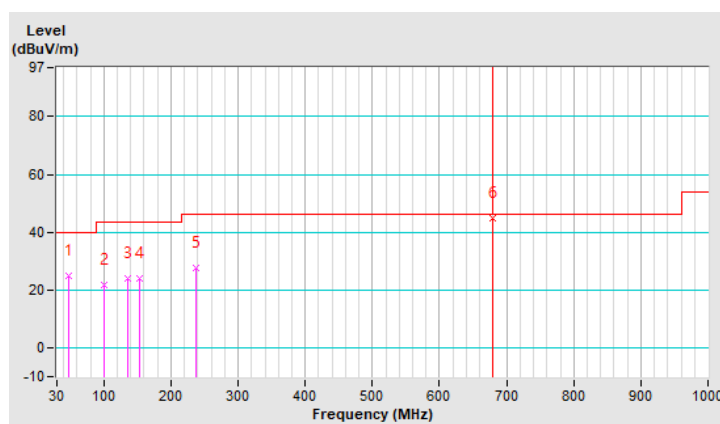


Mode A2

RF Mode	TX RFID	Channel	CH 1 : 902.3839 MHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	180.42	26.5 QP	43.5	-17.0	1.49 H	277	46.2	-19.7
2	236.65	29.0 QP	46.0	-17.0	1.49 H	123	49.0	-20.0
3	270.39	31.3 QP	46.0	-14.7	1.00 H	164	50.0	-18.7
4	285.86	29.0 QP	46.0	-17.0	1.00 H	161	46.9	-17.9
5	302.72	23.9 QP	46.0	-22.1	1.00 H	159	41.5	-17.6
6	#654.17	31.7 QP	87.0	-55.3	1.49 H	252	41.5	-9.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.
6. " # ": The radiated frequency is out of the restricted band.

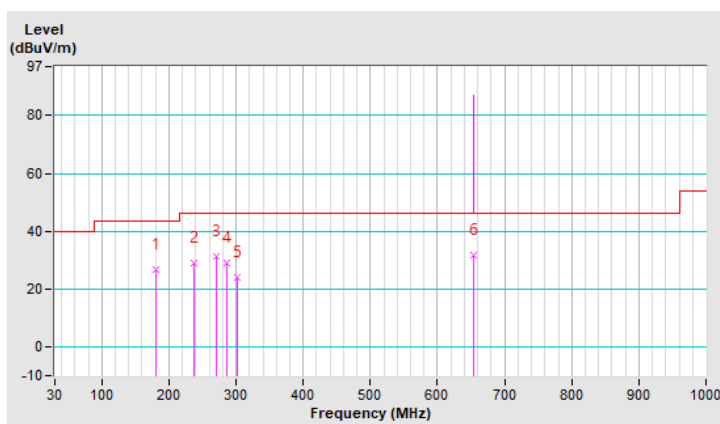


RF Mode	TX RFID	Channel	CH 1 : 902.3839 MHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	247.90	26.8 QP	46.0	-19.2	1.50 V	179	46.4	-19.6
2	270.39	28.8 QP	46.0	-17.2	1.99 V	208	47.5	-18.7
3	285.86	28.3 QP	46.0	-17.7	1.50 V	200	46.2	-17.9
4	575.45	24.3 QP	46.0	-21.7	1.00 V	142	35.5	-11.2
5	#653.95	42.0 QP	100.8	-58.8	1.50 V	10	51.8	-9.8
6	745.55	27.1 QP	46.0	-18.9	1.50 V	11	35.2	-8.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.
6. " # ": The radiated frequency is out of the restricted band.

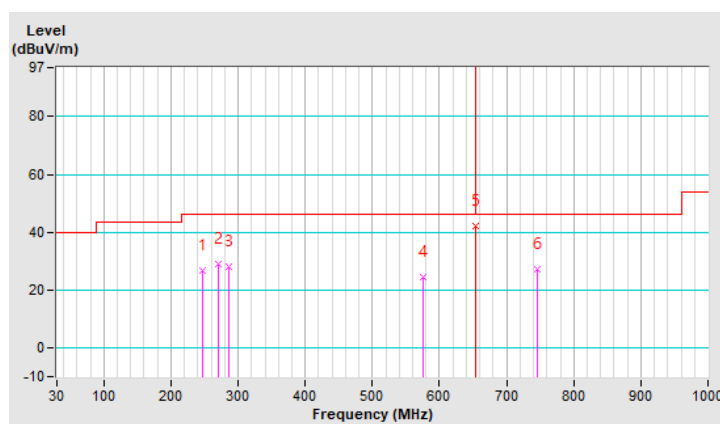


RF Mode	TX RFID	Channel	CH 25 : 914.9247 MHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	180.42	24.4 QP	43.5	-19.1	2.00 H	268	44.1	-19.7
2	190.26	22.2 QP	43.5	-21.3	1.51 H	279	43.2	-21.0
3	236.65	29.0 QP	46.0	-17.0	1.51 H	128	49.0	-20.0
4	270.39	31.3 QP	46.0	-14.7	1.01 H	156	50.0	-18.7
5	285.86	28.9 QP	46.0	-17.1	1.01 H	152	46.8	-17.9
6	#666.83	34.1 QP	89.2	-55.1	1.51 H	242	43.8	-9.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.
6. " # ": The radiated frequency is out of the restricted band.

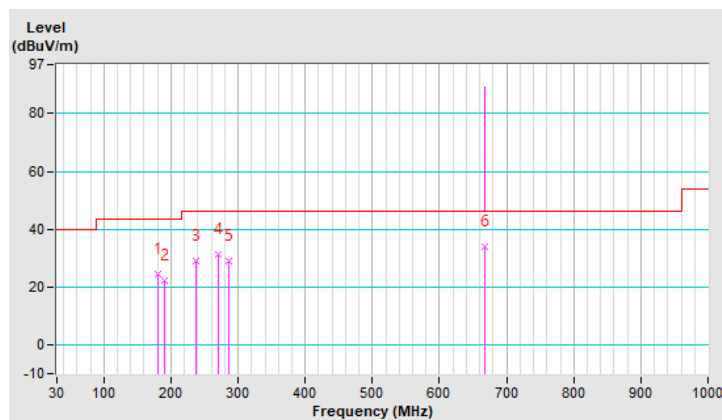


RF Mode	TX RFID	Channel	CH 25 : 914.9247 MHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	247.90	27.3 QP	46.0	-18.7	1.00 V	66	46.9	-19.6
2	270.39	28.8 QP	46.0	-17.2	1.99 V	207	47.5	-18.7
3	418.00	26.0 QP	46.0	-20.0	1.49 V	123	40.8	-14.8
4	496.72	29.2 QP	46.0	-16.8	1.00 V	36	42.1	-12.9
5	575.45	26.2 QP	46.0	-19.8	1.99 V	180	37.4	-11.2
6	#666.48	40.6 QP	101.4	-60.8	1.99 V	2	50.3	-9.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.
6. " # ": The radiated frequency is out of the restricted band.

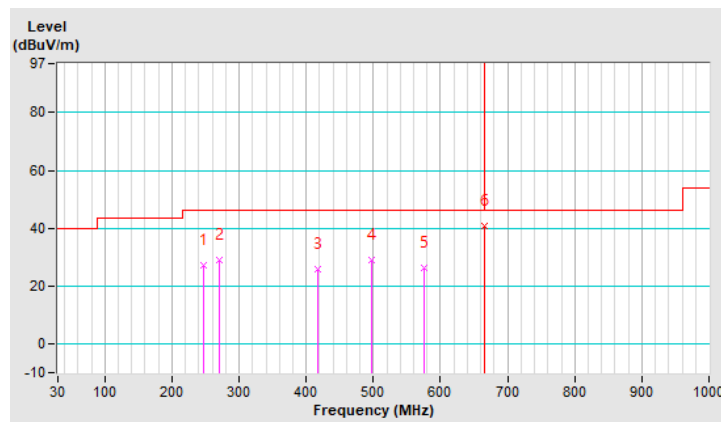


RF Mode	TX RFID	Channel	CH 50 : 927.4656 MHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	180.42	24.8 QP	43.5	-18.7	1.51 H	255	44.5	-19.7
2	236.65	29.0 QP	46.0	-17.0	1.01 H	137	49.0	-20.0
3	261.96	30.0 QP	46.0	-16.0	1.01 H	150	49.1	-19.1
4	270.39	31.4 QP	46.0	-14.6	1.01 H	149	50.1	-18.7
5	285.86	28.7 QP	46.0	-17.3	1.01 H	159	46.6	-17.9
6	#679.48	33.5 QP	88.8	-55.3	1.51 H	237	43.1	-9.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.
6. " # ": The radiated frequency is out of the restricted band.

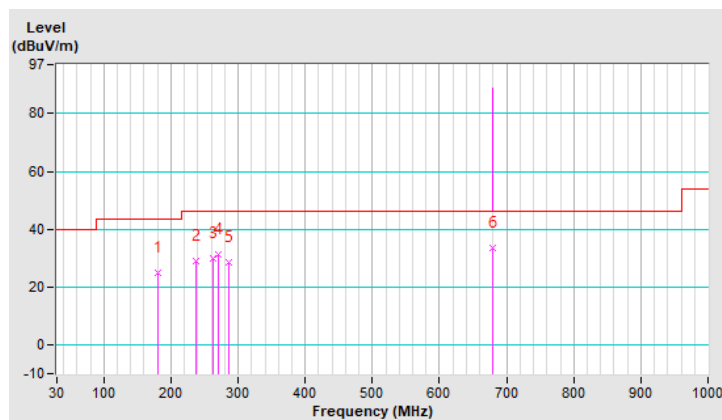


RF Mode	TX RFID	Channel	CH 50 : 927.4656 MHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	247.90	29.3 QP	46.0	-16.7	1.99 V	238	48.9	-19.6
2	270.39	29.0 QP	46.0	-17.0	1.99 V	221	47.7	-18.7
3	285.86	28.6 QP	46.0	-17.4	1.99 V	215	46.5	-17.9
4	575.45	25.9 QP	46.0	-20.1	1.01 V	82	37.1	-11.2
5	#679.02	42.7 QP	100.1	-57.4	1.51 V	138	52.3	-9.6
6	745.55	28.7 QP	46.0	-17.3	1.01 V	2	36.8	-8.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.
6. " # ": The radiated frequency is out of the restricted band.

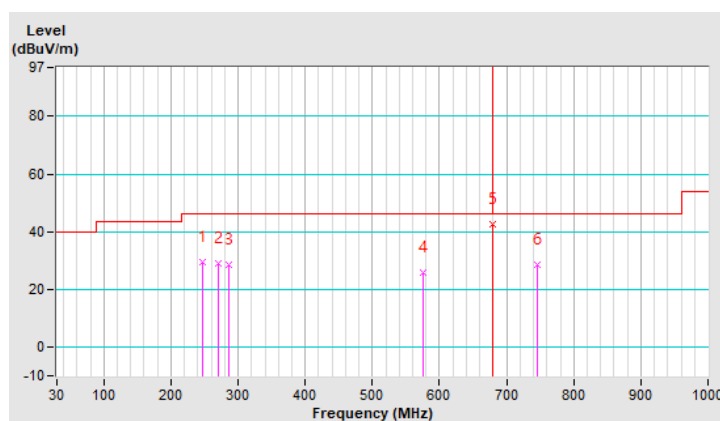


Mode B1

RF Mode	TX RFID	Channel	CH 1 : 902.3839 MHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	48.28	18.0 QP	40.0	-22.0	2.00 H	327	36.1	-18.1
2	129.81	20.6 QP	43.5	-22.9	1.51 H	124	40.1	-19.5
3	236.65	31.2 QP	46.0	-14.8	1.51 H	246	51.2	-20.0
4	270.39	30.2 QP	46.0	-15.8	1.01 H	254	48.9	-18.7
5	405.35	20.7 QP	46.0	-25.3	1.01 H	230	35.7	-15.0
6	#654.17	33.7 QP	87.0	-53.3	2.00 H	90	43.5	-9.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.
6. " # ": The radiated frequency is out of the restricted band.

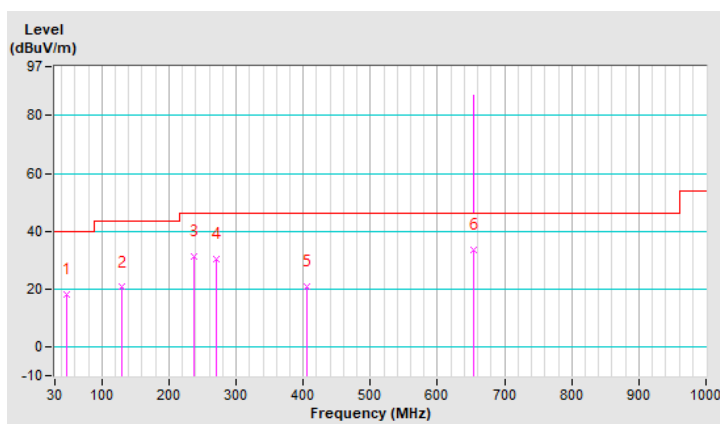


RF Mode	TX RFID	Channel	CH 1 : 902.3839 MHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	66.55	18.6 QP	40.0	-21.4	1.00 V	281	38.4	-19.8
2	129.81	17.8 QP	43.5	-25.7	1.49 V	140	37.3	-19.5
3	236.65	30.8 QP	46.0	-15.2	1.00 V	205	50.8	-20.0
4	270.39	28.8 QP	46.0	-17.2	1.99 V	256	47.5	-18.7
5	405.35	21.4 QP	46.0	-24.6	1.00 V	356	36.4	-15.0
6	#654.17	44.6 QP	100.8	-56.2	1.49 V	329	54.4	-9.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.
6. " # ": The radiated frequency is out of the restricted band.

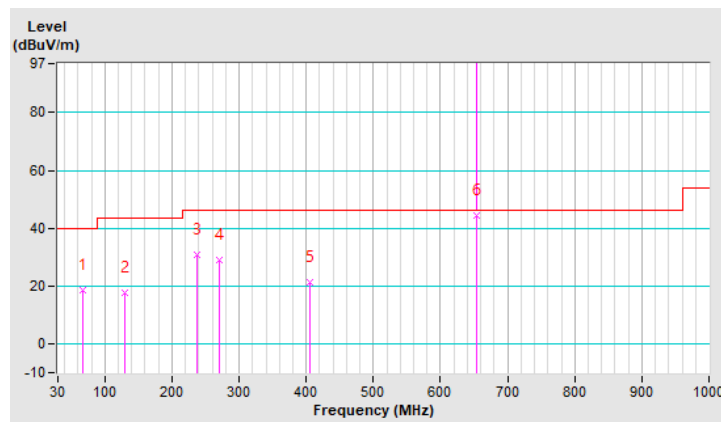


RF Mode	TX RFID	Channel	CH 25 : 914.9247 MHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	48.28	17.6 QP	40.0	-22.4	1.01 H	274	35.7	-18.1
2	135.43	18.6 QP	43.5	-24.9	1.50 H	90	37.6	-19.0
3	247.90	34.4 QP	46.0	-11.6	1.01 H	255	54.0	-19.6
4	302.72	24.7 QP	46.0	-21.3	1.01 H	244	42.3	-17.6
5	418.00	26.7 QP	46.0	-19.3	1.01 H	244	41.5	-14.8
6	#666.83	35.8 QP	89.2	-53.4	1.01 H	71	45.5	-9.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.
6. " # ": The radiated frequency is out of the restricted band.

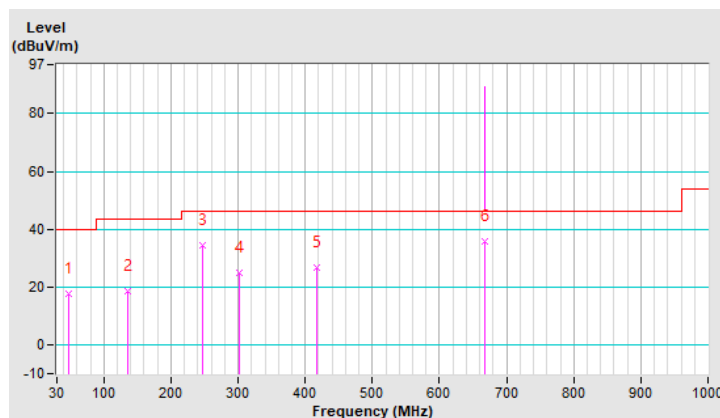


RF Mode	TX RFID	Channel	CH 25 : 914.9247 MHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	66.55	19.4 QP	40.0	-20.6	1.99 V	158	39.2	-19.8
2	129.81	22.2 QP	43.5	-21.3	1.99 V	128	41.7	-19.5
3	247.90	32.4 QP	46.0	-13.6	1.00 V	228	52.0	-19.6
4	288.67	25.1 QP	46.0	-20.9	1.00 V	270	42.9	-17.8
5	418.00	26.9 QP	46.0	-19.1	1.00 V	248	41.7	-14.8
6	#666.83	35.7 QP	101.4	-65.7	1.00 V	83	45.4	-9.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.
6. " # ": The radiated frequency is out of the restricted band.

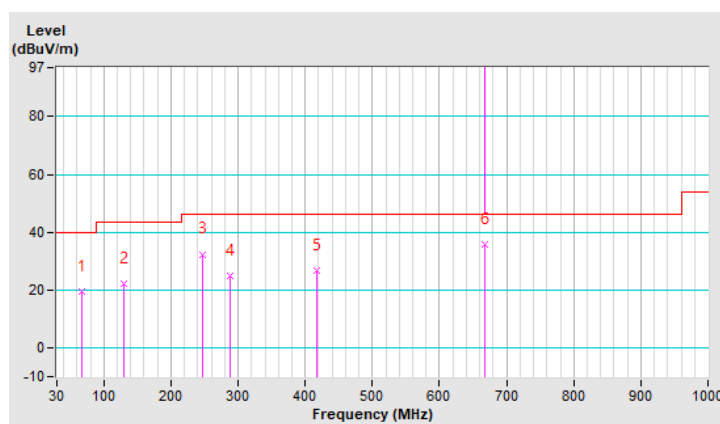


RF Mode	TX RFID	Channel	CH 50 : 927.4656 MHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	66.55	18.4 QP	40.0	-21.6	2.00 H	176	38.2	-19.8
2	131.22	21.4 QP	43.5	-22.1	1.49 H	98	40.8	-19.4
3	236.65	31.2 QP	46.0	-14.8	1.49 H	260	51.2	-20.0
4	270.39	30.5 QP	46.0	-15.5	1.00 H	254	49.2	-18.7
5	302.72	26.0 QP	46.0	-20.0	1.00 H	257	43.6	-17.6
6	#679.48	36.6 QP	88.8	-52.2	1.00 H	95	46.2	-9.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.
6. " # ": The radiated frequency is out of the restricted band.

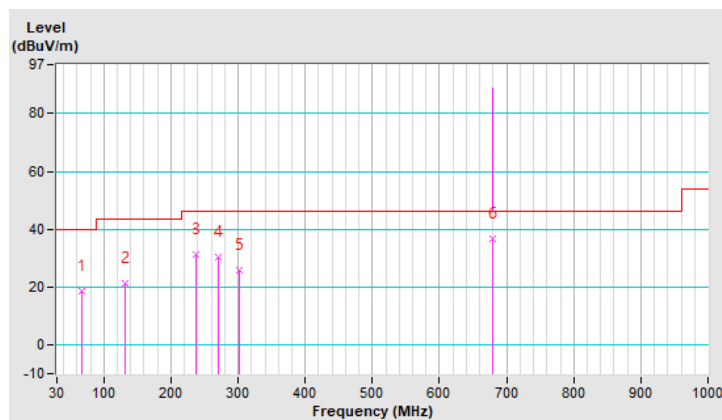


RF Mode	TX RFID	Channel	CH 50 : 927.4656 MHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	67.96	18.7 QP	40.0	-21.3	1.01 V	183	38.8	-20.1
2	131.22	19.4 QP	43.5	-24.1	1.50 V	123	38.8	-19.4
3	236.65	30.4 QP	46.0	-15.6	1.01 V	206	50.4	-20.0
4	270.39	26.8 QP	46.0	-19.2	1.50 V	108	45.5	-18.7
5	325.22	26.4 QP	46.0	-19.6	1.50 V	141	43.3	-16.9
6	#679.48	44.7 QP	100.1	-55.4	1.50 V	350	54.3	-9.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.
6. " # ": The radiated frequency is out of the restricted band.

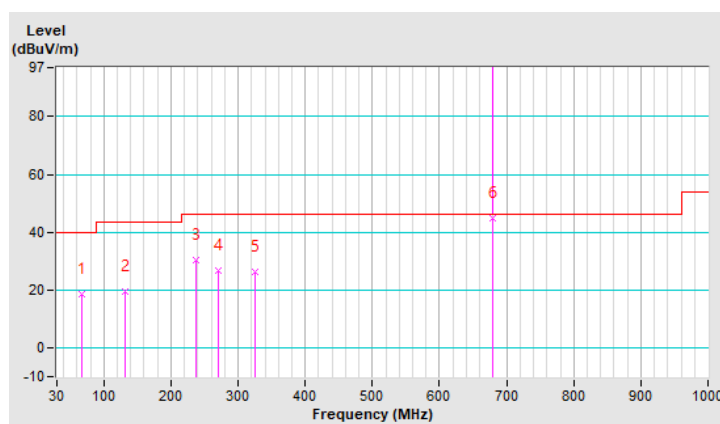


Mode B2

RF Mode	TX RFID	Channel	CH 1 : 902.3839 MHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	169.17	23.1 QP	43.5	-20.4	1.51 H	244	41.6	-18.5
2	236.65	27.1 QP	46.0	-18.9	1.51 H	351	47.1	-20.0
3	247.90	27.2 QP	46.0	-18.8	2.00 H	18	46.8	-19.6
4	285.86	24.1 QP	46.0	-21.9	1.01 H	226	42.0	-17.9
5	#654.17	32.8 QP	87.0	-54.2	2.00 H	292	42.6	-9.8
6	842.55	27.2 QP	46.0	-18.8	1.51 H	277	34.1	-6.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.
6. " # ": The radiated frequency is out of the restricted band.

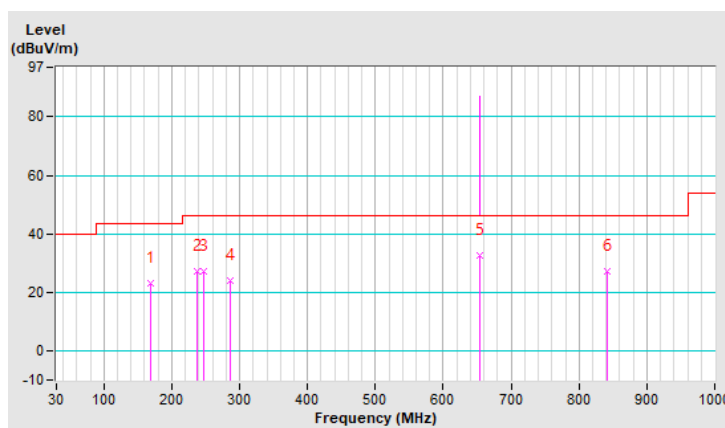


RF Mode	TX RFID	Channel	CH 1 : 902.3839 MHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	44.06	19.0 QP	40.0	-21.0	1.01 V	285	37.2	-18.2
2	171.99	20.5 QP	43.5	-23.0	1.01 V	241	39.2	-18.7
3	236.65	28.6 QP	46.0	-17.4	2.00 V	299	48.6	-20.0
4	247.90	26.1 QP	46.0	-19.9	2.00 V	142	45.7	-19.6
5	576.86	25.9 QP	46.0	-20.1	1.01 V	166	37.0	-11.1
6	#653.95	42.1 QP	100.8	-58.7	1.51 V	315	51.9	-9.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.
6. " # ": The radiated frequency is out of the restricted band.

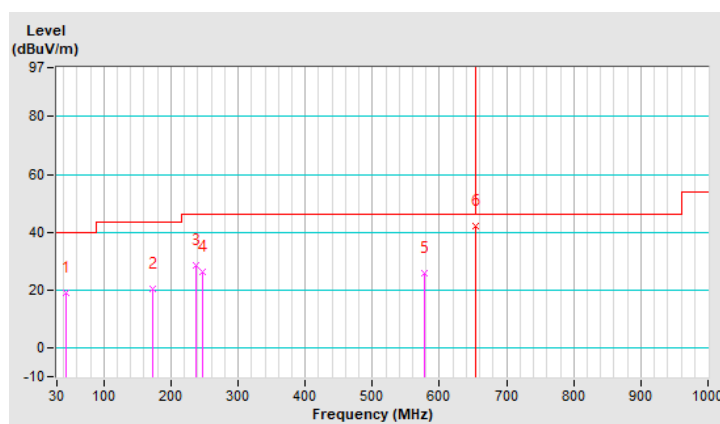


RF Mode	TX RFID	Channel	CH 25 : 914.9247 MHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	45.46	20.7 QP	40.0	-19.3	1.99 H	228	38.9	-18.2
2	167.77	23.7 QP	43.5	-19.8	1.49 H	251	42.1	-18.4
3	180.42	22.7 QP	43.5	-20.8	1.49 H	2	42.4	-19.7
4	247.90	30.2 QP	46.0	-15.8	1.49 H	356	49.8	-19.6
5	418.00	23.6 QP	46.0	-22.4	1.00 H	327	38.4	-14.8
6	#666.83	34.9 QP	89.2	-54.3	1.99 H	95	44.6	-9.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.
6. " # ": The radiated frequency is out of the restricted band.

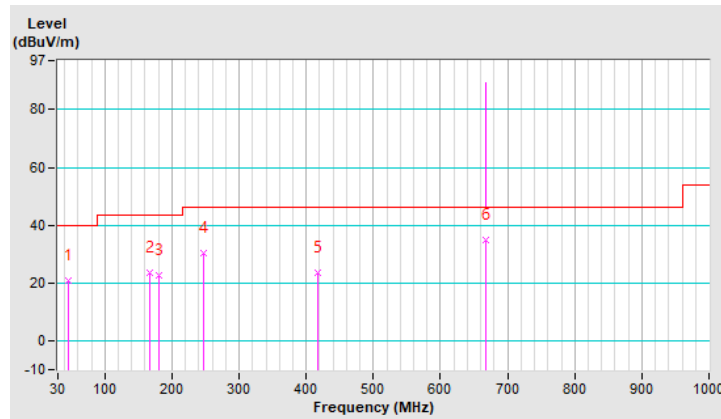


RF Mode	TX RFID	Channel	CH 25 : 914.9247 MHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	236.65	28.4 QP	46.0	-17.6	2.00 V	298	48.4	-20.0
2	247.90	28.6 QP	46.0	-17.4	1.51 V	257	48.2	-19.6
3	312.57	23.8 QP	46.0	-22.2	1.51 V	344	41.1	-17.3
4	418.00	27.7 QP	46.0	-18.3	1.01 V	2	42.5	-14.8
5	496.72	27.1 QP	46.0	-18.9	1.01 V	300	40.0	-12.9
6	#666.83	43.0 QP	101.4	-58.4	1.51 V	320	52.7	-9.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.
6. " # ": The radiated frequency is out of the restricted band.

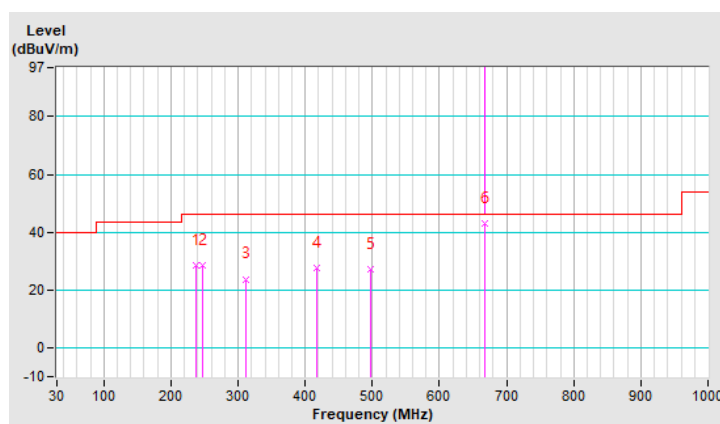


RF Mode	TX RFID	Channel	CH 50 : 927.4656 MHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	38.43	24.7 QP	40.0	-15.3	1.49 H	256	43.5	-18.8
2	169.17	26.2 QP	43.5	-17.3	1.49 H	255	44.7	-18.5
3	236.65	27.3 QP	46.0	-18.7	1.49 H	329	47.3	-20.0
4	247.90	29.2 QP	46.0	-16.8	1.99 H	18	48.8	-19.6
5	270.39	25.3 QP	46.0	-20.7	1.49 H	330	44.0	-18.7
6	#679.48	36.1 QP	88.8	-52.7	1.00 H	85	45.7	-9.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.
6. " # ": The radiated frequency is out of the restricted band.

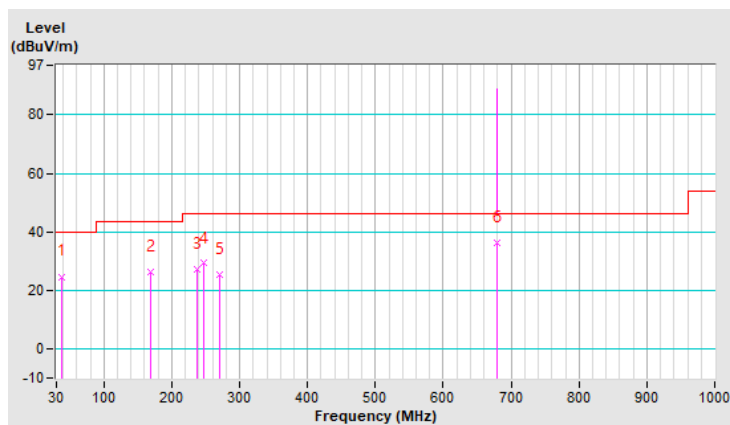


RF Mode	TX RFID	Channel	CH 50 : 927.4656 MHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	167.77	20.7 QP	43.5	-22.8	1.01 V	278	39.1	-18.4
2	236.65	28.7 QP	46.0	-17.3	2.00 V	310	48.7	-20.0
3	247.90	29.4 QP	46.0	-16.6	1.51 V	47	49.0	-19.6
4	285.86	23.0 QP	46.0	-23.0	2.00 V	55	40.9	-17.9
5	312.57	23.6 QP	46.0	-22.4	2.00 V	18	40.9	-17.3
6	#679.02	43.3 QP	100.1	-56.8	1.51 V	134	52.9	-9.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.
6. " # ": The radiated frequency is out of the restricted band.

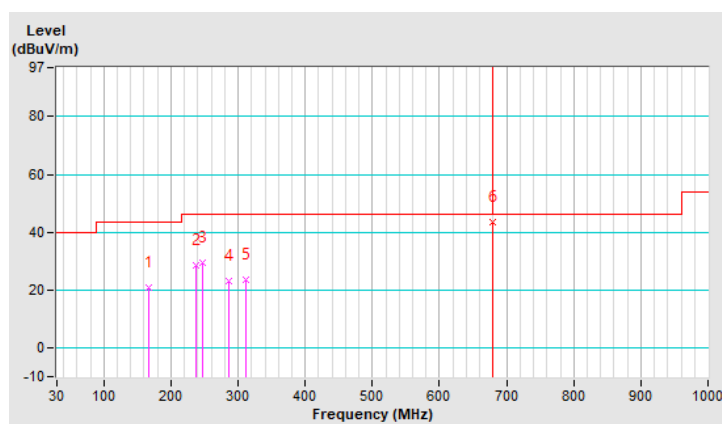

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver ROHDE & SCHWARZ	ESR3	102783	Dec. 21, 2020	Dec. 20, 2021
RF signal cable (with 10dB PAD) Woken	5D-FB	Cable-cond2-01	Sep. 04, 2021	Sep. 03, 2022
LISN/AMN ROHDE & SCHWARZ (EUT)	ESH2-Z5	100100	Jan. 28, 2021	Jan. 27, 2022
LISN/AMN ROHDE & SCHWARZ (Peripheral)	ENV216	101196	Apr. 26, 2021	Apr. 25, 2022
Software ADT	BV ADT_Conc_ V7.3.7.4	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in HwaYa Shielded Room 2 (Conduction 2).

3. The VCCI Site Registration No. is C-20407.

4. Test Date: Nov. 11 ~ Dec. 02, 2021.

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

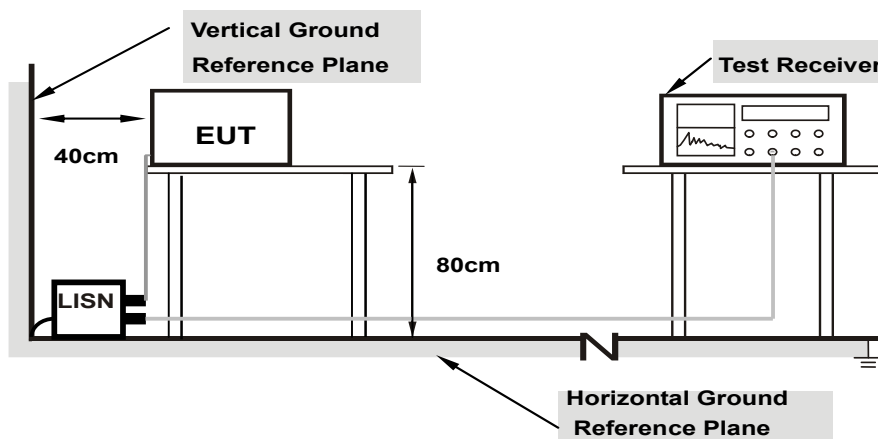

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.


4.2.7 Test Results

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Channel	CH 1 : 902.3839 MHz	Mode	A1

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.12	39.85	22.71	49.97	32.83	66.00	56.00	-16.03	-23.17
2	0.19000	10.14	42.14	31.16	52.28	41.30	64.04	54.04	-11.76	-12.74
3	0.24600	10.17	22.85	7.56	33.02	17.73	61.89	51.89	-28.87	-34.16
4	0.35000	10.20	26.72	16.04	36.92	26.24	58.96	48.96	-22.04	-22.72
5	6.11800	10.43	22.78	16.10	33.21	26.53	60.00	50.00	-26.79	-23.47
6	23.48200	10.57	13.76	7.93	24.33	18.50	60.00	50.00	-35.67	-31.50

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

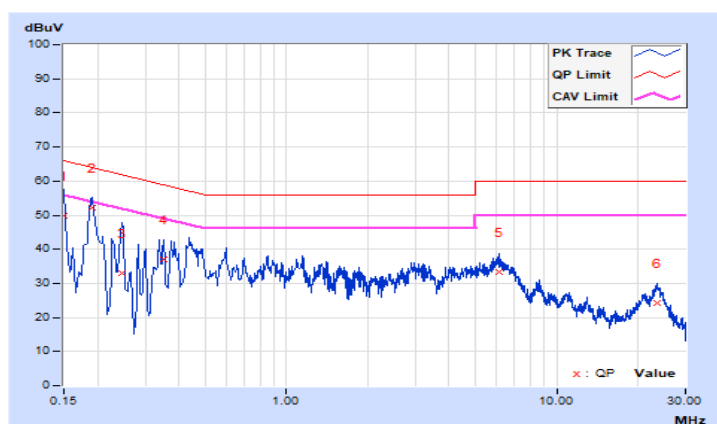


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Channel	CH 1 : 902.3839 MHz	Mode	A1

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15687	10.14	29.52	11.50	39.66	21.64	65.63	55.63	-25.97	-33.99
2	0.18600	10.16	27.92	9.75	38.08	19.91	64.21	54.21	-26.13	-34.30
3	0.45400	10.24	24.68	11.64	34.92	21.88	56.80	46.80	-21.88	-24.92
4	1.14200	10.30	15.91	14.87	26.21	25.17	56.00	46.00	-29.79	-20.83
5	6.06200	10.47	19.73	14.03	30.20	24.50	60.00	50.00	-29.80	-25.50
6	23.95800	10.74	9.21	3.71	19.95	14.45	60.00	50.00	-40.05	-35.55

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

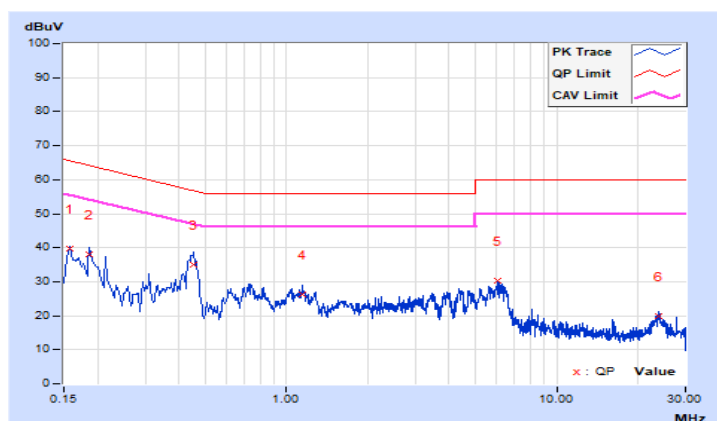


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Channel	CH 1 : 902.3839 MHz	Mode	A2

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15400	10.12	32.60	21.25	42.72	31.37	65.78	55.78	-23.06	-24.41
2	0.18600	10.14	34.25	27.96	44.39	38.10	64.21	54.21	-19.82	-16.11
3	0.22600	10.16	31.97	22.79	42.13	32.95	62.60	52.60	-20.47	-19.65
4	0.45356	10.23	29.09	22.56	39.32	32.79	56.81	46.81	-17.49	-14.02
5	1.28200	10.30	20.39	14.32	30.69	24.62	56.00	46.00	-25.31	-21.38
6	5.33000	10.41	23.46	17.04	33.87	27.45	60.00	50.00	-26.13	-22.55

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

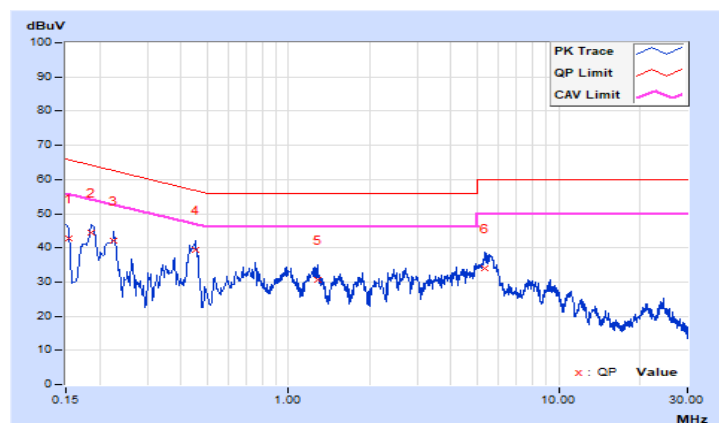


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Channel	CH 1 : 902.3839 MHz	Mode	A2

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.14	32.56	19.02	42.70	29.16	66.00	56.00	-23.30	-26.84
2	0.21000	10.17	31.48	24.14	41.65	34.31	63.21	53.21	-21.56	-18.90
3	0.44527	10.24	27.67	21.24	37.91	31.48	56.96	46.96	-19.05	-15.48
4	1.54200	10.32	19.22	13.53	29.54	23.85	56.00	46.00	-26.46	-22.15
5	2.70200	10.37	19.84	13.99	30.21	24.36	56.00	46.00	-25.79	-21.64
6	5.52200	10.45	22.09	15.45	32.54	25.90	60.00	50.00	-27.46	-24.10

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

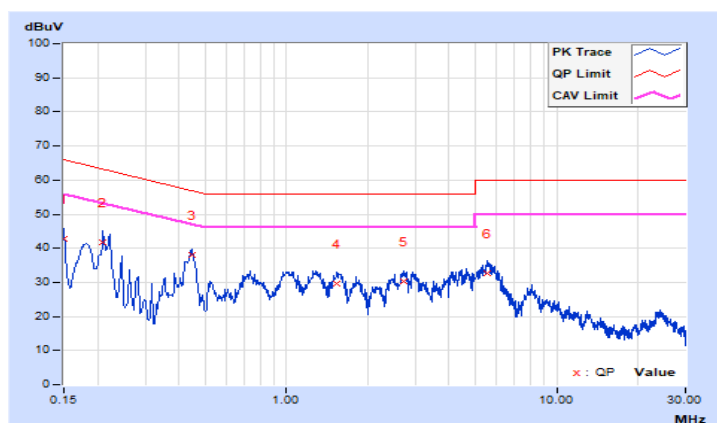


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Channel	CH 1 : 902.3839 MHz	Mode	B1

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16148	10.13	17.66	7.90	27.79	18.03	65.39	55.39	-37.60	-37.36
2	0.19000	10.14	18.07	8.89	28.21	19.03	64.04	54.04	-35.83	-35.01
3	0.26200	10.17	17.00	2.68	27.17	12.85	61.37	51.37	-34.20	-38.52
4	0.50931	10.23	21.02	11.81	31.25	22.04	56.00	46.00	-24.75	-23.96
5	0.82600	10.26	11.12	2.74	21.38	13.00	56.00	46.00	-34.62	-33.00
6	11.65000	10.53	16.70	10.52	27.23	21.05	60.00	50.00	-32.77	-28.95

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

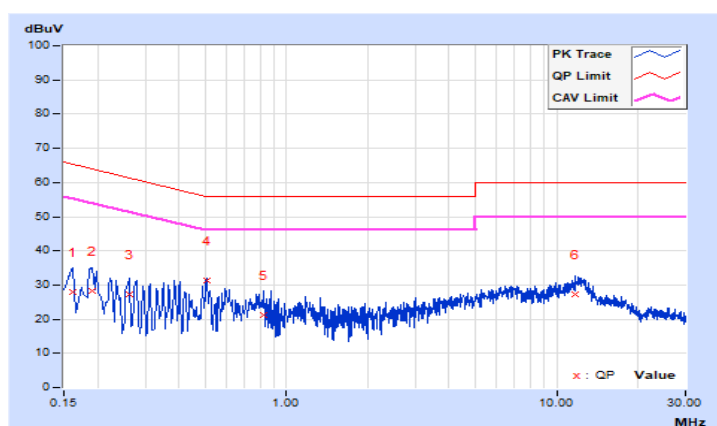


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Channel	CH 1 : 902.3839 MHz	Mode	B1

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15400	10.14	19.98	15.18	30.12	25.32	65.78	55.78	-35.66	-30.46
2	0.62600	10.26	10.95	5.06	21.21	15.32	56.00	46.00	-34.79	-30.68
3	0.77400	10.27	9.20	1.79	19.47	12.06	56.00	46.00	-36.53	-33.94
4	1.22200	10.30	7.45	0.56	17.75	10.86	56.00	46.00	-38.25	-35.14
5	12.08600	10.64	13.39	7.79	24.03	18.43	60.00	50.00	-35.97	-31.57
6	23.64600	10.75	10.25	8.39	21.00	19.14	60.00	50.00	-39.00	-30.86

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

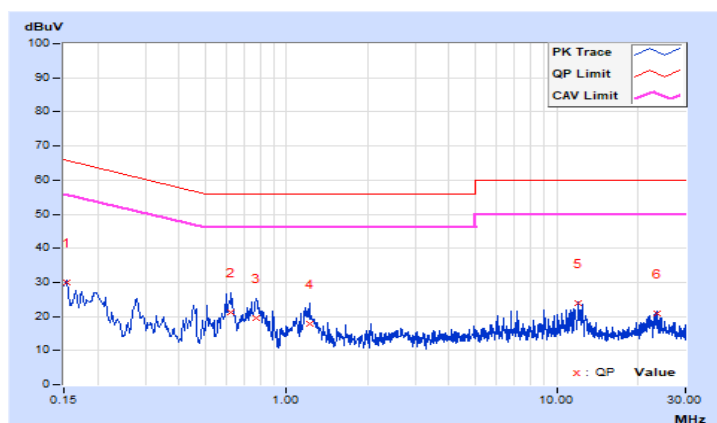


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Channel	CH 1 : 902.3839 MHz	Mode	B2

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.18600	10.14	35.20	24.73	45.34	34.87	64.21	54.21	-18.87	-19.34
2	0.23800	10.16	20.13	4.96	30.29	15.12	62.17	52.17	-31.88	-37.05
3	0.25800	10.17	23.96	8.62	34.13	18.79	61.50	51.50	-27.37	-32.71
4	0.35000	10.20	21.02	13.13	31.22	23.33	58.96	48.96	-27.74	-25.63
5	0.43370	10.22	27.34	20.15	37.56	30.37	57.18	47.18	-19.62	-16.81
6	0.65000	10.25	21.90	15.08	32.15	25.33	56.00	46.00	-23.85	-20.67

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

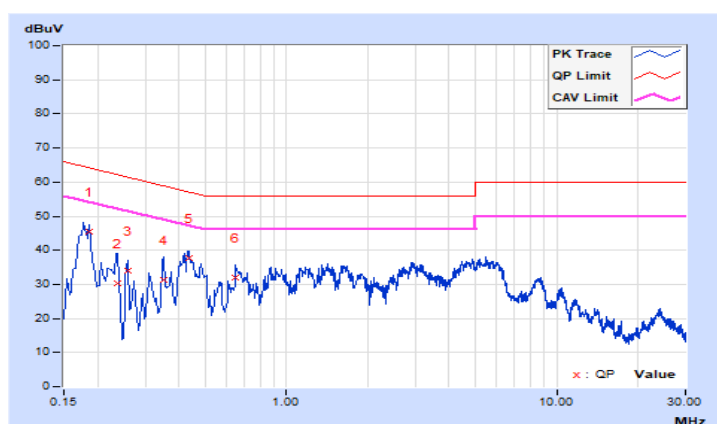


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Channel	CH 1 : 902.3839 MHz	Mode	B2

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17708	10.16	36.16	30.59	46.32	40.75	64.62	54.62	-18.30	-13.87
2	0.21400	10.17	29.00	17.41	39.17	27.58	63.05	53.05	-23.88	-25.47
3	0.43800	10.24	27.06	21.40	37.30	31.64	57.10	47.10	-19.80	-15.46
4	2.89800	10.38	22.59	15.51	32.97	25.89	56.00	46.00	-23.03	-20.11
5	5.49800	10.45	22.73	16.67	33.18	27.12	60.00	50.00	-26.82	-22.88
6	8.72200	10.54	17.12	11.39	27.66	21.93	60.00	50.00	-32.34	-28.07

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

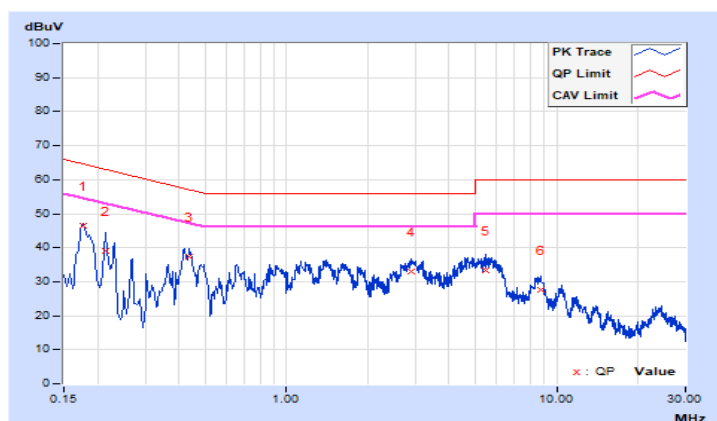


4.3 Number of Hopping Frequency Used

4.3.1 Limits of Hopping Frequency Used Measurement

The 20 dB bandwidth of the hopping channel is less than 250 kHz, at least 50 channels frequencies, and should be equally spaced.

4.3.2 Test Setup



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure


- Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- Set the SA on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
- Set the SA on View mode and then plot the result on SA screen.
- Repeat above procedures until all frequencies measured were complete.

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 Test Results

There are 50 hopping frequencies in the hopping mode. Please refer to next page for the test result. On the plots, it shows that the hopping frequencies are equally spaced.

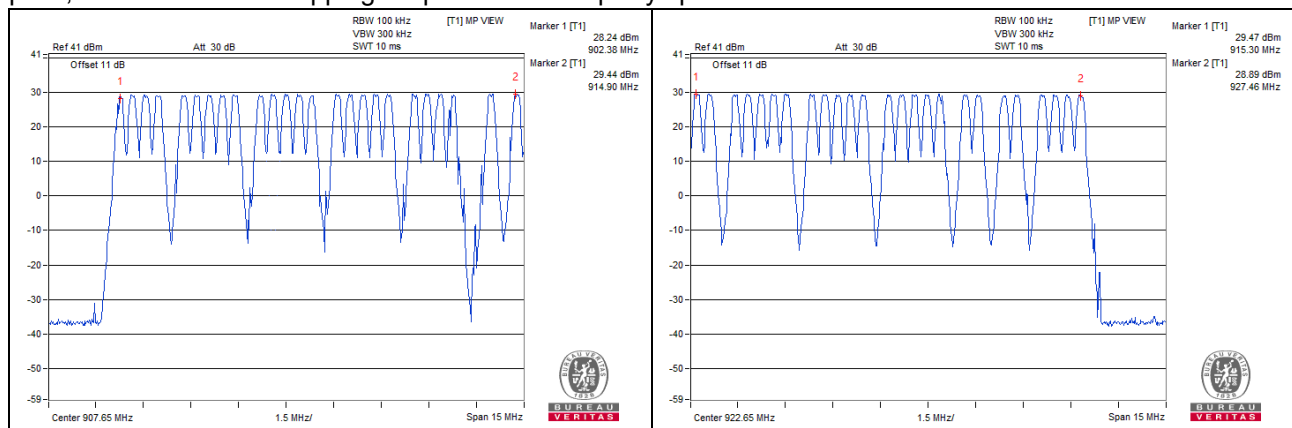

4.4 Dwell Time on Each Channel

4.4.1 Limits of Dwell Time on Each Channel Measurement

The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period. (If the 20 dB bandwidth of the hopping channel is less than 250 kHz)

4.4.2 Test Setup



4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.4 Test Procedures

- Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
- Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
- Repeat above procedures until all different time-slot modes have been completed.


4.4.5 Deviation from Test Standard

No deviation.

4.4.6 Test Results

Number of transmission in a period	Length of transmission time (msec)	Result (msec)	Limit (msec)
40 times	0.942	37.68	400

Note: Test plots of the transmitting time slot are shown as below.

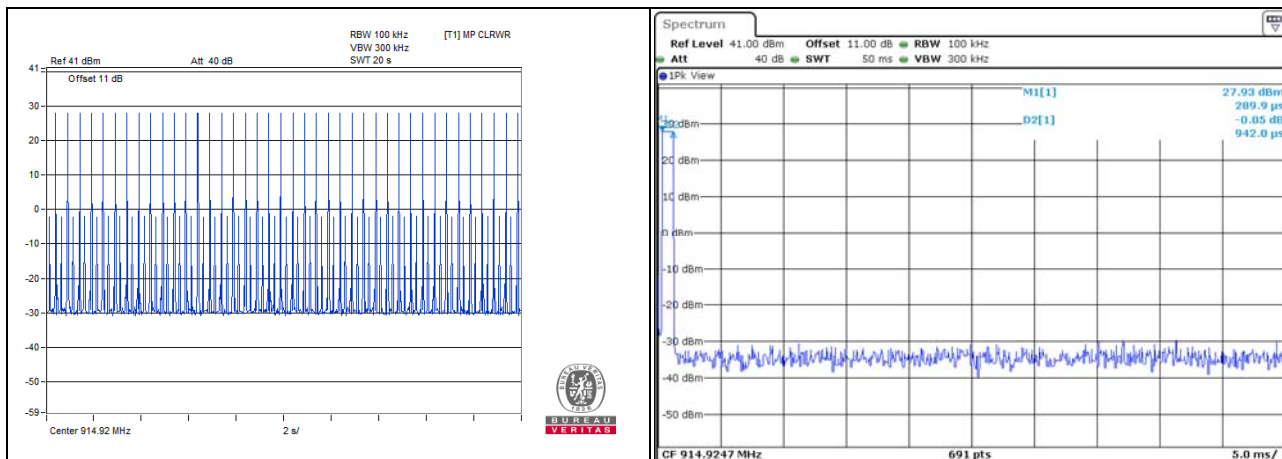

4.5 Channel Bandwidth

4.5.1 Limits of Channel Bandwidth Measurement

The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

4.5.2 Test Setup



4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedure

- Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
- Repeat above procedures until all frequencies measured were complete.

4.5.5 Deviation from Test Standard


No deviation.

4.5.6 EUT Operating Condition

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

4.5.7 Test Results

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Limit (MHz)
1	902.3839	0.21840	0.50
25	914.9247	0.22178	0.50
50	927.4656	0.22095	0.50

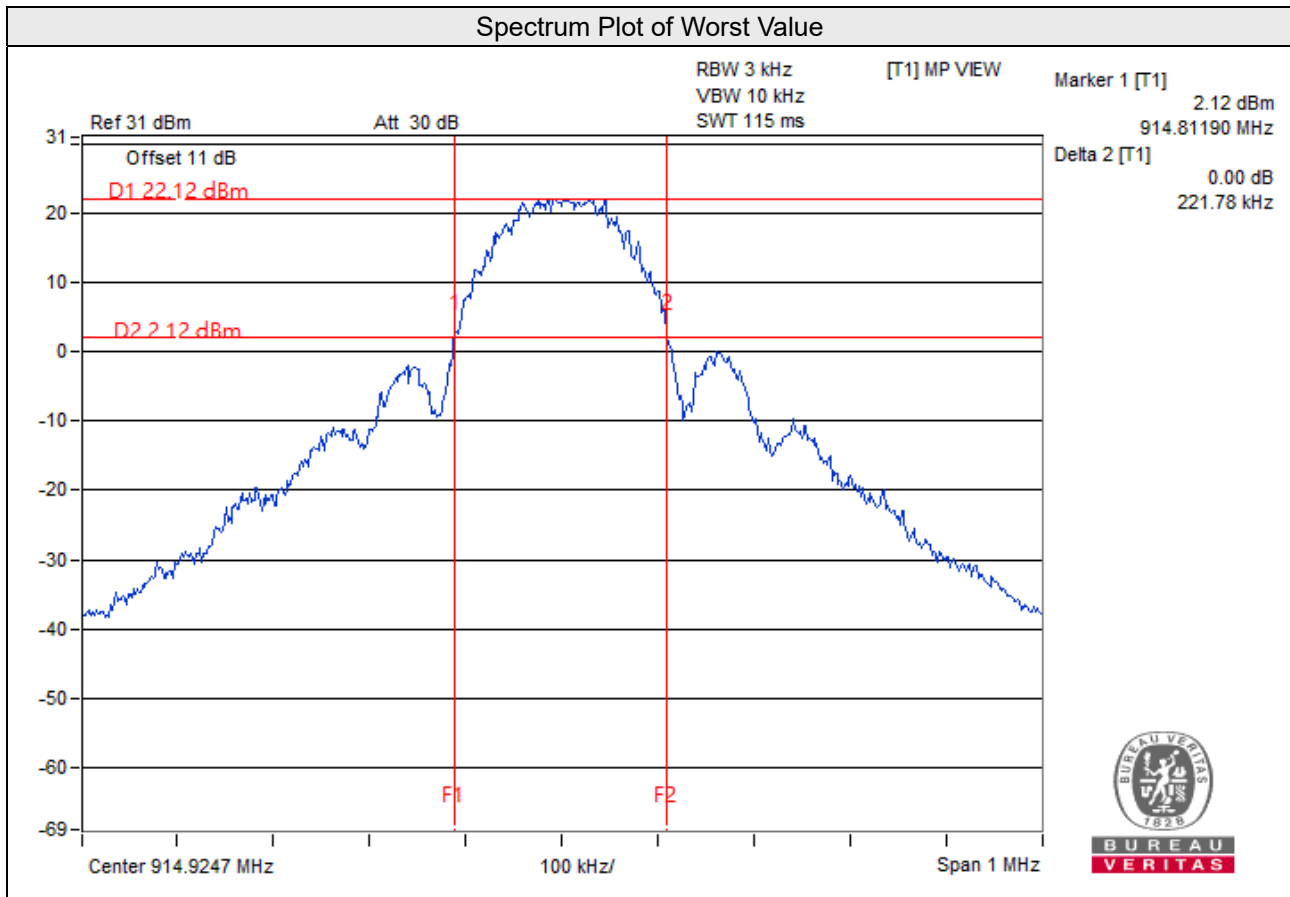


4.6 Hopping Channel Separation

4.6.1 Limits of Hopping Channel Separation Measurement

At least 25kHz or 20dB hopping channel bandwidth (whichever is greater).

4.6.2 Test Setup



4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

Measurement Procedure REF


- Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
- By using the MaxHold function record the separation of two adjacent channels.
- Measure the frequency difference of these two adjacent channels by SA MARK function. And then plot the result on SA screen.
- Repeat above procedures until all frequencies measured were complete.

4.6.5 Deviation from Test Standard

No deviation.

4.6.6 Test Results

Channel	Frequency (MHz)	Adjacent Channel Separation (MHz)	Minimum Limit (MHz)	Pass / Fail
1	902.3839	0.403846	0.21840	Pass
25	914.9247	0.403949	0.22178	Pass
50	927.4656	0.404000	0.22095	Pass

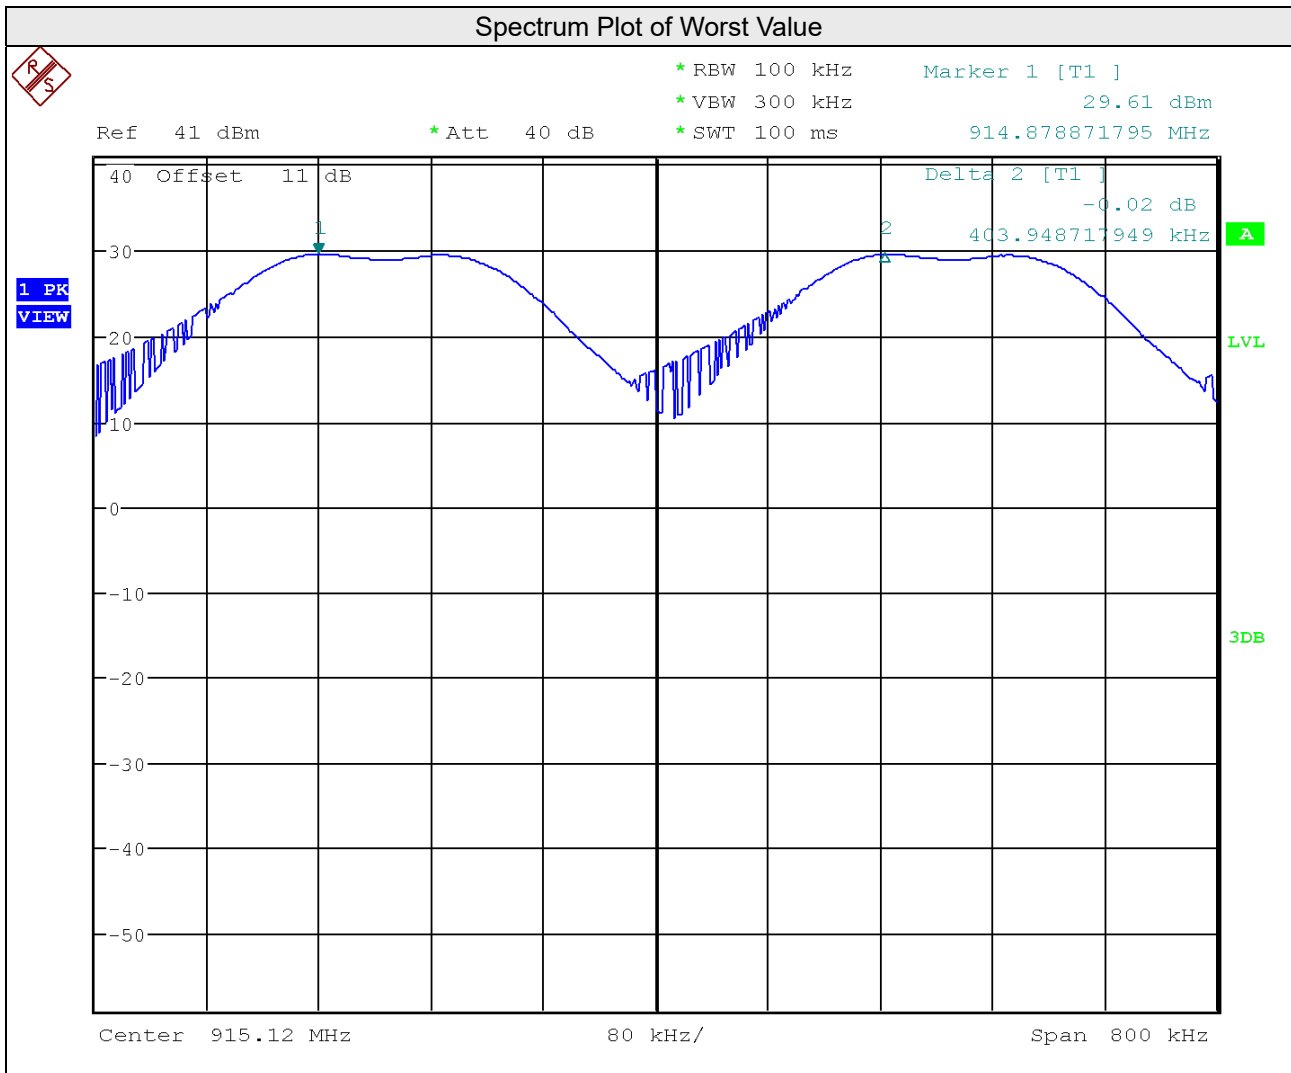


4.7 Maximum Output Power

4.7.1 Limits of Maximum Output Power Measurement

For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels.

4.7.2 Test Setup



4.7.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.7.4 Test Procedure

For Peak Power

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

For Average Power

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

4.7.5 Deviation from Test Standard

No deviation.

4.7.6 EUT Operating Condition

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

4.7.7 Test Results

For Peak Power

Channel	Frequency (MHz)	Output Power (mW)	Output Power (dBm)	Power Limit (dBm)	Pass / Fail
1	902.3839	756.833	28.79	30.00	Pass
25	914.9247	814.704	29.11	30.00	Pass
50	927.4656	779.830	28.92	30.00	Pass

For Average Power

Channel	Frequency (MHz)	Output Power (mW)	Output Power (dBm)
1	902.3839	726.106	28.61
25	914.9247	796.159	29.01
50	927.4656	746.449	28.73

4.8 Conducted Out of Band Emission Measurement

4.8.1 Limits Of Conducted Out Of Band Emission Measurement

Below 20dB of the highest emission level of operating band (in 100kHz RBW).

4.8.2 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.8.3 Test Procedure

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz and 300 kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

4.8.4 Deviation from Test Standard

No deviation.



4.8.5 EUT Operating Condition

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.



4.8.6 Test Results

The spectrum plots are attached on the following images. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.



Hopping disabled_ Low Channel

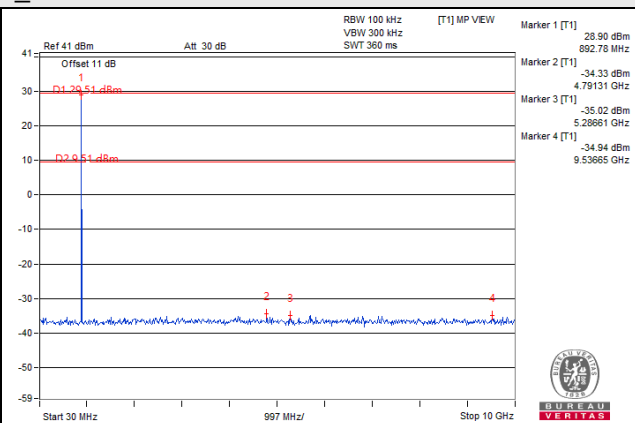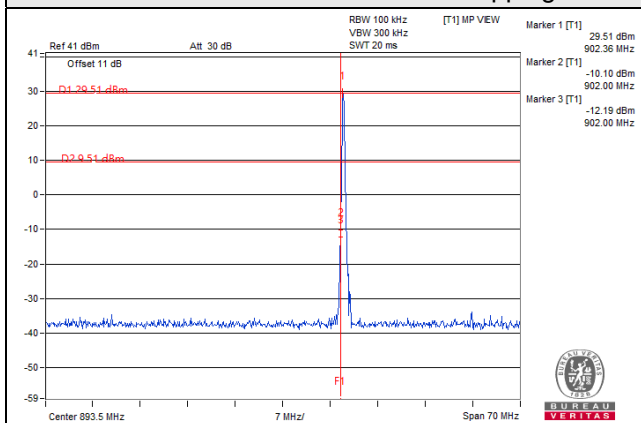

Hopping disabled_ High Channel

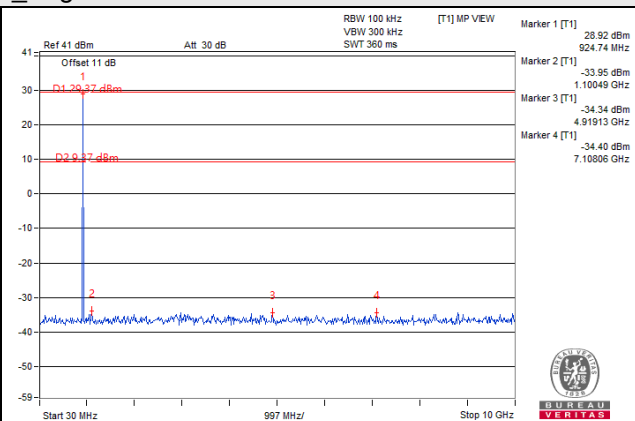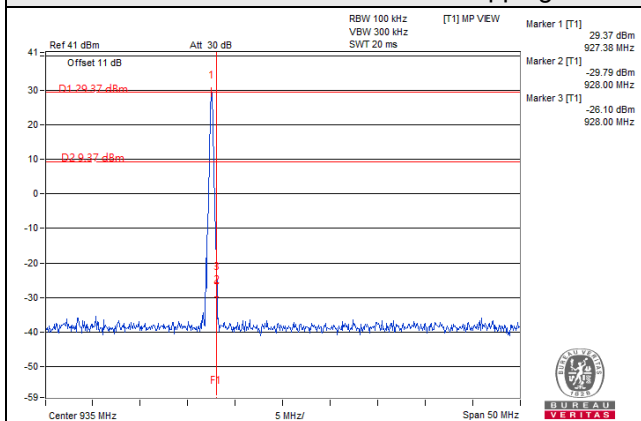

Hopping enabled

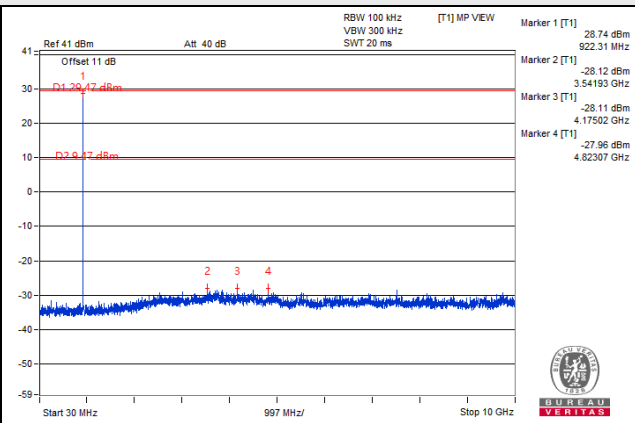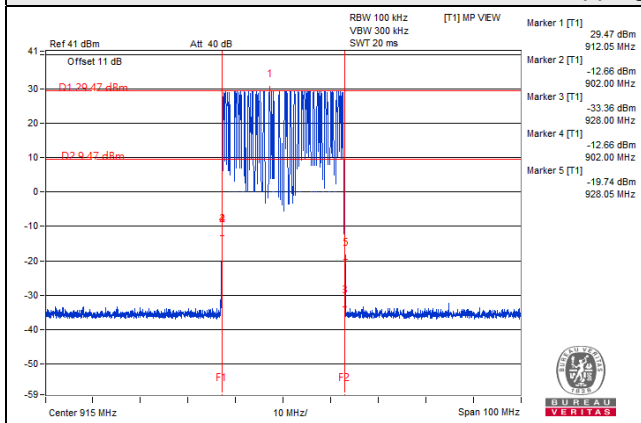

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---