

Test Report No.10043195 001

Appendix D: Radiated Spurious Emission Data

(File: 10043195AppendixD)

Contents

Spurious Emissions, Band Edges, 2.35-2.5G 2



Spurious Emissions, TX Mode, 1-18G..... 10

Spurious Emissions, TX Mode, 18-26G..... 22



Spurious Emissions, TX Mode, 30M-1G 34

Radiated Bandedge (GFSK)

Low Channel (Hor)

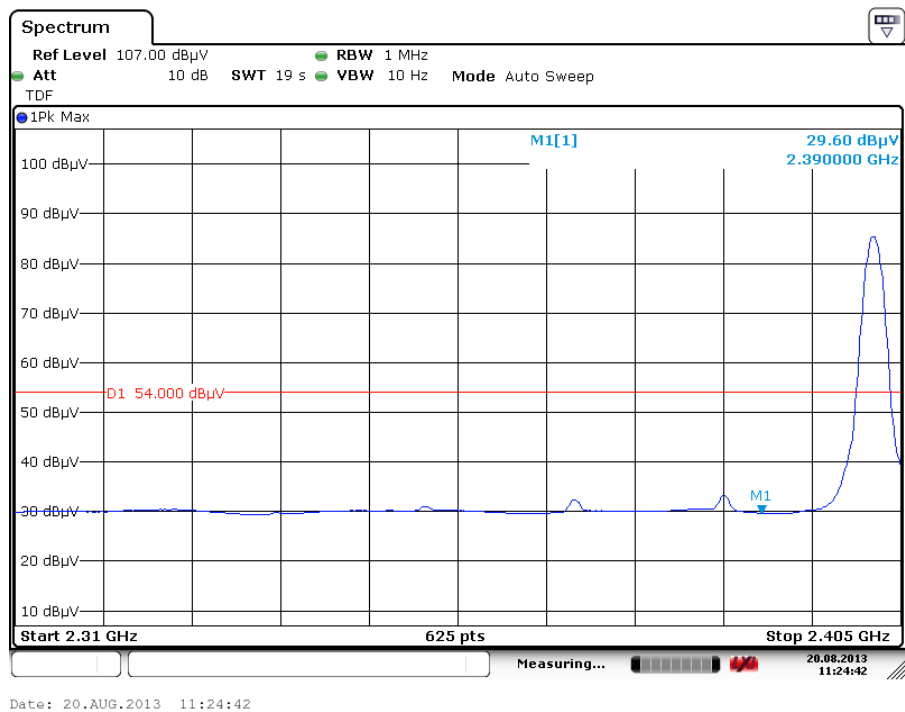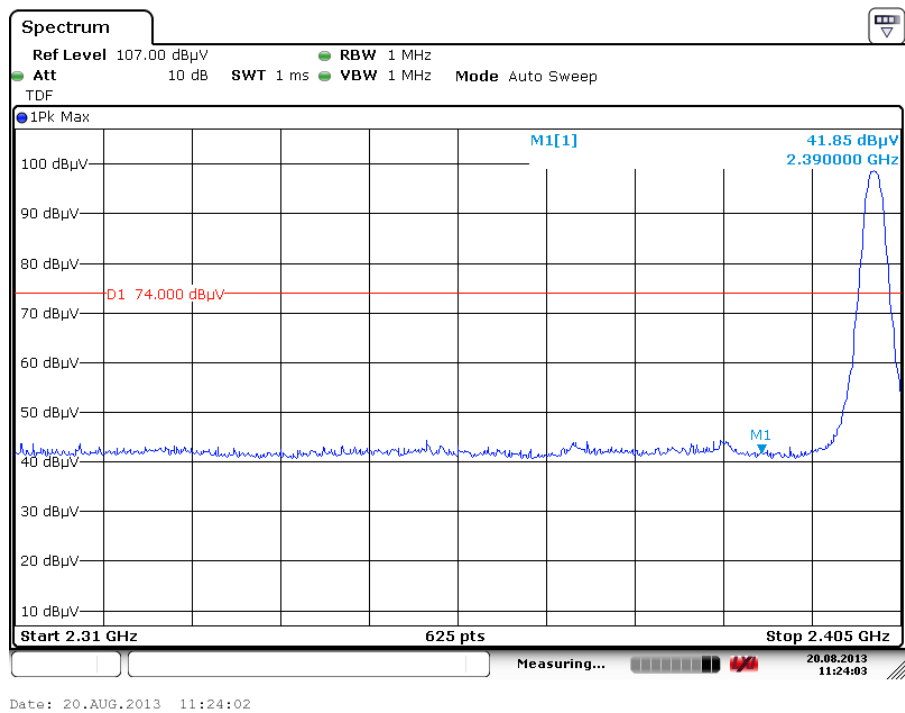



Low Channel (Ver)

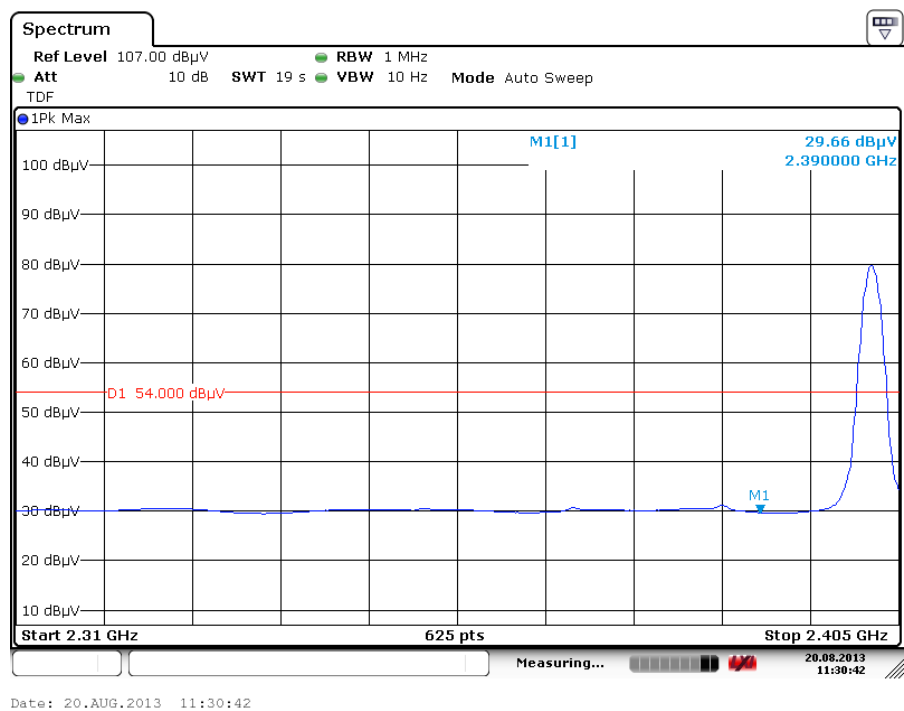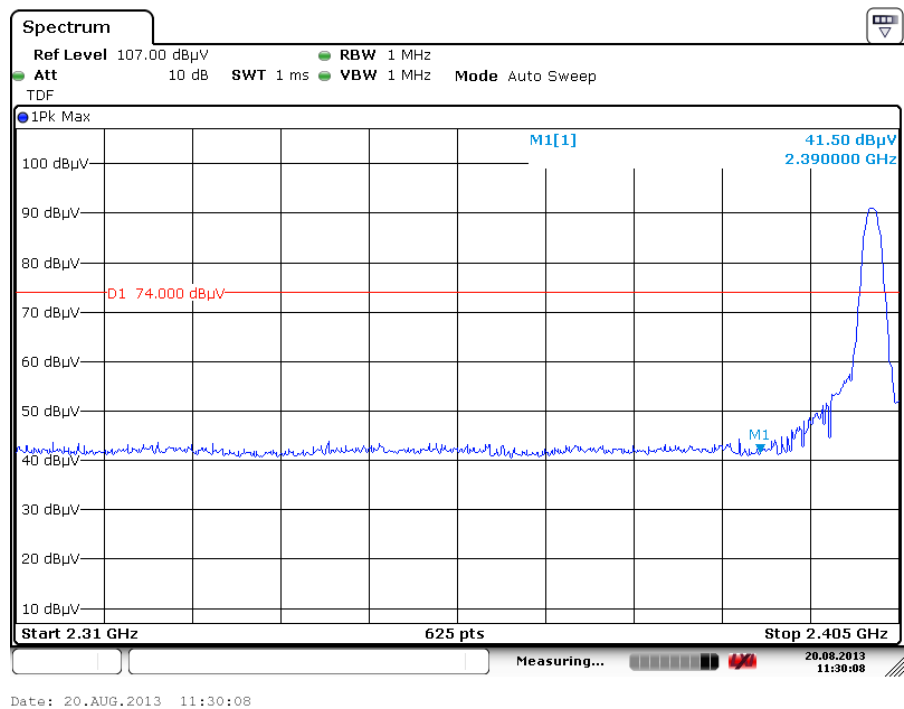

Spurious Emissions, Band Edge, 2.35-2.5G



Radiated Bandedge (GFSK)

High Channel (Hor)

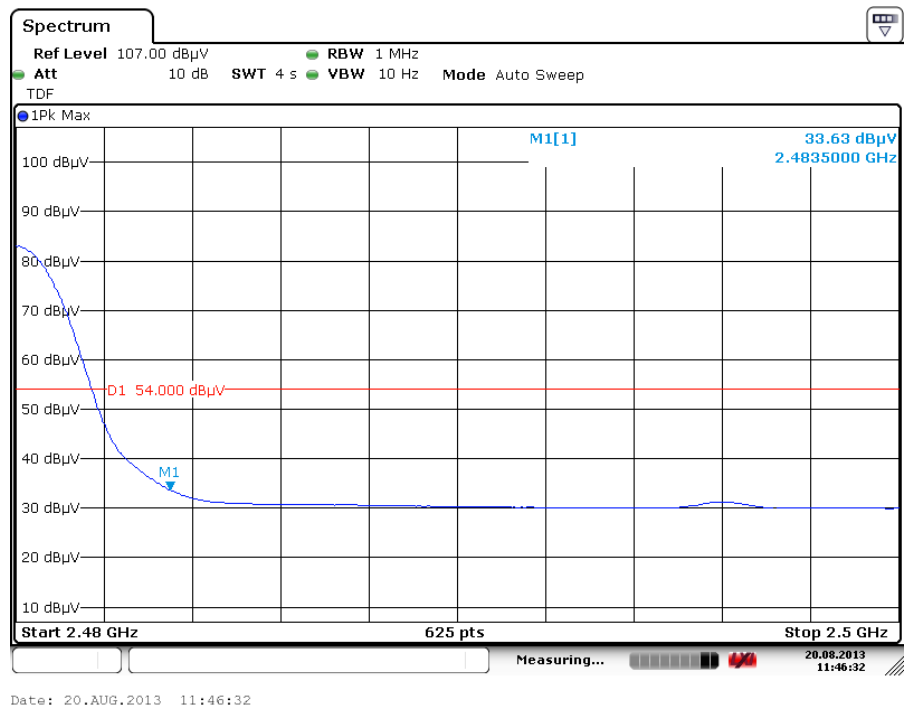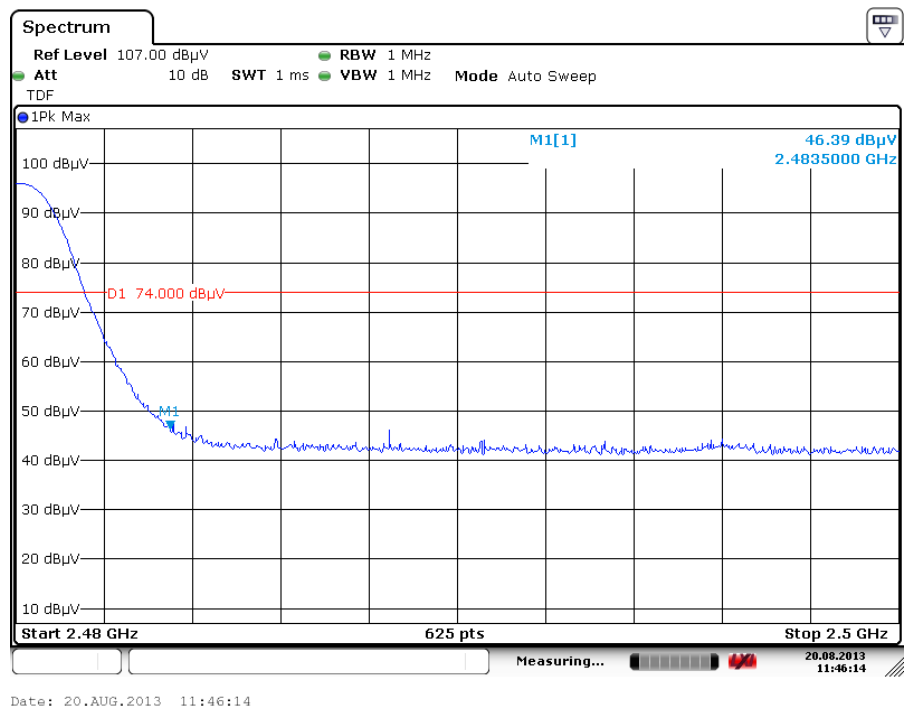

Spurious Emissions, Band Edge, 2.35-2.5G



High Channel (Ver)

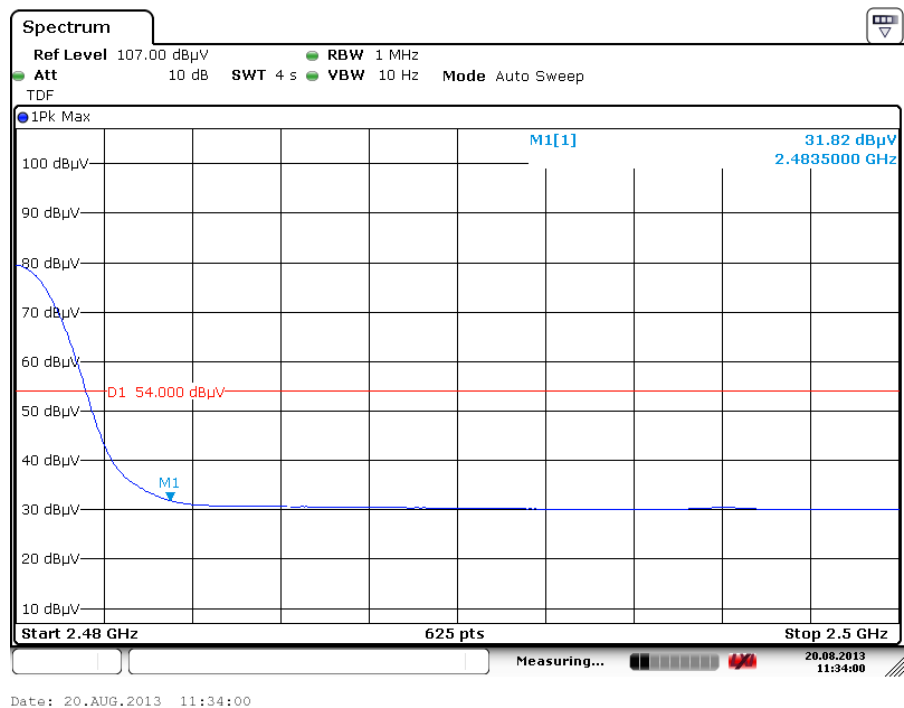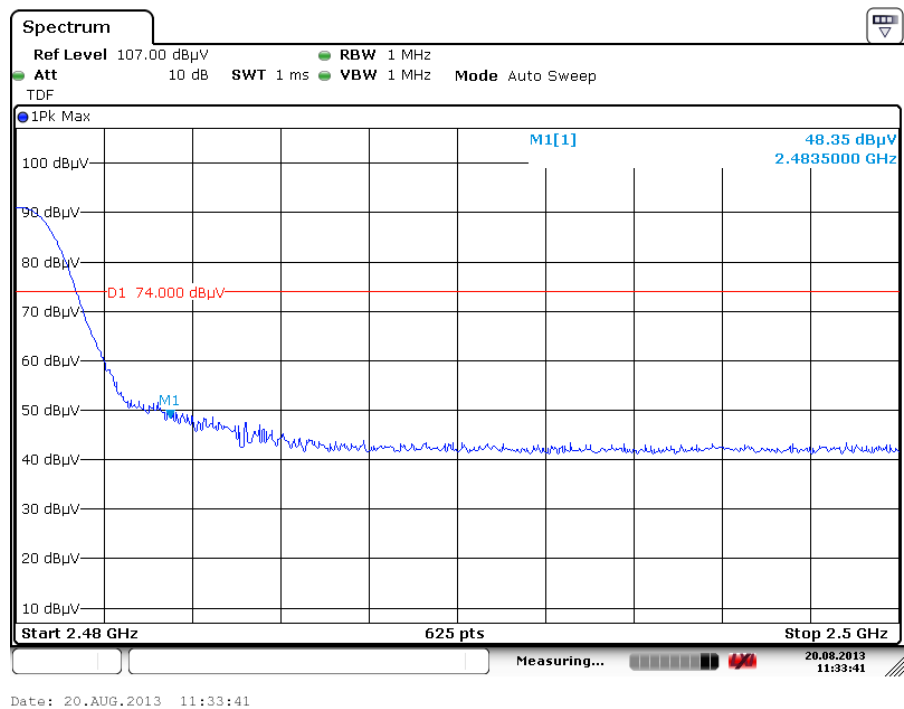

Spurious Emissions, Band Edge, 2.35-2.5G



Radiated Bandedge (8DPSK)

Low Channel (Hor)

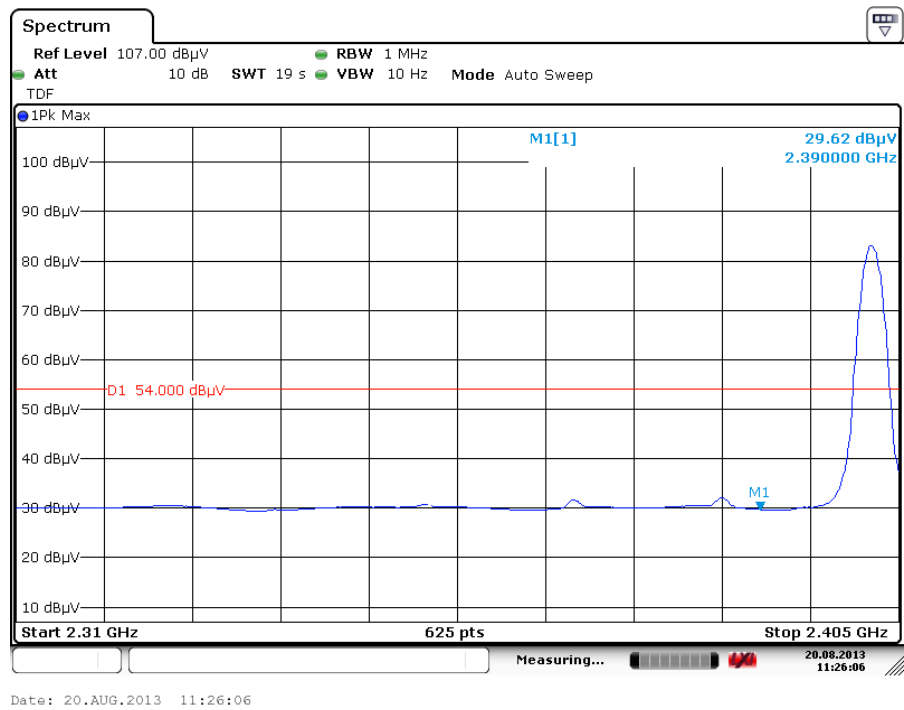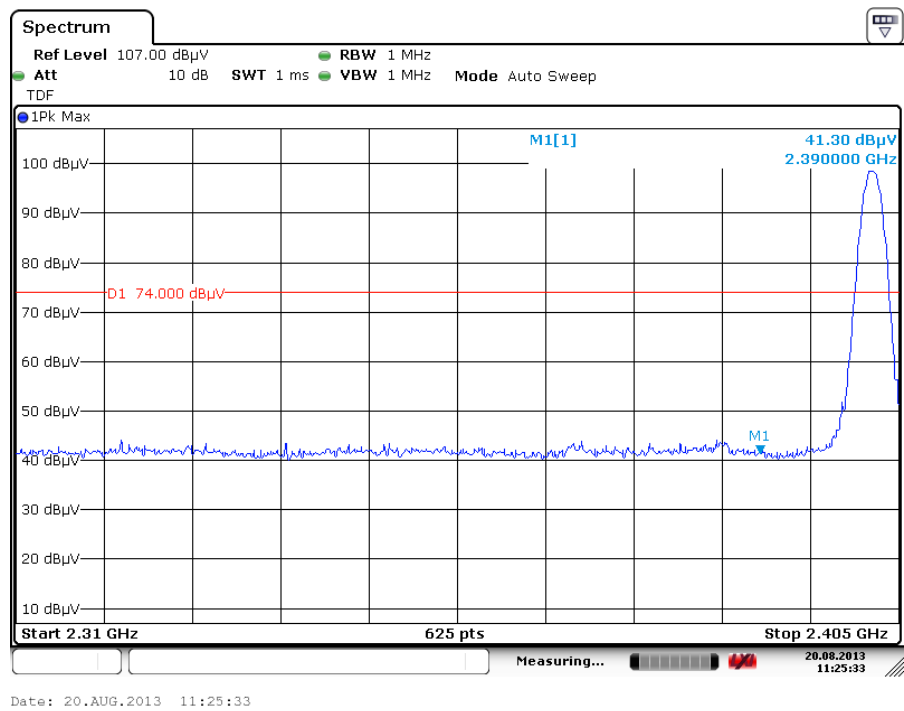

Spurious Emissions, Band Edge, 2.35-2.5G



Low Channel (Ver)

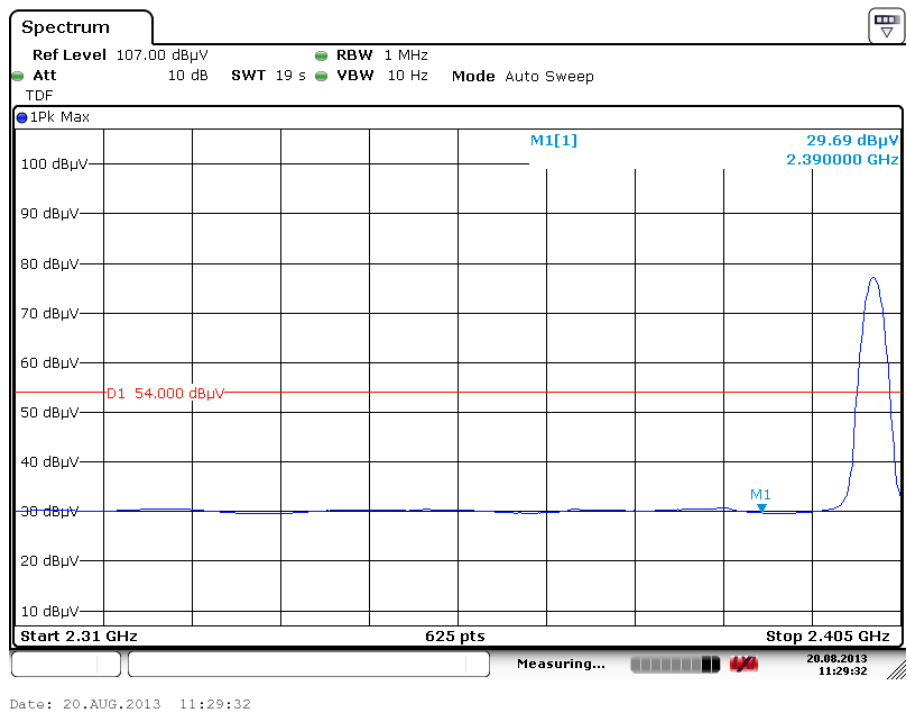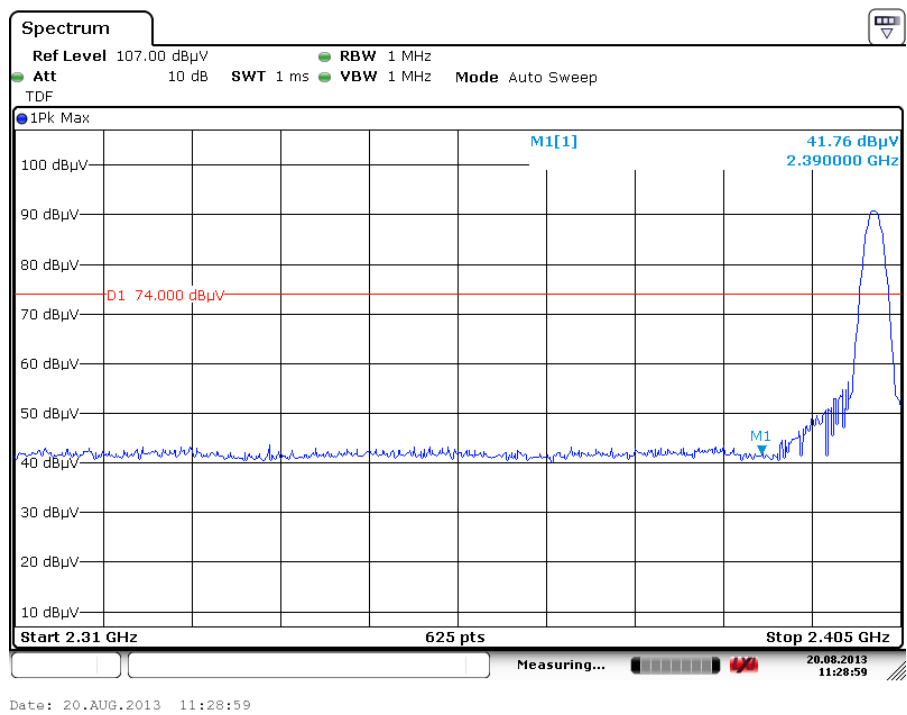

Spurious Emissions, Band Edge, 2.35-2.5G



Radiated Bandedge (8DPSK)

High Channel (Hor)

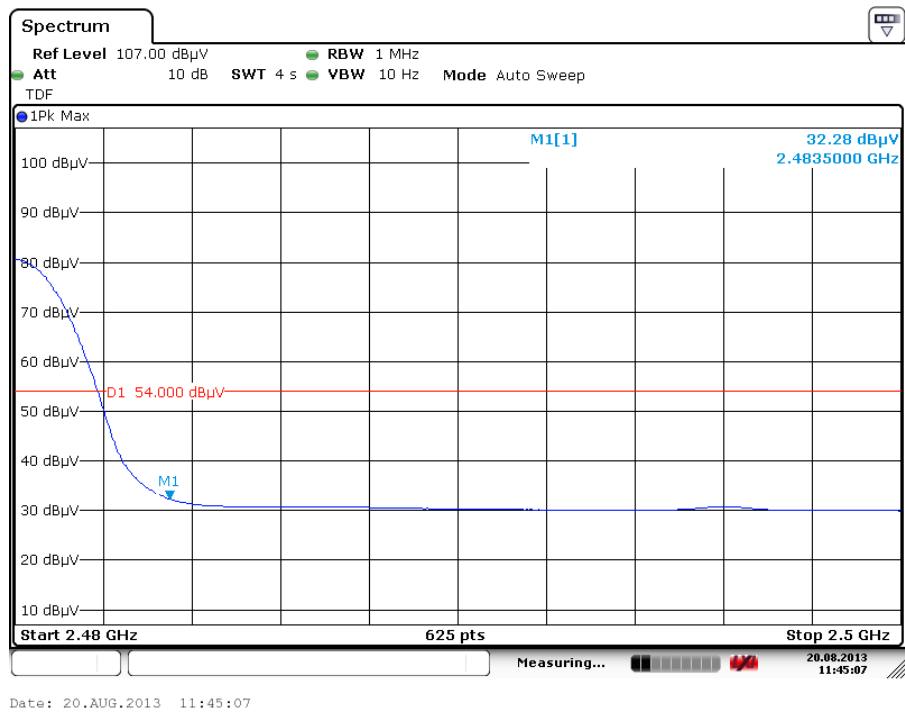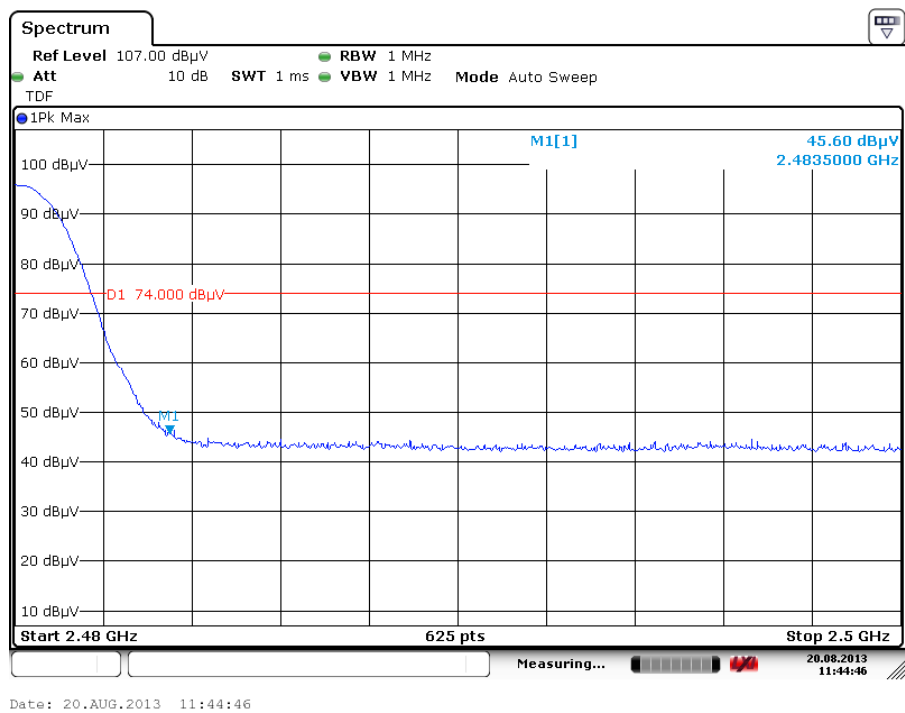

Spurious Emissions, Band Edge, 2.35-2.5G

High Channel (Ver)

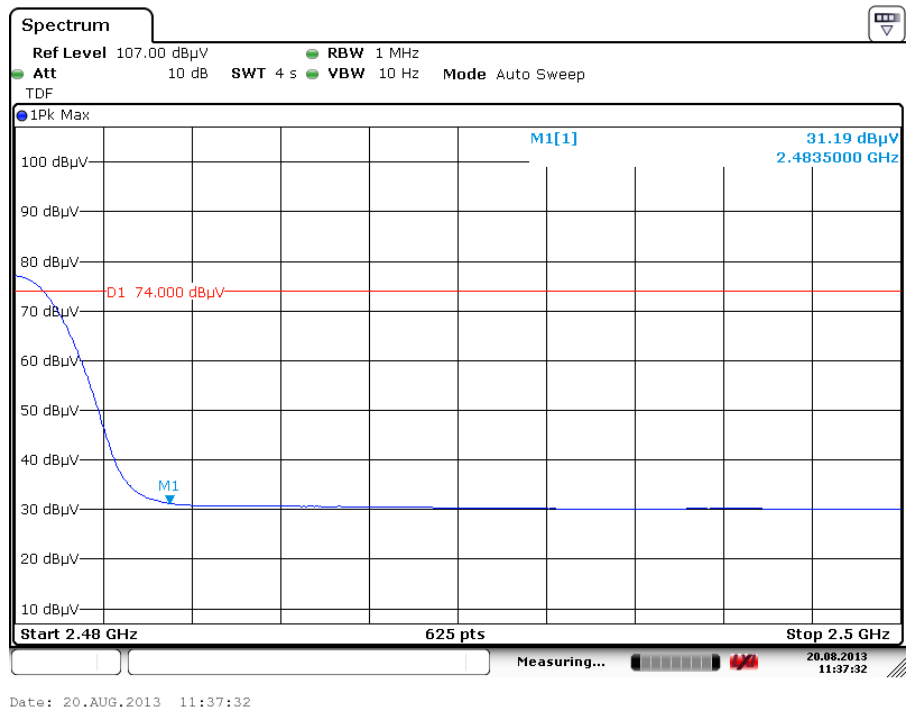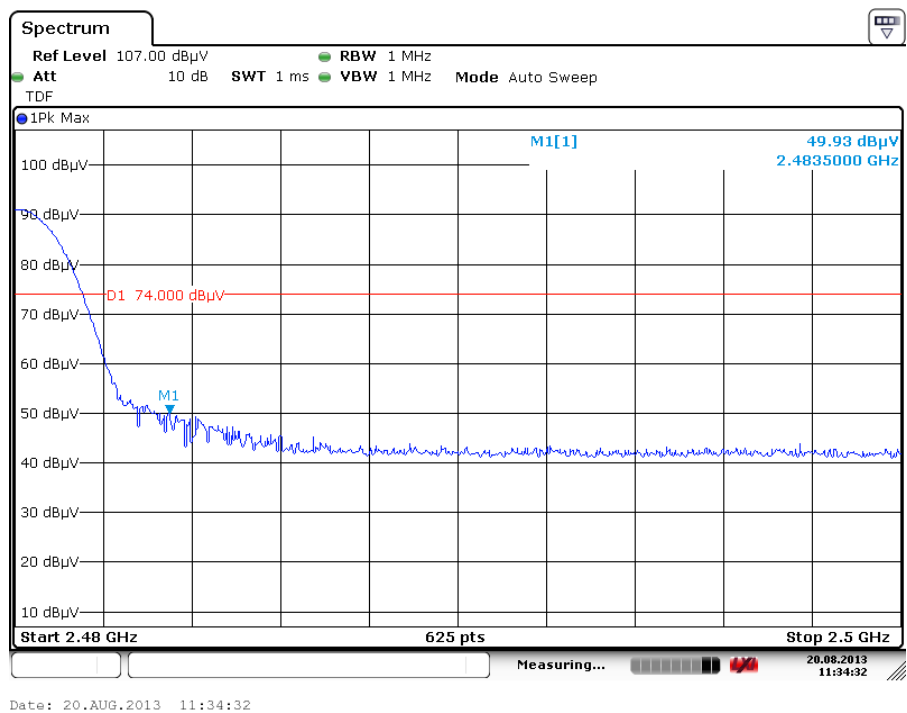

Spurious Emissions, Band Edge, 2.35-2.5G


Spurious Emissions, TX Mode, 1-18G



TUV Taiwan


11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

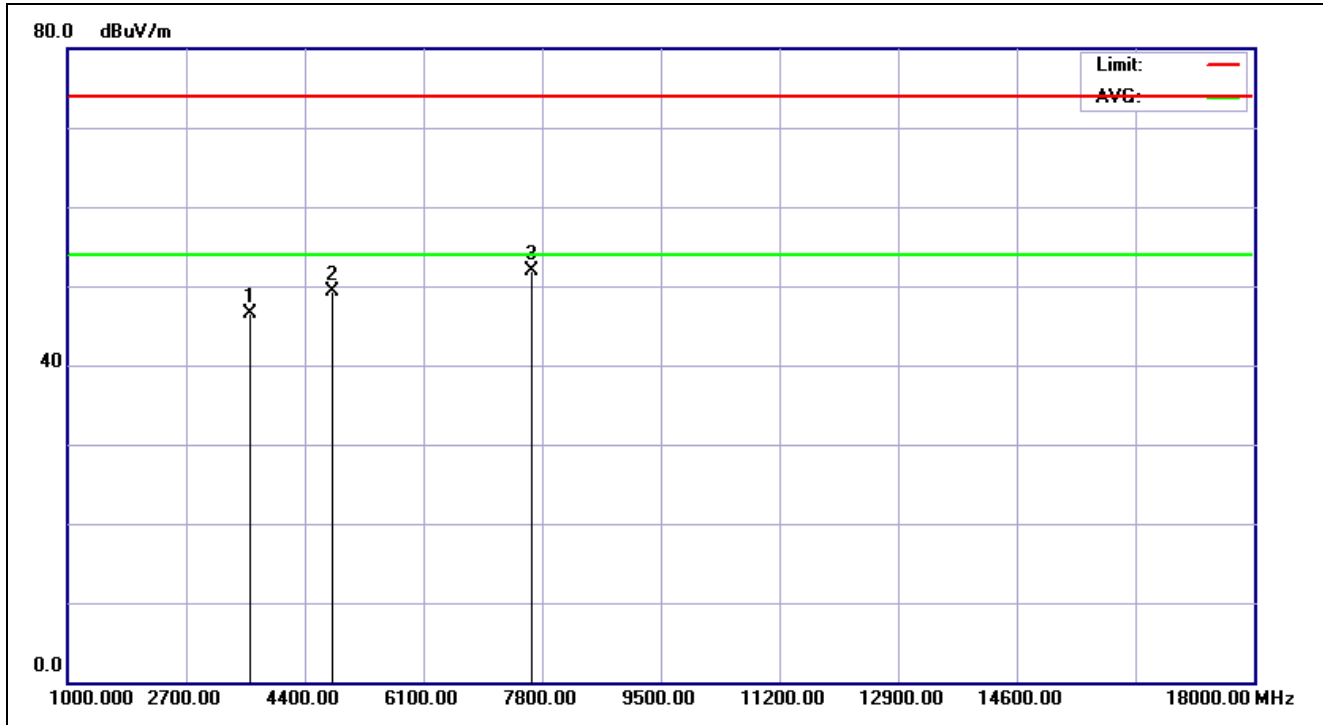


Service No.:	114010205-BT	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2013/8/20 13:05:48
Applicant:	ISSC	Test Rating:	DC 5V
Product:	Bluetooth Shielded Module	Temp.(°C)/Hum.(%):	27(°C)/48%
Model No.:	BM77SPPS5	Test Engineer:	Hugo Chang
Test Mode:	BT-2402-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3615.385	-5.77	52.25	46.48	74.00	-27.52	peak	150	358	
2	4786.859	-2.80	52.04	49.24	74.00	-24.76	peak	150	176	
3	7647.436	6.17	45.73	51.90	74.00	-22.10	peak	150	192	

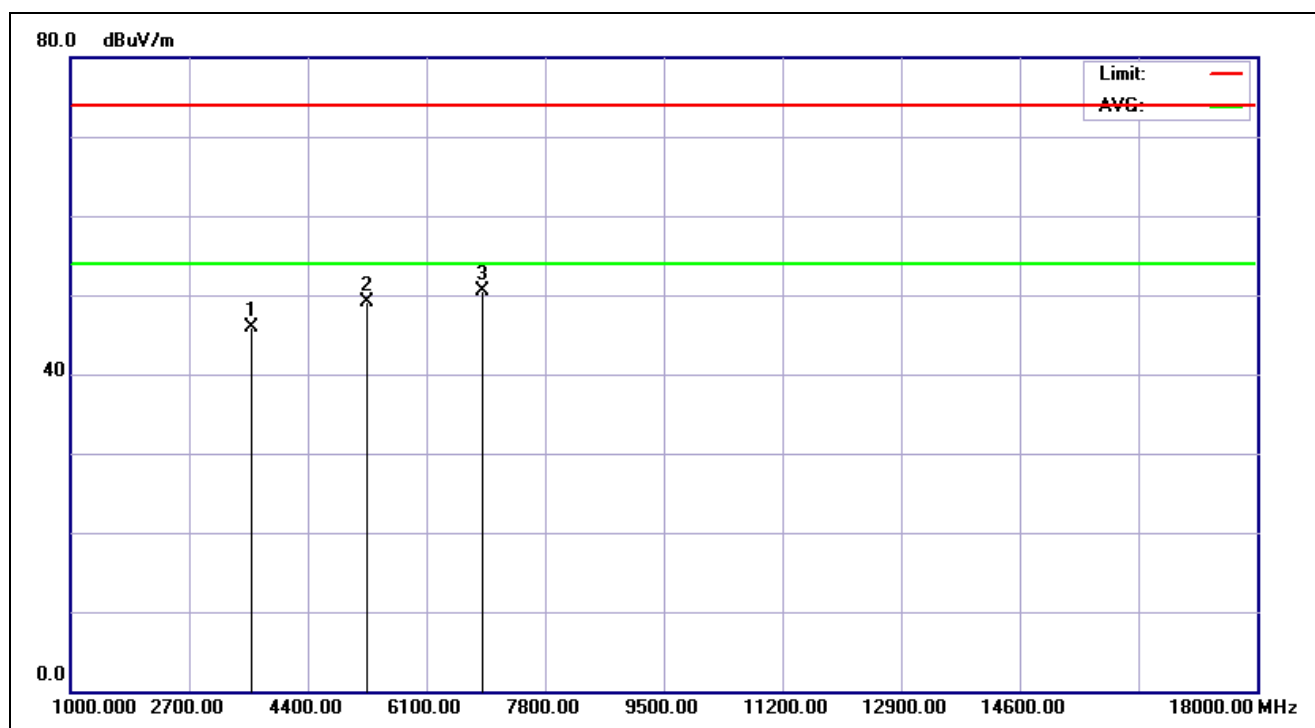


Service No.:	114010205-BT	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2013/8/20 13:06:50
Applicant:	ISSC	Test Rating:	DC 5V
Product:	Bluetooth Shielded Module	Temp.(°C)/Hum.(%)	27(°C)/48%
Model No.:	BM77SPPS5	Test Engineer:	Hugo Chang
Test Mode:	BT-2402-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3588.141	-5.79	51.74	45.95	74.00	-28.05	peak	150	354	
2	5250.000	-1.01	50.15	49.14	74.00	-24.86	peak	150	2	
3	6911.859	4.95	45.62	50.57	74.00	-23.43	peak	150	4	

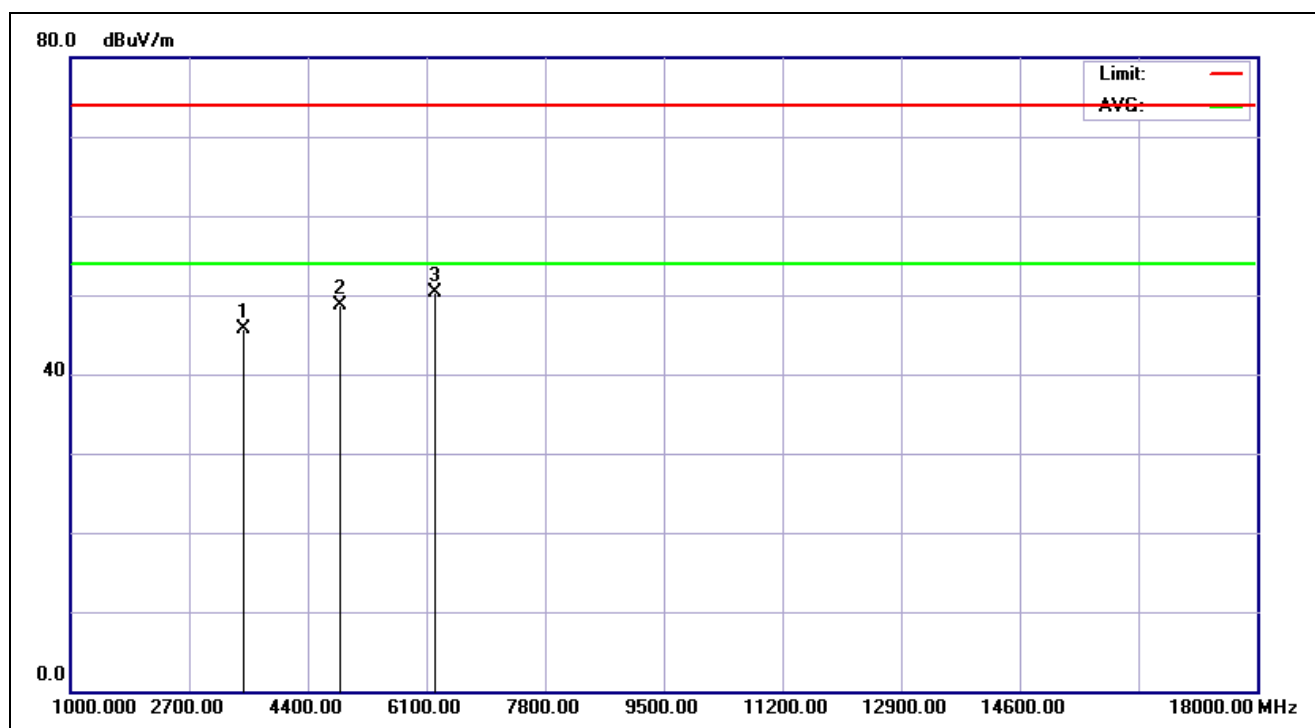


Service No.:	114010205-BT	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2013/8/20 13:09:02
Applicant:	ISSC	Test Rating:	DC 5V
Product:	Bluetooth Shielded Module	Temp.(°C)/Hum.(%)	27(°C)/48%
Model No.:	BM77SPPS5	Test Engineer:	Hugo Chang
Test Mode:	BT-2441-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3479.167	-5.89	51.62	45.73	74.00	-28.27	peak	100	113	
2	4868.590	-2.57	51.30	48.73	74.00	-25.27	peak	100	177	
3	6230.769	4.49	45.83	50.32	74.00	-23.68	peak	100	292	

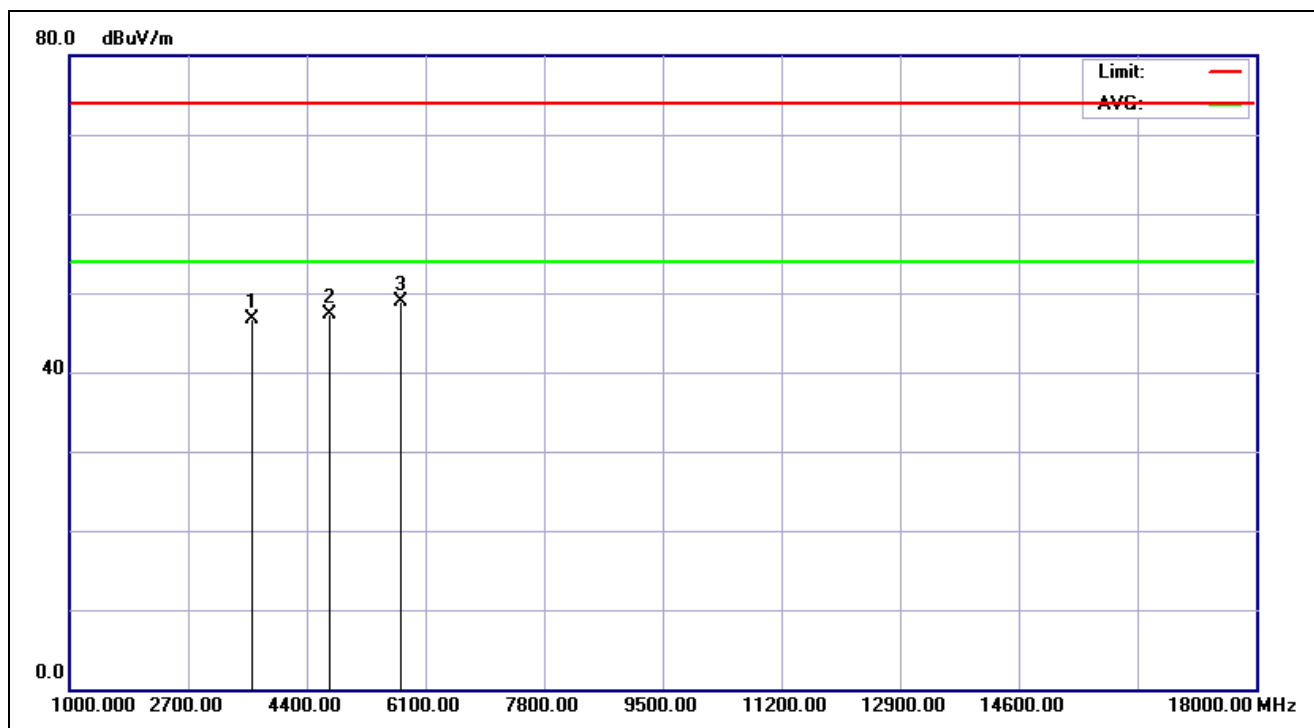


Service No.:	114010205-BT	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2013/8/20 13:10:04
Applicant:	ISSC	Test Rating:	DC 5V
Product:	Bluetooth Shielded Module	Temp.(°C)/Hum.(%):	27(°C)/48%
Model No.:	BM77SPPS5	Test Engineer:	Hugo Chang
Test Mode:	BT-2441-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3615.385	-5.77	52.40	46.63	74.00	-27.37	peak	100	60	
2	4732.372	-2.93	50.27	47.34	74.00	-26.66	peak	100	306	
3	5740.385	1.90	46.94	48.84	74.00	-25.16	peak	100	359	

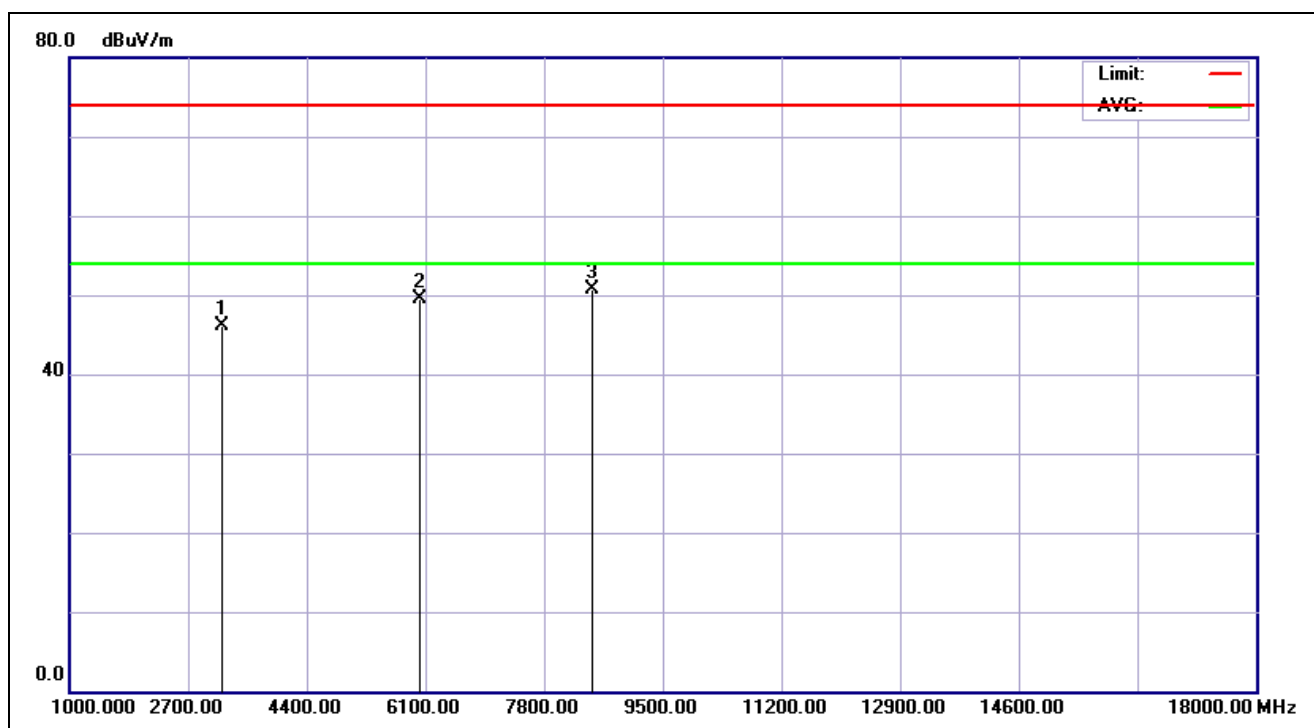


Service No.:	114010205-BT	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2013/8/20 13:11:42
Applicant:	ISSC	Test Rating:	DC 5V
Product:	Bluetooth Shielded Module	Temp.(°C)/Hum.(%):	27(°C)/48%
Model No.:	BM77SPPS5	Test Engineer:	Hugo Chang
Test Mode:	BT-2480-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3179.487	-6.30	52.39	46.09	74.00	-27.91	peak	100	193	
2	6012.820	3.72	45.77	49.49	74.00	-24.51	peak	100	1	
3	8491.987	6.45	44.21	50.66	74.00	-23.34	peak	100	169	

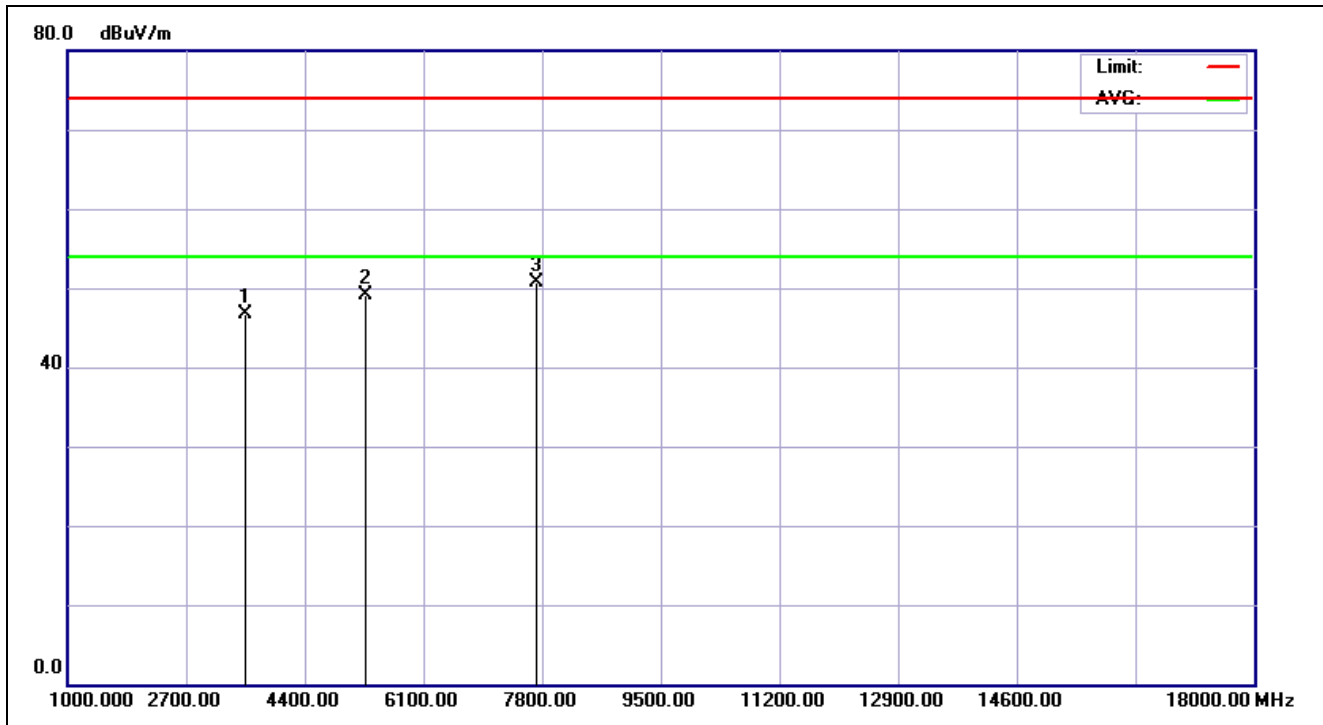


Service No.:	114010205-BT	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2013/8/20 13:12:44
Applicant:	ISSC	Test Rating:	DC 5V
Product:	Bluetooth Shielded Module	Temp.(°C)/Hum.(%)	27(°C)/48%
Model No.:	BM77SPPS5	Test Engineer:	Hugo Chang
Test Mode:	BT-2480-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3560.897	-5.81	52.44	46.63	74.00	-27.37	peak	100	341	
2	5277.244	-0.86	50.06	49.20	74.00	-24.80	peak	100	146	
3	7729.167	6.13	44.51	50.64	74.00	-23.36	peak	100	135	

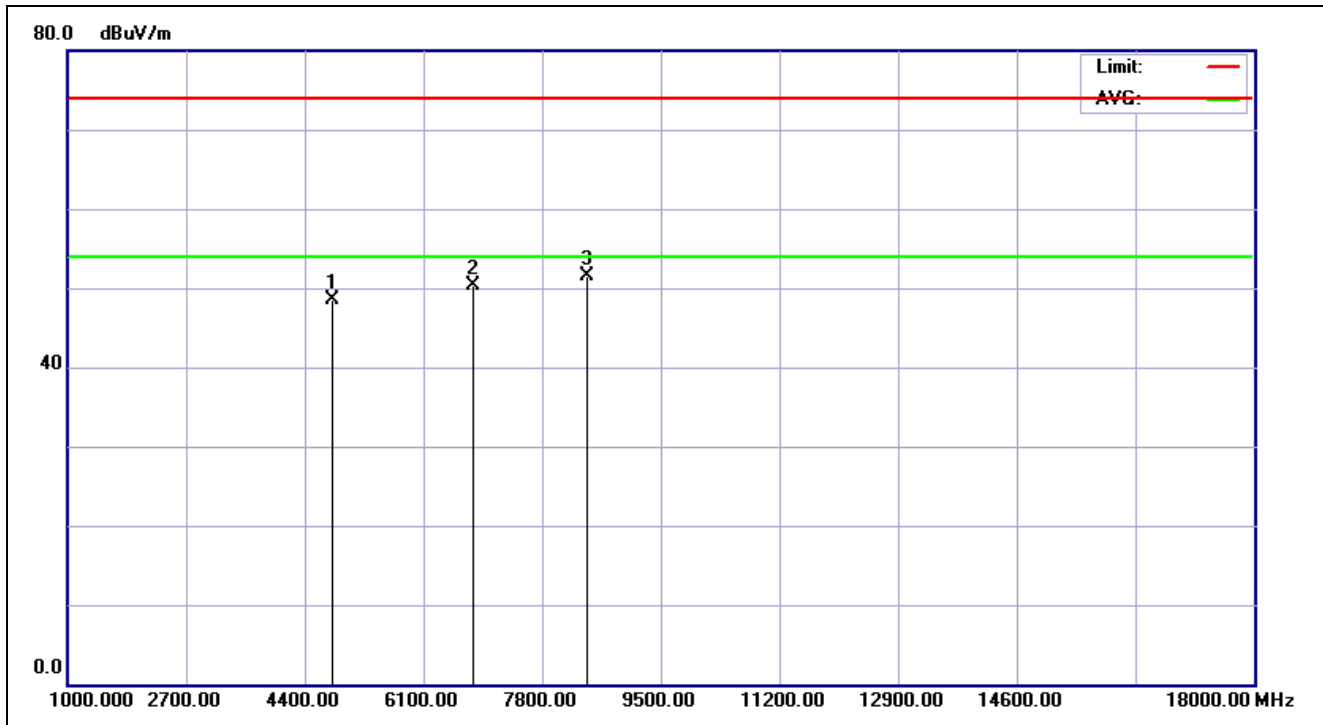


Service No.:	114010205-BT	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2013/8/20 13:14:22
Applicant:	ISSC	Test Rating:	DC 5V
Product:	Bluetooth Shielded Module	Temp.(°C)/Hum.(%):	27(°C)/48%
Model No.:	BM77SPPS5	Test Engineer:	Hugo Chang
Test Mode:	EDR-2402-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4786.859	-2.80	51.24	48.44	74.00	-25.56	peak	100	169	
2	6802.885	5.07	45.32	50.39	74.00	-23.61	peak	100	180	
3	8437.500	6.41	45.09	51.50	74.00	-22.50	peak	100	148	

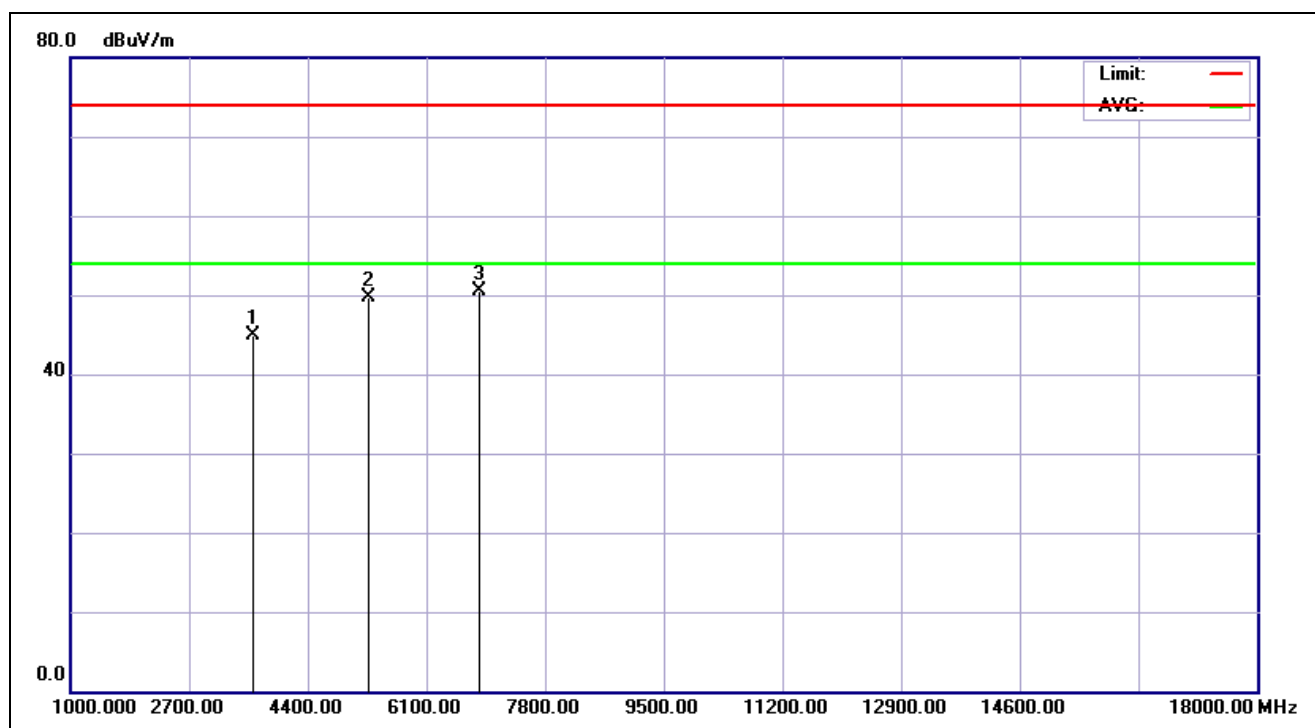


Service No.:	114010205-BT	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2013/8/20 13:15:24
Applicant:	ISSC	Test Rating:	DC 5V
Product:	Bluetooth Shielded Module	Temp.(°C)/Hum.(%):	27(°C)/48%
Model No.:	BM77SPPS5	Test Engineer:	Hugo Chang
Test Mode:	EDR-2402-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3615.385	-5.77	50.71	44.94	74.00	-29.06	peak	100	325	
2	5277.244	-0.86	50.57	49.71	74.00	-24.29	peak	100	228	
3	6857.372	5.01	45.51	50.52	74.00	-23.48	peak	100	304	

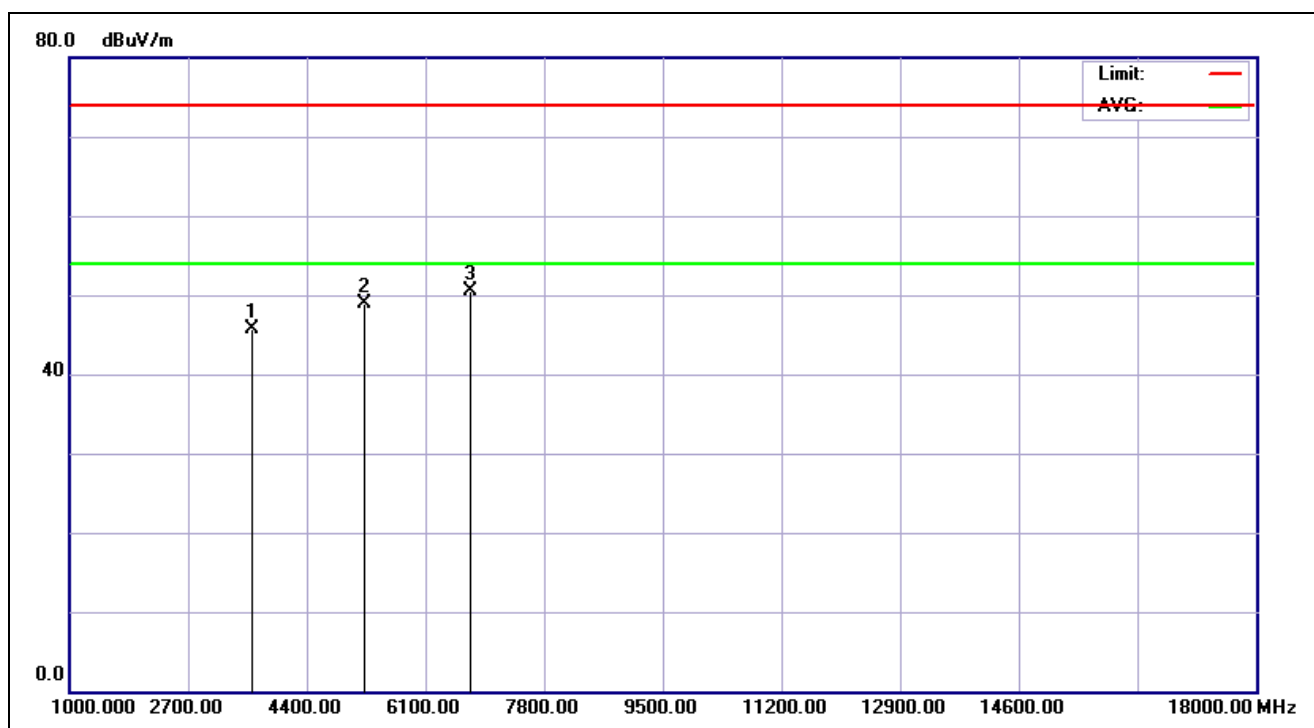


Service No.:	114010205-BT	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2013/8/20 13:16:53
Applicant:	ISSC	Test Rating:	DC 5V
Product:	Bluetooth Shielded Module	Temp.(°C)/Hum.(%)	27(°C)/48%
Model No.:	BM77SPPS5	Test Engineer:	Hugo Chang
Test Mode:	EDR-2441-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3615.385	-5.77	51.57	45.80	74.00	-28.20	peak	100	166	
2	5222.756	-1.14	50.00	48.86	74.00	-25.14	peak	100	43	
3	6748.397	5.14	45.35	50.49	74.00	-23.51	peak	100	233	

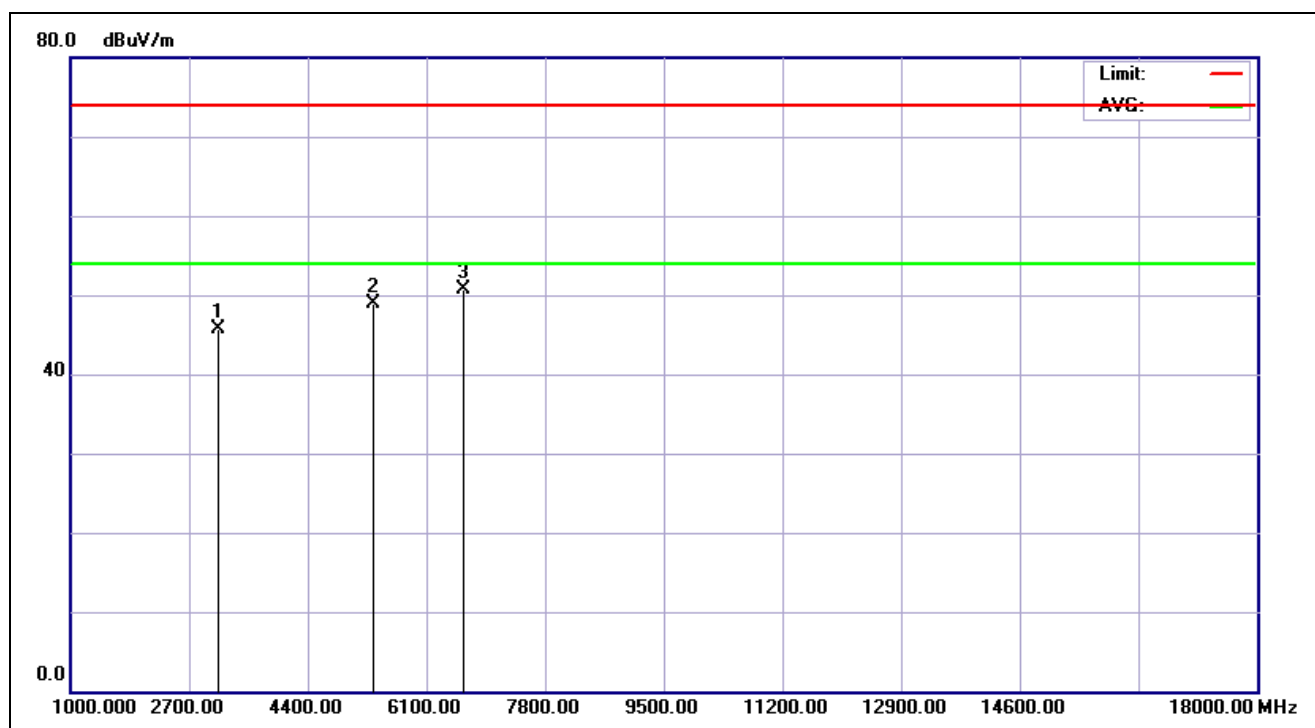


Service No.:	114010205-BT	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2013/8/20 13:17:55
Applicant:	ISSC	Test Rating:	DC 5V
Product:	Bluetooth Shielded Module	Temp.(°C)/Hum.(%):	27(°C)/48%
Model No.:	BM77SPPS5	Test Engineer:	Hugo Chang
Test Mode:	EDR-2441-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3125.000	-6.35	52.13	45.78	74.00	-28.22	peak	100	52	
2	5331.731	-0.60	49.42	48.82	74.00	-25.18	peak	100	359	
3	6639.423	5.27	45.41	50.68	74.00	-23.32	peak	100	341	

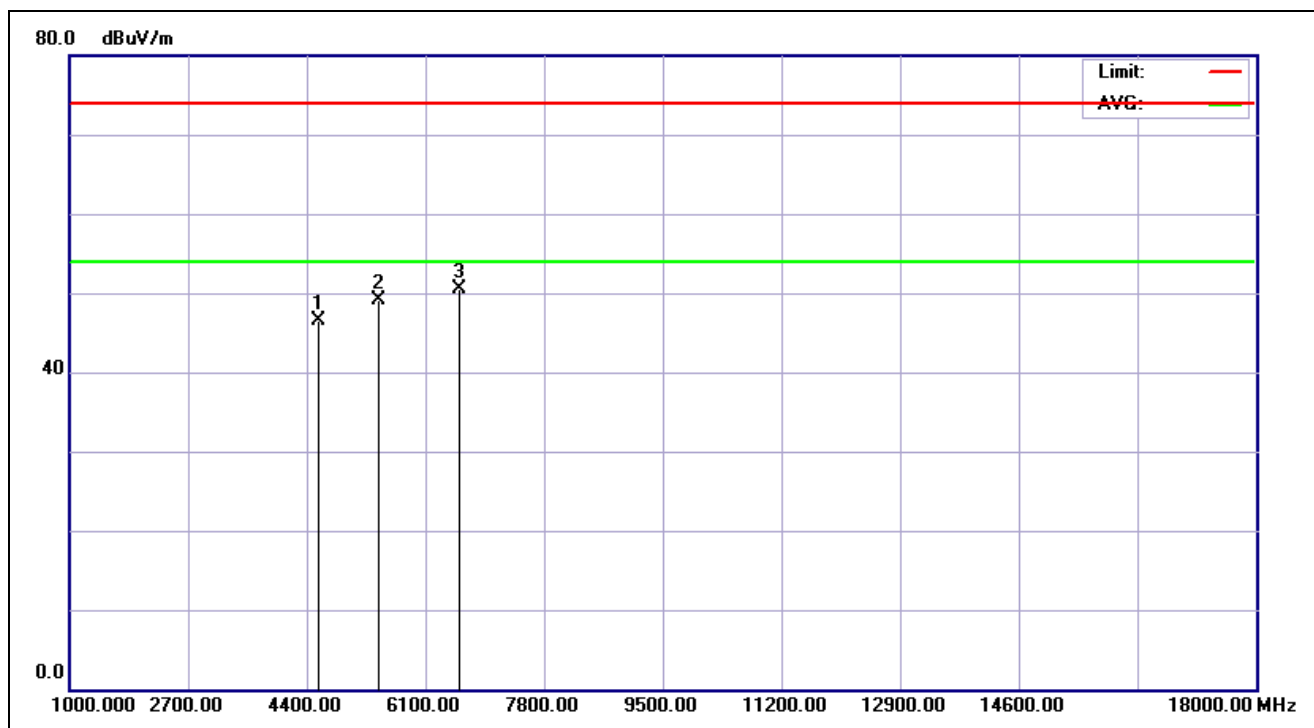

Service No.:	114010205-BT	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2013/8/20 13:19:26
Applicant:	ISSC	Test Rating:	DC 5V
Product:	Bluetooth Shielded Module	Temp.(°C)/Hum.(%)	27(°C)/48%
Model No.:	BM77SPPS5	Test Engineer:	Hugo Chang
Test Mode:	EDR-2480-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4568.910	-3.36	49.90	46.54	74.00	-27.46	peak	100	153	
2	5440.705	-0.06	49.22	49.16	74.00	-24.84	peak	100	335	
3	6584.936	5.34	45.18	50.52	74.00	-23.48	peak	100	231	

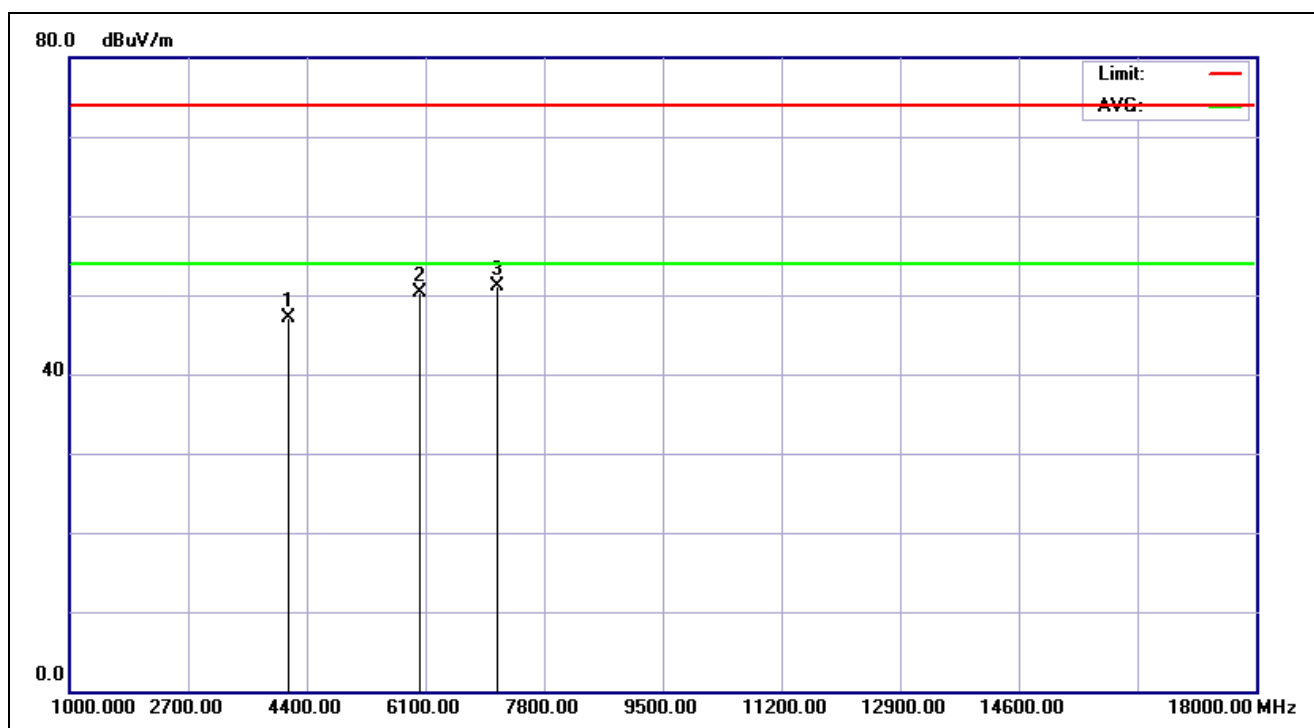

Service No.:	114010205-BT	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2013/8/20 13:20:28
Applicant:	ISSC	Test Rating:	DC 5V
Product:	Bluetooth Shielded Module	Temp.(°C)/Hum.(%)	27(°C)/48%
Model No.:	BM77SPPS5	Test Engineer:	Hugo Chang
Test Mode:	EDR-2480-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4133.013	-4.98	52.08	47.10	74.00	-26.90	peak	100	146	
2	6012.820	3.72	46.55	50.27	74.00	-23.73	peak	100	38	
3	7129.808	5.21	45.81	51.02	74.00	-22.98	peak	100	1	


Spurious Emissions, TX Mode, 18-26G



TUV Taiwan


11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

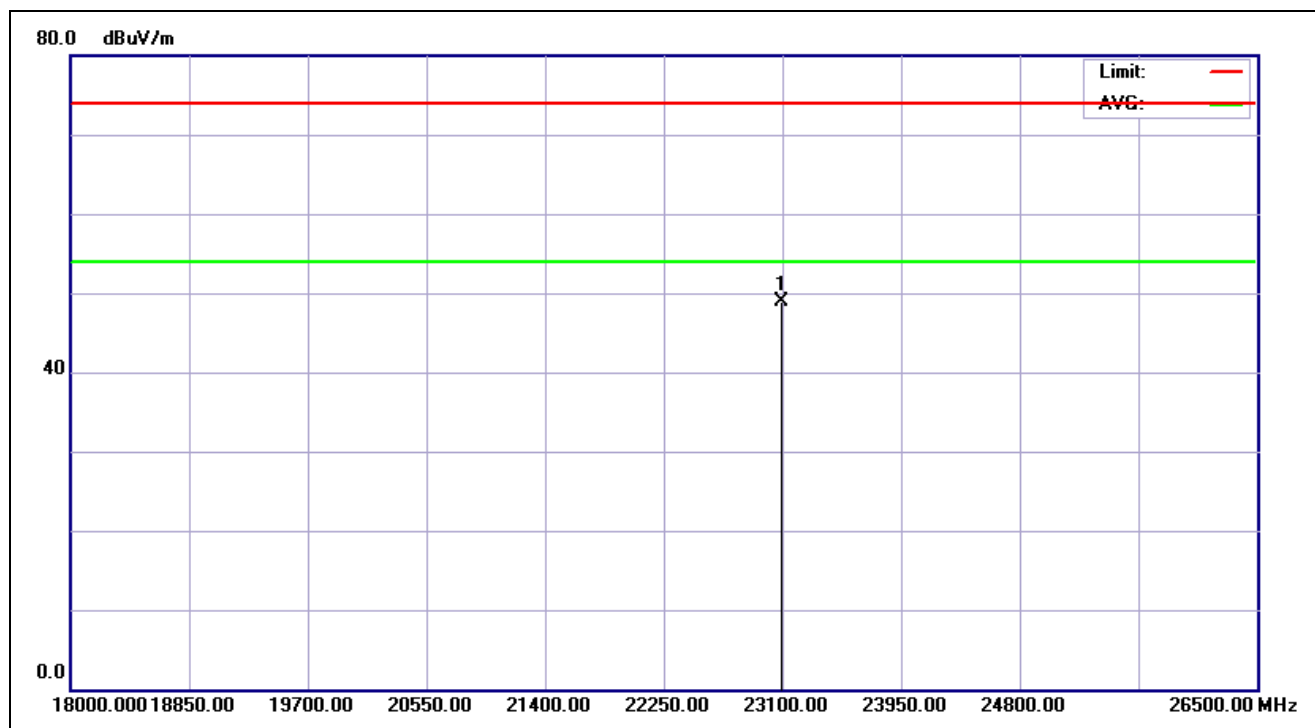


Service No.:	114010205-BT	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2013/8/20 13:32:13
Applicant:	ISSC	Test Rating:	DC 5V
Product:	Bluetooth Shielded Module	Temp.(°C)/Hum.(%):	27(°C)/48%
Model No.:	BM77SPPS5	Test Engineer:	Hugo Chang
Test Mode:	BT-2402-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	23094.551	30.24	18.69	48.93	74.00	-25.07	peak			

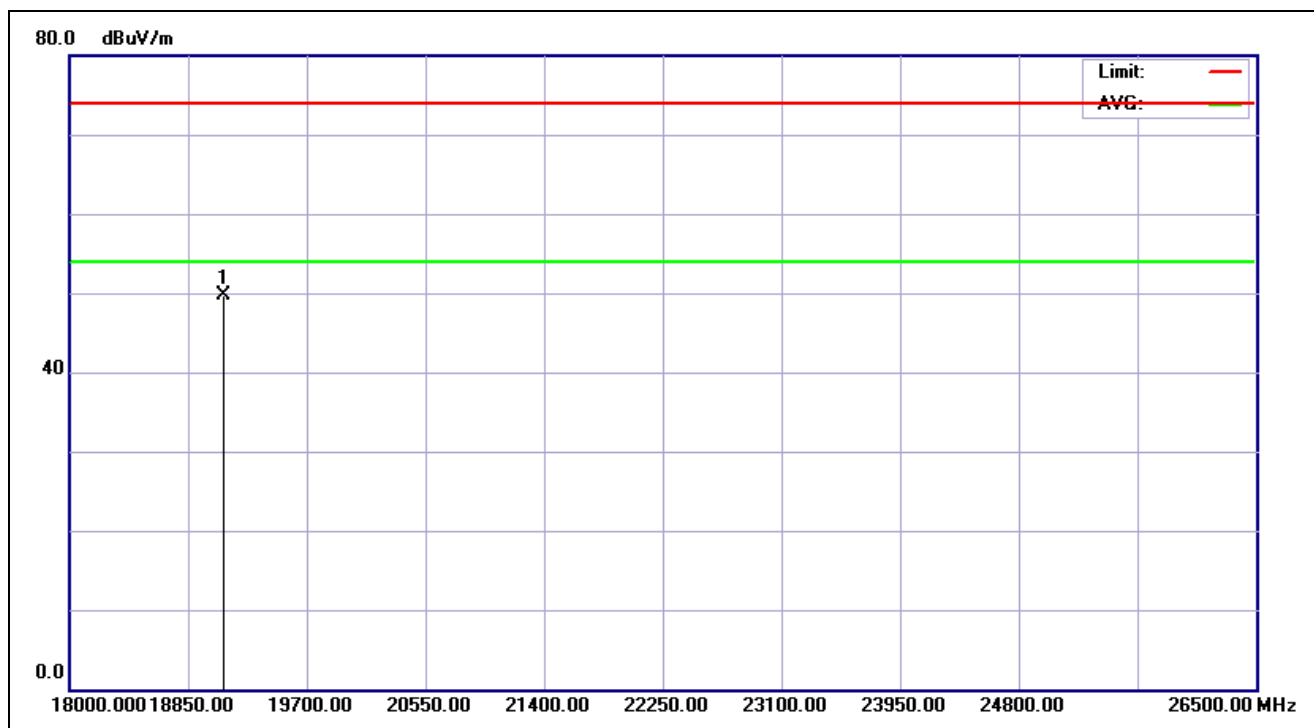


Service No.:	114010205-BT	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2013/8/20 13:32:59
Applicant:	ISSC	Test Rating:	DC 5V
Product:	Bluetooth Shielded Module	Temp.(°C)/Hum.(%):	27(°C)/48%
Model No.:	BM77SPPS5	Test Engineer:	Hugo Chang
Test Mode:	BT-2402-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	19103.365	29.75	20.05	49.80	74.00	-24.20	peak			

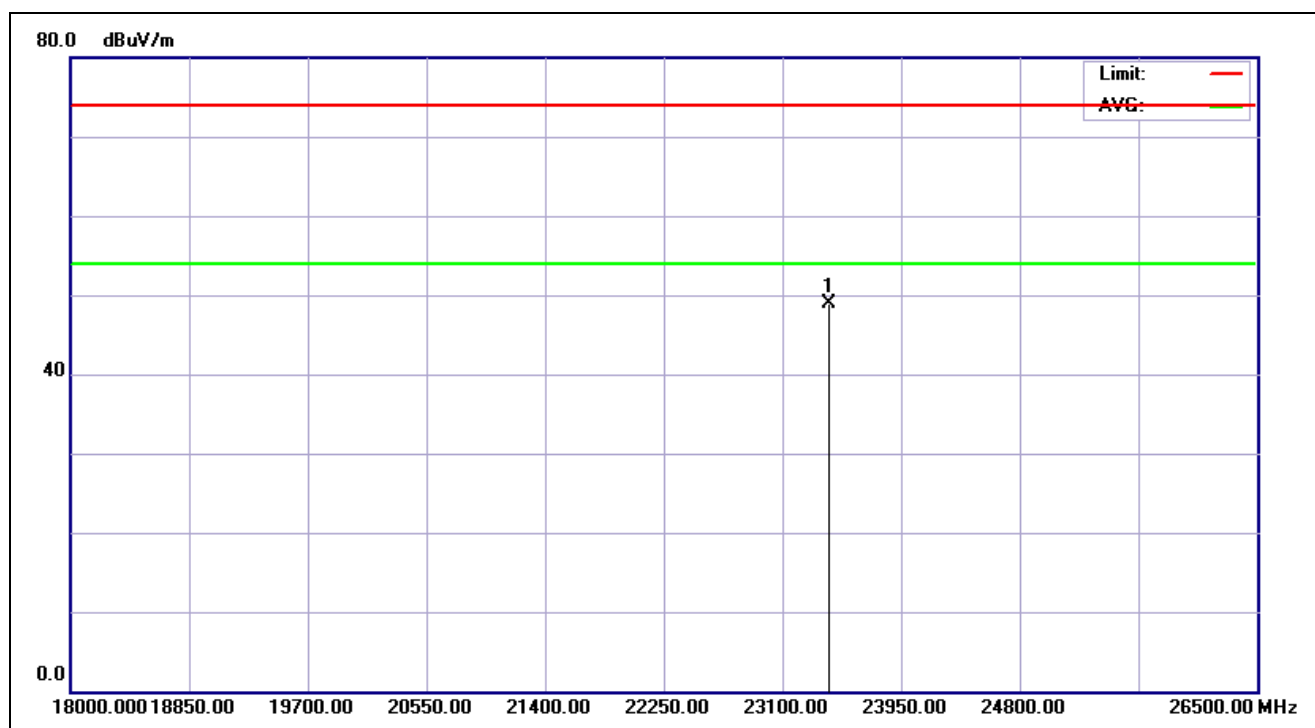


Service No.:	114010205-BT	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2013/8/20 13:33:35
Applicant:	ISSC	Test Rating:	DC 5V
Product:	Bluetooth Shielded Module	Temp.(°C)/Hum.(%):	27(°C)/48%
Model No.:	BM77SPPS5	Test Engineer:	Hugo Chang
Test Mode:	BT-2441-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	23435.096	30.14	18.71	48.85	74.00	-25.15	peak			

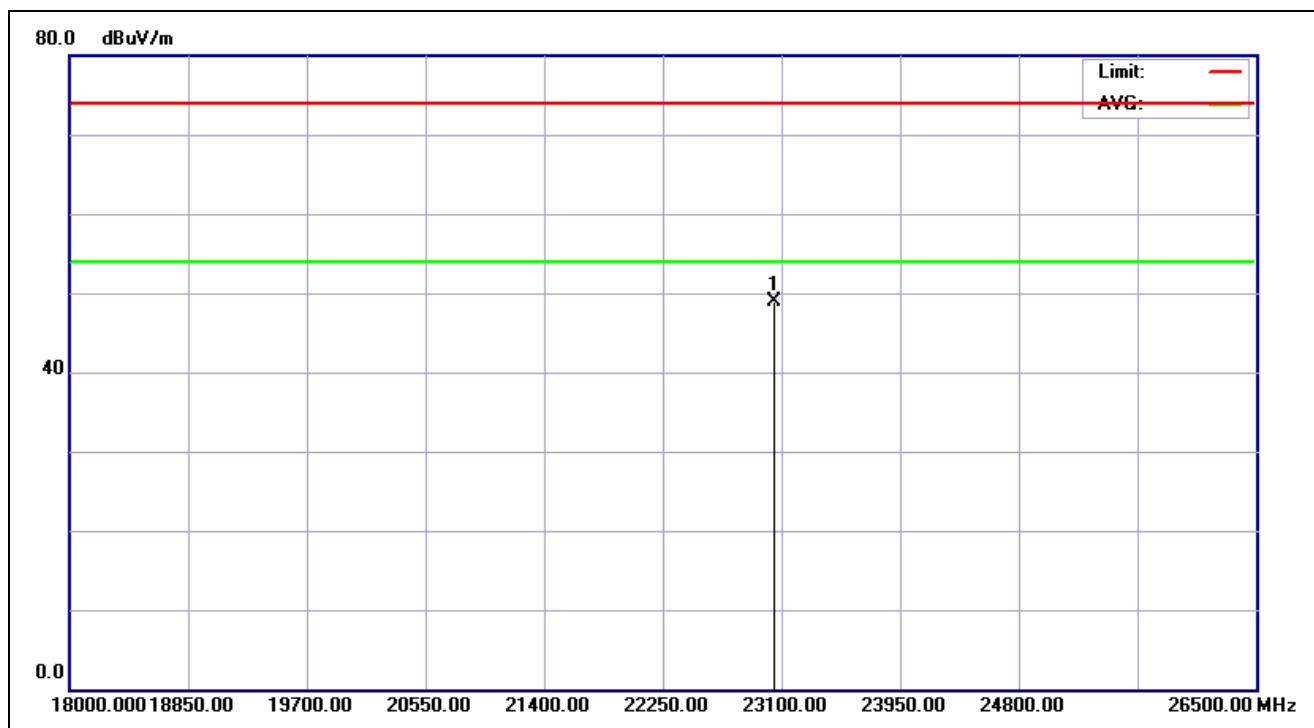


Service No.:	114010205-BT	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2013/8/20 13:34:00
Applicant:	ISSC	Test Rating:	DC 5V
Product:	Bluetooth Shielded Module	Temp.(°C)/Hum.(%)	27(°C)/48%
Model No.:	BM77SPPS5	Test Engineer:	Hugo Chang
Test Mode:	BT-2441-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	23053.686	30.27	18.63	48.90	74.00	-25.10	peak			

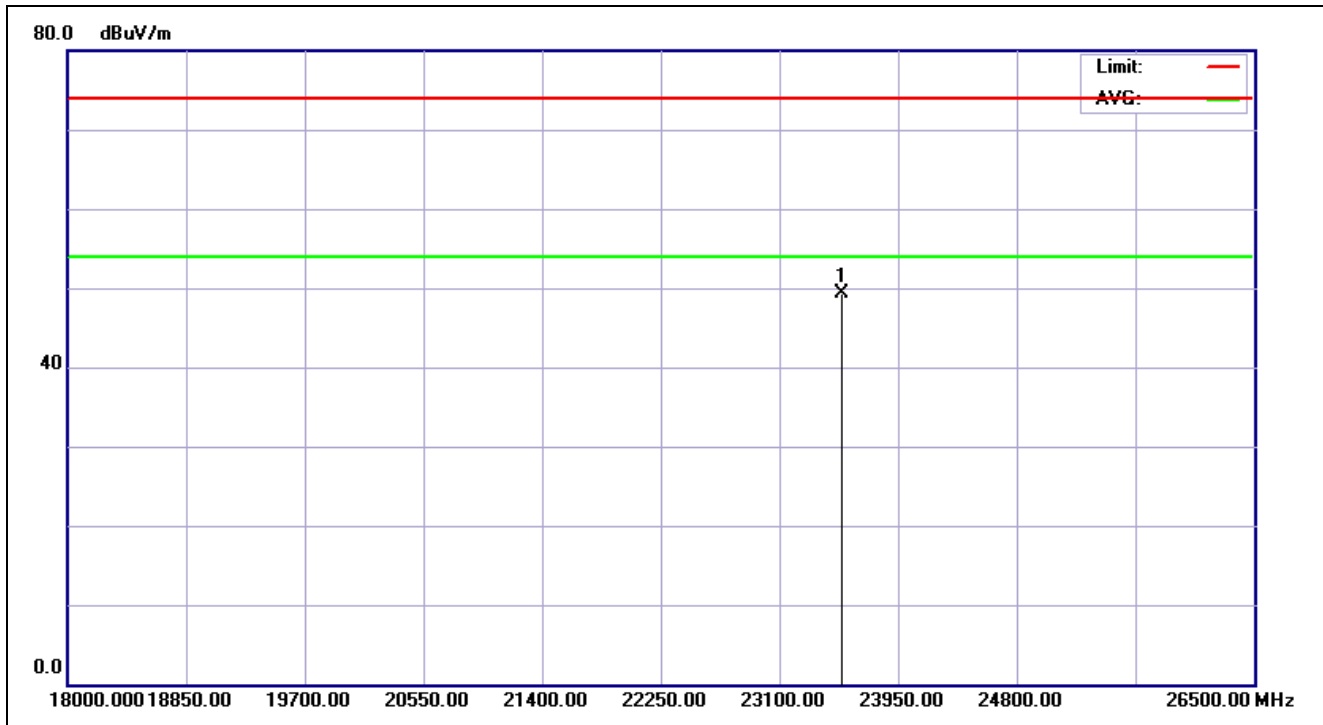


Service No.:	114010205-BT	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2013/8/20 13:34:30
Applicant:	ISSC	Test Rating:	DC 5V
Product:	Bluetooth Shielded Module	Temp.(°C)/Hum.(%):	27(°C)/48%
Model No.:	BM77SPPS5	Test Engineer:	Hugo Chang
Test Mode:	BT-2480-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	23544.071	30.01	19.33	49.34	74.00	-24.66	peak			

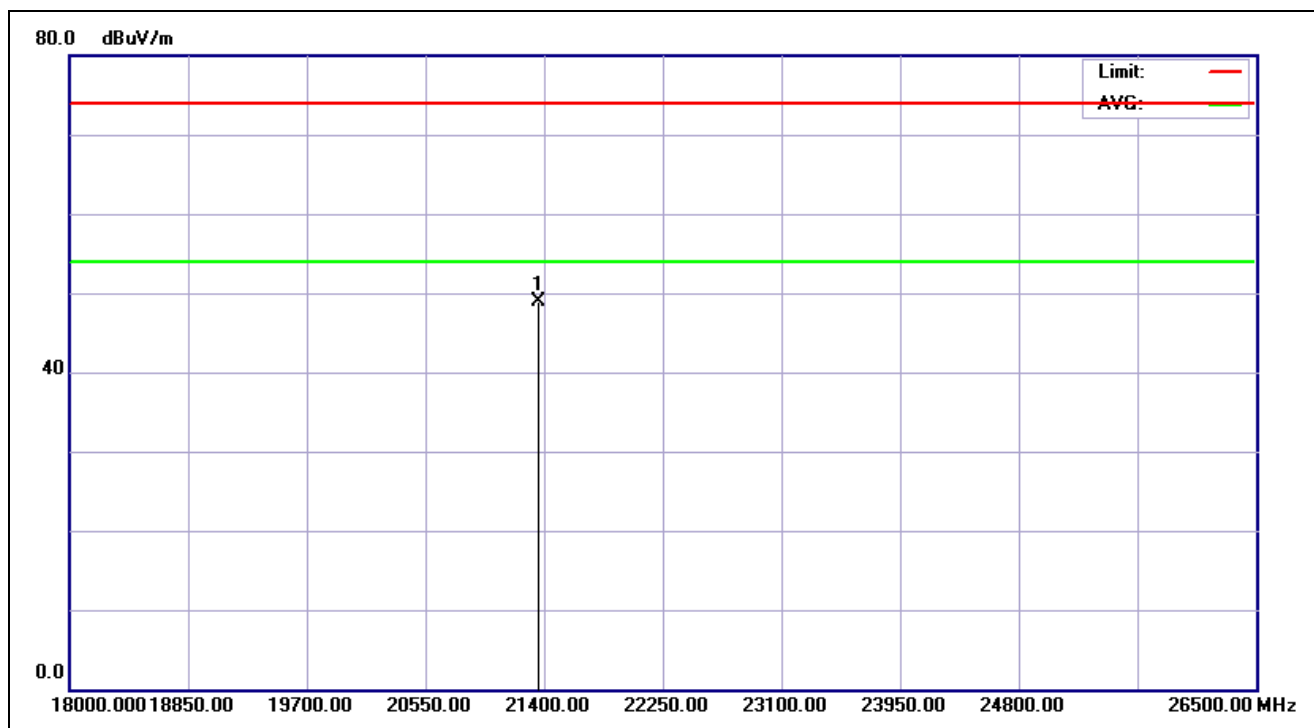


Service No.:	114010205-BT	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2013/8/20 13:34:58
Applicant:	ISSC	Test Rating:	DC 5V
Product:	Bluetooth Shielded Module	Temp.(°C)/Hum.(%):	27(°C)/48%
Model No.:	BM77SPPS5	Test Engineer:	Hugo Chang
Test Mode:	BT-2480-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	21364.583	29.47	19.46	48.93	74.00	-25.07	peak			

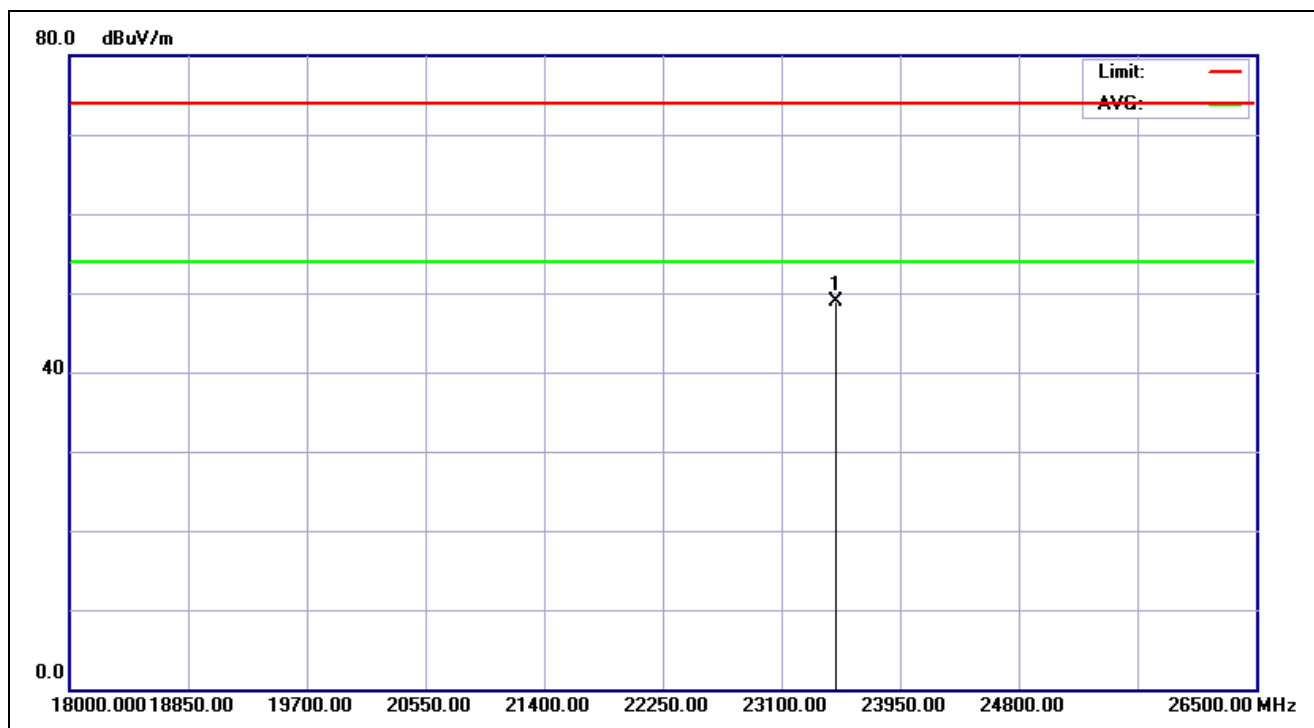


Service No.:	114010205-BT	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2013/8/20 13:35:30
Applicant:	ISSC	Test Rating:	DC 5V
Product:	Bluetooth Shielded Module	Temp.(°C)/Hum.(%):	27(°C)/48%
Model No.:	BM77SPPS5	Test Engineer:	Hugo Chang
Test Mode:	EDR-2402-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	23489.583	30.11	18.70	48.81	74.00	-25.19	peak			

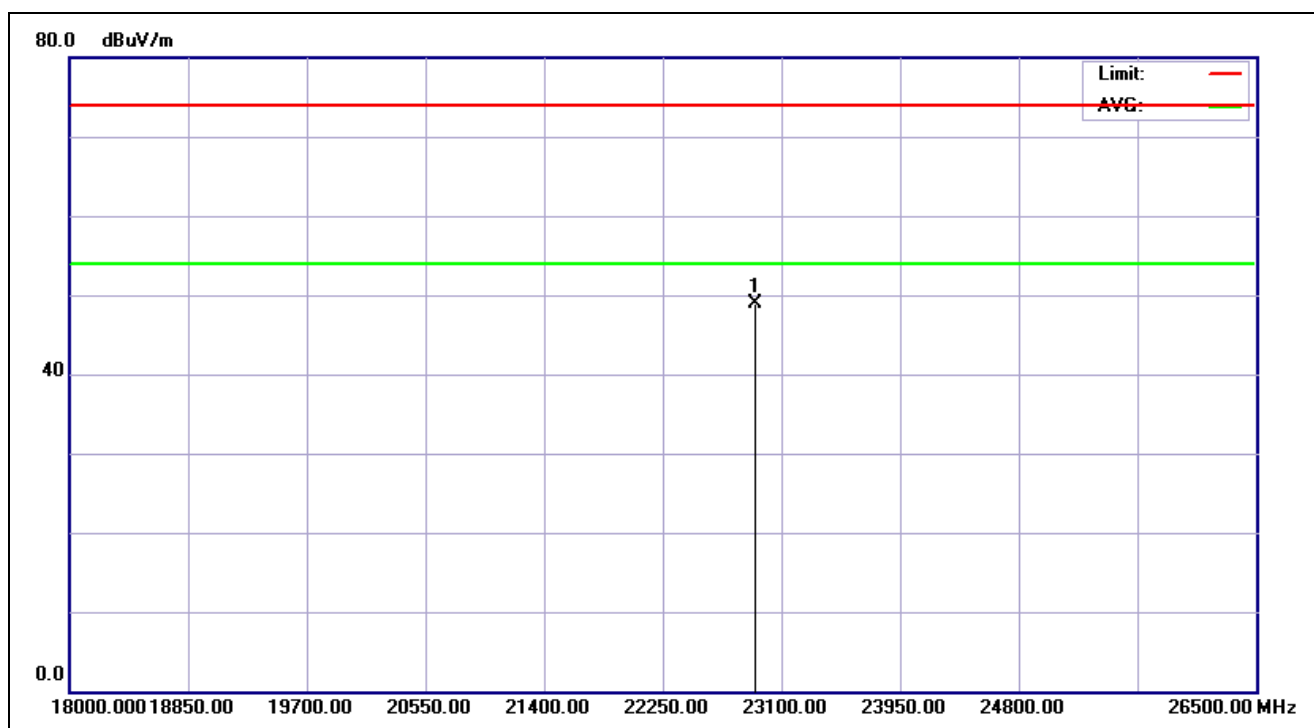


Service No.:	114010205-BT	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2013/8/20 13:35:55
Applicant:	ISSC	Test Rating:	DC 5V
Product:	Bluetooth Shielded Module	Temp.(°C)/Hum.(%)	27(°C)/48%
Model No.:	BM77SPPS5	Test Engineer:	Hugo Chang
Test Mode:	EDR-2402-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	22917.468	30.07	18.78	48.85	74.00	-25.15	peak			

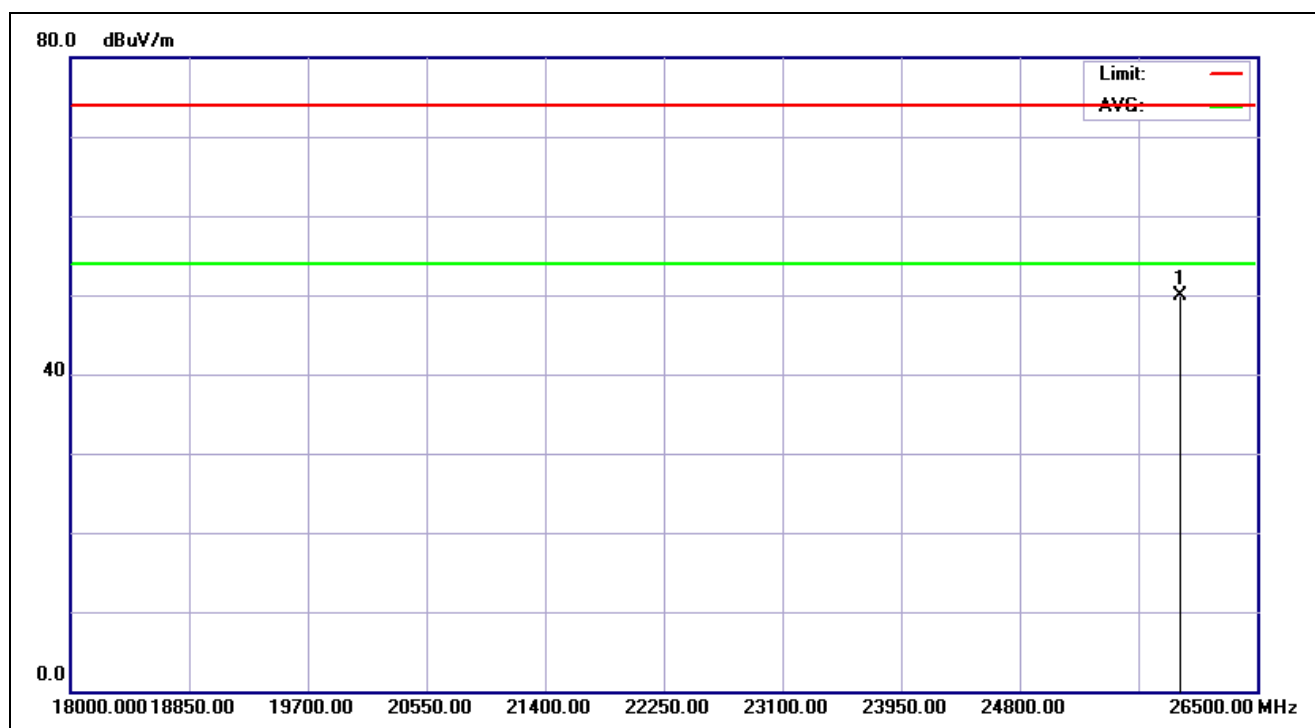


Service No.:	114010205-BT	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2013/8/20 13:36:24
Applicant:	ISSC	Test Rating:	DC 5V
Product:	Bluetooth Shielded Module	Temp.(°C)/Hum.(%):	27(°C)/48%
Model No.:	BM77SPPS5	Test Engineer:	Hugo Chang
Test Mode:	EDR-2441-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	25955.128	32.16	17.66	49.82	74.00	-24.18	peak			

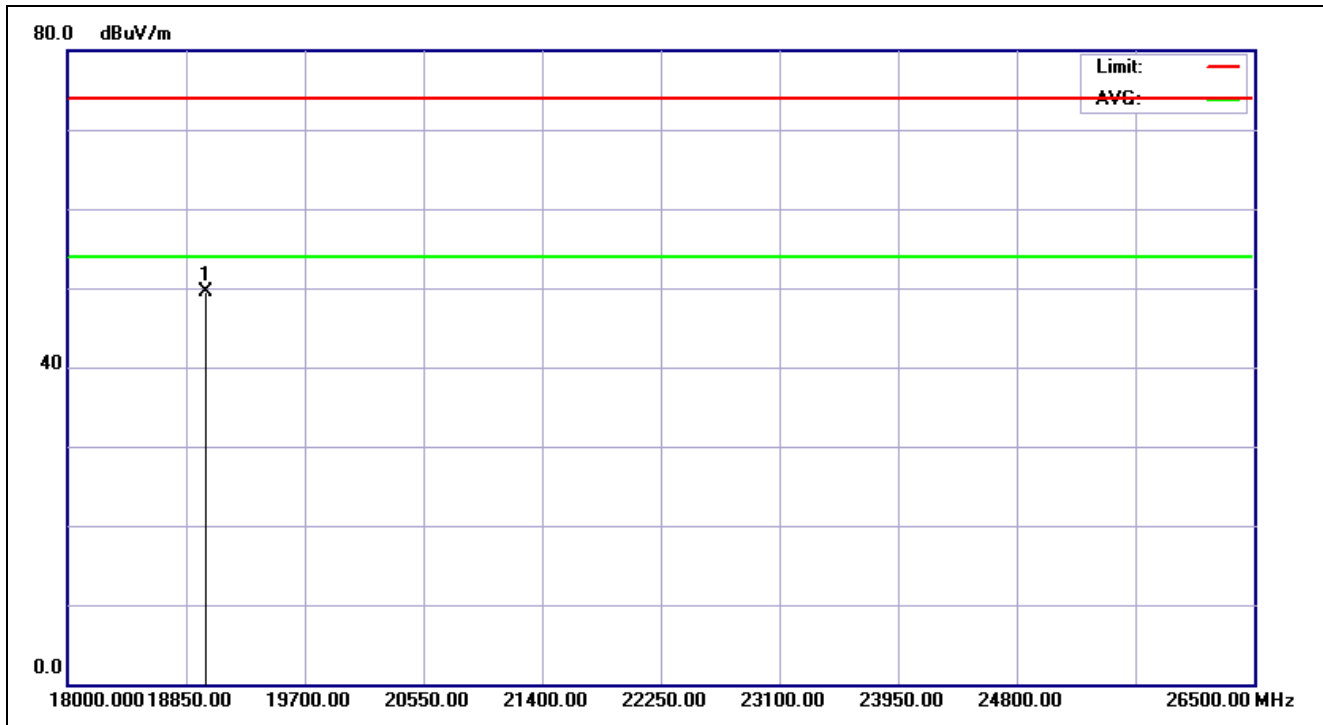


Service No.:	114010205-BT	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2013/8/20 13:36:57
Applicant:	ISSC	Test Rating:	DC 5V
Product:	Bluetooth Shielded Module	Temp.(°C)/Hum.(%):	27(°C)/48%
Model No.:	BM77SPPS5	Test Engineer:	Hugo Chang
Test Mode:	EDR-2441-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	18994.391	29.96	19.48	49.44	74.00	-24.56	peak			

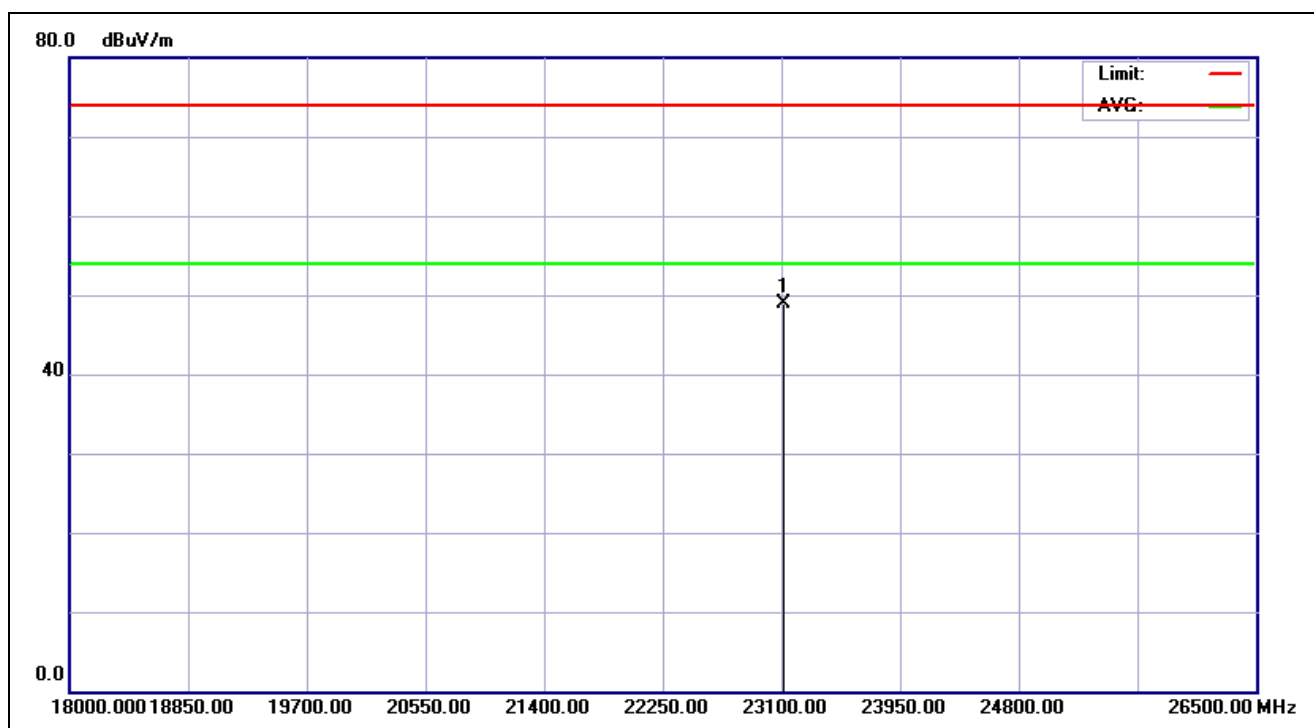

Service No.:	114010205-BT	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2013/8/20 13:37:28
Applicant:	ISSC	Test Rating:	DC 5V
Product:	Bluetooth Shielded Module	Temp.(°C)/Hum.(%):	27(°C)/48%
Model No.:	BM77SPPS5	Test Engineer:	Hugo Chang
Test Mode:	EDR-2480-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	23121.795	30.24	18.70	48.94	74.00	-25.06	peak			

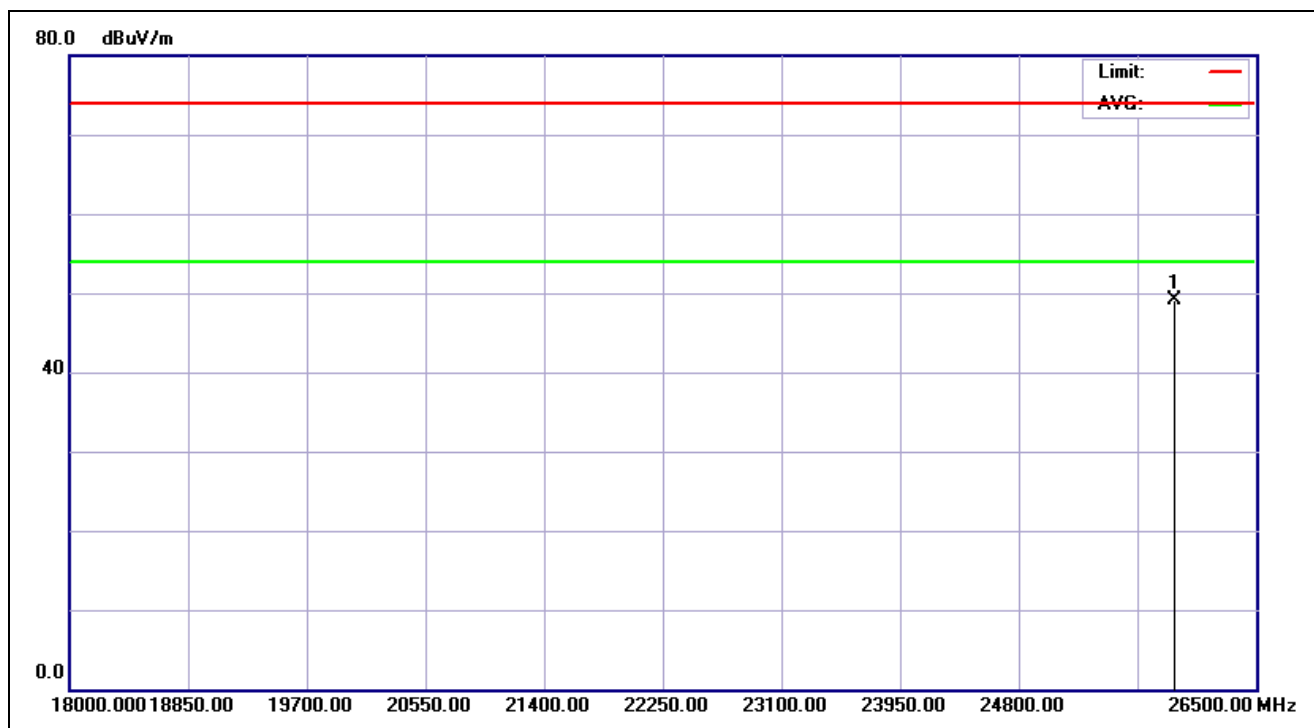

Service No.:	114010205-BT	Test Distance:	3M
Test Standard:	FCC above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2013/8/20 13:37:57
Applicant:	ISSC	Test Rating:	DC 5V
Product:	Bluetooth Shielded Module	Temp.(°C)/Hum.(%):	27(°C)/48%
Model No.:	BM77SPPS5	Test Engineer:	Hugo Chang
Test Mode:	EDR-2480-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	25914.263	32.03	17.13	49.16	74.00	-24.84	peak			


Spurious Emissions, TX Mode, 30M-1G



TUV Taiwan


11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

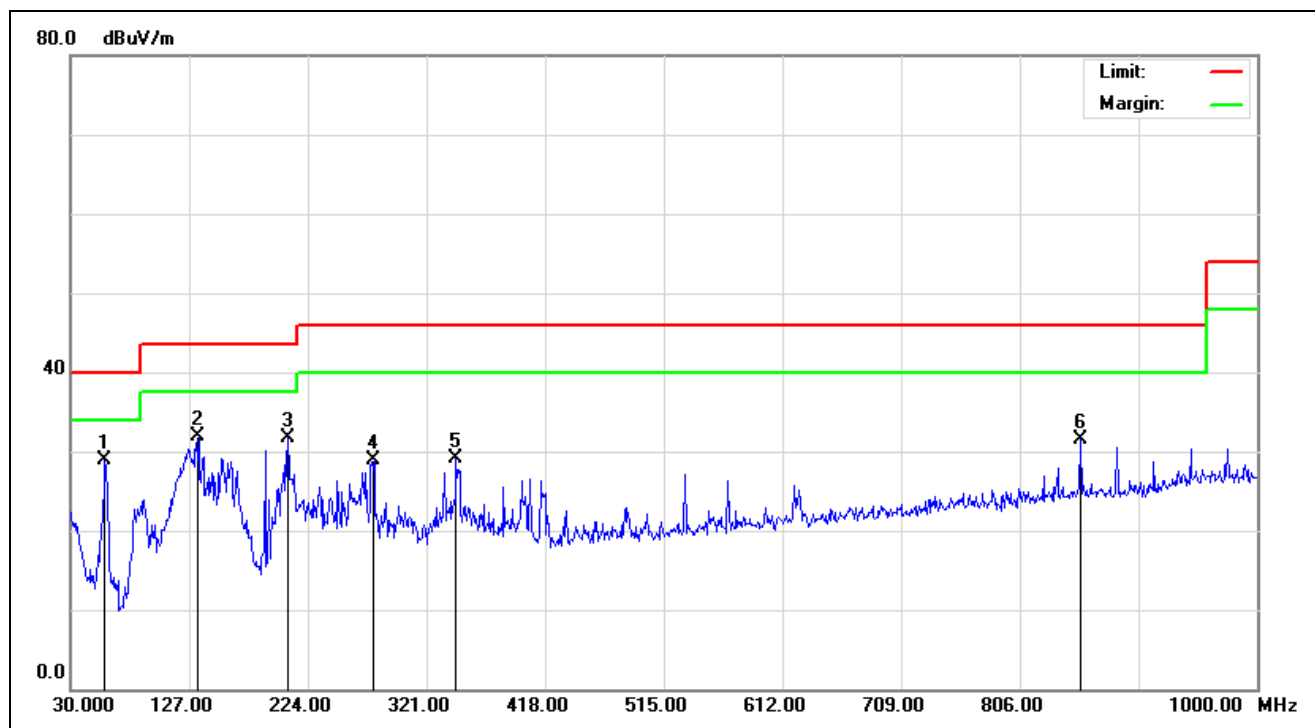

Service No.:	114010205-BT	Test Distance:	3M
Test Standard:	FCC Class B 3M Radiation	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2013/8/20 09:33:12
Applicant:	ISSC	Test Rating:	DC 5V
Product:	Bluetooth Shielded Module	Temp.(°C)/Hum.(%):	27(°C)/48%
Model No.:	BM77SPPS5	Test Engineer:	Hugo Chang
Test Mode:			
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	58.1300	-19.13	47.94	28.81	40.00	-11.19	QP	400	174	
2	134.7599	-12.85	44.74	31.89	43.50	-11.61	QP	200	142	
3	207.5099	-14.63	46.32	31.69	43.50	-11.81	QP	200	134	
4	278.3199	-11.22	40.06	28.84	46.00	-17.16	QP	100	131	
5	345.2500	-9.54	38.56	29.02	46.00	-16.98	QP	200	167	
6	855.4700	-2.38	33.82	31.44	46.00	-14.56	QP	200	305	

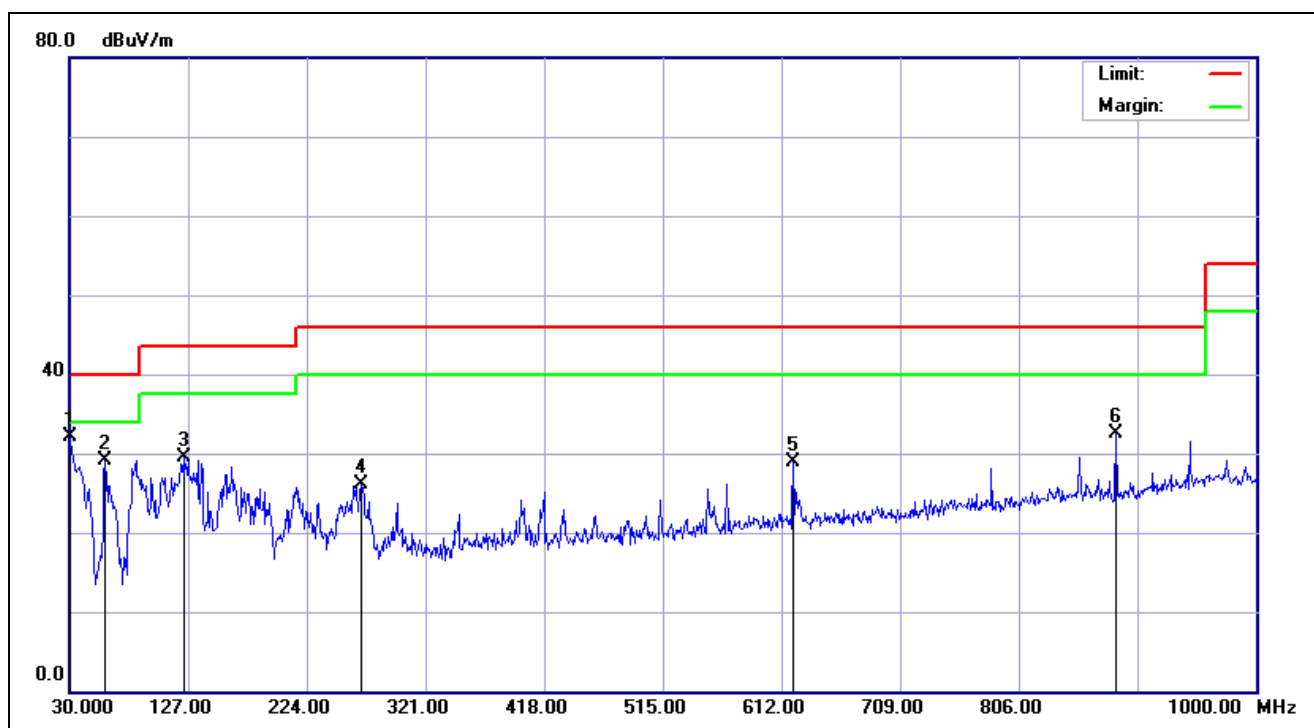

Service No.:	114010205-BT	Test Distance:	3M
Test Standard:	FCC Class B 3M Radiation	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2013/8/20 09:37:11
Applicant:	ISSC	Test Rating:	DC 5V
Product:	Bluetooth Shielded Module	Temp.(°C)/Hum.(%):	27(°C)/48%
Model No.:	BM77SPPS5	Test Engineer:	Hugo Chang
Test Mode:			
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	30.9700	-6.57	38.70	32.13	40.00	-7.87	QP	100	176	
2	59.1000	-19.38	48.51	29.13	40.00	-10.87	QP	100	122	
3	123.1200	-13.16	42.58	29.42	43.50	-14.08	QP	100	206	
4	268.6200	-11.27	37.29	26.02	46.00	-19.98	QP	100	283	
5	621.7000	-5.73	34.65	28.92	46.00	-17.08	QP	100	232	
6	885.5400	-2.17	34.70	32.53	46.00	-13.47	QP	100	278	