



RADIO TEST REPORT

Test Report No. : 12205060H-A-R2

Applicant : Bose Corporation
Type of Equipment : Powered sound bar with wireless link
Model No. : 425842
FCC ID : A94425842
Test regulation : FCC Part 15 Subpart C: 2018
Test Result : Complied

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the above regulation.
4. The test results in this report are traceable to the national or international standards.
5. This test report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.
6. This test report covers Radio technical requirements. It does not cover administrative issues such as Manual or non-Radio test related Requirements. (if applicable)
7. This report is a revised version of 12205060H-A-R1. 12205060H-A-R1 is replaced with this report.

Date of test: March 13 to 19, 2018

Representative test engineer:

T. Nakagawa
Tomohisa Nakagawa
Engineer
Consumer Technology Division

Approved by:

Takayuki S.
Takayuki Shimada
Leader
Consumer Technology Division



NVLAP LAB CODE: 200572-0

This laboratory is accredited by the NVLAP LAB CODE 200572-0, U.S.A. The tests reported herein have been performed in accordance with its terms of accreditation.
*As for the range of Accreditation in NVLAP, you may refer to the WEB address,
http://japan.ul.com/resources/emc_accredited/

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

13-EM-F0429

REVISION HISTORY

Original Test Report No.: 12205060H-A

[illegible]

CONTENTS	PAGE
SECTION 1: Customer information.....	4
SECTION 2: Equipment under test (E.U.T.).....	4
SECTION 3: Test specification, procedures & results.....	5
SECTION 4: Operation of E.U.T. during testing.....	8
SECTION 5: Conducted Emission.....	11
SECTION 6: Radiated Spurious Emission	12
SECTION 7: Antenna Terminal Conducted Tests.....	15
APPENDIX 1: Test data	16
Conducted Emission	16
6 dB Bandwidth and 99 % Occupied Bandwidth.....	18
Maximum Peak Output Power	21
Average Output Power	22
Radiated Spurious Emission	24
Conducted Spurious Emission	30
Power Density	33
APPENDIX 2: Test instruments	35
APPENDIX 3: Photographs of test setup	36
Conducted Emission	36
Radiated Spurious Emission	37

SECTION 1: Customer information

Company Name	:	Bose Corporation
Address	:	100 Mountain. RdFramingham, MA 01701 United States
Contact Person	:	Mark Hetherman

SECTION 2: Equipment under test (E.U.T.)

2.1 Identification of E.U.T.

Type of Equipment	:	Powered sound bar with wireless link
Model No.	:	425842
Serial No.	:	Refer to Section 4, Clause 4.2
Rating	:	AC 100 V – 240 V, 50 / 60 Hz, 65 W
Receipt Date of Sample	:	March 7, 2018
Country of Mass-production	:	Malaysia
Condition of EUT	:	Engineering prototype (Not for Sale: This sample is equivalent to mass-produced items.)
Modification of EUT	:	No Modification by the test lab

2.2 Product Description

Model: 425842 (referred to as the EUT in this report) is a Powered sound bar with wireless link.

Radio Specification

Bluetooth Low Energy

Radio Type	:	Transceiver
Frequency of Operation	:	2402 MHz - 2480 MHz
Modulation	:	GFSK
Antenna type	:	Flexible antenna
Antenna Gain	:	-0.80 dBi
Clock frequency (Maximum)	:	48 MHz

SECTION 3: Test specification, procedures & results

3.1 Test Specification

Test Specification : FCC Part 15 Subpart C
FCC Part 15 final revised on March 12, 2018 and effective April 11, 2018

Title : FCC 47CFR Part15 Radio Frequency Device Subpart C Intentional Radiators
Section 15.207 Conducted limits
Section 15.247 Operation within the bands 902-928MHz,
2400-2483.5MHz, and 5725-5850MHz

* The revision on March 12, 2018, does not affect the test specification applied to the EUT.

3.2 Procedures and results

Item	Test Procedure	Specification	Worst margin	Results	Remarks
Conducted Emission	FCC: ANSI C63.10-2013 6. Standard test methods ----- IC: RSS-Gen 8.8	FCC: Section 15.207 ----- IC: RSS-Gen 8.8	QP 25.1 dB, 0.15000 MHz, N AV 20.1 dB, 23.12810 MHz, L	Complied	-
6dB Bandwidth	FCC: KDB 558074 D01 15.247 Meas Guidance v05 ----- IC: -	FCC: Section 15.247(a)(2) ----- IC: RSS-247 5.2(a)	See data.	Complied	Conducted
Maximum Peak Output Power	FCC: KDB 558074 D01 15.247 Meas Guidance v05 ----- IC: RSS-Gen 6.12	FCC: Section 15.247(b)(3) ----- IC: RSS-247 5.4(d)		Complied	Conducted
Power Density	FCC: KDB 558074 D01 15.247 Meas Guidance v05 ----- IC: -	FCC: Section 15.247(e) ----- IC: RSS-247 5.2(b)		Complied	Conducted
Spurious Emission Restricted Band Edges	FCC: KDB 558074 D01 15.247 Meas Guidance v05 ----- IC: RSS-Gen 6.13	FCC: Section15.247(d) ----- IC: RSS-247 5.5 RSS-Gen 8.9 RSS-Gen 8.10	2.3 dB 4960.000 MHz, Horizontal, AV	Complied	Conducted (below 30 MHz)/ Radiated (above 30 MHz) (*1)

Note: UL Japan, Inc.'s EMI Work Procedures No. 13-EM-W0420 and 13-EM-W0422.

*1) Radiated test was selected over 30 MHz based on section 15.247(d) and KDB 558074 D01 15.247 Meas Guidance v05 8.5 and 8.6.

* In case any questions arise about test procedure, ANSI C63.10: 2013 is also referred.

FCC Part 15.31 (e)

This EUT provides stable voltage constantly to RF Module regardless of input voltage. Therefore, this EUT complies with the requirement.

FCC Part 15.203 Antenna requirement

It is impossible for end users to replace the antenna, because the antenna is mounted inside of the EUT. Therefore, the equipment complies with the antenna requirement of Section 15.203.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

3.3 Addition to standard

Item	Test Procedure	Specification	Worst margin	Results	Remarks
99% Occupied Bandwidth	IC: RSS-Gen 6.6	IC: -	N/A	-	Conducted

Other than above, no addition, exclusion nor deviation has been made from the standard.

3.4 Uncertainty

EMI

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor $k=2$.
Ise EMC Lab.

Conducted emission

using Item	Frequency range	Uncertainty (+/-)
AMN (LISN)	0.009 MHz to 0.15 MHz	3.8 dB
	0.15 MHz to 30 MHz	3.4 dB

Radiated emission

Measurement distance	Frequency range	Uncertainty (+/-)
3 m	9 kHz to 30 MHz	3.3 dB
10 m		3.2 dB
3 m	30 MHz to 200 MHz (Horizontal)	4.8 dB
	(Vertical)	5.0 dB
	200 MHz to 1000 MHz (Horizontal)	5.2 dB
	(Vertical)	6.3 dB
10 m	30 MHz to 200 MHz (Horizontal)	4.8 dB
	(Vertical)	4.9 dB
	200 MHz to 1000 MHz (Horizontal)	5.0 dB
	(Vertical)	5.0 dB
3 m	1 GHz to 6 GHz	5.0 dB
	6 GHz to 18 GHz	5.3 dB
1 m	10 GHz to 26.5 GHz	5.8 dB
	26.5 GHz to 40 GHz	5.8 dB
10 m	1 GHz to 18 GHz	5.2 dB

Antenna Terminal test

Test Item	Uncertainty (+/-)
RF output power	1.3 dB
Antenna terminal conducted emission / Power density / Burst power	2.7 dB
Adjacent channel power / Channel power	
Below 3 GHz	1.9 dB
3 GHz to 6 GHz	2.1 dB

Conducted Emission test

The data listed in this test report has enough margin, more than the site margin.

Radiated emission test

The data listed in this report meets the limits unless the uncertainty is taken into consideration.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

3.5 Test Location

UL Japan, Inc. Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999, Facsimile: +81 596 24 8124

NVLAP Lab. code: 200572-0 / FCC Test Firm Registration Number: 199967

Test site	IC Registration Number	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Other rooms	Maximum measurement distance
No.1 semi-anechoic chamber	2973C-1	19.2 x 11.2 x 7.7	7.0 x 6.0	No.1 Power source room	10 m
No.2 semi-anechoic chamber	2973C-2	7.5 x 5.8 x 5.2	4.0 x 4.0	-	3 m
No.3 semi-anechoic chamber	2973C-3	12.0 x 8.5 x 5.9	6.8 x 5.75	No.3 Preparation room	3 m
No.3 shielded room	-	4.0 x 6.0 x 2.7	N/A	-	-
No.4 semi-anechoic chamber	2973C-4	12.0 x 8.5 x 5.9	6.8 x 5.75	No.4 Preparation room	3 m
No.4 shielded room	-	4.0 x 6.0 x 2.7	N/A	-	-
No.5 semi-anechoic chamber	-	6.0 x 6.0 x 3.9	6.0 x 6.0	-	-
No.6 shielded room	-	4.0 x 4.5 x 2.7	4.0 x 4.5	-	-
No.6 measurement room	-	4.75 x 5.4 x 3.0	4.75 x 4.15	-	-
No.7 shielded room	-	4.7 x 7.5 x 2.7	4.7 x 7.5	-	-
No.8 measurement room	-	3.1 x 5.0 x 2.7	N/A	-	-
No.9 measurement room	-	8.8 x 4.6 x 2.8	2.4 x 2.4	-	-
No.11 measurement room	-	6.2 x 4.7 x 3.0	4.8 x 4.6	-	-

* Size of vertical conducting plane (for Conducted Emission test) : 2.0 m x 2.0m for No.1, No.2, No.3, and No.4 semi-anechoic chambers and No.3 and No.4 shielded rooms.

3.6 Test data, Test instruments, and Test set up

Refer to APPENDIX.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

SECTION 4: Operation of E.U.T. during testing

4.1 Operating Mode(s)

Mode	Remarks*
Bluetooth (BT) Low Energy (LE)	Maximum Packet Size, PRBS9
*Transmitting duty was 100 % on all tests. *The worst condition was determined based on the test result of Maximum Peak Output Power (Mid Channel)	
*Power of the EUT was set by the software as follows; Power settings: 10 Software: BLEBridge: V0.05-57-gd57a022 *This setting of software is the worst case. Any conditions under the normal use do not exceed the condition of setting. In addition, end users cannot change the settings of the output power of the product.	

*The details of Operating mode(s)

Test Item	Operating Mode	Tested frequency
Conducted Emission, 6dB Bandwidth, 99% Occupied Bandwidth, Maximum Peak Output Power, Spurious Emission (Radiated / Conducted), Power Density,	Tx BT LE	2402 MHz 2440 MHz 2480 MHz

UL Japan, Inc.

Ise EMC Lab.


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

4.2 Configuration and peripherals

[Other than Antenna Terminal Conducted test]

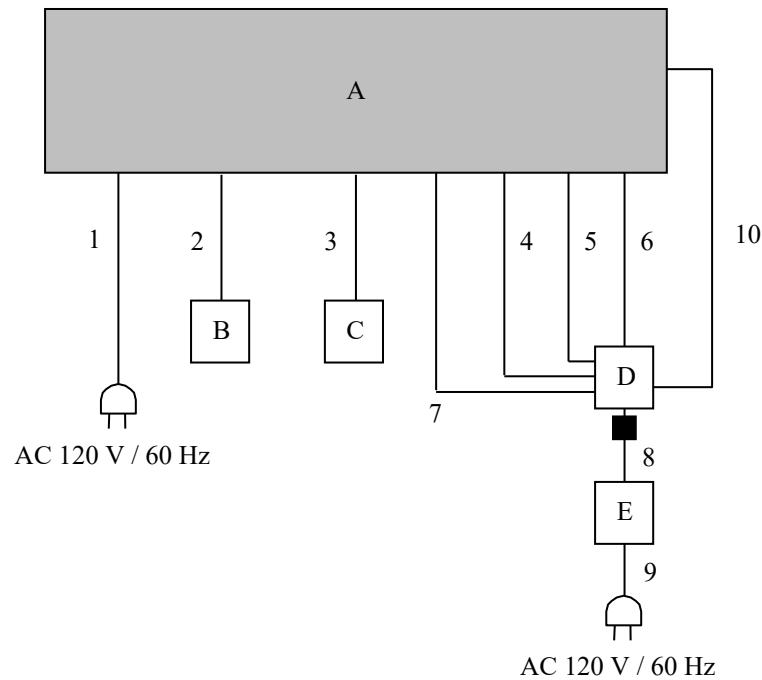

* Cabling and setup(s) were taken into consideration and test data was taken under worse case conditions.

Description of EUT and Support equipment

No.	Item	Model number	Serial number	Manufacturer	Remarks
A	Powered sound bar with wireless link	425842	078321P80390090AE	BOSE	EUT
B	Bose ADAPTiQ® headset	TPK-638011-0010	-	BOSE	-
C	Microphone	-	-	FUJITSU	-
D	Laptop PC	CF-N8HWCDDPS	0CKSA09265	Panasonic	-
E	AC Adapter	CF-AA6372B	6372BM610X10953E	Panasonic	-

List of cables used

No.	Name	Length (m)	Shield		Remarks
			Cable	Connector	
1	AC Cable	1.4	Unshielded	Unshielded	-
2	Audio Cable	6.9	Shielded	Shielded	-
3	Audio Cable	1.6	Shielded	Shielded	-
4	Audio Cable	1.7	Shielded	Shielded	-
5	LAN Cable	3.0	Unshielded	Unshielded	-
6	USB Cable	1.5	Shielded	Shielded	-
7	HDMI Cable	3.0	Shielded	Shielded	-
8	DC Cable	1.1	Unshielded	Unshielded	-
9	AC Cable	0.9	Unshielded	Unshielded	-
10	Audio Cable	1.5	Shielded	Shielded	-

UL Japan, Inc.


Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

[For Antenna Terminal Conducted test]

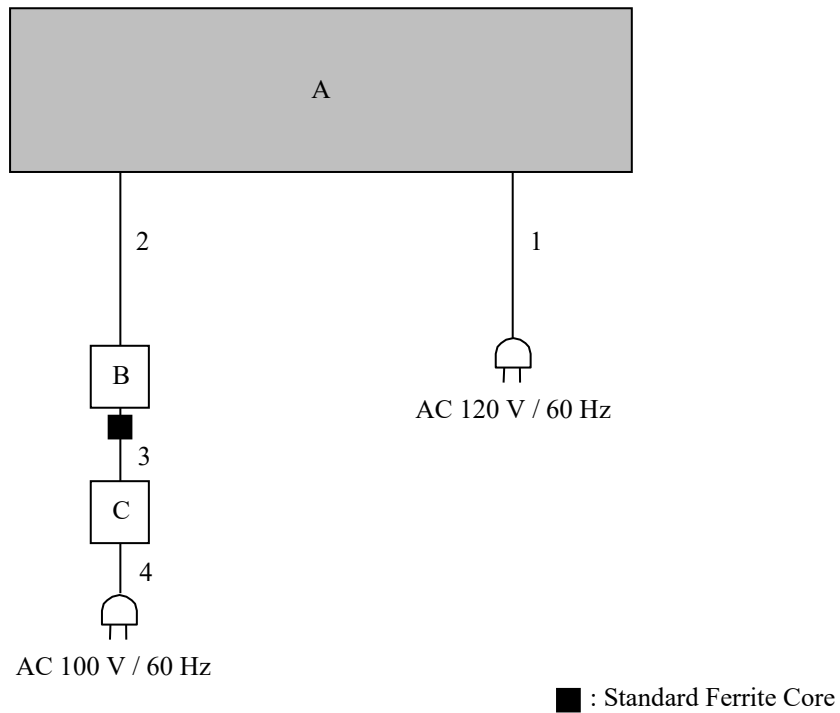

* Cabling and setup(s) were taken into consideration and test data was taken under worse case conditions.

Description of EUT and Support equipment

No.	Item	Model number	Serial number	Manufacturer	Remarks
A	Powered sound bar with wireless link	425842	078321P80390090AE	BOSE	EUT
B	Laptop PC	CF-N8HWC DPS	0BKSA07449	Panasonic	-
C	AC Adapter	CF-AA6372B	6372BM409X17298B	Panasonic	-

List of cables used

No.	Name	Length (m)	Shield		Remarks
			Cable	Connector	
1	AC Cable	1.4	Unshielded	Unshielded	-
2	Signal Cable	1.8	Shielded	Shielded	-
3	DC Cable	1.0	Unshielded	Unshielded	-
4	AC Cable	0.9	Unshielded	Unshielded	-

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

SECTION 5: Conducted Emission

Test Procedure and conditions

EUT was placed on a urethane platform of nominal size, 1.0 m by 1.5 m, raised 0.8 m above the conducting ground plane.

The rear of tabletop was located 40 cm to the vertical conducting plane. The rear of EUT, including peripherals aligned and flushed with rear of tabletop. All other surfaces of tabletop were at least 80cm from any other grounded conducting surface. EUT was located 80 cm from a Line Impedance Stabilization Network (LISN) / Artificial mains Network (AMN) and excess AC cable was bundled in center.

1) For the tests on EUT with other peripherals (as a whole system)

I/O cables that were connected to the peripherals were bundled in center. They were folded back and forth forming a bundle 30 cm to 40 cm long and were hanged at a 40 cm height to the ground plane. All unused 50ohm connectors of the LISN (AMN) were resistivity terminated in 50 ohm when not connected to the measuring equipment.

The AC Mains Terminal Continuous disturbance Voltage has been measured with the EUT in a Semi Anechoic Chamber.


The EUT was connected to a LISN (AMN).

An overview sweep with peak detection has been performed.

The test results and limit are rounded off to one decimal place, so some differences might be observed.

Detector	: QP and CISPR AV
Measurement range	: 0.15 MHz - 30 MHz
Test data	: APPENDIX
Test result	: Pass

Figure 1: Test Setup

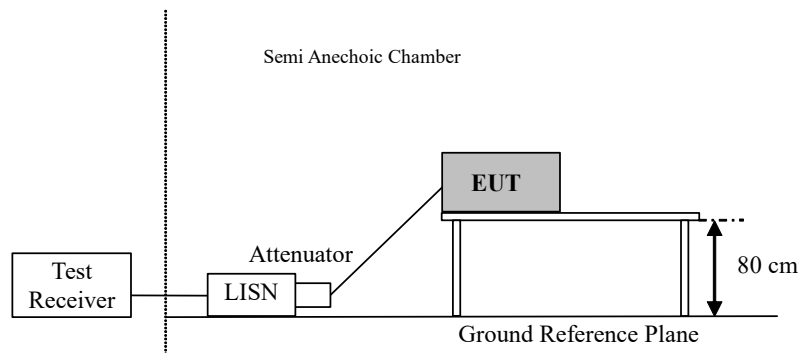

SECTION 6: Radiated Spurious Emission

Test Procedure

It was measured based on "8.5 and 8.6 of KDB 558074 D01 15.247 Meas Guidance v05".

[For below 1 GHz]

EUT was placed on a urethane platform of nominal size, 0.5 m by 1.5 m, raised 0.8 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with a ground plane.

[For above 1 GHz]

EUT was placed on a urethane platform of nominal size, 0.5 m by 1.0 m, raised 1.5 m above the conducting ground plane.

The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with absorbent materials lined on a ground plane.

The height of the measuring antenna varied between 1 and 4 m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field strength.

The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver, or the Spectrum Analyzer.

The measurements were made with the following detector function of the test receiver and the Spectrum analyzer (in linear mode).

The test was made with the detector (RBW/VBW) in the following table.

When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

Test Antennas are used as below;

Frequency	30 MHz to 200 MHz	200 MHz to 1 GHz	Above 1 GHz
Antenna Type	Biconical	Logperiodic	Horn

In any 100 kHz bandwidth outside the restricted band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator confirmed 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on a radiated measurement.


20 dBc was applied to the frequency over the limit of FCC 15.209 / Table 4 of RSS-Gen 8.9(IC) and outside the restricted band of FCC15.205 / Table 6 of RSS-Gen 8.10 (IC).

Frequency	Below 1 GHz	Above 1 GHz		20 dBc
Instrument used	Test Receiver	Spectrum Analyzer		Spectrum Analyzer
Detector	QP	PK	AV *1)	PK
IF Bandwidth	BW 120 kHz	RBW: 1 MHz VBW: 3 MHz	Average Power Method: RBW: 1 MHz VBW: 3 MHz Detector: Power Averaging (RMS) Trace: 100 traces If duty cycle was less than 98%, a duty factor was added to the results.	RBW: 100 kHz VBW: 300kHz

*1) Average Power Measurement was performed based on ANSI C63.10-2013..

Figure 2: Test Setup


Below 1 GHz

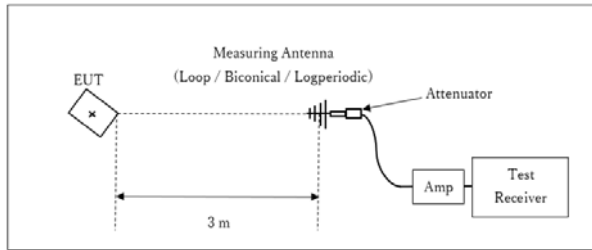

x : Center of turn table

Test Distance: 3 m

1 GHz - 10 GHz

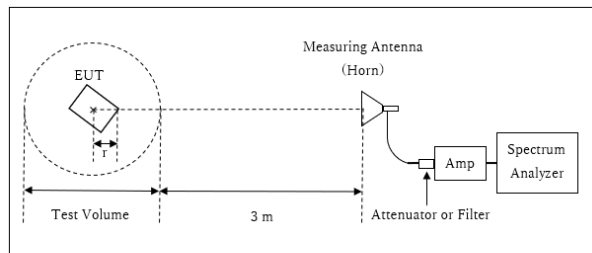

r : Radius of an outer periphery of EUT

x : Center of turn table

Distance Factor: $20 \times \log (4.0 \text{ m} / 3.0 \text{ m}) = 2.5 \text{ dB}$


* Test Distance: $(3 + \text{Test Volume} / 2) - r = 4.0 \text{ m}$

Test Volume : 3 m

(Test Volume has been calibrated based on CISPR 16-1-4.)

r = 0.5 m

10 GHz - 26.5 GHz

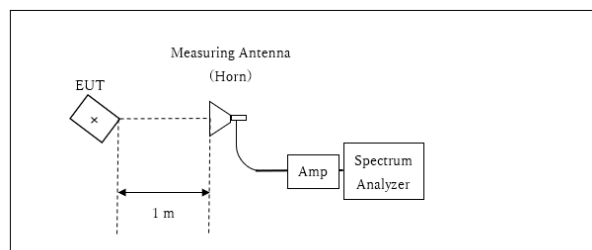

x : Center of turn table

Distance Factor: $20 \times \log (1.0 \text{ m} / 3.0 \text{ m}) = -9.5 \text{ dB}$

*Test Distance: 1 m

The test was made on EUT at the normal use position.

The test results and limit are rounded off to one decimal place, so some differences might be observed.

Measurement range : 30 MHz - 26.5 GHz

Test data : APPENDIX

Test result : Pass

SECTION 7: Antenna Terminal Conducted Tests

Test Procedure

The tests were made with below setting connected to the antenna port.

Test	Span	RBW	VBW	Sweep time	Detector	Trace	Instrument used
6dB Bandwidth	3 MHz	100 kHz	300 kHz	Auto	Peak	Max Hold	Spectrum Analyzer
99% Occupied Bandwidth *1)	Enough width to display emission skirts	1 to 5 % of OBW	Three times of RBW	Auto	Peak	Max Hold	Spectrum Analyzer
Maximum Peak Output Power	-	-	-	Auto	Peak/ Average *2)	-	Power Meter (Sensor: 50 MHz BW)
Peak Power Density	1.5 times the 6dB Bandwidth	3 kHz	10 kHz	Auto	Peak	Max Hold	Spectrum Analyzer *3)
Conducted Spurious Emission *4)	9kHz to 150kHz	200 Hz	620 Hz	Auto	Peak	Max Hold	Spectrum Analyzer
	150kHz to 30MHz	9.1 kHz	27 kHz				
*1) Peak hold was applied as Worst-case measurement. *2) Reference data *3) Section 11.10.2 Method PKPSD (peak PSD) of "ANSI C63.10-2013". *4) In the frequency range below 30MHz, RBW was narrowed to separate the noise contents. Then, wide-band noise near the limit was checked separately, however the noise was low enough as shown in the chart. (9 kHz - 150 kHz: RBW = 200 Hz, 150 kHz - 30 MHz: RBW = 9.1 kHz).							

The test results and limit are rounded off to two decimals place, so some differences might be observed.

Test data : APPENDIX
Test result : Pass

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999


Facsimile : +81 596 24 8124

APPENDIX 1: Test data

Conducted Emission

Report No. 12205060H
Test place Ise EMC Lab. No.4 Semi Anechoic Chamber
Date March 19, 2018
Temperature / Humidity 18 deg. C / 45 % RH
Engineer Takafumi Noguchi
Mode Tx BT LE 2402 MHz

LIMIT : FCC15. 207 QP
FCC15. 207 AV

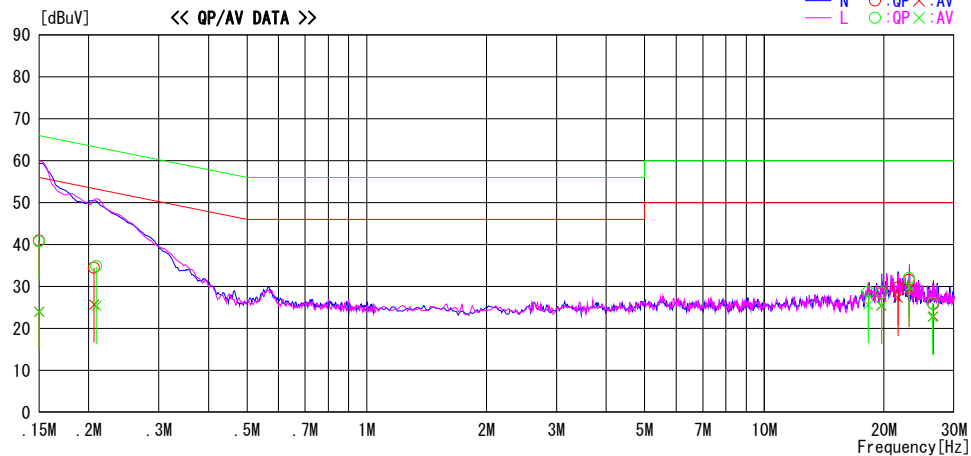

Frequency [MHz]	Reading		Corr. Factor	Results		Limit		Margin		Phase	Comment
	QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dB]	AV [dB]		
0.15000	27.6	10.7	13.3	40.9	24.0	66.0	56.0	25.1	32.0	N	
0.20621	21.2	12.4	13.3	34.5	25.7	63.4	53.4	28.9	27.7	N	
19.70900	14.0	11.0	14.4	28.4	25.4	60.0	50.0	31.6	24.6	N	
21.66200	15.1	12.7	14.6	29.7	27.3	60.0	50.0	30.3	22.7	N	
23.12710	17.0	14.8	14.6	31.6	29.4	60.0	50.0	28.4	20.6	N	
26.60810	11.1	8.2	14.7	25.8	22.9	60.0	50.0	34.2	27.1	N	
0.15000	27.4	10.7	13.3	40.7	24.0	66.0	56.0	25.3	32.0	L	
0.20892	21.5	12.1	13.3	34.8	25.4	63.2	53.2	28.4	27.8	L	
18.24200	14.3	11.2	14.4	28.7	25.6	60.0	50.0	31.3	24.4	L	
19.70800	14.1	11.1	14.4	28.5	25.5	60.0	50.0	31.5	24.5	L	
23.12810	17.4	15.3	14.6	32.0	29.9	60.0	50.0	28.0	20.1	L	
26.48630	11.3	8.0	14.7	26.0	22.7	60.0	50.0	34.0	27.3	L	

CHART: WITH FACTOR Peak hold data. CALCULATION : RESULT = READING + C.F (LISN + CABLE + ATT)
Except for the above table: adequate margin data below the limits.

UL Japan, Inc.

Ise EMC Lab.


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Conducted Emission

Report No. 12205060H
Test place Ise EMC Lab. No.4 Semi Anechoic Chamber
Date March 19, 2018
Temperature / Humidity 18 deg. C / 45 % RH
Engineer Takafumi Noguchi
Mode Tx BT LE 2440 MHz

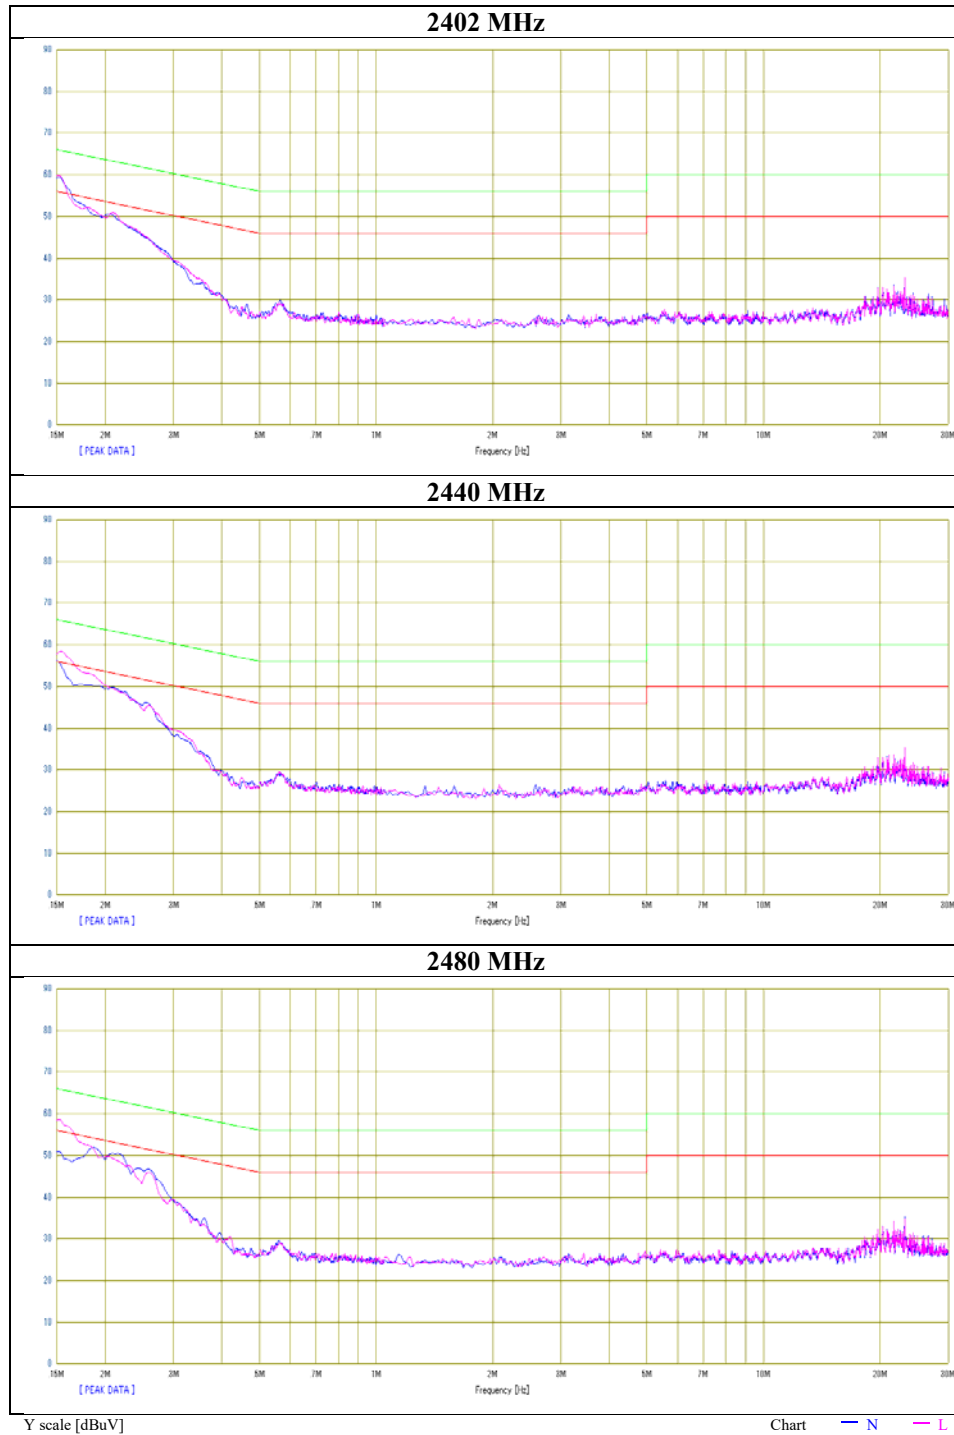

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

6 dB Bandwidth and 99 % Occupied Bandwidth


Report No. 12205060H
Test place Ise EMC Lab. No. 6 Shielded Room
Date March 13, 2018
Temperature / Humidity 24 deg. C / 45 % RH
Engineer Tomohisa Nakagawa
Mode Tx BT LE

Mode	Frequency [MHz]	99% Occupied Bandwidth [kHz]	6dB Bandwidth [MHz]	Limit for 6dB Bandwidth [MHz]
BT LE	2402	1053.3	0.701	> 0.5000
	2440	1055.9	0.718	> 0.5000
	2480	1054.1	0.723	> 0.5000


6dB Bandwidth

BT LE


2402 MHz

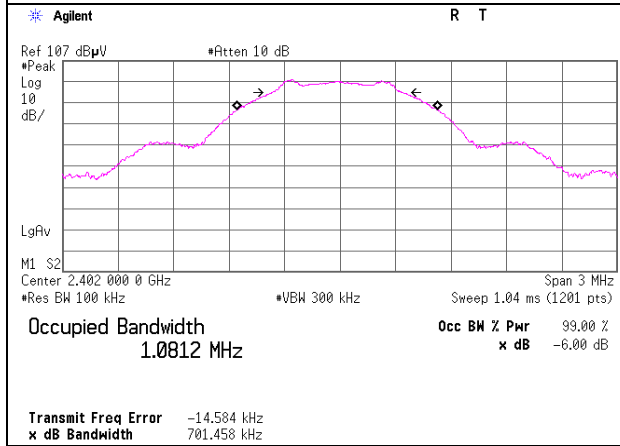

2440 MHz

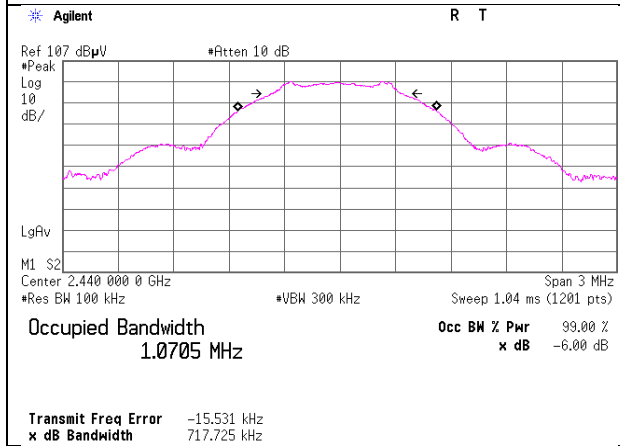


2480 MHz

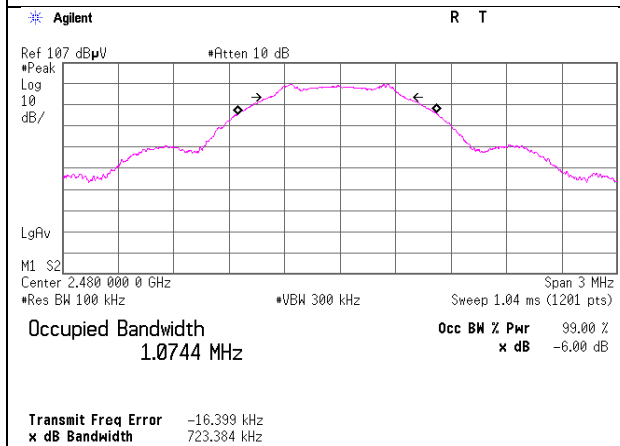


99%Occupied Bandwidth

BT LE


2402 MHz

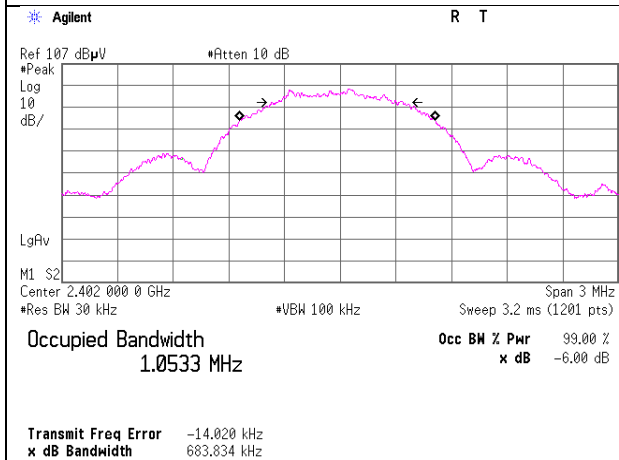

2440 MHz

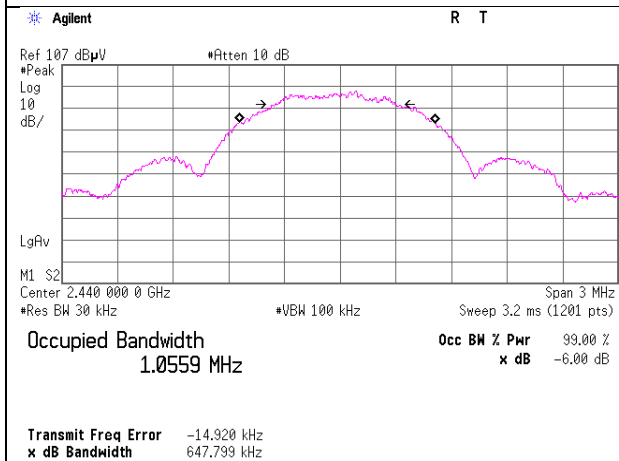

2480 MHz

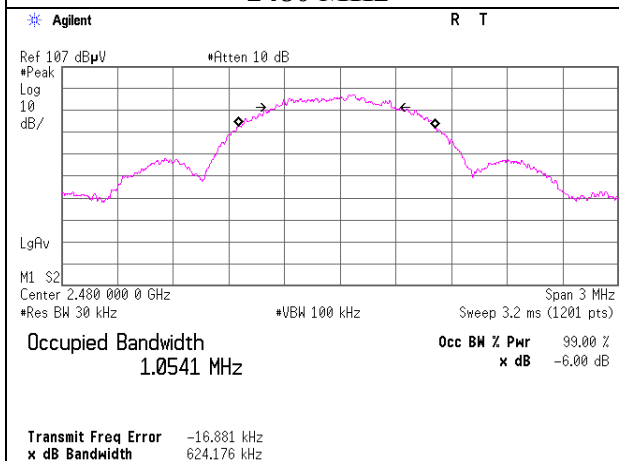

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Maximum Peak Output Power

Report No. 12205060H
Test place Ise EMC Lab. No. 6 Shielded Room
Date March 13, 2018
Temperature / Humidity 24 deg. C / 45 % RH
Engineer Tomohisa Nakagawa
Mode Tx BT LE

Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result		Limit		Margin [dB]
				[dBm]	[mW]	[dBm]	[mW]	
2402	-8.96	1.45	10.03	2.52	1.79	30.00	1000	27.48
2440	-9.39	1.47	10.03	2.11	1.63	30.00	1000	27.89
2480	-9.86	1.48	10.03	1.65	1.46	30.00	1000	28.35

Sample Calculation:

Result = Reading + Cable Loss + Attenuator Loss

Average Output Power
(Reference data for RF Exposure / SAR testing)


Report No. 12205060H
Test place Ise EMC Lab. No. 6 Shielded Room
Date March 13, 2018
Temperature / Humidity 24 deg. C / 45 % RH
Engineer Tomohisa Nakagawa
Mode Tx BT LE

Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result	
				[dBm]	[mW]
2402	-9.16	1.45	10.03	2.32	1.71
2440	-9.59	1.47	10.03	1.91	1.55
2480	-10.07	1.48	10.03	1.44	1.39

Sample Calculation:
Result = Reading + Cable Loss + Attenuator Loss

Burst rate confirmation

Report No. 12205060H
Test place Ise EMC Lab. No. 6 Shielded Room
Date March 13, 2018
Temperature / Humidity 24 deg. C / 45 % RH
Engineer Tomohisa Nakagawa
Mode Tx BT LE

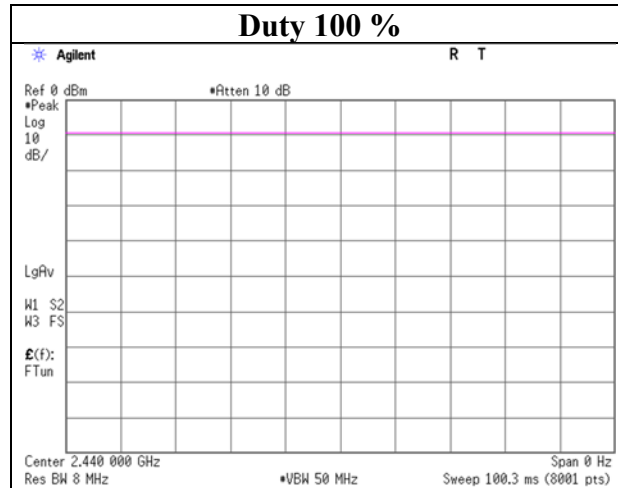

* Since the burst rate is not different between the channels, the data has been obtained on the representative channel.

Radiated Spurious Emission

Report No.	12205060H		
Test place	Ise EMC Lab.		
Semi Anechoic Chamber	No.4	No.4	No.4
Date	March 13, 2018	March 14, 2018	March 14, 2018
Temperature / Humidity	22 deg. C / 36 % RH	21 deg. C / 41 % RH	21 deg. C / 41 % RH
Engineer	Shuichi Ohyama (1 GHz - 10 GHz)	Yuta Moriya (10 GHz - 26.5 GHz)	Yuta Moriya (Below 1 GHz)
Mode	Tx BT LE 2402 MHz		

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	68.799	QP	44.3	6.3	7.8	32.1	-	26.3	40.0	13.7	
Hori	219.998	QP	49.0	11.6	9.3	31.9	-	38.0	46.0	8.0	
Hori	312.200	QP	40.1	13.8	10.0	31.9	-	32.0	46.0	14.0	
Hori	400.001	QP	41.7	15.7	10.6	32.0	-	36.0	46.0	10.0	
Hori	733.210	QP	20.3	20.3	12.4	32.0	-	21.0	46.0	25.0	
Hori	1000.000	QP	29.0	22.6	13.7	30.7	-	34.6	53.9	19.3	
Hori	2390.000	PK	41.6	27.4	4.7	32.1	-	41.6	73.9	32.3	
Hori	4804.000	PK	47.7	31.7	6.9	31.3	-	55.0	73.9	18.9	
Hori	7206.000	PK	42.0	36.4	8.3	32.4	-	54.3	73.9	19.6	Floor noise
Hori	9608.000	PK	41.9	38.0	9.0	32.6	-	56.3	73.9	17.6	Floor noise
Hori	2390.000	AV	33.2	27.4	4.7	32.1	-	33.2	53.9	20.7	
Hori	4804.000	AV	42.8	31.7	6.9	31.3	-	50.1	53.9	3.8	
Hori	7206.000	AV	31.7	36.4	8.3	32.4	-	44.0	53.9	9.9	Floor noise
Hori	9608.000	AV	30.8	38.0	9.0	32.6	-	45.2	53.9	8.7	Floor noise
Vert	60.432	QP	42.5	7.5	7.6	32.1	-	25.5	40.0	14.5	
Vert	70.624	QP	46.2	6.2	7.8	32.1	-	28.1	40.0	11.9	
Vert	106.892	QP	41.3	11.2	8.2	32.0	-	28.7	43.5	14.8	
Vert	138.721	QP	33.2	14.4	8.6	32.0	-	24.2	43.5	19.3	
Vert	219.998	QP	40.0	11.6	9.3	31.9	-	29.0	46.0	17.0	
Vert	1000.000	QP	25.9	22.6	13.7	30.7	-	31.5	53.9	22.4	
Vert	2390.000	PK	41.7	27.4	4.7	32.1	-	41.7	73.9	32.2	
Vert	4804.000	PK	45.6	31.7	6.9	31.3	-	52.9	73.9	21.0	
Vert	7206.000	PK	42.1	36.4	8.3	32.4	-	54.4	73.9	19.5	Floor noise
Vert	9608.000	PK	41.2	38.0	9.0	32.6	-	55.6	73.9	18.3	Floor noise
Vert	2390.000	AV	33.6	27.4	4.7	32.1	-	33.6	53.9	20.3	
Vert	4804.000	AV	39.3	31.7	6.9	31.3	-	46.6	53.9	7.3	
Vert	7206.000	AV	31.7	36.4	8.3	32.4	-	44.0	53.9	9.9	Floor noise
Vert	9608.000	AV	30.5	38.0	9.0	32.6	-	44.9	53.9	9.0	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log (4 m / 3.0 m) = 2.5 dB
10 GHz - 26.5 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

20dBc Data Sheet

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	2402.000	PK	96.2	27.4	4.7	32.1	96.2	-	-	Carrier
Hori	2400.000	PK	50.7	27.4	4.7	32.1	50.7	76.2	25.5	
Vert	2402.000	PK	92.2	27.4	4.7	32.1	92.2	-	-	Carrier
Vert	2400.000	PK	45.9	27.4	4.7	32.1	45.9	72.2	26.3	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

UL Japan, Inc.

Ise EMC Lab.



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission (Reference Plot for band-edge)

Report No.	12205060H
Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.4
Date	March 13, 2018
Temperature / Humidity	22 deg. C / 36 % RH
Engineer	Shuichi Ohyama
	(1 GHz - 10 GHz)
Mode	Tx BT LE 2402 MHz

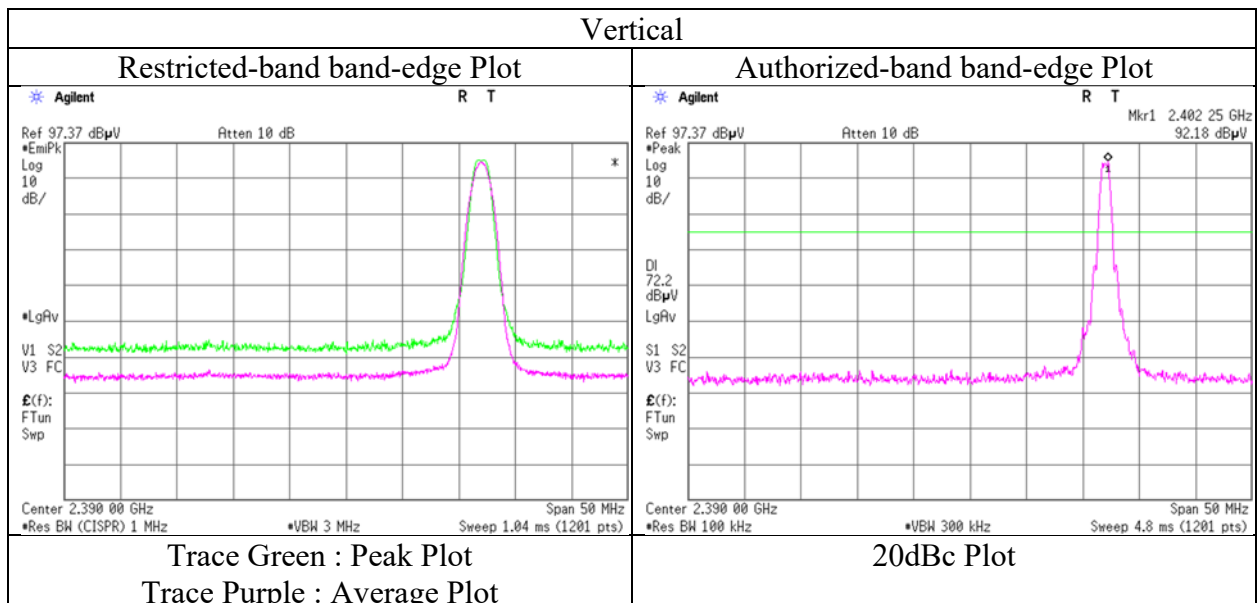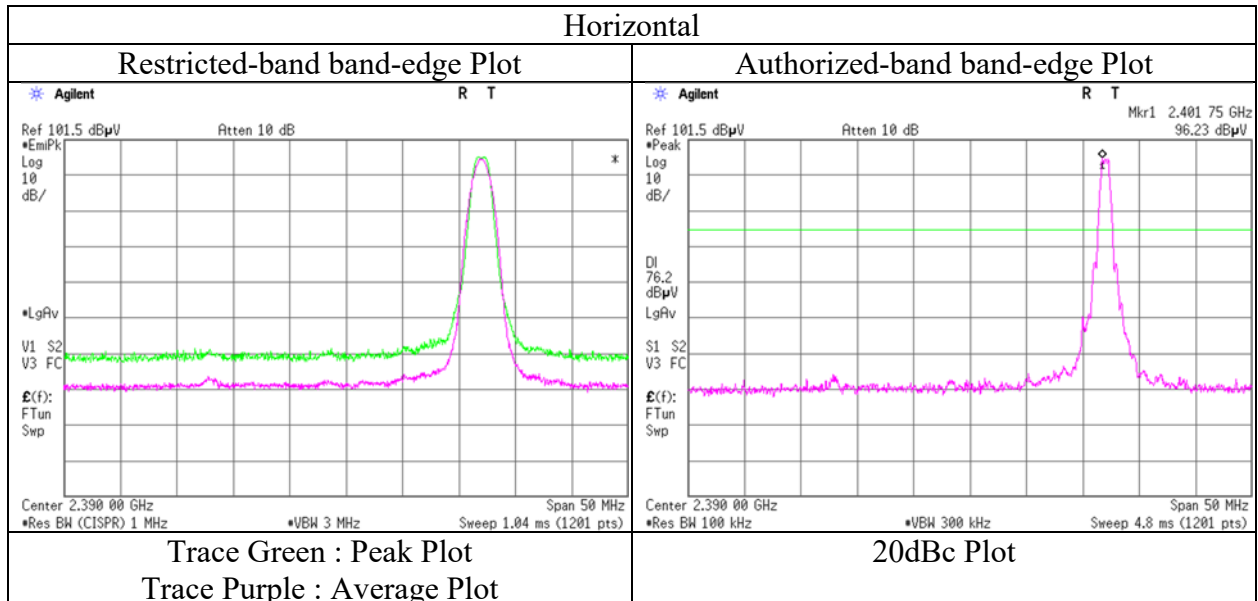

* Final result of restricted band edge was shown in tabular data.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Report No.	12205060H		
Test place	Ise EMC Lab.		
Semi Anechoic Chamber	No.4	No.4	No.4
Date	March 13, 2018	March 14, 2018	March 14, 2018
Temperature / Humidity	22 deg. C / 36 % RH	21 deg. C / 41 % RH	21 deg. C / 41 % RH
Engineer	Shuichi Ohyama (1 GHz - 10 GHz)	Yuta Moriya (10 GHz - 26.5 GHz)	Yuta Moriya (Below 1 GHz)
Mode	Tx BT LE 2440 MHz		

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	68.799	QP	48.4	6.3	7.8	32.1	-	30.4	40.0	9.6	
Hori	101.884	QP	40.0	10.5	8.2	32.1	-	26.6	43.5	16.9	
Hori	137.015	QP	31.4	14.3	8.6	32.0	-	22.3	43.5	21.2	
Hori	219.998	QP	48.7	11.6	9.3	31.9	-	37.7	46.0	8.3	
Hori	312.200	QP	41.9	13.8	10.0	31.9	-	33.8	46.0	12.2	
Hori	400.001	QP	41.6	15.7	10.6	32.0	-	35.9	46.0	10.1	
Hori	4880.000	PK	45.3	31.9	7.0	31.2	-	53.0	73.9	20.9	
Hori	7320.000	PK	41.9	36.6	8.3	32.4	-	54.4	73.9	19.5	Floor noise
Hori	9760.000	PK	41.1	38.1	9.0	32.7	-	55.5	73.9	18.4	Floor noise
Hori	4880.000	AV	39.9	31.9	7.0	31.2	-	47.6	53.9	6.3	
Hori	7320.000	AV	33.5	36.6	8.3	32.4	-	46.0	53.9	7.9	Floor noise
Hori	9760.000	AV	33.1	38.1	9.0	32.7	-	47.5	53.9	6.4	Floor noise
Vert	60.432	QP	41.7	7.5	7.6	32.1	-	24.7	40.0	15.3	
Vert	69.926	QP	51.4	6.2	7.8	32.1	-	33.3	40.0	6.7	
Vert	106.892	QP	37.2	11.2	8.2	32.0	-	24.6	43.5	18.9	
Vert	138.721	QP	33.1	14.4	8.6	32.0	-	24.1	43.5	19.4	
Vert	219.998	QP	40.4	11.6	9.3	31.9	-	29.4	46.0	16.6	
Vert	574.871	QP	27.5	18.9	11.6	32.1	-	25.9	46.0	20.1	
Vert	4880.000	PK	45.5	31.9	7.0	31.2	-	53.2	73.9	20.7	
Vert	7320.000	PK	41.7	36.6	8.3	32.4	-	54.2	73.9	19.7	Floor noise
Vert	9760.000	PK	41.5	38.1	9.0	32.7	-	55.9	73.9	18.0	Floor noise
Vert	4880.000	AV	40.2	31.9	7.0	31.2	-	47.9	53.9	6.0	
Vert	7320.000	AV	33.3	36.6	8.3	32.4	-	45.8	53.9	8.1	Floor noise
Vert	9760.000	AV	32.9	38.1	9.0	32.7	-	47.3	53.9	6.6	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log (4 m / 3.0 m) = 2.5 dB
10 GHz - 26.5 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Report No.	12205060H		
Test place	Ise EMC Lab.		
Semi Anechoic Chamber	No.4	No.4	No.4
Date	March 13, 2018	March 14, 2018	March 14, 2018
Temperature / Humidity	22 deg. C / 36 % RH	21 deg. C / 41 % RH	21 deg. C / 41 % RH
Engineer	Shuichi Ohyama	Yuta Moriya	Yuta Moriya
	(1 GHz - 10 GHz)	(10 GHz - 26.5 GHz)	(Below 1 GHz)
Mode	Tx BT LE 2480 MHz		

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	68.799	QP	48.2	6.3	7.8	32.1	-	30.2	40.0	9.8	
Hori	101.884	QP	44.8	10.5	8.2	32.1	-	31.4	43.5	12.1	
Hori	137.015	QP	31.6	14.3	8.6	32.0	-	22.5	43.5	21.0	
Hori	219.998	QP	48.8	11.6	9.3	31.9	-	37.8	46.0	8.2	
Hori	312.200	QP	39.1	13.8	10.0	31.9	-	31.0	46.0	15.0	
Hori	400.001	QP	40.1	15.7	10.6	32.0	-	34.4	46.0	11.6	
Hori	2483.500	PK	45.2	27.5	4.7	32.0	-	45.4	73.9	28.5	
Hori	4960.000	PK	48.1	32.2	7.0	31.2	-	56.1	73.9	17.8	
Hori	7440.000	PK	43.3	36.8	8.3	32.5	-	55.9	73.9	18.0	Floor noise
Hori	9920.000	PK	41.8	38.2	9.0	32.8	-	56.2	73.9	17.7	Floor noise
Hori	2483.500	AV	36.4	27.5	4.7	32.0	-	36.6	53.9	17.3	
Hori	4960.000	AV	43.6	32.2	7.0	31.2	-	51.6	53.9	2.3	
Hori	7440.000	AV	34.0	36.8	8.3	32.5	-	46.6	53.9	7.3	Floor noise
Hori	9920.000	AV	33.4	38.2	9.0	32.8	-	47.8	53.9	6.1	Floor noise
Vert	60.432	QP	42.5	7.5	7.6	32.1	-	25.5	40.0	14.5	
Vert	69.926	QP	45.5	6.2	7.8	32.1	-	27.4	40.0	12.6	
Vert	106.892	QP	43.3	11.2	8.2	32.0	-	30.7	43.5	12.8	
Vert	138.721	QP	33.3	14.4	8.6	32.0	-	24.3	43.5	19.2	
Vert	219.998	QP	40.8	11.6	9.3	31.9	-	29.8	46.0	16.2	
Vert	574.871	QP	28.3	18.9	11.6	32.1	-	26.7	46.0	19.3	
Vert	2483.500	PK	43.4	27.5	4.7	32.0	-	43.6	73.9	30.3	
Vert	4960.000	PK	46.2	32.2	7.0	31.2	-	54.2	73.9	19.7	
Vert	7440.000	PK	42.4	36.8	8.3	32.5	-	55.0	73.9	18.9	Floor noise
Vert	9920.000	PK	42.2	38.2	9.0	32.8	-	56.6	73.9	17.3	Floor noise
Vert	2483.500	AV	32.5	27.5	4.7	32.0	-	32.7	53.9	21.2	
Vert	4960.000	AV	40.2	32.2	7.0	31.2	-	48.2	53.9	5.7	
Vert	7440.000	AV	32.0	36.8	8.3	32.5	-	44.6	53.9	9.3	Floor noise
Vert	9920.000	AV	31.3	38.2	9.0	32.8	-	45.7	53.9	8.2	Floor noise



Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log (4 m / 3.0 m) = 2.5 dB
10 GHz - 26.5 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission (Reference Plot for band-edge)

Report No.	12205060H
Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.4
Date	March 13, 2018
Temperature / Humidity	22 deg. C / 36 % RH
Engineer	Shuichi Ohyama (1 GHz - 10 GHz)
Mode	Tx BT LE 2480 MHz

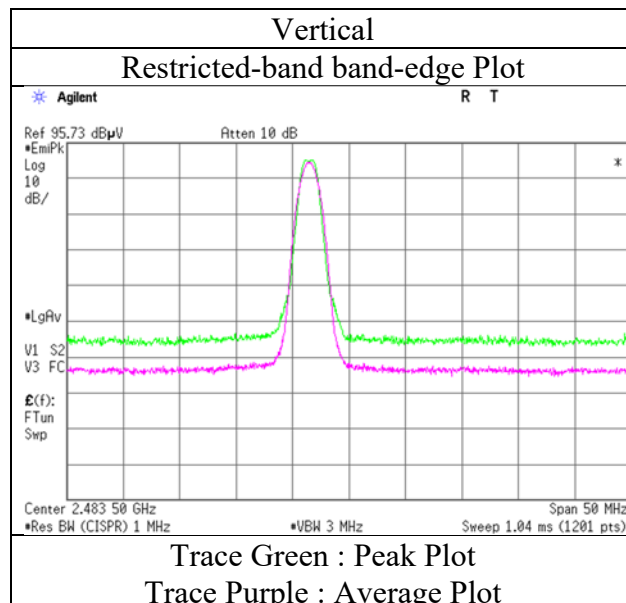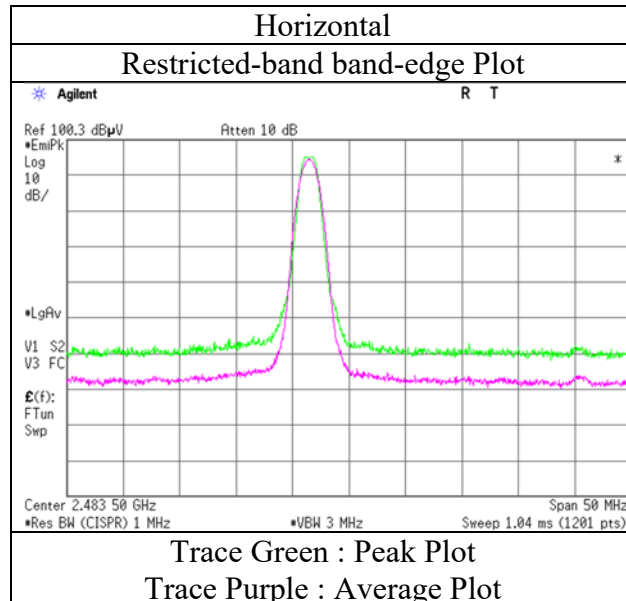

* Final result of restricted band edge was shown in tabular data.

UL Japan, Inc.

Ise EMC Lab.


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission
(Plot data, Worst case)

Report No.	12205060H		
Test place	Ise EMC Lab.		
Semi Anechoic Chamber	No.4	No.4	No.4
Date	March 13, 2018	March 14, 2018	March 14, 2018
Temperature / Humidity	22 deg. C / 36 % RH	21 deg. C / 41 % RH	21 deg. C / 41 % RH
Engineer	Shuichi Ohyama (1 GHz - 10 GHz)	Yuta Moriya (10 GHz - 26.5 GHz)	Yuta Moriya (Below 1 GHz)
Mode	Tx BT LE 2402 MHz		

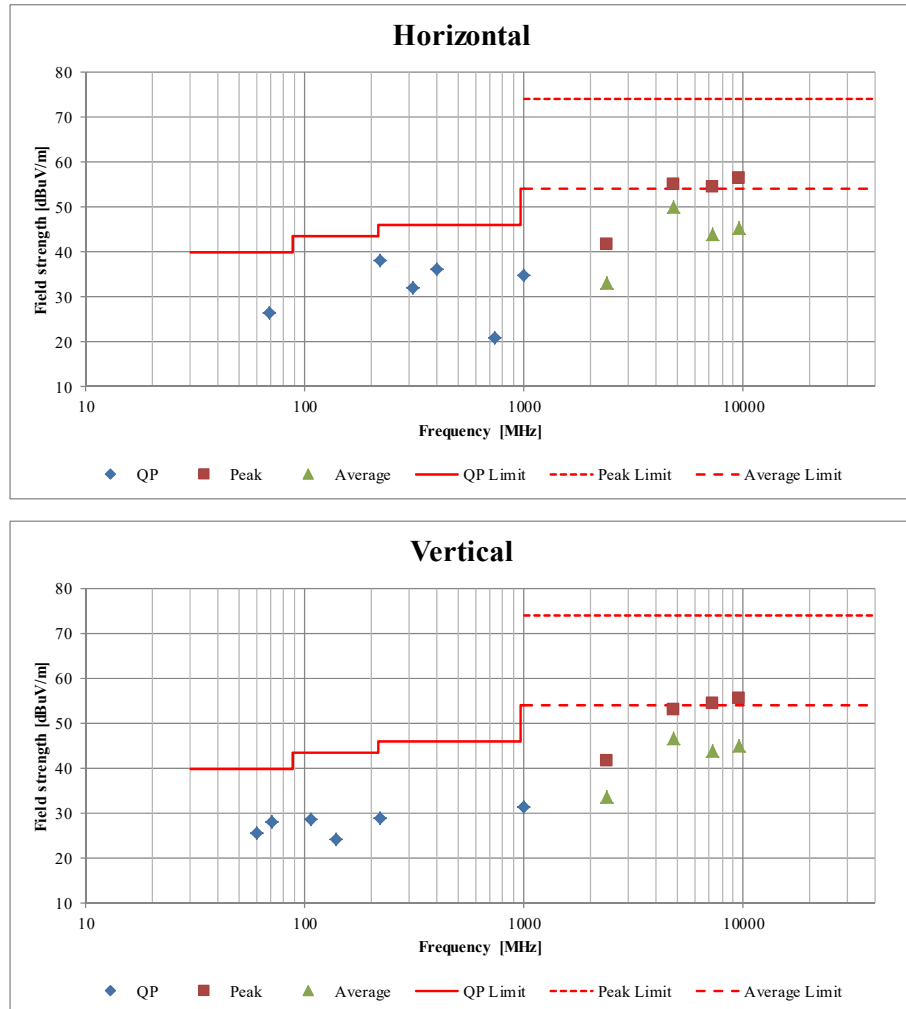

*These plots data contains sufficient number to show the trend of characteristic features for EUT.

UL Japan, Inc.

Ise EMC Lab.


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Conducted Spurious Emission

Report No.	12205060H
Test place	Ise EMC Lab. No. 6 Shielded Room
Date	March 13, 2018
Temperature / Humidity	24 deg. C / 45 % RH
Engineer	Tomohisa Nakagawa
Mode	Tx BT LE 2402 MHz

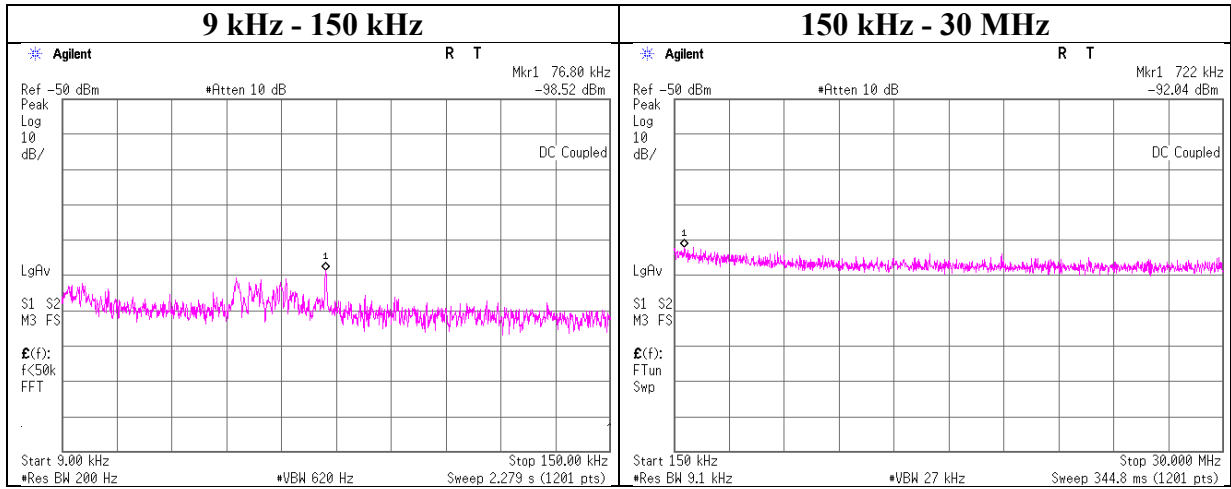

Frequency [kHz]	Reading [dBm]	Cable Loss [dB]	Attenuator Loss [dB]	Antenna Gain* [dBi]	N (Number of Output)	EIRP [dBm]	Distance [m]	Ground bounce [dB]	E (field strength) [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
76.80	-98.5	0.01	10.3	2.0	1	-86.2	300	6.0	-25.0	29.8	54.8	
722.00	-92.0	0.01	10.3	2.0	1	-79.7	30	6.0	1.5	30.4	28.9	

$E \text{ [dBuV/m]} = \text{EIRP [dBm]} - 20 \log (\text{Distance [m]}) + \text{Ground bounce [dB]} + 104.8 \text{ [dBuV/m]}$

$\text{EIRP [dBm]} = \text{Reading [dBm]} + \text{Cable loss [dB]} + \text{Attenuator Loss [dB]} + \text{Antenna gain [dBi]} + 10 * \log (N)$

N: Number of output

*2.0 dBi was applied to the test result based on KDB 558074 since antenna gain was less than 2.0 dBi.

UL Japan, Inc.

Ise EMC Lab.


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Conducted Spurious Emission

Report No.	12205060H
Test place	Ise EMC Lab. No. 6 Shielded Room
Date	March 13, 2018
Temperature / Humidity	24 deg. C / 45 % RH
Engineer	Tomohisa Nakagawa
Mode	Tx BT LE 2440 MHz

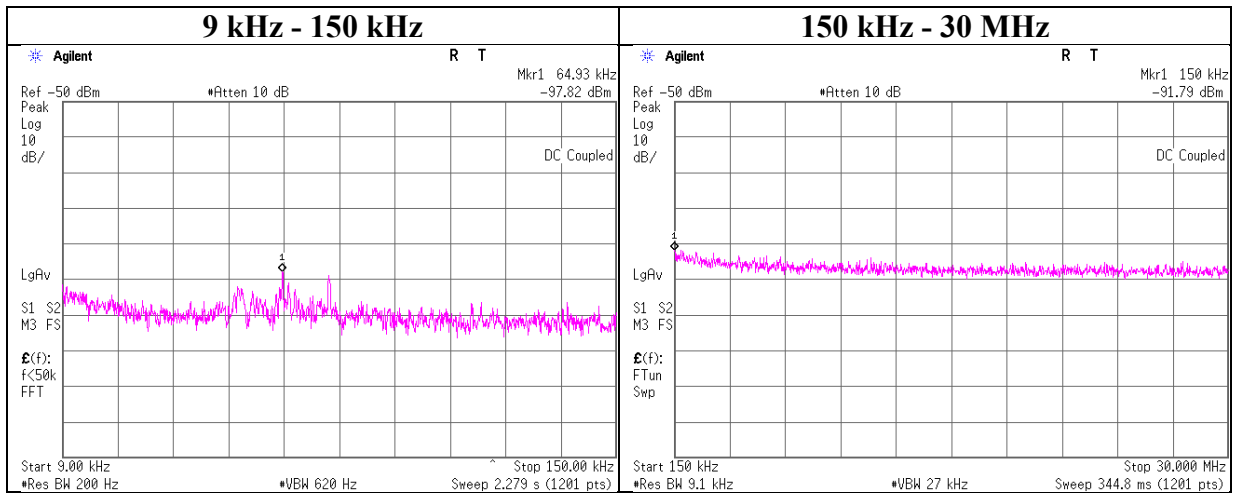

Frequency [kHz]	Reading [dBm]	Cable Loss [dB]	Attenuator Loss [dB]	Antenna Gain* [dBi]	N (Number of Output)	EIRP [dBm]	Distance [m]	Ground bounce [dB]	E (field strength) [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
64.93	-97.8	0.01	10.3	2.0	1	-85.5	300	6.0	-24.3	31.3	55.6	
150.00	-91.8	0.01	10.3	2.0	1	-79.5	300	6.0	-18.2	24.0	42.2	

$E [dBuV/m] = EIRP [dBm] - 20 \log (Distance [m]) + Ground\ bounce [dB] + 104.8 [dBuV/m]$

$EIRP [dBm] = Reading [dBm] + Cable\ loss [dB] + Attenuator\ Loss [dB] + Antenna\ gain [dBi] + 10 * \log (N)$

N: Number of output

*2.0 dBi was applied to the test result based on KDB 558074 since antenna gain was less than 2.0 dBi.

UL Japan, Inc.

Ise EMC Lab.


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Conducted Spurious Emission

Report No.	12205060H
Test place	Ise EMC Lab. No. 6 Shielded Room
Date	March 13, 2018
Temperature / Humidity	24 deg. C / 45 % RH
Engineer	Tomohisa Nakagawa
Mode	Tx BT LE 2480 MHz

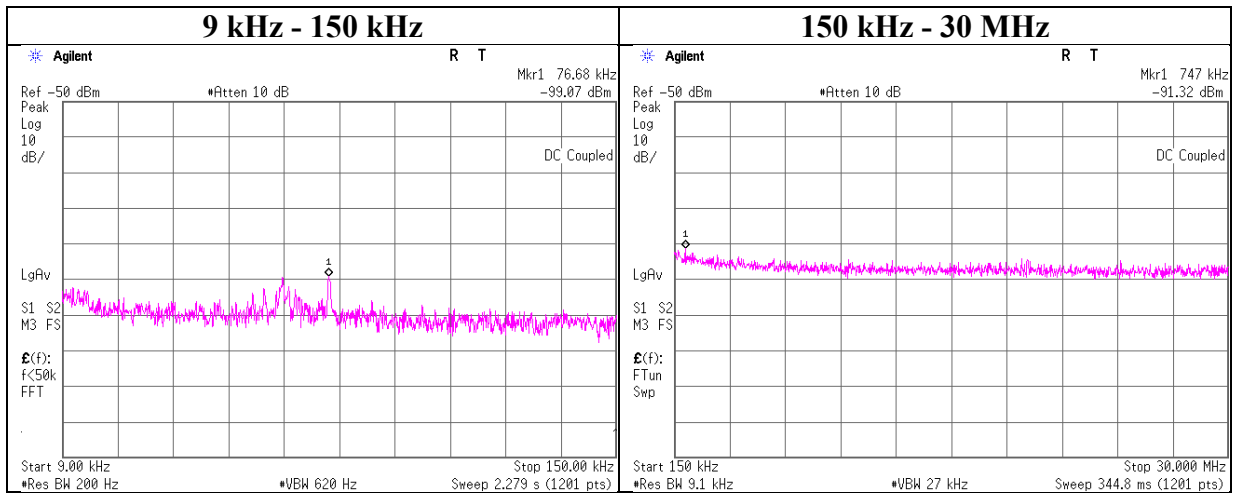

Frequency [kHz]	Reading [dBm]	Cable Loss [dB]	Attenuator Loss [dB]	Antenna Gain* [dBi]	N (Number of Output)	EIRP [dBm]	Distance [m]	Ground bounce [dB]	E (field strength) [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
76.68	-99.1	0.01	10.3	2.0	1	-86.8	300	6.0	-25.5	29.9	55.4	
747.00	-91.3	0.01	10.3	2.0	1	-79.0	30	6.0	2.2	30.1	27.9	

$E [dBuV/m] = EIRP [dBm] - 20 \log (Distance [m]) + Ground\ bounce [dB] + 104.8 [dBuV/m]$

$EIRP [dBm] = Reading [dBm] + Cable\ loss [dB] + Attenuator\ Loss [dB] + Antenna\ gain [dBi] + 10 * \log (N)$

N: Number of output

*2.0 dBi was applied to the test result based on KDB 558074 since antenna gain was less than 2.0 dBi.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Power Density

Report No. 12205060H
Test place Ise EMC Lab. No. 6 Shielded Room
Date March 13, 2018
Temperature / Humidity 24 deg. C / 45 % RH
Engineer Tomohisa Nakagawa
Mode Tx BT LE

Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result [dBm]	Limit [dBm]	Margin [dB]
2402.00	-18.83	1.45	10.03	-7.35	8.00	15.35
2440.00	-19.38	1.47	10.03	-7.88	8.00	15.88
2480.00	-20.35	1.48	10.03	-8.84	8.00	16.84


Sample Calculation:

Result = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator Loss


Power Density

BT LE


2402 MHz

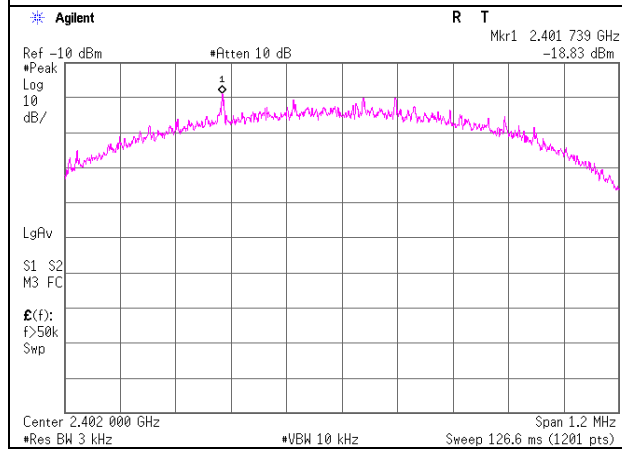

2440 MHz

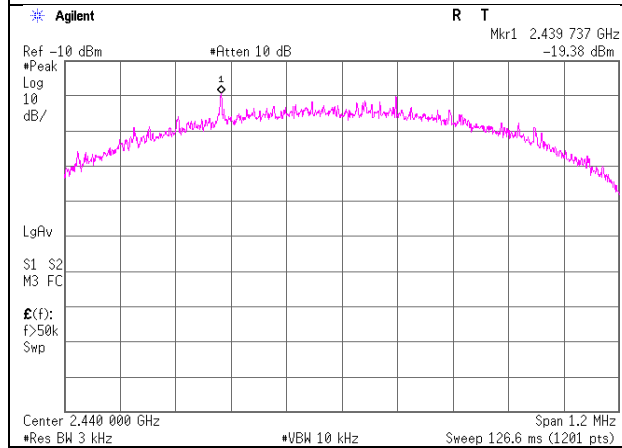

2480 MHz

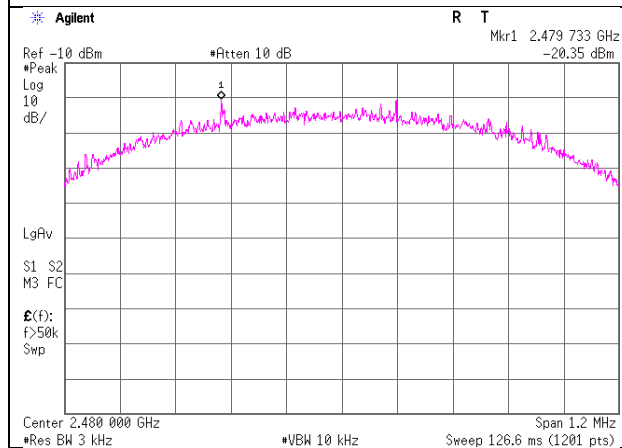

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

APPENDIX 2: Test instruments

Test Instruments

Control No.	Instrument	Manufacturer	Model No	Serial No	Test Item	Calibration Date * Interval(month)
MAEC-04	Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 3m	DA-10005	RE/CE	2017/10/30 * 12
MOS-15	Thermo-Hygrometer	Custom	CTH-180	1501	RE/CE	2018/01/24 * 12
MJM-26	Measure	KOMELON	KMC-36	-	RE/CE	-
COTS-MEMI	EMI measurement program	TSJ	TEPTO-DV	-	RE/CE	-
MSA-10	Spectrum Analyzer	Agilent	E4448A	MY46180655	RE	2017/08/22 * 12
MHA-21	Horn Antenna 1-18GHz	Schwarzbeck	BBHA9120D	9120D-557	RE	2017/09/15 * 12
MCC-141	Microwave Cable	Junkosha	MWX221	1305S002R(1m) / 1405S146(5m)	RE	2017/06/23 * 12
MPA-12	MicroWave System Amplifier	Agilent	83017A	00650	RE	2017/10/06 * 12
MMM-10	DIGITAL HiTESTER	Hioki	3805	051201148	RE/CE	2018/01/09 * 12
MHA-17	Horn Antenna 15-40GHz	Schwarzbeck	BBHA9170	BBHA9170307	RE	2017/06/30 * 12
MTR-10	EMI Test Receiver	Rohde & Schwarz	ESR26	101408	RE/CE	2018/01/30 * 12
MBA-05	Biconical Antenna	Schwarzbeck	BBA9106	1302	RE	2017/11/23 * 12
MLA-23	Logperiodic Antenna (200-1000MHz)	Schwarzbeck	VUSLP9111B	911B-192	RE	2017/12/10 * 12
MCC-50	Coaxial Cable	UL Japan	-	-	RE	2017/06/26 * 12
MAT-97	Attenuator	KEYSIGHT	8491A	MY52462282	RE	2017/10/12 * 12
MPA-14	Pre Amplifier	SONOMA INSTRUMENT	310	260833	RE	2017/03/27 * 12
MLS-23	LISN(AMN)	Schwarzbeck	NSLK8127	8127-729	CE(EUT)	2017/07/24 * 12
MLS-24	LISN(AMN)	Schwarzbeck	NSLK8127	8127-730	CE(AE)	2017/07/20 * 12
MTA-53	Terminator	TME	CT-01BP	-	CE	2017/12/11 * 12
MAT-67	Attenuator(13dB)	JFW Industries, Inc.	50FP-013H2 N	-	CE	2017/12/19 * 12
MCC-113	Coaxial cable	Fujikura/Suhner/TSJ	5D-2W(10m)/ SFM141(5m)/ 421-010(1m)/ suoform141-PE(1m)/ RFM-E121(Switcher)	-/04178	CE	2017/07/26 * 12
MAT-25	Attenuator(10dB)(above 1 GHz)	Agilent	8493C	71642	AT	2017/06/12 * 12
MCC-170	Microwave Cable	Junkosha	MWX221	1409S493	AT	2017/03/13 * 12
MPM-09	Power Meter	Anritsu	ML2495A	6K00003348	AT	2017/10/13 * 12
MPSE-12	Power sensor	Anritsu	MA2411B	011598	AT	2017/10/13 * 12
MSA-14	Spectrum Analyzer	Agilent	E4440A	MY48250080	RE/CE/AT	2017/10/18 * 12
MOS-24	Thermo-Hygrometer	Custom	CTH-201	0005	AT	2018/01/24 * 12
MCC-209	Microwave Cable	RS Components	R-132G7210200CD	-	AT	2017/04/05 * 12

The expiration date of the calibration is the end of the expired month.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

Test item: CE: Conducted Emission test
RE: Radiated Emission test
AT: Antenna Terminal Conducted test

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124