



SETUP PHOTOS REPORT

Report Number: R12875567L-EP1

Applicant : Bose Corporation
100 The Mountain
Framingham, MA 01701, USA

Model : BL2L

FCC ID : A94BL2L

IC : 3232A-BL2L

EUT Description : Wireless Headset

Test Standard(s) : FCC 47 CFR PART 15 SUBPART C
ISED RSS-247 ISSUE 2
ISED RSS-GEN ISSUE 5

Date Of Issue:
2019-06-07

Prepared by:
UL LLC
12 Laboratory Dr.
Research Triangle Park, NC 27709 U.S.A.
TEL: (919) 549-1400

REPORT REVISION HISTORY

Ver.	Issue Date	Revisions	Revised By
1	2019-06-07	Initial Issue	Brian T. Kiewra

TABLE OF CONTENTS

REPORT REVISION HISTORY	2
TABLE OF CONTENTS	3
1. EQUIPMENT UNDER TEST.....	4
1.1. <i>EUT DESCRIPTION</i>	4
1.2. <i>WORST-CASE CONFIGURATION AND MODE</i>	4
2. SETUP PHOTOS.....	6

1. EQUIPMENT UNDER TEST

1.1. EUT DESCRIPTION

The EUT is a left earbud of a wireless headset with a BT/BLE transceiver.

1.2. WORST-CASE CONFIGURATION AND MODE

The EUT only transmits while battery powered therefore powerline conducted emissions were not performed.

Radiated emissions below 1GHz and above 18GHz were performed with the EUT set to transmit at the channel with highest output power and PSD as worst-case scenario.

Band edge and radiated emissions between 1GHz and 18GHz were performed with the EUT set to transmit at the highest power on low, middle, and high channels.

The fundamental of the EUT was investigated in three orthogonal orientations X,Y,Z, it was determined that Z orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in Z orientation.


SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop	Lenovo	L470	PF0ZV66P	NA
Debugger	Qualcomm	TRBI 200	N171219	NA

I/O CABLES


I/O Cable List						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	I/O	1	Hardwired	Single strand	<1m	For testing purposes only. Connects to laptop through debugger for configuration.
2	DC	1	hardwired	Single strand	<3m	For testing purposes only. Provides DC power.

SETUP DIAGRAMS

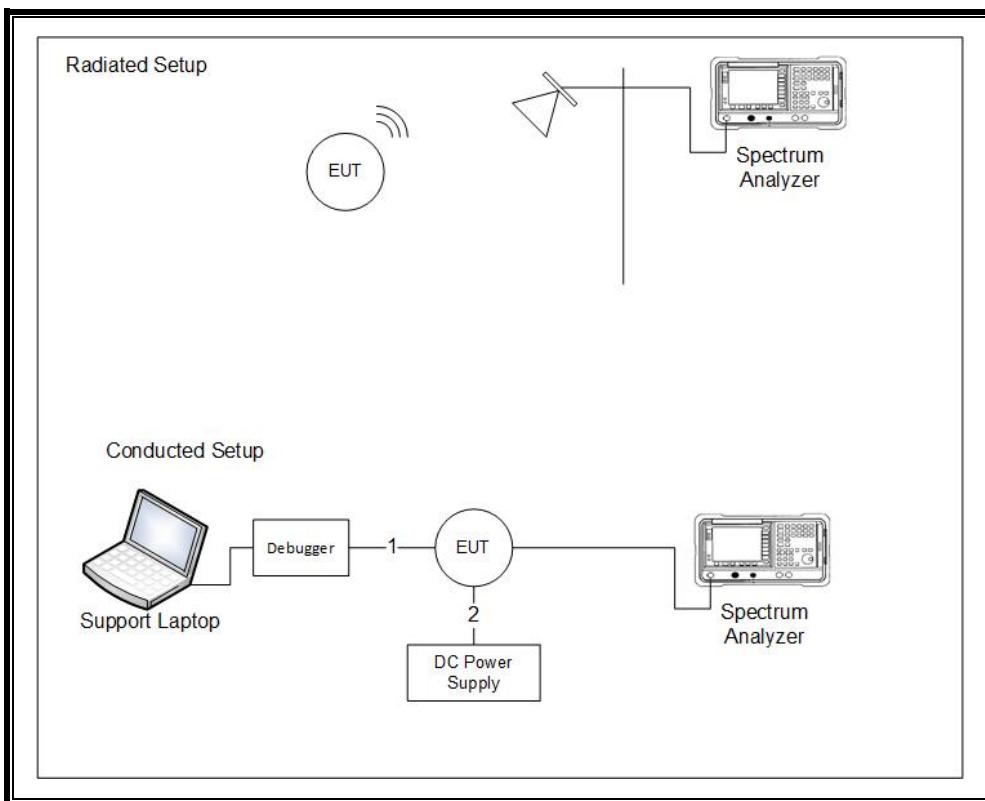



2. SETUP PHOTOS

ANTENNA PORT CONDUCTED RF MEASUREMENT SETUP

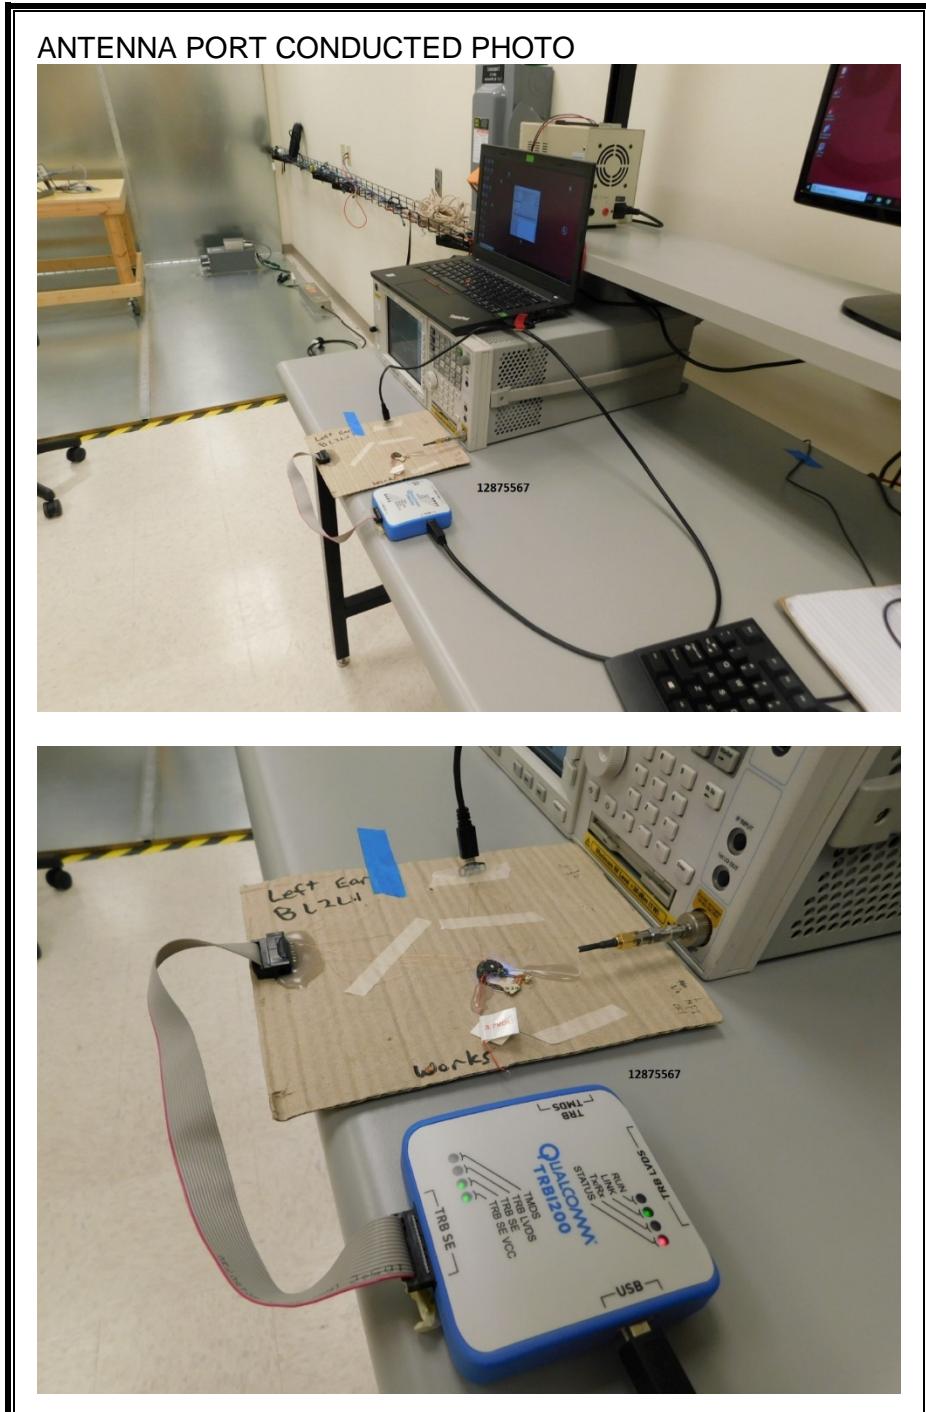


RADIATED RF MEASUREMENT SETUP (BELOW 1 GHz)


RADIATED PHOTO (BELOW 1 GHz)

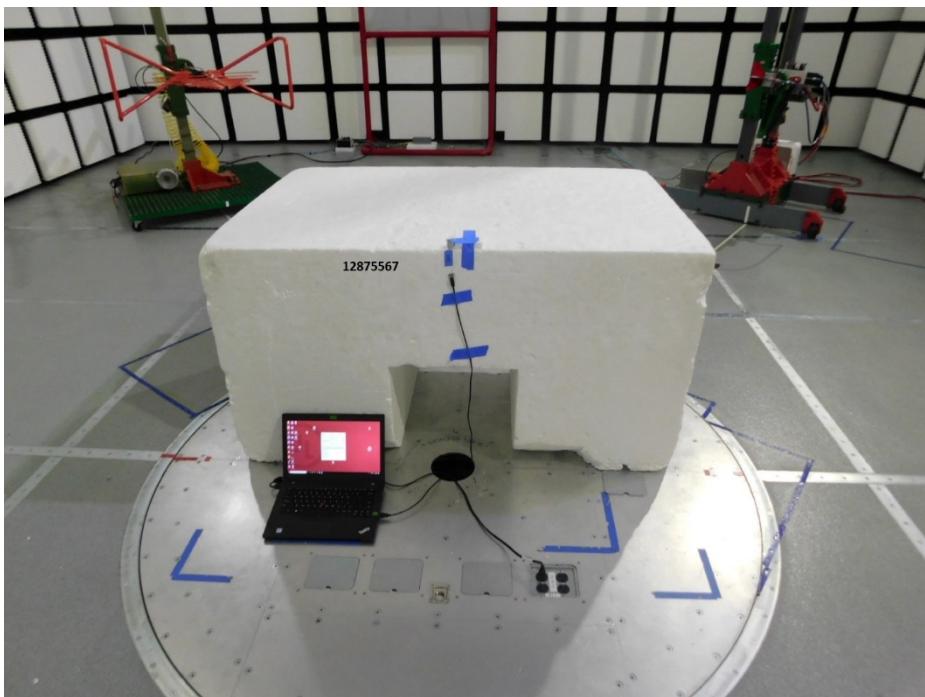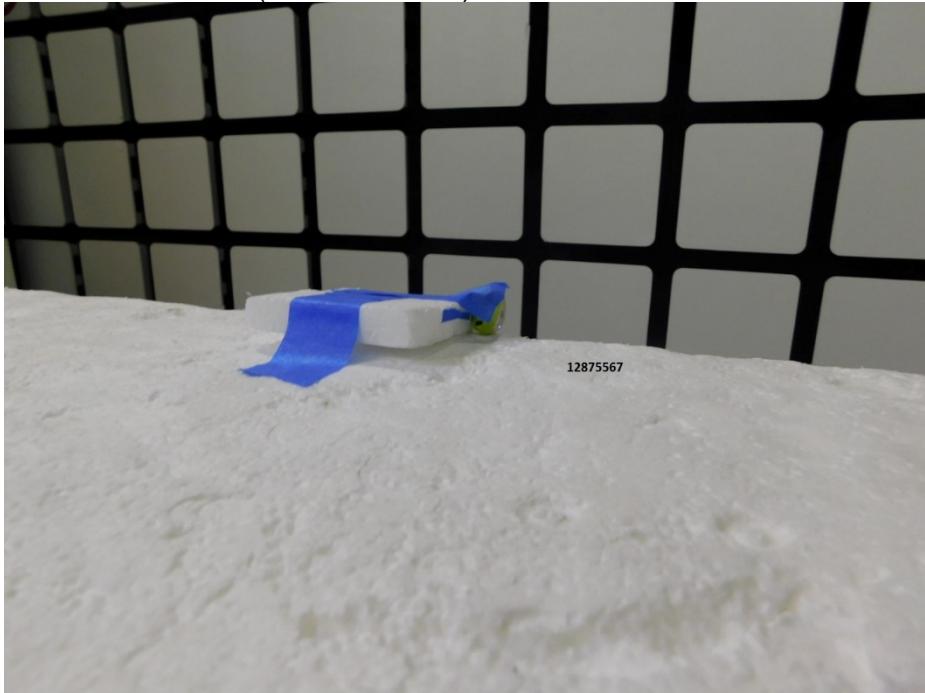


RADIATED RF MEASUREMENT SETUP (ABOVE 1 GHz)

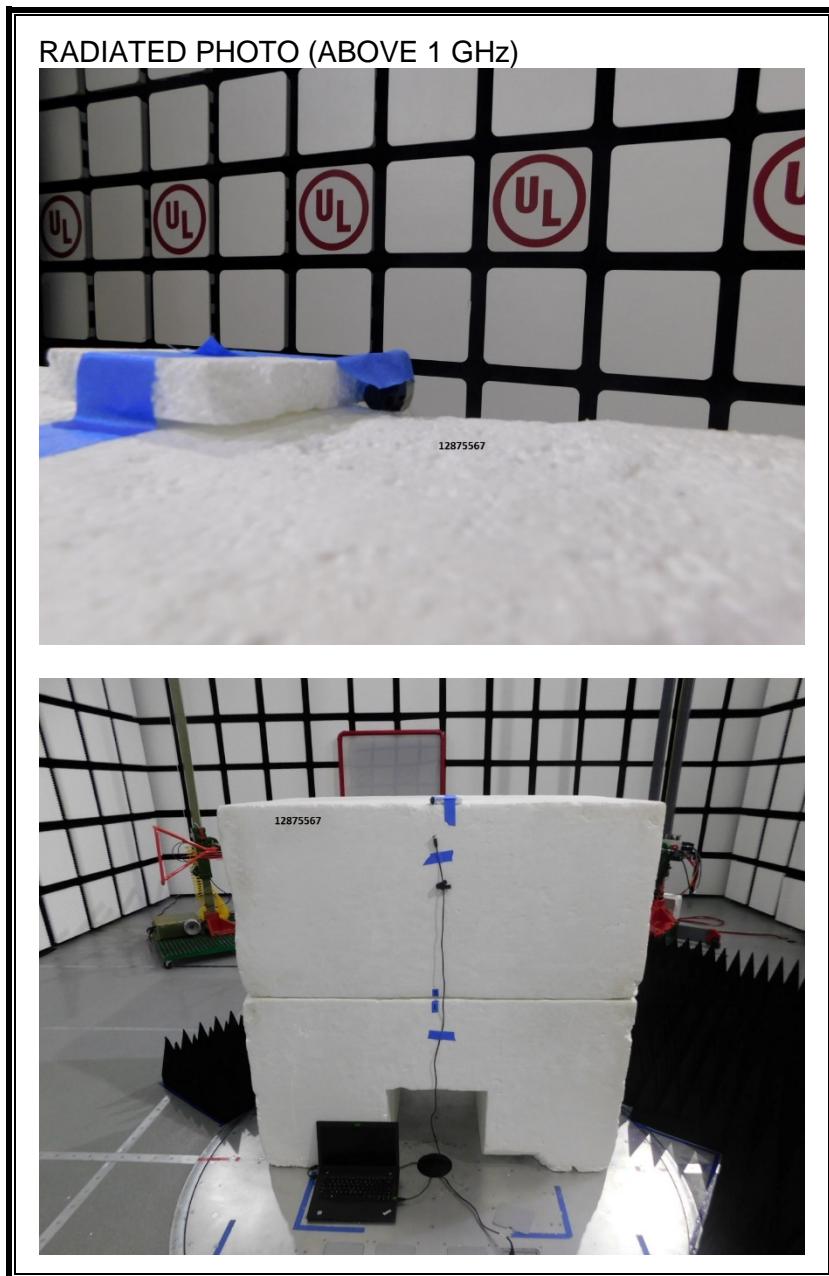


X-AXIS PHOTO

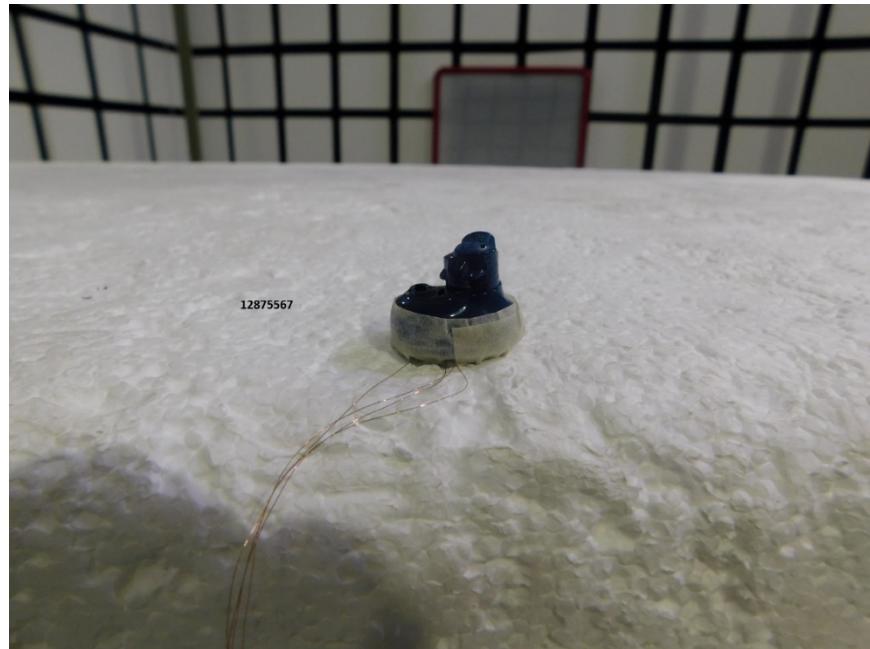

Y-AXIS PHOTO

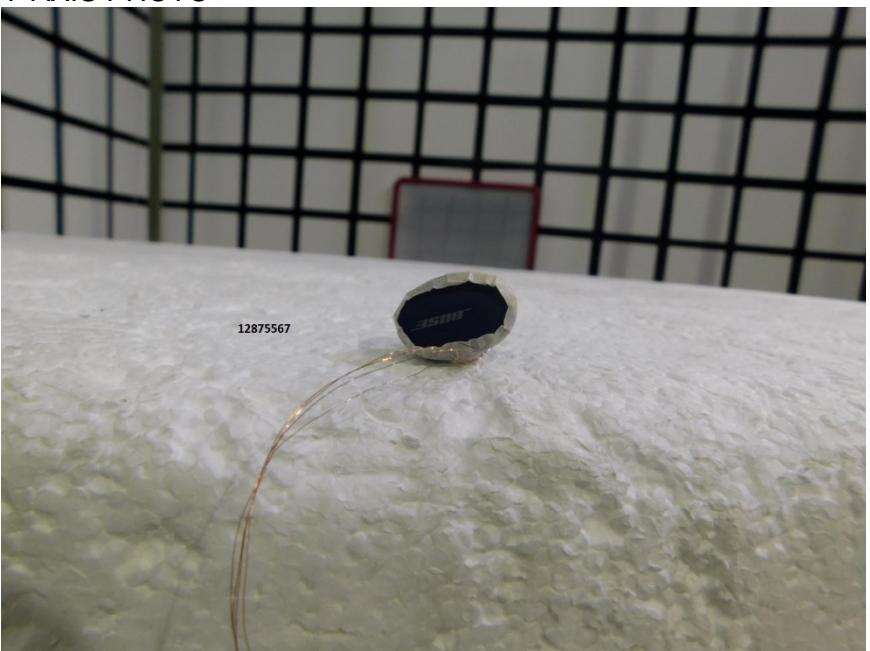

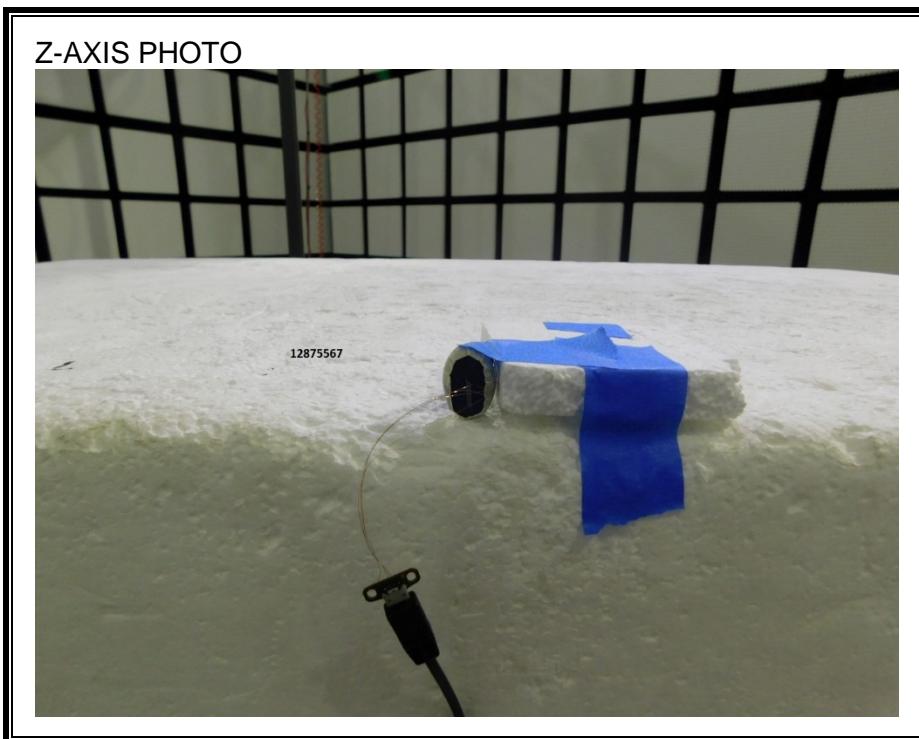

END OF REPORT