

FCC RF Test Report

APPLICANT : NEC CASIO Mobile Communications, Ltd.
EQUIPMENT : GSM/EGPRS/WCDMA/LTE Mobile Phone
BRAND NAME : NEC
MODEL NAME : NE-201A1A
MARKETING NAME : KMP7R4AE1-1AB
FCC ID : A98-RSZ3446
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System

The product was received on Oct. 31, 2012 and completely tested on Dec. 03, 2012. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:



Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Feature of Equipment Under Test	5
1.4 Testing Site	6
1.5 Applied Standards	6
1.6 Ancillary Equipment List	6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	7
2.1 Carrier Frequency Channel	7
2.2 Pre-Scanned RF Power	8
2.3 Test Mode	9
2.4 Connection Diagram of Test System	10
2.5 RF Utility	11
2.6 Measurement Results Explanation Example	11
3 TEST RESULT	12
3.1 6dB Bandwidth Measurement	12
3.2 Output Power Measurement	19
3.3 Power Spectral Density Measurement	22
3.4 Conducted Band Edges and Spurious Emission Measurement	34
3.5 Radiated Emission Measurement	50
3.6 AC Conducted Emission Measurement	69
3.7 Antenna Requirements	73
4 LIST OF MEASURING EQUIPMENT	74
5 UNCERTAINTY OF EVALUATION	75
APPENDIX A. PHOTOGRAPHS OF EUT	
APPENDIX B. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR2O3103D	Rev. 01	Initial issue of report	Dec. 25, 2012

SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	A8.2(a)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.2	15.247(b)	A8.4	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	A8.2(b)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	A8.5	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
			Conducted Spurious Emission		Pass	-
3.5	15.247(d)	A8.5	Radiated Band Edges	15.209(a) & 15.247(d)	Pass	-
			Radiated Spurious Emission		Pass	Under limit 0.42 dB at 4875.000 MHz
3.6	15.207	Gen 7.2.4	AC Conducted Emission	15.207(a)	Pass	Under limit 7.20 dB at 13.558 MHz
3.7	15.203 & 15.247(b)	A8.4	Antenna Requirement	N/A	Pass	-

1 General Description

1.1 Applicant

NEC CASIO Mobile Communications, Ltd.

31Fl., Tamagawa Renaissance City Tower N, 1753 Shimonumabe, Nakahara-ku, Kawasaki,
Kanagawa 211-8666 Japan 2

1.2 Manufacturer

Arima Communications Corp.

6F., No. 866, Jhongjheng Rd., Jhonghe Dist., New Taipei City 23586, Taiwan

1.3 Feature of Equipment Under Test

Product Feature	
Equipment	GSM/EGPRS/WCDMA/LTE Mobile Phone
Brand Name	NEC
Model Name	NE-201A1A
Marketing Name	KMP7R4AE1-1AB
FCC ID	A98-RSZ3446
EUT supports Radios application	GSM/EGPRS/WCDMA/HSPA/LTE/ WLAN 11bgn / Bluetooth / NFC
HW Version	EP2
SW Version	3.0.8
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

Product Specification subjective to this standard	
Tx/Rx Frequency Range	2412 MHz ~ 2462 MHz
Number of Channels	11
Carrier Frequency of Each Channel	2412+(n-1)*5 MHz; n=1~11
Maximum Output Power to Antenna	802.11b : 19.41 dBm (0.0873 W) 802.11g : 21.11 dBm (0.1291 W) 802.11n HT20 : 20.22 dBm (0.1052 W)
Antenna Type	Chip Antenna type with gain 1.40 dBi
Type of Modulation	802.11b : DSSS (BPSK / QPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

1.4 Testing Site

Test Site	SPORTON INTERNATIONAL INC.			
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-3273456 / FAX: +886-3-3284978			
Test Site No.	Sporton Site No.			FCC/IC Registration No.
	TH02-HY	CO05-HY	03CH07-HY	722060/4086B-1

1.5 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v02
- ♦ ANSI C63.4-2003 and ANSI C63.10-2009
- ♦ IC RSS-210 Issue 8
- ♦ IC RSS-Gen Issue 3

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

1.6 Ancillary Equipment List

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	WLAN AP	D-Link	DIR-628	KA2DIR628A2	N/A	Unshielded, 1.8 m
3.	Notebook	DELL	Latitude E6320	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	Bluetooth Earphone	Sony Ericsson	MW600	PY7DDA-2029	N/A	N/A

2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 KHz to 30 MHz) and radiated emission (9 KHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.

The final configuration from all the combinations and the worst-case data rates were investigated by measuring the maximum power across all the data rates and modulation modes under section 2.2.

Based on the worst configuration found above, the RF power setting is set individually to meet FCC compliance limit for the final conducted and radiated tests shown in section 2.3.

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437		

2.2 Pre-Scanned RF Power

Preliminary tests were performed in different data rate and antenna configurations as following table and the highest power data rates were chosen for full test in the following tables. Final Output Power equals to Measured Output Power adds the duty factor.

2.4GHz 802.11b mode				
Data Rate (MHz)	1M bps	2M bps	5.5M bps	11M bps
Peak Power (dBm)	19.36	19.38	19.32	19.41

2.4GHz 802.11g mode								
Data Rate (MHz)	6M bps	9M bps	12M bps	18M bps	24M bps	36M bps	48M bps	54M bps
Peak Power (dBm)	21.11	21.01	21.03	21.06	21.05	21.02	21.05	21.10

2.4GHz 802.11n HT20 mode								
Data Rate (MHz)	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
Peak Power (dBm)	20.22	20.17	20.16	20.14	20.19	20.16	20.19	20.21


2.3 Test Mode

Final results of test modes, data rates and test channels are shown as following table.


Test Cases				
Conducted TCs	Test Items	Mode	Data Rate	Test Channel
	6dB BW Power Spectral Density	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	6.5 Mbps	1/6/11
	Output Power	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	6.5 Mbps	1/6/11
	Conducted Band Edge	802.11b	1 Mbps	1/11
		802.11g	6 Mbps	1/11
		802.11n HT20	6.5 Mbps	1/11
	Conducted Spurious Emission	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	6.5 Mbps	1/6/11
Radiated TCs	Radiated Band Edge	802.11b	1 Mbps	1/11
		802.11g	6 Mbps	1/11
		802.11n HT20	6.5 Mbps	1/11
	Radiated Spurious Emission	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	6.5 Mbps	1/6/11
AC Conducted Emission	Mode 1 : GSM1900 Idle + Bluetooth Link + WLAN Link + RFID On + Earphone + Battery + USB Cable (Charging from Adapter)			

2.4 Connection Diagram of Test System

<WLAN Tx Mode>

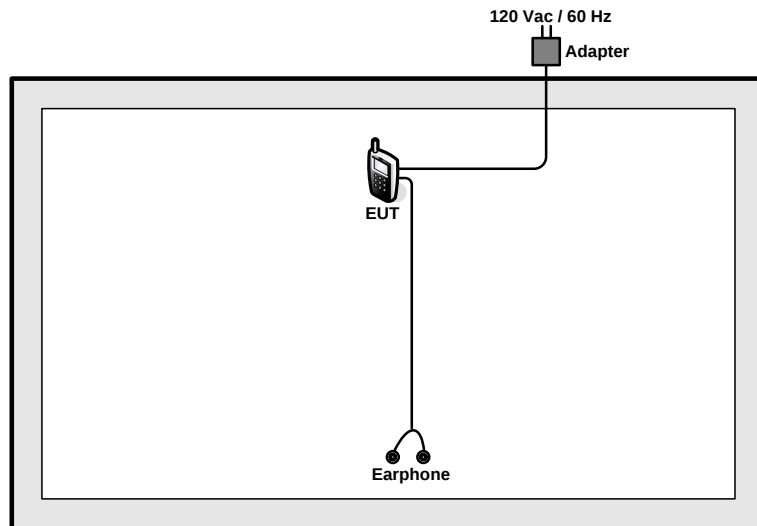

<AC Conducted Emission Mode>

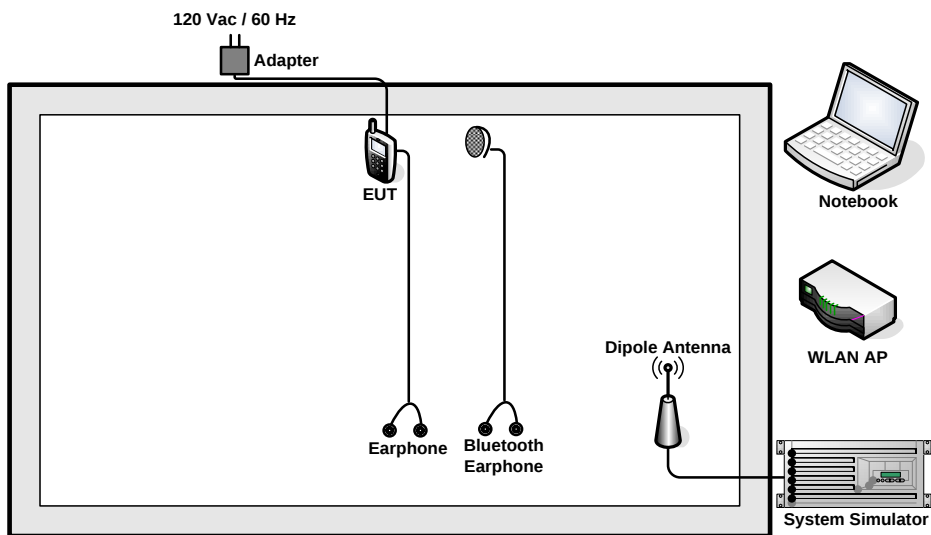

2.5 RF Utility

For WLAN function, programmed RF utility, "Diag tool.exe" installed in the notebook make the EUT provides functions like channel selection and power level for continuous transmitting and receiving signals.

2.6 Measurement Results Explanation Example

For conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and 10dB attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and 10dB attenuator factor.

Offset = RF cable loss + attenuator factor.

Following table shows an offset computation example with cable loss 14.2 dB.

Example :

Offset(dB) = RF cable loss(dB) + attenuator factor(dB).

$$= 14.2 + 10 = 24.2 \text{ (dB)}$$

3 Test Result

3.1 6dB Bandwidth Measurement

3.1.1 Limit of 6dB Bandwidth

The minimum 6 dB bandwidth shall be at least 500 KHz.


3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

3.1.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v02.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 KHz.
5. Measure and record the results in the test report.


3.1.4 Test Setup

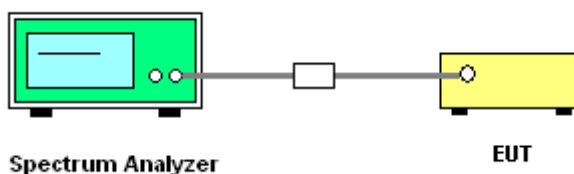



Test Mode :	802.11b	Temperature :	24~26℃
Test Engineer :	Coyote Lin	Relative Humidity :	50~53%


Channel	Frequency (MHz)	802.11b 6dB Bandwidth (MHz)	6dB Bandwidth Min. Limit (MHz)	Pass/Fail
01	2412	8.04	0.5	Pass
06	2437	8.08	0.5	Pass
11	2462	8.36	0.5	Pass

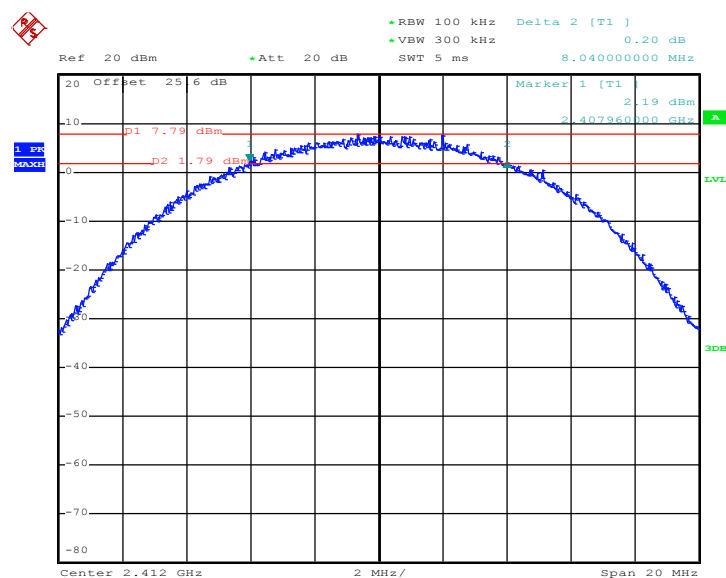

Date: 27.NOV.2012 11:14:55




6 dB Bandwidth Plot on 802.11b Channel 06

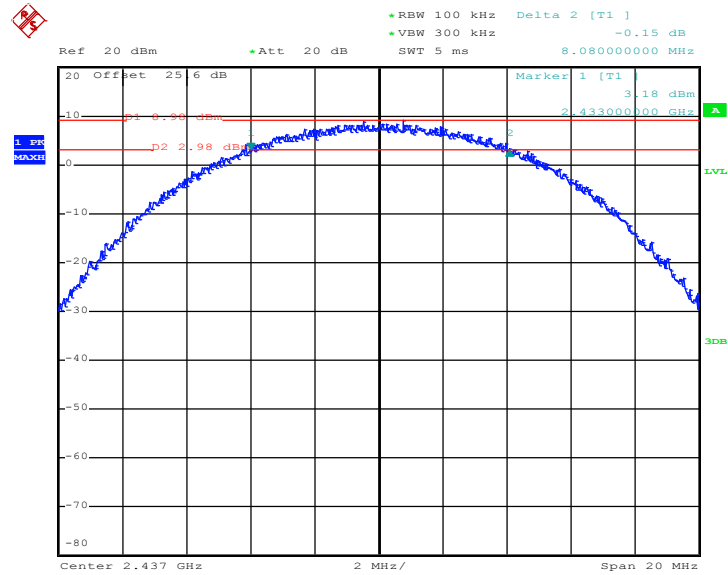

Date: 27.NOV.2012 11:22:03

6 dB Bandwidth Plot on 802.11b Channel 11

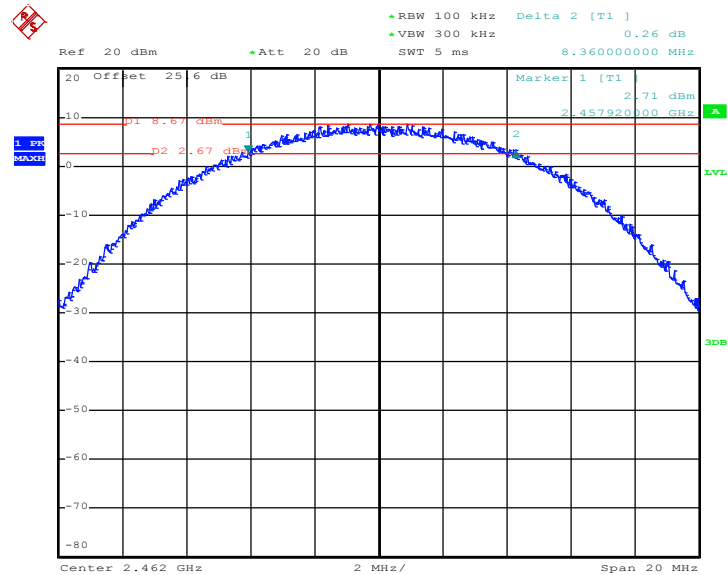

Date: 27.NOV.2012 11:26:22



Channel	Frequency (MHz)	802.11g 6dB Bandwidth (MHz)	6dB Bandwidth Min. Limit (MHz)	Pass/Fail
01	2412	16.32	0.5	Pass
06	2437	16.32	0.5	Pass
11	2462	16.32	0.5	Pass

• RBW 100 kHz Delta 2 [T1]
 • VBW 300 kHz 0.38 dB
 Ref 20 dBm • Att 20 dB SWT 5 ms 16.32000000 MHz

20 Offset 25 6 dB
 -10
 0
 -10
 -30
 -40
 -50
 -60
 -70
 -80

Marker 1 [T1]
 -2.82 dBm
 2.40384000 GHz


1 99
 MAX

D1 1.86 dBm

Center 2.412 GHz 20 MHz/ Span 20 MHz


Date: 27.NOV.2012 11:30:41

6 dB Bandwidth Plot on 802.11g Channel 06

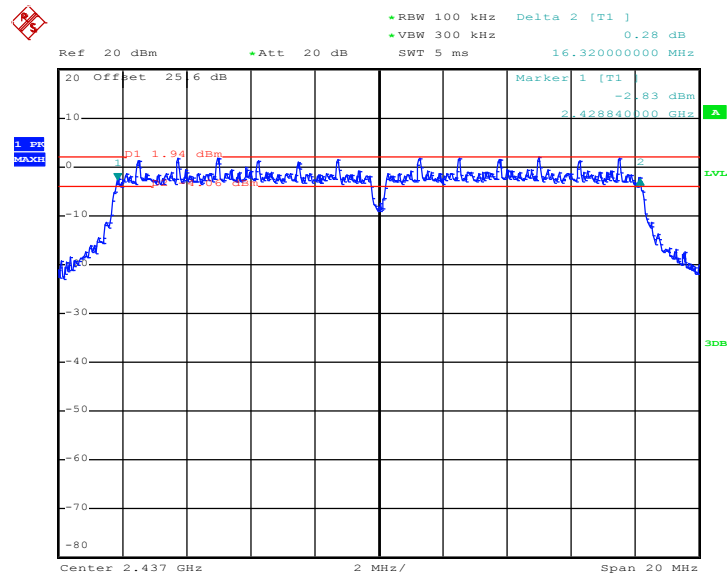

Date: 27.NOV.2012 11:36:23

6 dB Bandwidth Plot on 802.11g Channel 11

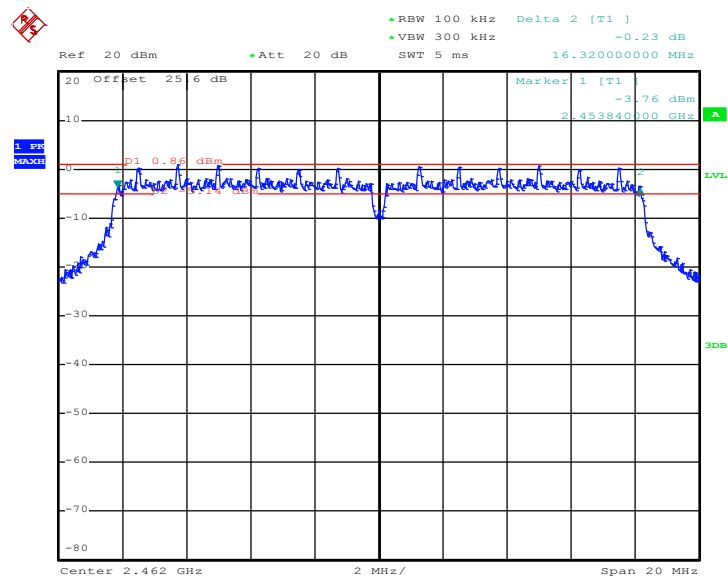


Date: 27.NOV.2012 11:48:45



Test Mode :	802.11n HT20	Temperature :	24~26°C
Test Engineer :	Coyote Lin	Relative Humidity :	50~53%

Channel	Frequency (MHz)	2.4GHz 802.11n HT20 6dB Bandwidth (MHz)	6dB Bandwidth Min. Limit (MHz)	Pass/Fail
01	2412	17.58	0.5	Pass
06	2437	17.60	0.5	Pass
11	2462	17.60	0.5	Pass


6 dB Bandwidth Plot on 802.11n HT20 Channel 01

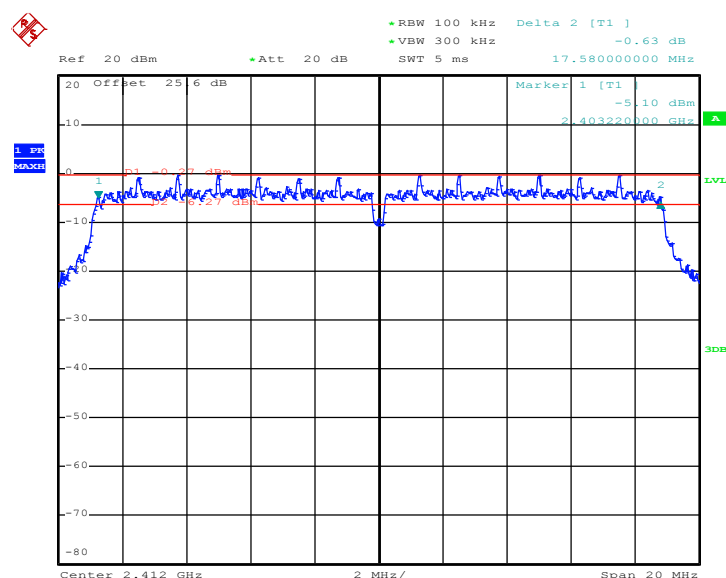

Date: 27.NOV.2012 13:40:45




6 dB Bandwidth Plot on 802.11n HT20 Channel 06

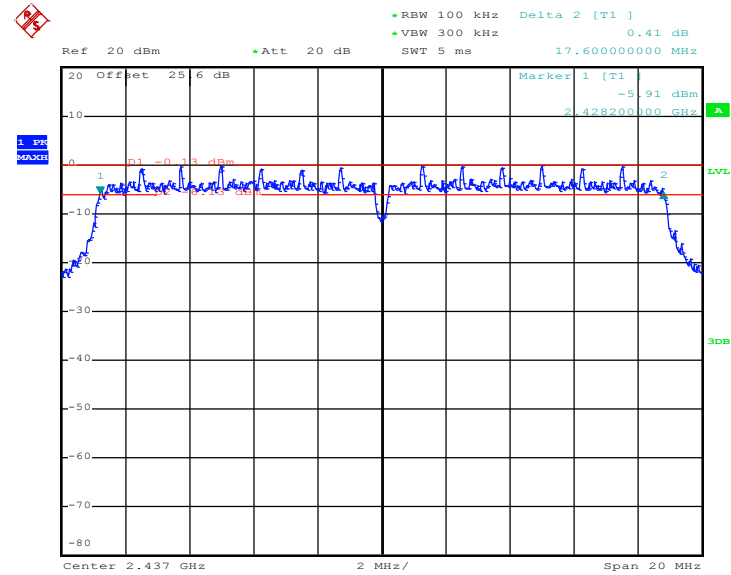

Date: 27.NOV.2012 13:35:41

6 dB Bandwidth Plot on 802.11n HT20 Channel 11

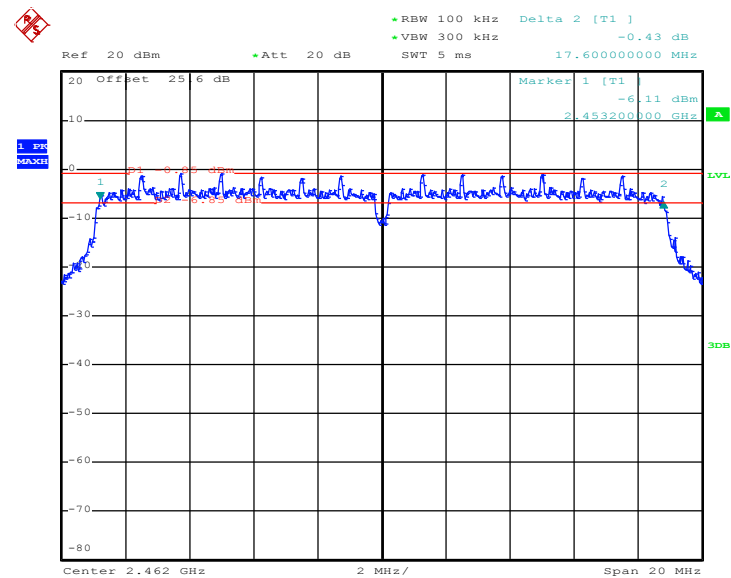

Date: 27.NOV.2012 11:59:02

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v02.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

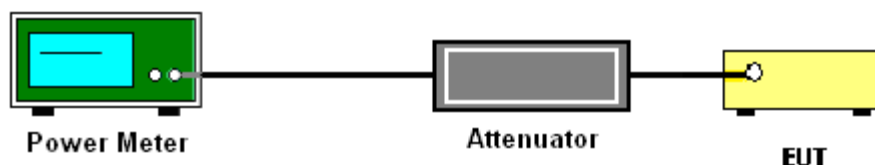

3.2.5 Test Result of Peak Output Power

Test Mode :	802.11b	Temperature :	24~26°C
Test Engineer :	Coyote Lin	Relative Humidity :	50~53%

Channel	Frequency (MHz)	802.11b Peak Output Power (dBm)	Max. Limits (dBm)	Pass/Fail
01	2412	19.28	30	Pass
06	2437	19.41	30	Pass
11	2462	19.06	30	Pass

Test Mode :	802.11g	Temperature :	24~26°C
Test Engineer :	Coyote Lin	Relative Humidity :	50~53%

Channel	Frequency (MHz)	802.11g Peak Output Power (dBm)	Max. Limits (dBm)	Pass/Fail
01	2412	21.05	30	Pass
06	2437	21.11	30	Pass
11	2462	20.16	30	Pass

Test Mode :	802.11n HT20	Temperature :	24~26°C
Test Engineer :	Coyote Lin	Relative Humidity :	50~53%

Channel	Frequency (MHz)	2.4GHz 802.11n HT20 Peak Output Power (dBm)	Max. Limits (dBm)	Pass/Fail
01	2412	20.07	30	Pass
06	2437	20.22	30	Pass
11	2462	19.43	30	Pass

3.2.6 Test Result of Average output Power (Reporting Only)

Test Mode :	802.11b	Temperature :	24~26
Test Engineer :	Coyote Lin	Relative Humidity :	50~53
Duty Cycle:	98.72%	Duty Factor:	0.06dB

Channel	Frequency (MHz)	802.11b Average Output Power (dBm)
01	2412	16.89
06	2437	17.09
11	2462	16.70

Test Mode :	802.11g	Temperature :	24~26
Test Engineer :	Coyote Lin	Relative Humidity :	50~53
Duty Cycle:	100.00%	Duty Factor:	0.00dB

Channel	Frequency (MHz)	802.11g Average Output Power (dBm)
01	2412	13.28
06	2437	13.38
11	2462	12.45

Test Mode :	802.11n HT20	Temperature :	24~26
Test Engineer :	Coyote Lin	Relative Humidity :	50~53
Duty Cycle:	99.07%	Duty Factor:	0.04dB

Channel	Frequency (MHz)	802.11n HT20 Average Output Power (dBm)
01	2412	11.38
06	2437	11.46
11	2462	10.95

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3KHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure 9.1 Option 1 of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v02
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.

3.3.4 Test Setup

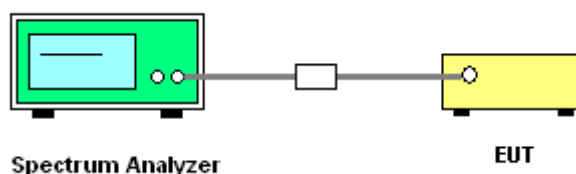

3.3.5 Test Result of Power Spectral Density

Test Mode :	802.11b	Temperature :	24~26℃
Test Engineer :	Coyote Lin	Relative Humidity :	50~53%

Channel	Frequency (MHz)	802.11b Power Density		Max. Limits (dBm/3KHz)	Pass/Fail
		PSD/100KHz (dBm)	PSD/3KHz (dBm)		
01	2412	5.94	-8.09	8	Pass
06	2437	8.25	-6.13	8	Pass
11	2462	7.35	-6.69	8	Pass

Test Mode :	802.11g	Temperature :	24~26℃
Test Engineer :	Coyote Lin	Relative Humidity :	50~53%

Channel	Frequency (MHz)	802.11g Power Density		Max. Limits (dBm/3KHz)	Pass/Fail
		PSD/100KHz (dBm)	PSD/3KHz (dBm)		
01	2412	1.63	-10.98	8	Pass
06	2437	1.82	-12.27	8	Pass
11	2462	0.83	-12.65	8	Pass

Test Mode :	802.11n HT20	Temperature :	24~26℃
Test Engineer :	Coyote Lin	Relative Humidity :	50~53%

Channel	Frequency (MHz)	802.11n HT20 Power Density		Max. Limits (dBm/3KHz)	Pass/Fail
		PSD/100KHz (dBm)	PSD/3KHz (dBm)		
01	2412	-0.46	-13.54	8	Pass
06	2437	-0.28	-14.04	8	Pass
11	2462	-1.06	-14.83	8	Pass


Note:

1. Measured power density (dBm) has offset with cable loss.
2. The Measured power density (dBm)/ 100KHz is reference level and used as 20dBc down for Conducted Band Edges and Conducted Spurious Emission limit line.




3.3.6 Test Result of Power Spectral Density Plots (100kHz)

PSD 100kHz Plot on 802.11b Channel 01

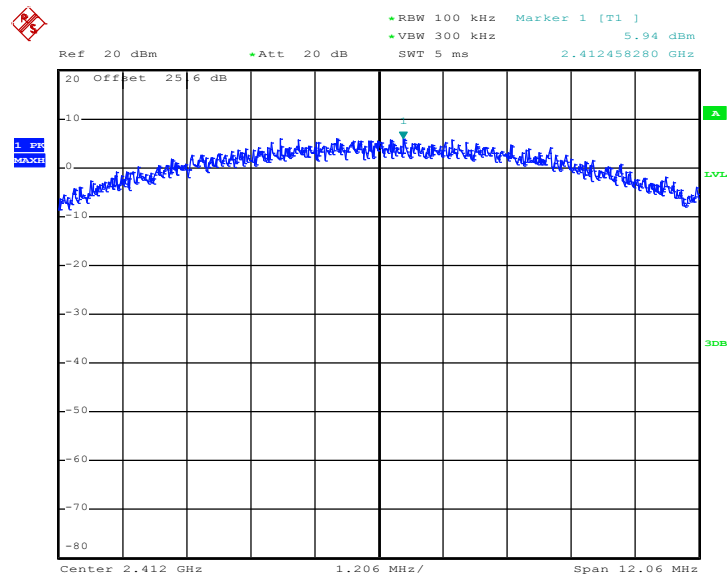

Date: 27.NOV.2012 11:17:52


PSD 100kHz Plot on 802.11b Channel 06

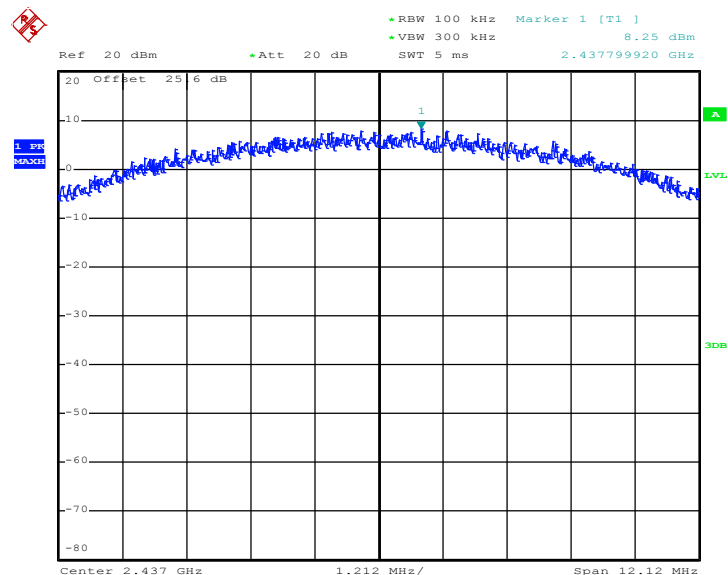

Date: 27.NOV.2012 11:22:33




PSD 100kHz Plot on 802.11b Channel 11

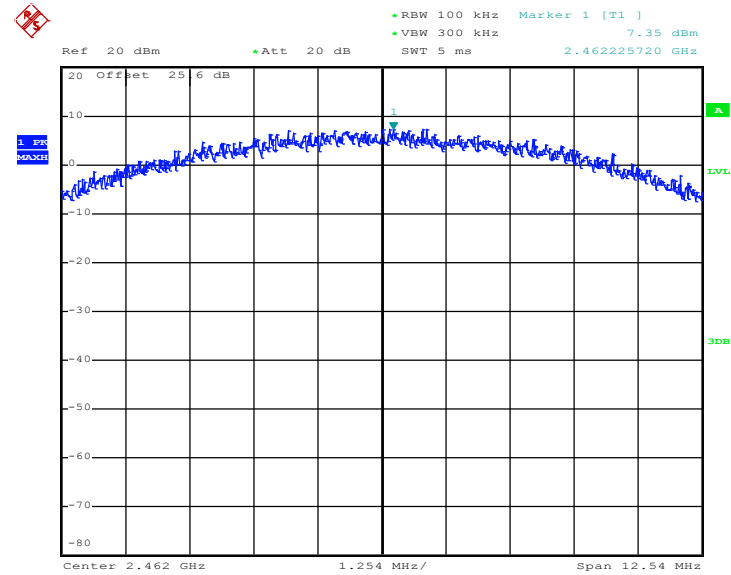

Date: 27.NOV.2012 11:26:53


PSD 100kHz Plot on 802.11g Channel 01

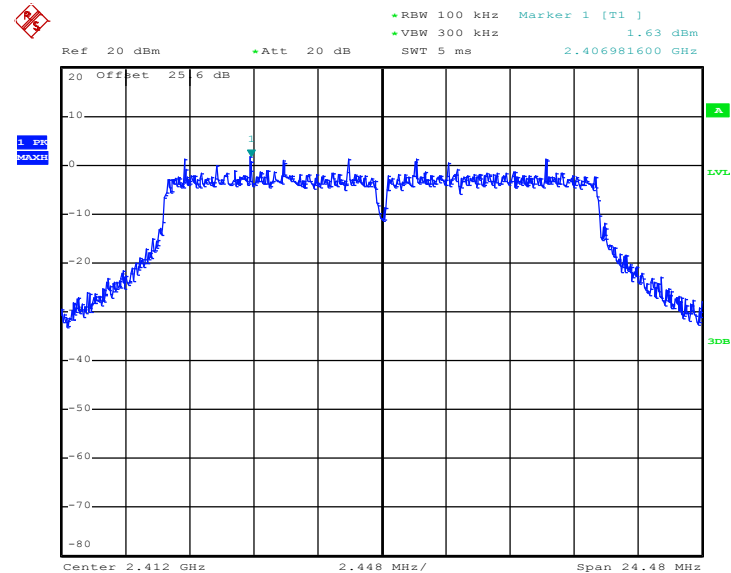

Date: 27.NOV.2012 11:31:52




PSD 100kHz Plot on 802.11g Channel 11






PSD 100kHz Plot on 802.11n HT20 Channel 01

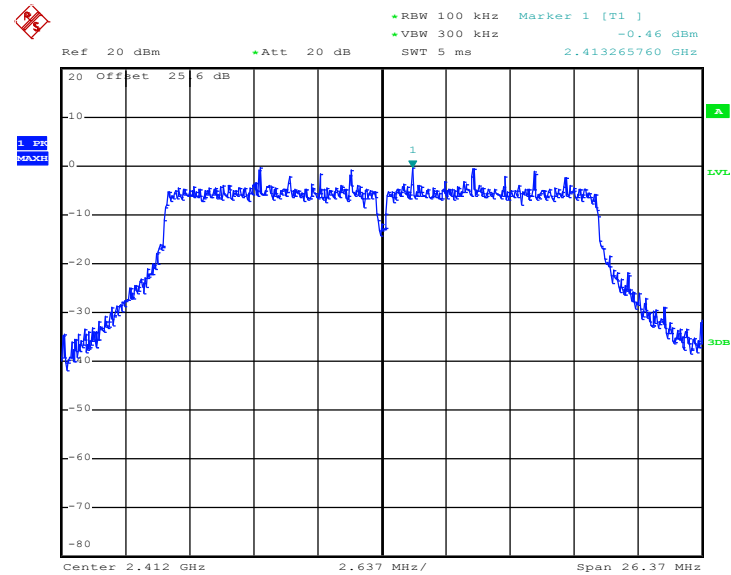

Date: 27.NOV.2012 13:41:49

PSD 100kHz Plot on 802.11n HT20 Channel 06

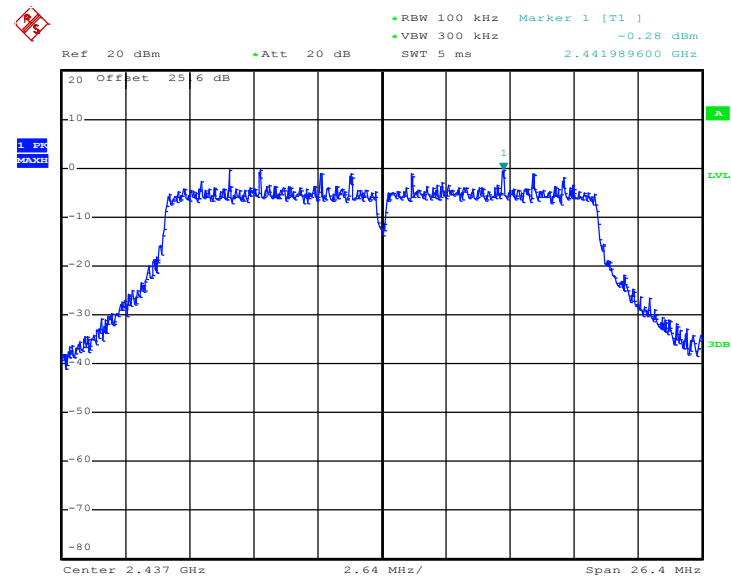


Date: 27.NOV.2012 13:36:11




3.3.7 Test Result of Power Spectral Density Plots (3kHz)

PSD 3kHz Plot on 802.11b Channel 01

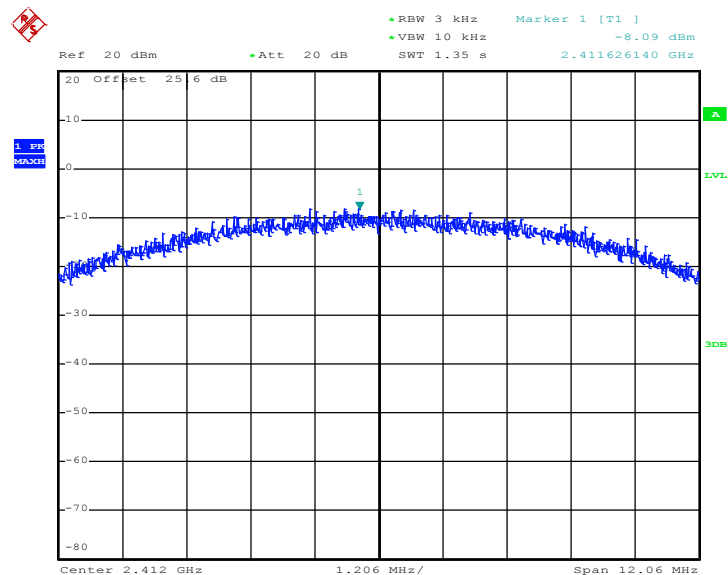


Date: 27.NOV.2012 11:16:43


PSD 3kHz Plot on 802.11b Channel 06

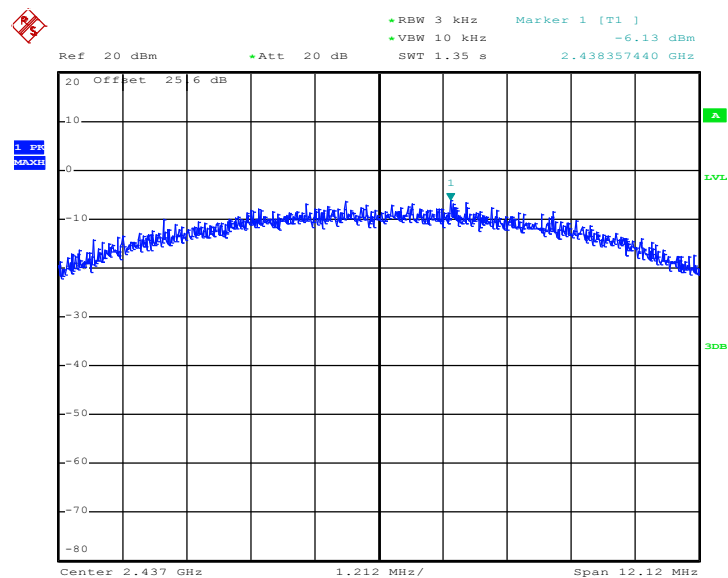

Date: 27.NOV.2012 11:22:25

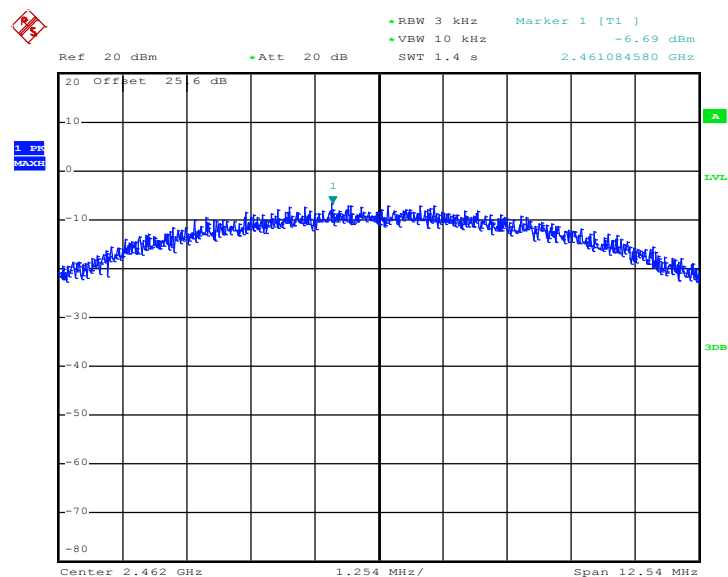PSD 3kHz Plot on 802.11b Channel 11


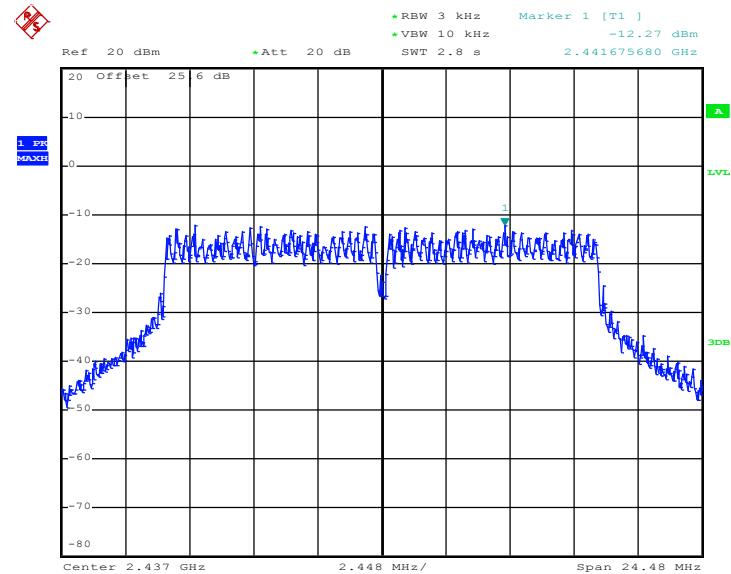
Date: 27.NOV.2012 11:26:46

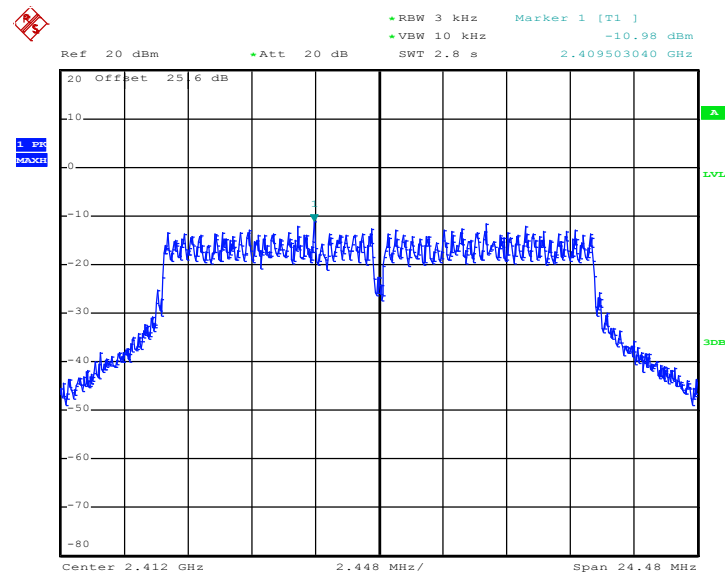PSD 3kHz Plot on 802.11g Channel 01


Date: 27.NOV.2012 11:31:02




PSD 3kHz Plot on 802.11g Channel 06




Date: 27.NOV.2012 11:36:44


PSD 3kHz Plot on 802.11g Channel 11

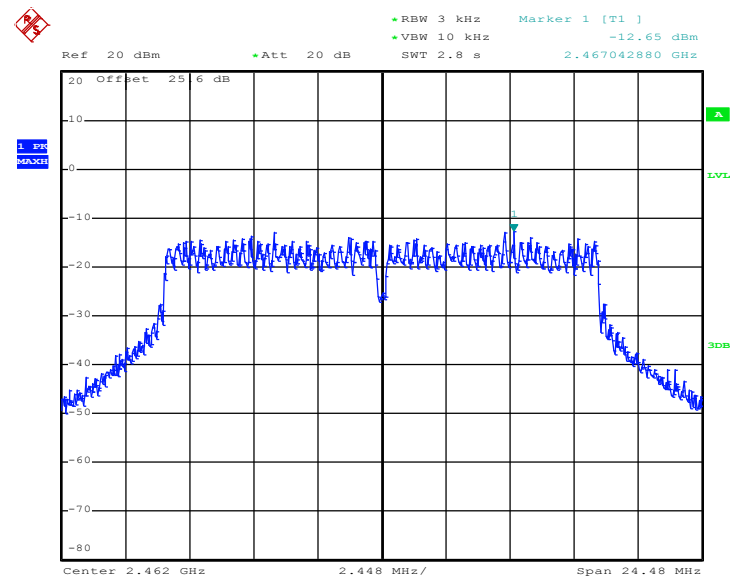

Date: 27.NOV.2012 11:49:09

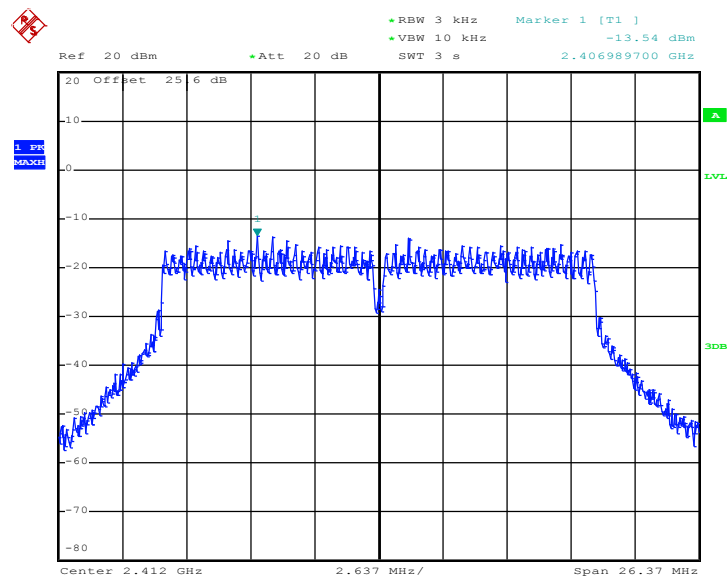
PSD 3kHz Plot on 802.11n HT20 Channel 01


Date: 27.NOV.2012 14:02:51

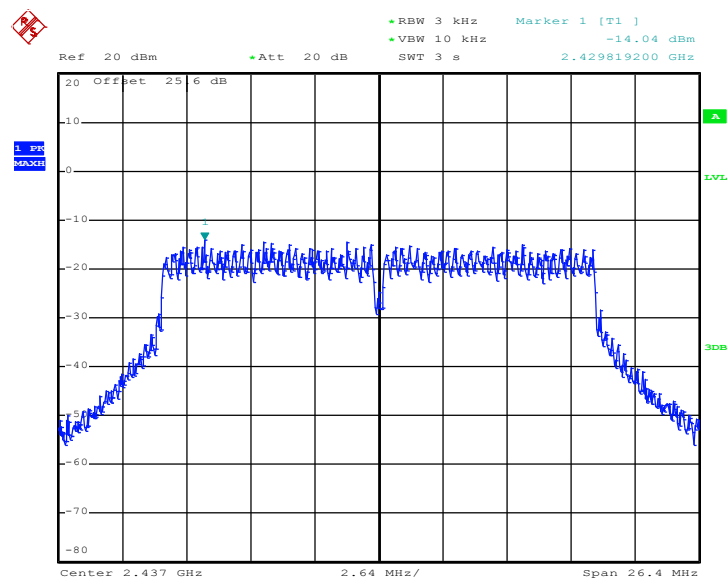PSD 3kHz Plot on 802.11n HT20 Channel 06


Date: 27.NOV.2012 13:36:03

PSD 3kHz Plot on 802.11n HT20 Channel 11

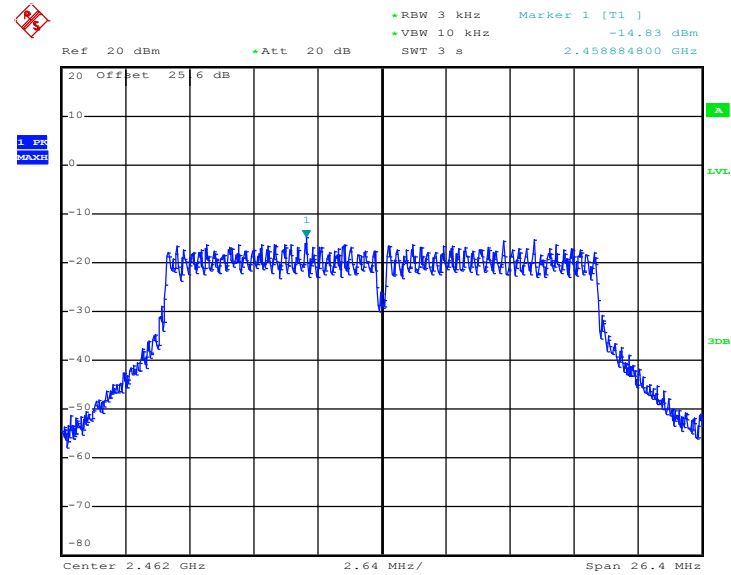

Date: 27.NOV.2012 12:00:04

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement and radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).


3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

3.4.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v02.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 KHz, VBW=300 KHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz, when maximum peak conducted output power procedure is used. The attenuation is set to 30dB, when maximum conducted output power procedure is used.
5. Measure and record the results in the test report.


3.4.4 Test Setup

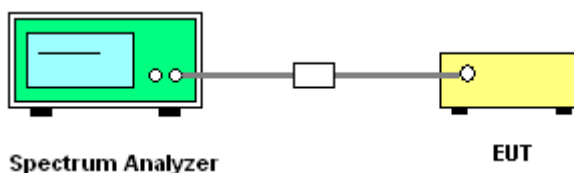




Test Mode :	802.11b	Temperature :	24~26℃
Test Band :	Low and High	Relative Humidity :	50~53%
Test Channel :	01 and 11	Test Engineer :	Coyote Lin

Low Band Edge Plot on 802.11b Channel 01

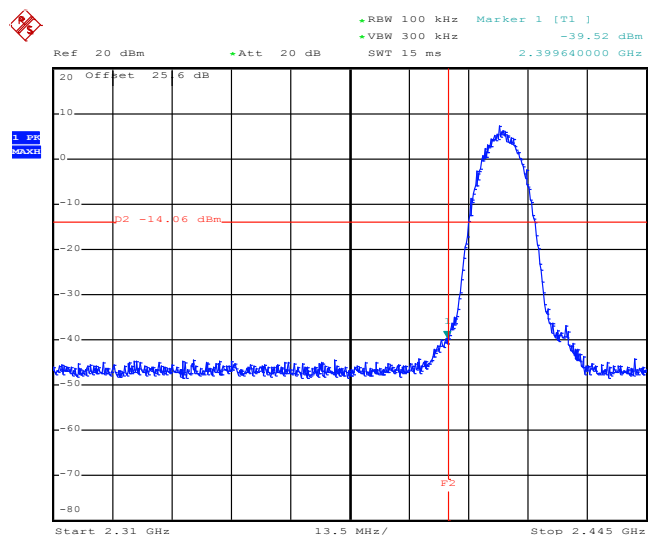

Date: 27.NOV.2012 11:20:05

High Band Edge Plot on 802.11b Channel 11

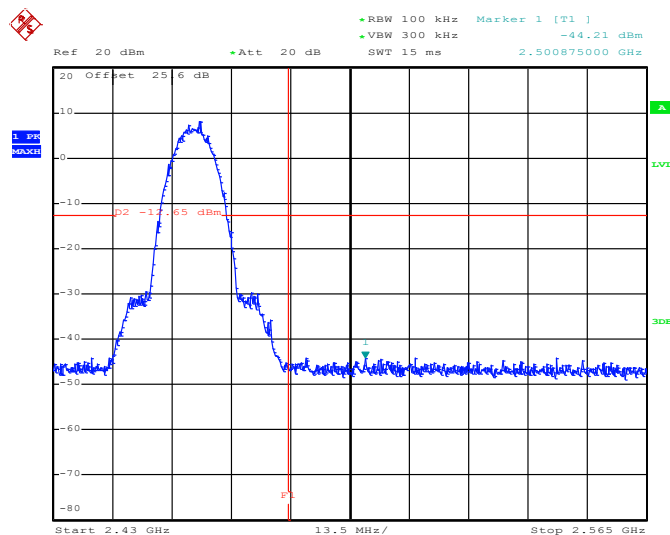

Date: 27.NOV.2012 11:27:11




Test Mode :	802.11g	Temperature :	24~26℃
Test Band :	Low and High	Relative Humidity :	50~53%
Test Channel :	01 and 11	Test Engineer :	Coyote Lin






Test Mode :	802.11n HT20	Temperature :	24~26°C
Test Band :	Low and High	Relative Humidity :	50~53%
Test Channel :	01 and 11	Test Engineer :	Coyote Lin

Low Band Edge Plot on 802.11n HT20 Channel 01

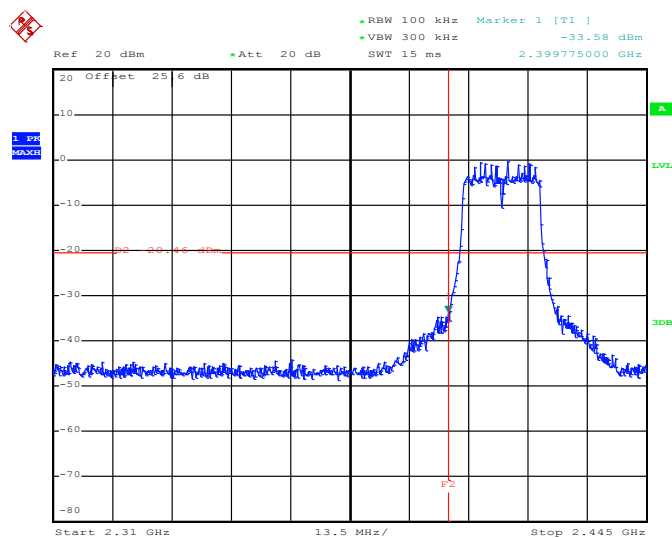

Date: 27.NOV.2012 13:42:11

High Band Edge Plot on 802.11n HT20 Channel 11

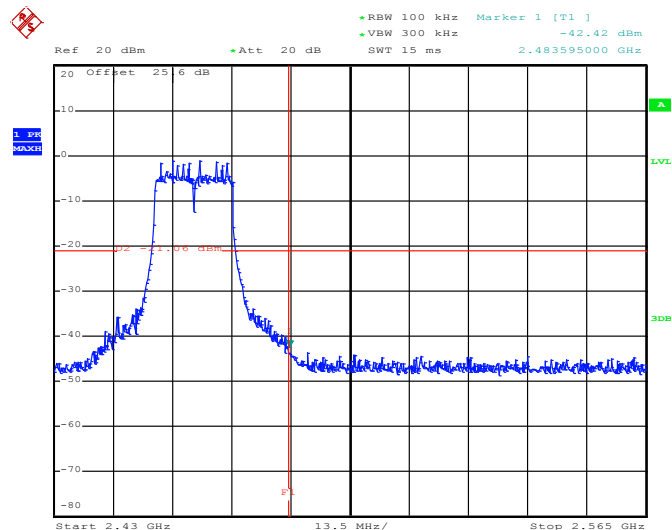


Date: 27.NOV.2012 12:00:31

3.4.6 Test Plots of Spurious Emission

Test Mode :	802.11b	Temperature :	24~26°C
Test Band :	30MHz-3GHz and 2G-25GHz	Relative Humidity :	50~53%
Test Channel :	01, 06, 11	Test Engineer :	Coyote Lin

802.11b 30 MHz~3 GHz


Conducted Spurious Emission Plot on Channel 01

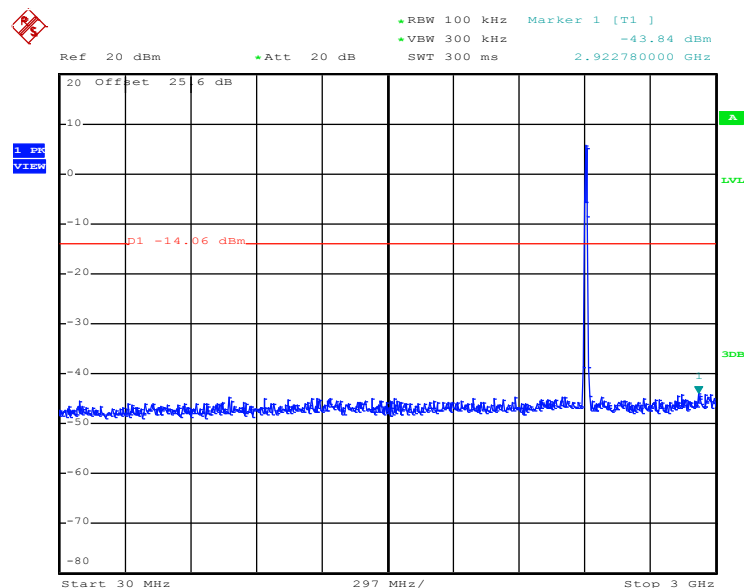


Date: 27.NOV.2012 11:18:56

802.11b 2 GHz~25 GHz


Conducted Spurious Emission Plot on Channel 01

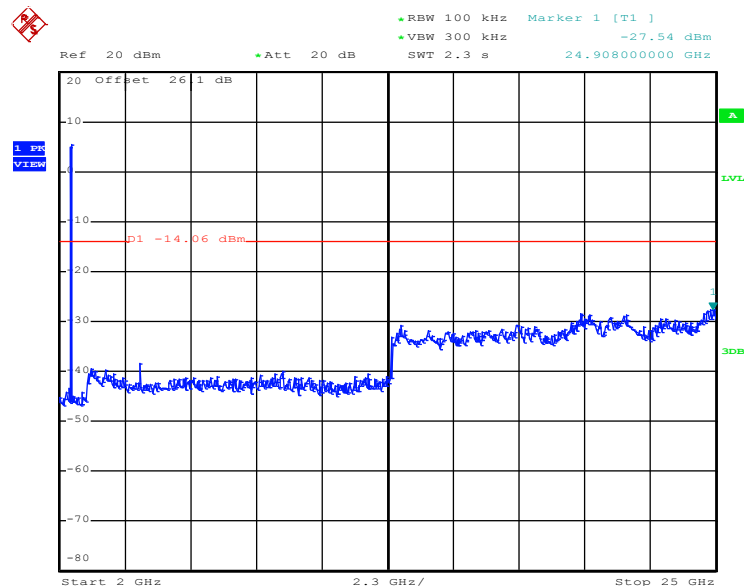


Date: 27.NOV.2012 11:19:14

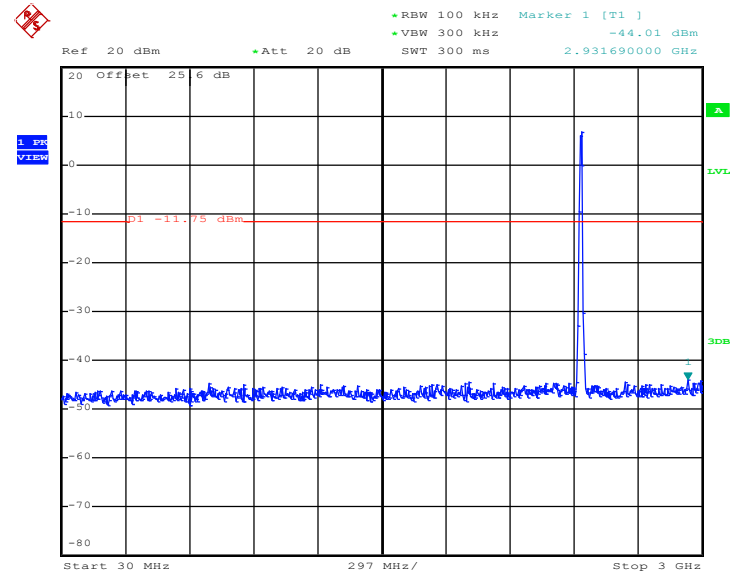802.11b 30 MHz~3 GHz
Conducted Spurious Emission Plot on Channel 06


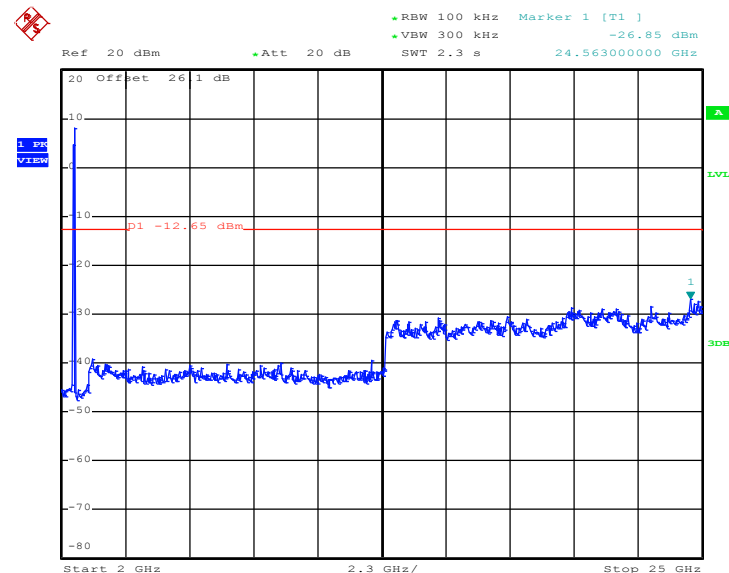
Date: 27.NOV.2012 11:23:08

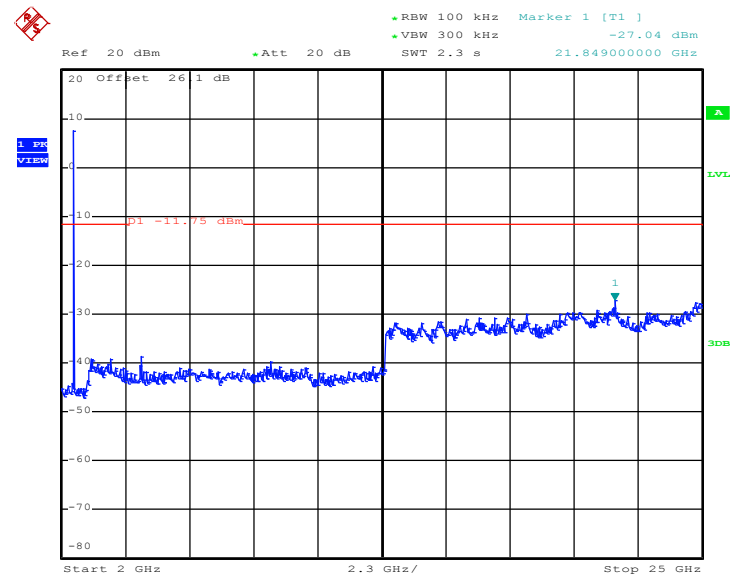802.11b 2 GHz~25 GHz
Conducted Spurious Emission Plot on Channel 06


Date: 27.NOV.2012 11:23:26

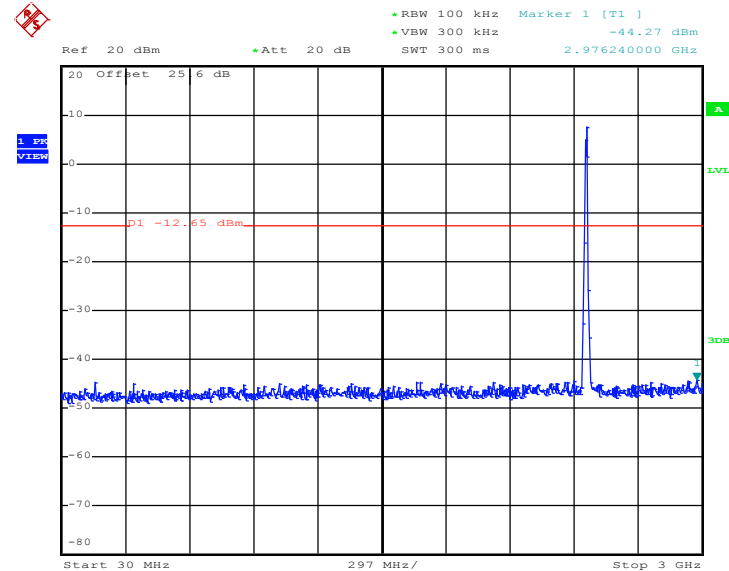802.11b 30 MHz~3 GHz
Conducted Spurious Emission Plot on Channel 11


Date: 27.NOV.2012 11:27:32

802.11b 2 GHz~25 GHz
Conducted Spurious Emission Plot on Channel 11


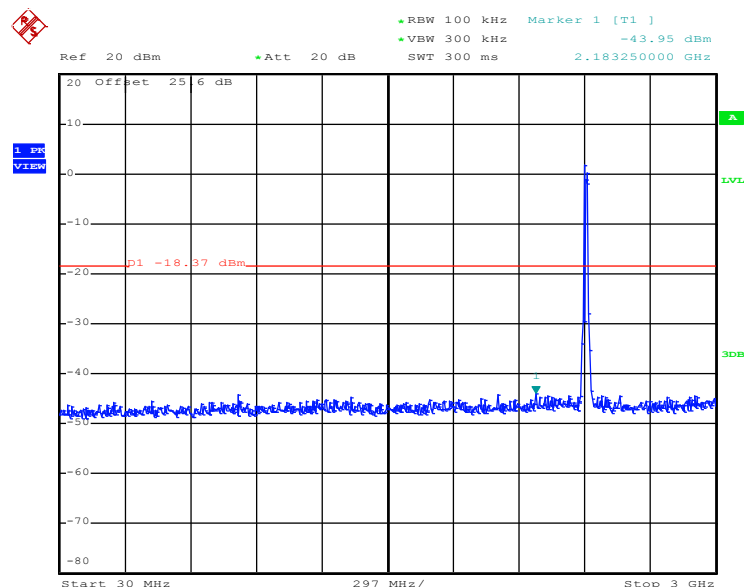
Date: 27.NOV.2012 11:27:49



Test Mode :	802.11g	Temperature :	24~26°C
Test Band :	30MHz-3GHz and 2G-25GHz	Relative Humidity :	50~53%
Test Channel :	01, 06, 11	Test Engineer :	Coyote Lin

802.11g 30 MHz~3 GHz


Conducted Spurious Emission Plot on Channel 01



Date: 3.DEC.2012 14:58:36




Conducted Spurious Emission Plot on Channel 01

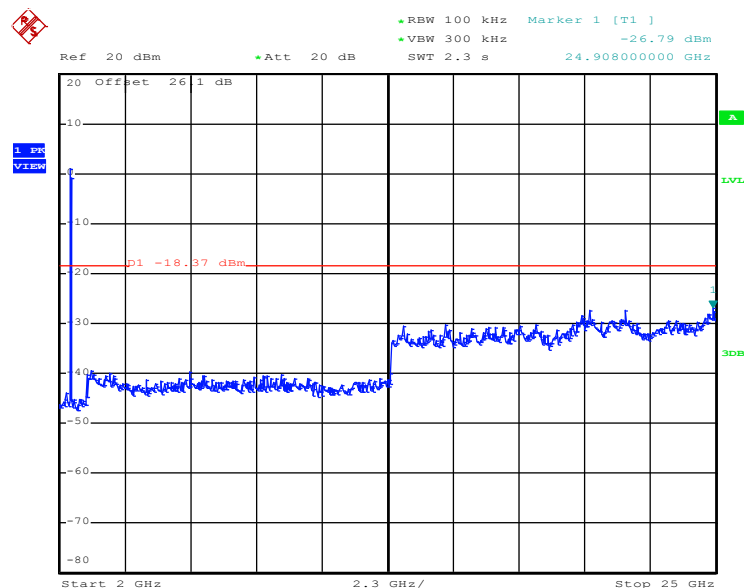

Date: 3.DEC.2012 14:58:53

802.11g 30 MHz~3 GHz


Conducted Spurious Emission Plot on Channel 06

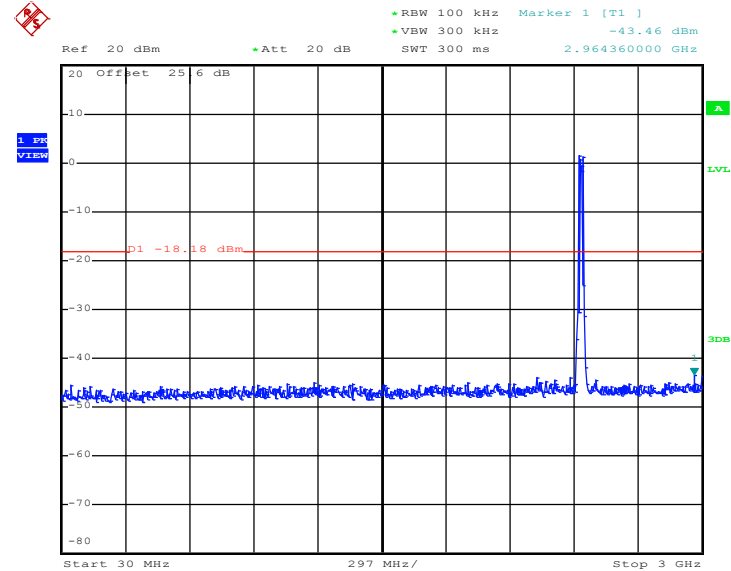


Date: 27.NOV.2012 11:46:13

802.11g 2 GHz~25 GHz


Conducted Spurious Emission Plot on Channel 06

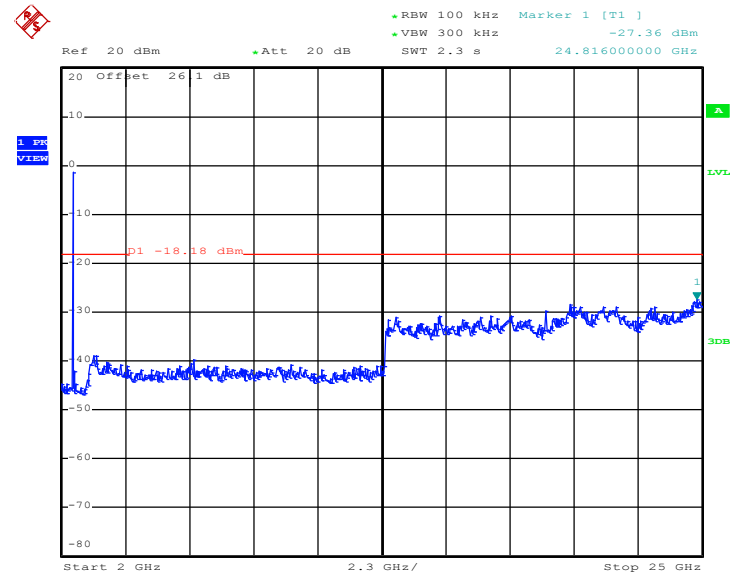

Date: 27.NOV.2012 11:46:30

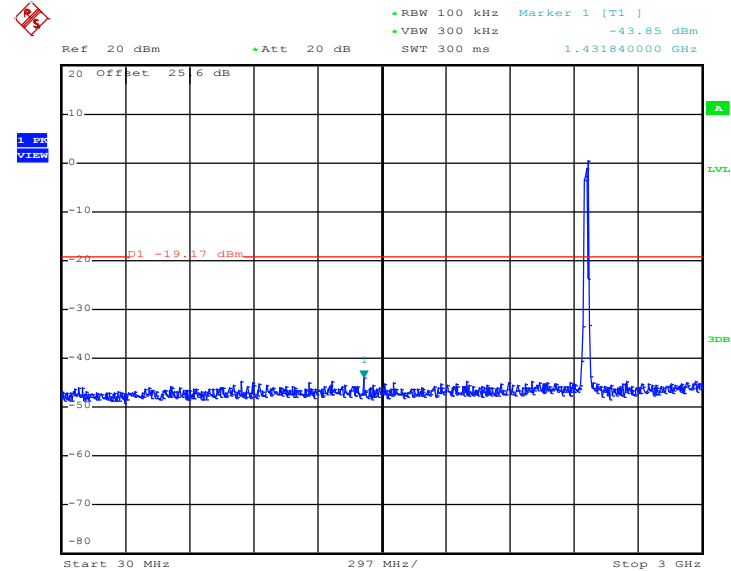802.11g 30 MHz~3 GHz
Conducted Spurious Emission Plot on Channel 11


Date: 27.NOV.2012 11:52:04

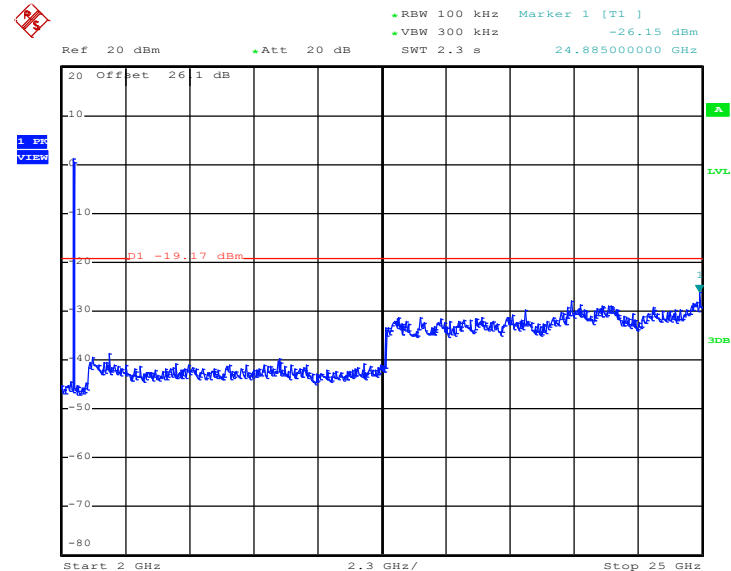802.11g 2 GHz~25 GHz
Conducted Spurious Emission Plot on Channel 11


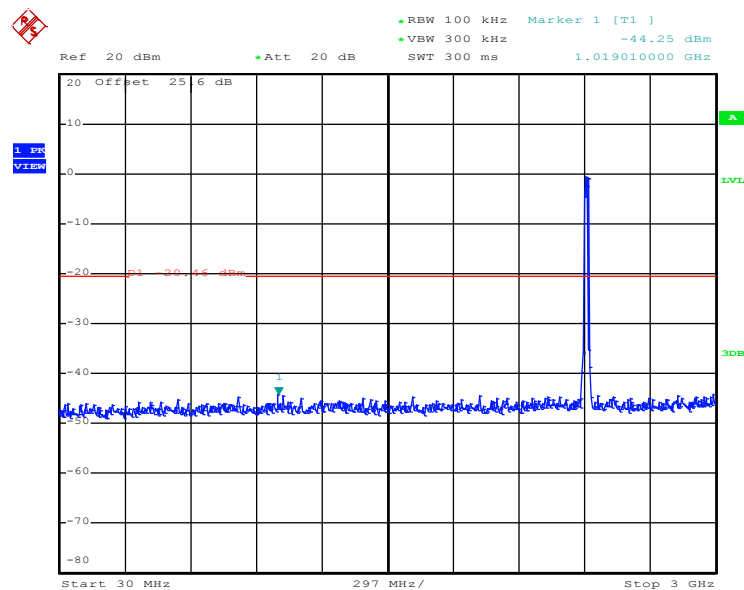
Date: 27.NOV.2012 11:52:21



Test Mode :	802.11n HT20	Temperature :	24~26℃
Test Band :	30MHz-3GHz and 2G-25GHz	Relative Humidity :	50~53%
Test Channel :	01, 06, 11	Test Engineer :	Coyote Lin

802.11n HT20 30 MHz~3 GHz


Conducted Spurious Emission Plot on Channel 01



Date: 27.NOV.2012 13:42:34



Conducted Spurious Emission Plot on Channel 01

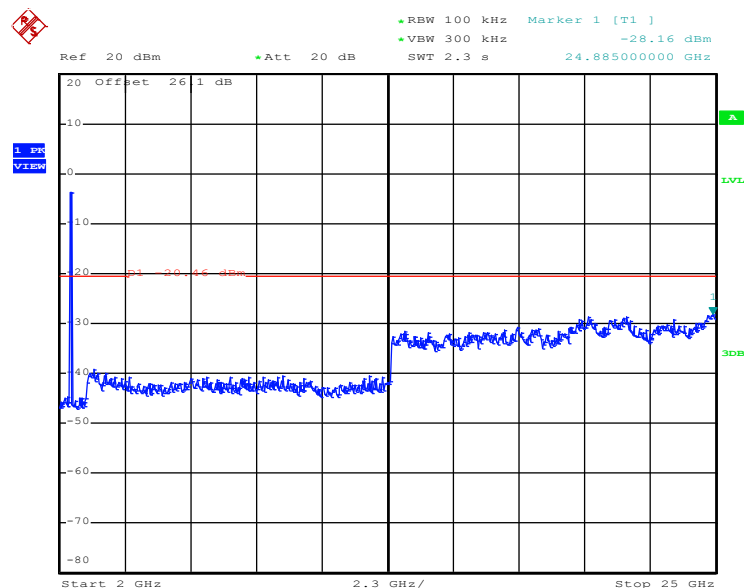


Date: 27.NOV.2012 13:42:52



802.11n HT20 30 MHz~3 GHz


Conducted Spurious Emission Plot on Channel 06

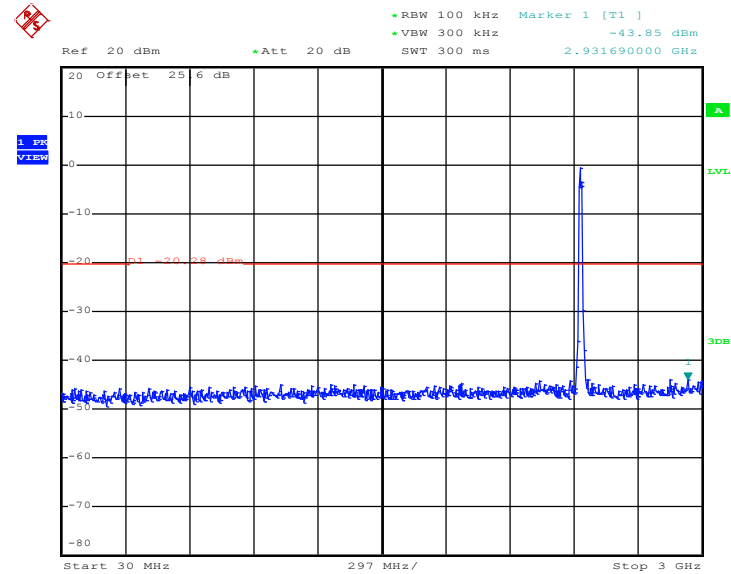


Date: 27.NOV.2012 13:36:42

802.11n HT20 2 GHz~25 GHz


Conducted Spurious Emission Plot on Channel 06

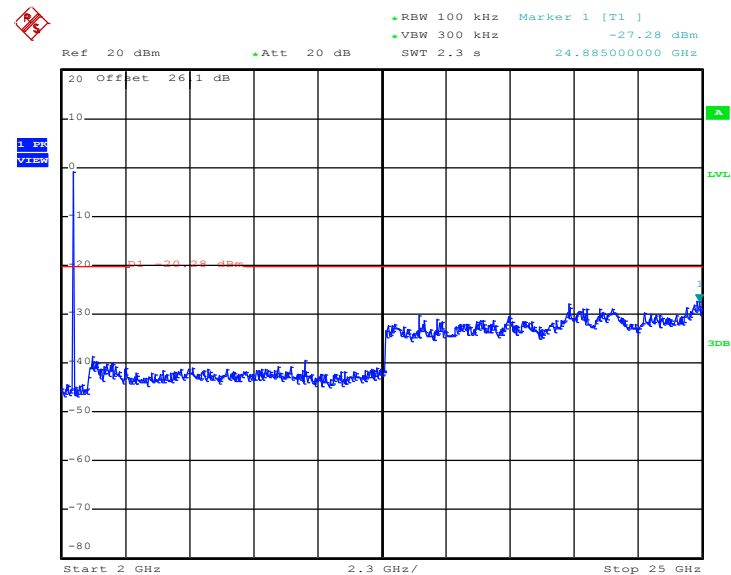

Date: 27.NOV.2012 13:37:00

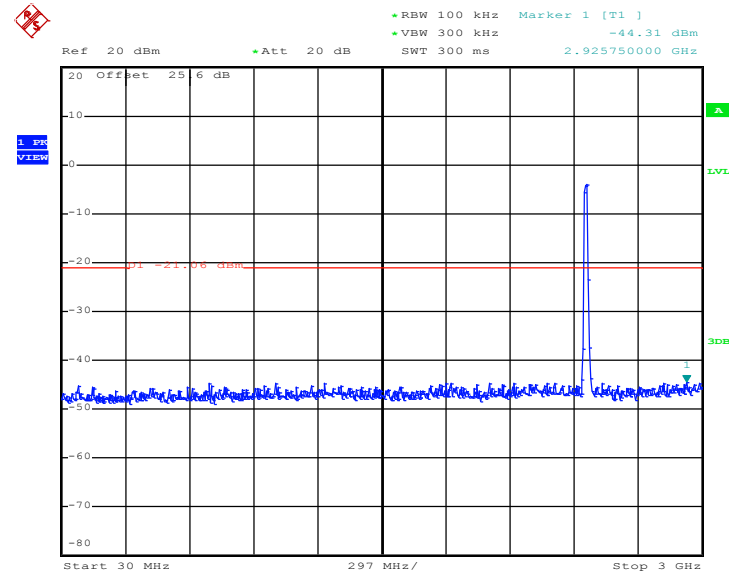802.11n HT20 30 MHz~3 GHz
Conducted Spurious Emission Plot on Channel 11


Date: 27.NOV.2012 12:23:34

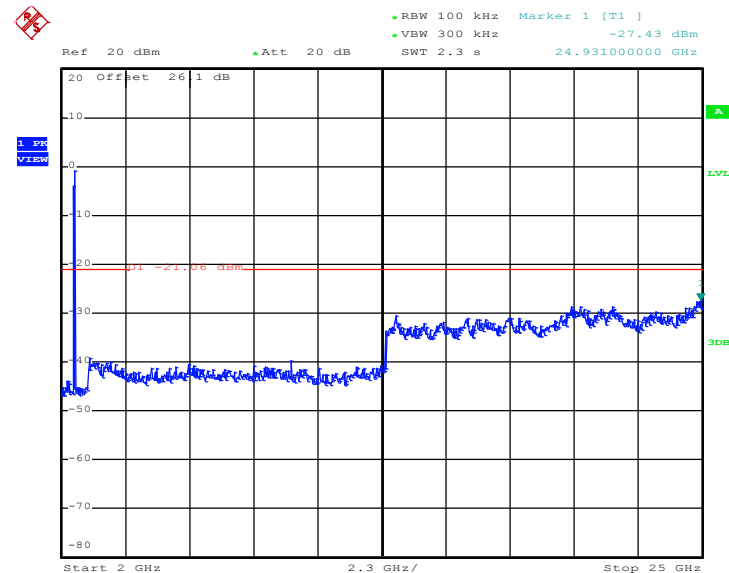802.11n HT20 2 GHz~25 GHz
Conducted Spurious Emission Plot on Channel 11


Date: 27.NOV.2012 12:23:52

3.5 Radiated Emission Measurement

3.5.1 Limit of Radiated Emission

In any 100 KHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(KHz)	300
0.490 – 1.705	24000/F(KHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

3.5.3 Test Procedures

1. The testing follows the guidelines in ANSI C63. 10-2009
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 KHz for $f < 1$ GHz; $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, $VBW = 3$ MHz for $f \geq 1$ GHz for peak measurement.

For average measurement:


 - $VBW = 10$ Hz, when duty cycle is no less than 98 percent.
 - $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

Band	Duty Cycle(%)	T(us)	1/T(KHz)	VBW Setting
802.11b	98.72	-	-	10Hz
802.11g	100.00	-	-	10Hz
802.11n HT20	99.07	-	-	10Hz


Note: For average measurement with duty cycle < 98%, use reduced VBW measurement method 4.2.3.2.3 in ANSI C63.10.

3.5.4 Test Setup


For radiated emissions below 30MHz

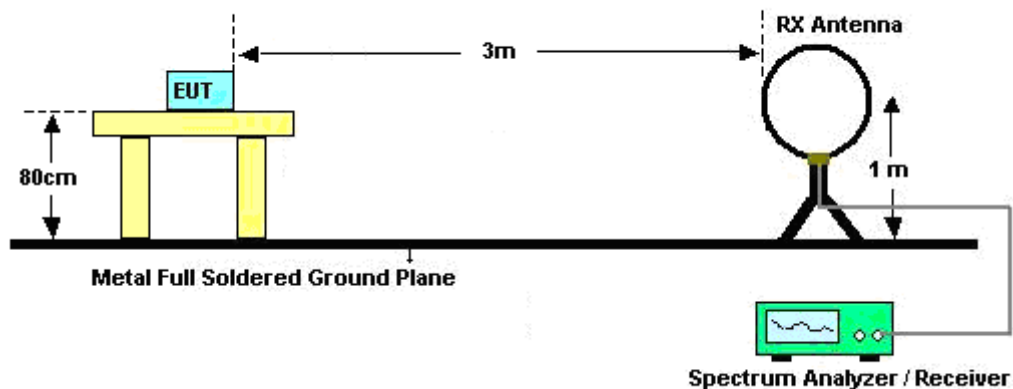

For radiated emissions from 30MHz to 1GHz

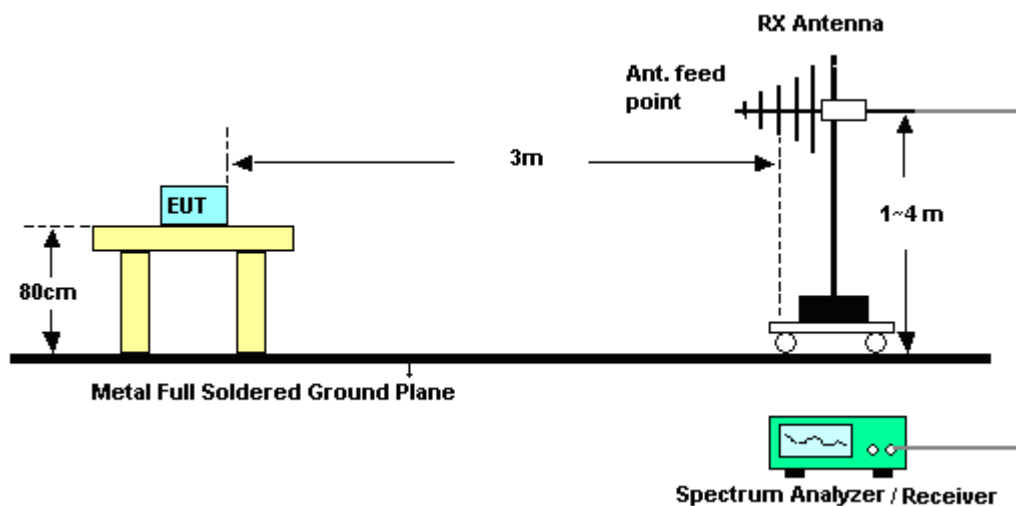

For radiated emissions above 1GHz

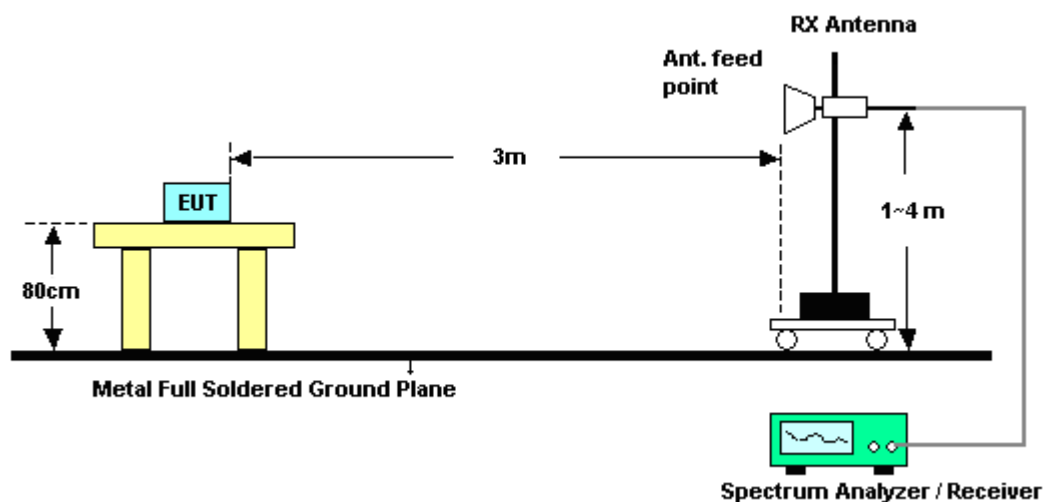

3.5.5 Test Results of Radiated Emissions (9 KHz ~ 30 MHz)

The low frequency, which started from 9 KHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

3.5.6 Test Result of Radiated Band Edges

Test Mode :	802.11b	Temperature :	22~24℃
Test Band :	Low	Relative Humidity :	51~54%
Test Channel :	01	Test Engineer :	Marlboro Hsu

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2386.68	52.58	-21.42	74	48.21	32.3	6.03	33.96	105	47	Peak
2386.95	42.25	-11.75	54	37.88	32.3	6.03	33.96	105	47	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2385.96	48.79	-25.21	74	44.42	32.3	6.03	33.96	176	68	Peak
2386.68	37.36	-16.64	54	32.99	32.3	6.03	33.96	176	68	Average

Test Mode :	802.11b	Temperature :	22~24℃
Test Band :	High	Relative Humidity :	51~54%
Test Channel :	11	Test Engineer :	Marlboro Hsu

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2487.52	57.72	-16.28	74	53.14	32.4	6.18	34	160	292	Peak
2486.3	49.43	-4.57	54	44.87	32.38	6.18	34	160	292	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2487	53.13	-20.87	74	48.57	32.38	6.18	34	174	277	Peak
2487.58	44.19	-9.81	54	39.61	32.4	6.18	34	174	277	Average



Test Mode :	802.11g	Temperature :	22~24℃
Test Band :	Low	Relative Humidity :	51~54%
Test Channel :	01	Test Engineer :	Marlboro Hsu

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2390	69.57	-4.43	74	65.2	32.3	6.03	33.96	197	269	Peak
2390	47.61	-6.39	54	43.24	32.3	6.03	33.96	197	269	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2390	63.83	-10.17	74	59.46	32.3	6.03	33.96	152	83	Peak
2390	41.09	-12.91	54	36.72	32.3	6.03	33.96	152	83	Average

Test Mode :	802.11g	Temperature :	22~24℃
Test Band :	High	Relative Humidity :	51~54%
Test Channel :	11	Test Engineer :	Marlboro Hsu

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2484.08	72.74	-1.26	74	68.18	32.38	6.18	34	161	50	Peak
2483.5	50.86	-3.14	54	46.3	32.38	6.18	34	161	50	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.68	67.26	-6.74	74	62.7	32.38	6.18	34	100	285	Peak
2483.5	44.72	-9.28	54	40.16	32.38	6.18	34	100	285	Average



Test Mode :	802.11n HT20	Temperature :	22~24℃
Test Band :	Low	Relative Humidity :	51~54%
Test Channel :	01	Test Engineer :	Marlboro Hsu

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2389.83	68.46	-5.54	74	64.09	32.3	6.03	33.96	106	44	Peak
2390	45.79	-8.21	54	41.42	32.3	6.03	33.96	106	44	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2390	65.8	-8.2	74	61.43	32.3	6.03	33.96	200	252	Peak
2390	41.56	-12.44	54	37.19	32.3	6.03	33.96	200	252	Average

Test Mode :	802.11n HT20	Temperature :	22~24℃
Test Band :	High	Relative Humidity :	51~54%
Test Channel :	11	Test Engineer :	Marlboro Hsu

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.94	69.02	-4.98	74	64.46	32.38	6.18	34	109	278	Peak
2483.5	48.04	-5.96	54	43.48	32.38	6.18	34	109	278	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.54	65.06	-8.94	74	60.5	32.38	6.18	34	100	298	Peak
2483.5	42.65	-11.35	54	38.09	32.38	6.18	34	100	298	Average

3.5.7 Test Result of Radiated Emission (30 MHz ~ 10th Harmonic)

Test Mode :	802.11b	Temperature :	22~24℃
Test Channel :	01	Relative Humidity :	51~54%
Test Engineer :	Marlboro Hsu	Polarization :	Horizontal
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. 7236 MHz and 9648 MHz are not within a restricted band, and its limit line is 20dB below the highest emission level. For example, 108.49 dBuV/m - 20dB = 88.49.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2412	103.79	-	-	99.38	32.31	6.07	33.97	105	47	Average
2412	108.49	-	-	104.08	32.31	6.07	33.97	105	47	Peak
4824	50.61	-3.39	54	64.99	33.97	9.12	57.47	156	89	Average
4824	51.15	-22.85	74	65.53	33.97	9.12	57.47	156	89	Peak
7236	47.36	-41.13	88.49	59.76	35.55	10.03	57.98	100	0	Peak
9648	45.25	-43.24	88.49	54.97	36.52	11.99	58.23	100	0	Peak

Test Mode :	802.11b	Temperature :	22~24℃
Test Channel :	01	Relative Humidity :	51~54%
Test Engineer :	Marlboro Hsu	Polarization :	Vertical
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. 7236 MHz and 9648 MHz are not within a restricted band, and its limit line is 20dB below the highest emission level. 3. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2412	100.05	-	-	95.64	32.31	6.07	33.97	176	68	Average
2412	104.77	-	-	100.36	32.31	6.07	33.97	176	68	Peak
4824	49.39	-24.61	74	63.77	33.97	9.12	57.47	100	0	Peak
7236	46.6	-38.17	84.77	59	35.55	10.03	57.98	100	0	Peak
9648	44.95	-39.82	84.77	54.67	36.52	11.99	58.23	100	0	Peak

Test Mode :	802.11b	Temperature :	22~24°C
Test Channel :	06	Relative Humidity :	51~54%
Test Engineer :	Marlboro Hsu	Polarization :	Horizontal
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. 9747 MHz is not within a restricted band, and its limit line is 20dB below the highest emission level. 3. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
192	31.22	-12.28	43.5	52.23	9.02	1.29	31.32	-	-	Peak
259.23	34.34	-11.66	46	51.29	12.72	1.58	31.25	-	-	Peak
284.88	39.26	-6.74	46	55.93	13.09	1.66	31.42	-	-	Peak
351.8	44.99	-1.01	46	59.69	14.72	1.99	31.41	100	325	Peak
351.8	44.85	-1.15	46	59.55	14.72	1.99	31.41	100	325	QP
425.3	39.88	-6.12	46	52.32	16.55	2.23	31.22	-	-	Peak
498.8	40.41	-5.59	46	50.8	18.06	2.44	30.89	-	-	Peak
2437	103.88	-	-	99.4	32.35	6.11	33.98	135	289	Average
2437	108.68	-	-	104.2	32.35	6.11	33.98	135	289	Peak
4875	53.58	-0.42	54	67.98	33.95	9.13	57.48	142	97	Average
4875	55.22	-18.78	74	69.62	33.95	9.13	57.48	142	97	Peak
7314	46	-28	74	58.42	35.54	10.06	58.02	100	0	Peak
9747	46.35	-42.33	88.68	55.99	36.66	11.94	58.24	100	0	Peak

Test Mode :	802.11b	Temperature :	22~24°C
Test Channel :	06	Relative Humidity :	51~54%
Test Engineer :	Marlboro Hsu	Polarization :	Vertical
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
41.61	33.63	-6.37	40	52.46	12.3	0.63	31.76	102	158	Peak
211.17	30	-13.5	43.5	50.12	9.91	1.37	31.4	-	-	Peak
284.88	32.32	-13.68	46	48.99	13.09	1.66	31.42	-	-	Peak
355.3	38.53	-7.47	46	53.13	14.79	2.02	31.41	-	-	Peak
422.5	37.75	-8.25	46	50.29	16.48	2.22	31.24	-	-	Peak
492.5	37.37	-8.63	46	47.92	17.94	2.42	30.91	-	-	Peak
2437	99.83	-	-	95.35	32.35	6.11	33.98	200	240	Average
2437	104.54	-	-	100.06	32.35	6.11	33.98	200	240	Peak
4875	49.45	-24.55	74	63.85	33.95	9.13	57.48	100	0	Peak
7311	46.19	-27.81	74	58.61	35.54	10.06	58.02	100	0	Peak

Test Mode :	802.11b	Temperature :	22~24℃
Test Channel :	11	Relative Humidity :	51~54%
Test Engineer :	Marlboro Hsu	Polarization :	Horizontal
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. 9849 MHz is not within a restricted band, and its limit line is 20dB below the highest emission level.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2462	104.33	-	-	99.81	32.37	6.14	33.99	160	292	Average
2462	108.73	-	-	104.21	32.37	6.14	33.99	160	292	Peak
4926	50.21	-3.79	54	64.61	33.93	9.15	57.48	100	22	Average
4926	51.62	-22.38	74	66.02	33.93	9.15	57.48	100	22	Peak
7386	48.83	-25.17	74	61.29	35.52	10.1	58.08	100	0	Peak
9849	46.16	-42.57	88.73	55.72	36.81	11.88	58.25	100	0	Peak

Test Mode :	802.11b	Temperature :	22~24℃
Test Channel :	11	Relative Humidity :	51~54%
Test Engineer :	Marlboro Hsu	Polarization :	Vertical
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. 9849 MHz is not within a restricted band, and its limit line is 20dB below the highest emission level. 3. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2462	99.08	-	-	94.56	32.37	6.14	33.99	174	277	Average
2462	104.63	-	-	100.11	32.37	6.14	33.99	174	277	Peak
4926	50.29	-3.71	54	64.69	33.93	9.15	57.48	198	6	Average
4926	51.84	-22.16	74	66.24	33.93	9.15	57.48	198	6	Peak
7386	46.63	-27.37	74	59.09	35.52	10.1	58.08	100	0	Peak
9849	46.07	-38.56	84.63	55.63	36.81	11.88	58.25	100	0	Peak

Test Mode :	802.11g	Temperature :	22~24°C
Test Channel :	01	Relative Humidity :	51~54%
Test Engineer :	Marlboro Hsu	Polarization :	Horizontal
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. 7236 MHz is not within a restricted band, and its limit line is 20dB below the highest emission level. 3. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2412	94.63	-	-	90.22	32.31	6.07	33.97	197	269	Average
2412	105.59	-	-	101.18	32.31	6.07	33.97	197	269	Peak
4824	47.62	-26.38	74	62	33.97	9.12	57.47	100	0	Peak
7236	44.22	-41.37	85.59	56.61	35.56	10.02	57.97	100	0	Peak

Test Mode :	802.11g	Temperature :	22~24°C
Test Channel :	01	Relative Humidity :	51~54%
Test Engineer :	Marlboro Hsu	Polarization :	Vertical
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2412	91.18	-	-	86.77	32.31	6.07	33.97	152	83	Average
2412	102.07	-	-	97.66	32.31	6.07	33.97	152	83	Peak
4824	45.95	-28.05	74	60.33	33.97	9.12	57.47	100	0	Peak

Test Mode :	802.11g	Temperature :	22~24°C
Test Channel :	06	Relative Humidity :	51~54%
Test Engineer :	Marlboro Hsu	Polarization :	Horizontal
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	95.33	-	-	90.85	32.35	6.11	33.98	196	44	Average
2437	106.26	-	-	101.8	32.33	6.11	33.98	196	44	Peak
4875	49.42	-24.58	74	63.82	33.95	9.13	57.48	100	0	Peak
7314	45.67	-28.33	74	58.09	35.54	10.06	58.02	100	0	Peak

Test Mode :	802.11g	Temperature :	22~24°C
Test Channel :	06	Relative Humidity :	51~54%
Test Engineer :	Marlboro Hsu	Polarization :	Vertical
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	88.8	-	-	84.32	32.35	6.11	33.98	100	297	Average
2437	99.45	-	-	94.97	32.35	6.11	33.98	100	297	Peak
4875	45.86	-28.14	74	60.26	33.95	9.13	57.48	100	0	Peak

Test Mode :	802.11g	Temperature :	22~24°C
Test Channel :	11	Relative Humidity :	51~54%
Test Engineer :	Marlboro Hsu	Polarization :	Horizontal
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
211.17	31.29	-12.21	43.5	51.41	9.91	1.37	31.4	-	-	Peak
259.23	34.34	-11.66	46	51.29	12.72	1.58	31.25	-	-	Peak
284.88	39.26	-6.74	46	55.93	13.09	1.66	31.42	-	-	Peak
351.8	45.13	-0.87	46	59.83	14.72	1.99	31.41	103	334	Peak
351.8	44.62	-1.38	46	59.32	14.72	1.99	31.41	103	334	QP
361.6	41.63	-4.37	46	55.99	14.98	2.06	31.4	-	-	Peak
425.3	39.88	-6.12	46	52.32	16.55	2.23	31.22	-	-	Peak
2462	95.06	-	-	90.54	32.37	6.14	33.99	161	50	Average
2462	105.68	-	-	101.16	32.37	6.14	33.99	161	50	Peak
4920	49.2	-24.8	74	63.61	33.93	9.14	57.48	100	0	Peak

Test Mode :	802.11g	Temperature :	22~24°C
Test Channel :	11	Relative Humidity :	51~54%
Test Engineer :	Marlboro Hsu	Polarization :	Vertical
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
30	33.04	-6.96	40	44.38	20	0.53	31.87	102	226	Peak
39.99	32.85	-7.15	40	50.52	13.5	0.62	31.79	-	-	Peak
211.17	30	-13.5	43.5	50.12	9.91	1.37	31.4	-	-	Peak
342	38.12	-7.88	46	53.17	14.45	1.91	31.41	-	-	Peak
422.5	37.75	-8.25	46	50.29	16.48	2.22	31.24	-	-	Peak
492.5	37.37	-8.63	46	47.92	17.94	2.42	30.91	-	-	Peak
2462	88.13	-	-	83.61	32.37	6.14	33.99	100	285	Average
2462	98.29	-	-	93.77	32.37	6.14	33.99	100	285	Peak
4926	44.69	-29.31	74	61.19	33.93	9.15	59.58	100	0	Peak

Test Mode :	802.11n HT20	Temperature :	22~24°C
Test Channel :	01	Relative Humidity :	51~54%
Test Engineer :	Marlboro Hsu	Polarization :	Horizontal
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. 2460 MHz is not within a restricted band, and its limit line is 20dB below the highest emission level. 3. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2412	94.39	-	-	89.98	32.31	6.07	33.97	106	44	Average
2412	105.8	-	-	101.39	32.31	6.07	33.97	106	44	Peak
2460	58.81	-26.99	85.8	54.29	32.37	6.14	33.99	100	0	Peak
4821	45.86	-28.14	74	60.24	33.97	9.12	57.47	100	0	Peak

Test Mode :	802.11n HT20	Temperature :	22~24°C
Test Channel :	01	Relative Humidity :	51~54%
Test Engineer :	Marlboro Hsu	Polarization :	Vertical
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. 2462 MHz is not within a restricted band, and its limit line is 20dB below the highest emission level. 3. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2412	89.97	-	-	85.56	32.31	6.07	33.97	200	252	Average
2412	101.78	-	-	97.37	32.31	6.07	33.97	200	252	Peak
2462	54.72	-27.06	81.78	50.2	32.37	6.14	33.99	100	0	Peak
4824	42.66	-31.34	74	59.56	33.97	9.12	59.99	100	0	Peak

Test Mode :	802.11n HT20	Temperature :	22~24°C
Test Channel :	06	Relative Humidity :	51~54%
Test Engineer :	Marlboro Hsu	Polarization :	Horizontal
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. 9747 MHz is not within a restricted band, and its limit line is 20dB below the highest emission level. 3. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	94.84	-	-	90.36	32.35	6.11	33.98	109	26	Average
2437	106.41	-	-	101.93	32.35	6.11	33.98	109	26	Peak
4875	48.09	-25.91	74	62.49	33.95	9.13	57.48	100	0	Peak
9747	45.84	-40.57	86.41	55.48	36.66	11.94	58.24	100	0	Peak

Test Mode :	802.11n HT20	Temperature :	22~24°C
Test Channel :	06	Relative Humidity :	51~54%
Test Engineer :	Marlboro Hsu	Polarization :	Vertical
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	91.01	-	-	86.53	32.35	6.11	33.98	200	256	Average
2437	101.89	-	-	97.41	32.35	6.11	33.98	200	256	Peak
4878	41.51	-32.49	74	58.2	33.95	9.14	59.78	100	0	Peak

Test Mode :	802.11n HT20	Temperature :	22~24°C
Test Channel :	11	Relative Humidity :	51~54%
Test Engineer :	Marlboro Hsu	Polarization :	Horizontal
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
211.17	33.35	-10.15	43.5	53.47	9.91	1.37	31.4	-	-	Peak
275.43	40.64	-5.36	46	57.39	12.96	1.64	31.35	-	-	Peak
281.64	42.93	-3.07	46	59.66	13.04	1.64	31.41	-	-	Peak
335.7	39.25	-6.75	46	54.46	14.27	1.87	31.35	-	-	Peak
355.3	45.01	-0.99	46	59.61	14.79	2.02	31.41	101	337	Peak
355.3	44.61	-1.39	46	59.21	14.79	2.02	31.41	101	337	QP
422.5	40.98	-5.02	46	53.52	16.48	2.22	31.24	-	-	Peak
2462	92.61	-	-	88.09	32.37	6.14	33.99	109	278	Average
2462	102.66	-	-	98.14	32.37	6.14	33.99	109	278	Peak
4924	49.39	-24.61	74	63.79	33.93	9.15	57.48	100	0	Peak

Test Mode :	802.11n HT20	Temperature :	22~24°C
Test Channel :	11	Relative Humidity :	51~54%
Test Engineer :	Marlboro Hsu	Polarization :	Vertical
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
41.34	34.88	-5.12	40	53.73	12.3	0.63	31.78	105	187	Peak
72.93	30.3	-9.7	40	54.54	6.68	0.85	31.77	-	-	Peak
211.17	31.13	-12.37	43.5	51.25	9.91	1.37	31.4	-	-	Peak
355.3	38.08	-7.92	46	52.68	14.79	2.02	31.41	-	-	Peak
422.5	36.15	-9.85	46	48.69	16.48	2.22	31.24	-	-	Peak
498.8	35.53	-10.47	46	45.92	18.06	2.44	30.89	-	-	Peak
2462	84.76	-	-	80.24	32.37	6.14	33.99	100	298	Average
2462	96.03	-	-	91.51	32.37	6.14	33.99	100	298	Peak
4923	44.16	-29.84	74	60.67	33.93	9.14	59.58	100	0	Peak

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 KHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

See list of measuring instruments of this test report.

3.6.3 Test Procedures


1. The testing follows the guidelines in ANSI C63.4-2003 and ANSI C63.10-2009.
2. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connecting to the other LISN.
5. The LISN provides 50 ohm coupling impedance for the measuring instrument.
6. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
7. Both sides of AC line were checked for maximum conducted interference.
8. The frequency range from 150 KHz to 30 MHz was searched.
9. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.6.4 Test Setup

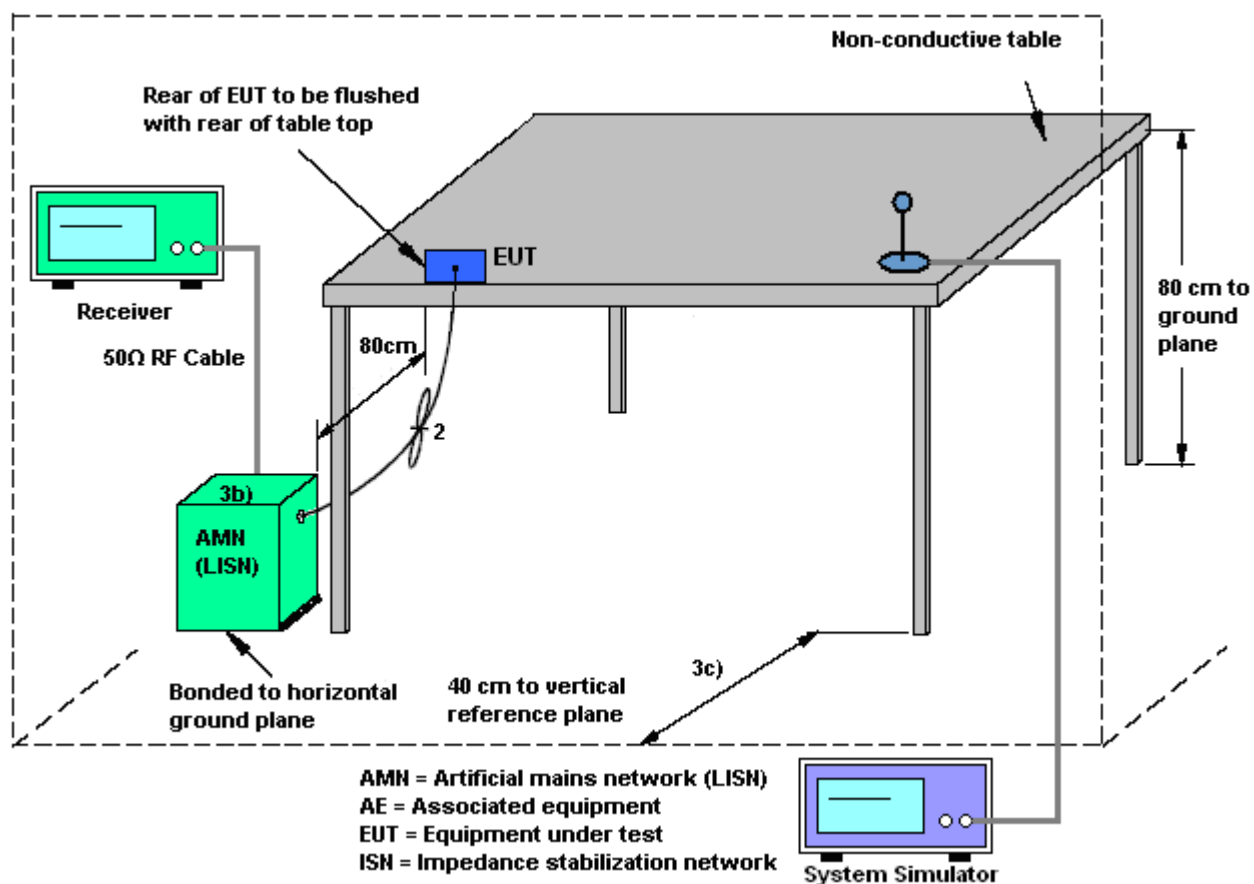

3.6.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	20~22°C
Test Engineer :	Slash Huang	Relative Humidity :	50~52%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM1900 Idle + Bluetooth Link + WLAN Link + RFID On + Earphone + Battery + USB Cable (Charging from Adapter)		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

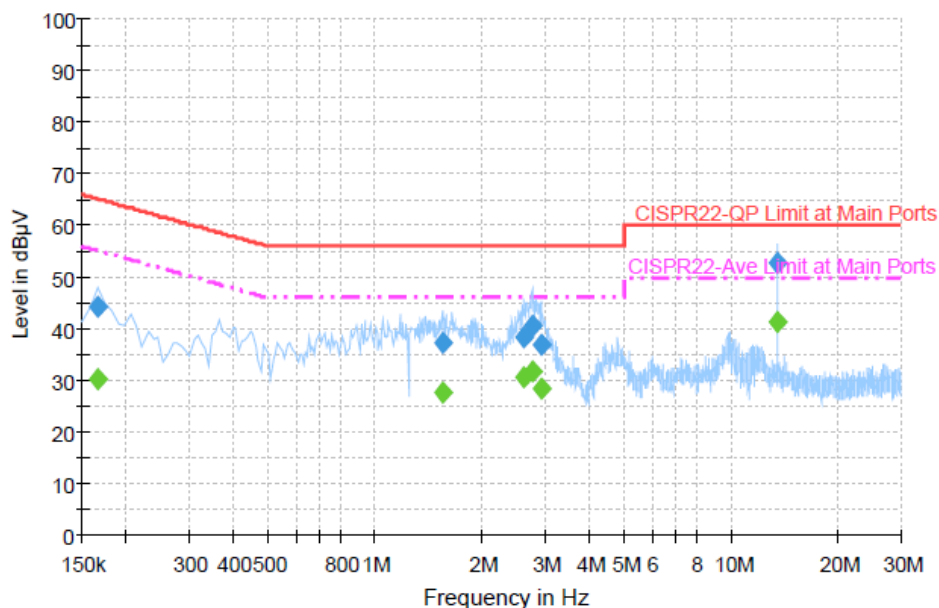


Final Result : Quasi-Peak

Frequency (MHz)	Quasi-Peak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.166000	44.1	Off	L1	19.3	21.1	65.2
1.542000	37.3	Off	L1	19.4	18.7	56.0
2.622000	38.5	Off	L1	19.6	17.5	56.0
2.758000	40.8	Off	L1	19.6	15.2	56.0
2.934000	37.1	Off	L1	19.7	18.9	56.0
13.558000	52.8	Off	L1	19.9	7.2	60.0

Final Result : Average

Frequency (MHz)	Average (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.166000	30.4	Off	L1	19.3	24.8	55.2
1.542000	27.6	Off	L1	19.4	18.4	46.0
2.622000	30.6	Off	L1	19.6	15.4	46.0
2.758000	31.6	Off	L1	19.6	14.4	46.0
2.934000	28.5	Off	L1	19.7	17.5	46.0
13.558000	41.2	Off	L1	19.9	8.8	50.0

Test Mode :	Mode 1	Temperature :	20~22°C
Test Engineer :	Slash Huang	Relative Humidity :	50~52%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM1900 Idle + Bluetooth Link + WLAN Link + RFID On + Earphone + Battery + USB Cable (Charging from Adapter)		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

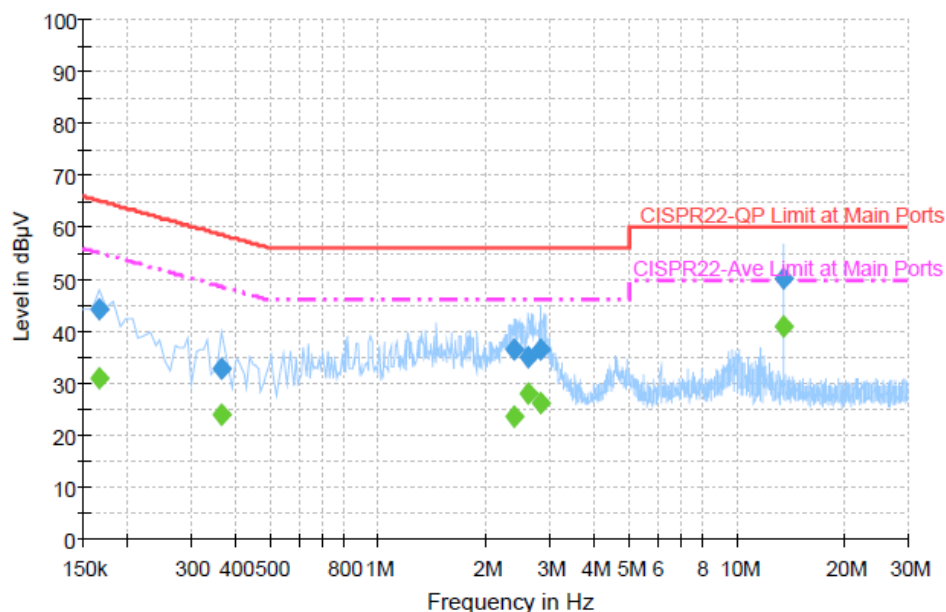
Final Result : Quasi-Peak

Frequency (MHz)	Quasi-Peak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.166000	44.2	Off	N	19.3	21.0	65.2
0.366000	32.9	Off	N	19.3	25.7	58.6
2.398000	36.7	Off	N	19.6	19.3	56.0
2.606000	35.1	Off	N	19.6	20.9	56.0
2.838000	36.4	Off	N	19.7	19.6	56.0
13.558000	50.2	Off	N	19.9	9.8	60.0

Final Result : Average

Frequency (MHz)	Average (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.166000	30.9	Off	N	19.3	24.3	55.2
0.366000	24.1	Off	N	19.3	24.5	48.6
2.398000	23.5	Off	N	19.6	22.5	46.0
2.606000	28.1	Off	N	19.6	17.9	46.0
2.838000	26.1	Off	N	19.7	19.9	46.0
13.558000	41.1	Off	N	19.9	8.9	50.0

3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.7.2 Antenna Connected Construction

Non-standard connector used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP40	100055	9kHz~40GHz	Jun. 06, 2012	Nov. 12, 2012 ~ Dec. 03, 2012	Jun. 05, 2013	Conducted (TH02-HY)
Power Meter	Anritsu	ML2495A	1036004	300MHz~40GHz	Sep. 08, 2012	Nov. 12, 2012 ~ Dec. 03, 2012	Sep. 07, 2013	Conducted (TH02-HY)
Power Sensor	Anritsu	MA2411B	1027253	300MHz~40GHz	Sep. 08, 2012	Nov. 12, 2012 ~ Dec. 03, 2012	Sep. 07, 2013	Conducted (TH02-HY)
Bilog Antenna	Schaffner	CBL6111C	2726	30MHz ~ 1GHz	Oct. 06, 2012	Nov. 17, 2012 ~ Nov. 18, 2012	Oct. 05, 2013	Radiation (03CH07-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP30	101067	9KHz ~ 30GHz	Dec. 06, 2011	Nov. 17, 2012 ~ Nov. 18, 2012	Dec. 05, 2012	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	00075962	1GHz ~ 18GHz	Aug. 22, 2012	Nov. 17, 2012 ~ Nov. 18, 2012	Aug. 21, 2013	Radiation (03CH07-HY)
Pre Amplifier	Agilent	8449B	3008A02362	1GHz ~ 26.5GHz	Dec. 05, 2011	Nov. 17, 2012 ~ Nov. 18, 2012	Dec. 04, 2012	Radiation (03CH07-HY)
Pre Amplifier	MITEQ	AMF-7D-00 101800-30-10P	159088	1GHz ~ 18GHz	Mar. 10, 2012	Nov. 17, 2012 ~ Nov. 18, 2012	Mar. 09, 2013	Radiation (03CH07-HY)
Pre Amplifier	COM-POWER	PA-103A	161241	10-1000MHz.32dB GAIN	Feb. 27, 2012	Nov. 17, 2012 ~ Nov. 18, 2012	Feb. 26, 2013	Radiation (03CH07-HY)
EMI Test Receiver	Rohde & Schwarz	ESCI 7	100724	9kHz~7GHz	Sep. 03, 2012	Nov. 17, 2012 ~ Nov. 18, 2012	Sep. 02, 2013	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170251	15GHz ~ 40GHz	Sep. 28, 2012	Nov. 17, 2012 ~ Nov. 18, 2012	Sep. 27, 2013	Radiation (03CH07-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9KHz ~ 30MHz	Jul. 03, 2012	Nov. 17, 2012 ~ Nov. 18, 2012	Jul. 02, 2014	Radiation (03CH07-HY)
EMI Test Receiver	R&S	ESCI 7	100724	9kHz~7GHz	Sep. 03, 2012	Dec. 03, 2012	Sep. 02, 2013	Conduction (CO05-HY)
Two-LISN	R&S	ENV216	11-100081	9KHz ~ 30MHz	Dec. 09, 2011	Dec. 03, 2012	Dec. 08, 2012	Conduction (CO05-HY)
Two-LISN	R&S	ENV216	11-100080	9KHz ~ 30MHz	Dec. 06, 2011	Dec. 03, 2012	Dec. 05, 2012	Conduction (CO05-HY)
AC Power Source	APC	APC-1000W	N/A	N/A	N/A	Dec. 03, 2012	N/A	Conduction (CO05-HY)
System Simulator	R&S	CMU200	117591	N/A	Oct. 21, 2011	Dec. 03, 2012	Oct. 20, 2013	Conduction (CO05-HY)

5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.26
---	------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.54
---	------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.72
---	------



Appendix A. Photographs of EUT

Please refer to Sporton report number EP2O3103 as below.