


R-7684 VT30A CONDUCTED EMISSIONS 12/22/98 LEAD-HOT
 REF 85.0 dBµV ATTEN 10 dB

10 dB/
 OFFSET 10.0 dB
 DL 48.0 dBµV

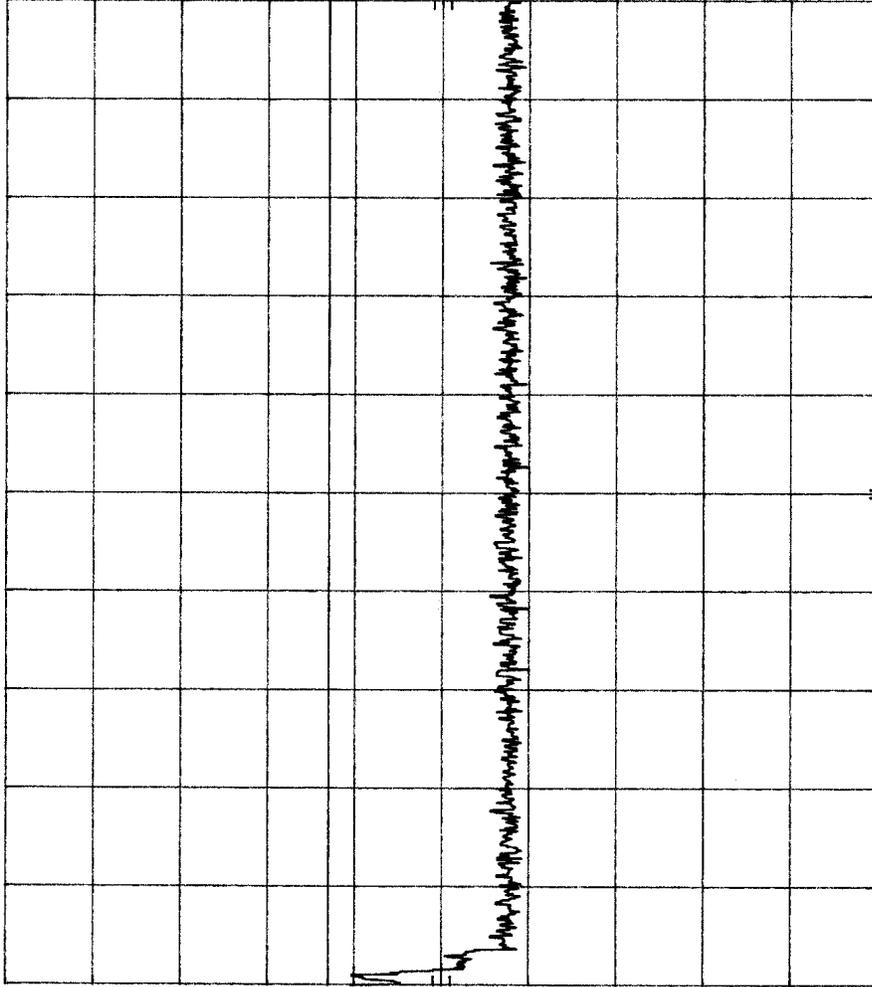

START 450 KHz RES BW 10 KHz VBW 30 KHz SWP 20.0 sec STOP 30.0 MHz

Customer: X-10 (USA) Inc.
 Test Sample: 310 Mhz Superregenerative Receiver
 Model No: VT30A
 Test Method: FCC 15.107(a) Conducted Emissions
 Note: Lead Tested: Hot
 Detector: Peak
 Date: December 22, 1998 Tech: Dennis Cortes Sheet 1 of 2



Retlif Testing Laboratories

Report No. R-7684-1


R-7684 VT30A CONDUCTED EMISSIONS 12/22/98 LEAD-NEUTRAL
 REF 85.0 dB μ V ATTEN 10 dB

hp

10 dB/

OFFSET
 10.0
 dB

DL
 48.0
 dB μ V

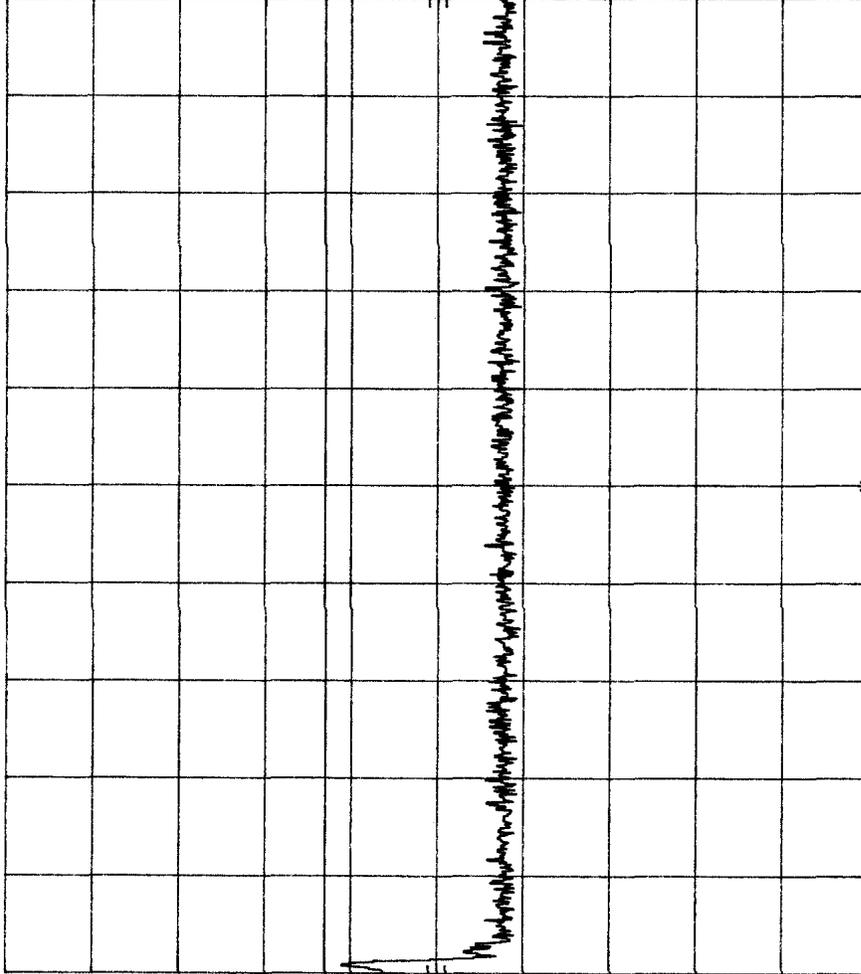

START 450 kHz RES BW 10 kHz VBW 30 kHz SWP 20.0 sec
 STOP 30.0 MHz

Customer:	X-10 (USA) Inc.
Test Sample:	310 Mhz Superregenerative Receiver
Model No:	VT30A
Test Method:	FCC 15.107(a) Conducted Emissions
Notes:	Lead Tested: Neutral Detector: Peak
Date:	December 22, 1998
Tech:	Dennis Cortes
Sheet:	2 of 2



Retlif Testing Laboratories

Report No. R-7684-1