

RadioShack Corporation

Application
For
Certification
(FCC ID: AAO3201258AT)

Wireless Microphone

HK08101043-1
TC/sa
January 29, 2009

- The test report only allows to be revised within the retention period unless further standard or the requirement was noticed.
- This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

Intertek Testing Services Hong Kong Ltd.

2/F., Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong.
Tel: (852) 2173 8888 Fax: (852) 2785 5487 Website: www.hk.intertek-etlsemko.com

INTERTEK TESTING SERVICES

LIST OF EXHIBITS

INTRODUCTION

<i>EXHIBIT 1:</i>	General Description
<i>EXHIBIT 2:</i>	System Test Configuration
<i>EXHIBIT 3:</i>	RF Power Output
<i>EXHIBIT 4:</i>	Modulation Characteristics
<i>EXHIBIT 5:</i>	Occupied Bandwidth
<i>EXHIBIT 6:</i>	Spurious Emission
<i>EXHIBIT 7:</i>	Frequency Stability
<i>EXHIBIT 8:</i>	Technical Specifications
<i>EXHIBIT 9:</i>	Equipment Photographs
<i>EXHIBIT 10:</i>	Product Labelling
<i>EXHIBIT 11:</i>	Instruction Manual
<i>EXHIBIT 12:</i>	Tune Up Procedure
<i>EXHIBIT 13:</i>	Input Current
<i>EXHIBIT 14:</i>	Confidential Request

INTERTEK TESTING SERVICES

MEASUREMENT/TECHNICAL REPORT

Application : RadioShack Corporation
Trade Name/Model No. : 32-1258
Date : January 29, 2009

This report concerns (check one:) Original Grant Class II Change

Equipment Type: Wireless Microphone

Deferred grant requested per 47 CFR 0.457(d)(1)(ii)? Yes No

If yes, defer until: _____
date

Company Name agrees to notify the Commission by: _____
date

of the intended date of announcement of the product so that the grant can be issued on that date.

If no, assumed Part 90, Subpart K for Special Frequencies or Frequency Bands – the new 47 CFR [10-01-07 Edition] provision.

Report prepared by:

Chow Chi Ming, Billy
Intertek Testing Services Hong Kong Ltd.
2/F., Garment Centre,
576 Castle Peak Road,
Kowloon, Hong Kong.
Phone: 852-2173-8505
Fax: 852-2371-0914

INTERTEK TESTING SERVICES

TABLE OF CONTENTS

1.0	<u>General Description</u>	2
1.1	Product Description.....	2
1.2	Related Submittal(s) Grants.....	3
1.3	Test Methodology.....	3
1.4	Test Facility.....	3
2.0	<u>System Test Configuration</u>	5
2.1	Justification.....	5
2.2	EUT Exercising Software.....	6
2.3	Special Accessories.....	6
2.4	Measurement Uncertainty.....	6
2.5	Equipment Modification.....	6
3.0	<u>RF Power Output</u>	8
4.0	<u>Modulation Characteristics</u>	12
4.1	Modulation Frequency Response.....	13
4.2	Modulation Limiting Characteristics.....	16
5.0	<u>Occupied Bandwidth</u>	19
6.0	<u>Spurious Emission</u>	22
6.1	Field Strength of Spurious Radiation.....	23
7.0	<u>Frequency Stability</u>	27
7.1	Frequency Stability – Voltage.....	28
7.2	Frequency Stability – Temperature.....	30
8.0	<u>Technical Specifications</u>	33
9.0	<u>Equipment Photographs</u>	35
10.0	<u>Product Labelling</u>	37
11.0	<u>Instruction Manual</u>	39
12.0	<u>Tune Up Procedure</u>	41
13.0	<u>Input Current</u>	43
14.0	<u>Confidentiality Request</u>	45

INTERTEK TESTING SERVICES

LIST OF ATTACHED FILE

Exhibit Type	File Description	Filename
Operation Description	Technical Description	descri.pdf
Test Report	Bandwidth Plot	bw.pdf
Test Report	Modulation Frequency Response	mfr.pdf
Test Report	Modulation Limiting Characteristic	mlc.pdf
Block Diagram	Block Diagram	block.pdf
Schematics	Circuit Diagram	circuit.pdf
ID Label/Location	Label Artwork and Location	label.pdf
User Manual	User Manual	manual.pdf
Test Report	Test Report	report.pdf
Test Setup Photo	Radiated Emission	radiated photos.pdf
Internal Photo	Internal Photo	internal photos.pdf
External Photo	External Photo	external photos.pdf
Test Report	Tune Up Procedure	tuneup.pdf
Cover Letter	Letter of Agency	letter.pdf
Cover Letter	Confidentiality Request	request.pdf

INTERTEK TESTING SERVICES

EXHIBIT 1

GENERAL DESCRIPTION

INTERTEK TESTING SERVICES

1.0 General Description

1.1 Product Description

The Equipment Under Test (EUT) is an audio wireless FM microphone for its associated receiver. The main function of the EUT is used to modulate the audio signal that can be transmitting to its associated receiver. And it can transmit signal in three difference channels, 169.505MHz, 170.245MHz and 171.905MHz. But it can transmit only one channel for each microphone and need to change the crystal for the other two frequencies; the change of crystal can only be done by manufacturer.

This EUT is powered by two new 1.5V "AA" size batteries. A TALK-MUTE-OFF switch on top of the body, the red LED will be on when push to TALK position. It can momentarily turn off the audio signal, set the switch to MUTE position.

Antenna Type: Internal, Integral

For electronic filing, the brief circuit description is saved with filename: descri.pdf

INTERTEK TESTING SERVICES

1.2 Related Submittal(s) Grants

This is a single application for certification of a Wireless Microphone.

The certification procedure of receiver for this transmitter (with FCC ID: AAO3201258AR) is being processed at the same time of this application.

1.3 Test Methodology

Radiated emission measurements were performed according to the procedures in ANSI C63.4 (2003) and ANSI/TIA/EIA-603-A-2004. Radiated Emission measurement was performed in Open Area Test Sites. Preliminary scans were performed in the Open Area Test Sites only to determine worst case modes. For each scan, the procedure for maximizing emissions in Appendices D and E were followed. All Radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the “**Justification Section**” of this Application.

1.4 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located at Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong. This test facility and site measurement data have been placed on file with the FCC.

INTERTEK TESTING SERVICES

EXHIBIT 2
SYSTEM TEST CONFIGURATION

INTERTEK TESTING SERVICES

2.0 **System Test Configuration**

2.1 Justification

The device was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in ANSI C63.4 (2003). The device was placed on a turntable, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes.

For simplicity of testing, the device was operated transmitting continuously.

For maximizing emissions, the device was rotated through 360°, the antenna height was varied from 1 meter to 4 meters above the ground plane, and the antenna polarization was changed. The step by step procedure for maximizing emissions led to the data reported in Exhibit 3.0.

INTERTEK TESTING SERVICES

2.2 EUT Exercising Software

There was no special software to exercise the device. Once the unit is powered on, it transmits the typical signal continuously.

2.3 Special Accessories

There are no special accessories necessary for compliance of this product.

2.4 Measurement Uncertainty

When determining the test conclusion, the Measurement Uncertainty of test has been considered.

2.5 Equipment Modification

Any modifications installed previous to testing by RadioShack Corporation will be incorporated in each production model sold/leased in the United States.

No modifications were installed by Intertek Testing Services Hong Kong Ltd.

Confirmed by:

*Chow Chi Ming, Billy
Manager
Intertek Testing Services Hong Kong Ltd.
Agent for RadioShack Corporation*



Signature

January 29, 2009

Date

EXHIBIT 3
RF POWER OUTPUT

INTERTEK TESTING SERVICES

3.0 **RF Power Output**

Testing Procedures

1. The EUT shall be placed at 1.5m heights on a turntable vertically.
2. The test antenna shall be oriented initially for vertical polarization location 3m from the EUT to correspond to the frequency of the transmitter.
3. The output of the test antenna shall be connected to measuring receiver and the quasi-peak detector is used for the measurement.
4. The transmitter shall be switch on, if possible, without modulation and the measuring receiver shall be turned to the frequency of the transmitter under test.
5. The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.
6. The transmitter shall then the rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
7. The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
8. The maximum signal level detected by the measuring receiver shall be noted.
9. The transmitter shall be replaced by a tuned dipole (substitution antenna).
10. The substitution antenna shall be orientated for vertical polarization and the length of the substitution antenna shall be adjusted to correspond to the frequency of the transmitter.

INTERTEK TESTING SERVICES

3.0 **RF Power Output (Cont'd)**

Testing Procedures

11. The substitution antenna shall be connected to a calibrated signal generator.
12. If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
13. The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
14. The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level note input attenuator setting of the measuring receiver.
15. The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.
16. The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.
17. The measure of the effective radiated power is the larger of the two levels recorded, at the input to the substitution antenna, corrected for gain of the substitution antenna if necessary.
18. Repeat above test procedures with the EUT placed horizontally.

INTERTEK TESTING SERVICES

Table 1

**RadioShack Corporation
32-1258**

**Transmission Power
Pursuant to FCC Section 90.265(b)(2)**

Assigned Frequency (MHz)	Measured Frequency (MHz)	Measured Power (mW)	Limit (mW)	Margin (mW)
169.505	169.505	0.290	50	-49.71
171.905	171.905	0.205	50	-49.80

Note: Negative sign in the column shows value below limit.

Test Engineer: Terry C. H. Chan

Date of Test: November 10, 2008

INTERTEK TESTING SERVICES

EXHIBIT 4
MODULATION CHARACTERISTICS

INTERTEK TESTING SERVICES

4.0 **Modulation Characteristics**

In order to satisfy the FCC Section 2.1047(a) and 2.1047(b) requirement, Modulation Frequency Response and Modulation Limiting Characteristics are attached in Exhibit 4.1 & 4.2.


Plots for each tests are saved with filename: mfr.pdf and mlc.pdf

INTERTEK TESTING SERVICES

4.1 Modulation Frequency Response

Testing Procedures

1. Set-up the test equipment in the following configuration:

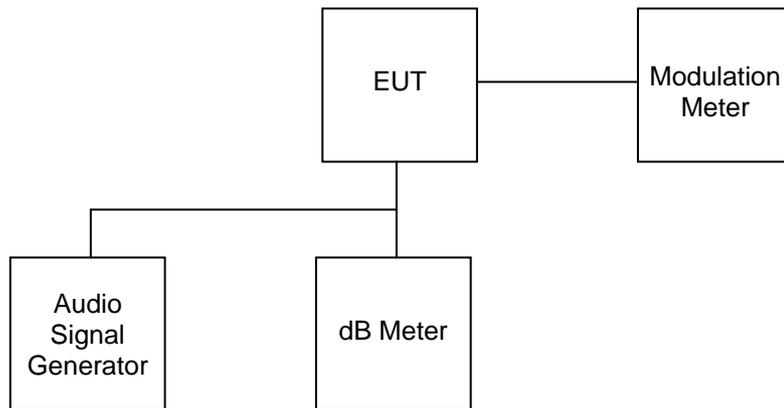

2. Set the audio signal generator frequency to the sound pressure level 97.0dB SPL at the microphone of the EUT.
3. The frequency of the audio signal generator is changed from 100Hz to 5kHz.
4. Record the frequency deviation.

INTERTEK TESTING SERVICES

Table 2

**RadioShack Corporation
32-1258**

**Modulation Frequency Response
Pursuant to FCC Section 2.1047(a)**

Assigned Frequency: 169.505

Modulation Frequency (Hz)	Frequency Deviation (kHz)	Modulation Index
100	0.80	7.99
200	1.14	5.70
300	2.41	8.03
400	3.46	8.64
500	5.09	10.18
600	5.81	9.69
700	5.68	8.11
800	5.55	6.94
900	4.85	5.38
1000	4.61	4.61
1500	3.85	2.57
2000	3.45	1.72
2500	3.30	1.32
3000	3.30	1.10
3500	3.19	0.91
4000	2.90	0.72
4500	1.59	0.35
5000	1.17	0.23

Test Engineer: Terry C. H. Chan

Date of Test: November 10, 2008

INTERTEK TESTING SERVICES

Table 3

**RadioShack Corporation
32-1258**

**Modulation Frequency Response
Pursuant to FCC Section 2.1047(a)**

Assigned Frequency: 171.905

Modulation Frequency (Hz)	Frequency Deviation (kHz)	Modulation Index
100	2.76	27.55
200	4.99	24.95
300	6.23	20.76
400	8.02	20.06
500	9.50	19.00
600	9.94	16.57
700	9.70	13.86
800	9.06	11.33
900	8.10	9.00
1000	7.90	7.90
1500	5.83	3.89
2000	4.95	2.48
2500	4.91	1.96
3000	4.71	1.57
3500	4.95	1.41
4000	5.15	1.29
4500	4.99	1.11
5000	5.55	1.11

Test Engineer: Terry C. H. Chan


Date of Test: November 10, 2008

INTERTEK TESTING SERVICES

4.2 Modulation Limiting Characteristics

Testing Procedures

1. Set-up the test equipment in the following configuration:

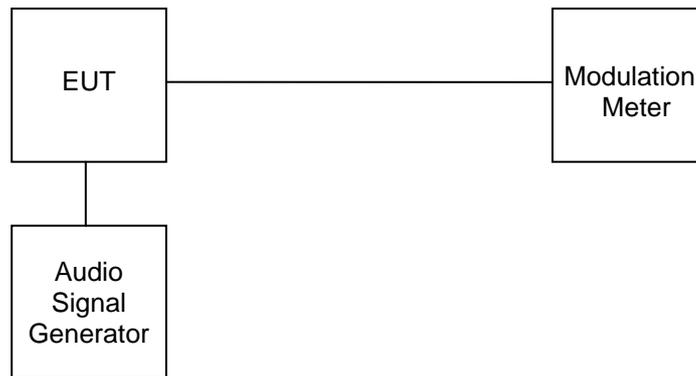

2. Set the frequency of the audio signal generator to 500Hz and adjust the level from 67dB SPL to 127dB SPL. Record the output modulation index.
3. Record the maximum value of plus or minus peak frequency deviation.
4. Repeat the above procedure with frequency 500Hz, 1000Hz, 2500Hz and 5000Hz.

INTERTEK TESTING SERVICES

Table 4

**RadioShack Corporation
32-1258**

**Modulation Limiting Characteristics
Pursuant to FCC Section 2.1047(b)**

Assigned Frequency: 169.505

Modulation Input (dBSPL)	Peak Frequency Deviation (kHz)			
	at 500Hz	at 1000Hz	at 2500Hz	at 5000Hz
67	0.96	1.04	0.84	0.96
77	1.56	1.80	1.16	1.40
87	4.79	4.89	3.39	3.95
97	6.30	7.75	5.53	7.08
107	8.13	8.18	8.43	9.83
117	8.79	8.18	8.76	10.00
127	9.47	9.13	11.81	12.37
135	9.37	8.61	11.00	11.50

Note: No response if input level > 135dBSPL.

Assigned Frequency: 171.905

Modulation Input (dBSPL)	Peak Frequency Deviation (kHz)			
	at 500Hz	at 1000Hz	at 2500Hz	at 5000Hz
67	2.53	2.60	2.41	2.70
77	3.34	3.20	2.73	2.99
87	5.25	4.26	3.10	3.59
97	9.50	7.90	4.91	5.55
107	10.14	10.07	7.24	8.44
117	10.41	10.28	10.77	12.88
127	10.54	10.41	11.21	13.35
130	10.30	10.20	10.24	12.42

Note: No response if input level > 130dBSPL.

Test Engineer: Terry C. H. Chan

Date of Test: November 10, 2008

INTERTEK TESTING SERVICES


EXHIBIT 5
OCCUPIED BANDWIDTH

INTERTEK TESTING SERVICES

5.0 Occupied Bandwidth

Testing Procedures

1. Set-up the test equipment in the following configuration:

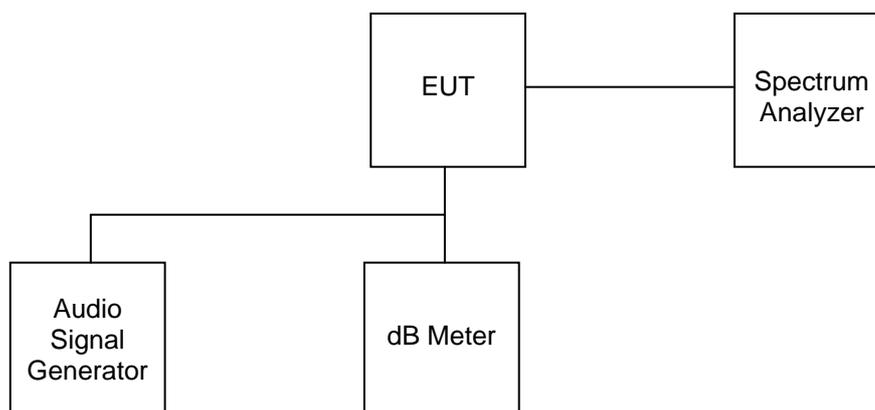

2. Other than single side band or independent sideband transmitters when modulated by a 2500Hz one at an input level 16dB greater than that necessary to produce 50 percent modulation. The input level shall be established at the frequency of maximum response of the audio modulation circuit.
3. The occupied bandwidth is measured with the spectrum analyzer set at 5kHz/div scan and 10dB/div.
4. The emission bandwidth shall not exceed the limit 54kHz.
5. The measured occupied bandwidth is 26.7kHz, 26.2kHz for carrier frequency of 169.505MHz and 171.905MHz respectively.

For electronic filing, the bandwidth plot is saved with filename: bw.pdf

INTERTEK TESTING SERVICES

Table 5

**RadioShack Corporation
32-1258**

**Occupied Bandwidth
Pursuant to FCC Section 2.1049(c)(1) & 90.210(b)**

Assigned Frequency: 169.505

Mask Region	Attenuation from Unmodulated Carrier Emissions		
	Measured Result (dB)	Calculated Limit (dB)	Results
Carrier + 13.5kHz	-12.25	0	Pass
Carrier - 13.5kHz	-40.29	0	Pass
Carrier + 27.0kHz	-67.91	-25	Pass
Carrier - 27.0kHz	-71.40	-25	Pass
Carrier + 54.0kHz	-74.71	-35	Pass
Carrier - 54.0kHz	-75.43	-35	Pass

Assigned Frequency: 171.905

Mask Region	Attenuation from Unmodulated Carrier Emissions		
	Measured Result (dB)	Calculated Limit (dB)	Results
Carrier + 13.5kHz	-13.51	0	Pass
Carrier - 13.5kHz	-48.04	0	Pass
Carrier + 27.0kHz	-72.14	-25	Pass
Carrier - 27.0kHz	-70.30	-25	Pass
Carrier + 54.0kHz	-75.42	-35	Pass
Carrier - 54.0kHz	-76.50	-35	Pass

Test Engineer: Terry C. H. Chan

Date of Test: November 10, 2008

INTERTEK TESTING SERVICES

EXHIBIT 6
SPURIOUS EMISSION

6.0 **Spurious Emission**

In order to satisfy the requirement, the spurious emission from the EUT are measured and shown in the Exhibit 6.1.

INTERTEK TESTING SERVICES

6.1 Field Strength of Spurious Radiation

Testing Procedures

Radiated emission measurements were performed according to the procedures in ANSI C63.4 (2003). All measurements were performed in Open Area Test Sites located at Roof Top of Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong.

For electronic filing, the radiated emission configurations photograph is saved with filename: radiated photos.pdf

INTERTEK TESTING SERVICES

Table 6

**RadioShack Corporation
32-1258**

**Field Strength of Spurious Radiated
Pursuant to FCC Section 2.1053(a)**

Assigned Frequency: 169.505

Polarization	Frequency (MHz)	Net at 3m (dB μ V/m)	Limit at 3m (dB μ V/m)	Margin (dB)
V	339.010	38.7	82.2	-43.5
V	508.515	50.3	82.2	-31.9
V	678.020	49.6	82.2	-32.6
V	847.525	49.3	82.2	-32.9
V	1017.030	51.4	82.2	-30.8

- Notes: 1. Quasi-peak data for emission below 1000MHz.
2. Negative sign in margin column shows the value below the limit.
3. Any emissions and any other harmonics which are attenuated more than 20dB below the permissible value need not be recorded.
4. Horn antenna and average detector is used for emission over 1000MHz.
- * Calculated limit = $10 \log_{10} (TP(W)) - 43 - 10 \log_{10} (TP)$
= -43dBW
= 82.2dB μ V/m at 3m

Test Engineer: Terry C. H. Chan

Date of Test: November 10, 2008

INTERTEK TESTING SERVICES

Table 7

**RadioShack Corporation
32-1258**

**Field Strength of Spurious Radiated
Pursuant to FCC Section 2.1053(a)**

Assigned Frequency: 171.905

Polarization	Frequency (MHz)	Net at 3m (dB μ V/m)	Limit at 3m (dB μ V/m)	Margin (dB)
V	343.810	43.0	82.2	-39.2
V	515.715	42.6	82.2	-39.6
V	687.620	44.6	82.2	-37.6
V	859.525	42.4	82.2	-39.8
V	1031.430	47.6	82.2	-34.6
V	1203.335	46.2	82.2	-36.0

Notes: 1. Quasi-peak data for emission below 1000MHz.

2. Negative sign in margin column shows the value below the limit.

3. Any emissions and any other harmonics which are attenuated more than 20dB below the permissible value need not be recorded.

4. Horn antenna and average detector is used for emission over 1000MHz.

* Calculated limit = $10 \log_{10} (TP(W)) - 43 - 10 \log_{10} (TP)$
= -43dBW
= 82.2dB μ V/m at 3m

Test Engineer: Terry C. H. Chan

Date of Test: November 10, 2008

EXHIBIT 7
FREQUENCY STABILITY

7.0 **Frequency Stability**


The frequency tolerance was tested in normal condition and over extreme ambient conditions with respect to voltage and temperature variation.

INTERTEK TESTING SERVICES

7.1 Frequency Stability – Voltage

Testing Procedures

1. Set-up the test equipment in the following configuration:

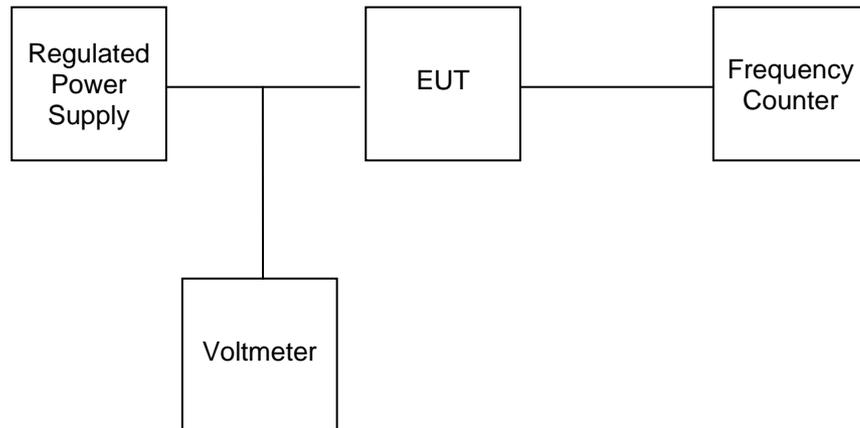

2. For battery powered equipment, reduce primary supply voltage to the battery operating end point voltage which is specified by the manufacturer.

INTERTEK TESTING SERVICES

Table 8

**RadioShack Corporation
32-1258**

**Power Supply Voltage Stability
Pursuant to FCC Section 2.1055**

Manufacturer Specified Battery End Point Voltage (V)	Assigned Frequency (MHz)	Measured Frequency (MHz)	Deviation (kHz)
2.0	169.505	169.50415	-0.85
2.0	171.905	171.90436	-0.64

Test Engineer: Terry C. H. Chan

Date of Test: November 10, 2008


INTERTEK TESTING SERVICES

7.2 Frequency Stability – Temperature

Testing Procedures

1. Set-up the test equipment in the following configuration:

Temperature Chamber

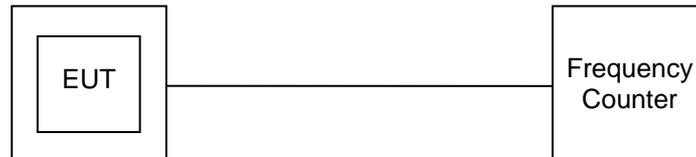

2. Set the Temperature Chamber to -30°C and stabilize the EUT temperature for one hour. Turn the transmitter ON for two minutes.
3. Turn the EUT OFF.
4. Repeat the above procedure with 10°C intervals from -30°C to 50°C .

INTERTEK TESTING SERVICES

Table 9

**RadioShack Corporation
32-1258**

**Temperature Stability
Pursuant to FCC Section 2.1055**

Assigned Frequency (MHz)	Temperature (°C)	Measured Frequency (MHz)	Deviation (kHz)
169.505	-30	169.50530	+0.30
	-20	169.50400	-1.00
	-10	169.50468	-0.32
	0	169.50496	-0.04
	10	169.50492	-0.08
	20	169.50425	-0.75
	30	169.50355	-1.45
	40	169.50294	-2.06
	50	169.50206	-2.94
171.905	-30	171.90210	-2.90
	-20	171.90400	-1.00
	-10	171.90495	-0.05
	0	171.90515	+0.15
	10	171.90560	+0.60
	20	171.90563	+0.63
	30	171.90554	+0.54
	40	171.90500	0.00
	50	171.90475	-0.25

Test Engineer: Terry C. H. Chan

Date of Test: November 10, 2008

INTERTEK TESTING SERVICES

EXHIBIT 8
TECHNICAL SPECIFICATIONS

8.0 **Technical Specifications**

For electronic filing, the block diagram and the schematic diagram of the Wireless Microphone are saved with filename: block.pdf and circuit.pdf respectively.

INTERTEK TESTING SERVICES

EXHIBIT 9
EQUIPMENT PHOTOGRAPHS

INTERTEK TESTING SERVICES

9.0 **Equipment Photographs**

For electronic filing, photographs of the tested EUT are saved with filename: internal photos.pdf and external photos.pdf

INTERTEK TESTING SERVICES

EXHIBIT 10
PRODUCT LABELLING

INTERTEK TESTING SERVICES

10.0 **Product Labelling**

For electronic filing, the label artwork and location are saved with filename:
label.pdf

EXHIBIT 11
INSTRUCTION MANUAL

INTERTEK TESTING SERVICES

11.0 **Instruction Manual**

This manual will be provided to the end-user with each unit sold/leased in the United States.

Please note that the required FCC information to the user can be found at the front of this manual.

For electronic filing, a preliminary copy of the instruction manual is saved with filename: manual.pdf

INTERTEK TESTING SERVICES

EXHIBIT 12
TUNE UP PROCEDURE

INTERTEK TESTING SERVICES

12.0 Tune Up Procedure

In order to satisfy the FCC Section 2.1033(c)(9) requirement, a preliminary copy of the tune up procedure is saved with filename: tuneup.pdf

EXHIBIT 13
INPUT CURRENT

13.0 **Input Current**

In order to satisfy the FCC Section 2.1033(c)(8) requirement, the input current to final r.f. stage at 5Vd.c. is 15mA-20mA.

INTERTEK TESTING SERVICES

EXHIBIT 14

CONFIDENTIALITY REQUEST

INTERTEK TESTING SERVICES

14.0 **Confidentiality Request**

For electronic filing, a confidentiality request is saved with filename: request.pdf.