

TEST REPORT

Report No.: HK12110659-1

RadioShack Corporation

Application
For
Certification
(Class II Permissive Change)
(FCC ID: AAO3201258AT)

Wireless Microphone

Prepared and Checked by:

Approved by:

Signed On File
Wong Cheuk Ho, Herbert
Engineer

Chow Chi Ming, Billy
Manager
Date: January 14, 2013

- The test report only allows to be revised within the retention period unless further standard or the requirement was noticed.
- This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

INTERTEK TESTING SERVICES

GENERAL INFORMATION

RadioShack Corporation
BRAND NAME: RadioShack, MODEL: 3201258

FCC ID: AAO3201258AT

Grantee:	RadioShack Corporation
Grantee Address:	300 RadioShack Circle, Mail Stop WF4-136, Fort Worth, Texas 76102-2802, USA.
Contact Person:	Pat Loehr
Tel:	817-415-6221
Fax:	817-415-9247
e-mail:	N/A
Manufacturer:	N/A
Manufacturer Address:	N/A
Brand Name:	RadioShack
Model:	3201258
Type of EUT:	Wireless Microphone
Description of EUT:	FM Wireless Microphone System
Serial Number:	N/A
FCC ID:	AAO3201258AT
Date of Sample Submitted:	November 19, 2012
Date of Test:	December 12, 2012
Report No.:	HK12110659-1
Report Date:	January 14, 2013
Environmental Conditions:	Temperature: +10 to 40°C Humidity: 10 to 90%

INTERTEK TESTING SERVICES

TABLE OF CONTENTS

1.0	<u>General Description</u>	2
1.1	Product Description	2
1.2	Related Submittal(s) Grants	3
1.3	Test Methodology	3
1.4	Test Facility	3
2.0	<u>System Test Configuration</u>	5
2.1	Justification.....	5
2.2	EUT Exercising Software.....	6
2.3	Special Accessories	6
2.4	Measurement Uncertainty.....	6
2.5	Equipment Modification	6
3.0	<u>RF Power Output</u>	9
4.0	<u>Modulation Characteristics</u>	13
4.1	Modulation Frequency Response	14
4.2	Modulation Limiting Characteristics	16
5.0	<u>Occupied Bandwidth</u>	19
6.0	<u>Spurious Emission</u>	22
6.1	Field Strength of Spurious Radiation	23
7.0	<u>Frequency Stability</u>	28
7.1	Frequency Stability – Voltage	29
7.2	Frequency Stability – Temperature.....	31
8.0	<u>Technical Specifications</u>	34
9.0	<u>Equipment Photographs</u>	35
10.0	<u>Product Labelling</u>	37
11.0	<u>Instruction Manual</u>	39
12.0	<u>Tune Up Procedure</u>	42
13.0	<u>Input Current</u>	44
14.0	<u>Confidential Request</u>	46
15.0	<u>Equipment List</u>	48

INTERTEK TESTING SERVICES

SUMMARY OF TEST RESULT

RadioShack Corporation
BRAND NAME: RadioShack, MODEL: 3201258

FCC ID: AAO3201258AT

TEST SPECIFICATION	REFERENCE	RESULTS
Transmission Power	FCC 90.265(b)(2)	Pass
Modulation Frequency Response	FCC 2.1047(a)	Pass
Modulation Limiting	FCC 2.1047(b)	Pass
Occupied Bandwidth	FCC 2.1049(c)(1) and 90.210(b)	Pass
Field Strength of Spurious Radiated	FCC 2.1053(a)	Pass
Frequency Stability (Voltage)	FCC 2.1055	Pass
Frequency Stability (Temperature)	FCC 2.1055	Pass
Input Current & Voltage	FCC 2.1033(c)(8)	--

INTERTEK TESTING SERVICES

EXHIBIT 1

GENERAL DESCRIPTION

INTERTEK TESTING SERVICES

1.0 General Description

1.1 Product Description

The Equipment Under Test (EUT) is an audio wireless FM microphone for its associated receiver. The main function of the EUT is used to modulate the audio signal that can be transmitting to its associated receiver. And it can transmit signal in three difference channels, 169.505MHz, 170.245MHz and 171.905MHz. But it can transmit only one channel for each microphone and need to change the crystal for the other two frequencies; the change of crystal can only be done by manufacturer.

This EUT is powered by two new 1.5V "AA" size batteries. A TALK-MUTE/OFF switch on top of the body, the red LED will be on when push to TALK position. It can momentarily turn off the audio signal, set the switch to MUTE position.

Antenna Type: Internal, Integral

For electronic filing, the brief circuit description is saved with filename: descri.pdf

INTERTEK TESTING SERVICES

1.2 Purpose of Change

The variable resistor (VR100) which is for adjusting the audio level is changed from bottom to the top side of PCB. PCB layout is changed for better performance.

The electrical hardware and parameter setting of RF portion remains unchanged.

1.3 Test Methodology

Radiated emission measurements were performed according to the procedures in ANSI C63.4 (2009) and ANSI/TIA-603-C-2004. Radiated Emission measurement was performed in Open Area Test Sites and Conducted Emission was performed in shield room. Preliminary scans were performed in the Open Area Test Sites only to determine worst case modes. For each scan, the procedure for maximizing emissions in Appendices D and E were followed. All Radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the “**Justification Section**” of this Application.

1.4 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located at Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong. This test facility and site measurement data have been placed on file with the FCC.

INTERTEK TESTING SERVICES

EXHIBIT 2
SYSTEM TEST CONFIGURATION

INTERTEK TESTING SERVICES

2.0 **System Test Configuration**

2.1 Justification

The device was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in ANSI C63.4 (2009). The device was placed on a turntable, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes.

For simplicity of testing, the device was operated transmitting continuously.

For maximizing emissions, the device was rotated through 360°, the antenna height was varied from 1 meter to 4 meters above the ground plane, and the antenna polarization was changed. The step by step procedure for maximizing emissions led to the data reported in Exhibit 3.0.

INTERTEK TESTING SERVICES

2.2 EUT Exercising Software

There was no special software to exercise the device. Once the unit is powered on, it transmits the typical signal continuously.

2.3 Special Accessories

There are no special accessories necessary for compliance of this product.

2.4 Measurement Uncertainty

When determining the test conclusion, the Measurement Uncertainty of test has been considered.

Equipment Modification

Any modifications installed previous to testing by RadioShack Corporation will be incorporated in each production model sold/leased in the United States.

No modifications were installed by Intertek Testing Services.

EXHIBIT 3
RF POWER OUTPUT

INTERTEK TESTING SERVICES

3.0 **RF Power Output**

Testing Procedures

1. The EUT shall be placed at 1.5m heights on a turntable vertically.
2. The test antenna shall be oriented initially for vertical polarization location 3m from the EUT to correspond to the frequency of the transmitter.
3. The output of the test antenna shall be connected to measuring receiver and the quasi-peak detector is used for the measurement.
4. The transmitter shall be switch on, if possible, without modulation and the measuring receiver shall be turned to the frequency of the transmitter under test.
5. The test antenna shall be raised an lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.
6. The transmitter shall then the rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
7. The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
8. The maximum signal level detected by the measuring receiver shall be noted.
9. The transmitter shall be replaced by a tuned dipole (substitution antenna).
10. The substitution antenna shall be orientated for vertical polarization and the length of the substitution antenna shall be adjusted to correspond to the frequency of the transmitter.

INTERTEK TESTING SERVICES

3.0 **RF Power Output (Cont'd)**

Testing Procedures

11. The substitution antenna shall be connected to a calibrated signal generator.
12. If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
13. The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
14. The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level note input attenuator setting of the measuring receiver.
15. The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.
16. The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.
17. The measure of the effective radiated power is the larger of the two levels recorded, at the input to the substitution antenna, corrected for gain of the substitution antenna if necessary.
18. Repeat above test procedures with the EUT placed horizontally.

INTERTEK TESTING SERVICES

Table 1

**RadioShack Corporation
3201258**

**Transmission Power
Pursuant to FCC Section 90.265(b)(2)**

Assigned Frequency (MHz)	Measured Frequency (MHz)	Measured Power (mW)	Limit (mW)	Margin (mW)
169.505	169.505	0.163	50	-49.837
171.905	171.905	0.130	50	-49.870

Note: Negative sign in the column shows value below limit.

EXHIBIT 4
MODULATION CHARACTERISTICS

INTERTEK TESTING SERVICES

4.0 **Modulation Characteristics**

In order to satisfy the FCC Section 2.1047(a) and 2.1047(b) requirement, Modulation Frequency Response and Modulation Limiting Characteristics are attached in Exhibit 4.1 & 4.2.


Plots for each tests are saved with filename: mfr.pdf and mlc.pdf

INTERTEK TESTING SERVICES

4.1 Modulation Frequency Response

Testing Procedures

1. Set-up the test equipment in the following configuration:

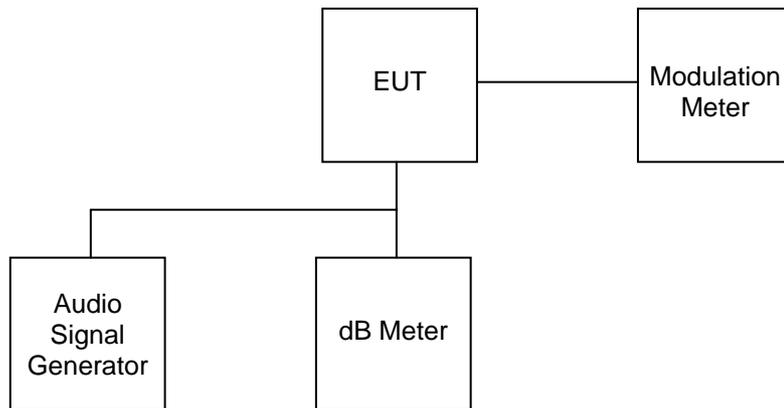

2. Set the audio signal generator frequency to the sound pressure level 97.0dB SPL at the microphone of the EUT.
3. The frequency of the audio signal generator is changed from 100Hz to 5kHz.
4. Record the frequency deviation.

INTERTEK TESTING SERVICES

Table 2

**RadioShack Corporation
3201258**

**Modulation Frequency Response
Pursuant to FCC Section 2.1047(a)**

Assigned Frequency: 169.505MHz

Modulation Frequency (Hz)	Frequency Deviation (kHz)	Modulation Index
100	7.06	70.60
200	8.90	44.50
300	7.43	24.77
400	9.07	22.68
500	9.00	18.00
600	6.24	10.40
700	5.65	80.7
800	4.55	5.69
900	4.14	4.60
1000	4.60	4.60
1500	3.26	2.17
2000	2.92	1.46
2500	2.36	0.94
3000	1.53	0.51
3500	2.11	0.60
4000	3.72	0.93
4500	3.93	0.87
5000	2.89	0.58

INTERTEK TESTING SERVICES

Table 3

**RadioShack Corporation
3201258**

**Modulation Frequency Response
Pursuant to FCC Section 2.1047(a)**

Assigned Frequency: 171.905MHz


Modulation Frequency (Hz)	Frequency Deviation (kHz)	Modulation Index
100	7.00	70.00
200	7.99	39.95
300	8.35	27.83
400	8.26	20.65
500	8.22	16.44
600	8.11	13.52
700	8.05	11.50
800	8.10	10.13
900	7.62	8.47
1000	5.64	5.64
1500	2.88	1.92
2000	5.54	2.77
2500	3.34	1.34
3000	2.42	0.81
3500	2.90	0.83
4000	4.35	1.09
4500	3.33	0.74
5000	2.88	0.58

INTERTEK TESTING SERVICES

4.2 Modulation Limiting Characteristics

Testing Procedures

1. Set-up the test equipment in the following configuration:

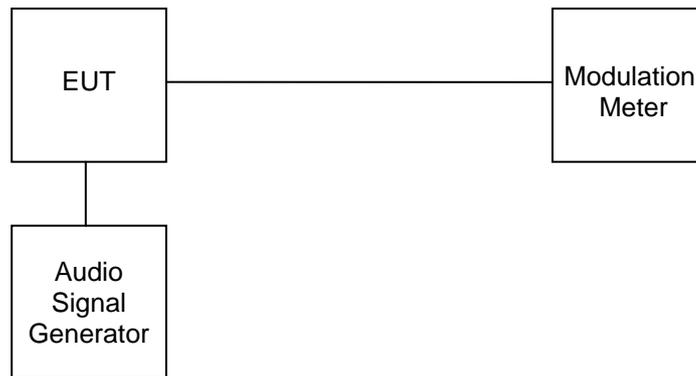

2. Set the frequency of the audio signal generator to 500Hz and adjust the level from 67dB SPL to 127dB SPL. Record the output modulation index.
3. Record the maximum value of plus or minus peak frequency deviation.
4. Repeat the above procedure with frequency 500Hz, 1000Hz, 2500Hz and 5000Hz.

INTERTEK TESTING SERVICES

Table 4

**RadioShack Corporation
3201258**

**Modulation Limiting Characteristics
Pursuant to FCC Section 2.1047(b)**

Assigned Frequency: 169.505MHz

Modulation Input (dB SPL)	Peak Frequency Deviation (kHz)			
	at 500Hz	at 1000Hz	at 2500Hz	at 5000Hz
67	1.98	1.10	No Response	No Response
77	3.66	1.90	1.21	0.91
87	4.89	3.43	2.26	1.48
97	9.00	4.60	2.36	2.89
107	9.60	9.10	6.16	5.33
117	9.53	9.60	9.65	11.99
127	9.53	9.50	9.65	9.98

Assigned Frequency: 171.905MHz

Modulation Input (dB SPL)	Peak Frequency Deviation (kHz)			
	at 500Hz	at 1000Hz	at 2500Hz	at 5000Hz
67	2.57	1.10	No Response	No Response
77	4.69	1.74	1.07	0.91
87	7.79	3.18	2.20	1.59
97	8.22	5.64	3.34	2.88
107	8.39	8.20	5.84	5.12
117	8.85	8.20	8.90	9.96
127	8.70	8.20	8.81	9.46

Note: No response if input level > 127dB SPL.


EXHIBIT 5
OCCUPIED BANDWIDTH

INTERTEK TESTING SERVICES

5.0 Occupied Bandwidth

Testing Procedures

1. Set-up the test equipment in the following configuration:

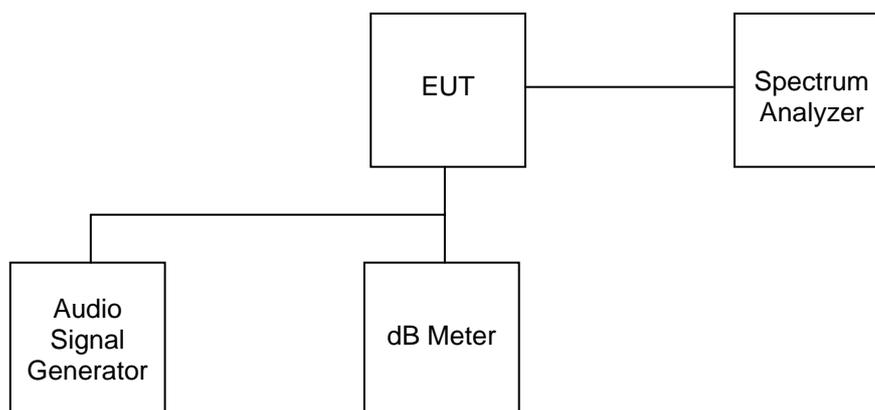

2. Other than single side band or independent sideband transmitters when modulated by a 2500Hz one at an input level 16dB greater than that necessary to produce 50 percent modulation. The input level shall be established at the frequency of maximum response of the audio modulation circuit.
3. The occupied bandwidth is measured with the spectrum analyzer set at 5kHz/div scan and 10dB/div.
4. The emission bandwidth shall not exceed the limit 54kHz.
5. The measured occupied bandwidth is 26.1kHz and 25.8kHz for carrier frequency of 169.505MHz 171.905MHz respectively.

For electronic filing, the bandwidth plot is saved with filename: bw.pdf

INTERTEK TESTING SERVICES

Table 5

**RadioShack Corporation
3201258**

**Occupied Bandwidth
Pursuant to FCC Section 2.1049(c)(1) & 90.210(b)**

Assigned Carrier Frequency: 169.505MHz; Measured Occupied Bandwidth in
26dB Down: 26.1kHz

Mask Region	Attenuation from Unmodulated Carrier Emissions	
	Measured Result (dB)	Calculated Limit (dB)
Carrier + 13.5kHz	-41.47	0
Carrier - 13.5kHz	-43.22	0
Carrier + 27.0kHz	-66.87	-25
Carrier - 27.0kHz	-72.57	-25
Carrier + 54.0kHz	-76.34	-35
Carrier - 54.0kHz	-78.12	-35

INTERTEK TESTING SERVICES

Table 6

**RadioShack Corporation
3201258**

**Occupied Bandwidth
Pursuant to FCC Section 2.1049(c)(1) & 90.210(b)**

Assigned Carrier Frequency: 171.905MHz; Measured Occupied Bandwidth in
26dB Down: 25.8kHz

Mask Region	Attenuation from Unmodulated Carrier Emissions	
	Measured Result (dB)	Calculated Limit (dB)
Carrier + 13.5kHz	-38.63	0
Carrier - 13.5kHz	-42.74	0
Carrier + 27.0kHz	-67.50	-25
Carrier - 27.0kHz	-69.50	-25
Carrier + 54.0kHz	-70.56	-35
Carrier - 54.0kHz	-76.14	-35

INTERTEK TESTING SERVICES

EXHIBIT 6

SPURIOUS EMISSION

6.0 **Spurious Emission**

In order to satisfy the requirement, the spurious emission from the EUT are measured and shown in the Exhibit 6.1.

INTERTEK TESTING SERVICES

6.1 Field Strength of Spurious Radiation

Testing Procedures

Radiated emission measurements were performed according to the procedures in ANSI/TIA-603-C-2004. All measurements were performed in Open Area Test Sites located at Roof Top of Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong.

For electronic filing, the radiated emission configurations photograph is saved with filename: radiated photos.pdf

INTERTEK TESTING SERVICES

Table 7

**RadioShack Corporation
3201258**

**Field Strength of Spurious Radiated
Pursuant to FCC Section 2.1053(a)**

Assigned Frequency: 169.505MHz

Polarization	Frequency (MHz)	Net measurement (dBm)	Transmit Power (dBm)	dB below carrier (dBc)
V	339.010	-50.8	-7.9	-42.9
V	508.515	-46.8	-7.9	-38.9
V	678.020	-45.2	-7.9	-37.3
V	847.525	-44.9	-7.9	-37.0
V	1017.030	-52.4	-7.9	-44.5
V	1186.535	-53.0	-7.9	-45.1
V	1356.040	-48.9	-7.9	-41.0
V	1525.545	-46.4	-7.9	-38.5
V	1695.050	-38.4	-7.9	-30.5

- Notes: 1. Quasi-peak data for emission below 1000MHz.
2. Negative sign in margin column shows the value below the limit.
3. Any emissions and any other harmonics which are attenuated more than 20dB below the permissible value need not be recorded.
4. Horn antenna and average detector is used for emission over 1000MHz.

* Calculated limit = $-43 - 10 \log_{10}(0.163 \times 10^{-3})$
= -5.1 dBc

INTERTEK TESTING SERVICES

Table 8

**RadioShack Corporation
3201258**

**Field Strength of Spurious Radiated
Pursuant to FCC Section 2.1053(a)**

Assigned Frequency: 171.905MHz

Polarization	Frequency (MHz)	Net measurement (dBm)	Transmit Power (dBm)	dB below carrier (dBc)
V	343.810	-44.4	-8.9	-35.5
V	515.715	-47.6	-8.9	-38.7
V	687.620	-45.2	-8.9	-36.3
V	859.525	-42.2	-8.9	-33.3
V	1031.430	-58.6	-8.9	-49.7
V	1203.335	-48.4	-8.9	-39.5
V	1375.240	-46.4	-8.9	-37.5
V	1547.145	-48.3	-8.9	-39.4
V	1719.050	-37.4	-8.9	-28.5

Notes: 1. Quasi-peak data for emission below 1000MHz.

- 5. Negative sign in margin column shows the value below the limit.
- 6. Any emissions and any other harmonics which are attenuated more than 20dB below the permissible value need not be recorded.
- 7. Horn antenna and average detector is used for emission over 1000MHz.

* Calculated limit = - 43 - 10 log₁₀ (0.130 X 10⁻³)
 = - 4.1 dBc

EXHIBIT 7
FREQUENCY STABILITY

INTERTEK TESTING SERVICES

7.0 **Frequency Stability**


The frequency tolerance was tested in normal condition and over extreme ambient conditions with respect to voltage and temperature variation.

INTERTEK TESTING SERVICES

7.1 Frequency Stability – Voltage

Testing Procedures

1. Set-up the test equipment in the following configuration:

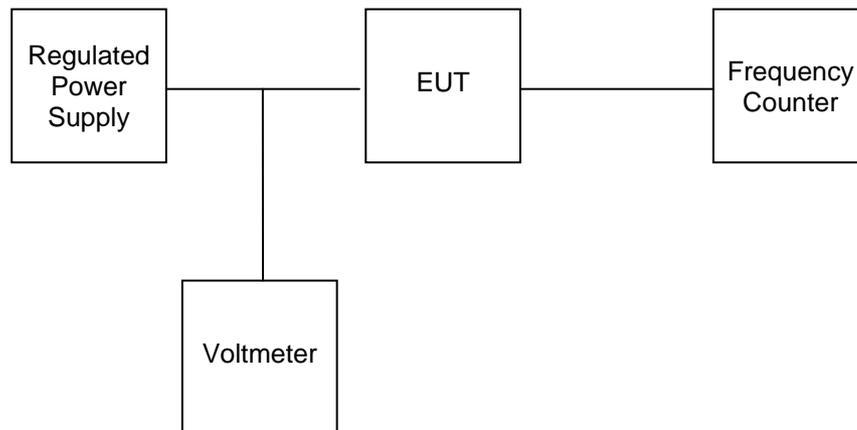

2. For battery powered equipment, reduce primary supply voltage to the battery operating end point voltage which is specified by the manufacturer.

INTERTEK TESTING SERVICES

Table 9

**RadioShack Corporation
3201258**

**Power Supply Voltage Stability
Pursuant to FCC Section 2.1055**

Manufacturer Specified Battery End Point Voltage (V)	Assigned Frequency (MHz)	Measured Frequency (MHz)	Deviation (kHz)
2	169.505	169.5039	-1.1
2	171.905	171.9040	-1.0


INTERTEK TESTING SERVICES

7.2 Frequency Stability – Temperature

Testing Procedures

1. Set-up the test equipment in the following configuration:

Temperature Chamber

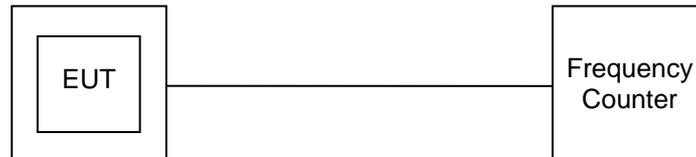

2. Set the Temperature Chamber to -30°C and stabilize the EUT temperature for one hour. Turn the transmitter ON for two minutes.
3. Turn the EUT OFF.
4. Repeat the above procedure with 10°C intervals from -30°C to 50°C .

INTERTEK TESTING SERVICES

Table 10

**RadioShack Corporation
3201258**

**Temperature Stability
Pursuant to FCC Section 2.1055**

Assigned Frequency (MHz)	Temperature (°C)	Measured Frequency (MHz)	Deviation (kHz)
169.505	-30	169.5030	-2.0
	-20	169.5034	-1.6
	-10	169.5038	-1.2
	0	169.5040	-1.0
	10	169.5040	-1.0
	20	169.5040	-1.0
	30	169.5034	-1.6
	40	169.5030	-2.0
	50	169.5030	-2.0
171.905	-30	171.9018	-3.2
	-20	171.9020	-3.0
	-10	171.9020	-3.0
	0	171.9044	-0.6
	10	171.9044	-0.6
	20	171.9041	-0.9
	30	171.9038	-1.2
	40	171.9030	-2.0
	50	171.9030	-2.0

INTERTEK TESTING SERVICES

EXHIBIT 8
TECHNICAL SPECIFICATIONS

8.0 Technical Specifications

For electronic filing, the block diagram and the schematic diagram of the Wireless Microphone are saved with filename: block.pdf and circuit.pdf respectively.

INTERTEK TESTING SERVICES

EXHIBIT 9
EQUIPMENT PHOTOGRAPHS

INTERTEK TESTING SERVICES

9.0 **Equipment Photographs**

For electronic filing, photographs of the tested EUT are saved with filename: internal photos.pdf and external photos.pdf

INTERTEK TESTING SERVICES

EXHIBIT 10
PRODUCT LABELLING

INTERTEK TESTING SERVICES

10.0 **Product Labelling**

For electronic filing, the label artwork and location are saved with filename:
label.pdf

INTERTEK TESTING SERVICES

EXHIBIT 11
INSTRUCTION MANUAL

INTERTEK TESTING SERVICES

11.0 **Instruction Manual**

This manual will be provided to the end-user with each unit sold/leased in the United States.

Please note that the required FCC information to the user can be found at the front of this manual.

For electronic filing, a preliminary copy of the instruction manual is saved with filename: manual.pdf

EXHIBIT 12
TUNE UP PROCEDURE

INTERTEK TESTING SERVICES

12.0 Tune Up Procedure

In order to satisfy the FCC Section 2.1033(c)(9) requirement, a preliminary copy of the tune up procedure is saved with filename: tuneup.pdf

EXHIBIT 13
INPUT CURRENT

13.0 Input Current

In order to satisfy the FCC Section 2.1033(c)(8) requirement, the input current to final r.f. stage at 3.0V d.c. is 16mA.

EXHIBIT 14

Confidentiality Request

INTERTEK TESTING SERVICES

14.0 **Confidentiality Request**

For electronic filing, a preliminary copy of the confidentiality request is saved with filename: request.pdf.

EXHIBIT 15
Equipment List

INTERTEK TESTING SERVICES

15.0 Equipment List

Radiated Emissions Test

Equipment	EMI Test Receiver	Biconical Antenna	Log Periodic Antenna
Registration No.	EW-2500	EW-2512	EW-0446
Manufacturer	R&S	EMCO	EMCO
Model No.	ESCI	3104C	3146
Calibration Date	Feb. 24, 2012	Nov. 15, 2011	Oct. 31, 2011
Calibration Due Date	Feb. 24, 2013	May 15, 2013	Apr. 30, 2013

Equipment	Spectrum Analyzer	Double Ridged Guide Antenna
Registration No.	EW-2253	EW-1015
Manufacturer	R&S	EMCO
Model No.	FSP40	3115
Calibration Date	Jan. 12, 2012	Aug. 24, 2011
Calibration Due Date	Jan. 12, 2013	Feb. 24, 2013

Equipment	Signal Generator	Roberts Antennas	Roberts Antennas
Registration No.	EW-0423	EW-0159	EW-0160
Manufacturer	IFR	CDI	CDI
Model No.	2023B	A100	A100
Calibration Date	May. 29, 2012	Sep. 25, 2012	Sep. 25, 2012
Calibration Due Date	May. 29, 2013	Mar. 25, 2014	Mar. 25, 2014

2) Stability Test

Equipment	Temperature & Humidity Chamber	Communication Services Monitor
Registration No.	EW-2395	EW-1443
Manufacturer	GIANT FORCE	R&S
Model No.	GTH-210-40-SP-AR	CMS54
Calibration Date	Oct 19, 2012	May 10, 2012
Calibration Due Date	Oct 19, 2013	May 10, 2013