



PART NO:

REV	REF	DESCRIPTION	AUTH	DATE


A

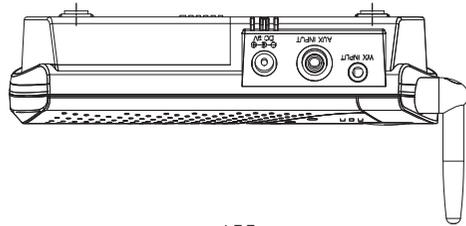


B

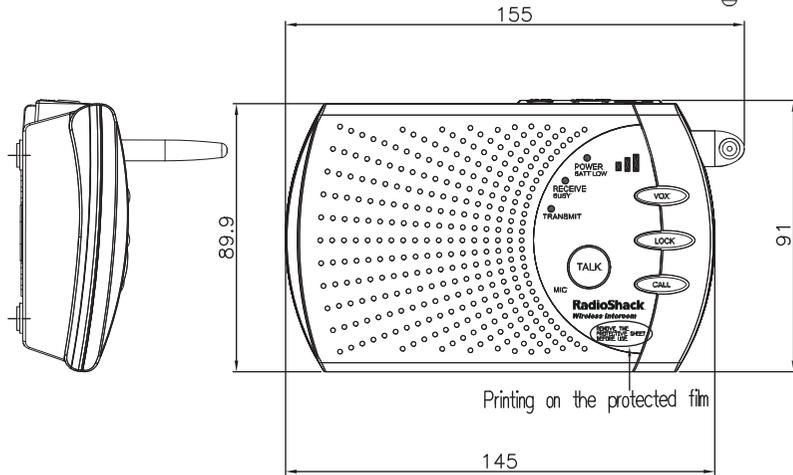




G

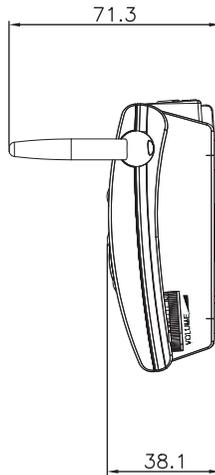

D

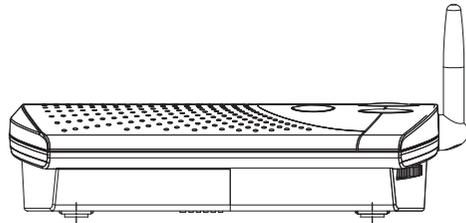

E

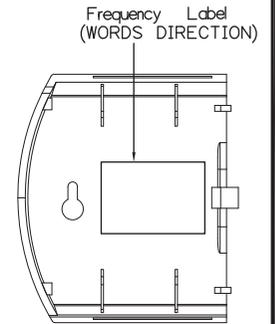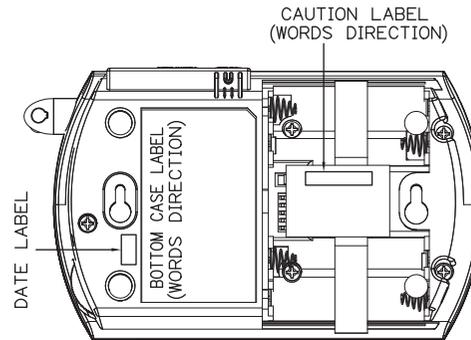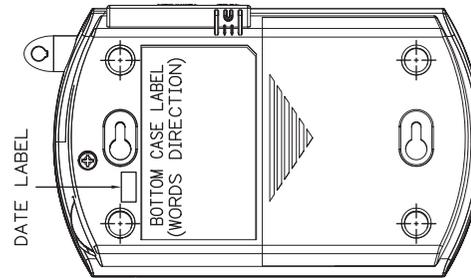

The battery cover is open


1. Marked $\phi$ must be recorded SPC.&MSA, and CPK $\geq$ 1.67 is required. 2. Marked * must be recorded DR.(Dimension Result) 3. Without any marked is not required records.	STANDARD TOLERANCE LIMITS UNLESS OTHER SPECIFIED.		NAME	DATE	MATERIAL	THIRD ANGLE PROJECTION JEBSEE ELECTRONICS CO., LTD.
	RANGE	TOLERANCE	DRAW BY			
	A	B	翁慧菁	2011/3/28		
> 0~6	$\pm 0.08$	$\pm 0.14$	DSN BY	黃國雄, 陳淑菁, 朱珀慧	2011/3/28	
> 6~30	$\pm 0.1$	$\pm 0.2$	CHK BY	楊龍飛, 曾國廣, 董淑莉	2011/3/28	FINISH
> 30~120	$\pm 0.2$	$\pm 0.3$	APPD BY	羅三國	2011/3/28	
> 120~300	$\pm 0.3$	$\pm 0.4$	TITLE	9AV43124-1 外觀圖		SCALE
> 300~600	$\pm 0.4$	$\pm 0.5$				1:1.8
> 600~1200	$\pm 0.5$	$\pm 0.6$				CAVITY
						DRAWING NO.
						AV-100147
						REV
						1

1. Do not scale print

2. Must submit samples for approval before proceeding with production.

PART NO: 568-0150-0333-G01

REV	REF	CHANGE NO.	DESCRIPTION	AUTHOR	CHK BY	DATE
1			新圖			

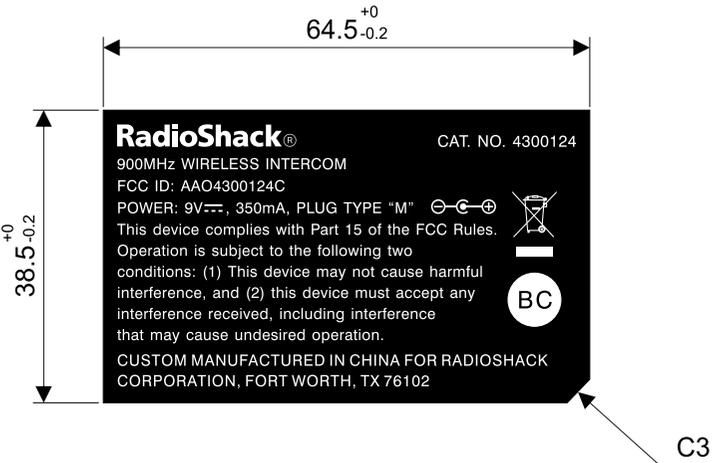

8. 附電子檔
7. 3.21'13客戶確認OK
6. 須做高低溫測試:  
 高溫+65°C±2°C、低溫-20°C±2°C、濕度90%~95%各8小時,  
 執行一個循環,測試結束,須在室溫中放置1小時後,油墨不會脫落、  
 標貼材質不會起泡、變形、邊緣翹起,背膠須平貼於下膠盒強黏性。  
 測試時,溫度、溼度必須在上述標準值內取一固定值去測試。
5. 請注意標貼黏貼處表面,不可有油質、灰塵、水、  
 脫模劑等其他污染,均必須事先用溶劑,  
 擦拭並清除乾淨,以確保背膠需平貼於下膠盒強黏性
4. 覆蓋面必須通過3M膠帶測試
3. 客戶提供文字稿
2. 文字內容編排方式如圖所示
1. **RadioShack®**請用客戶標準字體

1. Marked "⊗" must be recorded SPC. & MSA. and CPK. ≥ 1.67 is required.  
 2. Marked "\*" must be recorded DR. (Dimension Result)  
 3. Without any marked is not required records.

RANGE	TOLERANCE	
	A	B
> 0.5~6	± 0.05	± 0.1
> 6~30	± 0.1	± 0.2
> 30~120	± 0.15	± 0.3
> 120~400	± 0.2	± 0.5
> 400~1000	± 0.3	± 0.8

	NAME	DATE	MATERIAL
DRAW BY	朱珀慧	2012/12/25	80番白色PP合成紙 印黑底反白字
CHK BY	朱慧芳 黃大原	2013/3/22	FINISH 蓋環保亮面OPP膠帶
APPD BY	楊龍飛 Shuli	2013/3/22	CAVITY
TITLE	下膠盒標貼		

THIRD ANGLE PROJECTION  
 UNIT:mm  
 SCALE  
 1 : 1

JEBSEE ELECTRONICS  
 CO., LTD.  
 MODEL NO. 9AV43124-2  
 DRAWING NO. AV-600922