

**Report on Test Measurements***Measurements Report*

The measurement report shows compliance information against the pertinent technical standards. Each section of the report contains either verbiage or graphs which show compliance to applicable standards as required. Each section also explains testing method and indicates what the applicable specification is.

A list of test equipment for all sections, and certification signoff page are included at the end of the measurement report.

## SUBMITTED MEASURED DATA -- INDEX

**EXHIBIT    DESCRIPTION**

|        |                                                                                        |
|--------|----------------------------------------------------------------------------------------|
| E1-1   | RF Output-Data                                                                         |
| E1-2   | Occupied Bandwidth: Setup, Specifications, and Index                                   |
| E1-2.1 | Linear Simulcast Modulation (LSM)                                                      |
| E1-2.2 | Compatible 4-Level Frequency Modulation (C4FM)                                         |
| E1-3   | Conducted Spurious Emissions: Setup, Specifications, and Index                         |
| E1-3.1 | LSM Conducted Spurious Emissions, Harmonics, Power 60 Watts, Multiple Frequencies      |
| E1-3.2 | LSM Conducted Spurious Emissions, Harmonics, Power 2 Watts, Multiple Frequencies       |
| E1-3.3 | C4FM Conducted Spurious Emissions, Harmonics, Power 100 Watts, Multiple Frequencies    |
| E1-3.4 | C4FM Conducted Spurious Emissions, Harmonics, Power 2 Watts, Multiple Frequencies      |
| E1-3.5 | Conducted Spurious Emissions, Close-In, 100 MHz Span, Power Output at 60 Watts, LSM    |
| E1-3.6 | Conducted Spurious Emissions, Close-In, 100 MHz Span, Power Output at 100 Watts, C4FM  |
| E1-4   | Radiated Spurious Emissions: Setup, Specifications, and Index                          |
| E1-4.1 | LSM Radiated Spurious Emissions, Harmonics, Power 60 Watts, Representative Frequency   |
| E1-4.2 | LSM Radiated Spurious Emissions, Harmonics, Power 2 Watts, Representative Frequency    |
| E1-4.3 | C4FM Radiated Spurious Emissions, Harmonics, Power 100 Watts, Representative Frequency |
| E1-4.4 | C4FM Radiated Spurious Emissions, Harmonics, Power 2 Watts, Representative Frequency   |

**Report on Test Measurements***Measurements Report*

## SUBMITTED MEASURED DATA – INDEX (Continued)

**EXHIBIT    DESCRIPTION**

|        |                                                                         |
|--------|-------------------------------------------------------------------------|
| E1-5   | Frequency Stability: Setup, Specifications, and Index                   |
| E1-5.1 | Frequency Stability Vs Temperature                                      |
| E1-5.2 | Frequency Stability Vs Voltage                                          |
|        |                                                                         |
| E1-6   | Frequency Transient Behavior: Setup, Specifications, Index              |
| E1-6.1 | Frequency Transient Behavior, 12.5 kHz Channel Key-Up, Low End of Band  |
| E1-6.2 | Frequency Transient Behavior, 12.5 kHz Channel Key-Up, Middle of Band   |
| E1-6.3 | Frequency Transient Behavior, 12.5 kHz Channel Key-Up, High End of Band |
| E1-6.4 | Frequency Transient Behavior, 12.5 kHz Channel De-key, Low End of Band  |
| E1-6.5 | Frequency Transient Behavior, 12.5 kHz Channel De-key, Middle of Band   |
| E1-6.6 | Frequency Transient Behavior, 12.5 kHz Channel De-key, High End of Band |
|        |                                                                         |
| E1-11  | Test Equipment Used                                                     |
| E1-12  | Statement of Certification                                              |

## Report on Test Measurements

*RF Power Output Data*

The RF power output was measured with the indicated voltage applied to and current into the final RF amplifying device. The DC current indicated is the total for the final RF amplifier stage, consisting of four parallel power transistors.

## Linear Simulcast Modulation Mode:

|                                               |             |                |
|-----------------------------------------------|-------------|----------------|
| Measured RF output                            | <u>60</u>   | Watts, Average |
| DC Voltage                                    | <u>23.9</u> | Volts          |
| DC Current                                    | <u>9.7</u>  | Amperes        |
| Input power for final RF amplifying device(s) | <u>230</u>  | Watts          |
| Primary Radio Input Supply Voltage            | <u>120</u>  | Volts AC       |
| Minimum Measured RF output                    | <u>2</u>    | Watts, Average |
| Normal DC Voltage                             | <u>21.0</u> | Volts          |
| Normal DC Current                             | <u>3.4</u>  | Amperes        |
| Input power for final RF amplifying device(s) | <u>70</u>   | Watts          |
| Primary Radio Input Supply Voltage            | <u>120</u>  | Volts AC       |

## Compatible 4-Level Frequency Modulation Mode:

|                                               |             |                |
|-----------------------------------------------|-------------|----------------|
| Measured RF output                            | <u>100</u>  | Watts          |
| DC Voltage                                    | <u>21.5</u> | Volts          |
| DC Current                                    | <u>13.4</u> | Amperes        |
| Input power for final RF amplifying device(s) | <u>290</u>  | Watts          |
| Primary Radio Input Supply Voltage            | <u>120</u>  | Volts AC       |
| Minimum Measured RF output                    | <u>2</u>    | Watts, Average |
| Normal DC Voltage                             | <u>21.0</u> | Volts          |
| Normal DC Current                             | <u>3.4</u>  | Amperes        |
| Input power for final RF amplifying device(s) | <u>70</u>   | Watts          |
| Primary Radio Input Supply Voltage            | <u>120</u>  | Volts AC       |

### Report on Test Measurements

#### *Occupied Bandwidth – Linear Simulcast Modulation (LSM), 12.5 kHz Channel Spacing*

There is one exhibit shown for Linear Simulcast Modulation. It can be used in a system configuration based upon channel usage as described in Exhibit B. The occupied bandwidth chart references the following setup and specification requirements.

Modulation Type: Linear Simulcast Modulation, LSM  
 Emission Designator: 8K70D1W  
 Channelization: 12.5 kHz  
 Power Setting: 60 Watts, Average

#### Specification Requirement § 90.210(d) Emission Limits:

*Emission Mask D.* For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- (1) On any frequency from the center of the authorized bandwidth ( $f_0$ ) to 5.625 kHz removed from  $f_0$ : *Zero dB*
- (2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz) of more than 5.625 kHz but no more than 12.5 kHz: *At least  $7.27 * (f_d - 2.88 \text{ kHz})$  dB*
- (3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz) of more than 12.5 kHz: *At least 50 plus  $10 \log_{10}(P)$  dB or 70 dB, whichever is the lesser attenuation.*

(4) The reference level for showing compliance with the emission mask shall be established using a resolution bandwidth sufficiently wide to capture the true peak emission of the equipment under test. In order to show compliance with the emissions mask up to and including 50 kHz removed from the edge of the authorized bandwidth, adjust the resolution bandwidth to 100 Hz with the measuring instrument in a peak hold mode. A sufficient number of sweeps must be measured to ensure that the emission profile is developed.

Necessary Bandwidth Calculation: The necessary bandwidth of the modulation signal is not calculable per the formulas defined in 47 CFR 2.202 (b). Specifically, although the modulation for this emission is a composite modulation, the equations given in the composite tables in 2.202 are not applicable since none of them adequately approximate the form of digital modulation used. The necessary bandwidth of 8.70 kHz is based upon a 99% power measurement of the transmitter spectrum, per 2.202 (a).

#### Measurement Procedure and Instrument Settings:

##### Emission Measurement Analyzer Settings:

|                |                                |                       |         |
|----------------|--------------------------------|-----------------------|---------|
| Horizontal:    | 12.5 kHz per Division          | Resolution Bandwidth: | 100 Hz  |
| Vertical:      | 10 dB per Division             | Video Bandwidth:      | 10 kHz  |
| Sweep Time:    | 72 Seconds (<2000 Hz / Second) | Span:                 | 125 kHz |
| Detector Mode: | Peak                           |                       |         |

#### Test Procedure:

- 1) Adjust the spectrum analyzer per the values specified in the Emission Measurement Analyzer Settings.
- 2) Modulate the transmitter with the appropriate signaling pattern, (pseudorandom data) and key the transmitter at the full power rating. Use the analyzer controls to set this signal to the full-scale reference line. Allow the analyzer to sweep fully and store the sweep.
- 3) Use the band power marker function of the spectrum analyzer to measure the power of the carrier in a 12.5 kHz bandwidth.
- 4) Use the carrier power value from the previous step to generate the emission mask limit.
- 5) Plot the resulting analyzer trace and the emission mask limit, add text and labeling as appropriate.

#### **EXHIBIT DESCRIPTION**

|        |                                   |
|--------|-----------------------------------|
| E1-2.1 | Linear Simulcast Modulation (LSM) |
|--------|-----------------------------------|

## Report on Test Measurements

Occupied Bandwidth – Compatible 4-Level Frequency Modulation (C4FM), 12.5 kHz Channel Spacing

There is one exhibit shown for C4FM. It can be used in a system configuration based upon channel usage as described in Exhibit B. The occupied bandwidth chart references the following setup and specification requirements.

Modulation Type: Compatible 4-Level Frequency Modulation, C4FM  
 Emission Designator: 8K10F1E  
 Channelization: 12.5 kHz  
 Power Setting: 100 Watts

Specification Requirement § 90.210(d) Emission Limits:

Emission Mask D. For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- (1) On any frequency from the center of the authorized bandwidth ( $f_0$ ) to 5.625 kHz removed from  $f_0$ : *Zero dB*
- (2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz) of more than 5.625 kHz but no more than 12.5 kHz: *At least  $7.27 * (f_d - 2.88 \text{ kHz})$  dB*
- (3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz) of more than 12.5 kHz: *At least 50 plus  $10 \log_{10}(P)$  dB or 70 dB, whichever is the lesser attenuation.*

(4) The reference level for showing compliance with the emission mask shall be established using a resolution bandwidth sufficiently wide to capture the true peak emission of the equipment under test. In order to show compliance with the emissions mask up to and including 50 kHz removed from the edge of the authorized bandwidth, adjust the resolution bandwidth to 100 Hz with the measuring instrument in a peak hold mode. A sufficient number of sweeps must be measured to ensure that the emission profile is developed.

Necessary Bandwidth Calculation: An occupied bandwidth of 8.10 kHz was measured for this emission, per 2.202 paragraph (a) of the Rules and Regulations, as that bandwidth which contains 99% of the power in the transmitted signal. For this system, the necessary bandwidth has been chosen to be the same as the occupied bandwidth, thereby per paragraph (b) (2), the necessary bandwidth is 8K10.

Measurement Procedure and Instrument Settings:Emission Measurement Analyzer Settings:

|                |                                |                       |         |
|----------------|--------------------------------|-----------------------|---------|
| Horizontal:    | 12.5 kHz per Division          | Resolution Bandwidth: | 100 Hz  |
| Vertical:      | 10 dB per Division             | Video Bandwidth:      | 10 kHz  |
| Sweep Time:    | 72 Seconds (<2000 Hz / Second) | Span:                 | 125 kHz |
| Detector Mode: | Peak                           |                       |         |

Test Procedure:

- 1) Adjust the spectrum analyzer per the values specified in the Emission Measurement Analyzer Settings.
- 2) Modulate the transmitter with the appropriate signaling pattern, (pseudorandom data) and key the transmitter at the full power rating. Use the analyzer controls to set this signal to the full-scale reference line. Allow the analyzer to sweep fully and store the sweep.
- 3) Use the band power marker function of the spectrum analyzer to measure the power of the carrier in a 12.5 kHz bandwidth.
- 4) Use the carrier power value from the previous step to generate the emission mask limit.
- 5) Plot the resulting analyzer trace and the emission mask limit, add text and labeling as appropriate.

| EXHIBIT | DESCRIPTION                                    |
|---------|------------------------------------------------|
| E1-2.2  | Compatible 4-Level Frequency Modulation (C4FM) |

Report on Test Measurements

Occupied Bandwidth – Linear Simulcast Modulation (LSM)


Occupied Bandwidth -- Linear Simulcast Modulation - 8K70D1W - 60 Watts

REF 47.8 dBm

ATTEN 20 dB

10 dB/  
Peak

LOG PAGE: \_\_\_\_\_ DATE: 6/06/07  
 NAME: Ferdie DeLeon  
 SIGNATURE: \_\_\_\_\_

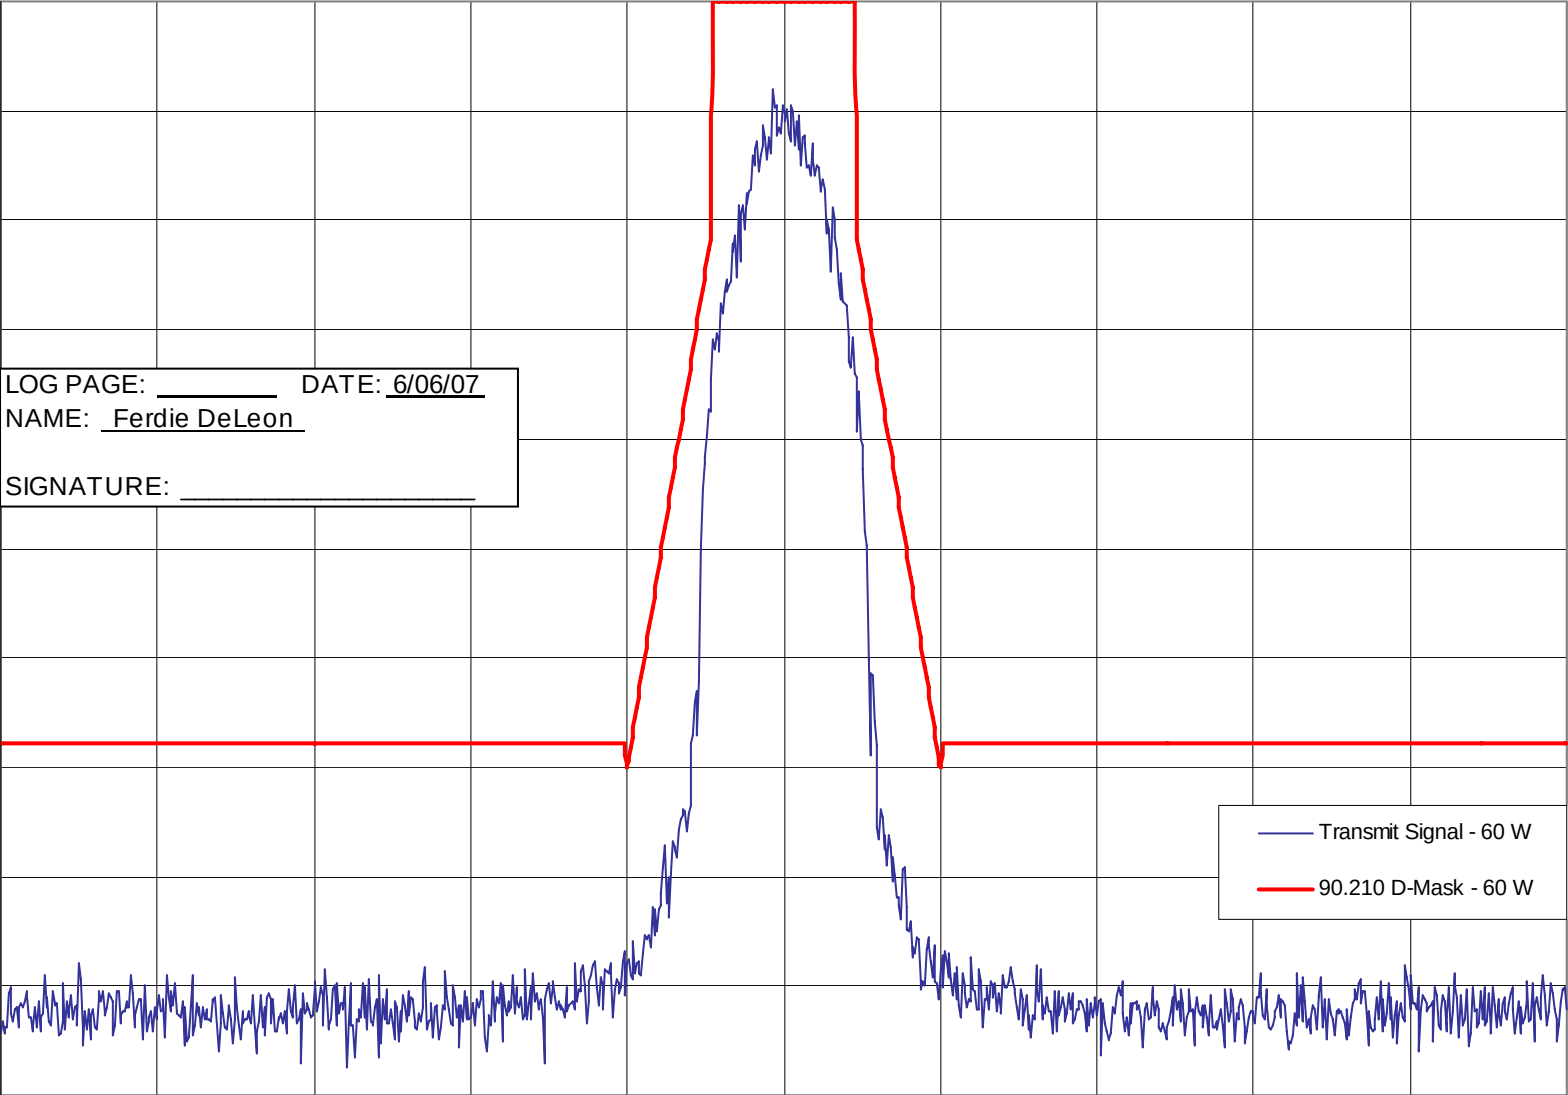

CENTER 162.0125 MHz  
 RES BW 100 Hz

VID BW 10 kHz

SPAN 125 kHz  
 SWP 72 sec

Report on Test Measurements

Occupied Bandwidth – Compatible 4-Level Frequency Modulation (C4FM)


Occupied Bandwidth -- Compatible 4-Level Frequency Modulation - 8K10F1E - 100 Watts

REF 50 dBm

ATTEN 20 dB

10 dB/  
Peak

LOG PAGE: \_\_\_\_\_ DATE: 6/06/07  
 NAME: Ferdie DeLeon  
 SIGNATURE: \_\_\_\_\_

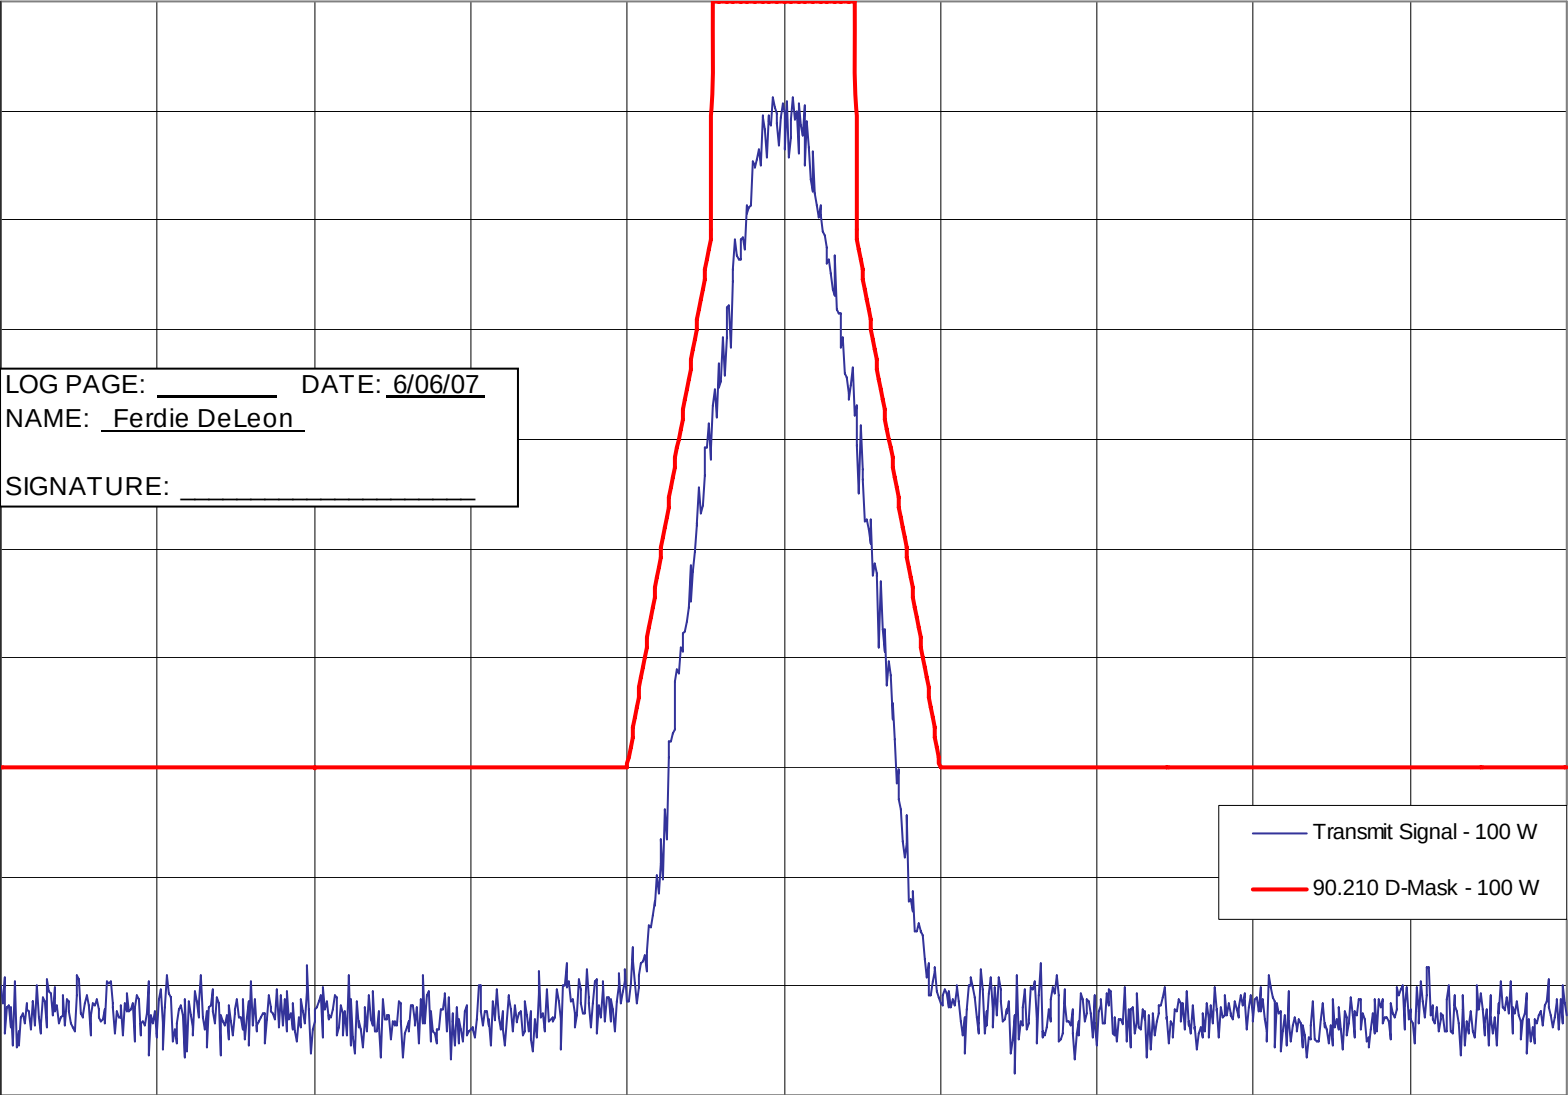

CENTER 162.01250 MHz  
 RES BW 100 Hz

VID BW 10 kHz

SPAN 125 kHz  
 SWP 72 sec

## Report on Test Measurements

*Conducted Spurious Emissions, Harmonics and Close-In*Specification Requirement § 90.210(d) Emission Limits:

Emission Mask D: For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

(3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz) of more than 12.5 kHz:  
*At least 50 plus  $10 \log_{10}(P)$  dB or 70 dB, whichever is the lesser attenuation.*

Modulation: Linear Simulcast Modulation (LSM) or Compatible 4-Level Frequency Modulation (C4FM) as indicated – Pseudorandom data


Carrier Frequencies: Carrier frequencies of 138.0125, 150.0125, 162.0125, and 173.9875 MHz were measured for conducted carrier harmonics. These frequencies represent the low end, center, and high end of the 136-174 MHz band, and are representative of the full 136-174 MHz operating band. A representative frequency of 162.0125 was used for the close-in conducted measurements.

| EXHIBIT | DESCRIPTION                                                                                                                   |
|---------|-------------------------------------------------------------------------------------------------------------------------------|
| E1-3.1  | Conducted Spurious Emissions, Harmonics, Power Output 60 Watts, LSM<br>The specification limit is -67.8 dBc                   |
| E1-3.2  | Conducted Spurious Emissions, Harmonics, Power Output 2 Watts, LSM<br>The specification limit is -53.0 dBc                    |
| E1-3.3  | Conducted Spurious Emissions, Harmonics, Power Output 100 Watts, C4FM<br>The specification limit is -70.0 dBc                 |
| E1-3.4  | Conducted Spurious Emissions, Harmonics, Power Output 2 Watts, C4FM<br>The specification limit is -53.0 dBc                   |
| E1-3.5  | Conducted Spurious Emissions, Close-In, 100 MHz Span, Power Output at 60 Watts, LSM<br>The specification limit is -67.8 dBc   |
| E1-3.6  | Conducted Spurious Emissions, Close-In, 100 MHz Span, Power Output at 100 Watts, C4FM<br>The specification limit is -70.0 dBc |



Report on Test Measurements

Conducted Emission – Harmonics – 60 Watts LSM

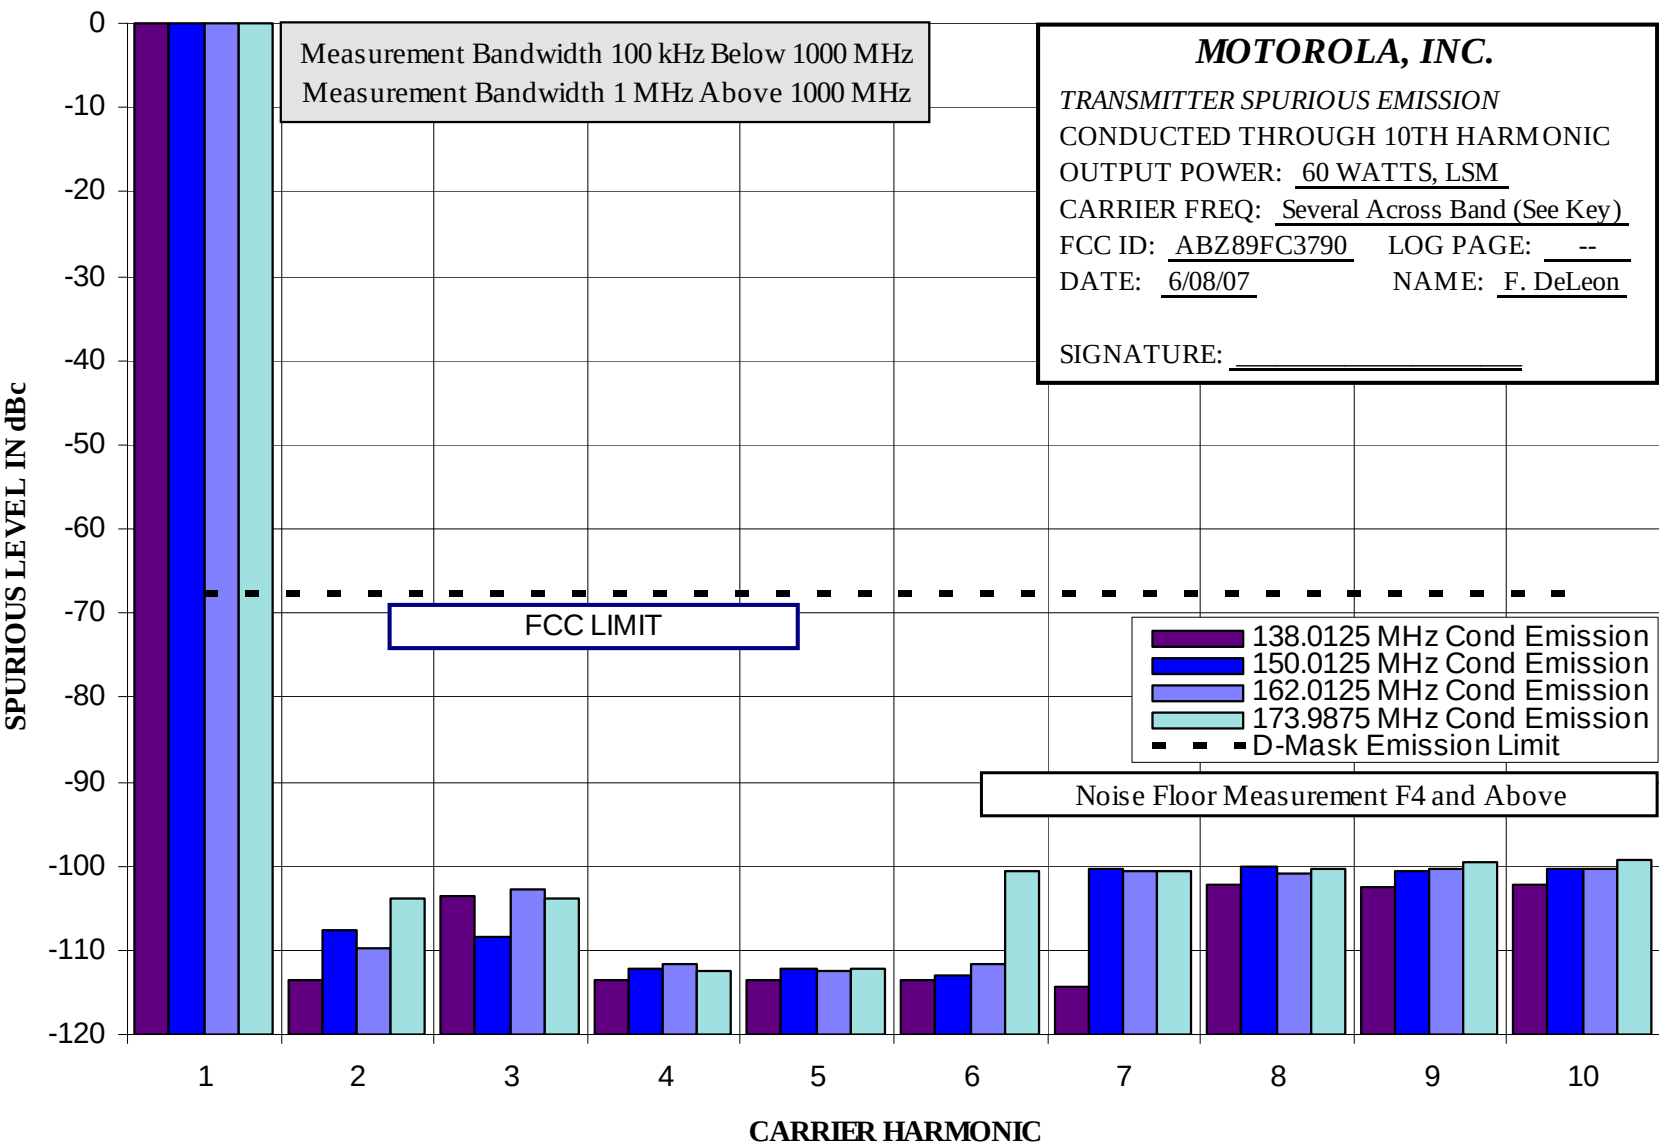


APPLICANT: MOTOROLA

EQUIPMENT TYPE: ABZ89FC3790


Report on Test Measurements

Conducted Emission – Harmonics – 2 Watts LSM

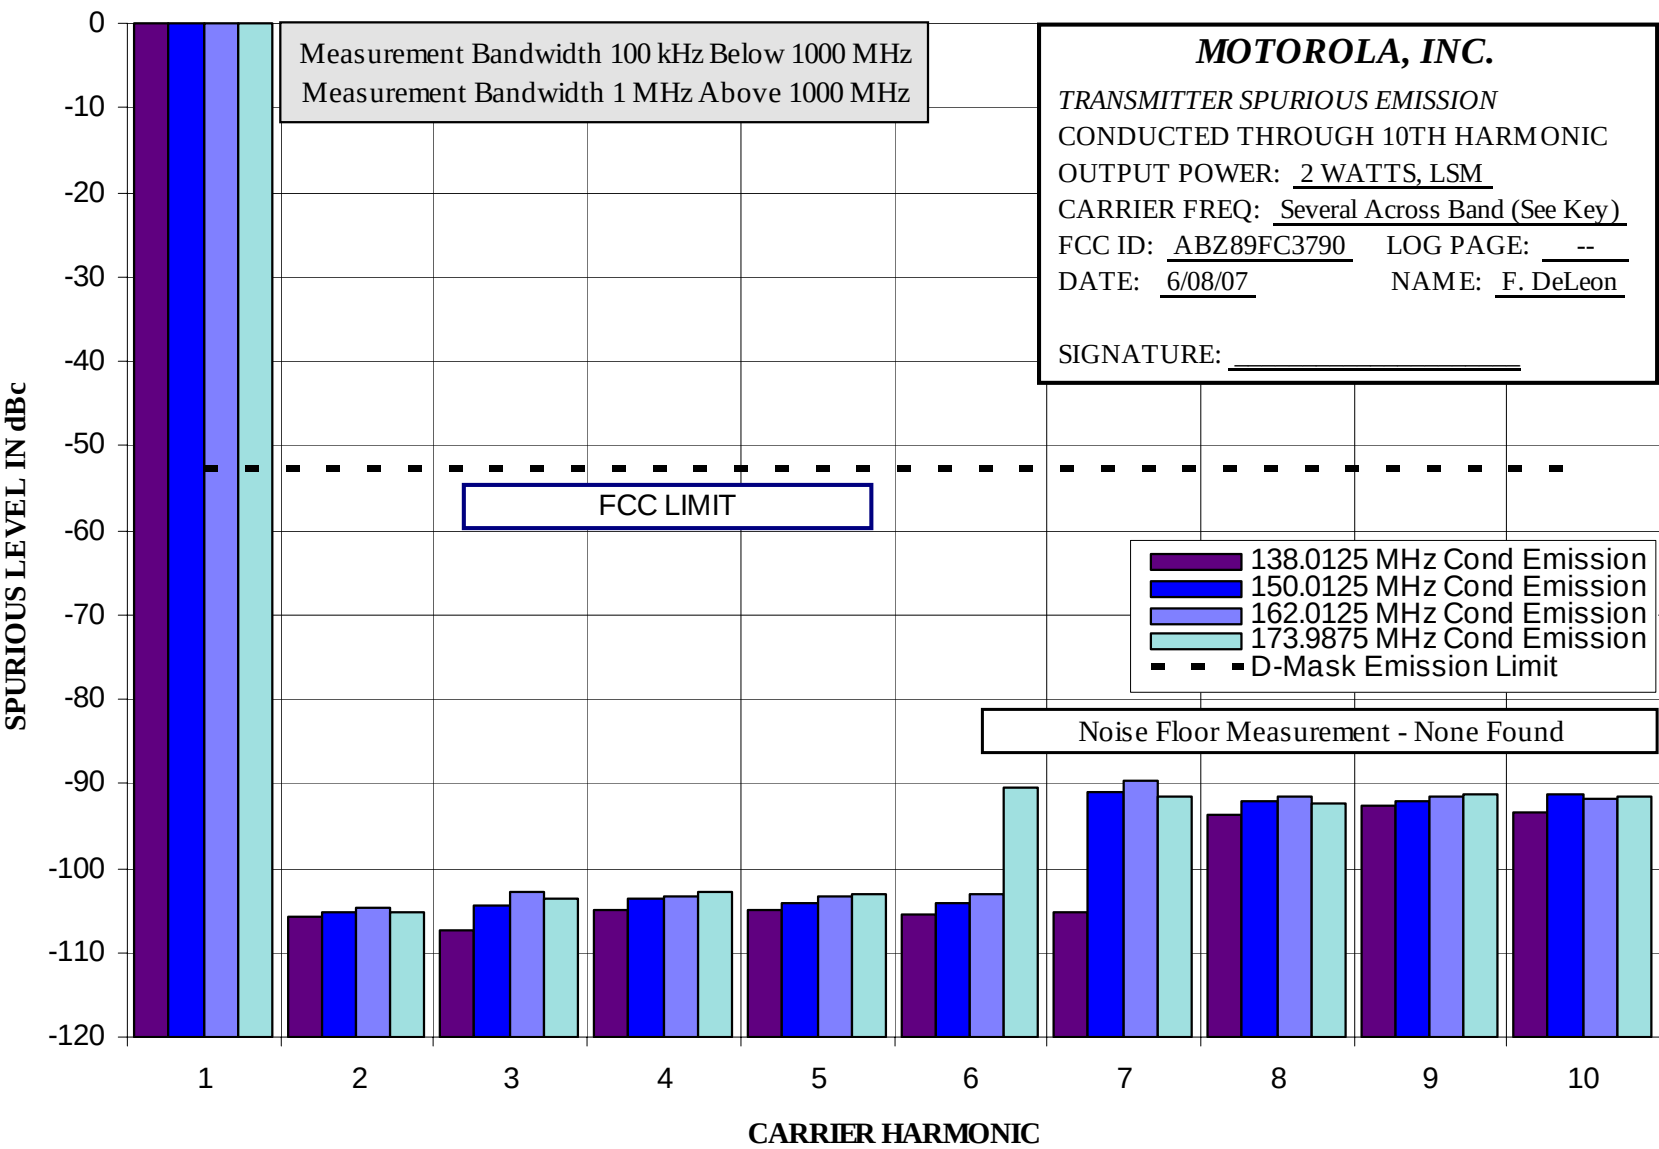


Report on Test Measurements

Conducted Emission – Harmonics – 100 Watts C4FM

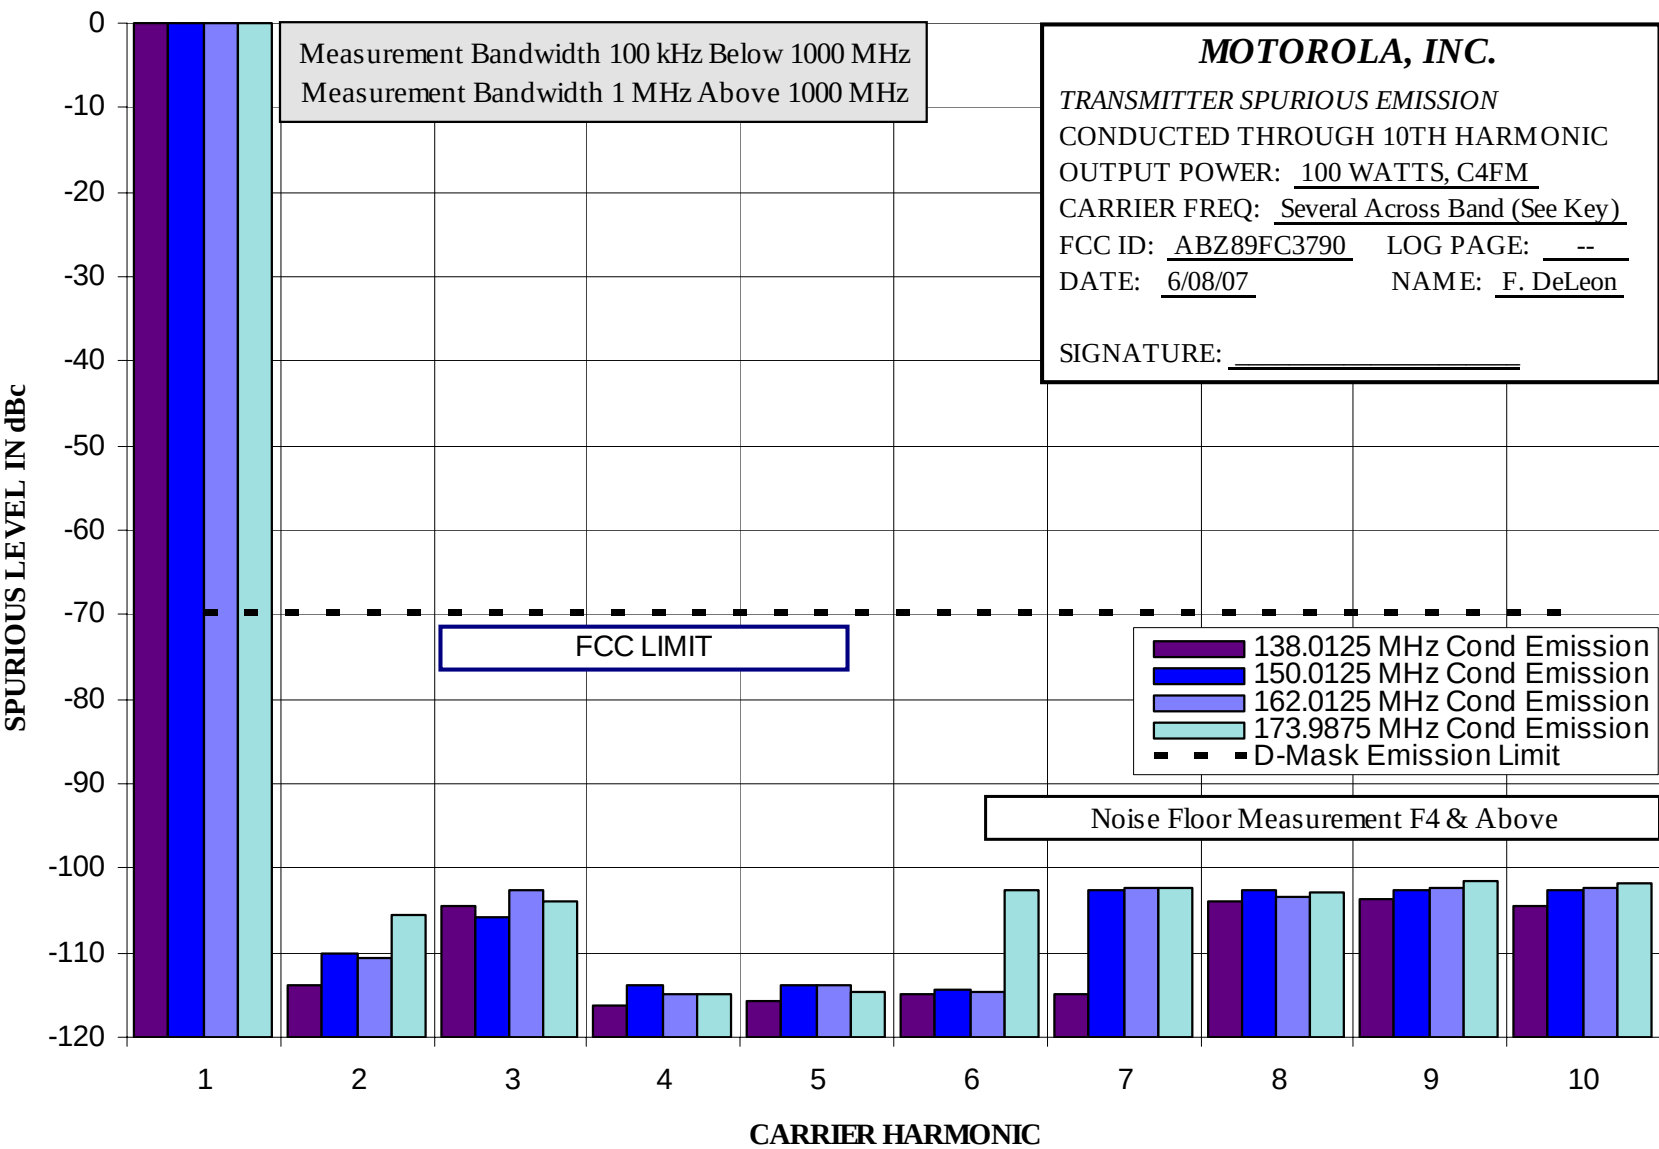

Report on Test Measurements


Conducted Emission – Harmonics – 2 Watts C4FM

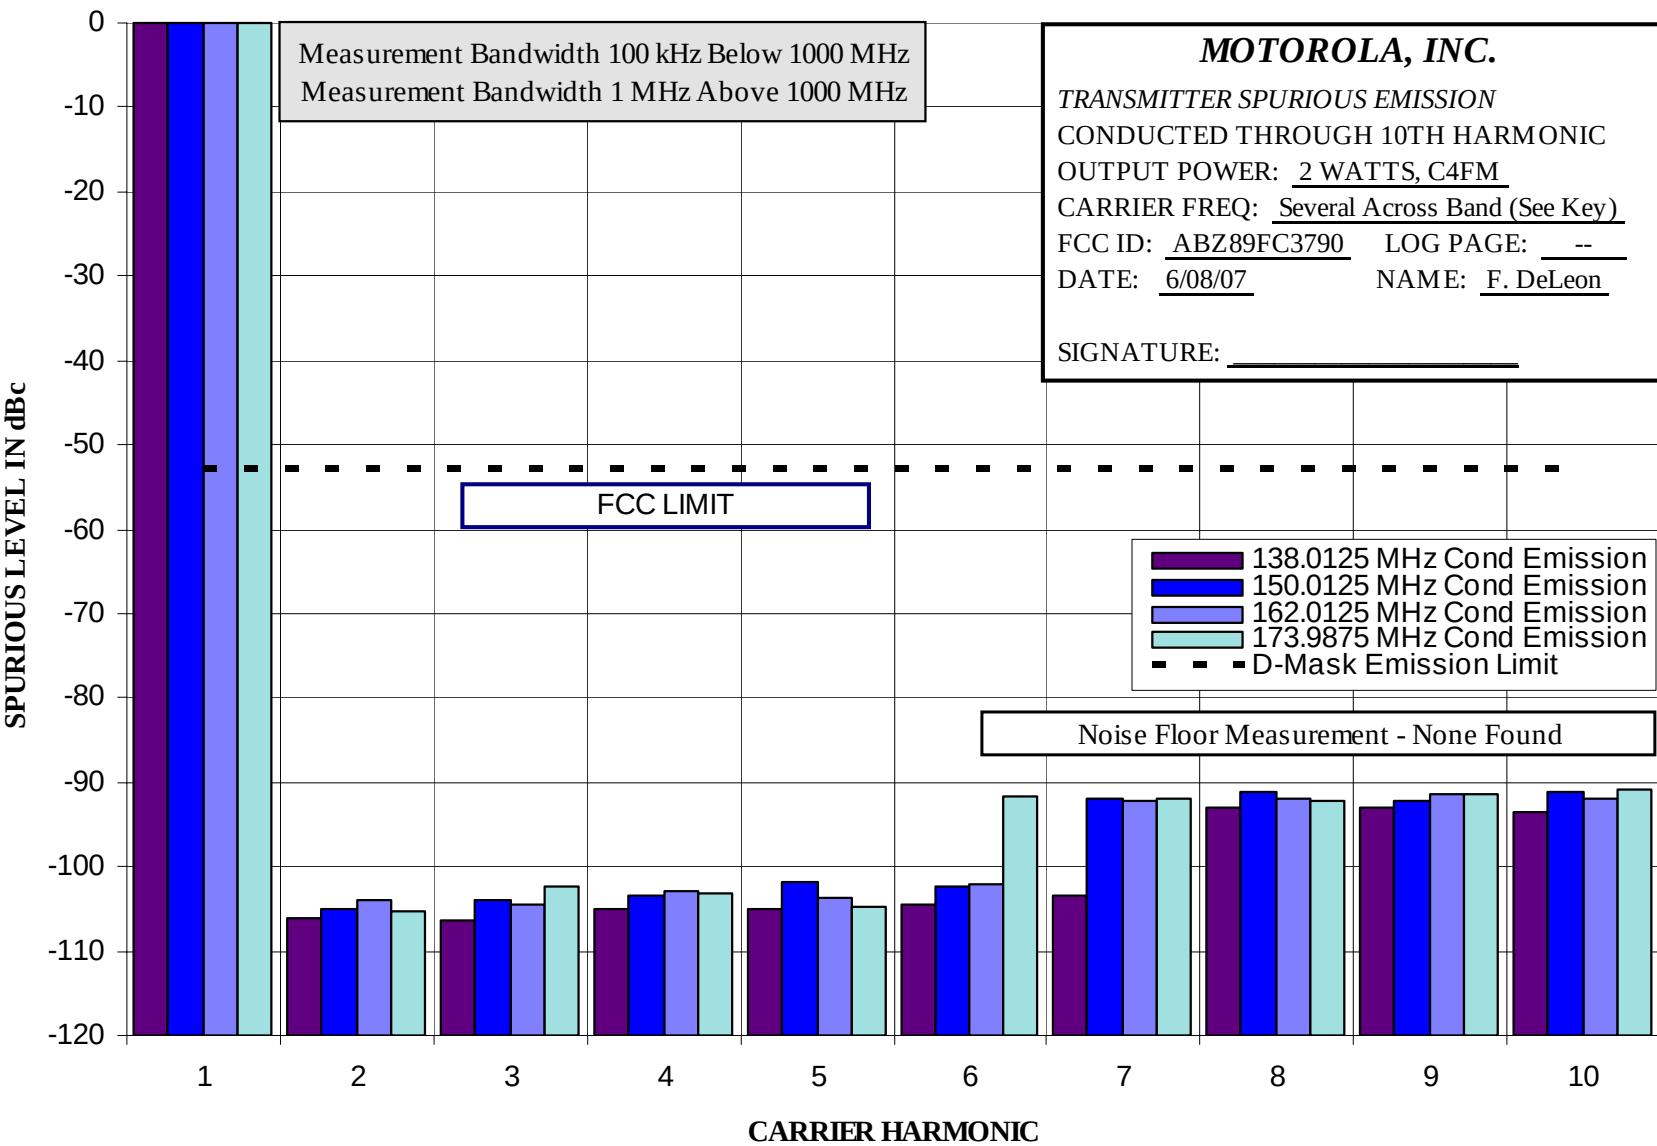

APPLICANT: MOTOROLA

EQUIPMENT TYPE: ABZ89FC3790


Report on Test Measurements  
Conducted Emission – Close-In – 60 Watts LSM – 100 MHz Span

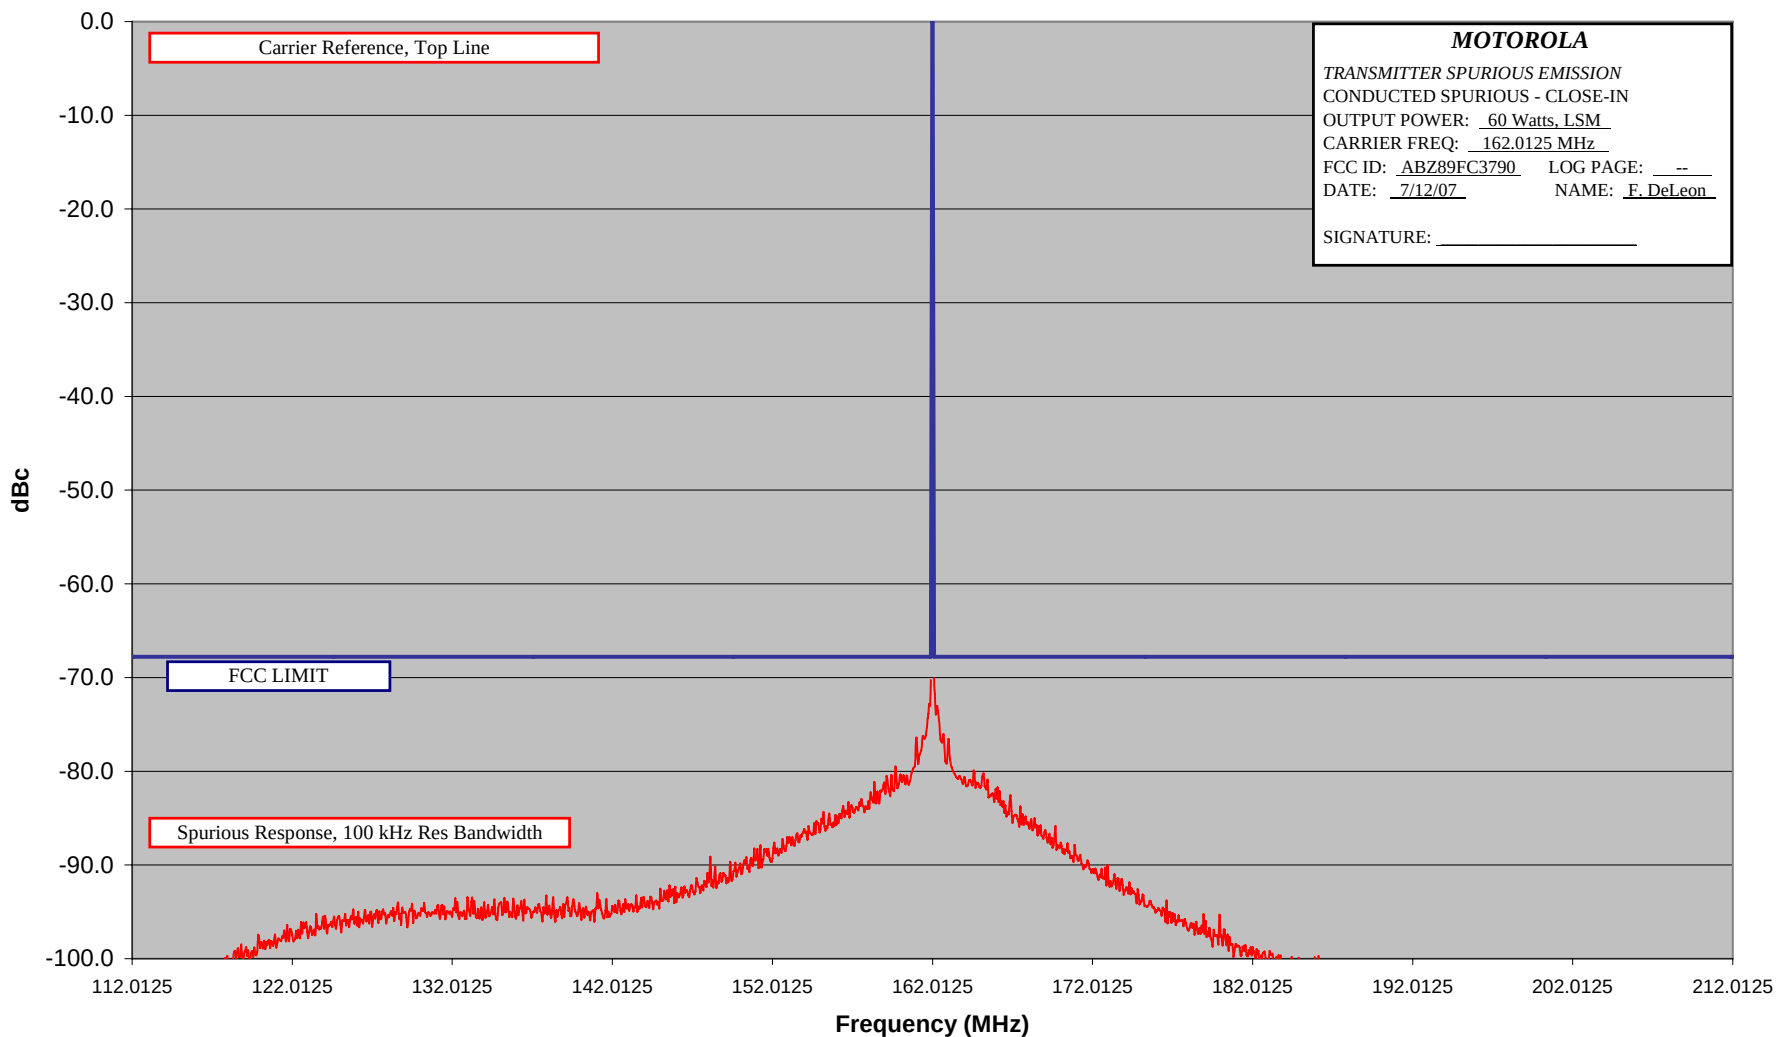

APPLICANT: MOTOROLA

EQUIPMENT TYPE: ABZ89FC3790

Report on Test Measurements  
Conducted Emission – Close-In – 100 Watts C4FM – 100 MHz Span

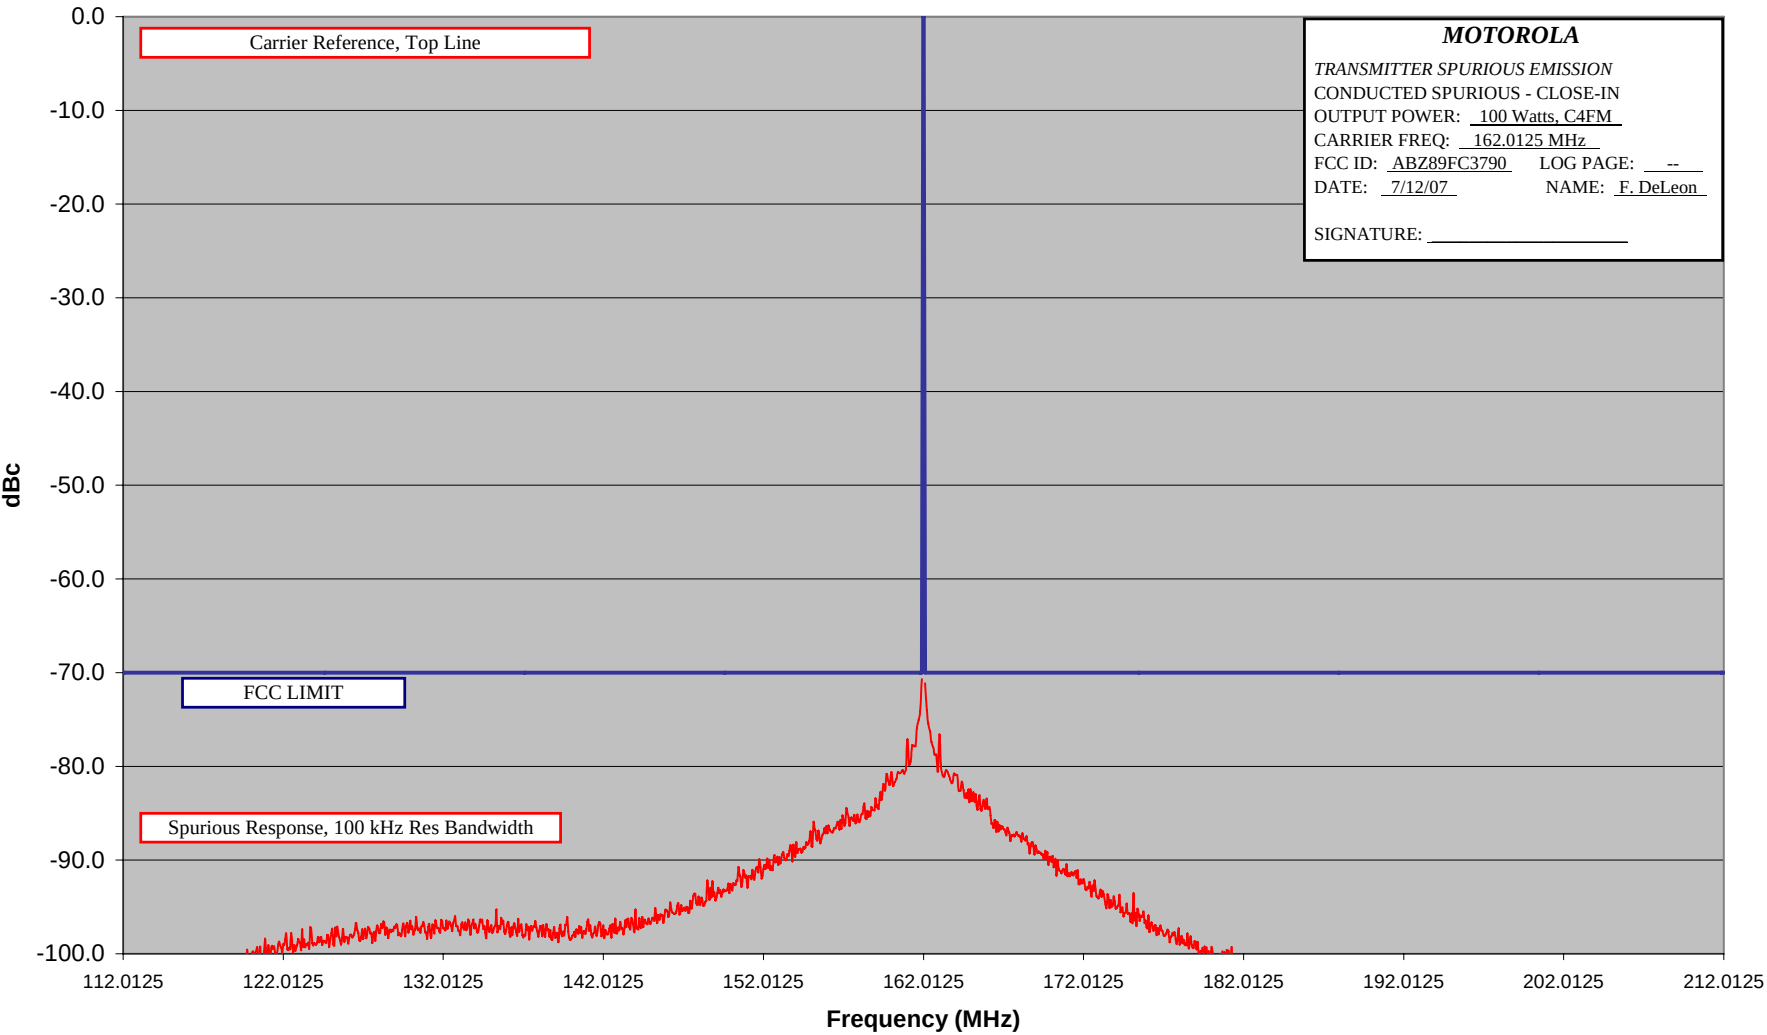

## Report on Test Measurements

*Radiated Spurious Emissions, Harmonics*Specification Requirement § 90.210(d) Emission Limits:

Emission Mask D: For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:


(3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz) of more than 12.5 kHz:  
*At least 50 plus  $10 \log_{10}(P)$  dB or 70 dB, whichever is the lesser attenuation.*

Modulation: Linear Simulcast Modulation (LSM) or Compatible 4-Level Frequency Modulation (C4FM)  
as indicated – Pseudorandom data

Carrier Frequencies: A carrier frequency of 161.0125 MHz was measured. The radiated result at this frequency is representative of performance across the 136-174 MHz operating band


| <b>EXHIBIT</b> | <b>DESCRIPTION</b>                                                                                           |
|----------------|--------------------------------------------------------------------------------------------------------------|
| E1-4.1         | Radiated Spurious Emissions, Harmonics, Power Output 60 Watts, LSM<br>The specification limit is -67.8 dBc   |
| E1-4.2         | Radiated Spurious Emissions, Harmonics, Power Output 2 Watts, LSM<br>The specification limit is -53.0 dBc    |
| E1-4.3         | Radiated Spurious Emissions, Harmonics, Power Output 100 Watts, C4FM<br>The specification limit is -70.0 dBc |
| E1-4.4         | Radiated Spurious Emissions, Harmonics, Power Output 2 Watts, C4FM<br>The specification limit is -53.0 dBc   |

Report on Test Measurements  
Radiated Emission – Harmonics – 60 Watts – Linear Simulcast Modulation (LSM)

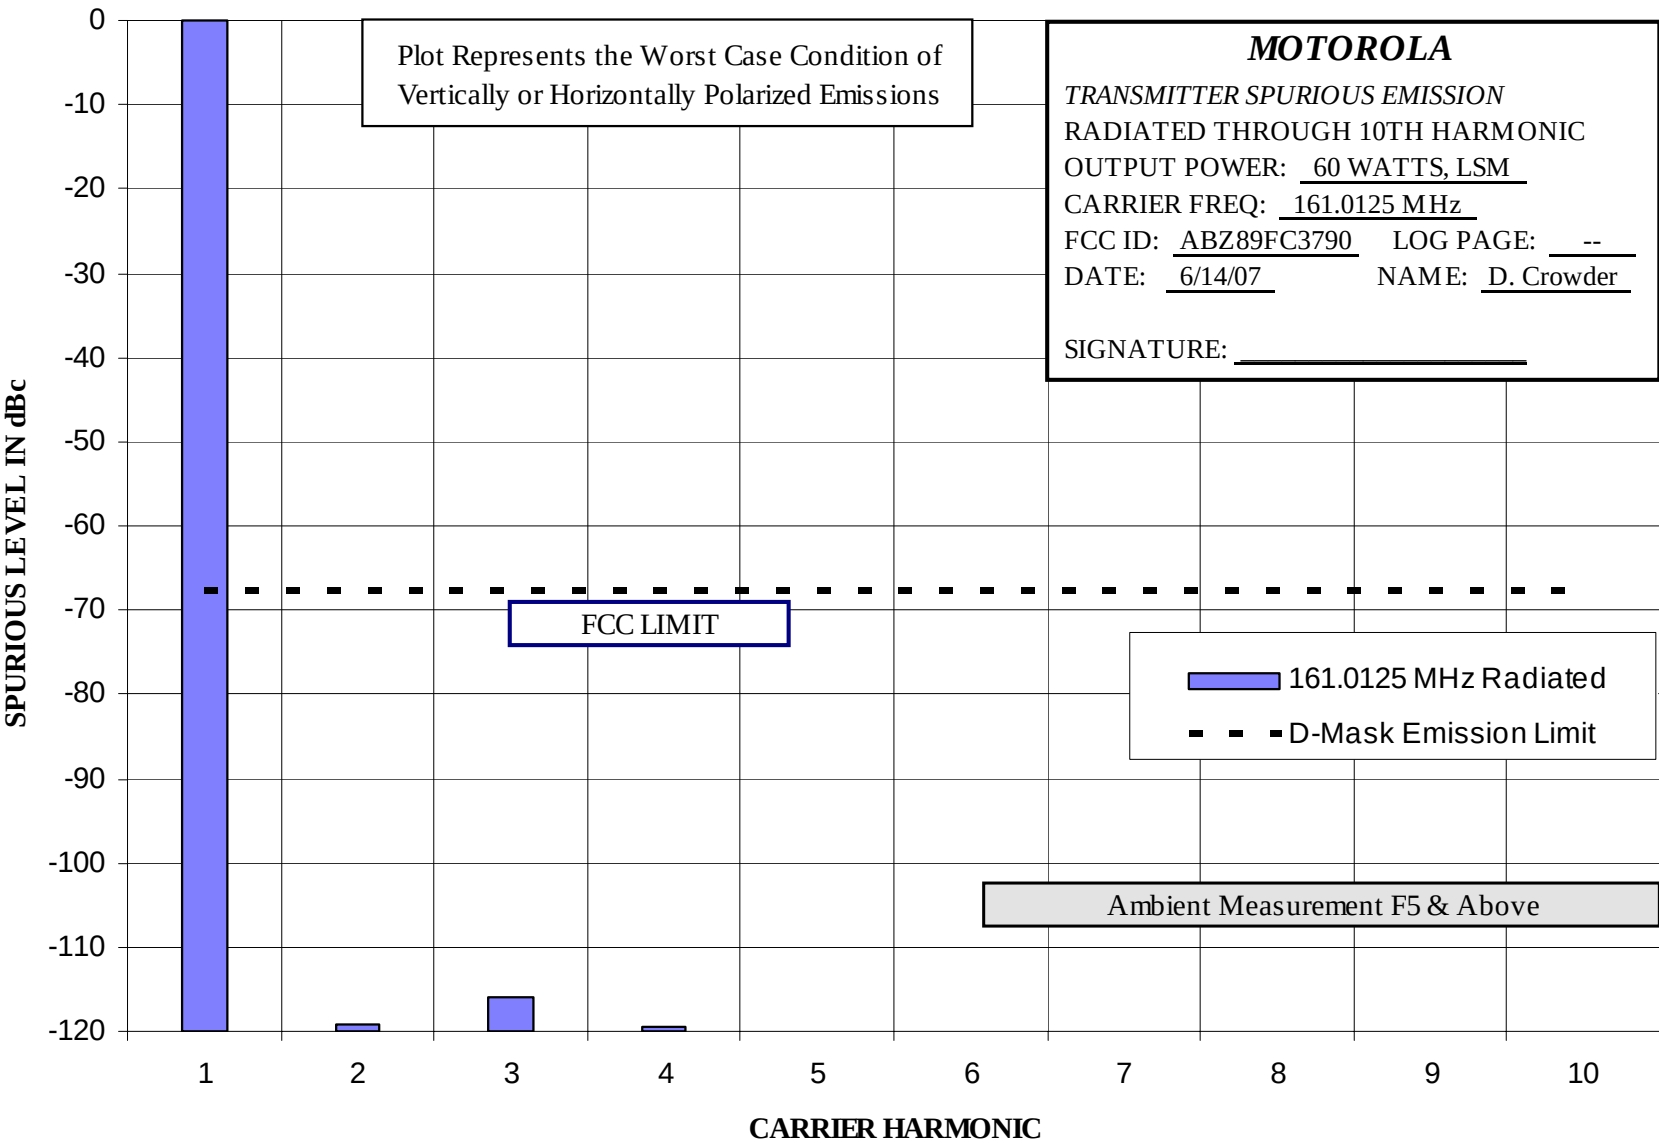





Report on Test Measurements  
 Radiated Emission – Harmonics – 2 Watts – Linear Simulcast Modulation (LSM)

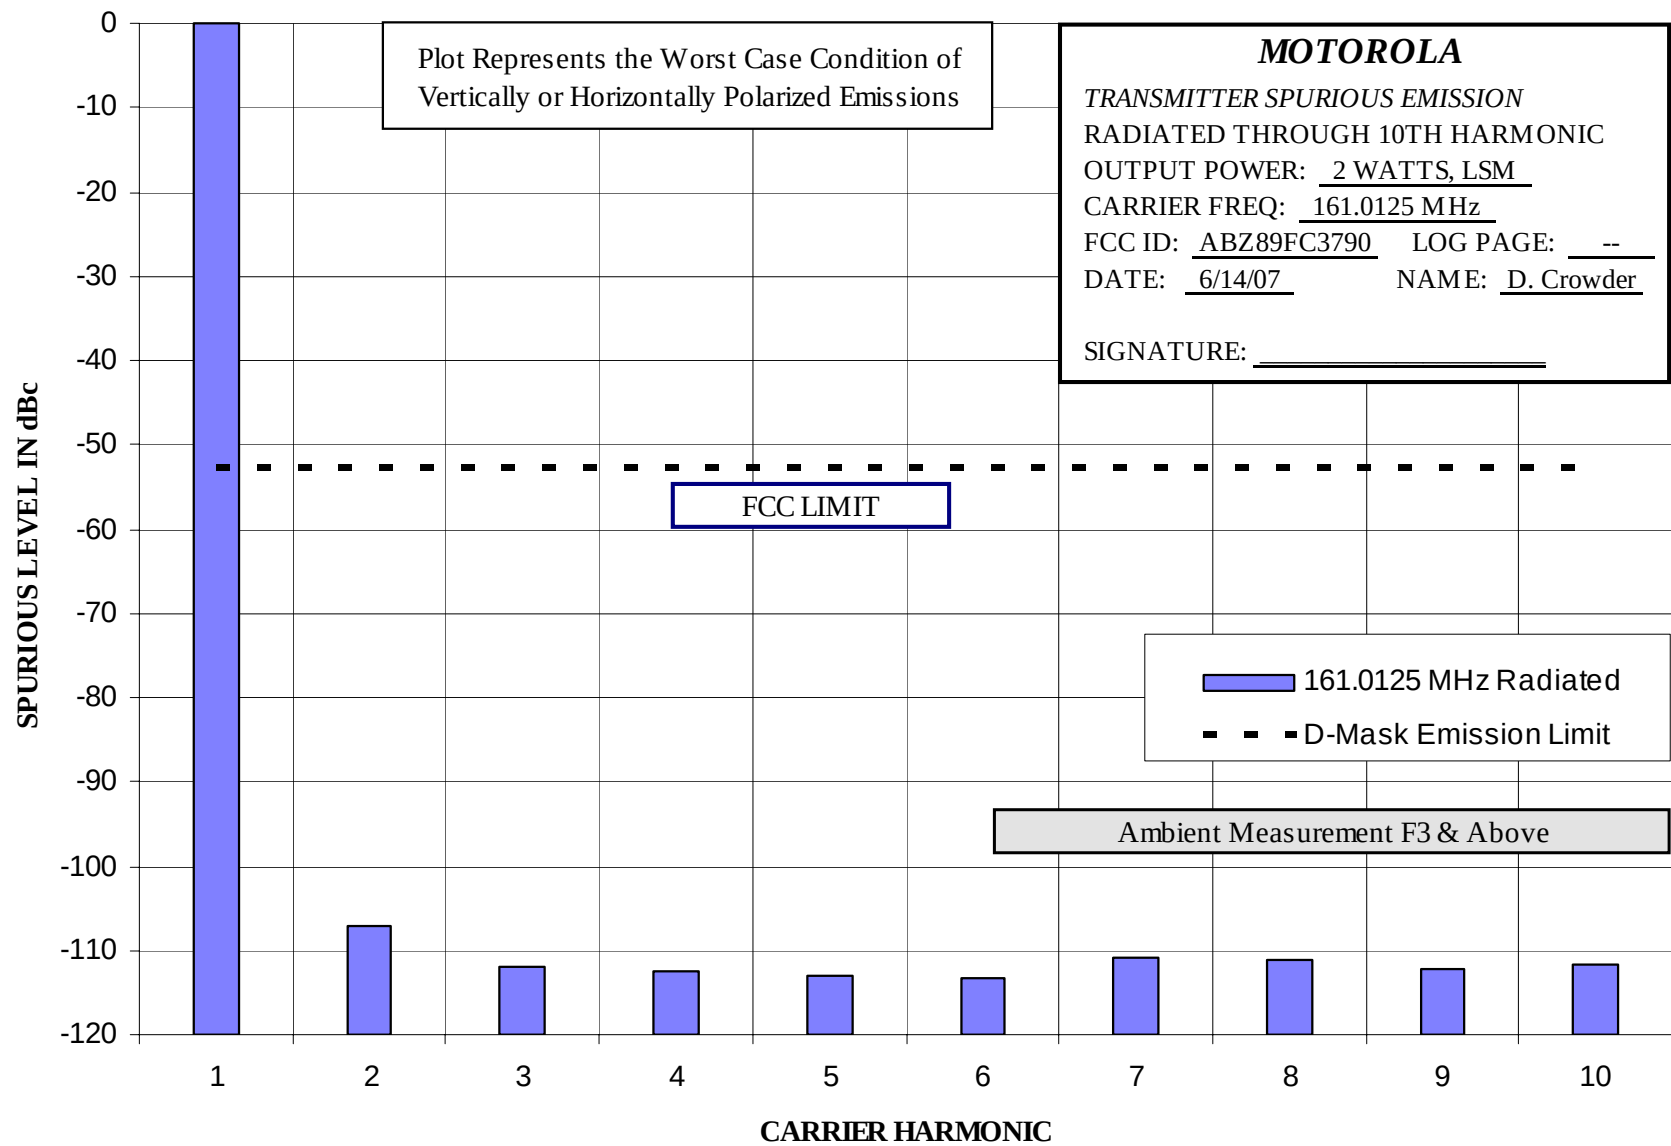

Report on Test Measurements  
 Radiated Emission – Harmonics – 100 Watts – Compatible 4-Level Frequency Modulation (C4FM)

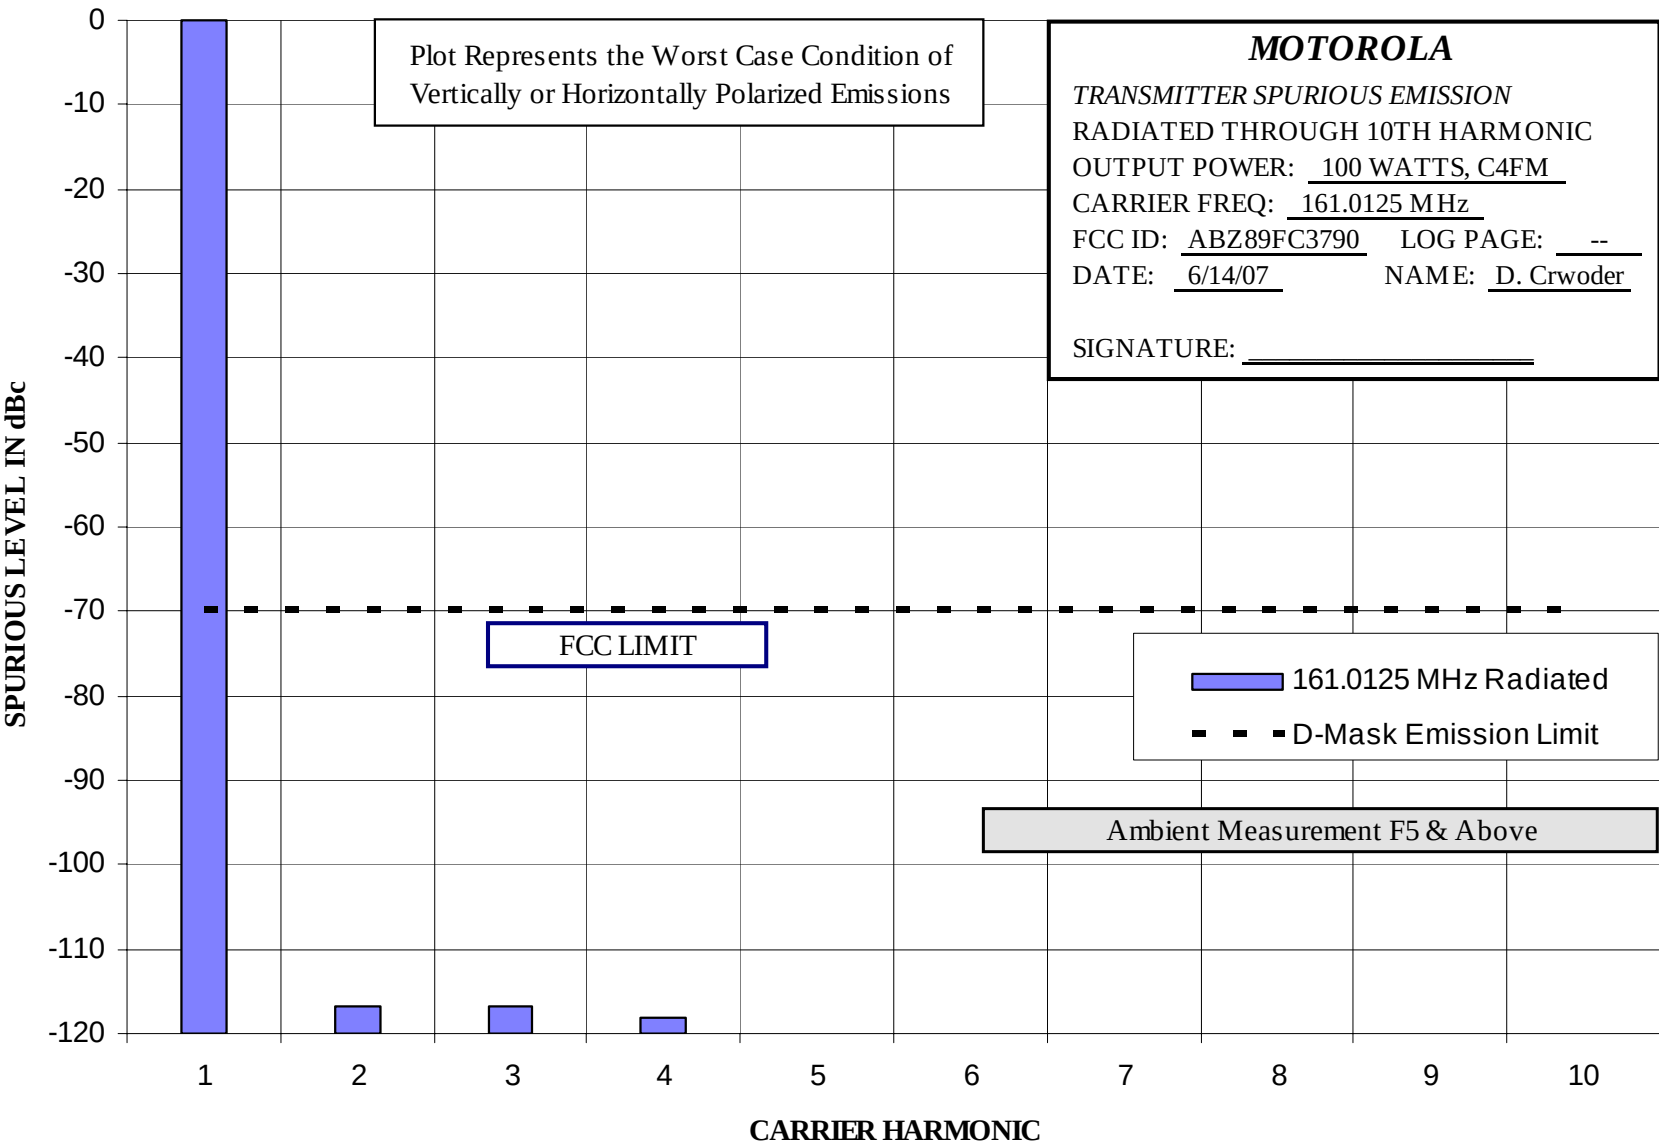

Report on Test Measurements  
 Radiated Emission – Harmonics – 2 Watts – Compatible 4-Level Frequency Modulation (C4FM)

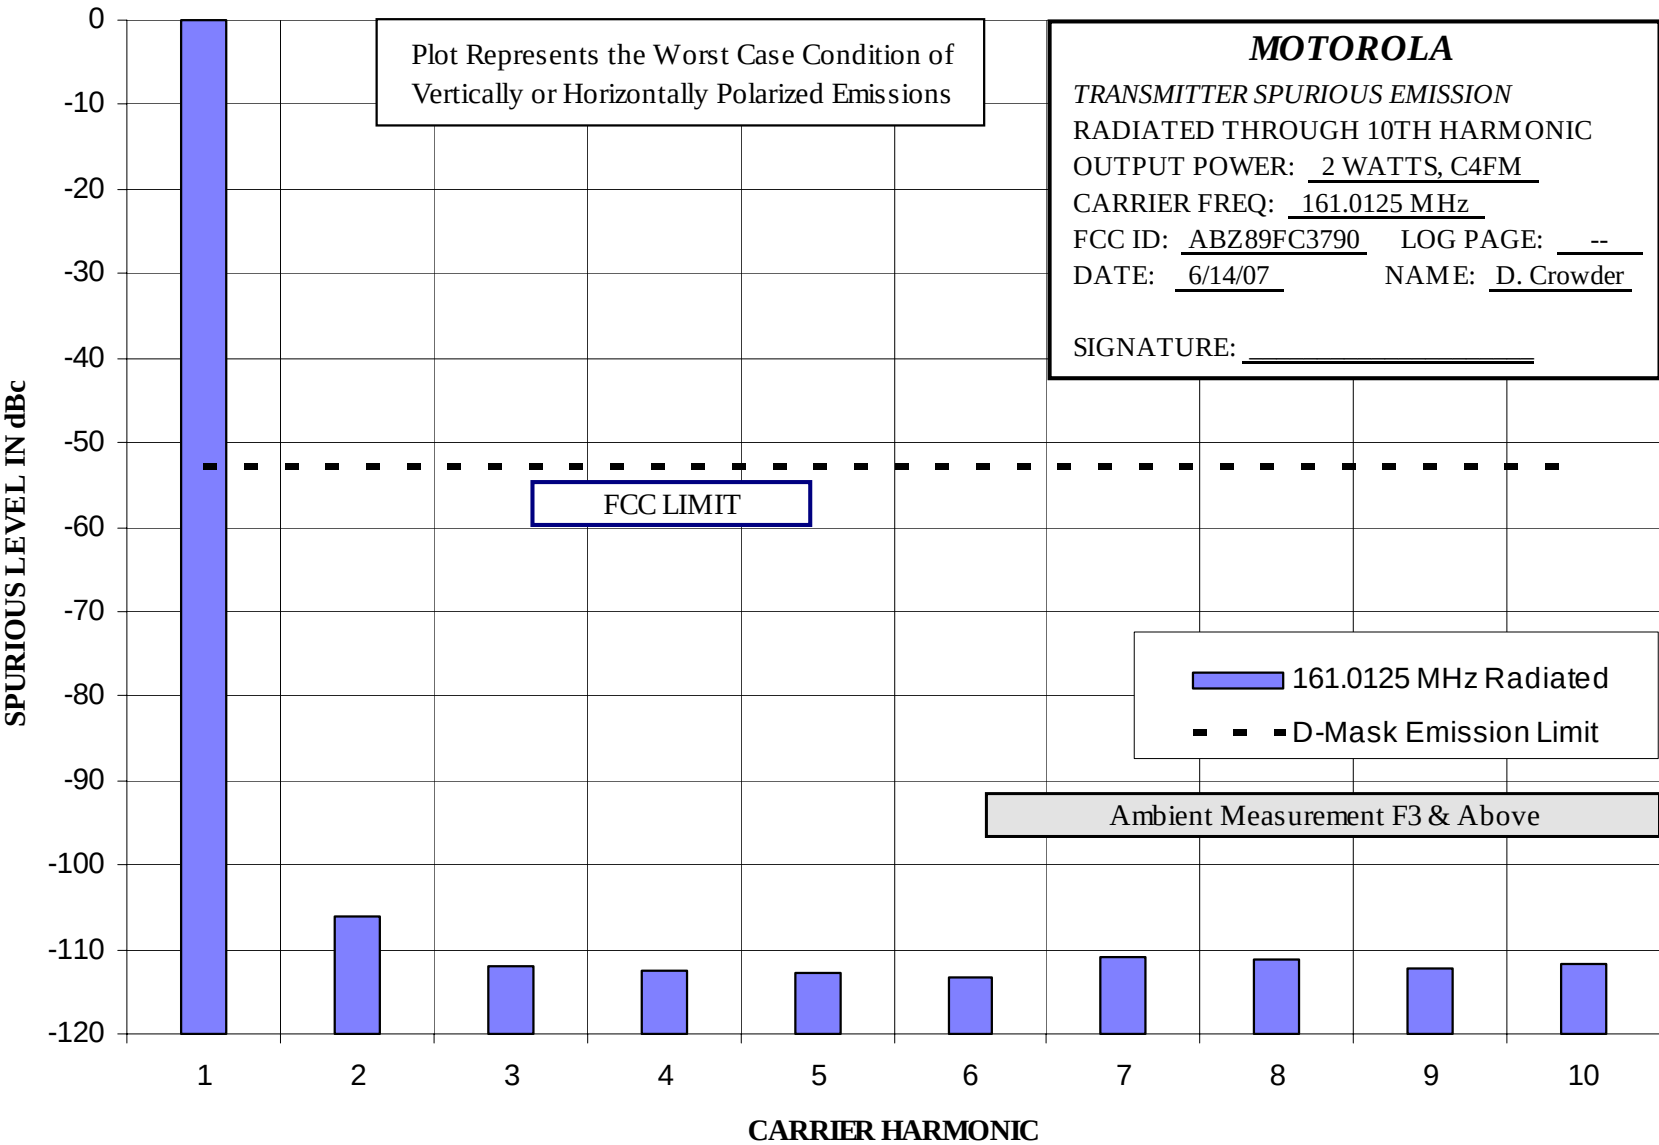

**Report on Test Measurements***Oscillator Frequency Stability*

Manufacturer data for the system site frequency standard was used in generation of the following frequency stability exhibits.


Specification Requirement: Reference Part 90.213

Fixed and Base stations operating at 150-174 MHz and 12.5 kHz channel bandwidth must have a frequency stability of better than +/- 2.5 PPM.

| <b>EXHIBIT</b> | <b>DESCRIPTION</b>                 |
|----------------|------------------------------------|
| E1-5.1         | Frequency Stability Vs Temperature |
| E1-5.2         | Frequency Stability Vs Voltage     |


Report on Test Measurements

Frequency Stability Vs Temperature

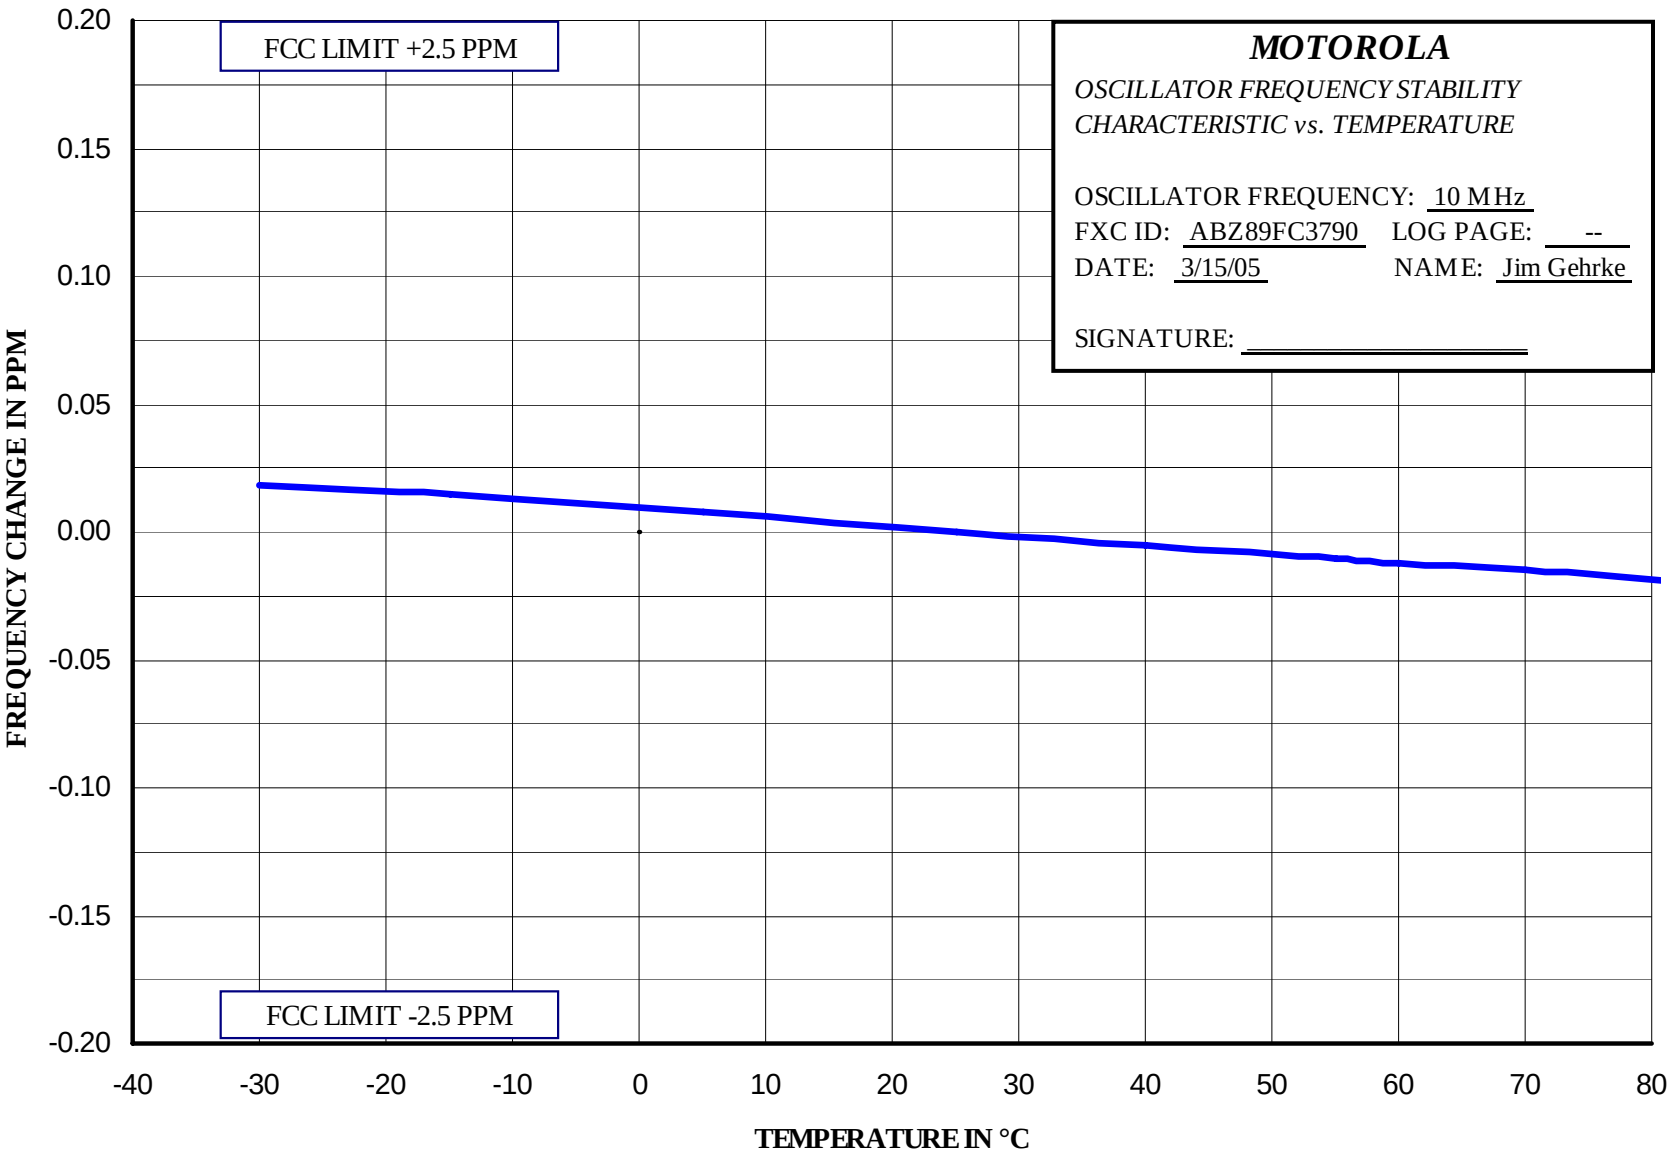

Report on Test Measurements

Frequency Stability Vs Voltage

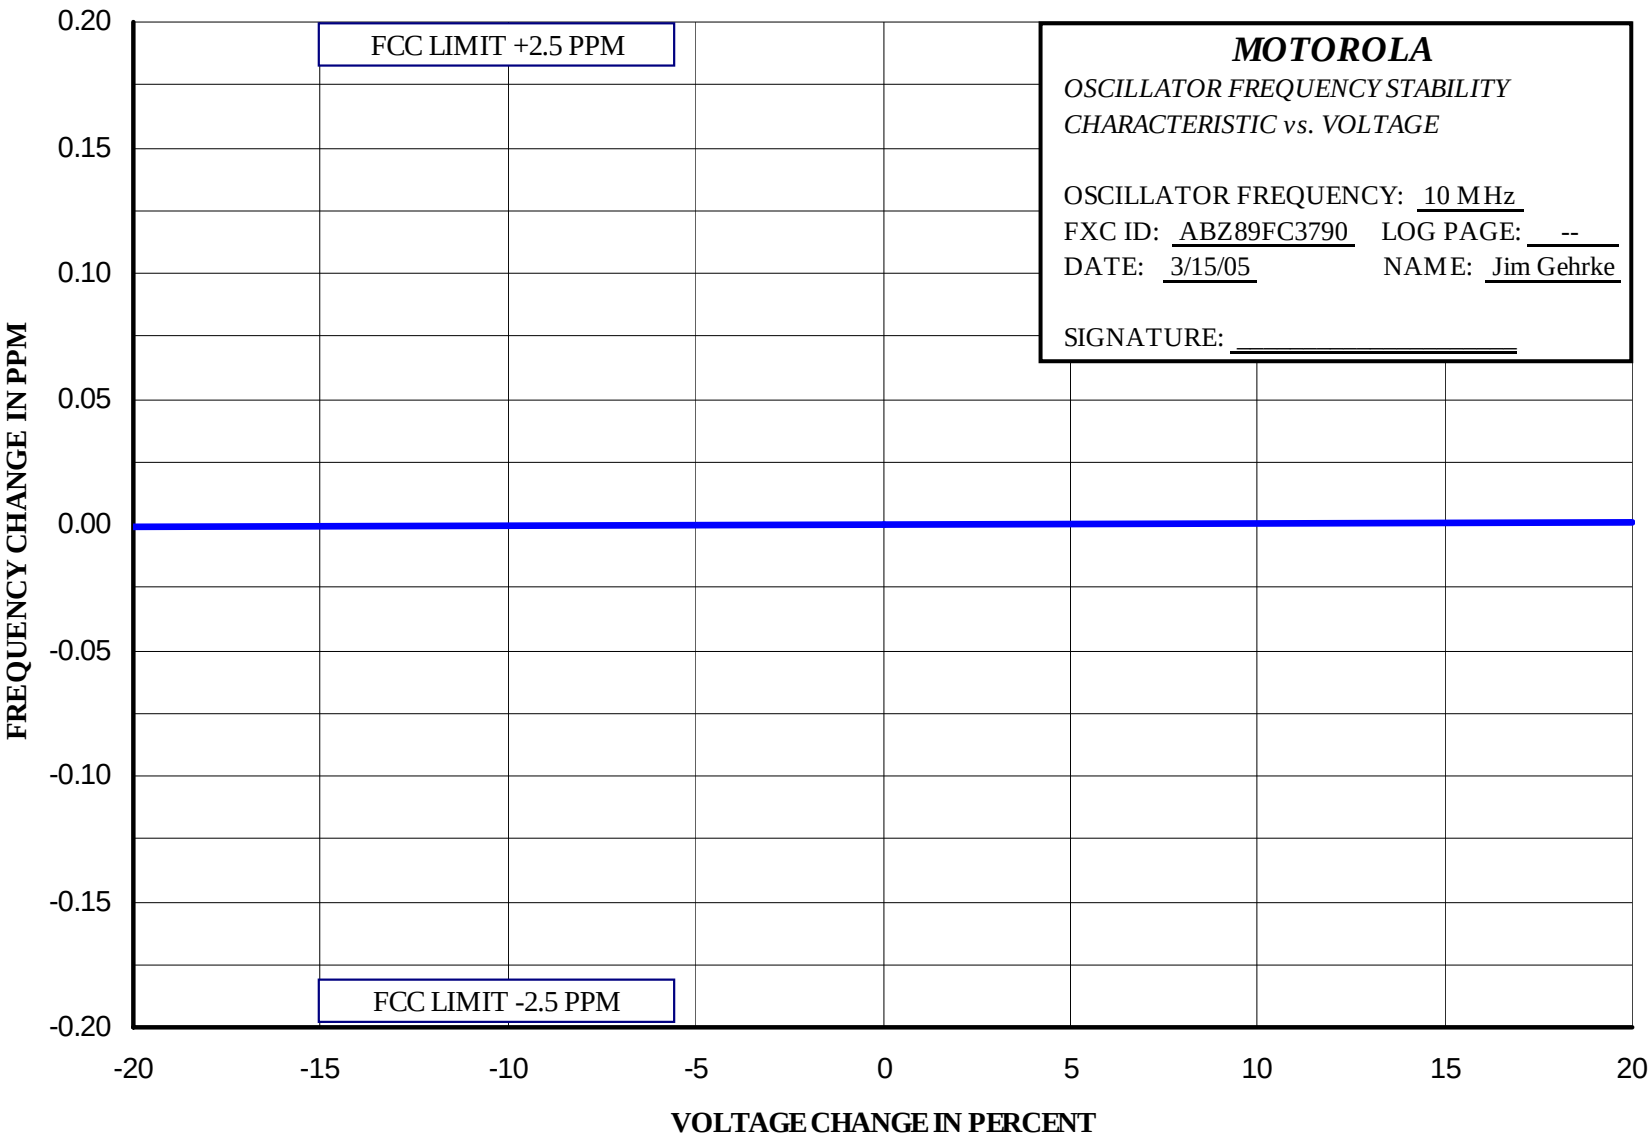

## Report on Test Measurements

*Frequency Transient Behavior*Specification Requirement: Reference Part 90.214

Transmitters designed to operate in the 150-174 MHz frequency band with 12.5 kHz channel operation must maintain transient frequencies within the maximum frequency difference limits during the time intervals indicated below:

Transient Frequency Behavior 12.5 kHz Channels

For time intervals:

- a.  $t_1 = 5$  ms                      Maximum Frequency Difference  $\pm 12.5$  kHz
- b.  $t_2 = 20$  ms                     Maximum Frequency Difference  $\pm 6.25$  kHz
- c.  $t_3 = 5$  ms                        Maximum Frequency Difference  $\pm 12.5$  kHz


Where  $t_1$  is the time period immediately following when the transmitter is turned on at  $t_{on}$ ,  $t_2$  is the time period immediately following  $t_1$ , and  $t_3$  is the time from when the transmitter is turned off at  $t_{off}$ .

Modulation:                      Compatible 4-Level Frequency Modulation (C4FM) – Pseudorandom data  
Carrier Frequencies:          Carrier frequencies of 150.0125, 162.0125, and 173.9875 MHz were measured. These frequencies represent the low end, center, and high end of the 150-174 MHz (Part 90) operating band

| EXHIBIT | DESCRIPTION                                                             |
|---------|-------------------------------------------------------------------------|
| E1-6.1  | Frequency Transient Behavior, 12.5 kHz Channel Key-Up, Low End of Band  |
| E1-6.2  | Frequency Transient Behavior, 12.5 kHz Channel Key-Up, Middle of Band   |
| E1-6.3  | Frequency Transient Behavior, 12.5 kHz Channel Key-Up, High End of Band |
| E1-6.4  | Frequency Transient Behavior, 12.5 kHz Channel De-key, Low End of Band  |
| E1-6.5  | Frequency Transient Behavior, 12.5 kHz Channel De-key, Middle of Band   |
| E1-6.6  | Frequency Transient Behavior, 12.5 kHz Channel De-key, High End of Band |


The unit was tested at various power levels across the operating range. Power level was found to be irrelevant to performance according to this standard.

Frequency Transient – Key-up – Low End of Band

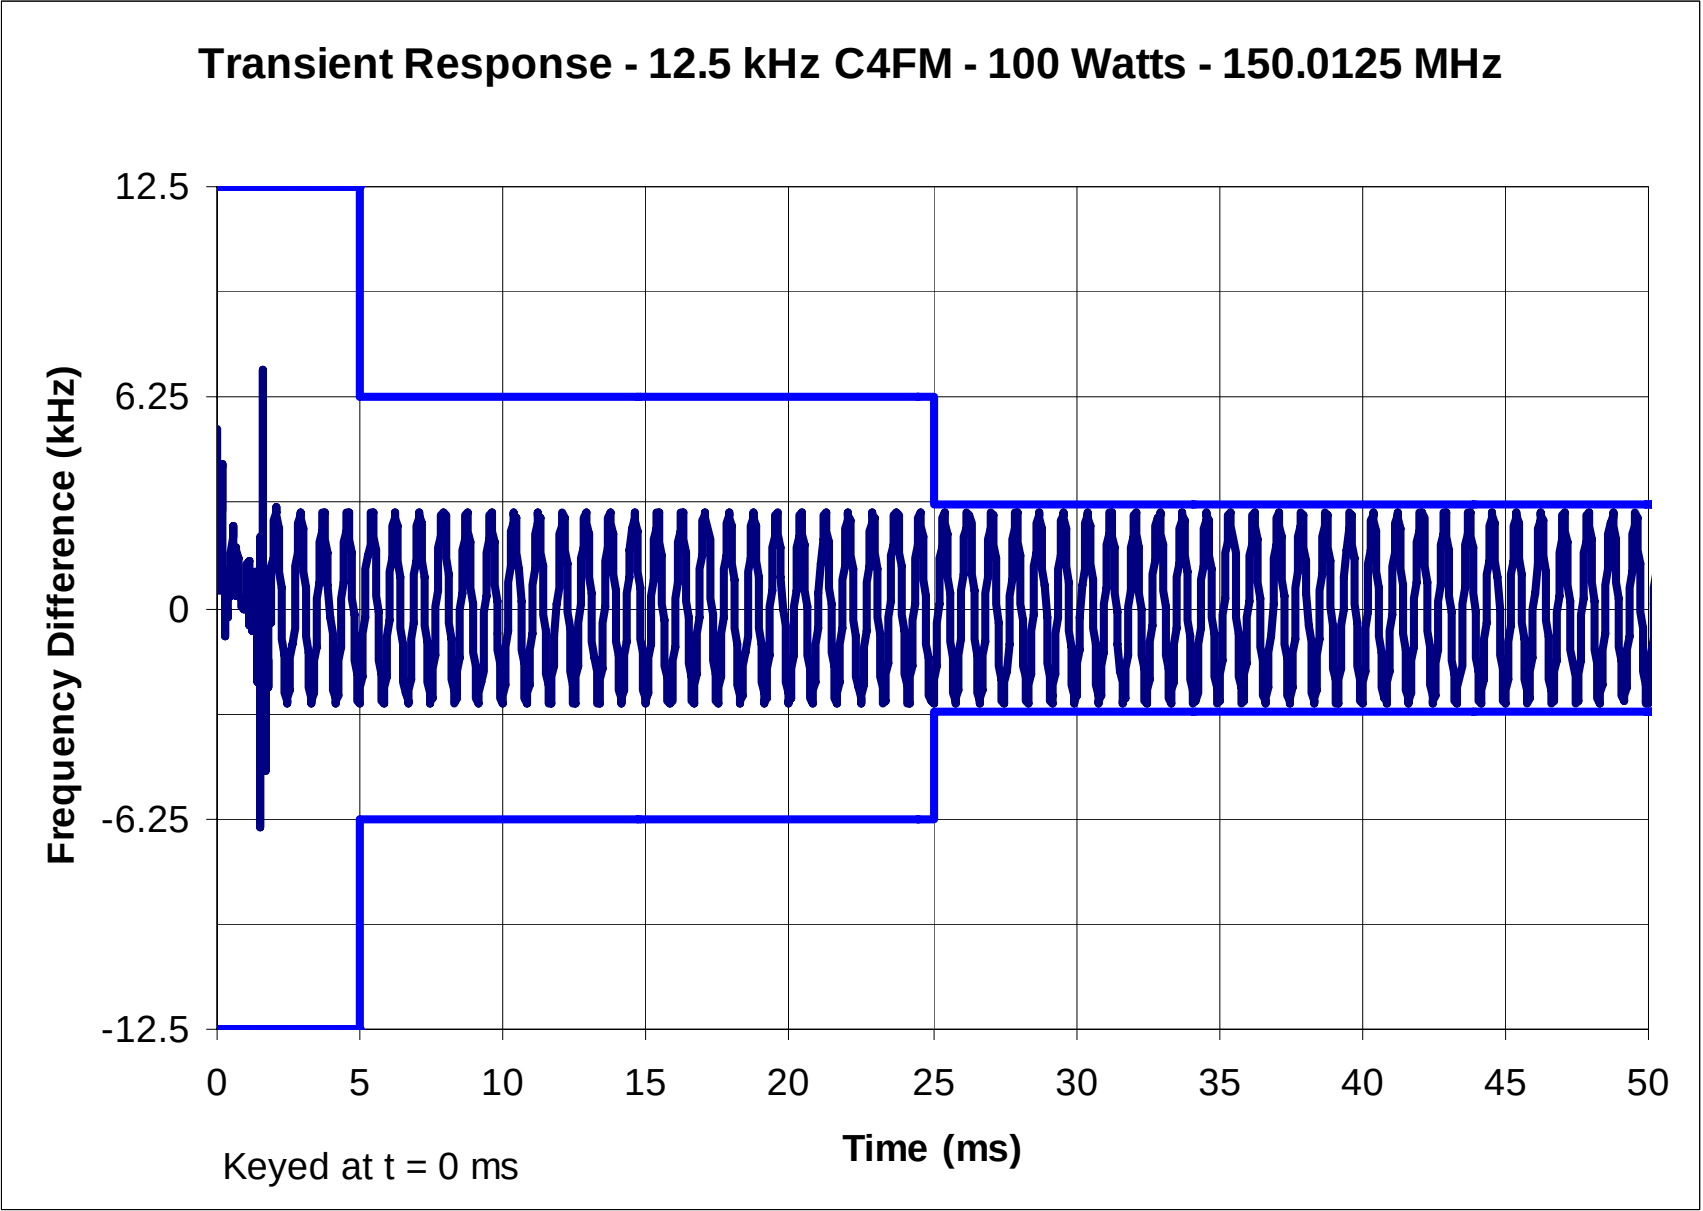





Frequency Transient – Key-up – Middle of Band

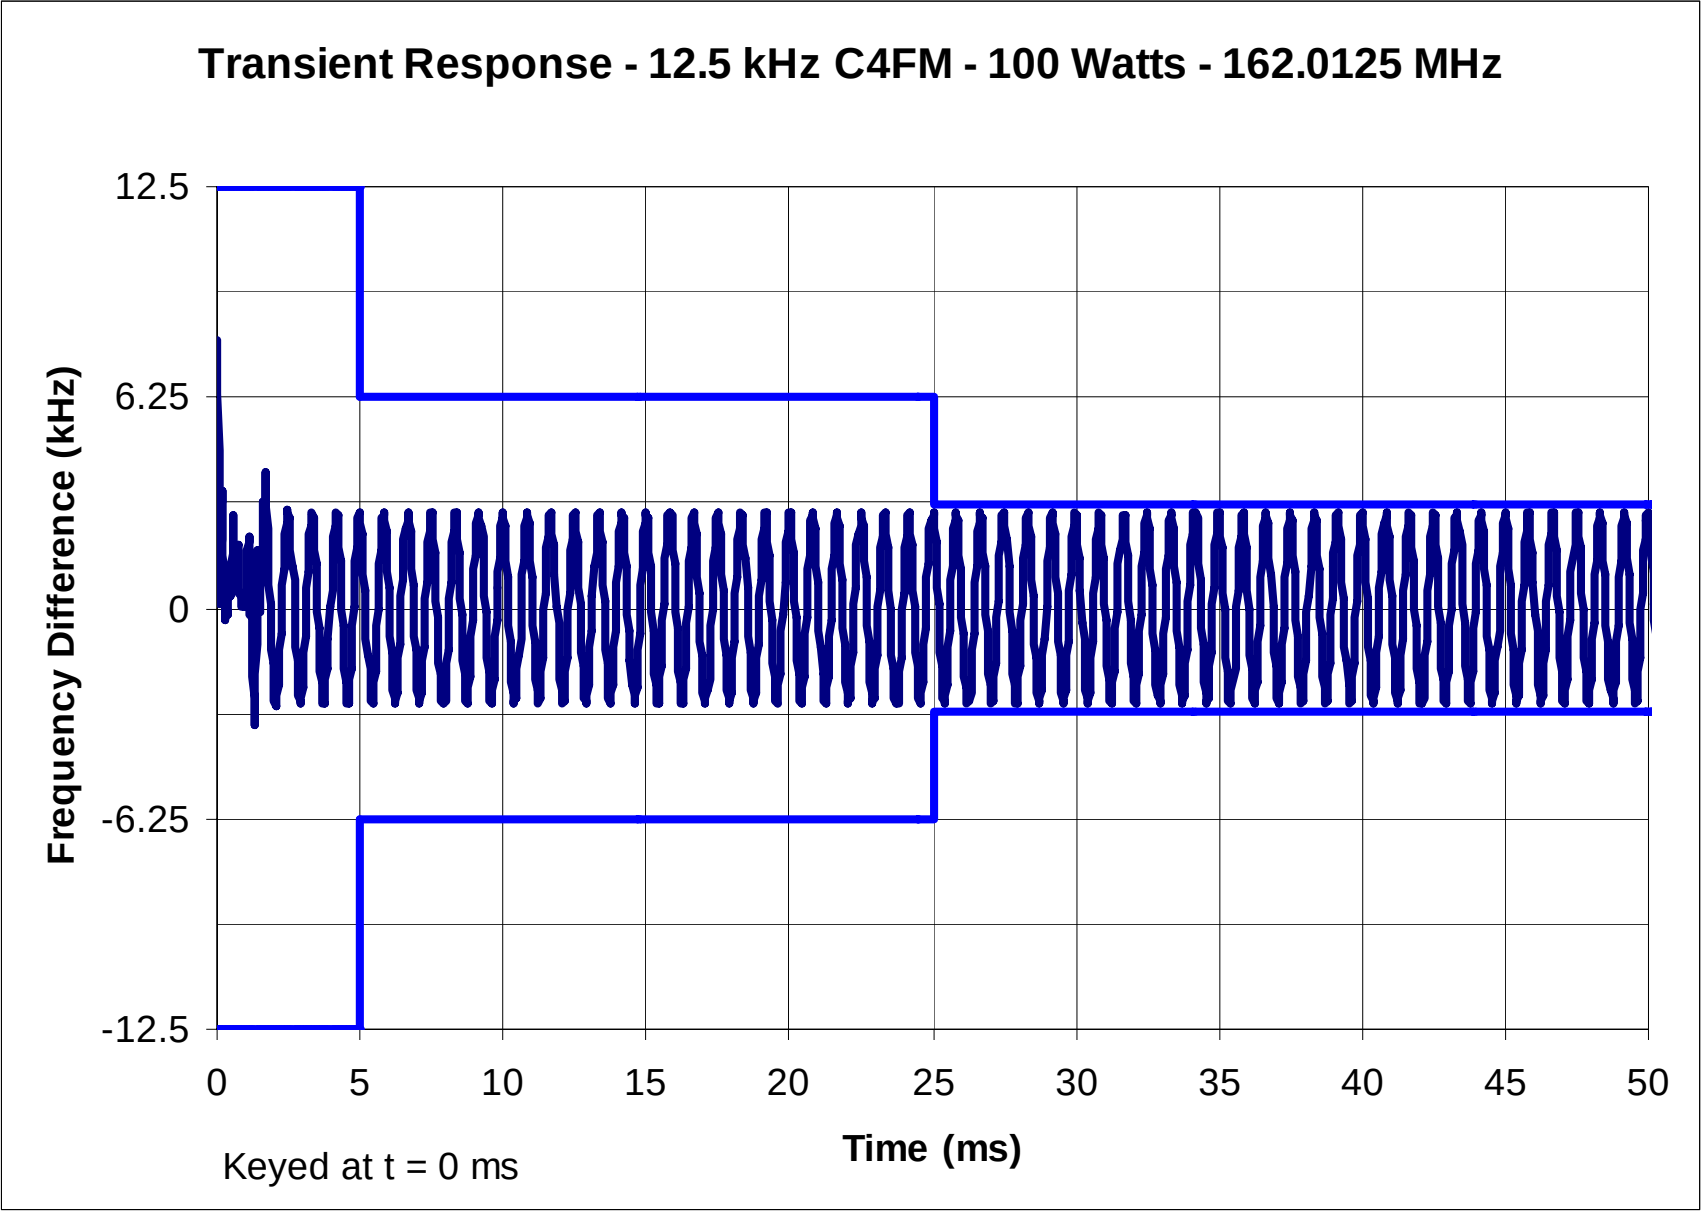


Frequency Transient – Key-up – High End of Band

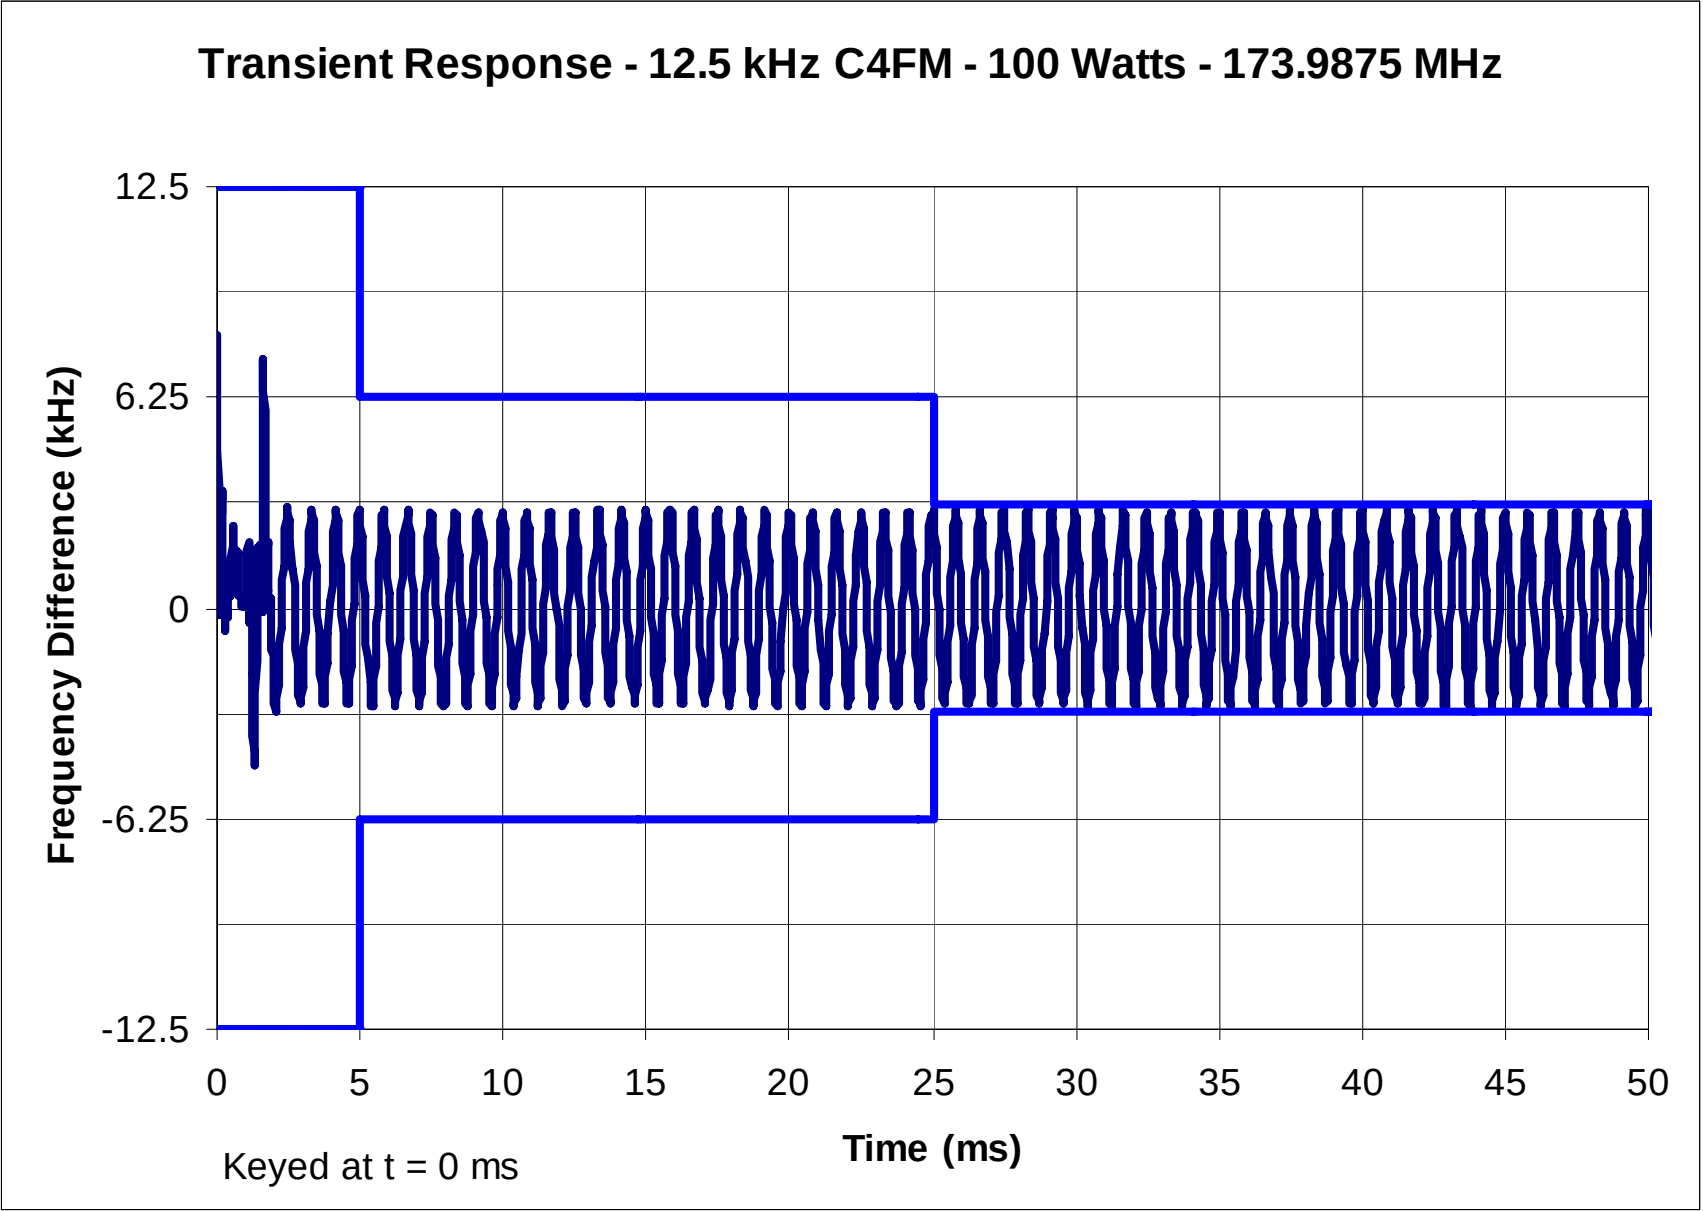


Frequency Transient – De-key – Low End of Band

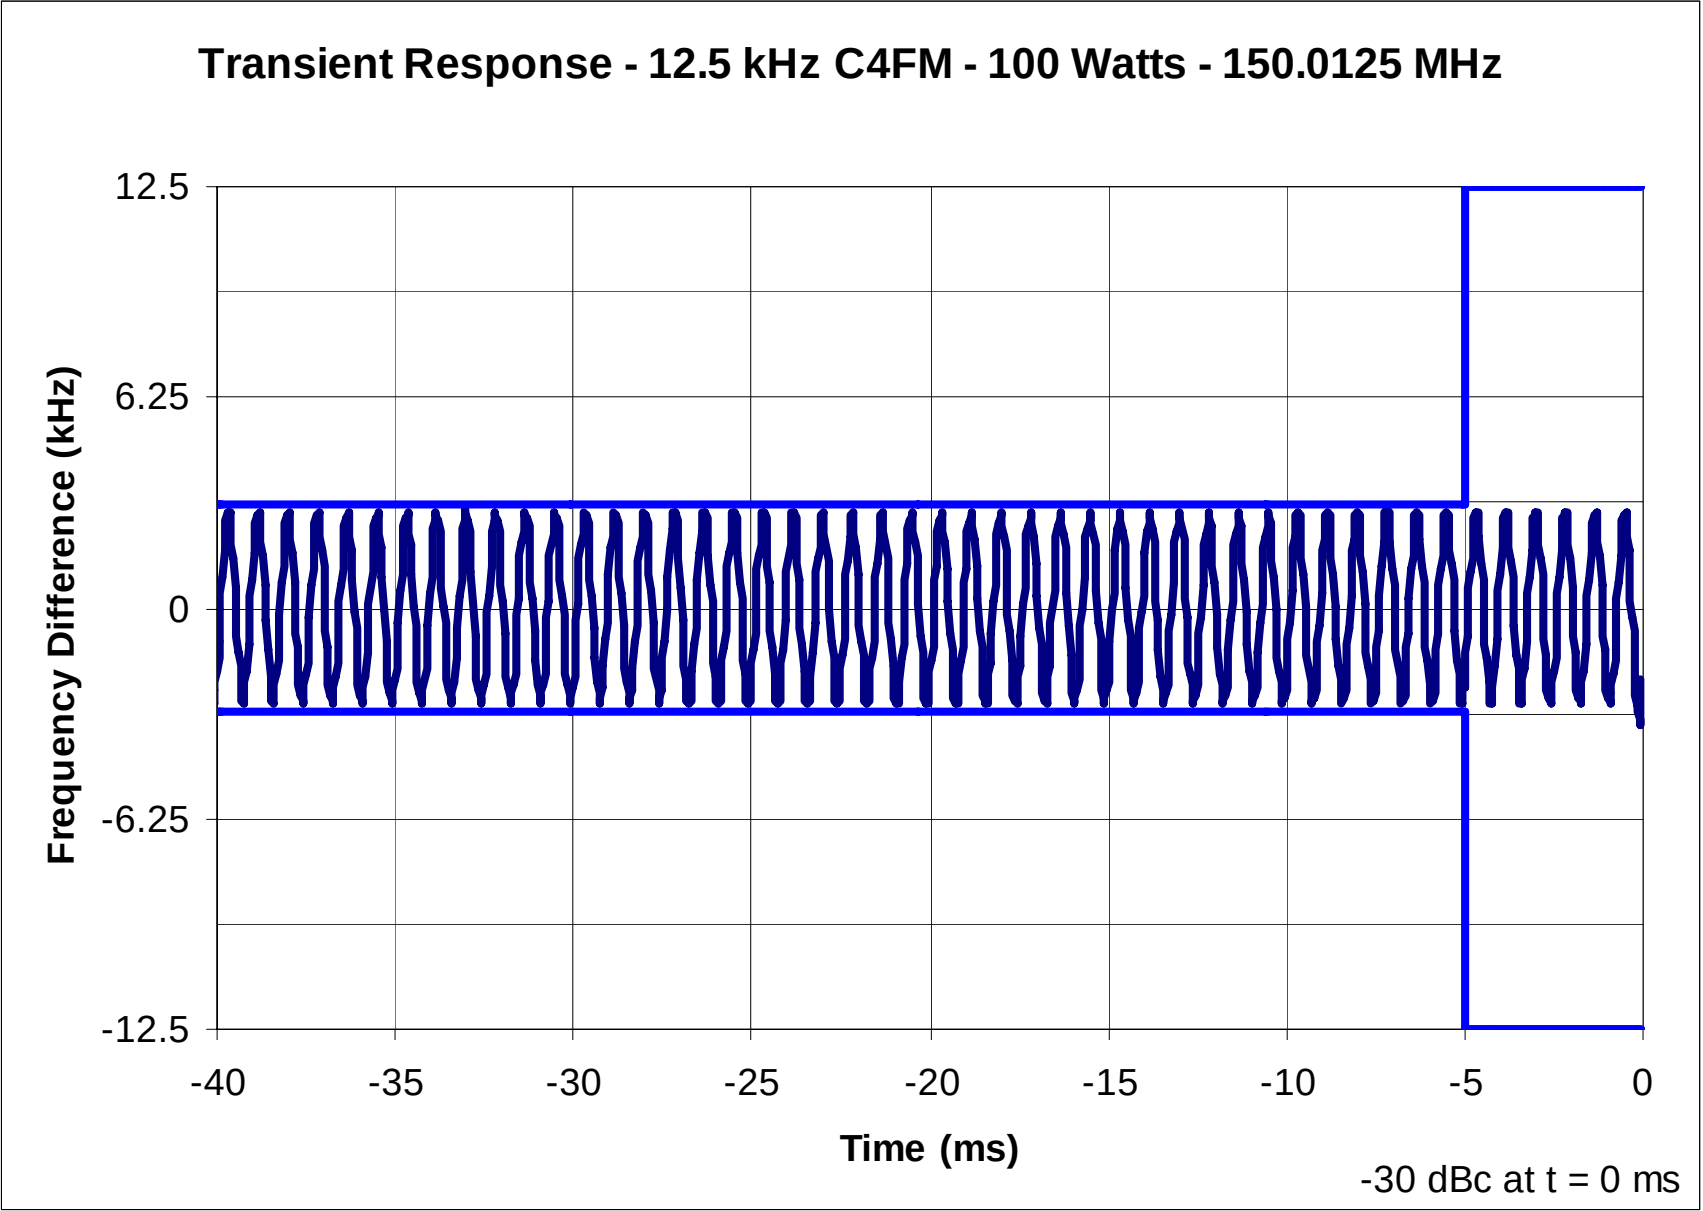

Frequency Transient – De-key – Middle of Band

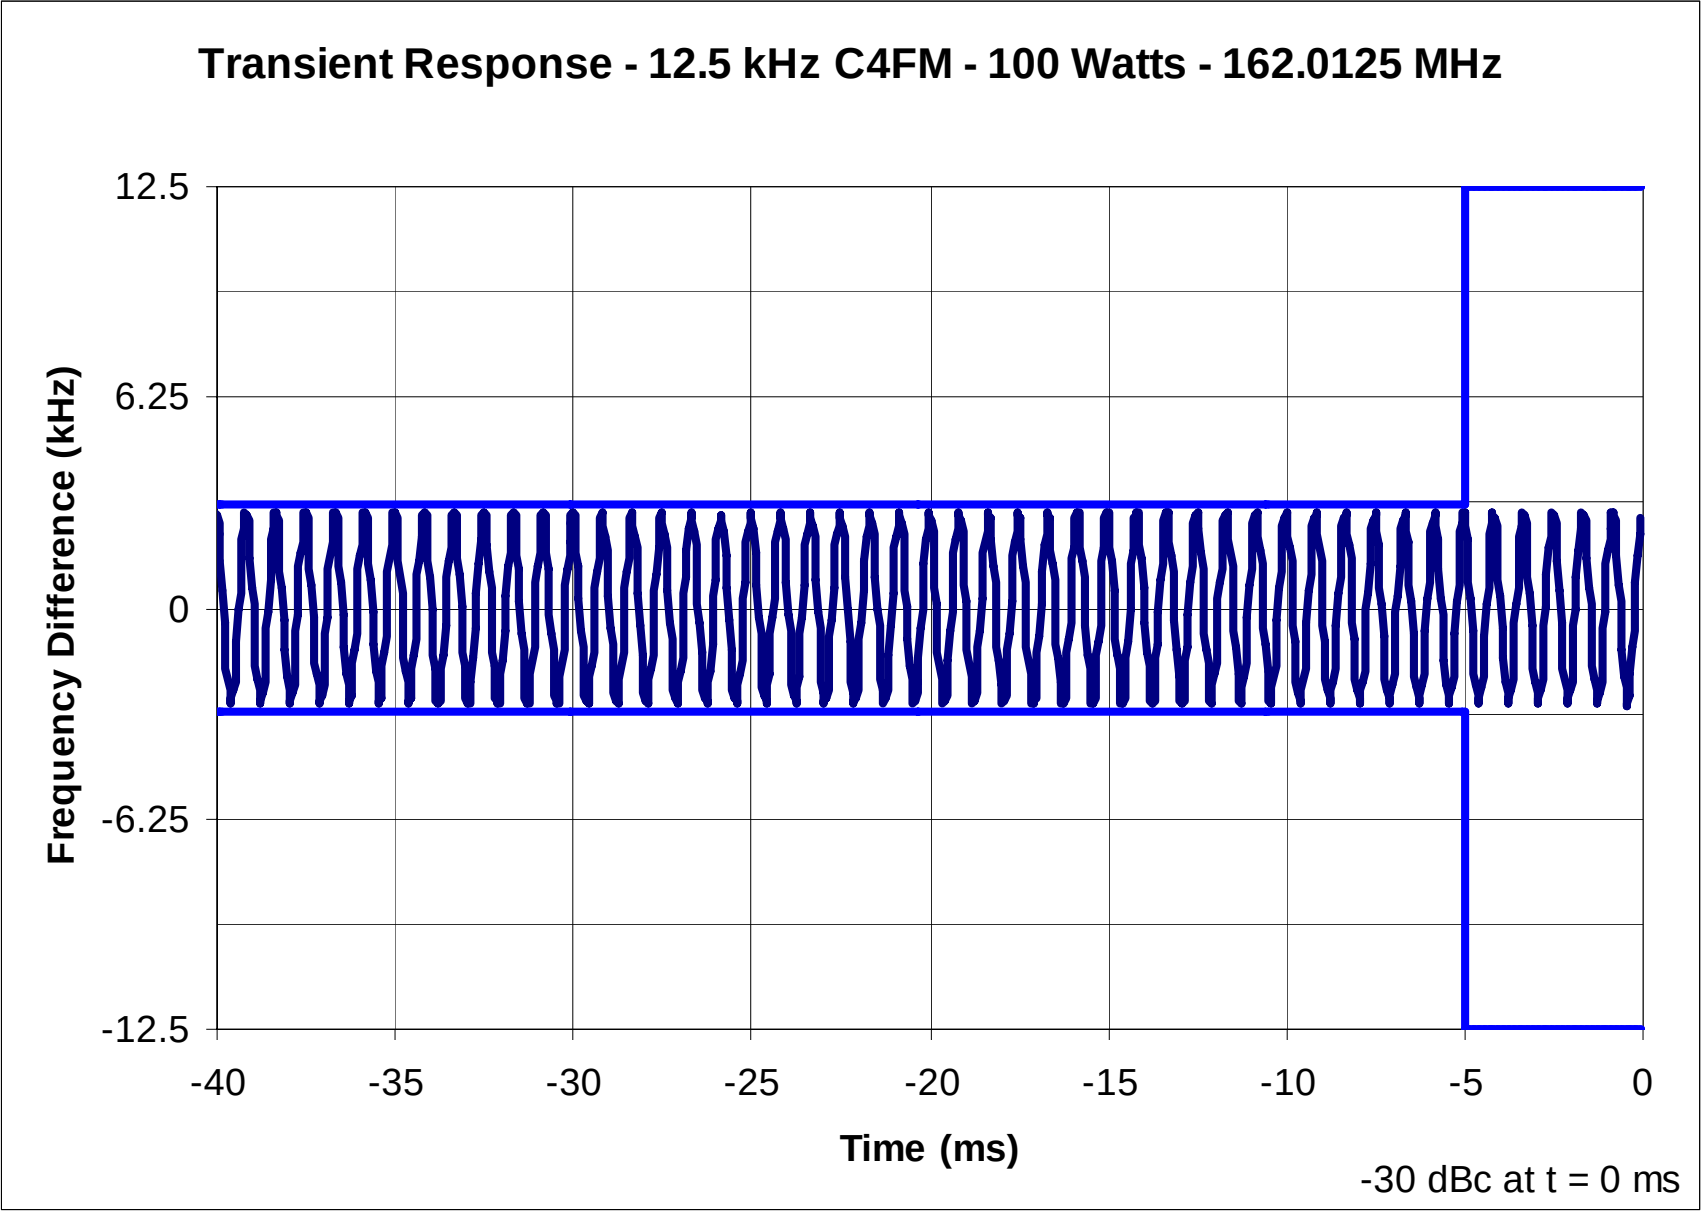

Frequency Transient – De-key – High End of Band

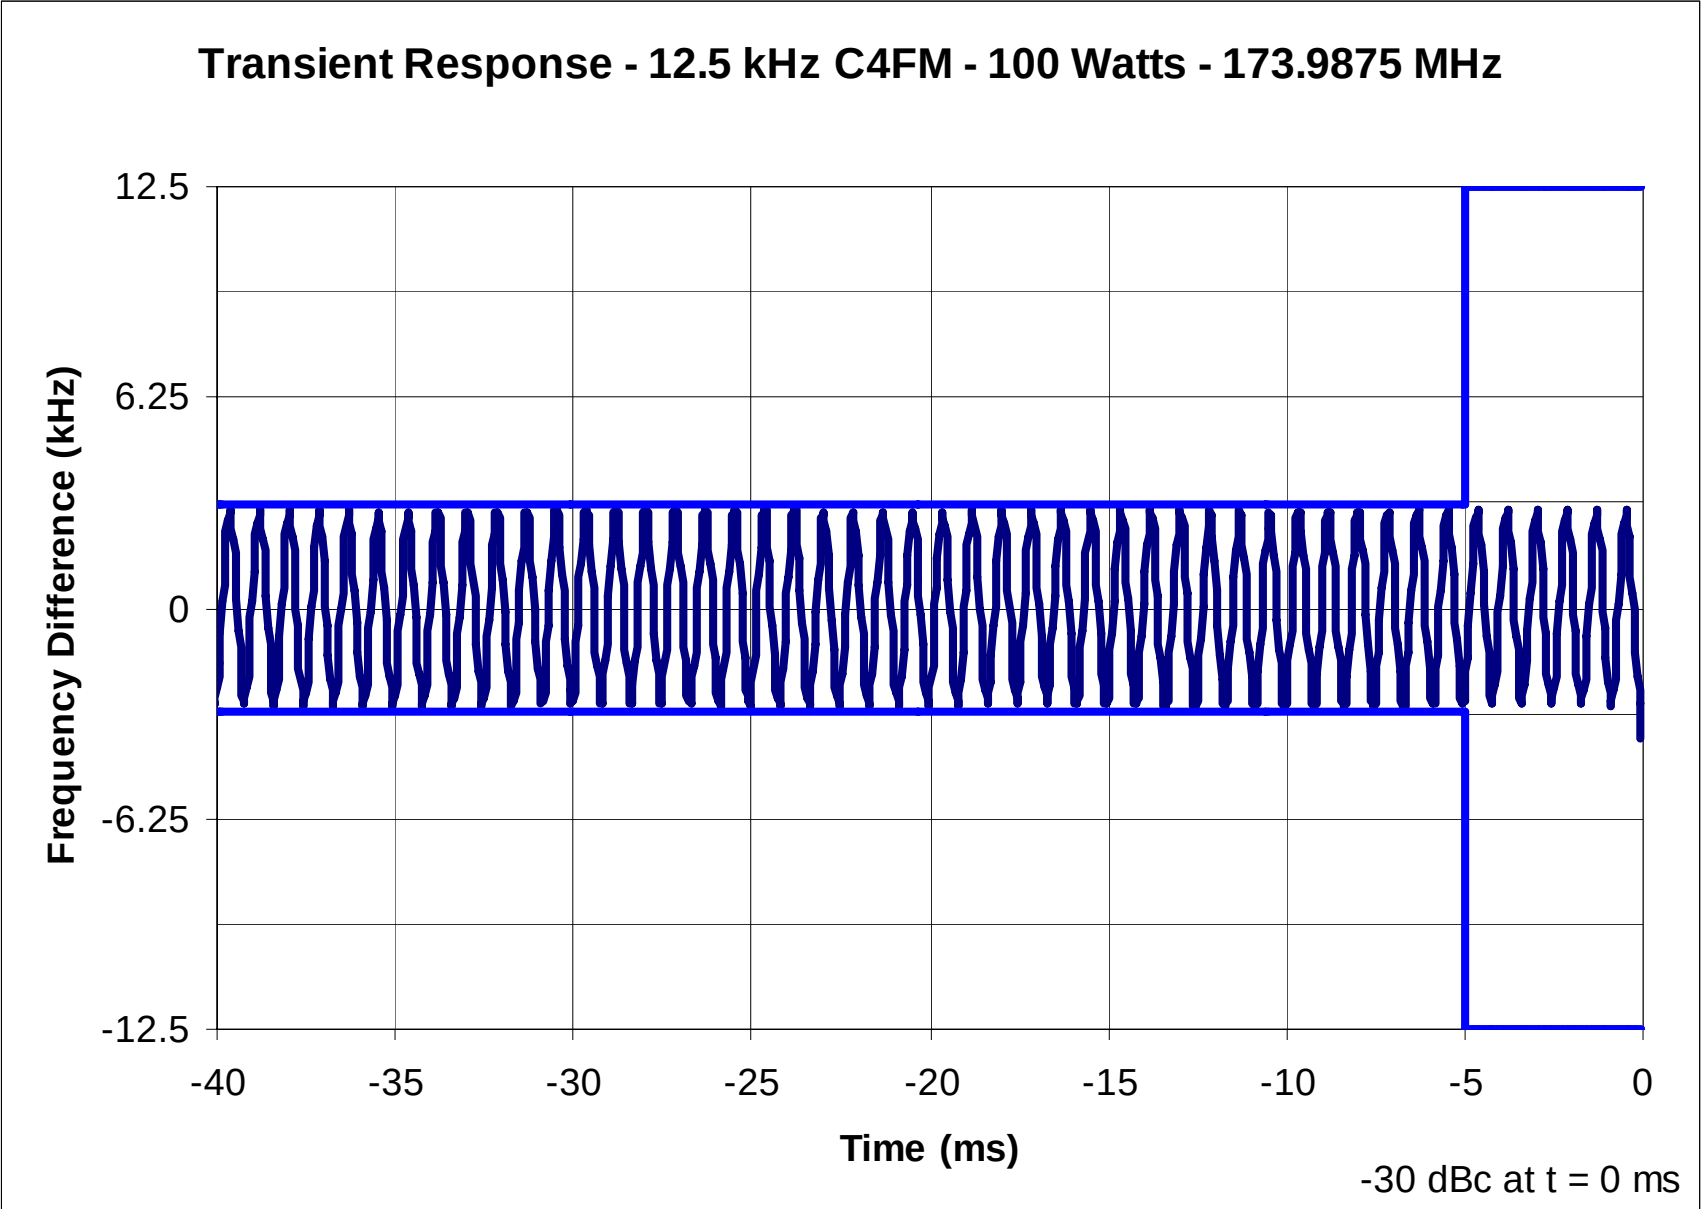

## Report on Test Measurements

## Test Equipment List

| MODEL       | MANUFACTURER              | DESCRIPTION              | Serial No. | Last Cal                | Next Cal |
|-------------|---------------------------|--------------------------|------------|-------------------------|----------|
| 438A        | Hewlett Packard           | RF Power Meter           | 3513U06093 | 10/24/05                | 10/24/08 |
| 8481A       | Hewlett Packard           | RF Power Sensor          | 3318A90348 | 11/19/04                | 11/19/07 |
| E4443A      | Agilent                   | Spectrum Analyzer        | MY43360090 | 12/05/06                | 12/05/07 |
| 83712A      | Hewlett Packard           | Signal Generator         | 3429A00455 | no calibration required |          |
| 8671B       | Hewlett Packard           | Signal Generator         | 2611A00159 | 11/08/04                | 11/08/07 |
| 85460A      | Hewlett Packard           | EMI Analyzer, Filter     | 3704A00467 | 11/03/06                | 11/03/09 |
| 85462A      | Hewlett Packard           | EMI Analyzer, RF/Display | 3906A00500 | 11/03/06                | 11/03/09 |
| 89441A      | Hewlett Packard           | Vector Signal Analyzer   | US39312617 | 10/24/06                | 10/24/09 |
| (Various)   | Weinschel, Kathrein, Bird | RF Loads                 | Various    | no calibration required |          |
| 89-37-06-CM | Tx/Rx System inc          | Cavity                   | 9666A      | no calibration required |          |
| 3020A, etc. | Narda                     | Directional Coupler      | Various    | no calibration required |          |

ELITE ELECTRONIC ENG. INC.

Page: 1

| Eq ID | Equipment Description    | Manufacturer    | Model No.    | Serial No. | Frequency Range | Cal Date | Cal Inv | Due Date |
|-------|--------------------------|-----------------|--------------|------------|-----------------|----------|---------|----------|
| XPQ3  | HIGH PASS FILTER         | K&L MICROWAVE   | 4IH30-1804/T | 4          | 1.8GHZ-10GHZ    |          | 12      |          |
| XZG4  | ATTENUATOR/SWITCH DRIVER | HEWLETT PACKARD | 11713A       | 2223A01683 | ---             |          | N/A     |          |
| APK4  | PREAMPLIFIER OPT H02     | HEWLETT PACKARD | 8449B        | 3008A00329 | 1-26.5GHZ       | 03/12/07 | 12      | 03/12/08 |
| NDQ1  | TUNED DIPOLE ANTENNA     | EMCO            | 3121C-DB4    | 313        | 400-1000MHZ     | 03/28/07 | 12      | 03/28/08 |
| NTA0  | BILOG ANTENNA            | CHASE EMC LTD.  | BILOG CBL611 | 2057       | 0.03-2GHZ       | 08/21/06 | 12      | 08/21/07 |
| NWF0  | RIDGED WAVE GUIDE        | EMCO            | 3105         | 2035       | 1-12.4GHZ       | 10/09/06 | 12      | 10/09/07 |
| T1EA  | 10DB, 25W ATTENUATOR     | WEINSCHTEL      | 46-10-34     | BN2316     | DC-18GHZ        | 03/22/07 | 12      | 03/22/08 |
| CDS2  | COMPUTER                 | GATEWAY         | MFATXPNT NMZ | 0028483108 | 1.8GHZ          |          | N/A     |          |
| PLL9  | 50UH LISN 462D           | ELITE           | 462D/70A     | 010        | 0.01-400MHZ     | 03/08/07 | 12      | 03/08/08 |
| PLLA  | 50UH LISN 462D           | ELITE           | 462D/70A     | 011        | 0.01-400MHZ     | 03/08/07 | 12      | 03/08/08 |
| HRE1  | LASER JET 5P             | HEWLETT PACKARD | C3150A       | USHB061052 | ---             |          | N/A     |          |
| RACA  | RF PRESELECTOR           | HEWLETT PACKARD | 85685A       | 2926A00980 | 20HZ-2GHZ       | 02/16/07 | 12      | 02/16/08 |
| RAEC  | SPECTRUM ANALYZER        | HEWLETT PACKARD | 8566B        | 3014A06690 | 100HZ-22GHZ     | 02/16/07 | 12      | 02/16/08 |
| RAF5  | QUASIPK ADAPTOR W/ RECEI | HEWLETT PACKARD | 85650A       | 2043A00151 | 0.01-1000MHZ    | 02/16/07 | 12      | 02/16/08 |

Cal. Interval: Listed in Months I/O: Initial Only N/A: Not Applicable

Note 1: For the purpose of this test, the equipment was calibrated over the specified frequency range, pulse rate, or modulation prior to the test or monitored by a calibrated instrument.

Report on Test Measurements

*Statement of Certification*

The technical data supplied with this application, having been taken under my supervision is hereby duly certified. The following is a statement of my qualifications:

College Degree: BSEE, Valparaiso University, Valparaiso, Indiana, USA  
MSEE, Illinois Institute of Technology, Chicago, Illinois, USA

25 years of Design and Development experience in the field of two-way radio communication.

NAME: Ken Weiss


SIGNATURE: 

DATE: August 2, 2007

POSITION: Senior Staff Engineer

I hereby certify that the above application was prepared under my direction and that to the best of my knowledge and belief, the facts set forth in the application and accompanying technical data are true and correct:

NAME: Ali Sajanlal

SIGNATURE: 

DATE: August 2, 2007

POSITION: Engineering Section Manager