

**Test Report No. 7191132607-EEC16/04**  
dated 15 Mar 2016



PSB Singapore

**Note:** This report is issued subject to the Testing and Certification Regulations of the TÜV SÜD Group and the General Terms and Conditions of Business of TÜV SÜD PSB Pte Ltd. In addition, this report is governed by the terms set out within this report.

Choose certainty.  
Add value.

FORMAL REPORT ON TESTING IN ACCORDANCE WITH  
47 CFR FCC Parts 15B & C  
OF A  
**CD STEREO SYSTEM**  
[ Model : SC-AKX640 ]  
[ FCC ID : ACJ-B21R1401 ]

**TEST FACILITY** TÜV SÜD PSB Pte Ltd  
Electrical & Electronics Centre (EEC), Product Services,  
No. 1 Science Park Drive, Singapore 118221

**FCC REG. NO.** 99142 (3m and 10m Semi-Anechoic Chamber, Science Park)

**IND. CANADA REG. NO.** 2932I-1 (3m and 10m Semi-Anechoic Chamber, Science Park)

**PREPARED FOR** Panasonic AVC Networks Singapore  
202, Bedok South Avenue 1  
Singapore 469332  
Tel : +65 6240 1891 Tel : +65 6240 1891

**QUOTATION NUMBER** 2191035063

**JOB NUMBER** 7191132607

**TEST PERIOD** 03 Mar 2016 – 11 Mar 2016

PREPARED BY

Quek Keng Huat  
Higher Associate Engineer

APPROVED BY

Foo Kai Maun  
Engineer



LA-2007-0380-A LA-2007-0384-G  
LA-2007-0381-F LA-2007-0385-E  
LA-2007-0382-B LA-2007-0386-C  
LA-2007-0383-G LA-2010-0464-D

The results reported herein have been performed in accordance with the terms of accreditation under the Singapore Accreditation Council. Inspections/Calibrations/Tests marked "Not SAC-SINGLAS Accredited" in this Report are not included in the SAC-SINGLAS Accreditation Schedule for our inspection body/laboratory.

Laboratory:  
TÜV SÜD PSB Pte. Ltd.  
No.1 Science Park Drive  
Singapore 118221

Phone : +65-6885 1333  
Fax : +65-6776 8670  
E-mail: enquiries@tuv-sud-psb.sg  
www.tuv-sud-psb.sg  
Co. Reg : 199002667R

Regional Head Office:  
TÜV SÜD Asia Pacific Pte. Ltd.  
1 Science Park Drive, #02-01  
Singapore 118221  
TUV®



**TABLE OF CONTENTS**

TEST SUMMARY .....	3
PRODUCT DESCRIPTION .....	6
SUPPORTING EQUIPMENT DESCRIPTION.....	7
EUT OPERATING CONDITIONS.....	8
CONDUCTED EMISSION TEST .....	9
RADIATED EMISSION TEST.....	12
CARRIER FREQUENCY SEPARATION TEST .....	17
SPECTRUM BANDWIDTH (20dB BANDWIDTH MEASUREMENT) TEST .....	21
NUMBER OF HOPPING FREQUENCIES TEST .....	29
AVERAGE FREQUENCY DWELL TIME TEST.....	33
MAXIMUM PEAK POWER TEST.....	42
RF CONDUCTED SPURIOUS EMISSIONS TEST .....	44
BAND EDGE COMPLIANCE (CONDUCTED) TEST.....	55
BAND EDGE COMPLIANCE (RADIATED) TEST .....	60
PEAK POWER SPECTRAL DENSITY TEST.....	71
MAXIMUM PERMISSIBLE EXPOSURE (MPE) TEST .....	79
ANNEX A TEST SETUP / EUT PHOTOGRAPHS / DIAGRAMS .....	81
ANNEX B USER MANUAL TECHNICAL DESCRIPTION BLOCK & CIRCUIT DIAGRAMS.....	105
ANNEX C FCC LABEL & POSITION.....	106



**TEST SUMMARY**

The product was tested in accordance with the customer's specifications.

**Test Results Summary**

Test Standard	Description	Pass / Fail
47 CFR FCC Part 15		
15.107(a), 15.207	Conducted Emissions	Pass *See Note 7
15.109(a), 15.205, 15.209	Radiated Emissions (Spurious Emissions inclusive Restricted Bands Requirement)	Pass *See Note 7
15.247(a)(1)	Carrier Frequency Separation	Pass
	Spectrum Bandwidth (20dB Bandwidth Measurement)	Pass
15.247(a)(1)(iii)	Number of Hopping Frequencies	Pass
	Average Frequency Dwell Time	Pass
15.247(b)(1)	Maximum Peak Power	Pass
15.247(d)	RF Conducted Spurious Emissions	Pass
15.247(d)	Band Edge Compliance (Conducted)	Pass
15.247(d)	Band Edge Compliance (Radiated)	Pass
15.247(e)	Peak Power Spectral Density	Pass
1.1310	Maximum Permissible Exposure	Refer to page 78 for details



**TEST SUMMARY**

**Notes**

1. Three channels as listed below, which respectively represent the lower, middle and upper channels of the Equipment Under Test (EUT) were chosen and tested. For each channel, the EUT was configured to operate in the test mode.

<u>Transmit Channel</u>	<u>Frequency (GHz)</u>
Channel 0	2.402
Channel 39	2.441
Channel 78	2.480

2. All the measurements in section 15.247 were done based on conducted measurements except Band Edge Compliance (Radiated) test.
3. The EUT is a Class B device when in non-transmitting state and meets the 47 CFR FCC Part15B Class B requirements.
4. All test measurement procedures are according to ANSI C63.4: 2014 and ANSI C63.10: 2013.
5. The maximum measured RF power of the Equipment Under Test is 2.55dBm.
6. The EUT contains FCC (FCC ID: ACJ-B21R1401) certified Bluetooth module model RSNE031B0 from Panasonic AVC Networks Singapore. The module was integrated into the EUT without any modification as per information from Panasonic AVC Networks Singapore. This RF module was tested by TÜV SÜD PSB Pte Ltd, and reported in 7191116503-EEC15/03 dated 07 Jul 2015.
7. Only Conducted Emissions and Radiated Emissions (Spurious Emissions inclusive Restricted Bands Requirement) tests were carried out. The rest of the test results were reproduced from TÜV SÜD PSB's issued test report, 7191116503-EEC15/03 dated 07 Jul 2015.



## PRODUCT DESCRIPTION

Description	: The Equipment Under Test (EUT) is a CD STEREO SYSTEM. It consists of <ol style="list-style-type: none"><li>Main Unit SA-AKX640.</li><li>Speaker System SB-AKX880.</li><li>Remote Control.</li></ol>
Applicant	: Panasonic AVC Networks Singapore 202, Bedok South Avenue 1, Singapore 469332
Manufacturer	: Panasonic Corporation 1006, Oaza Kadoma, Kadoma-City, Osaka 571 8501, Japan
Factory (ies)	: Panasonic AVC Networks Johor Malaysia Sdn Bhd IE, PLO 460, Jalan Bandar, 81700 Pasir Gudang, Johor, Malaysia
Model Number(s)	: SC-AKX640
FCC ID	: ACJ-B21R1401
Serial Number(s)	: Nil
Microprocessor(s)	: Rohm-BM94801KUT
Operating Frequency	: <ol style="list-style-type: none"><li>AM 520kHz – 1710kHz</li><li>FM 87.9MHz – 107.9MHz</li><li>Bluetooth 2.402GHz – 2.480GHz</li></ol>
Clock / Oscillator Frequency	: 32.768kHz, 72kHz, 1.9MHz, 16.9MHz & 24.55MHz
IF Frequency	: 128kHz (FM) & 45kHz (AM)
Modulation	: <ol style="list-style-type: none"><li>Amplitude Modulation (AM)</li><li>Frequency Modulation (FM)</li><li>BDR (1Mbps) : Gaussian Frequency Shift Keying (GFSK)</li></ol>
Antenna Gain	: 2.0 dBi
Port / Connectors	: AUX1, AUX2 & USB
Rated Input Power	: 120V 50Hz/60Hz 190W
Accessories	: <ol style="list-style-type: none"><li>FM/AM Antenna</li><li>AA size batteries</li><li>AC cord</li><li>Antenna Plug</li><li>Remote control</li></ol>



**SUPPORTING EQUIPMENT DESCRIPTION**

<b>Equipment Description (Including Brand Name)</b>	<b>Model, Serial &amp; FCC ID Number</b>	<b>Cable Description (List Length, Type &amp; Purpose)</b>
Sony Ericsson Mobile Phone	M/N: K800i S/N: CB5AQJVPEK FCC ID: DoC	Nil
Fujitsu Lifebook	M/N: S6310 S/N: R6Z00061 FCC ID: DoC	2.00m power cable
Fujitsu AC Adapter	M/N: CP293662-01 S/N: 06X00159B FCC ID: DoC	2.00m power cable





**EUT OPERATING CONDITIONS**

**47 CFR FCC Part 15**


- 1. Conducted Emissions**
- 2. Radiated Emissions (Spurious Emissions inclusive Restricted Bands Requirement)**
- 3. Spectrum Bandwidth (20dB Bandwidth Measurement)**
- 4. Maximum Peak Power**
- 5. RF Conducted Spurious Emissions**
- 6. Peak Power Spectral Density**
- 7. Maximum Permissible Exposure**

The EUT was exercised by operating in maximum continuous transmission with frequency hopping off, i.e transmitting at lower, middle and upper channels respectively at one time.

**47 CFR FCC Part 15**

- 1. Carrier Frequency Separation**
- 2. Number of Hopping Frequencies**
- 3. Average Frequency Dwell Time**
- 4. Band Edge Compliance (Conducted)**
- 5. Band Edge Compliance (Radiated)**

The EUT was exercised by operating in maximum continuous transmission with frequency hopping on.

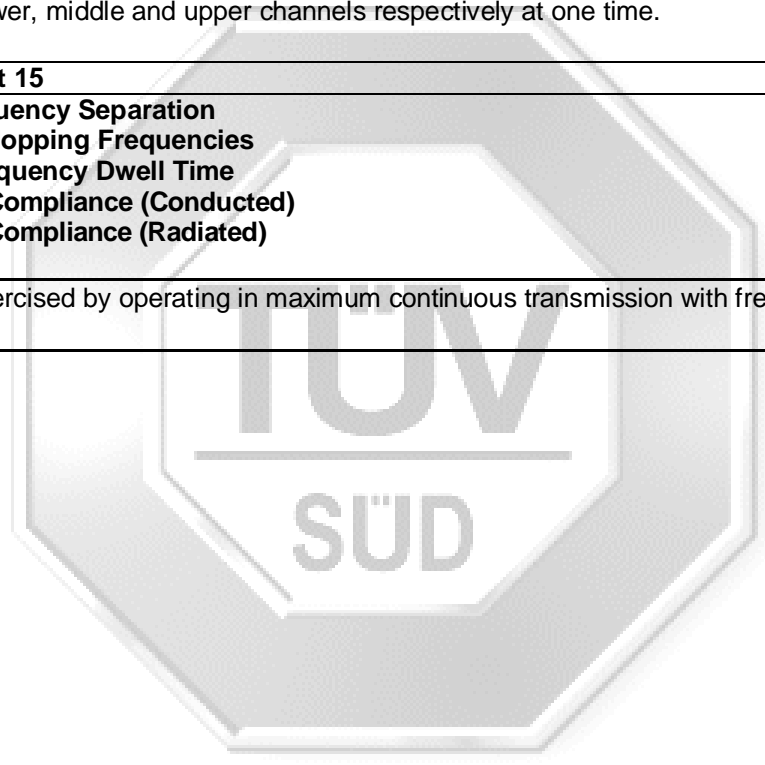



**CONDUCTED EMISSION TEST**


**47 CFR FCC Parts 15.107(a) and 15.207 Conducted Emission Limits**

Frequency Range (MHz)	Limit Values (dBµV)	
	Quasi-peak (Q-P)	Average (AV)
0.15 - 0.5	66 – 56 *	56 – 46 *
0.5 - 5.0	56	46
5.0 - 30.0	60	50

\* Decreasing linearly with the logarithm of the frequency

**47 CFR FCC Parts 15.107(a) and 15.207 Conducted Emission Test Instrumentation**

Instrument	Model	S/No	Cal Due Date
Rohde & Schwarz EMI Test Receiver (9kHz-3GHz)	ESCI	100477	14 Aug 2016
Agilent EMC Analyzer-SA7	E7403A	US41160167	28 May 2016
Schaffner LISN –LISN10 (EUT)	NNB42	04/10055	30 Oct 2016
EMCO LISN (for supporting) – LISN6	3825/2	9309-2127	30 Oct 2016

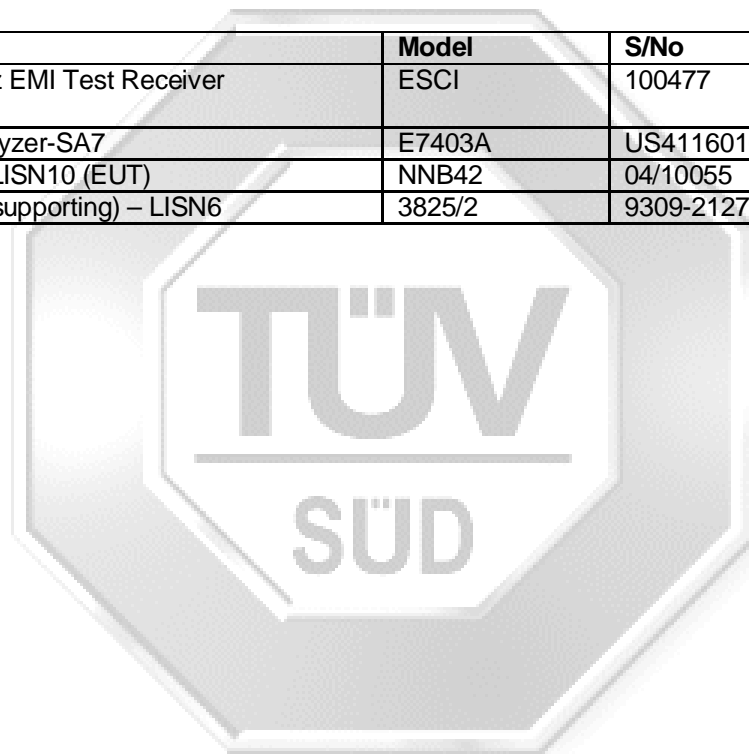



**CONDUCTED EMISSION TEST**

**47 CFR FCC Parts 15.107(a) and 15.207 Conducted Emission Test Setup**

1. The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table.
2. The power supply for the EUT was fed through a 50 $\Omega$ /50 $\mu$ H EUT LISN, connected to filtered mains.
3. The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable.
4. All other supporting equipment were powered separately from another LISN.

**47 CFR FCC Parts 15.107(a) and 15.207 Conducted Emission Test Method**

1. The EUT was switched on and allowed to warm up to its normal operating condition.
2. A scan was made on the NEUTRAL line over the required frequency range using an EMI test receiver.
3. High peaks, relative to the limit line, were then selected.
4. The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 9kHz. Both Quasi-peak and Average measurements were made.
5. Steps 2 to 4 were then repeated for the LIVE line.

**Sample Calculation Example**

At 20 MHz	Q-P limit = 60.0 dB $\mu$ V
Transducer factor of LISN, pulse limiter & cable loss at 20 MHz = 11.2 dB	
Q-P reading obtained directly from EMI Receiver = 40.0 dB $\mu$ V (Calibrated for system losses)	
Therefore, Q-P margin = 60.0 - 40.0 = 20.0	i.e. 20.0 dB below Q-P limit



**CONDUCTED EMISSION TEST**

**47 CFR FCC Parts 15.107(a) and 15.207 Conducted Emission Results**

Test Input Power	120V 60Hz	Temperature	22°C
Line Under Test	AC Mains	Relative Humidity	55%
Operating Mode	Bluetooth Playback	Atmospheric Pressure	1030mbar
		Tested By	Chang Wai Kit

Frequency (MHz)	Q-P Value (dBµV)	Q-P Limit (dBµV)	Q-P Margin (dB)	AV Value (dBµV)	AV Limit (dBµV)	AV Margin (dB)	Line	Channel
0.1950	57.1	63.8	6.7	53.5	53.8	0.3	Live	0
0.1954	57.2	63.8	6.6	53.6	53.8	0.2	Neutral	0
0.2926	41.7	60.5	18.8	37.4	50.5	13.1	Neutral	0
0.3838	43.8	58.2	14.4	43.3	48.2	4.9	Neutral	0
0.3874	43.7	58.2	14.5	43.1	48.2	5.1	Live	0
16.5205	44.2	60.0	15.8	33.7	50.0	16.3	Live	0

**Notes**

- All possible modes of operation were investigated from 150kHz to 30MHz. Only the worst case emissions measured, using the correct CISPR detectors, are reported. All other emissions were relatively insignificant.
- A "positive" margin indicates a PASS as it refers to the margin present below the limit line at the particular frequency. Conversely, a "negative" margin indicates a FAIL.
- EMI receiver Resolution Bandwidth (RBW) and Video Bandwidth (VBW) settings:  
9kHz - 30MHz  
RBW: 9kHz      VBW: 30kHz
- Conducted Emissions Measurement Uncertainty  
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95%, with a coverage factor of 2, in the range 9kHz – 30MHz is ±2.2dB.



**RADIATED EMISSION TEST**

**47 CFR FCC Part 15.205 Restricted Bands**

MHz		MHz		MHz		GHz	
0.090	- 0.110	16.42	- 16.423	399.9	- 410	4.5	- 5.15
0.495	- 0.505	16.69475	- 16.69525	608	- 614	5.35	- 5.46
2.1735	- 2.1905	16.80425	- 16.80475	960	- 1240	7.25	- 7.75
4.125	- 4.128	25.5	- 25.67	1300	- 1427	8.025	- 8.5
4.17725	- 4.17775	37.5	- 38.25	1435	- 1626.5	9.0	- 9.2
4.20725	- 4.20775	73	- 74.6	1645.5	- 1646.5	9.3	- 9.5
6.215	- 6.218	74.8	- 75.2	1660	- 1710	10.6	- 12.7
6.26775	- 6.26825	108	- 121.94	1718.8	- 1722.2	13.25	- 13.4
6.31175	- 6.31225	123	- 138	2200	- 2300	14.47	- 14.5
8.291	- 8.294	149.9	- 150.05	2310	- 2390	15.35	- 16.2
8.362	- 8.366	156.52475	- 156.52525	2483.5	- 2500	17.7	- 21.4
8.37625	- 8.38675	156.7	- 156.9	2690	- 2900	22.01	- 23.12
8.41425	- 8.41475	162.0125	- 167.17	3260	- 3267	23.6	- 24.0
12.29	- 12.293	167.72	- 173.2	3332	- 3339	31.2	- 31.8
12.51975	- 12.52025	240	- 285	3345.8	- 3358	36.43	- 36.5
12.57675	- 12.57725	322	- 335.4	3600	- 4400	Above 38.6	
13.36	- 13.41						

**47 CFR FCC Parts 15.109(a) and 15.209 Radiated Emission Limits**

Frequency Range (MHz)	Quasi-Peak Limit Values (dBµV/m)
0.009 - 0.490	20 log [2400 / F (kHz)] @ 300m
0.490 - 1.705	20 log [24000 / F (kHz)] @ 30m
1.705 - 30.0	30.0 @ 30m
30 - 88	40.0 @ 3m
88 - 216	43.5 @ 3m
216 - 960	46.0 @ 3m
Above 960	54.0* @ 3m

\* For frequency bands 9kHz – 90kHz, 110kHz – 490kHz and above 1GHz, average detector was used. A peak limit of 20dB above the average limit does apply.

**47 CFR FCC Parts 15.109(a) and 15.209 Radiated Emission Test Instrumentation**

Instrument	Model	S/No	Cal Due Date
R&S Test Receiver – ESI1	ESI40	100010	14 Jul 2016
Schaffner Bilog Antenna –(30MHz-2GHz) BL3 (Ref)	CBL6112D	2549	29 Jan 2017
EMCO Horn Antenna(1GHz-18GHz)	3115	0003-6088	20 Apr 2016
ETS Horn Antenna(18GHz-40GHz)(Ref)	3116	0004-2474	14 Oct 2016
Toyo Preamplifier (26.5GHz-40GHz)	HAP26-40W	00000005	14 Oct 2016
R&S Preamplifier (1GHz -18GHz)	SCU18	102191	13 Mar 2017
Agilent Preamplifier(1GHz-26.5GHz) (PA18)	8449D	3008A02305	06 Oct 2016
Com-Power Preamplifier (1MHz-1GHz)	PAM-103	441096	09 Oct 2016
EMCO Loop Ant (ext)_red_00134413	6502	134413	01 Oct 2016
Micro-tronics Bandstop Filter (2.4GHz)	BRM50701-02	007	13 Aug 2016



**RADIATED EMISSION TEST**

**47 CFR FCC Parts 15.109(a) and 15.209 Radiated Emission Test Setup**

1. The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m X 1.0m X 0.8m high, non-metallic table for measurement up to 1GHz. For measurement above 1GHz, 1.5m height table was used.
2. The filtered power supply for the EUT and supporting equipment were tapped from the appropriate power sockets located on the turntable.
3. The relevant broadband antenna was set at the required test distance away from the EUT and supporting equipment boundary.

**47 CFR FCC Parts 15.109(a) and 15.209 Radiated Emission Test Method**

1. The EUT was switched on and allowed to warm up to its normal operating condition.
2. A prescan was carried out to pick the worst emission frequencies from the EUT. For EUT which is a portable device, the prescan was carried out by rotating the EUT through three orthogonal axes to determine which altitude and equipment arrangement produces such emissions.
3. The test was carried out at the selected frequency points obtained from the prescan in step 2. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner:
  - a. Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen.
  - b. The EUT was then rotated to the direction that gave the maximum emission.
  - c. Finally, the antenna height was adjusted to the height that gave the maximum emission.
4. A Quasi-peak measurement was made for that frequency point if it was less than or equal to 1GHz. For frequency point in the range of 9kHz – 90kHz, 110kHz – 490kHz and above 1GHz, both Peak and Average measurements were carried out.
5. Steps 3 and 4 were repeated for the next frequency point, until all selected frequency points were measured.
6. The frequency range covered was from the lowest radio frequency signal generated from the EUT, without going below 9kHz to 10<sup>th</sup> harmonics of the EUT fundamental frequency, using the loop antenna for frequency below 30MHz, Bi-log antenna for frequencies from 30MHz up to 1GHz, and the Horn antenna above 1GHz.

**Sample Calculation Example**

At 300 MHz	Q-P limit = 46.0 dB $\mu$ V/m
Log-periodic antenna factor & cable loss at 300 MHz = 18.5 dB	
Q-P reading obtained directly from EMI Receiver = 40.0 dB $\mu$ V/m (Calibrated level including antenna factors & cable losses)	
Therefore, Q-P margin = 46.0 - 40.0 = 6.0	i.e. 6.0 dB below Q-P limit



**RADIATED EMISSION TEST**

**47 CFR FCC Parts 15.109(a), 15.205 and 15.209 Radiated Emission Results**

Test Input Power	120V 60Hz	Temperature	23°C
Test Distance	3m (<30MHz) 3m (≥30MHz – 25GHz)	Relative Humidity	60%
		Atmospheric Pressure	1030mbar
		Tested By	Chang Wai Kit

Spurious Emissions ranging from 9kHz – 30MHz (for 9kHz – 90kHz, 110kHz – 490kHz) \*See Note 2

Freq (GHz)	Peak Value (dBμV/m)	Peak Limit (dBμV/m)	Peak Margin (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Azimuth (Degrees)	Pol (H/V)	Ch
--	--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--	--

Spurious Emissions ranging from 9kHz – 30MHz \*See Note 2

Frequency (MHz)	Q-P Value (dBμV/m)	Q-P Limit (dBμV/m)	Q-P Margin (dB)	Height (cm)	Azimuth (Degrees)	Pol (H/V)	Channel
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--

Spurious Emissions ranging from 30MHz – 1GHz

Frequency (MHz)	Q-P Value (dBμV/m)	Q-P Limit (dBμV/m)	Q-P Margin (dB)	Height (cm)	Azimuth (Degrees)	Pol (H/V)	Channel
79.8550	31.9	40.0	8.1	118	81	V	0
86.2250	36.0	40.0	4.0	98	58	V	0
89.9990	32.4	43.5	11.1	119	53	V	0
191.9930	38.9	43.5	4.6	98	201	H	0
287.9790	40.3	46.0	5.7	105	360	H	0
383.9940	39.1	46.0	6.9	138	360	V	0



**RADIATED EMISSION TEST**

**47 CFR FCC Parts 15.109(a), 15.205 and 15.209 Radiated Emission Results**

Spurious Emissions above 1GHz – 25GHz

Freq (GHz)	Peak Value (dBµV/m)	Peak Limit (dBµV/m)	Peak Margin (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Azimuth (Degrees)	Pol (H/V)	Ch
1.9647	34.3	74.0	39.7	20.7	54.0	33.3	280	238	V	0
4.8274	46.3	74.0	27.7	26.1	54.0	27.9	192	24	V	0
7.2801	43.2	74.0	30.8	29.0	54.0	25.0	231	207	V	0
10.5078	44.3	74.0	29.7	29.9	54.0	24.1	339	357	V	0
14.8202	49.5	74.0	24.5	36.3	54.0	17.7	302	191	V	0
17.7538	55.3	74.0	18.7	41.6	54.0	12.4	141	12	V	0

Spurious Emissions above 1GHz – 25GHz

Freq (GHz)	Peak Value (dBµV/m)	Peak Limit (dBµV/m)	Peak Margin (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Azimuth (Degrees)	Pol (H/V)	Ch
4.9070	48.8	74.0	25.2	27.7	54.0	26.3	145	359	V	39
7.2473	46.4	74.0	27.6	28.6	54.0	25.4	355	319	H	39
9.4927	43.8	74.0	30.2	30.3	54.0	23.7	321	35	H	39
11.2929	44.0	74.0	30.0	30.2	54.0	23.8	385	275	H	39
13.0319	45.0	74.0	29.0	31.3	54.0	22.7	289	321	V	39
14.7103	50.1	74.0	23.9	36.3	54.0	17.7	376	237	H	39

Spurious Emissions above 1GHz – 25GHz


Freq (GHz)	Peak Value (dBµV/m)	Peak Limit (dBµV/m)	Peak Margin (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Azimuth (Degrees)	Pol (H/V)	Ch
7.3830	47.1	74.0	26.9	29.5	54.0	24.5	329	21	H	78
7.4330	42.8	74.0	31.2	29.2	54.0	24.8	362	203	H	78
13.4436	45.6	74.0	28.4	31.8	54.0	22.2	376	243	H	78
14.4080	49.0	74.0	25.0	35.5	54.0	18.5	192	10	H	78
14.5877	49.7	74.0	24.3	35.8	54.0	18.2	275	86	V	78
17.8451	55.9	74.0	18.1	42.2	54.0	11.8	238	17	H	78



**RADIATED EMISSION TEST**

Notes

1. All possible modes of operation were investigated. Only the worst case emissions measured, using the correct CISPR detectors, are reported. All other emissions were relatively insignificant.
2. "--" indicates no emissions were found and shows compliance to the limits.
3. Quasi-peak measurement was used for frequency measurement up to 1GHz. Average and peak measurements were used for emissions above 1GHz. The average measurement was done by averaging over a complete cycle of the pulse train, including the blanking interval as the pulse train duration does not exceed 0.1 second.
4. A "positive" margin indicates a PASS as it refers to the margin present below the limit line at the particular frequency. Conversely, a "negative" margin indicates a FAIL.
5. EMI receiver Resolution Bandwidth (RBW) and Video Bandwidth (VBW) settings:  
30MHz - 1GHz  
RBW: 120kHz            VBW: 1MHz  
>1GHz  
RBW: 1MHz            VBW: 1MHz
6. The upper frequency of radiated emission investigations was according to requirements stated in Section 15.33(a) for intentional radiators & Section 15.33(b) for unintentional radiators.
7. The channel in the table refers to the transmit channel of the EUT.
8. Radiated Emissions Measurement Uncertainty  
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95%, with a coverage factor of 2, in the range 30MHz – 25GHz is  $\pm 4.0$ dB.

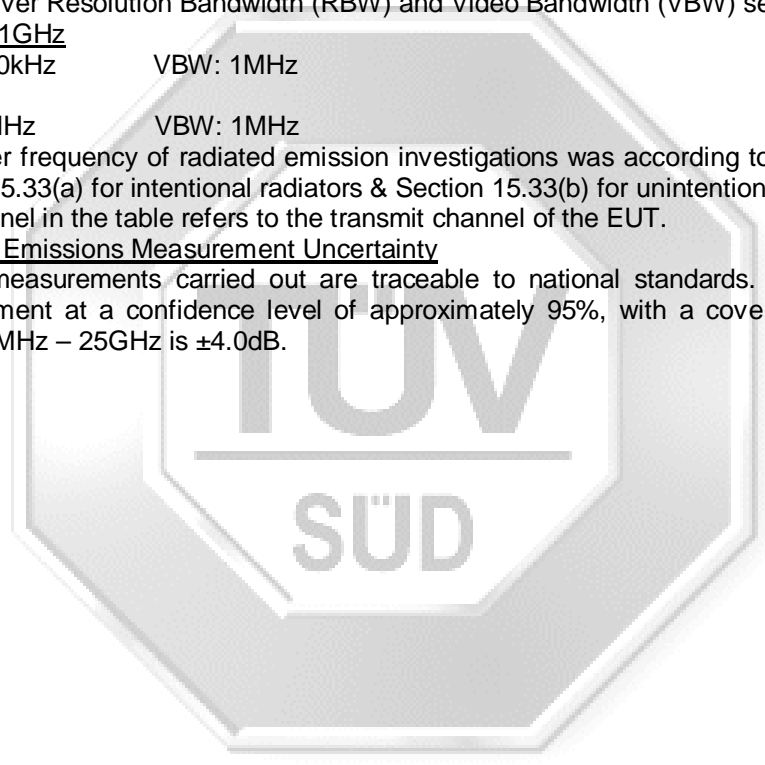



**CARRIER FREQUENCY SEPARATION TEST**

**47 CFR FCC Part 15.247(a)(1) Carrier Frequency Separation Limits**

The EUT shows compliance to the requirements of this section, which states the adjacent carrier frequencies must be separated by a minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, the EUT may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mW (21dBm).

**47 CFR FCC Part 15.247(a)(1) Carrier Frequency Separation Test Instrumentation**

Instrument	Model	S/No	Cal Due Date
Agilent Spectrum Analyzer	E4440A	MY45304764	12 Dec 2015
Agilent DC Power Supply	E3620A	MY40000448	Output Monitor

**47 CFR FCC Part 15.247(a)(1) Carrier Frequency Separation Test Setup**

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The RF antenna connector was connected to the spectrum analyser via a low-loss coaxial cable.
4. The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 100kHz and 300kHz.
5. All other supporting equipment were powered separately from another filtered mains.

**47 CFR FCC Part 15.247(a)(1) Carrier Frequency Separation Test Method**

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode with frequency hopping sequence on.
2. The start and stop frequencies of the spectrum analyser were set to 2.400GHz and 2.405GHz.
3. The spectrum analyser was set to max hold to capture the two adjacent transmitting frequencies within the span. The signal capturing was continuous until no further signals were detected.
4. The carrier frequency separation of the two adjacent transmitting / operating frequency was measured by finding the carrier frequency difference between the two adjacent channels.
5. The steps 2 to 4 were repeated with the following start and stop frequencies settings:
  - a. 2.4385GHz to 2.4435GHz
  - b. 2.478GHz to 2.4835GHz



**CARRIER FREQUENCY SEPARATION TEST**

**47 CFR FCC Part 15.247(a)(1) Carrier Frequency Separation Results**

Test Input Power	5Vdc	Temperature	23°C
Attached Plots	1 – 4	Relative Humidity	60%
		Atmospheric Pressure	1030mbar
		Tested By	Stephen Chng


Adjacent Channels	Channel Separation (MHz)
0 and 1 (2.402GHz and 2.403GHz)	1.000
38 and 39 (2.440GHz and 2.441GHz)	1.000
39 and 40 (2.441GHz and 2.442GHz)	1.000
77 and 78 (2.479GHz and 2.480GHz)	1.008






**CARRIER FREQUENCY SEPARATION TEST**

**Carrier Frequency Separation Plots**

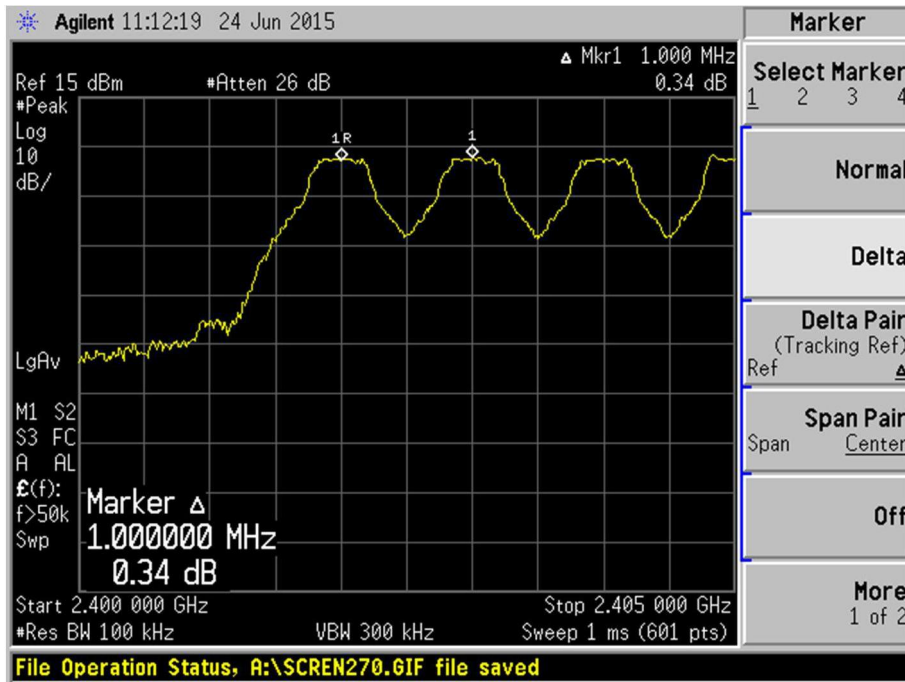

**Plot 1 - Channels 0 (lower ch) and 1 (ch after lower ch) Separation**

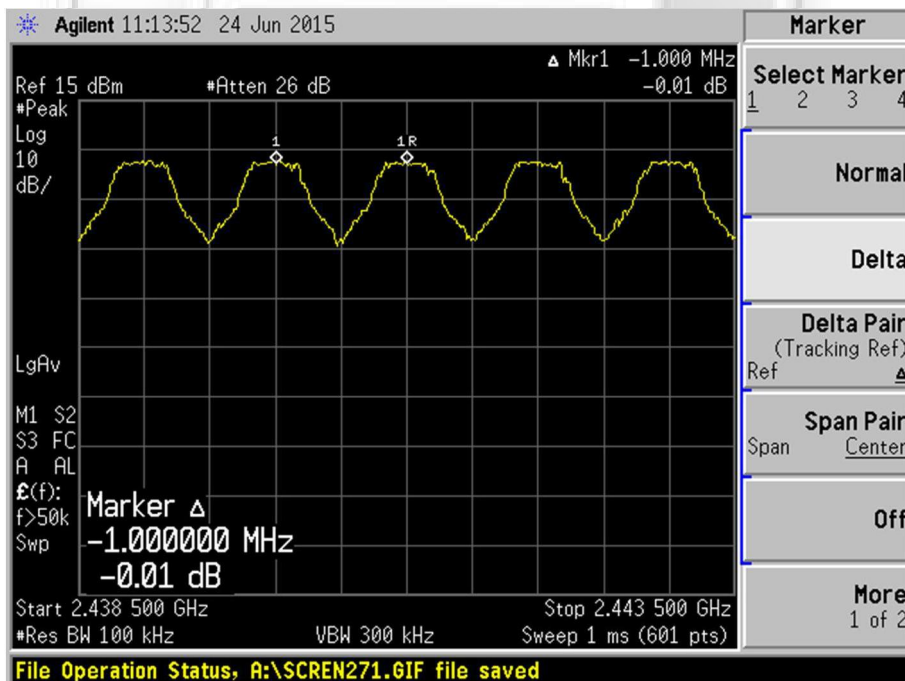

**Plot 2 - Channels 38 (preceding mid ch) and 39 (mid ch) Separation**




**CARRIER FREQUENCY SEPARATION TEST**

**Carrier Frequency Separation Plots**



**Plot 3 - Channels 39 (mid ch) and 40 (ch after mid ch) Separation**

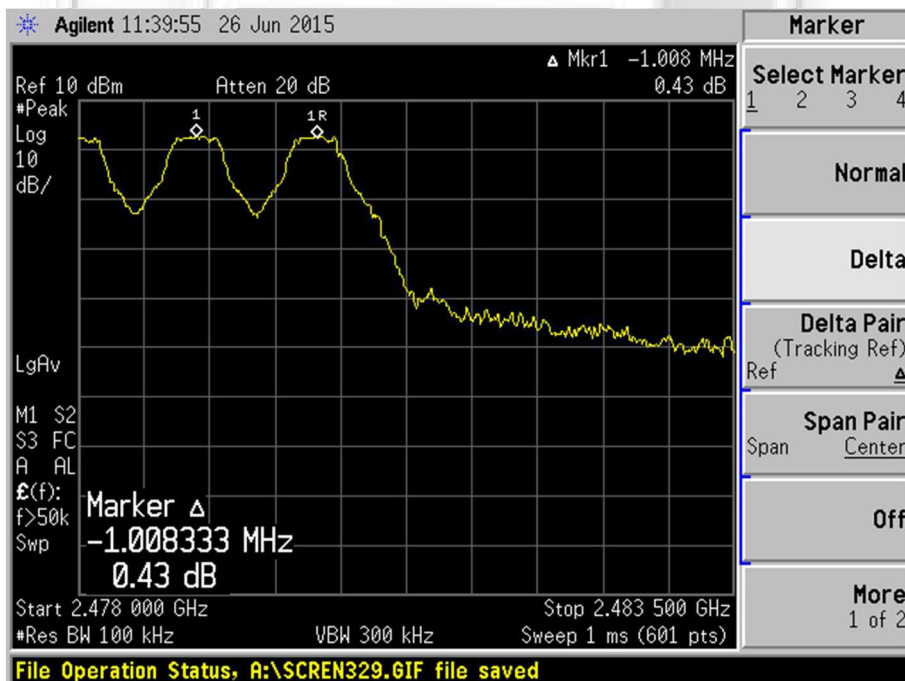

**Plot 4 - Channels 77 (preceding upper ch) and 78 (upper ch) Separation**



**SPECTRUM BANDWIDTH (20dB BANDWIDTH MEASUREMENT) TEST**

**47 CFR FCC Part 15.247(a)(1) Spectrum Bandwidth (20dB Bandwidth Measurement) Limits**

The EUT shows compliance to the requirements of this section, which states that the 20dB bandwidth of the hopping channel shall be the channel frequency separation by a minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater.

**47 CFR FCC Part 15.247(a)(1) Spectrum Bandwidth (20dB Bandwidth Measurement) Test Instrumentation**

Instrument	Model	S/No	Cal Due Date
Agilent Spectrum Analyzer	E4440A	MY45304764	12 Dec 2015
Agilent DC Power Supply	E3620A	MY40000448	Output Monitor

**47 CFR FCC Part 15.247(a)(1) Spectrum Bandwidth (20dB Bandwidth Measurement) Test Setup**

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The RF antenna connector was connected to the spectrum analyser via a low-loss coaxial cable.
4. The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 10kHz and 30kHz.
5. All other supporting equipment were powered separately from another filtered mains.

**47 CFR FCC Part 15.247(a)(1) Spectrum Bandwidth (20dB Bandwidth Measurement) Test Method**

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode, non-hopping with transmitting frequency at Channel 0 (2.402GHz) (*lower ch*).
2. The center frequency of the spectrum analyser was set to the transmitting frequency with the frequency span wide enough to capture the 20dB bandwidth of the transmitting frequency.
3. The spectrum analyser was set to max hold to capture the transmitting frequency. The signal capturing was continuous until no further changes were observed.
4. The peak of the transmitting frequency was detected with the marker peak function of the spectrum analyser. The frequencies below the 20dB peak frequency at lower ( $f_L$ ) and upper ( $f_H$ ) sides of the transmitting frequency were marked and measured by using the marker-delta function of the spectrum analyser.
5. The 20dB bandwidth of the transmitting frequency is the frequency difference between the marked lower and upper frequencies,  $|f_H - f_L|$ .
6. The steps 2 to 5 were repeated with the transmitting frequency was set to Channel 39 (2.441GHz) (*mid ch*) and Channel 78 (2.480GHz) (*upper ch*) respectively.



**SPECTRUM BANDWIDTH (20dB BANDWIDTH MEASUREMENT) TEST**

**47 CFR FCC Part 15.247(a)(1) Spectrum Bandwidth (20dB Bandwidth Measurement) Results**

Test Input Power	5Vdc	Temperature	23°C
Attached Plots	5 – 13	Relative Humidity	60%
		Atmospheric Pressure	1030mbar
		Tested By	Stephen Chng

**GFSK**

Channel	Channel Frequency (GHz)	20dB Bandwidth (MHz)
0 (lower ch)	2.402	0.940
39 (mid ch)	2.441	0.950
78 (upper ch)	2.480	0.945

**( $\pi/4$ )DQPSK**

Channel	Channel Frequency (GHz)	20dB Bandwidth (MHz)
0 (lower ch)	2.402	1.335
39 (mid ch)	2.441	1.335
78 (upper ch)	2.480	1.340


**8DPSK**

Channel	Channel Frequency (GHz)	20dB Bandwidth (MHz)
0 (lower ch)	2.402	1.345
39 (mid ch)	2.441	1.345
78 (upper ch)	2.480	1.345




**SPECTRUM BANDWIDTH (20dB BANDWIDTH MEASUREMENT) TEST**

**Spectrum Bandwidth (20dB Bandwidth Measurement) Plots – GFSK**

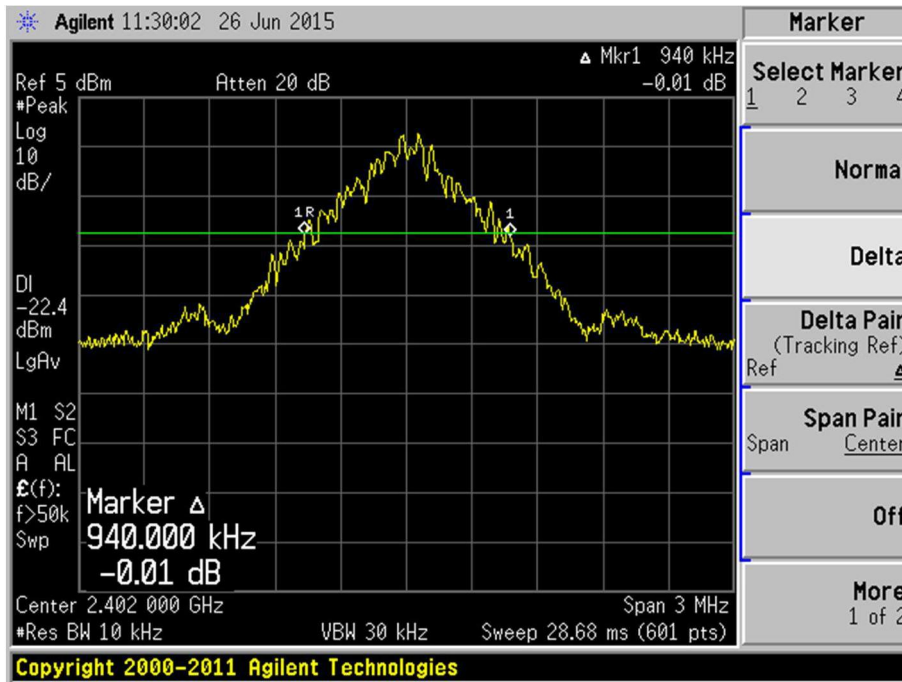

Plot 5 – Channel 0 (lower ch)

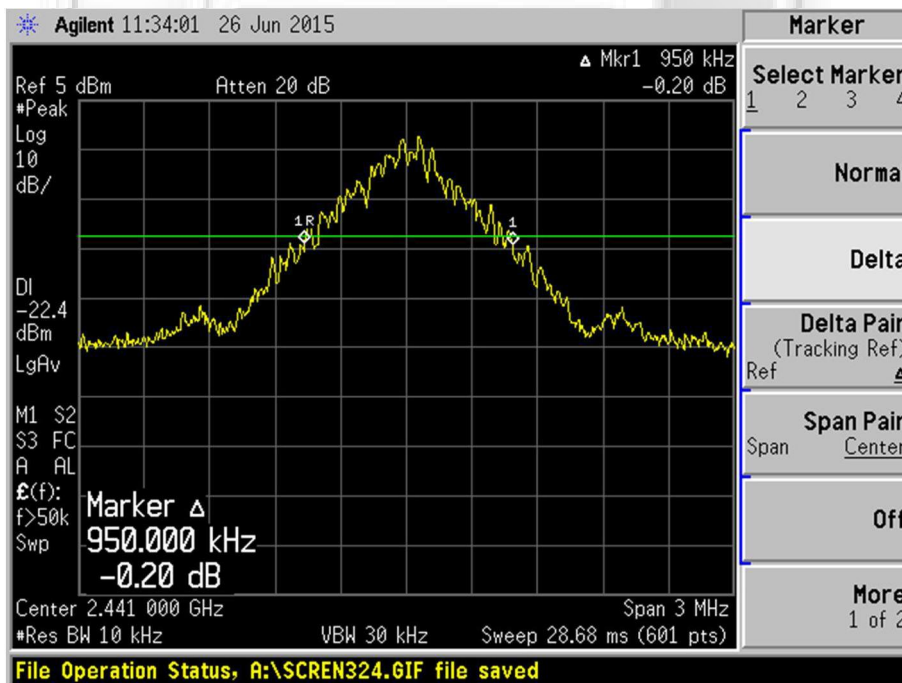


Plot 6 – Channel 39 (mid ch)




**SPECTRUM BANDWIDTH (20dB BANDWIDTH MEASUREMENT) TEST**

**Spectrum Bandwidth (20dB Bandwidth Measurement) Plots – GFSK**

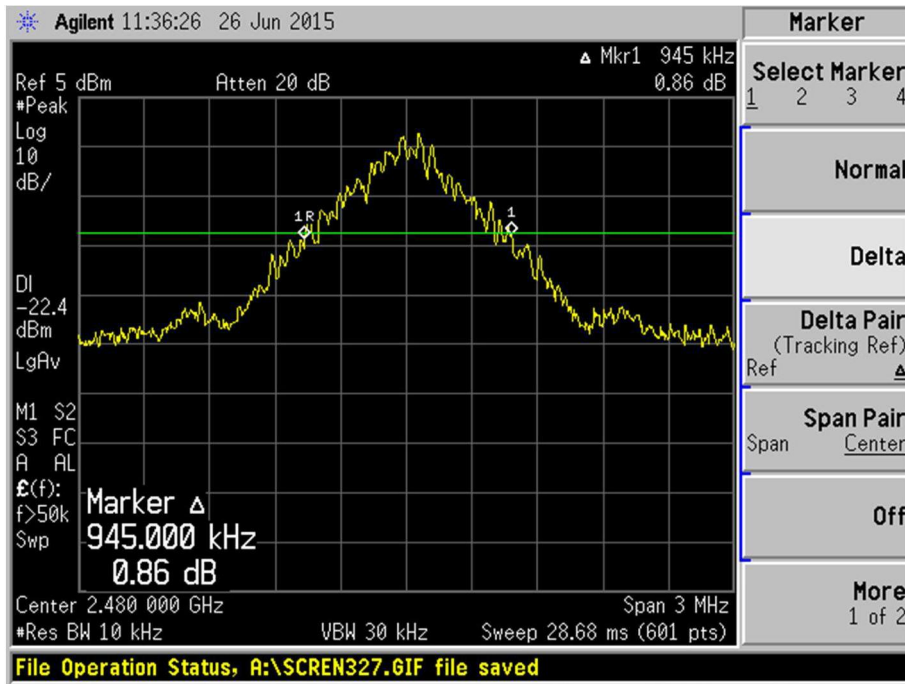


Plot 7 – Channel 78 (upper ch)

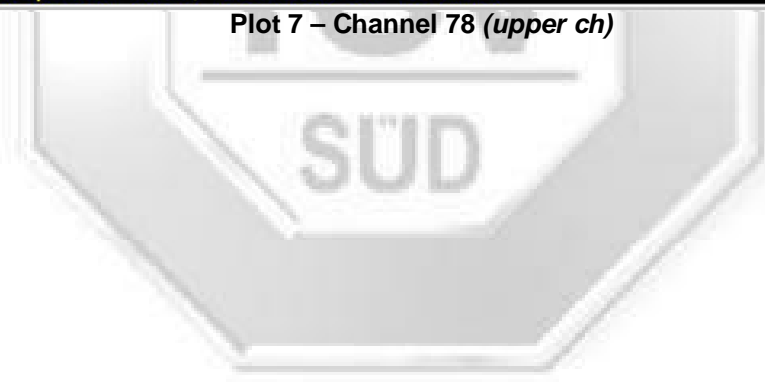




**SPECTRUM BANDWIDTH (20dB BANDWIDTH MEASUREMENT) TEST**

**Spectrum Bandwidth (20dB Bandwidth Measurement) Plots –  $(\pi/4)$ DQPSK**

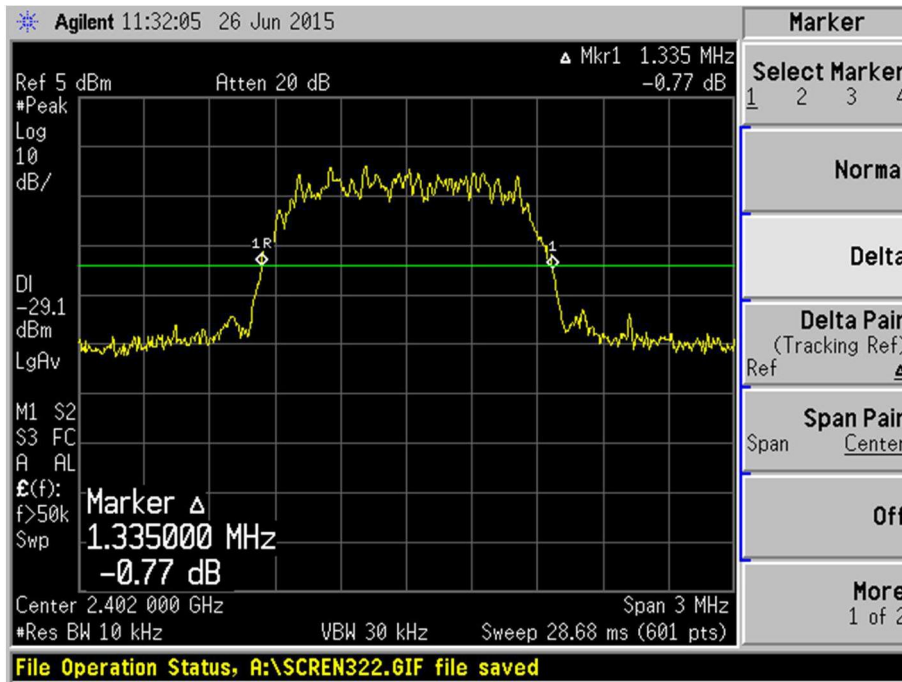

Plot 8 – Channel 0 (lower ch)

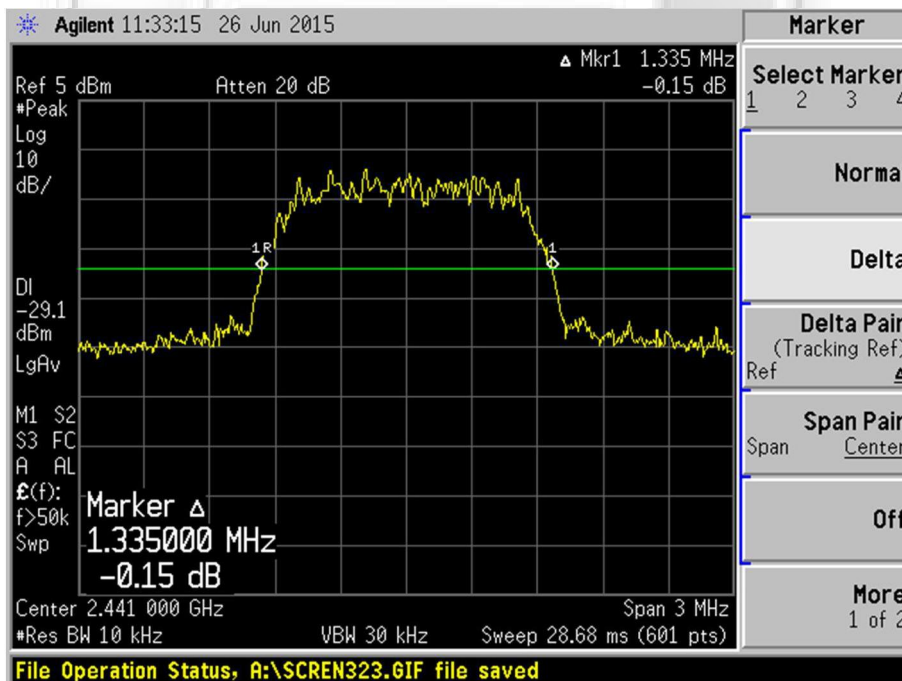


Plot 9 – Channel 39 (mid ch)



**SPECTRUM BANDWIDTH (20dB BANDWIDTH MEASUREMENT) TEST**

**Spectrum Bandwidth (20dB Bandwidth Measurement) Plots –  $(\pi/4)$ DQPSK**

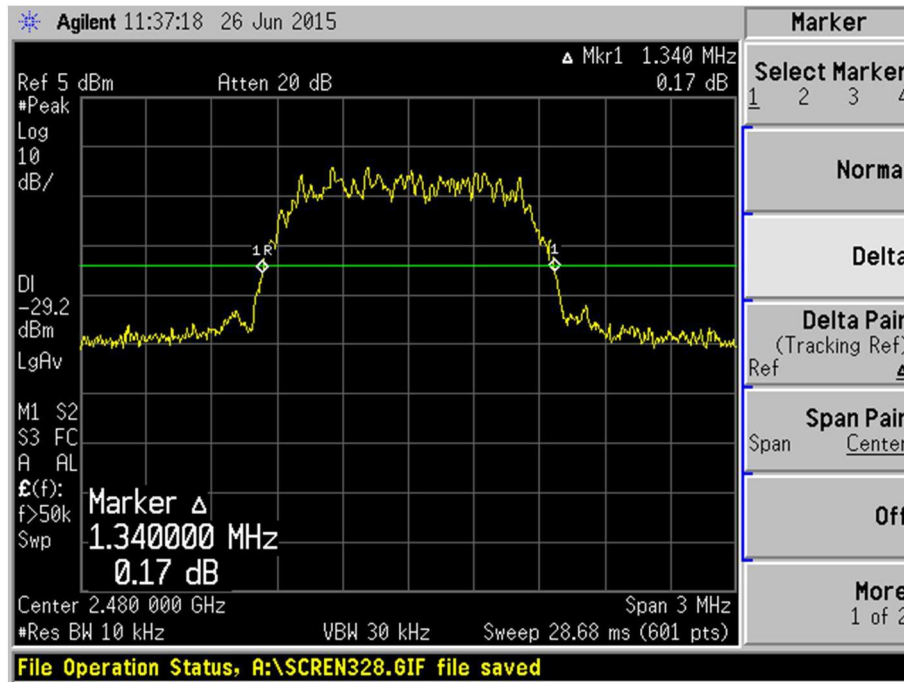


Plot 10 – Channel 78 (upper ch)




**SPECTRUM BANDWIDTH (20dB BANDWIDTH MEASUREMENT) TEST**

**Spectrum Bandwidth (20dB Bandwidth Measurement) Plots – 8DPSK**

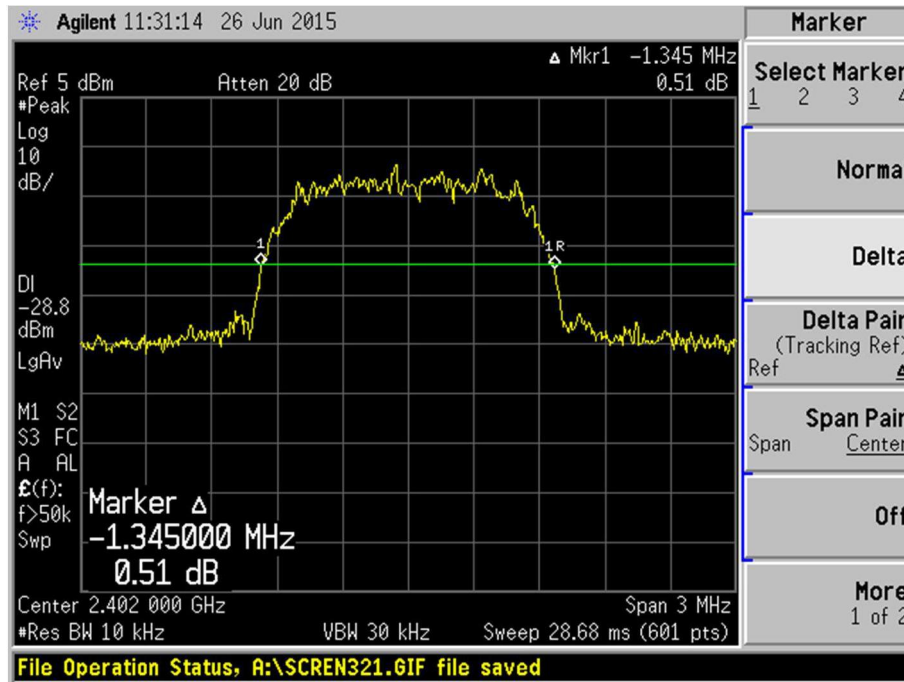

Plot 11 – Channel 0 (lower ch)

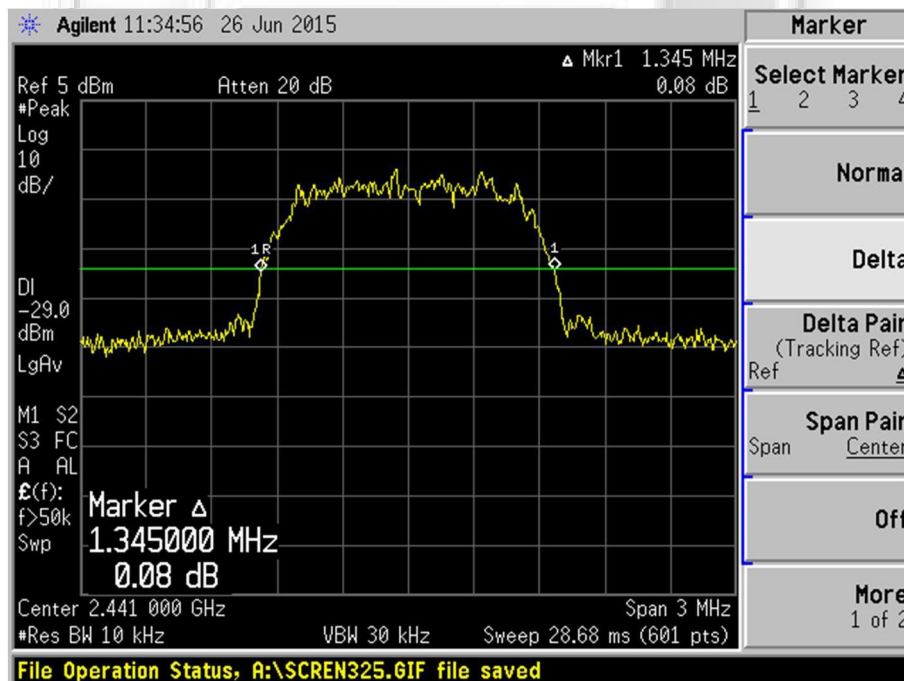


Plot 12 – Channel 39 (mid ch)



**SPECTRUM BANDWIDTH (20dB BANDWIDTH MEASUREMENT) TEST**

**Spectrum Bandwidth (20dB Bandwidth Measurement) Plots – 8DPSK**

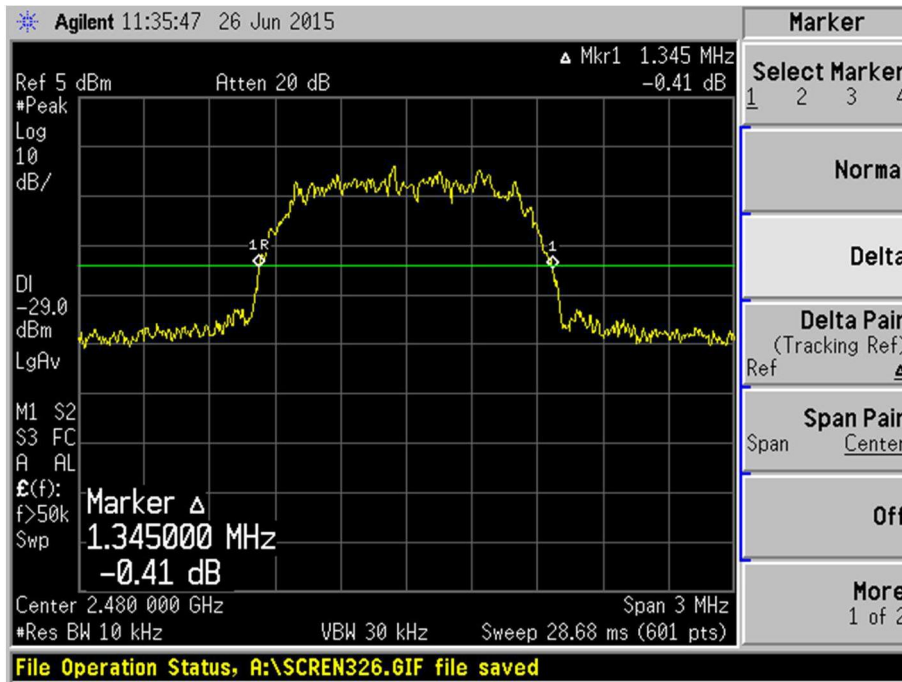

Plot 13 – Channel 78 (upper ch)



**NUMBER OF HOPPING FREQUENCIES TEST**

**47 CFR FCC Part 15.247(a)(1)(iii) Number of Hopping Frequencies Limits**

The EUT shows compliance to the requirements of this section, which states the EUT shall use at least 15 channels.

**47 CFR FCC Part 15.247(a)(1)(iii) Number of Hopping Frequencies Test Instrumentation**

Instrument	Model	S/No	Cal Due Date
Agilent Spectrum Analyzer	E4440A	MY45304764	12 Dec 2015
Agilent DC Power Supply	E3620A	MY40000448	Output Monitor

**47 CFR FCC Part 15.247(a)(1)(iii) Number of Hopping Frequencies Test Setup**

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The RF antenna connector was connected to the spectrum analyser via a low-loss coaxial cable.
4. The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 100kHz and 300kHz.
5. All other supporting equipment were powered separately from another filtered mains.

**47 CFR FCC Part 15.247(a)(1)(iii) Number of Hopping Frequencies Test Method**

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode with frequency hopping sequence on.
2. The start and stop frequencies of the spectrum analyser were set to 2.39GHz and 2.42GHz.
3. The spectrum analyser was set to max hold to capture all the transmitting frequencies within the span. The signal capturing was continuous until all the transmitting frequencies were captured and no further signals were detected.
4. The numbers of transmitting frequencies were counted and recorded.
5. The steps 2 to 4 were repeated with the following start and stop frequencies settings:
  - a. 2.420GHz to 2.441GHz
  - b. 2.441GHz to 2.461GHz
  - c. 2.461GHz to 2.4835GHz
6. The total number of hopping frequencies is the sum of the number of the hopping frequencies found for each span.



**NUMBER OF HOPPING FREQUENCIES TEST**

**47 CFR FCC Part 15.247(a)(1)(iii) Number of Hopping Frequencies Results**

Test Input Power	5Vdc	Temperature	23°C
Attached Plots	14 – 17	Relative Humidity	60%
		Atmospheric Pressure	1030mbar
		Tested By	Stephen Chng


The EUT was found to have 79 hopping frequencies. Please refer to the attached plots.






**NUMBER OF HOPPING FREQUENCIES TEST**

**Number Of Hopping Frequencies Plots**

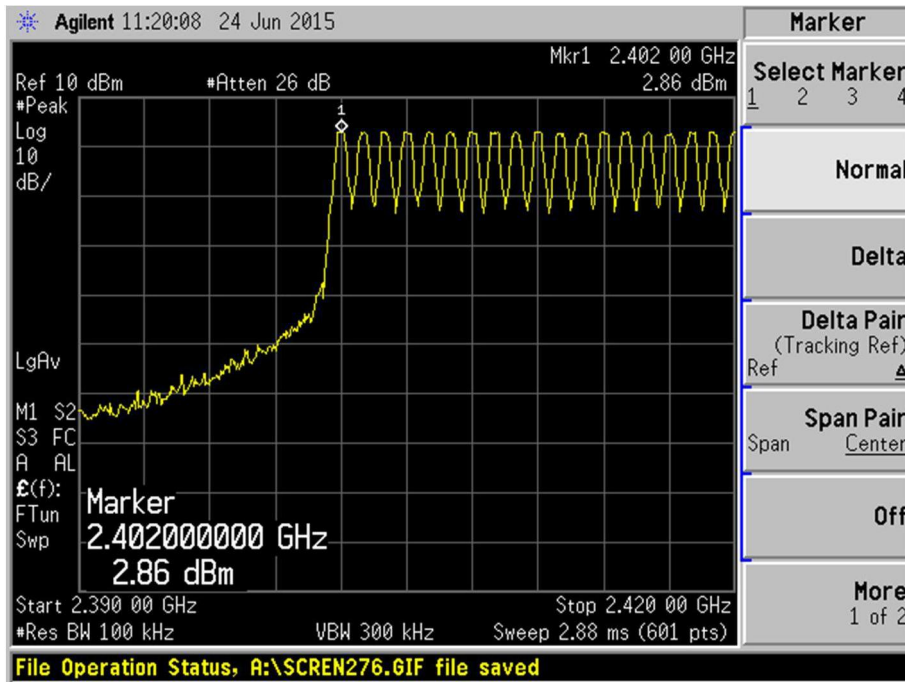

Plot 14 - Channels 0 to 18

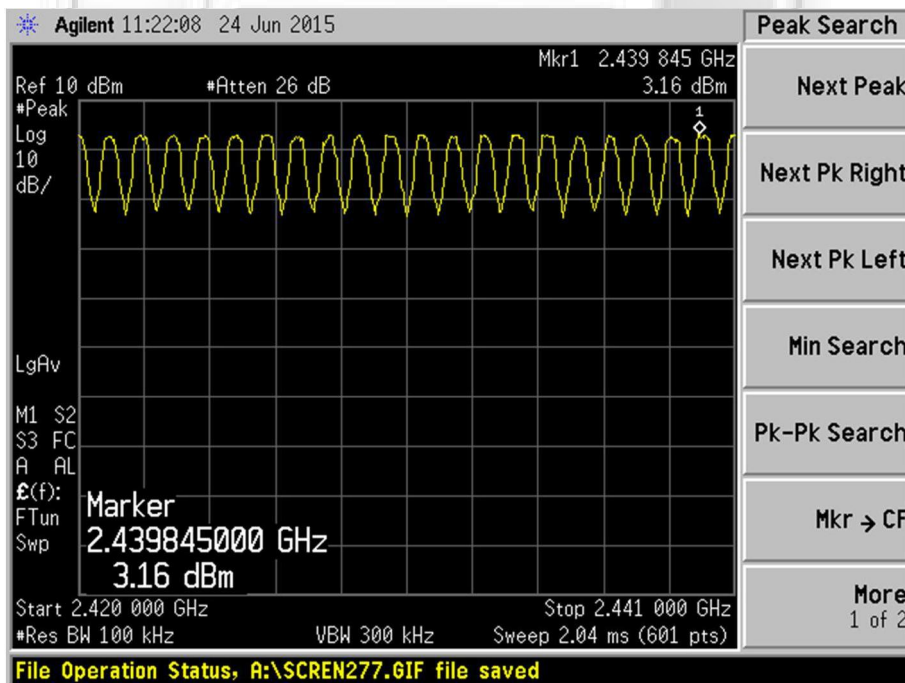


Plot 15 - Channels 18 to 39




**NUMBER OF HOPPING FREQUENCIES TEST**

**Number Of Hopping Frequencies Plots**

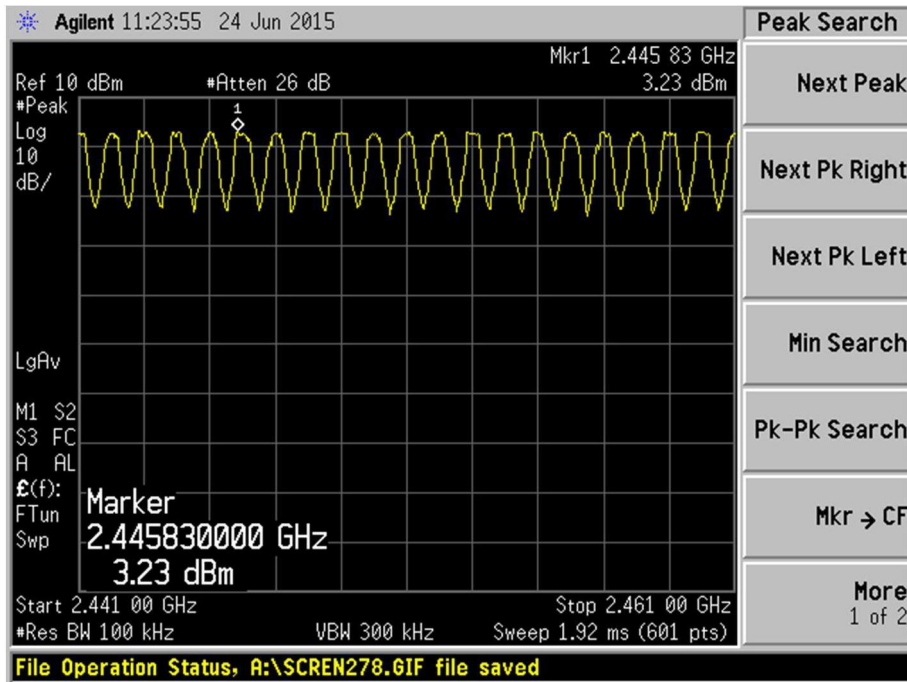

Plot 16 - Channels 39 to 59

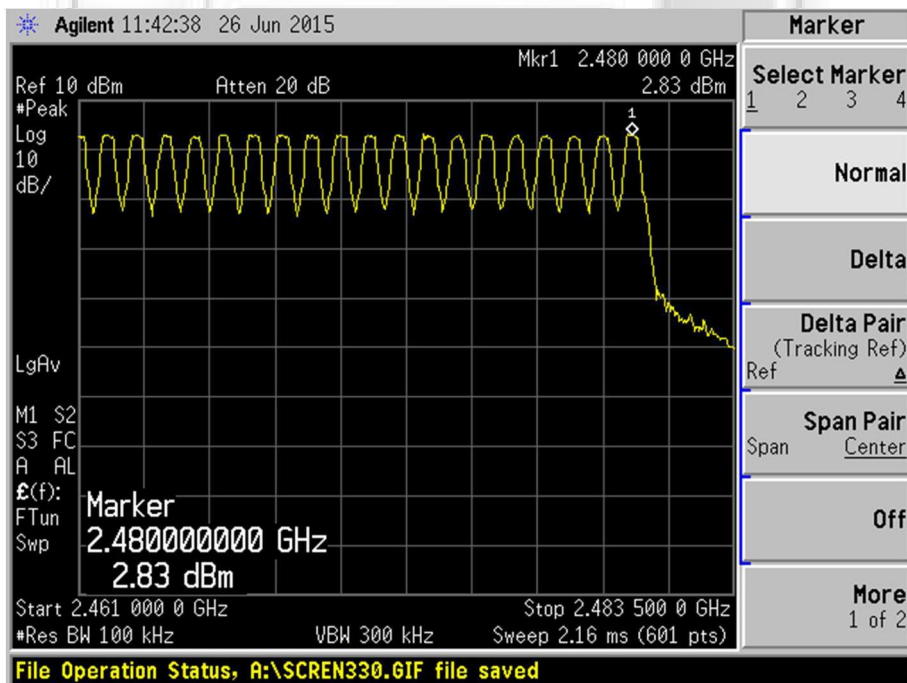

Plot 17 - Channels 59 to 78



**AVERAGE FREQUENCY DWELL TIME TEST**

**47 CFR FCC Part 15.247(a)(1)(iii) Average Frequency Dwell Time Limits**

The EUT shows compliance to the requirements of this section, which states the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

**47 CFR FCC Part 15.247(a)(1)(iii) Average Frequency Dwell Time Test Instrumentation**

Instrument	Model	S/No	Cal Due Date
Agilent Spectrum Analyzer	E4440A	MY45304764	12 Dec 2015
Agilent DC Power Supply	E3620A	MY40000448	Output Monitor

**47 CFR FCC Part 15.247(a)(1)(iii) Average Frequency Dwell Test Setup**

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The RF antenna connector was connected to the spectrum analyser via a low-loss coaxial cable.
4. The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 1MHz and 3MHz.
5. All other supporting equipment were powered separately from another filtered mains.

**47 CFR FCC Part 15.247(a)(1)(iii) Average Frequency Dwell Test Method**

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode with frequency hopping sequence on.
2. The center frequency of the spectrum analyser was set to 2.402GHz (*lower ch*) with zero frequency span (spectrum analyser acts as an oscilloscope).
3. The sweep time of the spectrum analyser was adjusted until a stable signal can be seen on the spectrum analyser.
4. The duration (dwell time) of a packet was measured using the marker-delta function of the spectrum analyser. The average dwell time of the transmitting frequency was computed based on general expression as shown below:  
$$\text{Average Frequency Dwell Time} = \left[ \frac{\text{measured time slot length} \times \text{hopping rate}}{\text{number of hopping channels}} \right] \times [0.4 \times \text{number of hopping channels}]$$
5. The steps 2 to 4 were repeated with the center frequency of the spectrum analyser were set to 2.441GHz (*mid ch*) and 2.480GHz (*upper ch*) respectively.



**AVERAGE FREQUENCY DWELL TIME TEST**

**47 CFR FCC Part 15.247(a)(1)(iii) Average Frequency Dwell Time Results**

Test Input Power	5Vdc	Temperature	23°C
Attached Plots	18 – 20	Relative Humidity	60%
Hopping Rate	1600 hops / s	Atmospheric Pressure	1030mbar
Number of Hopping Channels	79 channels	Tested By	Stephen Chng

**DH1**

Channel	Channel Frequency (GHz)	Measured Time Slot Length (ms)	Average Frequency Dwell Time (s)	Average Occupancy Limit (s)
0 (lower ch)	2.402	1.2500	0.200	0.4
39 (mid ch)	2.441	1.2500	0.200	0.4
78 (upper ch)	2.480	1.2500	0.200	0.4

Test Input Power	5Vdc	Temperature	23°C
Attached Plots	21 – 23	Relative Humidity	60%
Hopping Rate	533.3 hops / s	Atmospheric Pressure	1030mbar
Number of Hopping Channels	79 channels	Tested By	Stephen Chng

**DH3**

Channel	Channel Frequency (GHz)	Measured Time Slot Length (ms)	Average Frequency Dwell Time (s)	Average Occupancy Limit (s)
0 (lower ch)	2.402	2.5000	0.133	0.4
39 (mid ch)	2.441	2.5000	0.133	0.4
78 (upper ch)	2.480	2.5000	0.133	0.4

Test Input Power	5Vdc	Temperature	23°C
Attached Plots	24 – 26	Relative Humidity	60%
Hopping Rate	320 hops / s	Atmospheric Pressure	1030mbar
Number of Hopping Channels	79 channels	Tested By	Stephen Chng

**DH5**

Channel	Channel Frequency (GHz)	Measured Time Slot Length (ms)	Average Frequency Dwell Time (s)	Average Occupancy Limit (s)
0 (lower ch)	2.402	3.7481	0.120	0.4
39 (mid ch)	2.441	3.7467	0.120	0.4
78 (upper ch)	2.480	3.7467	0.120	0.4



---

**AVERAGE FREQUENCY DWELL TIME TEST**

Notes


1. The EUT operates based on 1-slot transmission and 1-slot reception basis. As such, there are [  $1600 / (1 + 1)$  ] transmissions per second and the time occupancy per channel is [ measured time slot length / 2 ].
2. Average Frequency Dwell Time = [ measured time slot length / 2 x hopping rate / 2 / number of hopping channels ] x [ 0.4 x number of hopping channels ]
3. The Average Frequency Dwell Time is dependent on the packet type (slot length) and independent on the data rate (i.e. 1Mbps, 2Mbps & 3Mbps)






**AVERAGE FREQUENCY DWELL TIME TEST**

**Average Frequency Dwell Time Plots – DH1**

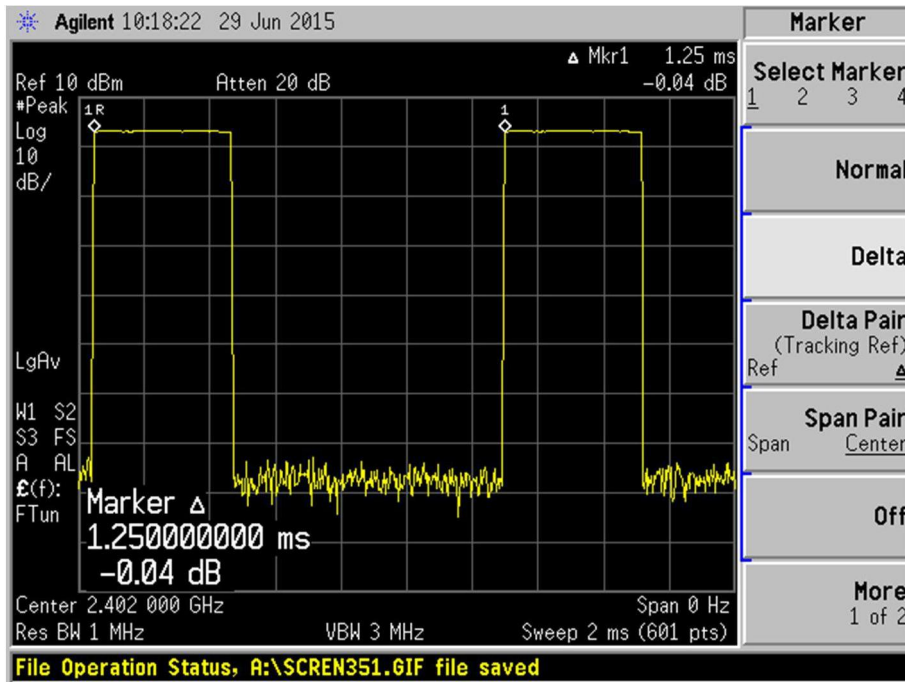

**Plot 18 – Channel 0 (lower ch)**

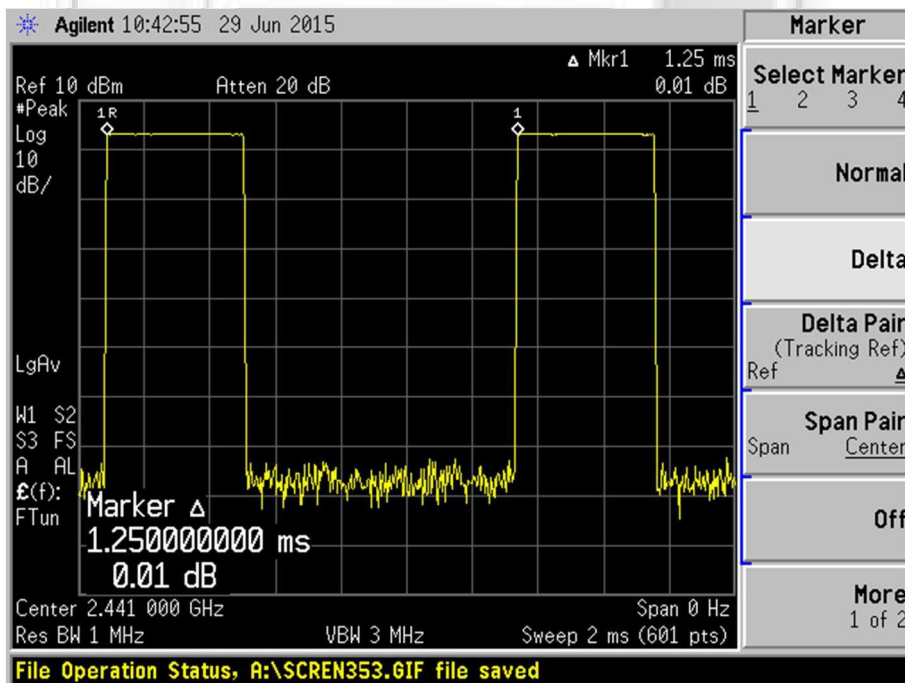


**Plot 19 – Channel 39 (mid ch)**



**AVERAGE FREQUENCY DWELL TIME TEST**

**Average Frequency Dwell Time Plots – DH1**

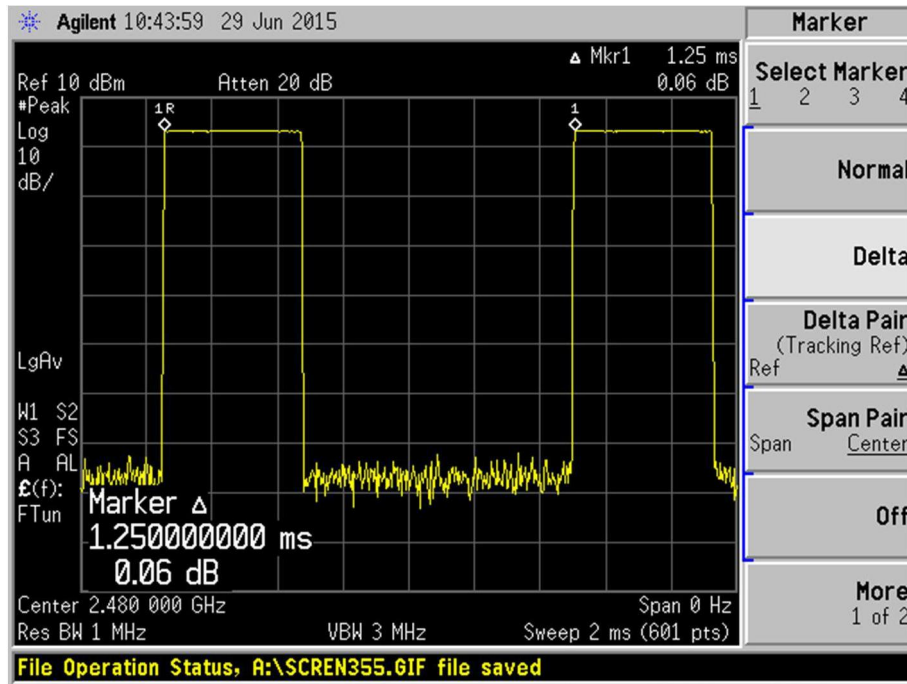


Plot 20 – Channel 78 (upper ch)




**AVERAGE FREQUENCY DWELL TIME TEST**

**Average Frequency Dwell Time Plots – DH3**

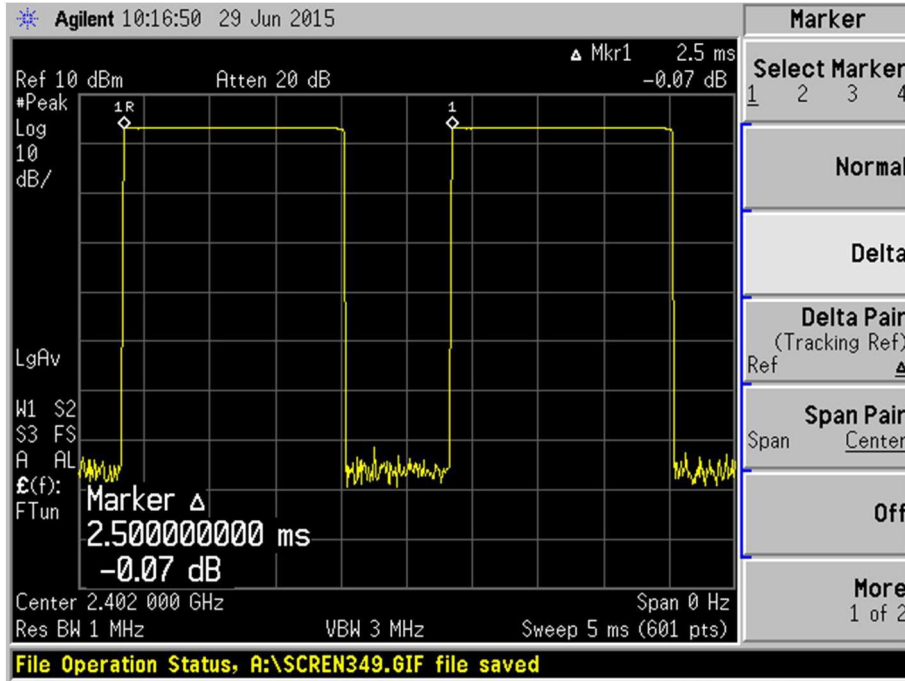

**Plot 21 – Channel 0 (lower ch)**

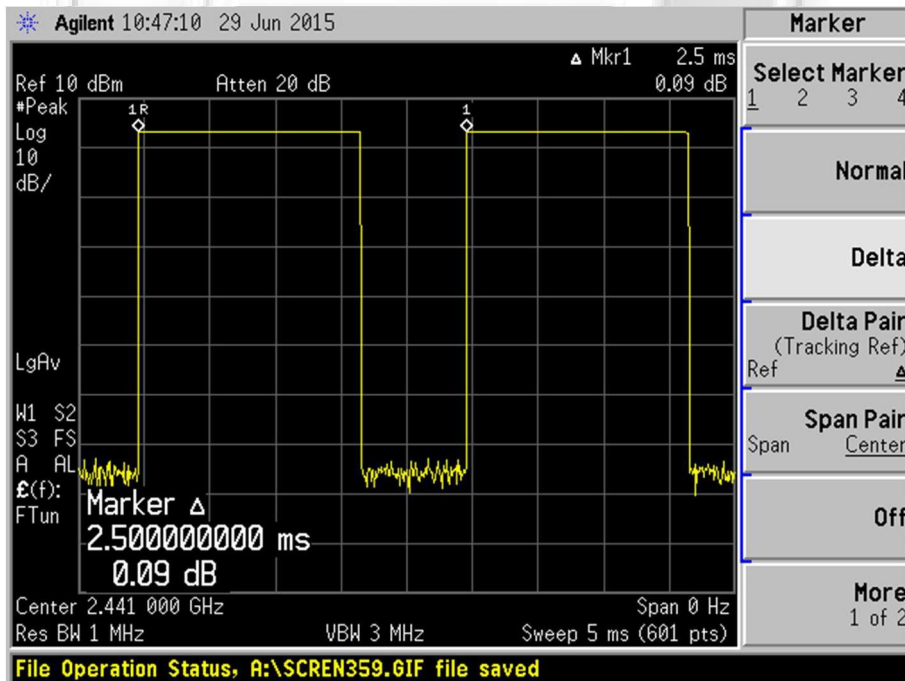


**Plot 22 – Channel 39 (mid ch)**



**AVERAGE FREQUENCY DWELL TIME TEST**

**Average Frequency Dwell Time Plots – DH3**

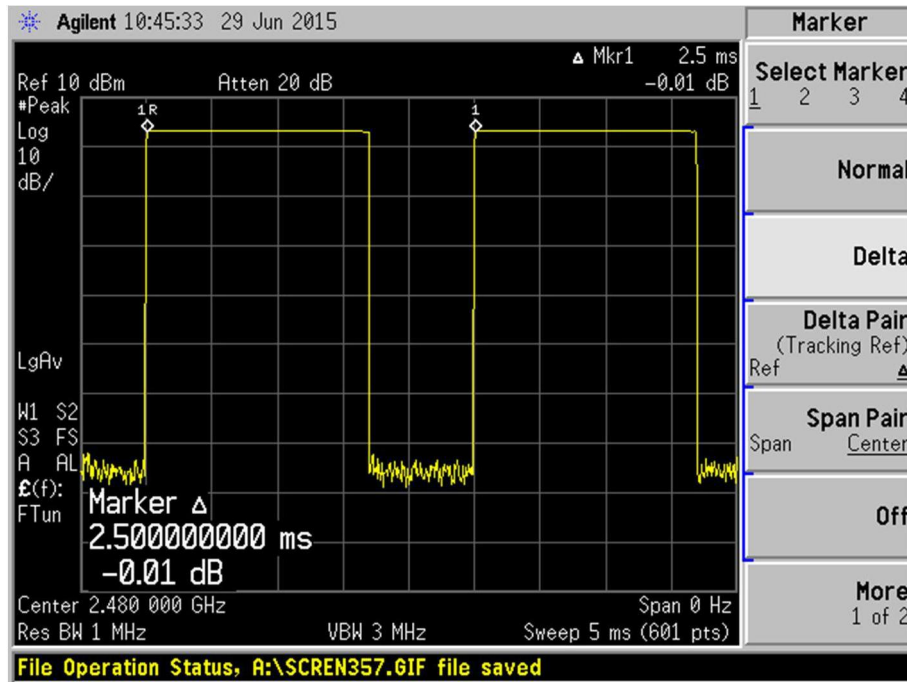


Plot 23 – Channel 78 (upper ch)




**AVERAGE FREQUENCY DWELL TIME TEST**

**Average Frequency Dwell Time Plots – DH5**

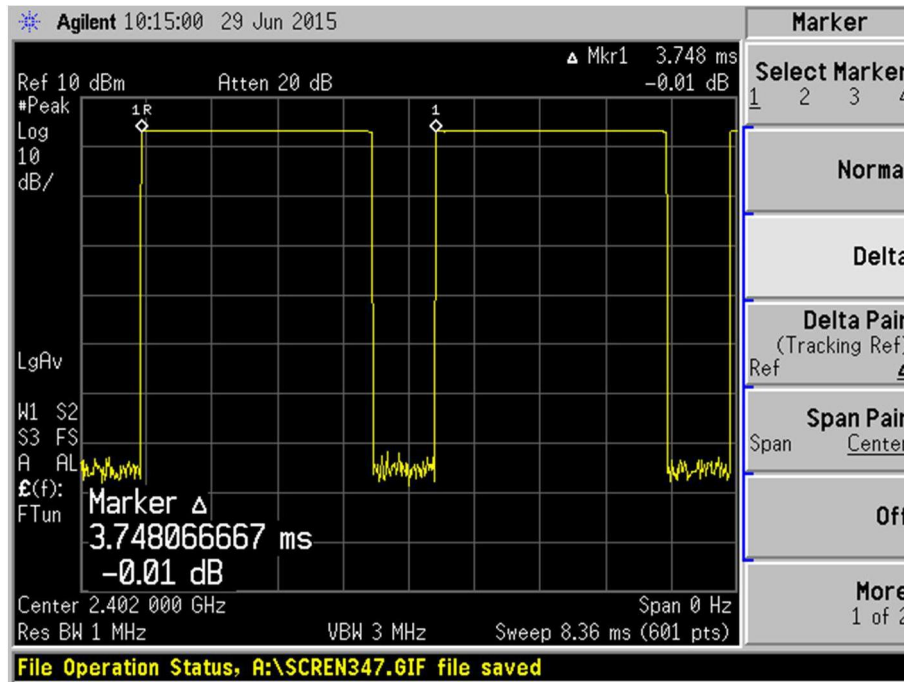

Plot 24 – Channel 0 (lower ch)

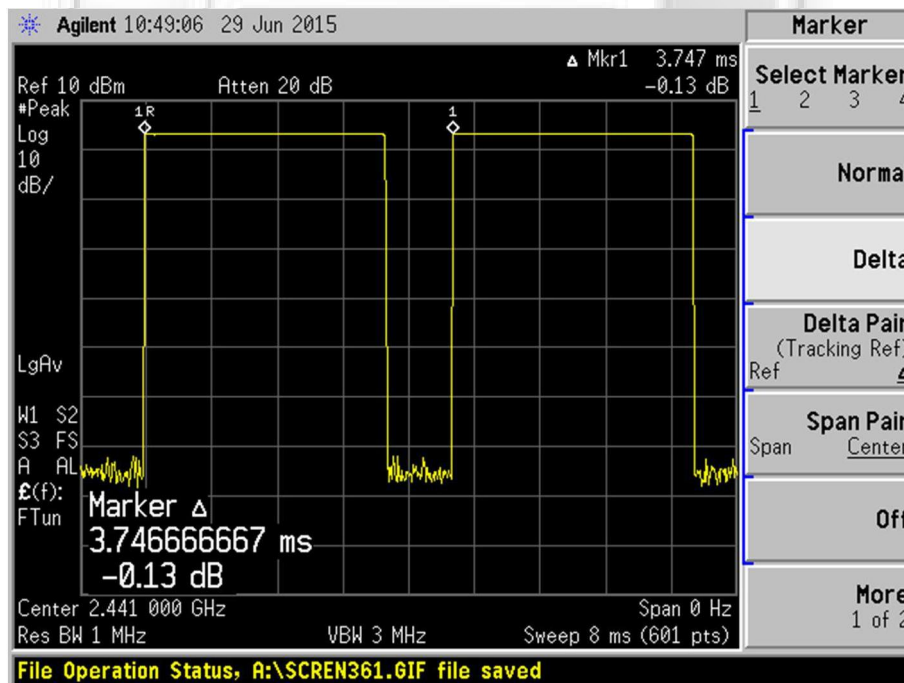

Plot 25 – Channel 39 (mid ch)