



TEST REPORT

Report Number : A-006-14-C

Date of Issue: 22 April 2015

FCC Rules and Regulations Part 15 Subpart C Intentional Radiators.

This test report is to certify that the device was tested according to the requirements of the above. The results of this report should not be construed to imply compliance of devices other than the sample tested. Without the laboratory approval by the documents, this report should not be copied in part.

1. Applicant

Company Name : Panasonic Corporation
Mailing Address : 1-15, Matsuo-cho, Kadoma-shi, Osaka, Japan

2. Identification of Tested Device

Type of Device : Transmitter
FCC ID : ACJ-LB-DH83
Device Name : Data Archiver
Model Number : LB-DH83
Serial Number : sample1
Trade Name : Panasonic
Type of Test : Production Pre-production Prototype

3. Test Items

AC Power Line Conducted Emission Measurement	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail	<input type="checkbox"/> N/A
Radiated Emission (The Frequency Range of 9kHz to 30MHz)	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail	<input type="checkbox"/> N/A
Radiated Emission (The Frequency Range of above 30MHz)	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail	<input type="checkbox"/> N/A
20dB Bandwidth Measurement	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail	<input type="checkbox"/> N/A
Frequency Tolerance of Carrier Signal	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail	<input type="checkbox"/> N/A

Refer the below reason(s) with respect to the decision and justification not to test.

(*1) EUT Specifications (*2) Request of Applicant (*3) According to Test Plan

KEC Electronic Industry Development Center Testing Division
3-2-2, Hikari-dai, Seika-cho, Soraku-gun, Kyoto 619-0237 Japan

Test Engineer(s)

Naoki Norimoto



Approved by

Ikuya Minematsu / Group Manager



Table of Contents

0. REVISION HISTORY 3

1. LABORATORY INFORMATION 4

 1.1. Laboratory Accreditation 4

 1.2. Test Facility 4

 1.3. Measurement Uncertainty 4

2. GENERAL INFORMATION 5

 2.1. Product Description 5

3. TESTED SYSTEM 6

 3.1. Reference Rule and Specification 6

 3.2. Date of Test 6

 3.3. Deviation of Standard 6

 3.4. Test Mode 6

 3.5. Block Diagram of Test System 7

 3.6. List of Test System 8

 3.7. List of Cables 10

4. AC POWER LINE CONDUCTED EMISSION MEASUREMENT 11

 4.1. Test Procedure 11

 4.2. Test Software List 11

 4.3. Test Results 12

5. Radiated Emission (The Frequency Range of 9kHz to 30MHz) 16

 5.1. Test Procedure 16

 5.2. Test Results 17

6. Radiated Emission (The Frequency Range of above 30MHz) 19

 6.1. Test Procedure 19

 6.2. Test Software List 19

 6.3. Test Results 20

7. 20dB BANDWIDTH MEASUREMENT 23

 7.1. Test Procedure 23

 7.2. Test Results 23

8. FREQUENCY TOLERANCE OF CARRIER SIGNAL 24

 8.1. Test Procedure 24

 8.2. Test Results 25

9. TEST EQUIPMENT 27



1. LABORATORY INFORMATION

1.1. Laboratory Accreditation

The KEC has been accredited by the following organizations based on their criteria for testing laboratory (ISO/IEC 17025).

- (1) Japan Accreditation Board for Conformity Assessment (JAB) : Accreditation Number: RTL02810
 (2) Voluntary EMC Laboratory Accreditation Center Inc. (VLAC) : Accreditation Number: VLAC-005

1.2. Test Facility

All tests described in this report were performed by:

Name: KEC Electronic Industry Development Center
 Testing Division

Address: 3-2-2, Hikari-dai, Seika-cho, Soraku-gun, Kyoto 619-0237 Japan

Anechoic Chamber : No.1 No.2 No.3 No.6 No.7
 No.8 No.9 No.10 No.11 No.12
 Shielded Room : No.1 No.7 No.8 No.9 No.10
 Harmonic Current Meas. Room :

1.3. Measurement Uncertainty

The result of a measurement is only an approximation or estimate of the value of a specific quantity. And thus the measurand is complete only when a statement of uncertainty is given. KEC quotes Measurement Uncertainty (U) as follows.

Conducted Disturbance at Mains Port (150kHz-30MHz)	+3.1 / -3.7 dB
Conducted Disturbance at Mains Port (9kHz-30MHz)	+3.4 / -4.3 dB
Conducted Disturbance at Telecommunication Ports ISN method (None-Shield type)	+2.5 / -2.9 dB
Conducted Disturbance at Telecommunication Ports ISN method (Shield type)	+2.4 / -2.6 dB
Conducted Disturbance at Telecommunication Ports Current Probe method	+2.3 / -2.8 dB
Conducted Disturbance at Telecommunication Ports 150Ω Load voltage method	+1.9 / -2.5 dB
Conducted Disturbance at Telecommunication Ports None Invasive method	+2.8 / -3.8 dB
Conducted Disturbance at Lead Terminals and Additional Terminals	+1.7 / -2.4 dB
Disturbance Power (30MHz -300MHz)	+3.3 / -3.4 dB
Radiated Disturbance at Frequency Range from 9kHz up to 30MHz 60cm Loop Antenna method	+3.7 / -4.4 dB
Radiated Disturbance at Frequency Range from 9kHz up to 30MHz LLA method	+2.2 / -2.8 dB
Radiated Disturbance at Frequency Range from 30MHz up to 300MHz 3m method	+3.4 / -3.3 dB
Radiated Disturbance at Frequency Range from 300MHz up to 1GHz 3m method	+3.4 / -3.6 dB
Radiated Disturbance at Frequency Range from 30MHz up to 300MHz 10m method	+3.2 / -3.9 dB
Radiated Disturbance at Frequency Range from 300MHz up to 1GHz 10m method	+3.6 / -4.5 dB
Radiated Disturbance at Frequency Range from 30MHz up to 1GHz 10m method (Hybrid Antenna used measurement)	+4.1 / -4.4 dB
Radiated Disturbance at Frequency Range from 1GHz up to 6GHz 3m method	+4.7 / -6.2 dB
Radiated Disturbance at Frequency Range from 6GHz up to 26.5GHz 3m method	+4.5 / -5.0 dB
Harmonics Currents Emissions	+/- 6.5 %
Voltage Change, Voltage Fluctuations and Flicker	+/- 2.3 %

Expiration Date : 2015/9/30

The above values are calculated as Expanded Uncertainty (k=2 [95%]).

[Note]

If the measured result is below the specification limit and a margin is less than the above measurement uncertainty, it is impossible to determine compliance at a level of confidence of 95%. However, the measured result indicates high probability that the tested device complies with the specification limit.



2. GENERAL INFORMATION

2.1. Product Description

- (1) Technical Specifications
 - Maximum data size : 638.4TB
 - Maximum transfer rate : 216MB/s (RAID0)
 - Number of Installed Drive System : 1 drive system(12 drive units)
 - Medium : 1.2 TB recordable magazine
 - Number of magazine drawers : 10 drawers(Left and right)
 - Maximum number of magazines : Up to 76
- (2) Maximum Oscillators Frequency
 - RFID CLK : 27.12MHz
- (3) Radio Specifications
 - Tx Operating Frequency : 13.56MHz
- (4) Software Version
 - ASPI : 1.29
 - TERATERM : 4.77
 - Writetest : 1.0
- (5) Firmware Version : GN0.8.02
- (6) Interface and Provide Terminal
 - LAN : Web Interface/10Mbit/100Mbit/1Gbit x2
 - USB : Maintenance/USB2.0 x2
 - I/O : Power supply surveillance
 - CONTROL PORT : Changer control/Magazine drawer monitoring
 - Built-in Serial port : Host interface
 - (Use I/O board SAS for test software)
- (7) Rated Power Supply : AC100~240V 50/60Hz(DC24V)
(Test for AC 120V 60Hz(DC24V))
- (8) Environment Condition

Environmetal condition of EUT	
Temperature	10 deg C to 40deg C
Humidity	20 % to 80 % RH



3. TESTED SYSTEM

3.1. Reference Rule and Specification

(1) Reference Rule and Regulation	: FCC Rule Part 15 Subpart C, Section 15.225 Operation within the band 13.110-14.010 MHz <input checked="" type="checkbox"/> Section 15.205 <input checked="" type="checkbox"/> Section 15.207 <input checked="" type="checkbox"/> Section 15.209 <input checked="" type="checkbox"/> Section 15.215 <input checked="" type="checkbox"/> Section 15.225
(2) Test Procedure	: ANSI C63.4-2009

3.2. Date of Test

Receipt of Test Sample	: 8 November 2014
Condition of Test Sample	: <input checked="" type="checkbox"/> Damage is not found on the set. <input type="checkbox"/> Damage is found on the set. (Details are described in this report)
Test Completed on	: 1 December 2014
Condition of Test Sample	: <input checked="" type="checkbox"/> Damage is not found on the set. <input type="checkbox"/> Damage is found on the set. (Details are described in this report)

3.3. Deviation of Standard

without deviation, with deviation (details are found inside of this report)

3.4. Test Mode

Test items	Test mode	Test frequency
AC Power Line Conducted Emission	Continuous transmission	13.56MHz
Radiated Emission (9kHz to 30MHz)		
Radiated Emission (above 30MHz)		
20dB Emission Bandwidth		
Frequency Tolerance of Carrier Signal		

[Note]


- (1) The test program was prepared by applicant.
- (2) The test modes were confirmed with and without tag, and the test was made without tag that was worst condition.

Extreme test condition	
Temperature	10 deg C to 40 deg C
Voltage	AC 102 V to 138 V

[Note]

- The tests at 50 deg C, 0 deg C, -10 deg C and -20 deg C were not applied since the specification of operating temperature of EUT was 10 deg C to 40 deg C and the EUT was only used in this temperature range. (Specification see Clause 2.1.)
- Temperature extreme test was measured only in the radio part for the device is large.

3.5. Block Diagram of Test System

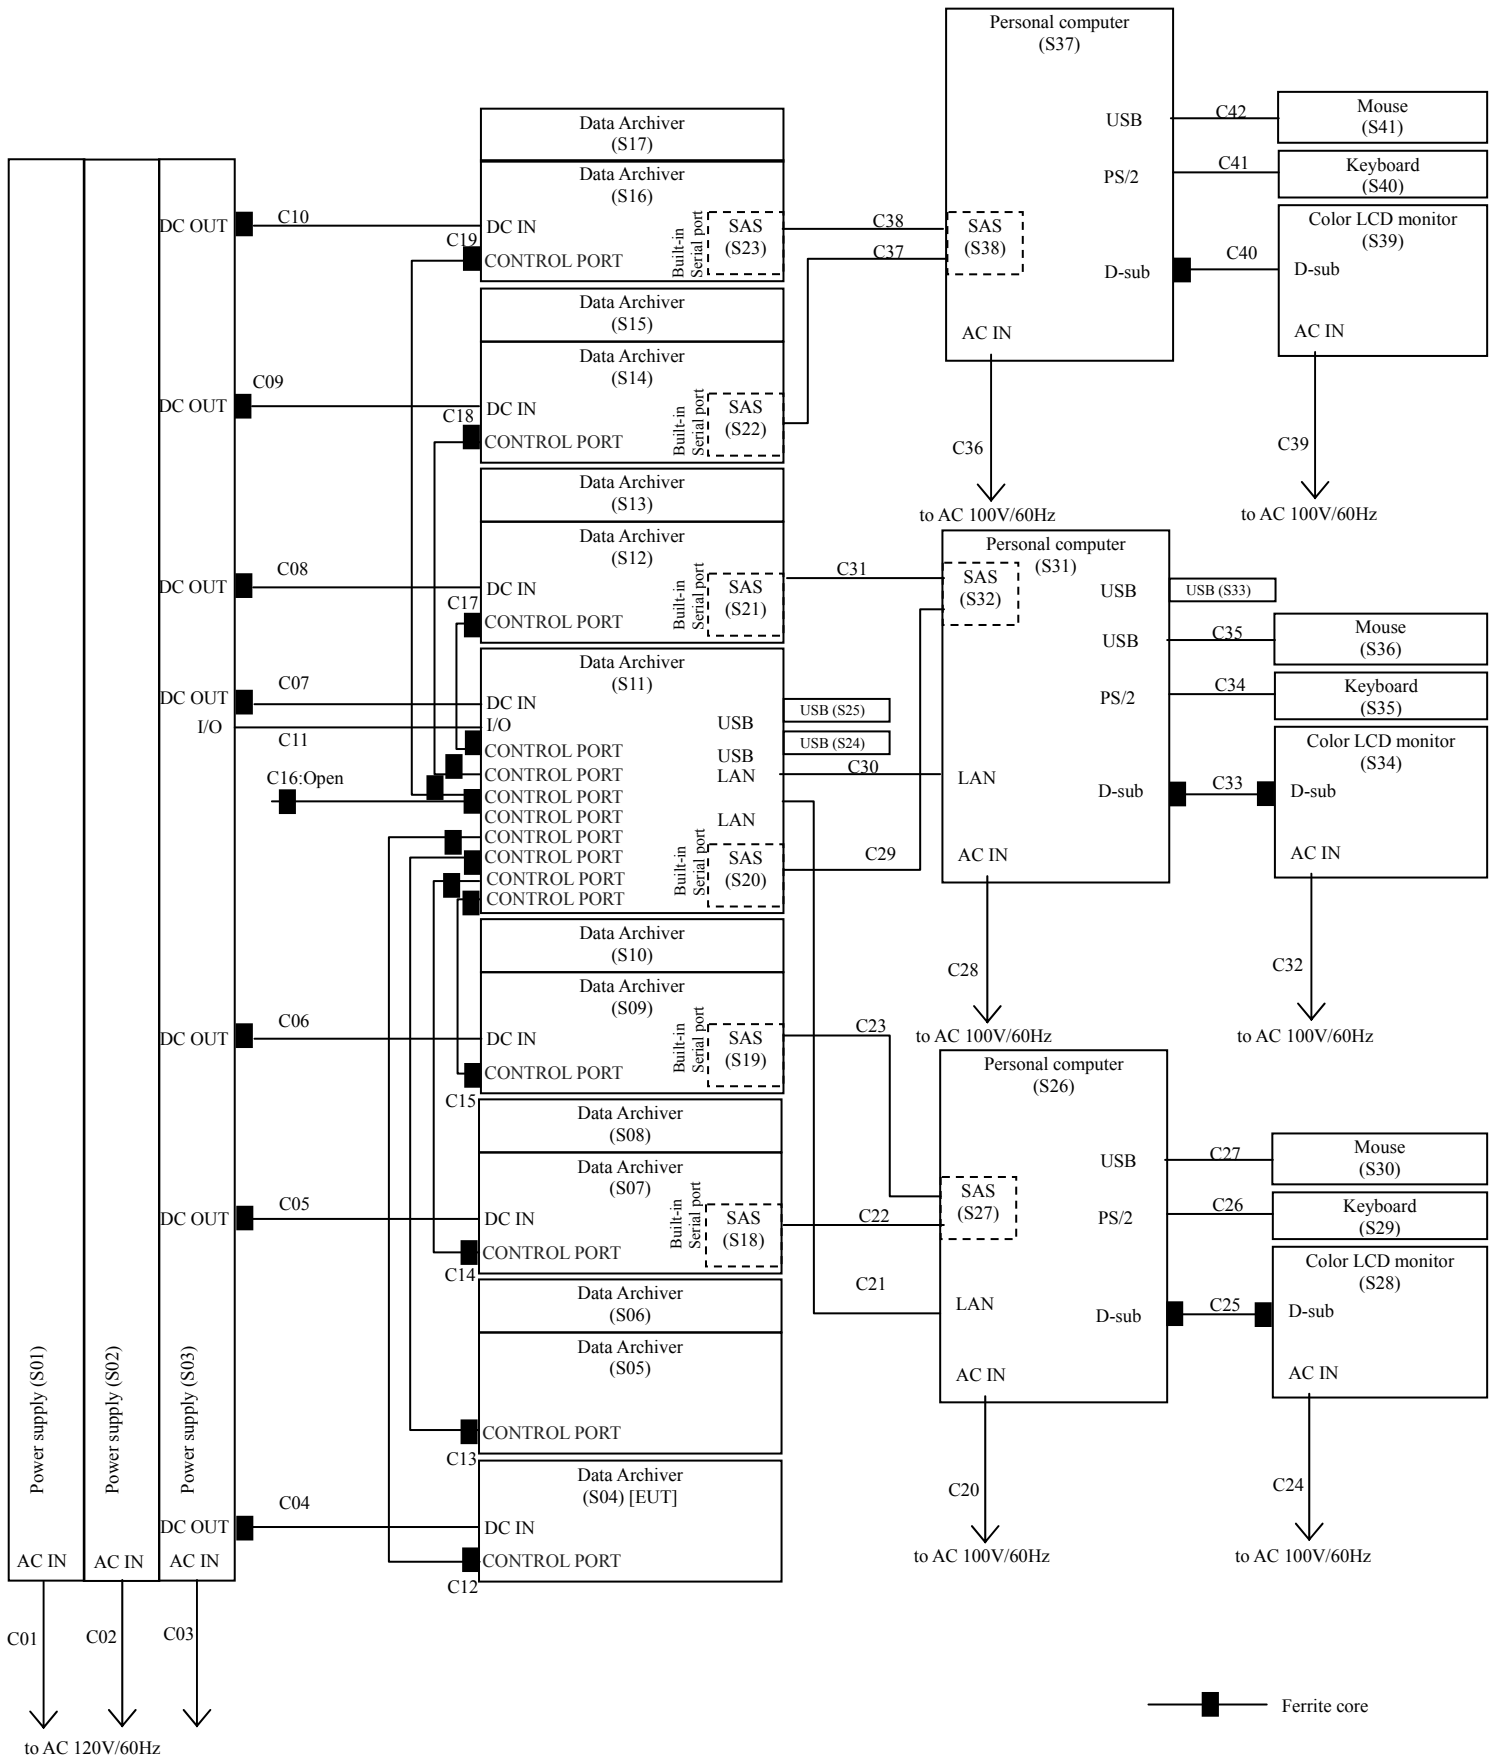



3.6. List of Test System

No.	Device Name	Model Number	Serial Number	Trade Name	Note
S01	Power supply	HFE1600	0189W4112	TDK-Lambda	
S02	Power supply	HFE1600	0113W4112	TDK-Lambda	
S03	Power supply	HFE1600	0012W4112	TDK-Lambda	
S04	Data Archiver	LB-DH83	sample1	Panasonic	EUT (Bottom Module)
S05	Data Archiver	LB-XC82	sample1	Panasonic	(Control Unit)
S06	Data Archiver	LB-XH82	sample1	Panasonic	(Extension Unit)
S07	Data Archiver	LB-XD82	sample1	Panasonic	(Writer Unit)
S08	Data Archiver	LB-XH82	sample2	Panasonic	(Extension Unit)
S09	Data Archiver	LB-XD82	sample2	Panasonic	(Writer Unit)
S10	Data Archiver	LB-XH82	sample3	Panasonic	(Extension Unit)
S11	Data Archiver	LB-DH80	sample1	Panasonic	(Base Module)
S12	Data Archiver	LB-XD82	sample3	Panasonic	(Writer Unit)
S13	Data Archiver	LB-XH82	sample4	Panasonic	(Extension Unit)
S14	Data Archiver	LB-XD82	sample4	Panasonic	(Writer Unit)
S15	Data Archiver	LB-XH82	sample5	Panasonic	(Extension Unit)
S16	Data Archiver	LB-XD82	sample5	Panasonic	(Writer Unit)
S17	Data Archiver	LB-XH82	sample6	Panasonic	(Extension Unit)
S18	SAS	ARC-1320-4i4x	-	ASK	
S19	SAS	ARC-1320-4i4x	-	ASK	
S20	SAS	ARC-1320-4i4x	-	ASK	
S21	SAS	ARC-1320-4i4x	-	ASK	
S22	SAS	ARC-1320-4i4x	-	ASK	
S23	SAS	ARC-1320-4i4x	-	ASK	
S24	USB	UHYBS-004GH	-	TOSHIBA	
S25	USB	UHYBS-004GH	-	TOSHIBA	
S26	Personal computer	1622A052200569	702571-24200	Diginnos	
S27	SAS	ARC-1320-8x	-	ASK	
S28	Color LCD monitor	1703FPt	-	DELL	
S29	Keyboard	KB-2650P	102050086295	-	
S30	Mouse	AM-1510-U	0099453	-	
S31	Personal computer	1622A052200552	702599-40624	Diginnos	
S32	SAS	ARC-1320-8x	-	ASK	
S33	USB	UHYBS-008GH	-	TOSHIBA	
S34	Color LCD monitor	RDT17 II VM	56005923NJ	MITSUBISHI	
S35	Keyboard	KB-2650P	102050086947	-	



No.	Device Name	Model Number	Serial Number	Trade Name	Note
S36	Mouse	XN966	LZ9280C2MUJ	DELL	
S37	Personal computer	16245022300036	705296-21024	Diginnos	
S38	SAS	LSI SAS 9200-8e	-	ARMS	
S39	Color LCD monitor	E198FPb	-	DELL	
S40	Keyboard	KB-2650P	102050086717	-	
S41	Mouse	AM-1510-U	0059603	-	

[Note]

(1) : Accessory of EUT



3.7. List of Cables

No.	Cable Name	Shielded (Y/N)	Length (m)	Note
C01	AC Power Cord	N	2.0	(3)
C02	AC Power Cord	N	2.0	(3)
C03	AC Power Cord	N	2.0	(3)
C04	DC Power Cord	Y	3.1	With one ferrite core (2-turn)
C05	DC Power Cord	Y	3.1	With one ferrite core (2-turn)
C06	DC Power Cord	Y	3.1	With one ferrite core (2-turn)
C07	DC Power Cord	Y	3.1	With one ferrite core (2-turn)
C08	DC Power Cord	Y	3.1	With one ferrite core (2-turn)
C09	DC Power Cord	Y	3.1	With one ferrite core (2-turn)
C10	DC Power Cord	Y	3.1	With one ferrite core (2-turn)
C11	I/O Cable	Y	2.1	
C12	Control Cable	Y	3.0	With two ferrite cores (1-turn)
C13	Control Cable	Y	3.0	With two ferrite cores (1-turn)
C14	Control Cable	Y	3.0	With two ferrite cores (1-turn)
C15	Control Cable	Y	3.0	With two ferrite cores (1-turn)
C16	Control Cable	Y	3.0	With two ferrite cores (1-turn)
C17	Control Cable	Y	3.0	With two ferrite cores (1-turn)
C18	Control Cable	Y	3.0	With two ferrite cores (1-turn)
C19	Control Cable	Y	3.0	With two ferrite cores (1-turn)
C20	AC Power Cord	N	1.8	(3)
C21	LAN Cable	Y	5.0	
C22	MiniSAS Cable	Y	1.9	
C23	MiniSAS Cable	Y	2.0	
C24	AC Power Cord	N	1.8	(3)
C25	D-sub Cable	Y	2.1	With two ferrite core (1-turn)
C26	PS/2 Cable	Y	1.4	(1)
C27	USB Cable	Y	1.3	(1)
C28	AC Power Cord	N	1.8	(3)
C29	MiniSAS Cable	Y	2.8	
C30	LAN Cable	Y	5.0	
C31	MiniSAS Cable	Y	2.8	
C32	AC Power Cord	N	1.9	(3)
C33	D-sub Cable	Y	1.8	With two ferrite core (1-turn)
C34	PS/2 Cable	Y	1.5	(1)
C35	USB Cable	Y	1.7	(1)
C36	AC Power Cord	N	1.8	(3)
C37	MiniSAS Cable	Y	3.0	
C38	MiniSAS Cable	Y	3.0	
C39	AC Power Cord	N	1.8	(3)
C40	D-sub Cable	Y	1.5	With one ferrite core (1-turn)
C41	PS/2 Cable	Y	1.4	(1)
C42	USB Cable	Y	1.3	(1)

[Note]

- (1) : Undetachable cable type
- (2) : Accessories cable of EUT
- (3) : 3-wires type,earth plug is grounded
- (4) : 2-wires type



4. AC POWER LINE CONDUCTED EMISSION MEASUREMENT

4.1. Test Procedure

- (1) The EUT is placed in accordance with ANSI C63.4-2009.
- (2) The EUT is activated as to simulate an actual operation.
- (3) Connect the EUT's AC power cord to one Line Impedance Stabilization Network (LISN).
- (4) Any other power cord of other equipment is connected to a LISN different from the LISN used for the EUT.
- (5) Connect the spectrum analyzer (*1) to the measuring port of the LISN for the EUT, using a calibrated coaxial cable.
- (6) To find out the maximum emission of the configuration of the EUT System, the operation mode and the position of the cables are changed, then preliminary conducted measurement are performed.
- (7) The spectrums are scanned from 150kHz to 30MHz and collect the six highest emissions minimum on the spectrum analyzer relative to the limits in the whole range.
- (8) The test receiver (*2) is connected to the LISN for the EUT, and the six highest emissions minimum recorded above are measured.

[Note]

(*1) Spectrum Analyzer Set Up Conditions

Frequency range : 150kHz – 30MHz
 Resolution bandwidth : 10kHz
 Video bandwidth : 1MHz
 Detector function : Peak mode

(*2) Test Receiver Set Up Conditions

Detector function : Quasi – Peak / Average (if necessary)
 IF bandwidth : 10kHz

4.2. Test Software List

KEC No.	Software Name	Version	Manufacture
TF-088	TEPTO Conducted emission automatic measurement	2.3.0320	TSJ
TF-110	Junction sheet	1.6H	KEC



4.3. Test Results

Measured Frequency (MHz)	LISN Factor (dB)	Meter Reading				Maximum RF Voltage		Limit		Margin for Limit	
		Q-Peak		Average		Q-Peak (dBμV)	Average (dBμV)	Q-Peak (dBμV)	Average (dBμV)	Q-Peak (dB)	Average (dB)
		Va (dBμV)	Vb (dBμV)	Va (dBμV)	Vb (dBμV)						
0.150	10.2	43.1	42.9	19.6	19.2	53.3	29.8	66.0	56.0	12.7	26.2
0.191	10.2	38.1	37.3	20.8	20.7	48.3	31.0	64.0	54.0	15.7	23.0
0.244	10.2	36.7	35.8	24.4	22.7	46.9	34.6	62.0	52.0	15.1	17.4
0.861	10.3	17.1	21.0	7.0	17.1	31.3	27.4	56.0	46.0	24.7	18.6
3.960	10.4	24.6	23.0	17.8	15.5	35.0	28.2	56.0	46.0	21.0	17.8
4.553	10.4	27.2	20.9	21.1	13.6	37.6	31.5	56.0	46.0	18.4	14.5
8.069	10.5	23.9	17.0	15.7	10.3	34.4	26.2	60.0	50.0	25.6	23.8
13.560	10.9	25.8	25.7	25.6	25.6	36.7	36.5	60.0	50.0	23.3	13.5
30.000	11.6	25.8	22.4	19.2	16.1	37.4	30.8	60.0	50.0	22.6	19.2

[Note]
LISN Factor includes the cable loss and attenuator loss.

[Calculation method]
Maximum RF Voltage (dBμV)
= Meter Reading (at maximum level of Va or Vb) (dBμV) + LISN Factor (dB)



At the next page, the result of exploratory conducted emission measurement by using the spectrum analyzer is shown by the spectrum chart.

Tested Date	Environment	
	Temperature	Humidity
14 November 2014	20 °C	37 %



Test Results in Graph



AC Line 1

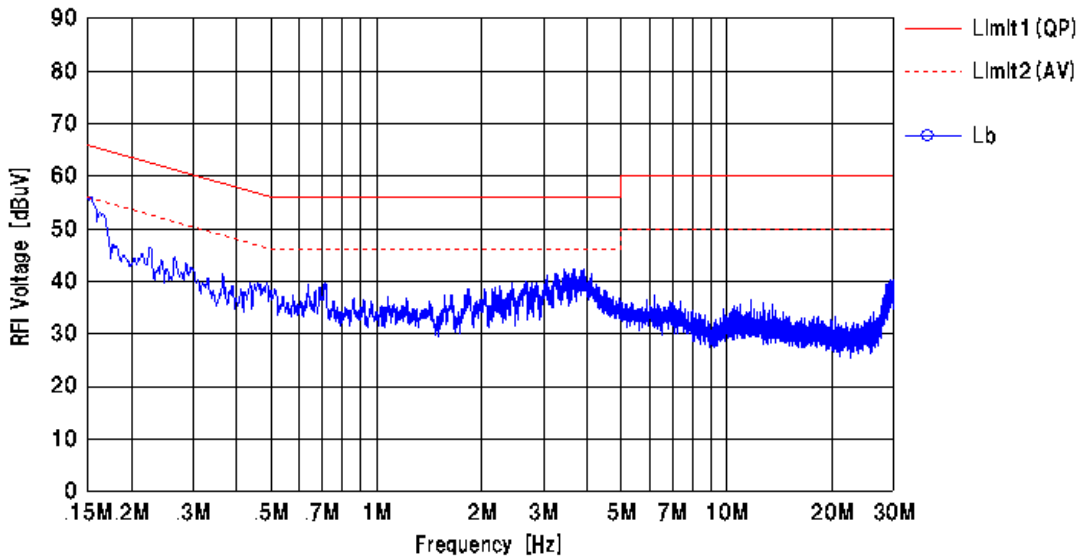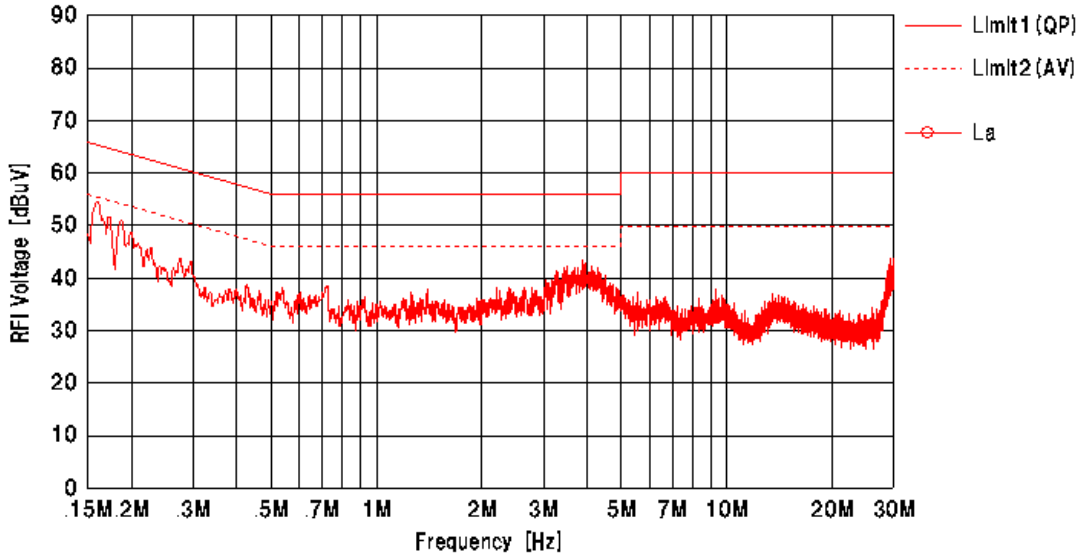



Test Results in Graph



AC Line 2

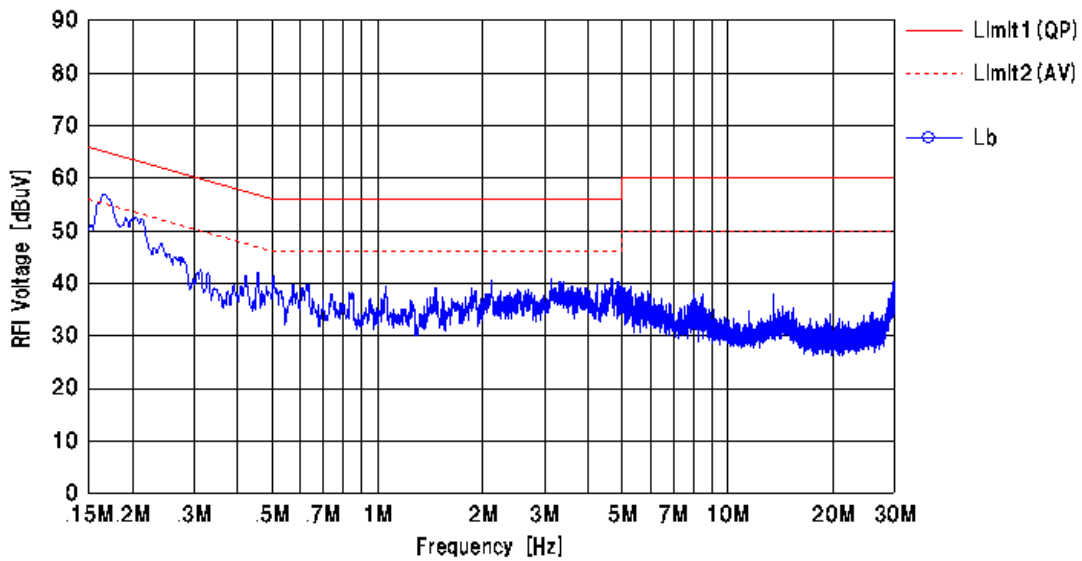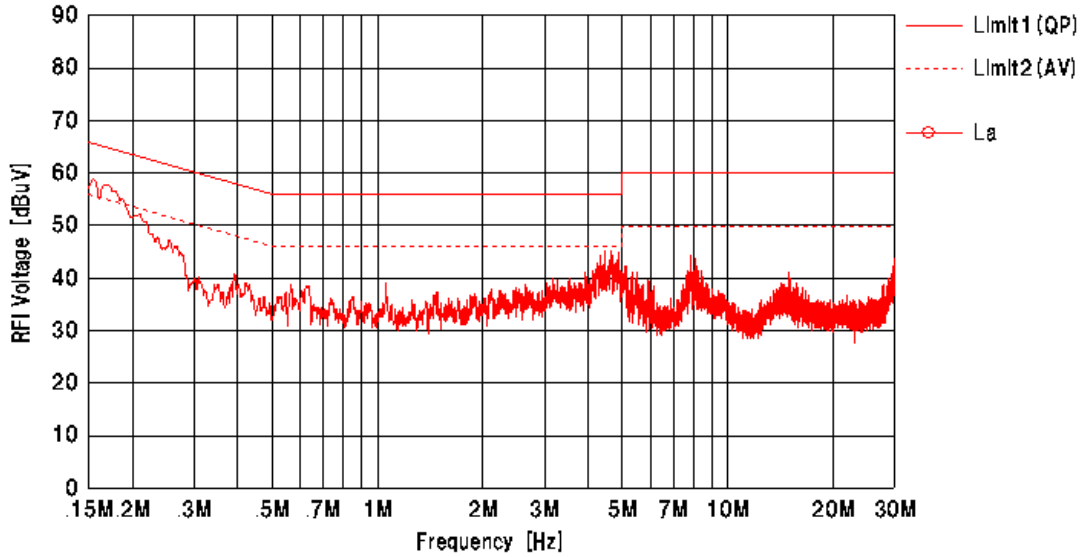



Test Results in Graph

AC Line 3

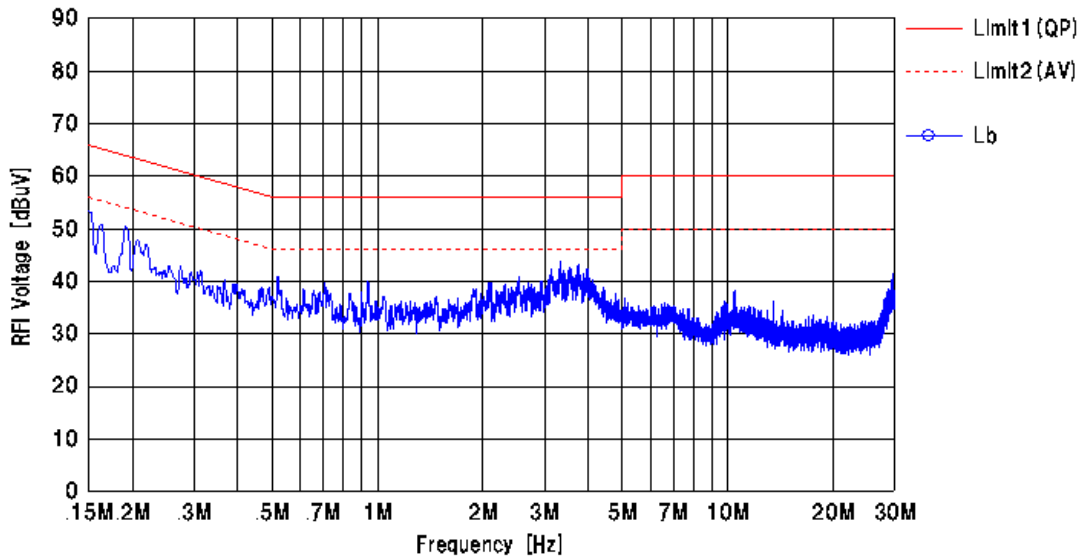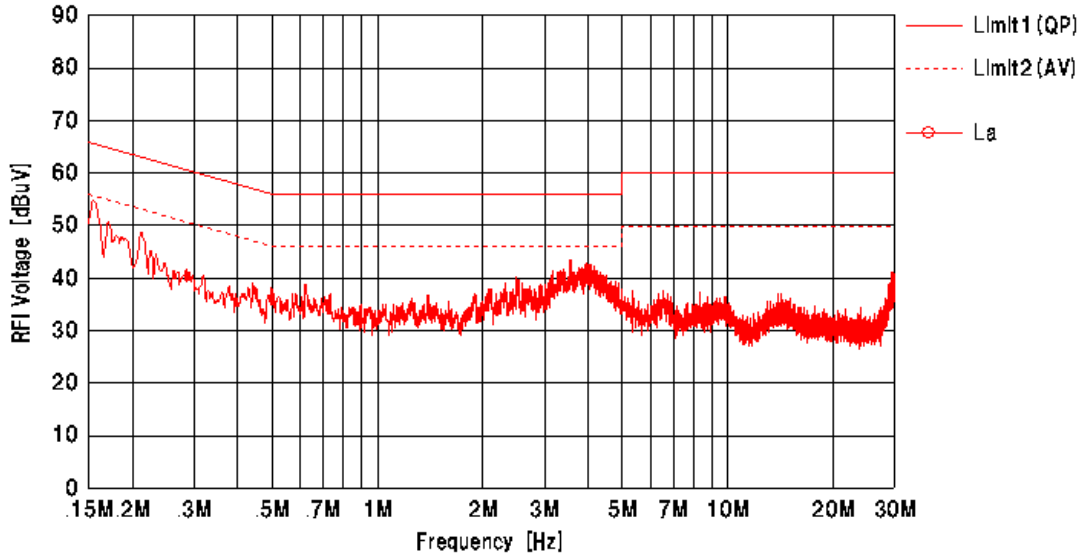



5. Radiated Emission (The Frequency Range of 9kHz to 30MHz)

5.1. Test Procedure

- (1) The EUT is placed in accordance with ANSI C63.4-2009.
- (2) The EUT is activated as to simulate an actual operation.
- (3) To find out the maximum emission of the configuration of the EUT System, the operation mode and the position of the cables are changed, then preliminary radiated measurement are performed using the spectrum analyzer (*1) and the loop antenna.
- (4) The emissions recorded are measured at the specified distance using the loop antenna and the test receiver (*2).
- (5) If the emission level is low and not detected at the specified distance, compliance test is performed at a closer distance and judged from calculating field strength at specified distance by using the measured data at a closer distance.

[Note]

- (*1) Spectrum Analyzer Set Up Conditions
- | | |
|----------------------|----------------------------------|
| Frequency range | : 9kHz – 150kHz / 150kHz – 30MHz |
| Resolution bandwidth | : 300Hz / 10kHz |
| Detector function | : Peak mode |
- (*2) Test Receiver Set Up Conditions
- | | |
|-------------------|--------------------------|
| Detector function | : Quasi – Peak |
| IF bandwidth | : 200Hz (9kHz – 150kHz) |
| | : 10kHz (150kHz – 30MHz) |



5.2. Test Results

1) Field Strength at 300m

Measured Frequency (MHz)	Antenna Factor (dB)	Meter Reading including 20dB Constant Antenna Factor (dB μ V/m)	Maximum Field Strength at 3m (dB μ V/m)	Conversion Factor 3m to 300m (dB)	Maximum Field Strength at 300m (dB μ V/m)	Limit at 300m (dB μ V/m)	Margin for Limit (dB)
* 0.04973	-0.3	76.2	75.9	-80.0	-4.1	33.6	37.7
* 0.06598	-0.5	55.4	54.9	-80.0	-25.1	31.2	56.3
* 0.09940	-0.6	52.5	51.9	-80.0	-28.1	27.6	55.7
* 0.21241	-0.6	71.9	71.3	-80.0	-8.7	21.0	29.7
* 0.28412	-0.6	65.3	64.7	-80.0	-15.3	18.5	33.8

2) Field Strength at 30m

Measured Frequency (MHz)	Antenna Factor (dB)	Meter Reading including 20dB Constant Antenna Factor (dB μ V/m)	Maximum Field Strength at 3m (dB μ V/m)	Conversion Factor 3m to 30m (dB)	Maximum Field Strength at 30m (dB μ V/m)	Limit at 30m (dB μ V/m)	Margin for Limit (dB)
* 0.49793	-0.6	48.5	47.9	-40.0	7.9	33.6	25.7
13.11000	1.1	24.3	25.4	-40.0	-14.6	29.5	44.1
13.41000	1.2	24.3	25.5	-40.0	-14.5	40.5	55.0
13.55300	1.2	28.3	29.5	-40.0	-10.5	50.4	60.9
13.56000	1.2	43.3	44.5	-40.0	4.5	83.9	79.4
13.56700	1.2	29.6	30.8	-40.0	-9.2	50.4	59.6
13.71000	1.2	24.5	25.7	-40.0	-14.3	40.5	54.8
14.01000	1.3	24.4	25.7	-40.0	-14.3	29.5	43.8
27.12000	3.6	22.6	26.2	-40.0	-13.8	29.5	43.3

The following are data that operates only LB-DH83. (Other equipments are in a standby.) Therefore, the frequencies of * mark are noise other than LB-DH83, and those results are comply with FCC Part 15 Section 15.209 (c).

1) Field Strength at 300m

Measured Frequency (MHz)	Antenna Factor (dB)	Meter Reading including 20dB Constant (dB μ V/m)	Maximum Field Strength at 3m (dB μ V/m)	Conversion Factor 3m to 300m (dB)	Maximum Field Strength at 300m (dB μ V/m)	Limit at 300m (dB μ V/m)	Margin for Limit (dB)
0.06598	-0.5	<25.0	<24.5	-80.0	<-55.5	<31.2	>86.7
0.09940	-0.6	<25.0	<24.4	-80.0	<-55.6	<27.6	>83.2
0.21241	-0.6	<25.0	<24.4	-80.0	<-55.6	<21.0	>76.6
0.28412	-0.6	<25.0	<24.4	-80.0	<-55.6	<18.5	>74.1

2) Field Strength at 30m

Measured Frequency (MHz)	Antenna Factor (dB)	Meter Reading including 20dB Constant (dB μ V/m)	Maximum Field Strength at 3m (dB μ V/m)	Conversion Factor 3m to 30m (dB)	Maximum Field Strength at 30m (dB μ V/m)	Limit at 30m (dB μ V/m)	Margin for Limit (dB)
0.49793	-0.6	<25.0	<24.4	-40.0	<-15.6	<33.6	>49.2



[Note]

- (1) Antenna Factor includes the cable loss.
- (2) Measurement Distance : 3m
- (3) Conversion Factor : FCC Part 15 Subpart A Section 15.31(f) (2) is applied.
- (4) Although these tests were performed other than open field area test site, adequate comparison measurements were confirmed against 30 m open field are test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 937606.

[Calculation method]

Maximum Field Strength (dB μ V/m) = Meter Reading (dB μ V/m) + Antenna Factor (dB) + Conversion Factor (dB)

Tested Date	Environment	
	Temperature	Humidity
13 November 2014	20°C	47 %

6. Radiated Emission (The Frequency Range of above 30MHz)

6.1. Test Procedure

- (1) The EUT is placed in accordance with ANSI C63.4-2009.
- (2) The EUT is activated as to simulate an actual operation.
- (3) To find out the maximum emission of the configuration of the EUT System, the operation mode and the position of the cables are changed, then preliminary radiated measurement are performed using the spectrum analyzer (*1) and the broad band antenna.
- (4) The spectrums are scanned from 30MHz to 1GHz, and collect the highest emissions on the spectrum analyzer relative to the limits in the whole range.
In the frequency above 1GHz, it is performed using the spectrum analyzer (*2) and the horn antenna.
- (5) The highest emissions are measured at the specified distance using the test receiver (*3) and the broad band antenna or the tuned dipole. In the frequency above 1GHz, they are measured using the spectrum analyzer (*4) and the horn antenna.

[Note]

(*1) Spectrum Analyzer Set Up Conditions

- Frequency range : 30MHz – 1GHz
- Resolution bandwidth : 100kHz
- Detector function : Peak mode

(*2) Spectrum Analyzer Set Up Conditions (Pre-measurement)

- Frequency range : 1GHz – Upper frequency of measurement range
- Resolution bandwidth : 1MHz

(*3) Test Receiver Set Up Conditions

- Detector function : Quasi – Peak
- IF bandwidth : 120kHz

(*4) Spectrum Analyzer Set Up Conditions

- Center Frequency : Measurement Frequency
- Resolution bandwidth : 1MHz
- Video bandwidth : 1MHz (Peak measurement)
10Hz or 30Hz (Average measurement)
- Attenuator : 10dB
- Y axis : Linear (Average measurement)

6.2. Test Software List

KEC No.	Software Name	Version	Manufacture
TF-059	TEPTO Radiated emission automatic measurement	2.3.0321	TSJ
TF-110	Junction sheet	1.6H	KEC



6.3. Test Results

Measured Frequency (MHz)	Antenna Factor (dB/m)	Meter Reading		Maximum Field Strength (dB μ V/m)	Limit (dB μ V/m)	Margin for Limit (dB)
		Horizontal Polarization (dB μ V)	Vertical Polarization (dB μ V)			
40.68	-4.0	25.3	38.5	34.5	40.0	5.5
67.80	-11.1	44.1	48.5	37.4	40.0	2.6
81.36	-11.2	40.0	42.8	31.6	40.0	8.4
108.48	-6.0	41.7	46.0	40.0	43.5	3.5
569.52	-0.8	37.1	30.1	36.3	46.0	9.7
596.64	-0.6	38.6	30.2	38.0	46.0	8.0
623.76	0.0	36.8	25.5	36.8	46.0	9.2
650.88	0.5	36.2	28.1	36.7	46.0	9.3
705.12	1.6	35.8	28.7	37.4	46.0	8.6
732.24	2.2	37.3	29.8	39.5	46.0	6.5
745.80	2.4	36.2	30.2	38.6	46.0	7.4

[Note]

(1) Antenna Factor includes the cable loss, attenuator loss and pre-amplifier gain.

Antenna Factor includes the cable loss and attenuator loss.

Above 1000MHz, the antenna factor includes the cable loss and pre-amplifier gain.

(2) * mark in Measured Frequency : Measured with the tuned dipole antenna.

no mark in Measured Frequency : Measured with the broadband antenna.

(3) Upper Frequency : 1GHz 2GHz 5GHz

5th harmonic of the highest frequency 40GHz

The emissions were checked to the upper frequency, and the lower emissions than the listed emissions in the above tables were omitted.

(4) Measurement Distance : <below 1GHz> 3m 10m

<above 1GHz> 3m 10m

(5) The other emissions were the noise from the IT devices, and it conforms to the FCC Part 15 Subpart B - Unintentional Radiators class A limit. (Test Report No. A-019-14-A)

See next page, the radio device power off spectrum chart.

[Calculation method]

Maximum Field Strength (dB μ V/m)



= Meter Reading (at maximum level of Horizontal or Vertical) (dB μ V) + Antenna Factor (dB/m)

Tested Date	Environment	
	Temperature	Humidity
13 November 2014	20°C	47 %



Test Results in Graph



Transmission of RFID : ON

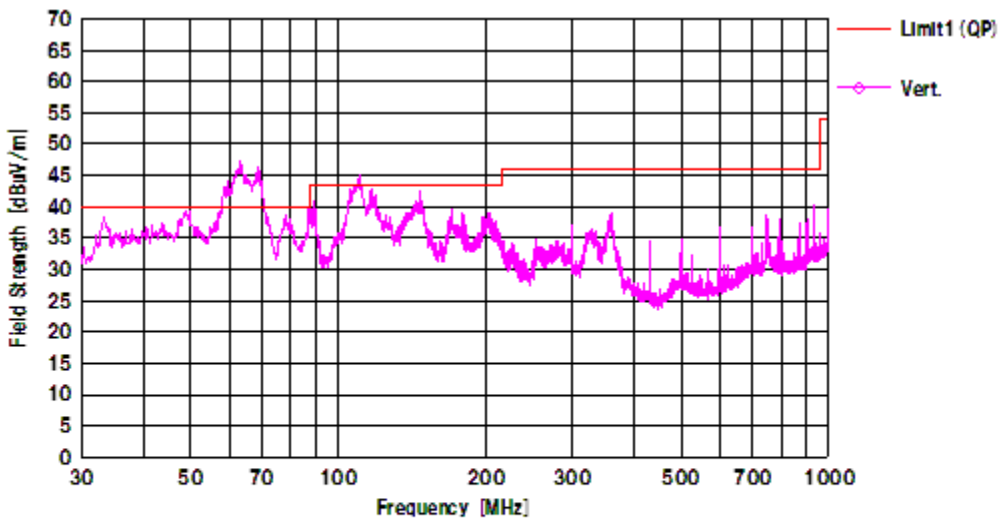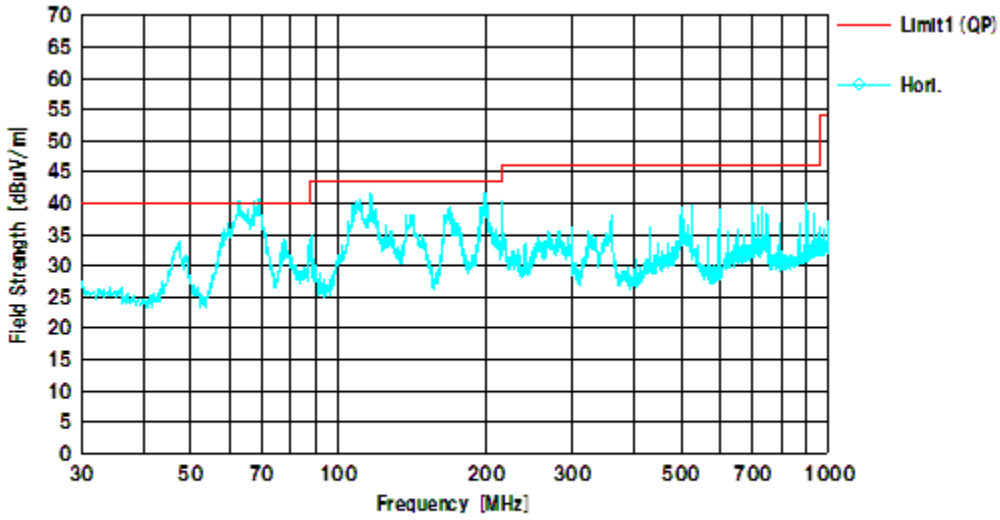



Test Results in Graph

Transmission of RFID : OFF

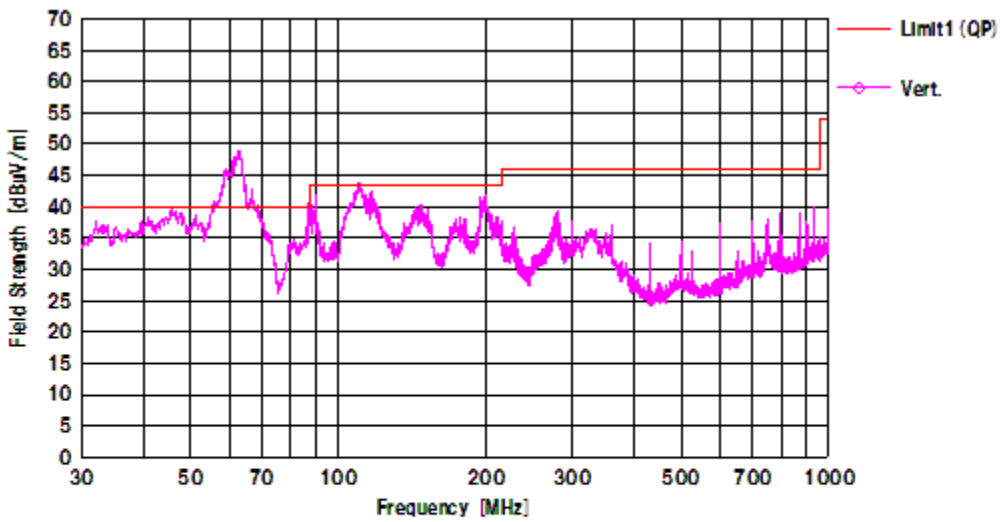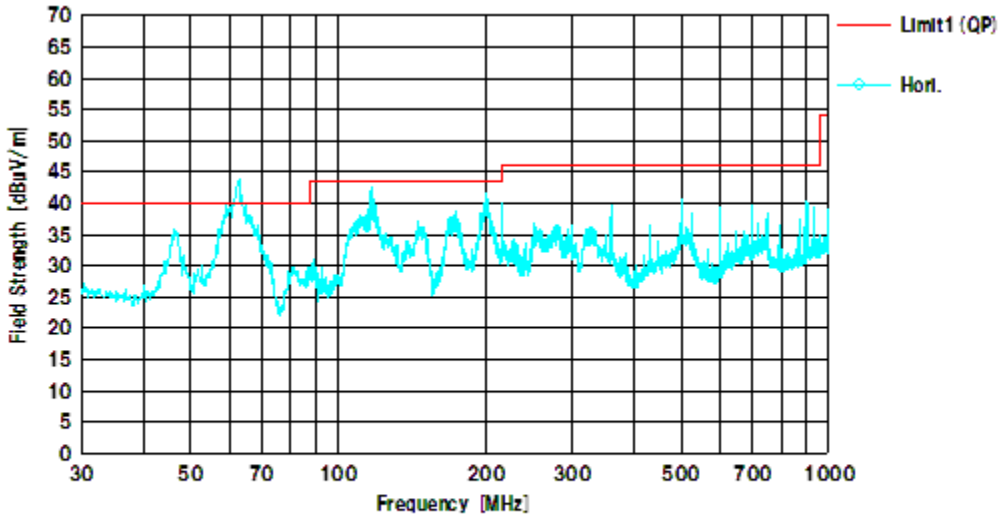

7. 20dB BANDWIDTH MEASUREMENT

7.1. Test Procedure


- (1) Connect the EUT RF output port to spectrum analyzer (*1) via calibrated coaxial cable and suitable attenuator (if necessary).
- (2) Activates the EUT System and execute the software prepared for test, if necessary.
- (3) To find out the maximum emission condition, the transmitting data rate of EUT is set to maximum data rate.
- (4) 20dB Bandwidth is measured using the function of spectrum analyzer.

[Note]

(*1) Spectrum Analyzer Set Up Conditions

Frequency Span	: 100kHz
Resolution bandwidth	: 1kHz
Video bandwidth	: 3kHz
Detector function	: Peak
x dB	: -20dB

7.2. Test Results

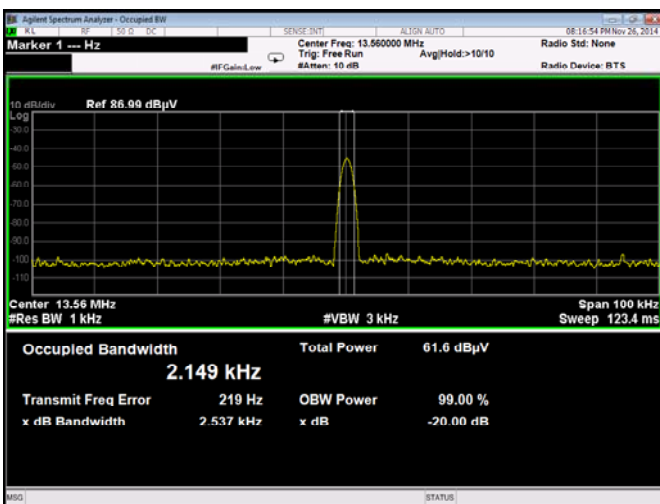

Test Items	Result(kHz)
20dB Bandwidth	2.537
99% Occupied Bandwidth	2.149

Tested Date	Environment	
	Temperature	Humidity
27 November 2014	20 °C	36 %



8. FREQUENCY TOLERANCE OF CARRIER SIGNAL

8.1. Test Procedure

- (1) Connect the EUT RF output port to spectrum analyzer via calibrated coaxial cable and suitable attenuator (if necessary).
- (2) Activates the EUT System and execute the software prepared for test, if necessary.
- (3) To find out the maximum emission condition, the transmitting data rate of EUT is set to maximum data rate.
- (4) The operating frequency measured by using frequency counter function of spectrum analyzer (*1) .
- (5) Frequency stability measurement was carried out from the high temperature to low temperature in order.

[Note]

(*1) Spectrum Analyzer Set Up Conditions

Center Frequency	: Equal to operating frequency of EUT
Resolution bandwidth	: 3 kHz
Video bandwidth	: 100 Hz
Sweep	: Auto
Function	: Frequency counter



8.2. Test Results

[Temperature : 40deg.C]

Test Condition	Original Frequency (MHz)	Measured Frequency (MHz)	Tolerance (kHz)	Tolerance (%)	Limit (%)
startup	13.56	13.560172	0.172	0.0013	±0.01
after 2minutes	13.56	13.560167	0.167	0.0012	±0.01
after 5minutes	13.56	13.560167	0.167	0.0012	±0.01
after 10minutes	13.56	13.560167	0.167	0.0012	±0.01

[Temperature : 30deg.C]

Test Condition	Original Frequency (MHz)	Measured Frequency (MHz)	Tolerance (kHz)	Tolerance (%)	Limit (%)
startup	13.56	13.560193	0.193	0.0014	±0.01
after 2minutes	13.56	13.560184	0.184	0.0014	±0.01
after 5minutes	13.56	13.560184	0.184	0.0014	±0.01
after 10minutes	13.56	13.560184	0.184	0.0014	±0.01

[Temperature : 20deg.C]

Test Condition	Original Frequency (MHz)	Measured Frequency (MHz)	Tolerance (kHz)	Tolerance (%)	Limit (%)
startup	13.56	13.560214	0.214	0.0016	±0.01
after 2minutes	13.56	13.560206	0.206	0.0015	±0.01
after 5minutes	13.56	13.560205	0.205	0.0015	±0.01
after 10minutes	13.56	13.560205	0.205	0.0015	±0.01

[Temperature : 10deg.C]

Test Condition	Original Frequency (MHz)	Measured Frequency (MHz)	Tolerance (kHz)	Tolerance (%)	Limit (%)
startup	13.56	13.560231	0.231	0.0017	±0.01
after 2minutes	13.56	13.560226	0.226	0.0017	±0.01
after 5minutes	13.56	13.560225	0.225	0.0017	±0.01
after 10minutes	13.56	13.560225	0.225	0.0017	±0.01

[Temperature : 20deg.C, Voltage : AC102V(85%)]

Test Condition	Original Frequency (MHz)	Measured Frequency (MHz)	Tolerance (kHz)	Tolerance (%)	Limit (%)
startup	13.56	13.560215	0.215	0.0016	±0.01
after 2minutes	13.56	13.560206	0.206	0.0015	±0.01
after 5minutes	13.56	13.560205	0.205	0.0015	±0.01
after 10minutes	13.56	13.560205	0.205	0.0015	±0.01

[Temperature : 20deg.C, Voltage : AC138V(115%)]

Test Condition	Original Frequency (MHz)	Measured Frequency (MHz)	Tolerance (kHz)	Tolerance (%)	Limit (%)
startup	13.56	13.560215	0.215	0.0016	±0.01
after 2minutes	13.56	13.560206	0.206	0.0015	±0.01
after 5minutes	13.56	13.560205	0.205	0.0015	±0.01
after 10minutes	13.56	13.560205	0.205	0.0015	±0.01



[Calculation method]
Tolerance (kHz) = Result – Channel Frequency
Tolerance (%) = (Tolerance (kHz) / Channel Frequency (kHz)) × 10²

Tested Date	Environment	
	Temperature	Humidity
1 December 2014	20°C	38 %



9. TEST EQUIPMENT

· AC Power Line Conducted Emission Measurement

KEC No.	Equipment	Manufacturer	Model No.	Last Cal.	Next Cal.
AT-119	Fixed Attenuator	JFW	50HF-010N	2014/09	2015/09
AX-060	GP-IB Selector Unit	A · B · O	TM-220	2014/09	2015/09
AX-541	50Ω Terminator	STACK	T1302	2014/09	2015/09
FL-106	LISN	KYORITSU	KNW-407	2014/09	2015/09
FL-108	LISN	KYORITSU	KNW-242	2014/11	2015/09
FL-108-1	50Ω Terminator	STACK	T1302	2014/09	2015/09
FL-110	LISN	KYORITSU	KNW-242	2014/09	2015/09
FL-110-1	50Ω Terminator	STACK	T1302	2014/09	2015/09
FL-209	LISN	KYORITSU	KNW-407	2014/09	2015/09
FL-210	LISN	KYORITSU	KNW-242C	2014/09	2015/09
FL-210-1	50Ω Terminator	JFW	50T-001-BNC	2014/09	2015/09
FS-088	Test Receiver	ROHDE & SCHWARZ	ESHS10	2014/02	2015/02
FS-103	Test Receiver	Schwarzbeck	FCKL1528	2013/12	2014/12
SA-060	Spectrum Analyzer	Agilent	N9010A	2014/07	2015/06

· Radiated Emission (9kHz to 30MHz)

KEC No.	Equipment	Manufacturer	Model No.	Last Cal.	Next Cal.
AN-074	Loop Antenna	ROHDE & SCHWARZ	HFH2-Z2	2012/09	2015/04
FS-088	Test Receiver	ROHDE & SCHWARZ	ESHS10	2014/02	2015/02
SA-060	Spectrum Analyzer	Agilent	N9010A	2014/07	2015/06

· Radiated Emission (above 30MHz)

KEC No.	Equipment	Manufacturer	Model No.	Last Cal.	Next Cal.
AM-105	Pre-Amplifier	SONOMA	310N	2014/04	2015/04
AN-216	LPDA Antenna	Schwarzbeck	UHALP 9108A	2014/04	2015/04
AN-219	Biconical Antenna	Schwarzbeck	VHA9103/BBA9106	2014/04	2015/04
AT-115	Fixed Attenuator	JFW	50HF-006N	2014/03	2015/04
AT-156	Fixed Attenuator	Anritsu	MP721B	2014/03	2015/04
AX-064	RF Relay Matrix Unit	TSJ	RFM-E21	2014/04	2015/04
FS-079	Test Receiver	ROHDE & SCHWARZ	ESVD	2013/11	2014/11
SA-062	Test Receiver	Agilent Technologies	N9038A	2014/05	2015/04

· 20dB Bandwidth Measurement

· Frequency Tolerance of Carrier Signal

KEC No.	Equipment	Manufacturer	Model No.	Last Cal.	Next Cal.
AT-148	Fixed Attenuator	Anritsu	41KC-10	2014/04	2015/04
SA-065	Spectrum Analyzer	Agilent	N9030A	2014/11	2015/11
SF-093	Temperature Chamber	ESPEC CORP.	SH-641	2014/07	2015/07

Note : (*1) We check the performance, before using this device.

The overall program of calibration and verification of equipment is designed and operated so as to ensure that measurements made by KEC are traceable to national standards of measurement or equivalent abroad.