

**EXHIBIT 5**

Test Report

APPLICATION FOR CERTIFICATION  
On Behalf of  
Matsushita Electric Industrial Co., Ltd.  
17" Multi-Scan Color Monitor

Model : (1)TX-T7S37\* (2)M-T7S37\*

FCC ID : ACJ92512128

Prepared for : Matsushita Electric Industrial Co., Ltd.  
One Panasonic Way, Panazip 4B-8,  
Secaucus, NJ 07094, U.S.A.

Prepared By : Taiwan Tokin EMC Eng. Corp.  
No. 53-11, Tin-Fu Tsun, Lin-Kou,  
Taipei Hsien, Taiwan, R.O.C.

Tel : (02) 2609-9301, 2609-2311  
Fax : (02) 2609-9303

File Number : ATM-G99216  
Report Number : TTEMC-F99068  
Date of Test : May. 10 ~ 11, 1999  
Date of Report : May. 13, 1999

## TABLE OF CONTENTS

Description	Page
Test Report Certification.....	3
<b>1.GENERAL INFORMATION .....</b>	<b>4</b>
1.1. Description of Device (EUT).....	5
1.2. Tested Supporting System Details.....	6
1.3. Description of Test Facility .....	7
<b>2.POWERLINE CONDUCTED TEST.....</b>	<b>7</b>
2.1. Test Equipment.....	7
2.2. Block Diagram of Test Setup.....	8
2.3. Powerline Conducted Emission Limit (CLASS B) .....	8
2.4. EUT's Configuration during Compliance Measurement.....	8
2.5. Operating Condition of EUT .....	9
2.6. Test Procedure .....	9
2.7. Line Conducted RF Voltage Measurement Results.....	16
<b>3.RADIATED EMISSION TEST .....</b>	<b>16</b>
3.1. Test Equipment.....	16
3.2. Block Diagram of Test Setup.....	17
3.3. Radiation Limit (CLASS B) .....	17
3.4. EUT's Configuration during Compliance Measurement.....	17
3.5. Operating Condition of EUT .....	18
3.6. Test Procedure .....	19
3.7. Radiated Emission Measurement Results.....	21
<b>4.DEVIATIONS TO TEST SPECIFICATIONS .....</b>	<b>22</b>
<b>5.PHOTOGRAPHS .....</b>	<b>22</b>
5.1. Photos of Powerline Conducted Measurement.....	23
5.2. Photos of Radiated Measurement at Open Field Test Site .....	25
5.3. Photos of Radiated Measurement at Anechoic Chamber .....	26
APPENDIX I (Conducted Test Data) .....	27
APPENDIX II (Radiated Test Data at Anechoic Chamber) .....	27

## TEST REPORT CERTIFICATION

Applicant : Matsushita Electric Industrial Co., Ltd.  
 Manufacturer : Matsushita Electric (Taiwan) Co., Ltd.  
 FCC ID : ACJ92512128  
 EUT Description : 17" Multi-Scan Color Monitor  
                   (A) MODEL NO. : (1)TX-T7S37\* (2)M-T7S37\*  
                   (B) SERIAL NO. : TB9230045  
                   (C) POWER SUPPLY : AC 120V/60Hz

Measurement Procedure Used :

FCC RULES AND REGULATIONS PART 15 SUBPART B CLASS B OCTOBER 1997  
AND FCC / ANSI C63.4-1992


The device described above was tested by TAIWAN TOKIN EMC ENG. CORP. to determine the maximum emission levels emanating from the device. The maximum emission levels were compared to the FCC Part 15B Class B limits both radiated and conducted emissions.

The measurement results were contained in this test report and TAIWAN TOKIN EMC ENG. CORP. was assumed full responsibility for the accuracy and completeness of these measurements. Also, this report showed that the EUT to be technically compliance with the FCC official limits.


This report applied to above tested sample only. This report shall not be reproduced in part without written approval of Taiwan Tokin EMC Eng. corp.

The test results in this test report are traceable to national or international standards.

Date of Test : May. 10 ~ 11, 1999

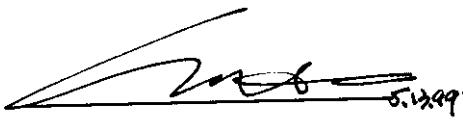Prepared by :   
(SHELENE HOU)

Test Engineer :   
(ALLEN WANG)

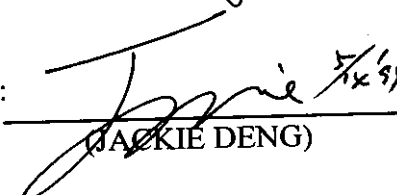Approve & Authorized Signer :   
(JACKIE DENG)

# 1. GENERAL INFORMATION

## 1.1. Description of Device (EUT)

Description	:	17" Multi-Scan Color Monitor
Model Number	:	(1)TX-T7S37* (2)M-T7S37*
		The model (1) is for Panasonic, (2) is for OEM manufacturer and the "*" may be numeral 1 to 9 or alphabet A to Z.
Serial Number	:	TB9230045
Applicant	:	Matsushita Electric Industrial Co., Ltd.  One Panasonic Way, Panazip 4B-8, Secaucus, NJ 07094, U.S.A.
Manufacturer	:	Matsushita Electric (Taiwan) Co., Ltd.  579 Yuan San Road, Chung-Ho, Taipei Hsien 23506, Taiwan, R.O.C.
CRT	:	Panasonic, M/N 41LQU480X11
Data Cable	:	Shielded, Detachable, 1.5m Bonded two ferrite cores
Power Cord	:	Non-Shielded, Detachable, 1.8m
Date of Sample Received	:	May. 07, 1999
Type of Sample Tested	:	Engineering Sample
Date of Test	:	May. 10 ~ 11, 1999

## 1.2. Tested Supporting System Details

### 1.2.1. PERSONAL COMPUTER

Model Number	:	PC763
Serial Number	:	TA421U7881
FCC ID	:	AO9-PC76X
Manufacturer	:	Digital
Switching Power	:	Astec
Supply	:	M/N SA-201-3440
Floppy Driver	:	Teac Corp.
3.5"	:	M/N FD-235HF
VGA Card	:	Sixgraph Computing Ltd. M/N Wiz 924 S/N 189477 FCC ID JYOWIZ01
Disk Ctrl Card	:	Within Mother Board
Serial/Parallel Card	:	Within Mother Board
Power Cord	:	Non-Shielded, Detachable, 1.8m

### 1.2.2. KEYBOARD

Model Number	:	5121
Serial Number	:	J83300809
FCC ID	:	E5XKBM104M10UC
Manufacturer	:	Behavior Tech Computer Corp.
Data Cable	:	Shielded, Undetachable, 1.0m

### 1.2.3. PRINTER

Model Number	:	2225C+
Serial Number	:	3123S97227
FCC ID	:	DSI6XU2225
Manufacturer	:	Hewlett Packard
Power Adapter	:	Kani, Model AD-09
	:	Non-Shielded, Detachable, 2.0m
Data Cable	:	Shielded, Detachable, 1.2m

### 1.2.4. MODEM #1

Model Number	:	DM-1414
Serial Number	:	980034382
FCC ID	:	IFAXDM1414
Manufacturer	:	Aceex
Data Cable	:	Shielded, Detachable, 1.2m
Power Adapter	:	Amigo, Model AM-91000A
	:	Non-Shielded, Undetachable, 1.8m

## 1.2.5. MODEM #2

Model Number : DM-1414  
 Serial Number : 980034381  
 FCC ID : IFAXDM1414  
 Manufacturer : Aceex  
 Data Cable : Shielded, Detachable, 1.2m  
 Power Adapter : Amigo, Model AM-91000A  
 Non-Shielded, Undetachable, 1.8m

## 1.2.6. MOUSE

Model Number : M-S35  
 Serial Number : LZA82103124  
 FCC ID : DZL211029  
 Manufacturer : Logitech  
 Data Cable : Non-Shielded, Undetachable, 1.8m

## 1.3. Description of Test Facility

Site Description : Feb. 13, 1998 File on  
 (No. 5 Open Site) Federal Communication Commission  
 FCC Engineering Laboratory  
 7435 Oakland Mills Road  
 Columbia, MD 21046, U.S.A.

Site Description : Aug. 22, 1997 Re-file on  
 (Anechoic Chamber) Federal Communication Commission  
 FCC Engineering Laboratory  
 7435 Oakland Mills Road  
 Columbia, MD 21046, U.S.A.

Name of Firm : Taiwan Tokin EMC Eng. Corp.

Site Location : No. 53-11, Tin-Fu Tsun, Lin-Kou,  
 Taipei Hsien, Taiwan, R.O.C.

NVLAP lab. Code : 200077-0

DAR-Registration No. : DAT-P-092/99-00

## 2. POWERLINE CONDUCTED TEST


### 2.1. Test Equipment

The following test equipments were used during the power line conducted tests :


Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESHS 10	844591/015	Jan.30, 99'	1 Year
2.	L.I.S.N. # 1	Kyoritsu	KNW-407	8-1370-9	Jun.03, 98'	1 Year
3.	L.I.S.N. # 2	Kyoritsu	KNW-407	8-1370-10	Jun.03, 98'	1 Year

### 2.2. Block Diagram of Test Setup

#### 2.2.1. EUT Power Connects to L.I.S.N. Directly

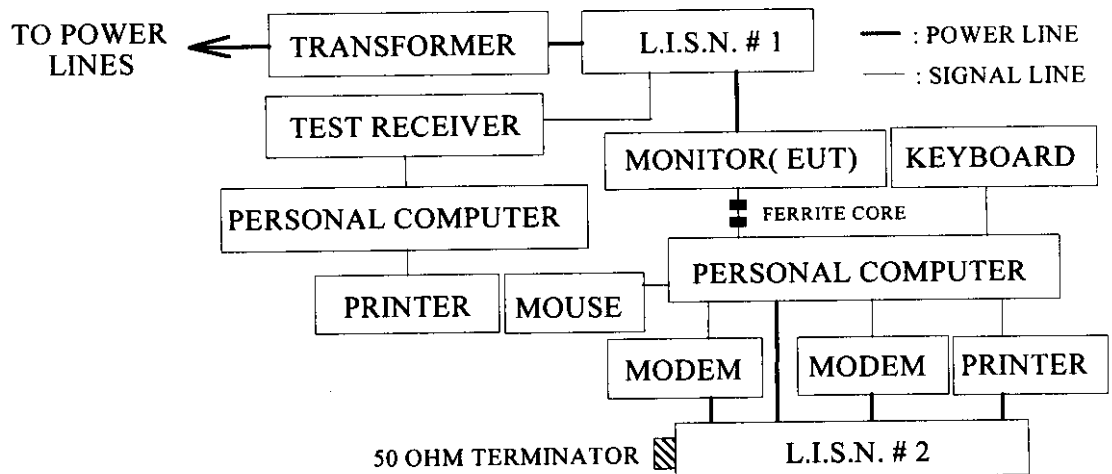

#### 2.2.2. EUT Power connects to PC AC Outlet then PC power connects to L.I.S.N.

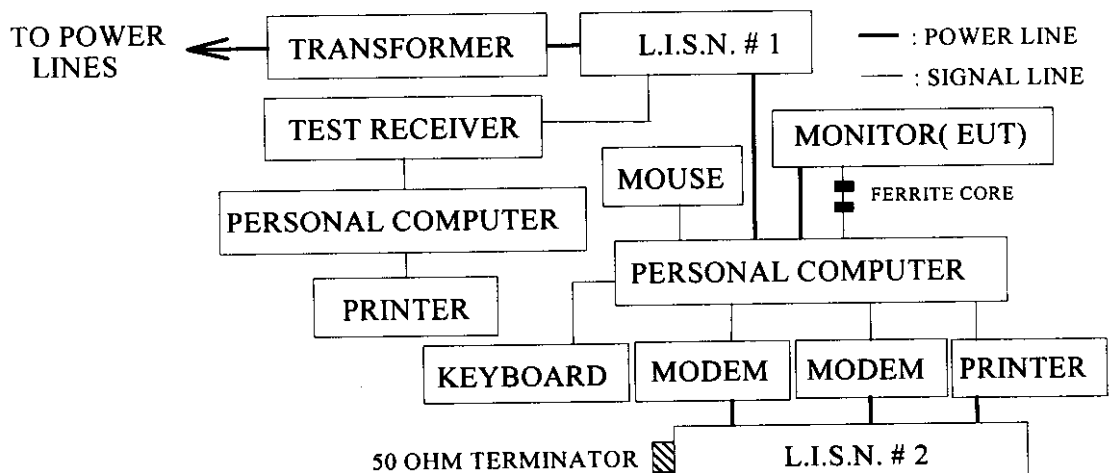



## 2.6. Test Procedure

The EUT was connected to the power mains through a line impedance stabilization network (L.I.S.N.# 1). The EUT is also connected to PC power outlet then the PC power cord connected to the power mains through a line impedance stabilization network (L.I.S.N # 1.). The other peripheral devices power cord connected to the power mains through a line impedance stabilization network (L.I.S.N. # 2). This provided a 50 ohm coupling impedance for the measuring equipment. (Please refer to the block diagram of the test setup and photographs.)

Both sides of A.C. line were checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to FCC ANSI C63.4-1992 on conducted measurement.

The bandwidth of the R&S Test Receiver ESHS 10 was set at 10KHz.

The frequency range from 450KHz to 30MHz was checked.

## 2.7. Line Conducted RF Voltage Measurement Results

### **PASSED.**

The following test modes were done on conducted measurement and reported the worst test modes 5 & 10 in the next pages, the others test data are attached within Appendix I.

(Test Date : May. 10, 1999    Temperature : 22°C    Humidity : 65 % )

(Test Date : May. 11, 1999    Temperature : 22°C    Humidity : 64 % )

Mode	Frequency Resolution	EUT Power	Reference Data #
1.	37.9KHz / 640*480	Connect to L.I.S.N	# 176, 177
2.	48.1KHz / 800*600	Connect to L.I.S.N	# 179, 178
3.	58KHz / 1024*768	Connect to L.I.S.N	# 180, 181
4.	61.6KHz / 1280*960	Connect to L.I.S.N	# 183, 182
※ 5.	66KHz / 1280*1024	Connect to L.I.S.N	# 184 (185), 186 (187)
6.	37.9KHz / 640*480	Connect to PC	# 231, 230
7.	48.1KHz / 800*600	Connect to PC	# 232, 233
8.	58KHz / 1024*768	Connect to PC	# 235, 234
9.	61.6KHz / 1280*960	Connect to PC	# 236, 237
※ 10.	66KHz / 1280*1024	Connect to PC	# 238 (239), 240 (241)


# TOKIN

TAIWAN TOKIN EMC ENG. CORP.

Test Site:  
#53-11 Tingfu Tsun, Linkou,  
Taipei, Taiwan R.O.C.  
Tel:02-26092133 Fax:02-26099303

Data#: 184 File#: MATSUSHI.EMI

Date: 1999-05-10 Time: 13:47:09

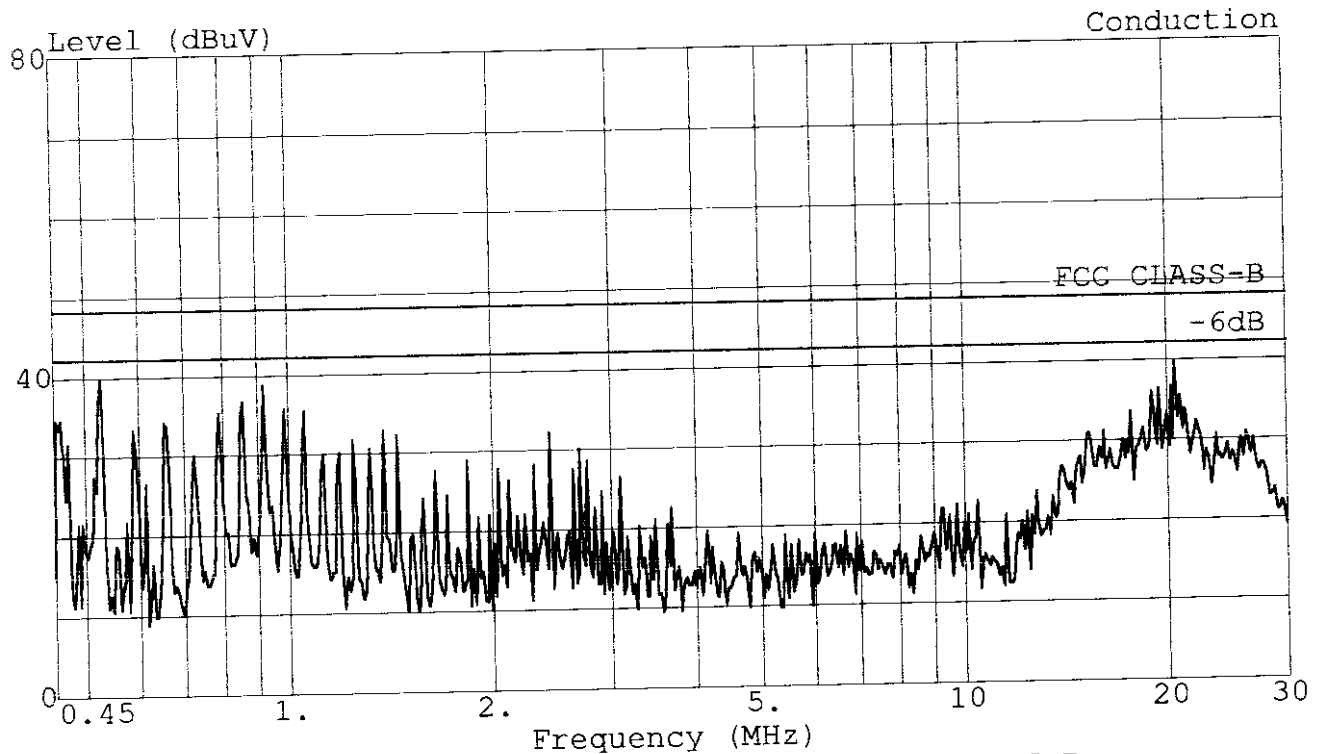

Trace: Ref Trace:  
Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 NEUTRAL  
EUT : 17" MULTI-SCAN COLOR MONITOR  
Power: 120Vac/60Hz  
Memo : M/N:TX-T7S37\*/M-T7S37\*  
: 1280\*1024;66KHz  
: EUT TO LISN


# TOKIN

TAIWAN TOKIN EMC ENG. CORP.

Test Site:  
#53-11 Tingfu Tsun, Linkou,  
Taipei, Taiwan R.O.C.  
Tel:02-26092133 Fax:02-26099303

Data#: 186 File#: MATSUSHI.EMI

Date: 1999-05-10 Time: 13:53:12

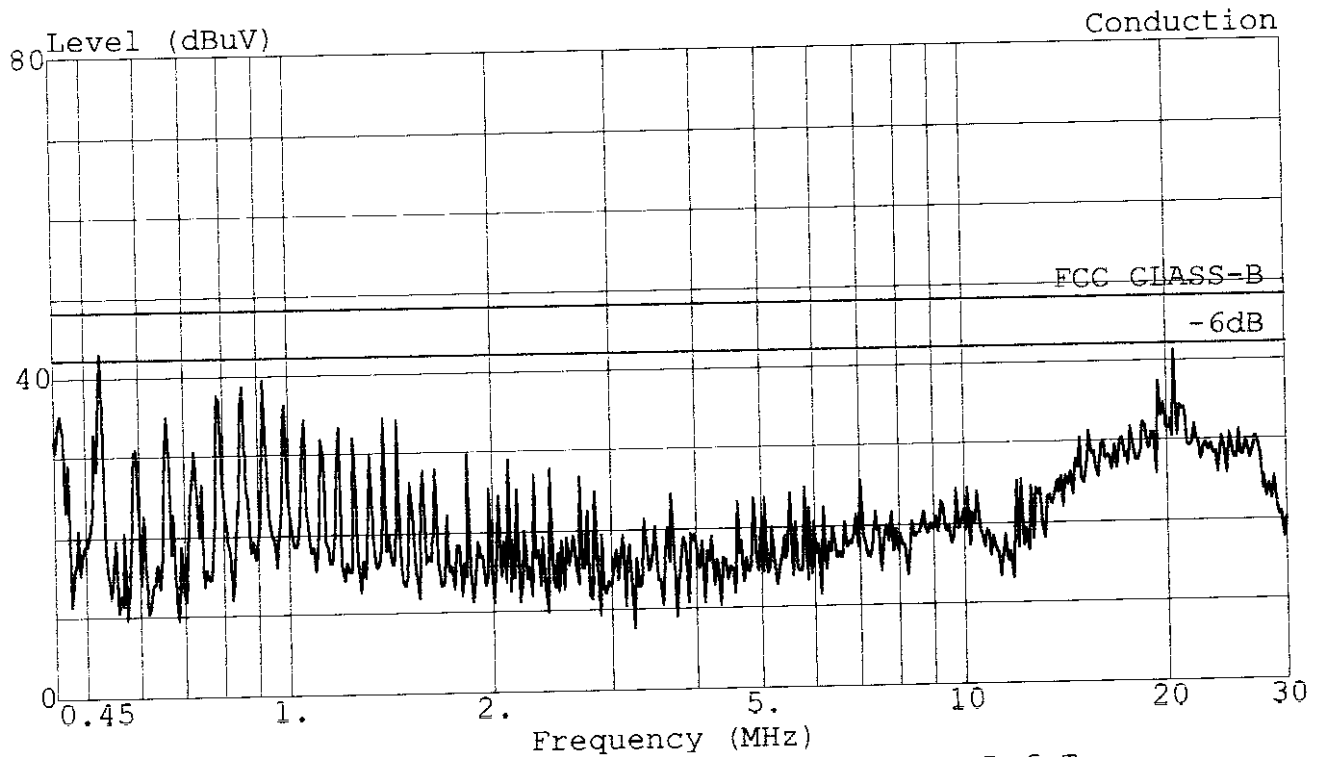

Trace:  
Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 LINE  
EUT : 17" MULTI-SCAN COLOR MONITOR  
Power: 120Vac/60Hz  
Memo : M/N:TX-T7S37\*/M-T7S37\*  
: 1280\*1024;66KHz  
: EUT TO LISN

Ref Trace:

# TOKIN

Test Site:  
 #53-11 Tingfu Tsun, Linkou,  
 Taipei, Taiwan R.O.C.  
 Tel:02-26092133 Fax:02-26099303

TAIWAN TOKIN EMC ENG. CORP.

Data#: 185 File#: MATSUSHI.EMI Date: 1999-05-10 Time: 13:51:30  
 Conduction  
 Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 NEUTRAL  
 EUT : 17" MULTI-SCAN COLOR MONITOR  
 Power: 120Vac/60Hz  
 Memo : M/N:TX-T7S37\*/M-T7S37\*  
 : 1280\*1024;66KHz  
 : EUT TO LISN

Page: 1

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark
	MHz	dB	dB	dB	dB	dB	dB	dB	
1	0.526	39.23	-8.77	48.00	39.09	0.10	0.04	0.00	QP
2	0.923	38.39	-9.61	48.00	38.24	0.10	0.05	0.00	QP
3	1.450	32.09	-15.91	48.00	31.94	0.10	0.05	0.00	QP
4	3.096	25.52	-22.48	48.00	25.37	0.10	0.05	0.00	QP
5	10.474	21.00	-27.00	48.00	20.79	0.16	0.06	0.00	QP
6	20.625	40.70	-7.30	48.00	40.22	0.28	0.20	0.00	QP

Data#: 187 File#: MATSUSHI.EMI Date: 1999-05-10 Time: 13:57:45  
 Conduction  
 Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 LINE  
 EUT : 17" MULTI-SCAN COLOR MONITOR  
 Power: 120Vac/60Hz  
 Memo : M/N:TX-T7S37\*/M-T7S37\*  
 : 1280\*1024;66KHz  
 : EUT TO LISN

Page: 1

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark
	MHz	dB	dB	dB	dB	dB	dB	dB	
1	0.525	39.39	-8.61	48.00	39.25	0.10	0.04	0.00	QP
2	0.923	38.67	-9.33	48.00	38.52	0.10	0.05	0.00	QP
3	1.846	28.54	-19.46	48.00	28.39	0.10	0.05	0.00	QP
4	3.624	28.08	-19.92	48.00	27.93	0.10	0.05	0.00	QP
5	6.984	22.35	-25.65	48.00	22.19	0.11	0.05	0.00	QP
6	20.623	41.56	-6.44	48.00	41.08	0.28	0.20	0.00	QP


# TOKIN

TAIWAN TOKIN EMC ENG. CORP.

Test Site:  
#53-11 Tingfu Tsun, Linkou,  
Taipei, Taiwan R.O.C.  
Tel:02-26092133 Fax:02-26099303

Data#: 238 File#: MATSUSHI.EMI

Date: 1999-05-11 Time: 11:27:53

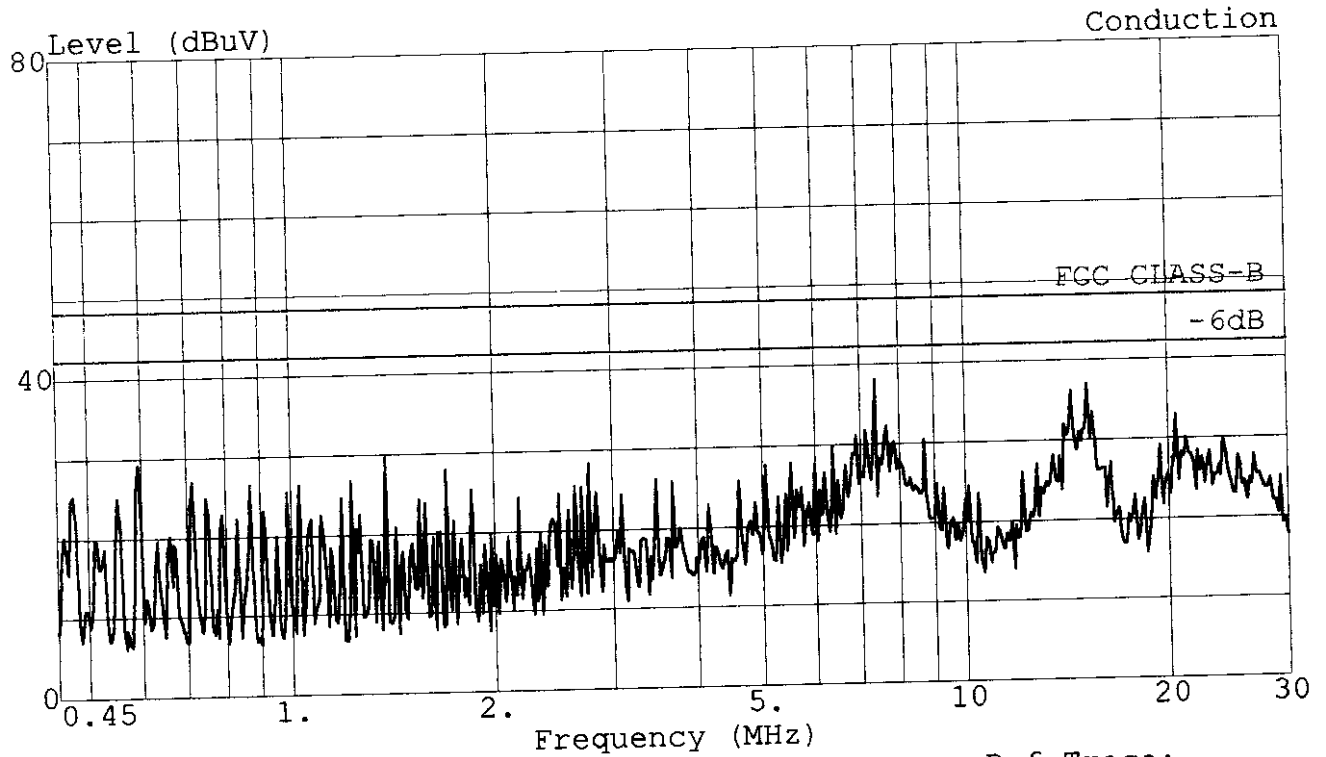

Trace: Ref Trace:  
Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 NEUTRAL  
EUT : 17" MULTI-SCAN COLOR MONITOR  
Power: 120Vac/60Hz  
Memo : M/N:TX-T7S37\*/M-T7S37\*  
: 1280\*1024;66KHz  
: EUT TO PC


# TOKIN

TAIWAN TOKIN EMC ENG. CORP.

Test Site:  
#53-11 Tingfu Tsun, Linkou,  
Taipei, Taiwan R.O.C.  
Tel:02-26092133 Fax:02-26099303

Data#: 240 File#: MATSUSHI.EMI

Date: 1999-05-11 Time: 11:32:28

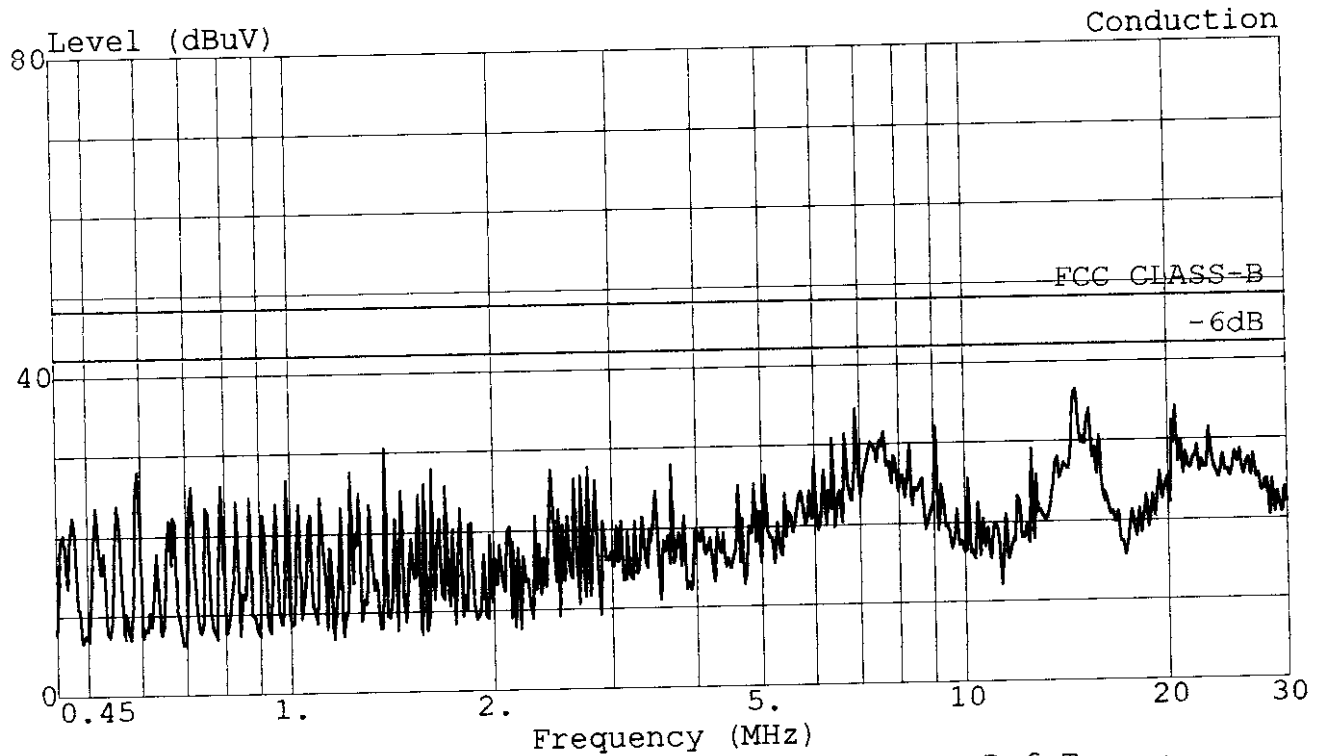

Trace:  
Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 LINE  
EUT : 17" MULTI-SCAN COLOR MONITOR  
Power: 120Vac/60Hz  
Memo : M/N:TX-T7S37\*/M-T7S37\*  
: 1280\*1024;66KHz  
: EUT TO PC

Ref Trace:

# TOKIN

Test Site:  
#53-11 Tingfu Tsun, Linkou,  
Taipei, Taiwan R.O.C.  
Tel:02-26092133 Fax:02-26099303

TAIWAN TOKIN EMC ENG. CORP.

Data#: 239 File#: MATSUSHI.EMI Date: 1999-05-11 Time: 11:31:28

Conduction

Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 NEUTRAL

EUT : 17" MULTI-SCAN COLOR MONITOR

Power: 120Vac/60Hz

Memo : M/N:TX-T7S37\*/M-T7S37\*

: 1280\*1024;66KHz

: EUT TO PC

Page: 1

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark
	MHz	dB	dB	dB	dB	dB	dB	dB	
1	0.594	28.06	-19.94	48.00	27.92	0.10	0.04	0.00	QP
2	1.384	28.99	-19.01	48.00	28.84	0.10	0.05	0.00	QP
3	2.768	24.99	-23.01	48.00	24.84	0.10	0.05	0.00	QP
4	7.380	33.16	-14.84	48.00	33.00	0.11	0.05	0.00	QP
5	15.218	33.42	-14.58	48.00	33.11	0.20	0.10	0.00	QP
6	20.555	31.43	-16.57	48.00	30.96	0.27	0.20	0.00	QP

Data#: 241 File#: MATSUSHI.EMI Date: 1999-05-11 Time: 11:36:49

Conduction

Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 LINE

EUT : 17" MULTI-SCAN COLOR MONITOR

Power: 120Vac/60Hz

Memo : M/N:TX-T7S37\*/M-T7S37\*

: 1280\*1024;66KHz

: EUT TO PC

Page: 1

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark
	MHz	dB	dB	dB	dB	dB	dB	dB	
1	0.594	28.00	-20.00	48.00	27.86	0.10	0.04	0.00	QP
2	1.386	29.64	-18.36	48.00	29.49	0.10	0.05	0.00	QP
3	2.436	26.55	-21.45	48.00	26.40	0.10	0.05	0.00	QP
4	6.917	33.31	-14.69	48.00	33.15	0.11	0.05	0.00	QP
5	14.627	33.65	-14.35	48.00	33.36	0.20	0.10	0.00	QP
6	20.555	31.57	-16.43	48.00	31.10	0.27	0.20	0.00	QP

### 3. RADIATED EMISSION TEST

#### 3.1. Test Equipment

The following test equipments are used during the radiated emission tests :

##### 3.1.1. For Anechoic Chamber :


Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analyzer	HP	8593A	3212A01727	Jul.25, 98'	1 Year
2.	Pre-Amplifier	HP	8447D	2944A06305	Dec.09, 98'	1 Year
3.	Broadband Antenna	Schwarzbeck	BBA9106	A3L	Dec.09, 98'	1 Year
4.	Log Periodic Antenna	Schwarzbeck	UHALP9108-A	0139	Dec.09, 98'	1 Year

##### 3.1.2. For No. 5 Open Site :


Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde&Schwarz	ESVS10	849231/017	Nov.26, 98'	1 Year
2.	Biconical Antenna	Chase	VBA6106A	1264	Nov.05, 98'	1 Year
3.	Log Periodic Antenna	Chase	UPA6109	1064	Feb.15, 99'	1 Year

#### 3.2. Block Diagram of Test Setup

##### 3.2.1. Block Diagram of connection between EUT and simulators

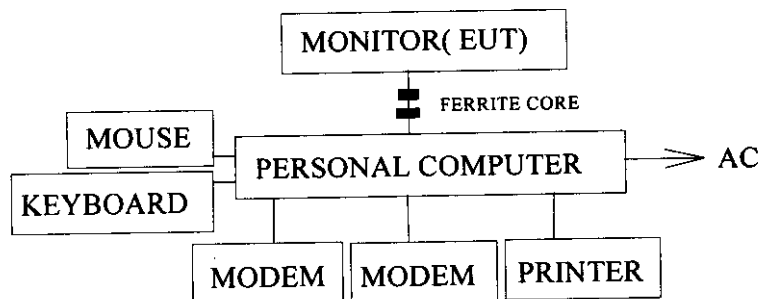

### 3.2.2. Anechoic Chamber & Open Field Test Site Setup Diagram

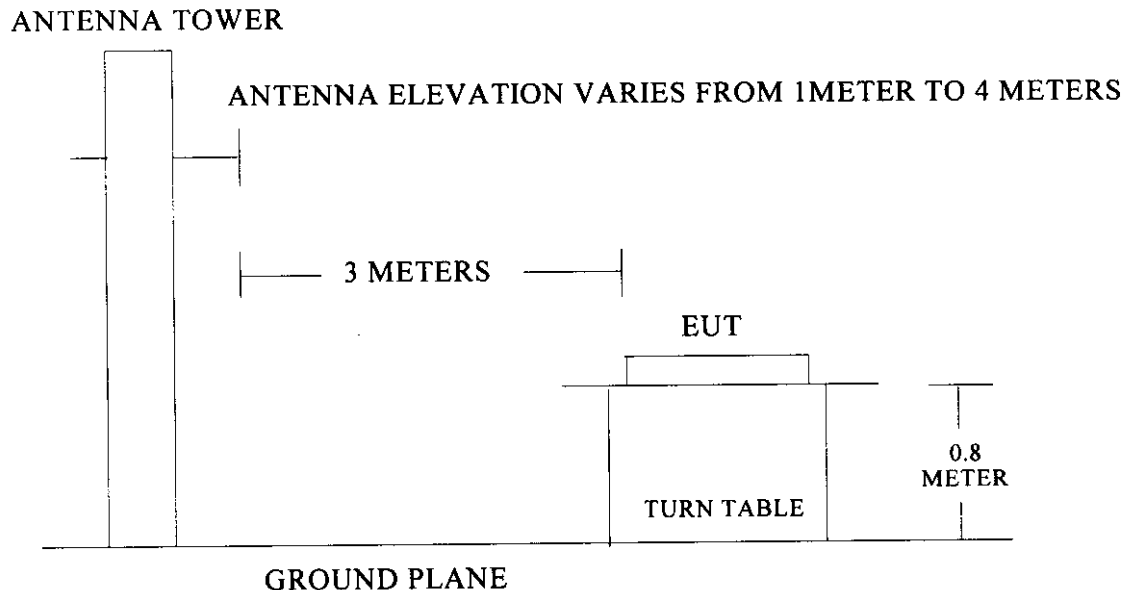

### 3.3. Radiation Limit (CLASS B)

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMITS	
		uV/M	dBuV/M
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0

- Remark :
- (1) Emission level (dBuV/M) = 20 log Emission level (uV/M)
  - (2) The tighter limit applies at the edge between two frequency bands.
  - (3) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

### 3.4. EUT's Configuration during Compliance Measurement

The configuration of EUT and its simulators were same as those used in conducted measurement. Please refer to 2.4.

### 3.5. Operating Condition of EUT

Same as conducted measurement which is listed in 2.5.

### 3.6. Test Procedure

The EUT and its simulators were placed on a turn table which was 0.8 meter above ground. The turn table rotate 360 degrees to determine the position of the maximum emission level. EUT was set 3 meters away from the receiving antenna which were mounted on a antenna tower. The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated biconical and log periodical antenna) and dipole antenna were used as receiving antenna. Both horizontal and vertical polarization of the antenna were set on measurement. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.4-1992 on radiated measurement.

The bandwidth of the R&S Test Receiver ESVP was set at 120KHz.

The frequency range from 30MHz to 1000MHz was checked.

The following operating conditions were measured within Anechoic Chamber and all the scanning waveform were attached within Appendix II, which include :

- (1) 37.9KHz/640\*480
- (2) 48.1KHz/800\*600
- (3) 58KHz/1024\*768
- (4) 61.6KHz/1280\*960
- (5) 66KHz/1280\*1024

Finally, re-measured the each worst operating situation (66KHz/1280\*1024) at No. 5 Open Field Test Site and all the test results are listed in section 3.7.

### 3.7. Radiated Emission Measurement Results

**PASSED.** All the emissions not reported below were too low against the FCC CLASS B limit.

Date of Test : May. 11, 1999 Temperature : 25.8°C  
 EUT : 17" Multi-Scan Color Monitor Humidity : 61%  
 Test Mode : 66KHz/1280\*1024

Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading		Emission Level		Margin dB
			Horizontal dBuV	Horizontal dBuV/m	Limits dBuV/m		
34.404	21.37	1.05	- 0.65	21.77	40.00	18.23	
55.061	13.59	1.33	0.93	15.85	40.00	24.15	
75.717	12.95	1.54	10.49	24.98	40.00	15.02	
110.119	18.64	1.86	2.30	22.80	43.50	20.70	
130.813	19.78	2.04	2.20	24.02	43.50	19.48	
151.469	20.43	2.21	4.69	27.33	43.50	16.17	
185.858	21.35	2.46	3.18	26.99	43.50	16.51	
254.712	23.60	2.96	- 1.32	25.24	46.00	20.76	
330.479	15.93	3.40	9.59	28.92	46.00	17.08	
385.562	17.31	3.67	3.32	24.30	46.00	21.70	
440.645	17.74	3.92	6.98	28.64	46.00	17.36	
* 550.797	20.08	4.44	14.33	38.85	46.00	7.15	
660.964	20.97	4.92	8.40	34.29	46.00	11.71	
771.168	21.98	5.42	2.98	30.38	46.00	15.62	
805.595	22.13	5.54	1.22	28.89	46.00	17.11	

- Remark :
1. All reading were Quasi-Peak values.
  2. The worst emission was detected at 550.797MHz with corrected signal level of 38.85dBuV/m (limit was 46.0dBuV/m) when the antenna was at horizontal polarization and was at 1.3m high and the turn table was at 183° .
  3. 0° is the table front facing the antenna. Degree was calculated from 0° clockwise facing the antenna.

Date of Test : May. 11, 1999 Temperature : 25.8°C  
 EUT : 17" Multi-Scan Color Monitor Humidity : 61%  
 Test Mode : 66KHz/1280\*1024

Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading		Emission Level Vertical dBuV/m	Limits dBuV/m	Margin dB
			Vertical dBuV	Vertical dBuV			
34.455	21.81	1.05	6.81	29.67	40.00	10.33	
55.087	13.94	1.33	8.86	24.13	40.00	15.87	
68.858	12.97	1.48	11.97	26.42	40.00	13.58	
75.743	13.52	1.54	11.79	26.85	40.00	13.15	
110.144	18.49	1.86	4.89	25.24	43.50	18.26	
123.914	19.17	1.99	5.03	26.19	43.50	17.31	
151.469	21.23	2.21	2.77	26.21	43.50	17.29	
220.323	22.58	2.70	- 2.50	22.78	46.00	23.22	
261.636	24.08	2.98	- 1.61	25.45	46.00	20.55	
330.504	15.69	3.40	11.94	31.03	46.00	14.97	
385.587	16.11	3.67	7.06	26.84	46.00	19.16	
440.671	17.47	3.92	6.49	27.88	46.00	18.12	
461.326	17.93	4.05	5.46	27.44	46.00	18.56	
* 550.799	19.96	4.44	13.15	37.55	46.00	8.45	
660.978	20.56	4.92	11.64	37.12	46.00	8.88	
771.144	22.04	5.42	3.33	30.79	46.00	15.21	

- Remark :
1. All reading were Quasi-Peak values.
  2. The worst emission was detected at 550.799MHz with corrected signal level of 37.55dBuV/m (limit was 46dBuV/m) when the antenna was at vertical polarization and was at 1.4m high and the turn table was at 165° .
  3. 0° is the table front facing the antenna. Degree was calculated from 0° clockwise facing the antenna.

#### **4. DEVIATIONS TO TEST SPECIFICATIONS**

[ NONE ]

# APPENDIX I

## (Conducted Test Data)


# TOKIN

TAIWAN TOKIN EMC ENG. CORP.

Test Site:  
#53-11 Tingfu Tsun, Linkou,  
Taipei, Taiwan R.O.C.  
Tel:02-26092133 Fax:02-26099303

Data#: 176 File#: MATSUSHI.EMI

Date: 1999-05-10 Time: 13:34:40

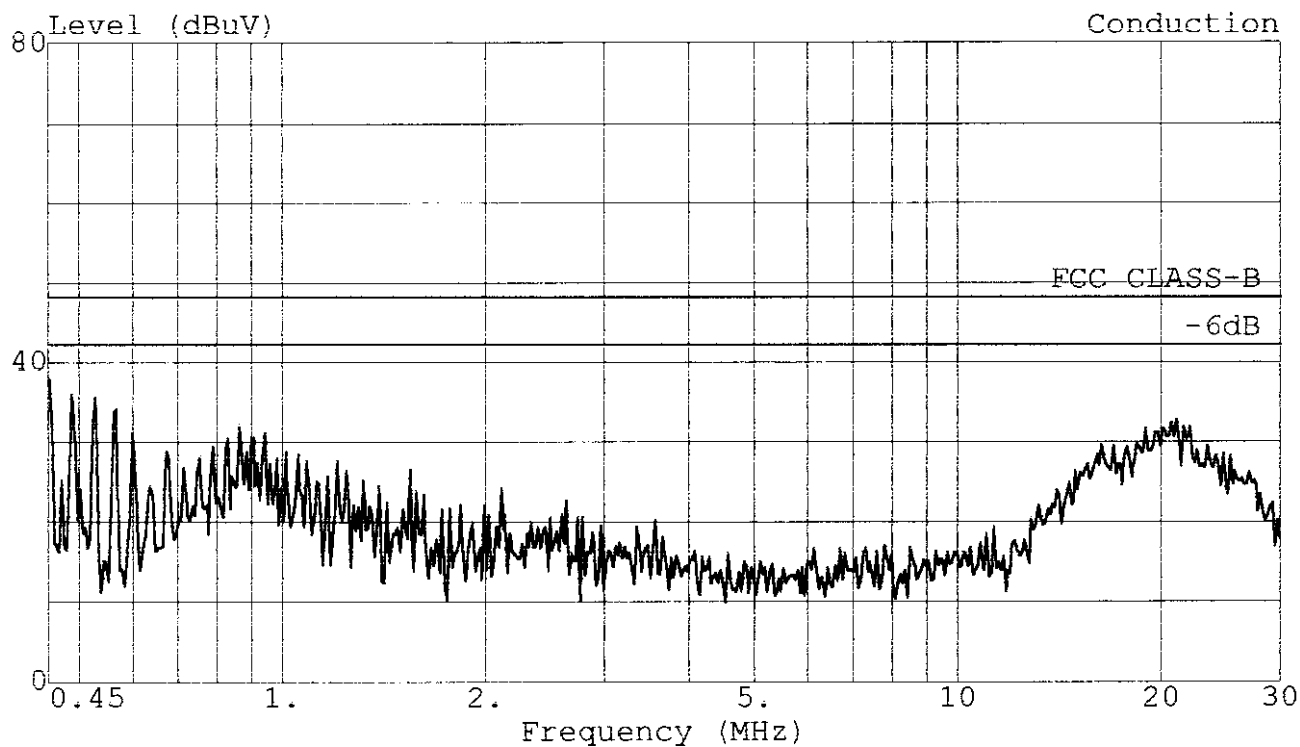

Trace: Ref Trace:  
Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 NEUTRAL  
EUT : 17" MULTI-SCAN COLOR MONITOR  
Power: 120Vac/60Hz  
Memo : M/N:TX-T7S37\*/M-T7S37\*  
: 640\*480;37.9KHz  
: EUT TO LISN


# TOKIN

TAIWAN TOKIN EMC ENG. CORP.

Test Site:  
#53-11 Tingfu Tsun, Linkou,  
Taipei, Taiwan R.O.C.  
Tel:02-26092133 Fax:02-26099303

Data#: 177 File#: MATSUSHI.EMI

Date: 1999-05-10 Time: 13:35:21

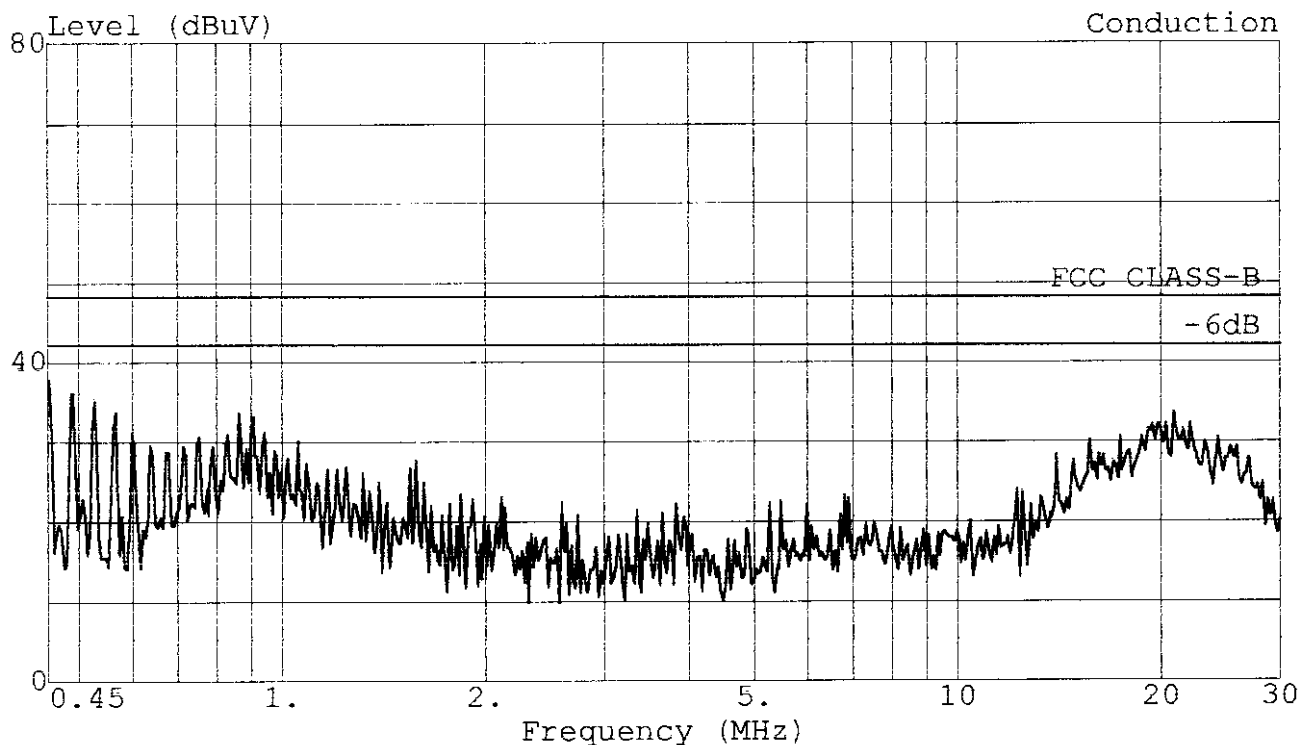

Trace: Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 LINE  
EUT : 17" MULTI-SCAN COLOR MONITOR  
Power: 120Vac/60Hz  
Memo : M/N:TX=T7S37\*/M=T7S37\*  
: 640\*480;37.9KHz  
: EUT TO LISN

Ref Trace:


# TOKIN

TAIWAN TOKIN EMC ENG. CORP.

Test Site:  
#53-11 Tingfu Tsun, Linkou,  
Taipei, Taiwan R.O.C.  
Tel:02-26092133 Fax:02-26099303

Data#: 179 File#: MATSUSHI.EMI

Date: 1999-05-10 Time: 13:40:28

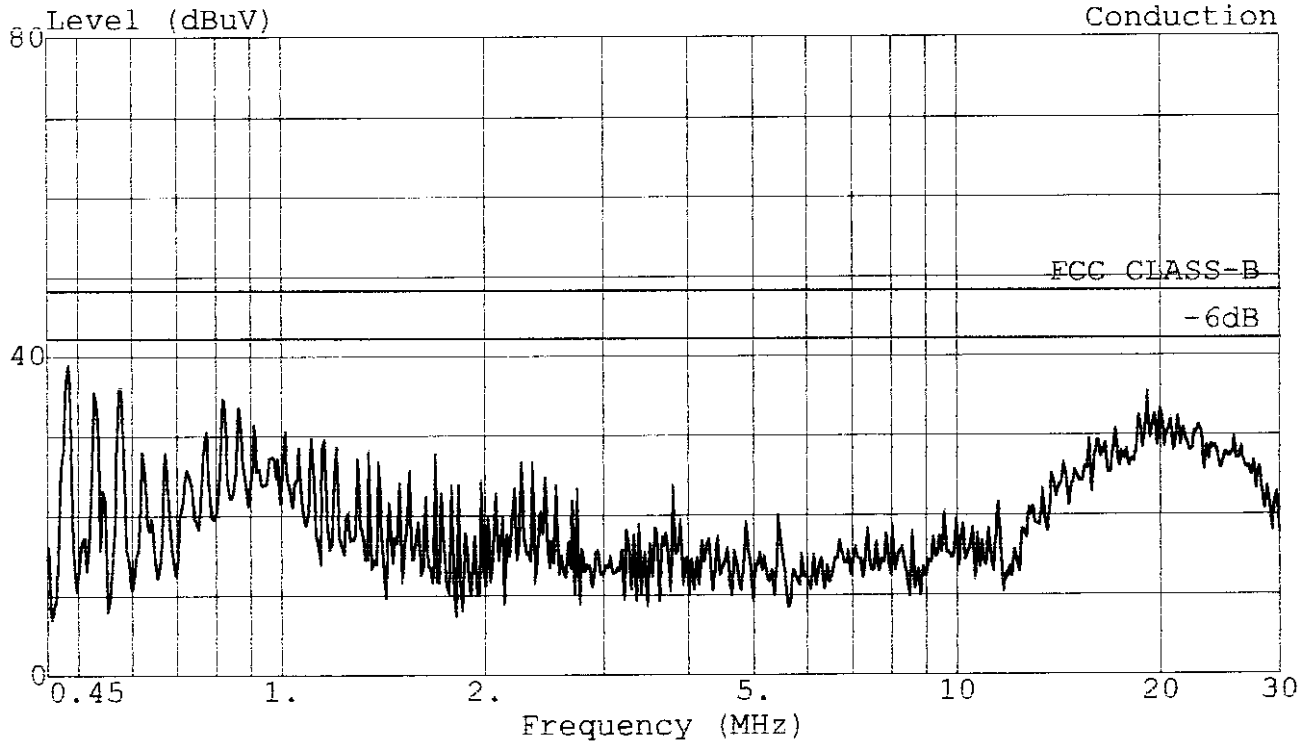


Trace: Ref Trace:  
Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 NEUTRAL  
EUT : 17" MULTI-SCAN COLOR MONITOR  
Power: 120Vac/60Hz  
Memo : M/N:TX-T7S37\*/M-T7S37\*  
: 800\*600;48.1KHz  
: EUT TO LISN

# TOKIN

TAIWAN TOKIN EMC ENG. CORP.

Test Site:  
#53-11 Tingfu Tsun, Linkou,  
Taipei, Taiwan R.O.C.  
Tel:02-26092133 Fax:02-26099303

Data#: 178 File#: MATSUSHI.EMI Date: 1999-05-10 Time: 13:39:55

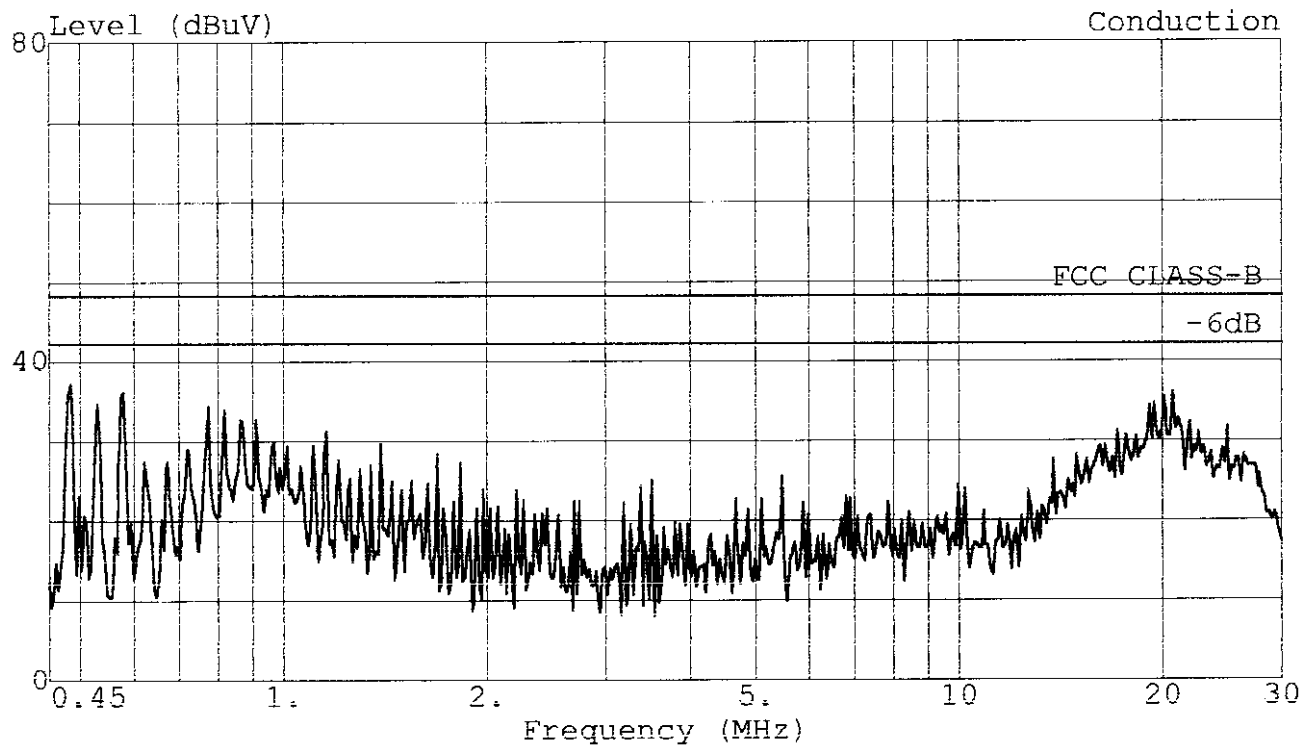

Trace: Ref Trace:  
Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 LINE  
EUT : 17" MULTI-SCAN COLOR MONITOR  
Power: 120Vac/60Hz  
Memo : M/N:TX-T7S37\*/M-T7S37\*  
: 800\*600;48.1KHz  
: EUT TO LISN


# TOKIN

TAIWAN TOKIN EMC ENG. CORP.

Test Site:  
#53-11 Tingfu Tsun, Linkou,  
Taipei, Taiwan R.O.C.  
Tel:02-26092133 Fax:02-26099303

Data#: 180 File#: MATSUSHI.EMI

Date: 1999-05-10 Time: 13:41:54

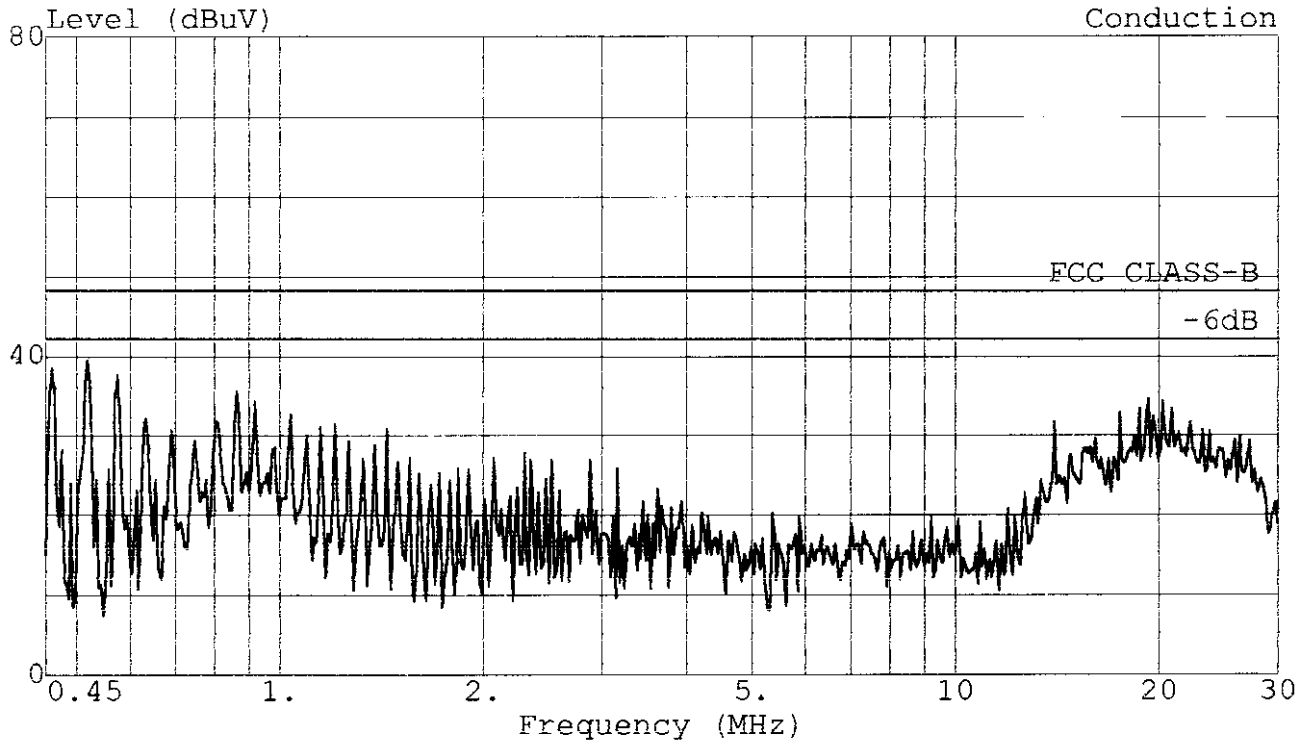

Trace: Ref Trace:  
Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 NEUTRAL  
EUT : 17" MULTI-SCAN COLOR MONITOR  
Power: 120Vac/60Hz  
Memo : M/N:TX-T7S37\*/M-T7S37\*  
: 1024\*768;58KHz  
: EUT TO LISN


# TOKIN

TAIWAN TOKIN EMC ENG. CORP.

Test Site:  
#53-11 Tingfu Tsun, Linkou,  
Taipei, Taiwan R.O.C.  
Tel:02-26092133 Fax:02-26099303

Data#: 181 File#: MATSUSHI.EMI

Date: 1999-05-10 Time: 13:42:28

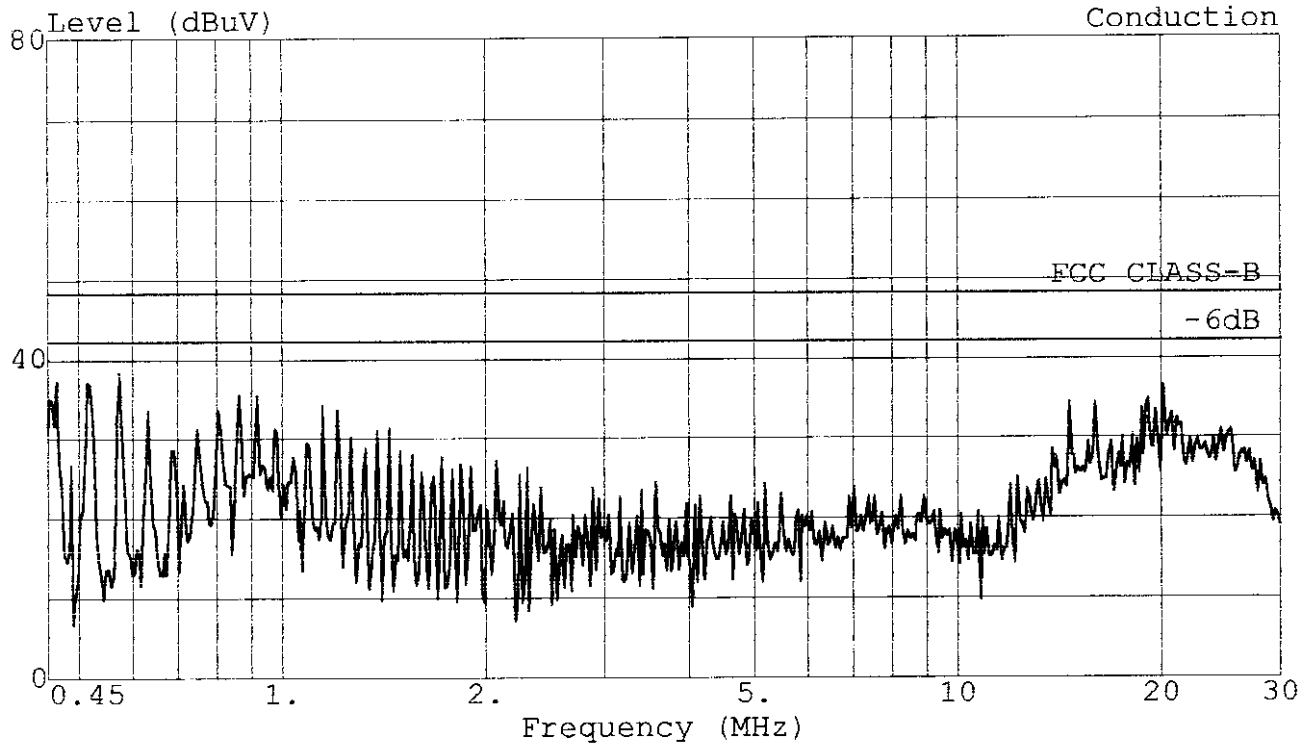

Trace:

Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 LINE

EUT : 17" MULTI-SCAN COLOR MONITOR

Power: 120Vac/60Hz

Memo : M/N:TX-T7S37\*/M-T7S37\*

: 1024\*768;58KHz

: EUT TO LISN

Ref Trace:


# TOKIN

TAIWAN TOKIN EMC ENG. CORP.

Test Site:  
#53-11 Tingfu Tsun, Linkou,  
Taipei, Taiwan R.O.C.  
Tel:02-26092133 Fax:02-26099303

Data#: 183 File#: MATSUSHI.EMI

Date: 1999-05-10 Time: 13:44:17

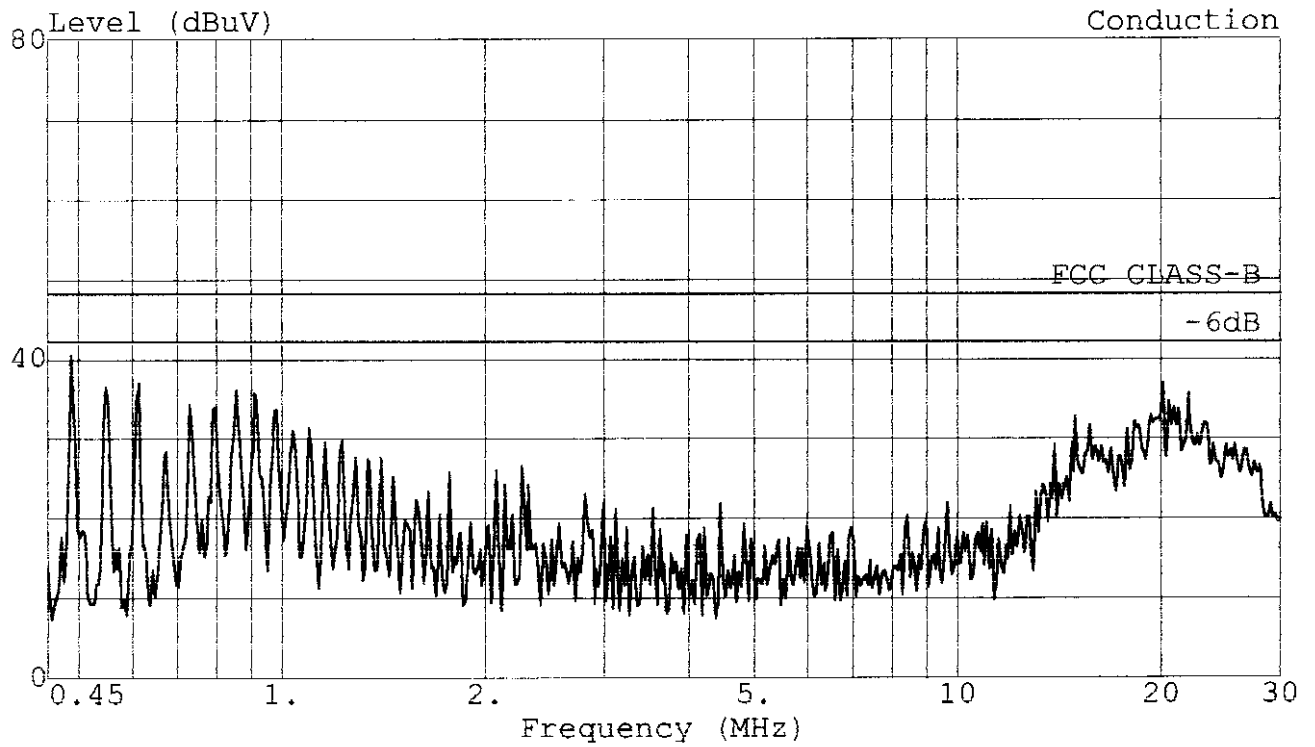


Trace: Ref Trace:  
Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 NEUTRAL  
EUT : 17" MULTI-SCAN COLOR MONITOR  
Power: 120Vac/60Hz  
Memo : M/N:TX-T7S37\*/M-T7S37\*  
: 1280\*960;61.6KHz  
: EUT TO LISN

# TOKIN

TAIWAN TOKIN EMC ENG. CORP.

Test Site:  
#53-11 Tingfu Tsun, Linkou,  
Taipei, Taiwan R.O.C.  
Tel:02-26092133 Fax:02-26099303

Data#: 182 File#: MATSUSHI.EMI Date: 1999-05-10 Time: 13:43:41

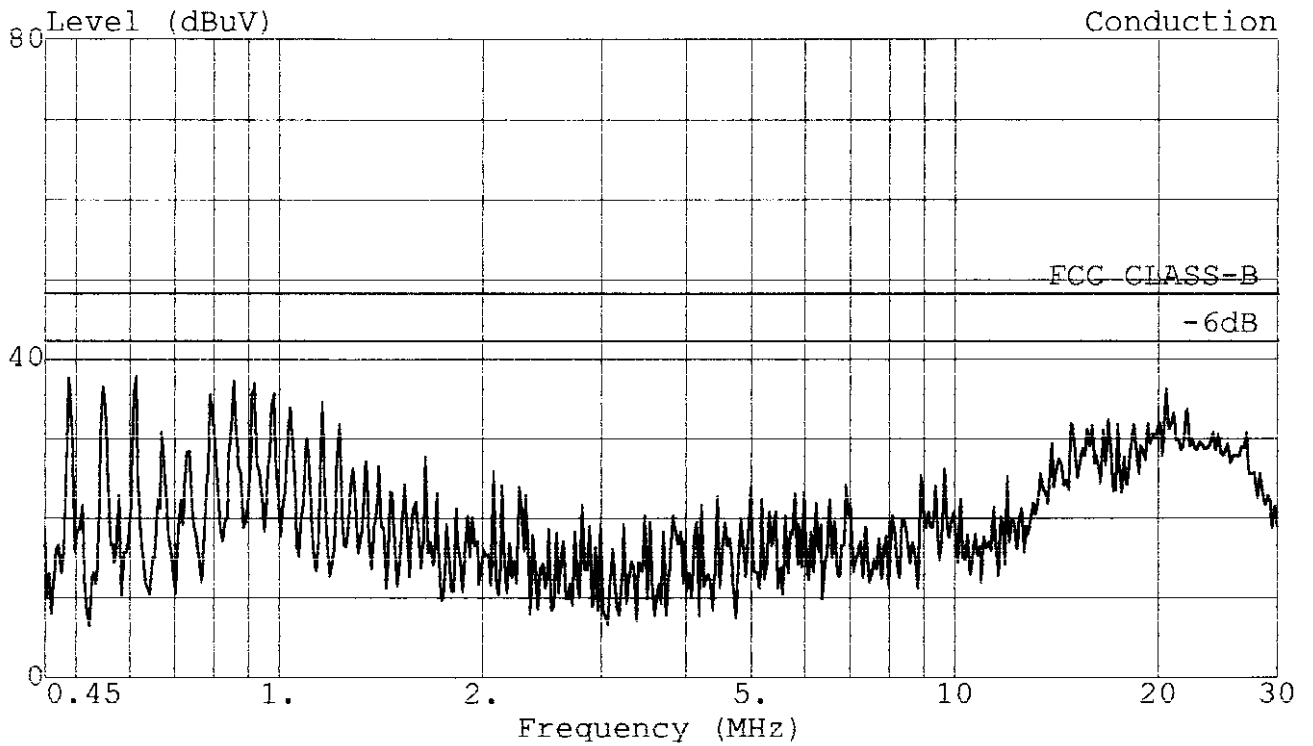

Trace: Ref Trace:  
Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 LINE  
EUT : 17" MULTI-SCAN COLOR MONITOR  
Power: 120Vac/60Hz  
Memo : M/N:TX-T7S37\*/M-T7S37\*  
: 1280\*960;61.6KHz  
: EUT TO LISN


# TOKIN

TAIWAN TOKIN EMC ENG. CORP.

Test Site:  
#53-11 Tingfu Tsun, Linkou,  
Taipei, Taiwan R.O.C.  
Tel:02-26092133 Fax:02-26099303

Data#: 231 File#: MATSUSHI.EMI

Date: 1999-05-11 Time: 11:14:18

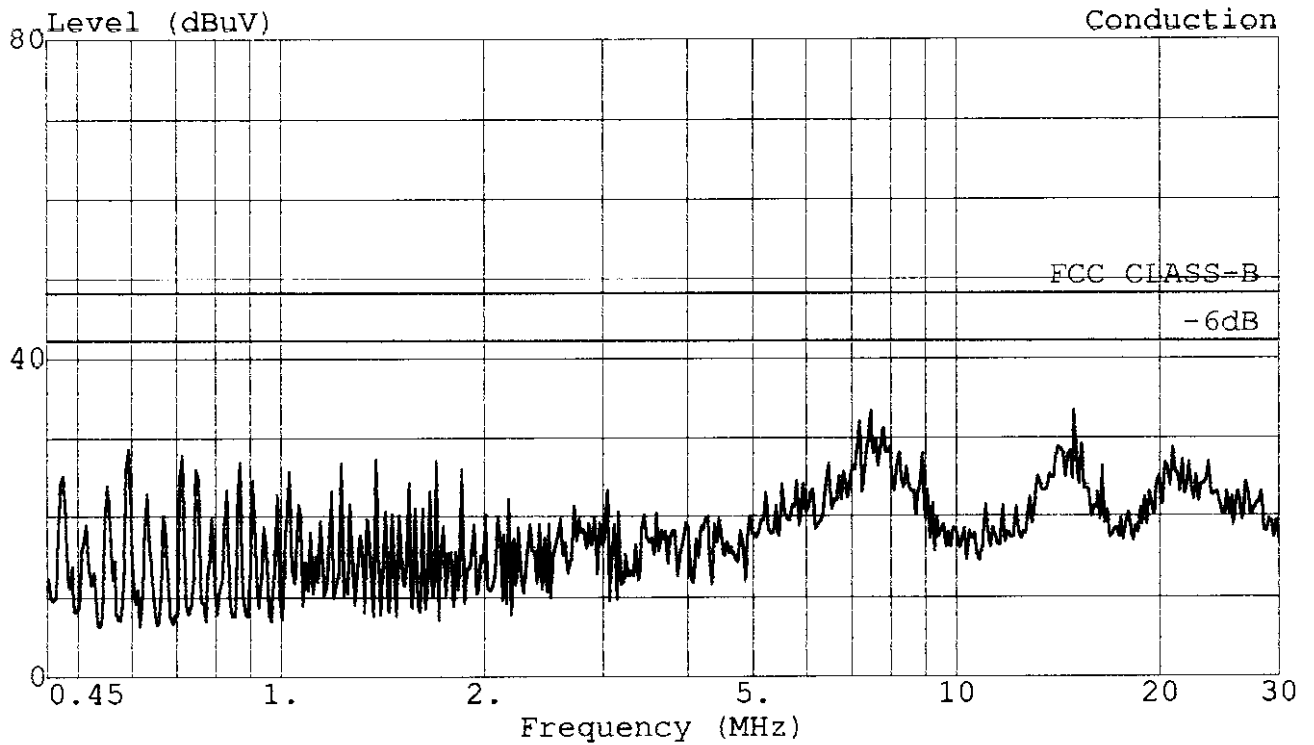

Trace: Ref Trace:  
Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 NEUTRAL  
EUT : 17" MULTI-SCAN COLOR MONITOR  
Power: 120Vac/60Hz  
Memo : M/N:TX-T7S37\*/M-T7S37\*  
: 640\*480;37.9KHz  
: EUT TO PC


# TOKIN

TAIWAN TOKIN EMC ENG. CORP.

Test Site:  
#53-11 Tingfu Tsun, Linkou,  
Taipei, Taiwan R.O.C.  
Tel:02-26092133 Fax:02-26099303

Data#: 230 File#: MATSUSHI.EMI

Date: 1999-05-11 Time: 11:13:35

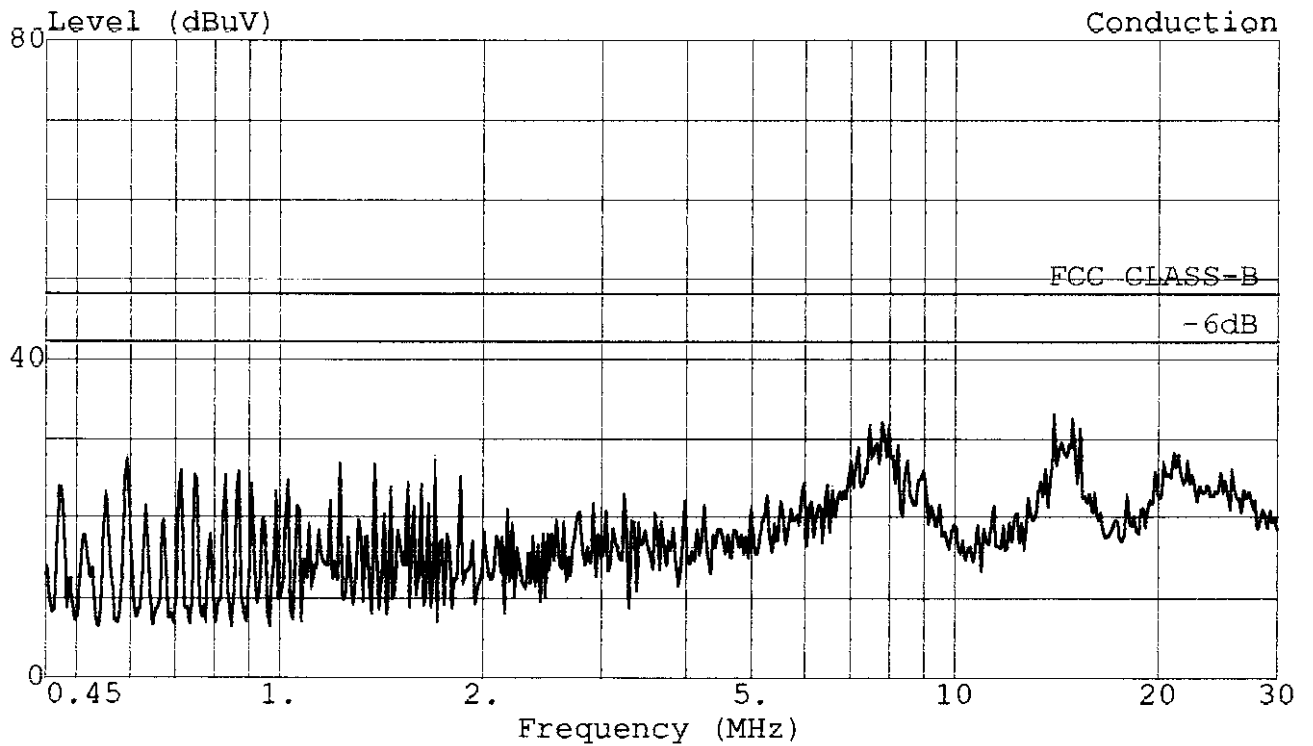

Trace: Ref Trace:  
Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 LINE  
EUT : 17" MULTI-SCAN COLOR MONITOR  
Power: 120Vac/60Hz  
Memo : M/N:TX-T7S37\*/M-T7S37\*  
: 640\*480;37.9KHz  
: EUT TO PC


# TOKIN

TAIWAN TOKIN EMC ENG. CORP.

Test Site:  
#53-11 Tingfu Tsun, Linkou,  
Taipei, Taiwan R.O.C.  
Tel:02-26092133 Fax:02-26099303

Data#: 232 File#: MATSUSHI.EMI

Date: 1999-05-11 Time: 11:15:32

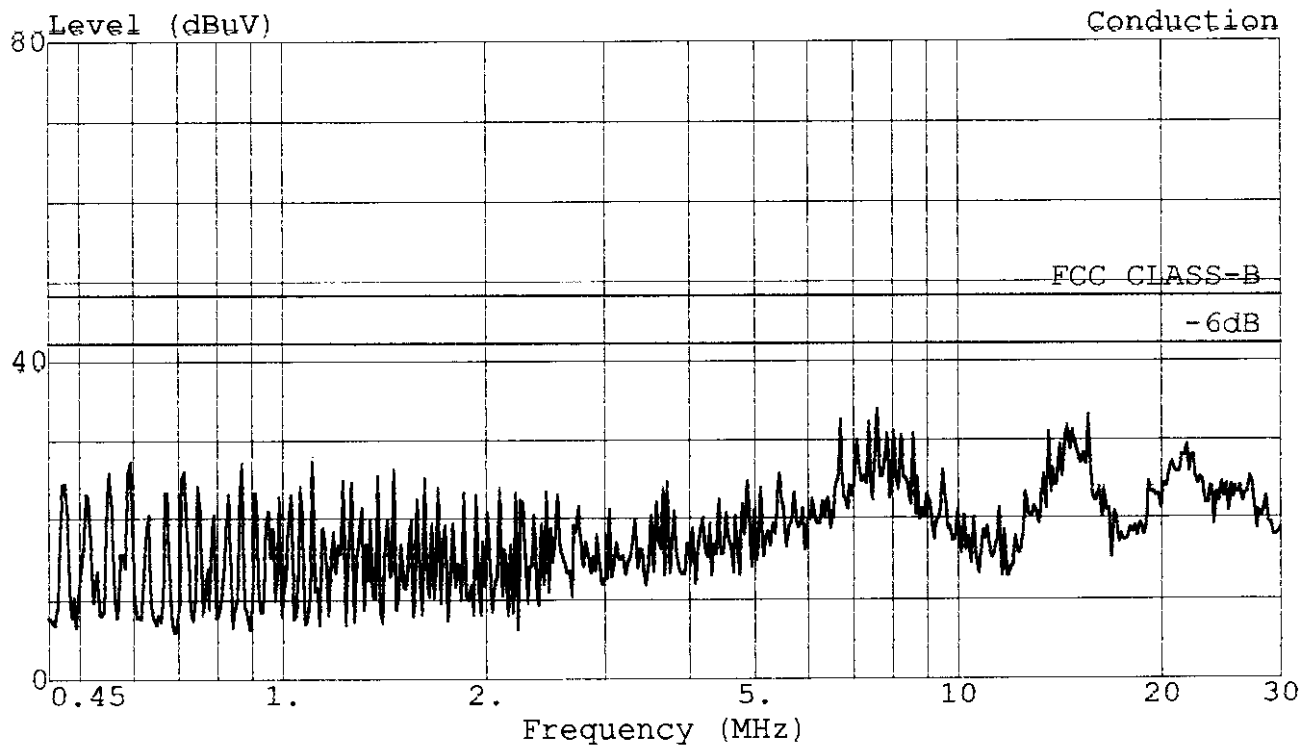

Trace: Ref Trace:  
Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 NEUTRAL  
EUT : 17" MULTI-SCAN COLOR MONITOR  
Power: 120Vac/60Hz  
Memo : M/N:TX-T7S37\*/M-T7S37\*  
: 800\*600;48.1KHz  
: EUT TO PC


# TOKIN

TAIWAN TOKIN EMC ENG. CORP.

Test Site:  
#53-11 Tingfu Tsun, Linkou,  
Taipei, Taiwan R.O.C.  
Tel:02-26092133 Fax:02-26099303

Data#: 233 File#: MATSUSHI.EMI

Date: 1999-05-11 Time: 11:19:14

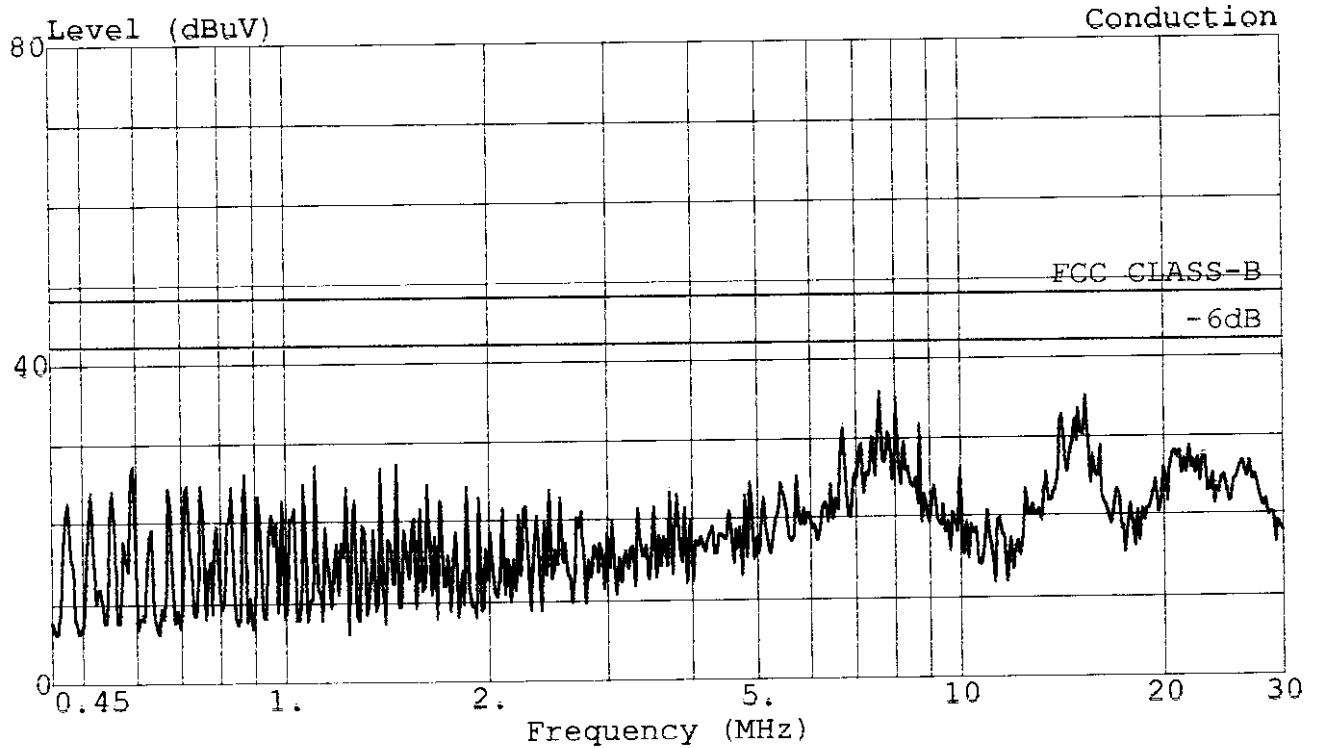

Trace:  
Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 LINE  
EUT : 17" MULTI-SCAN COLOR MONITOR  
Power: 120Vac/60Hz  
Memo : M/N:TX-T7S37\*/M-T7S37\*  
: 800\*600;48.1KHz  
: EUT TO PC

Ref Trace:


# TOKIN

TAIWAN TOKIN EMC ENG. CORP.

Test Site:  
#53-11 Tingfu Tsun, Linkou,  
Taipei, Taiwan R.O.C.  
Tel:02-26092133 Fax:02-26099303

Data#: 235 File#: MATSUSHI.EMI

Date: 1999-05-11 Time: 11:23:17

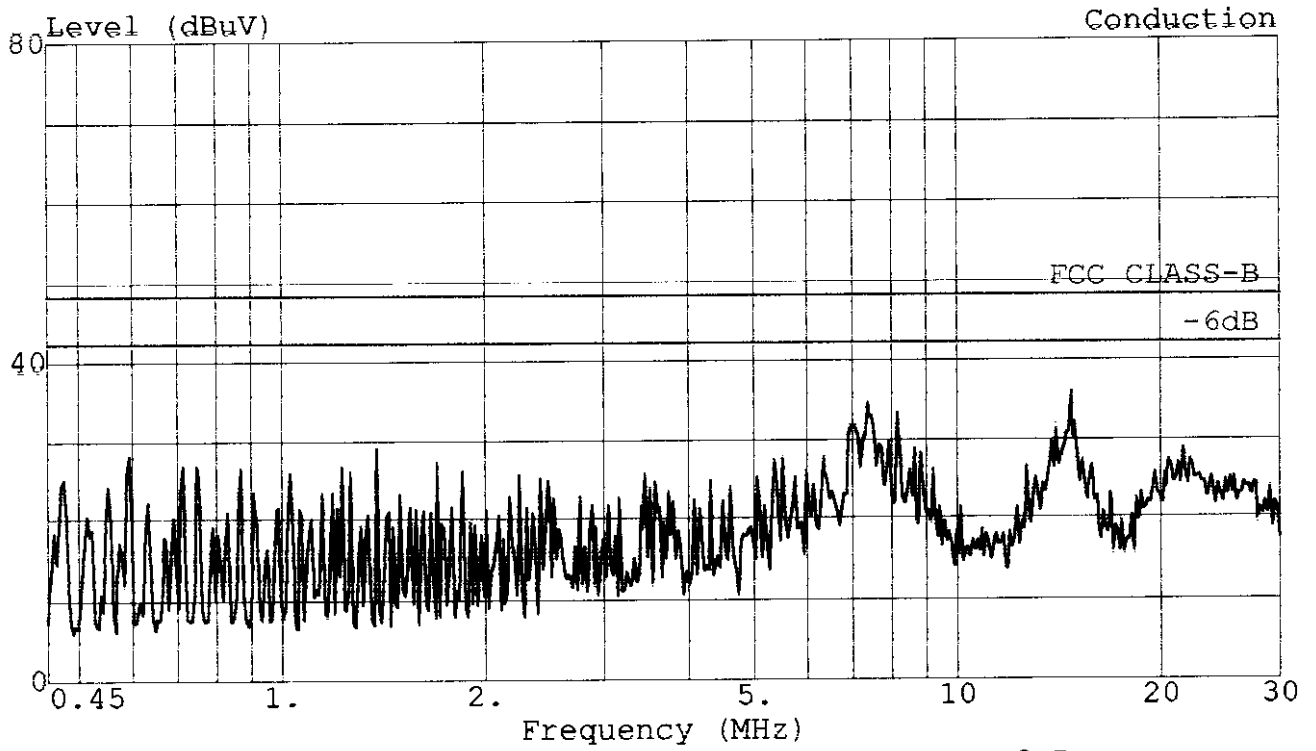

Trace: Ref Trace:  
Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 NEUTRAL  
EUT : 17" MULTI-SCAN COLOR MONITOR  
Power: 120Vac/60Hz  
Memo : M/N:TX-T7S37\*/M-T7S37\*  
: 1024\*768;58KHz  
: EUT TO PC


# TOKIN

TAIWAN TOKIN EMC ENG. CORP.

Test Site:  
#53-11 Tingfu Tsun, Linkou,  
Taipei, Taiwan R.O.C.  
Tel:02-26092133 Fax:02-26099303

Data#: 234 File#: MATSUSHI.EMI

Date: 1999-05-11 Time: 11:22:36

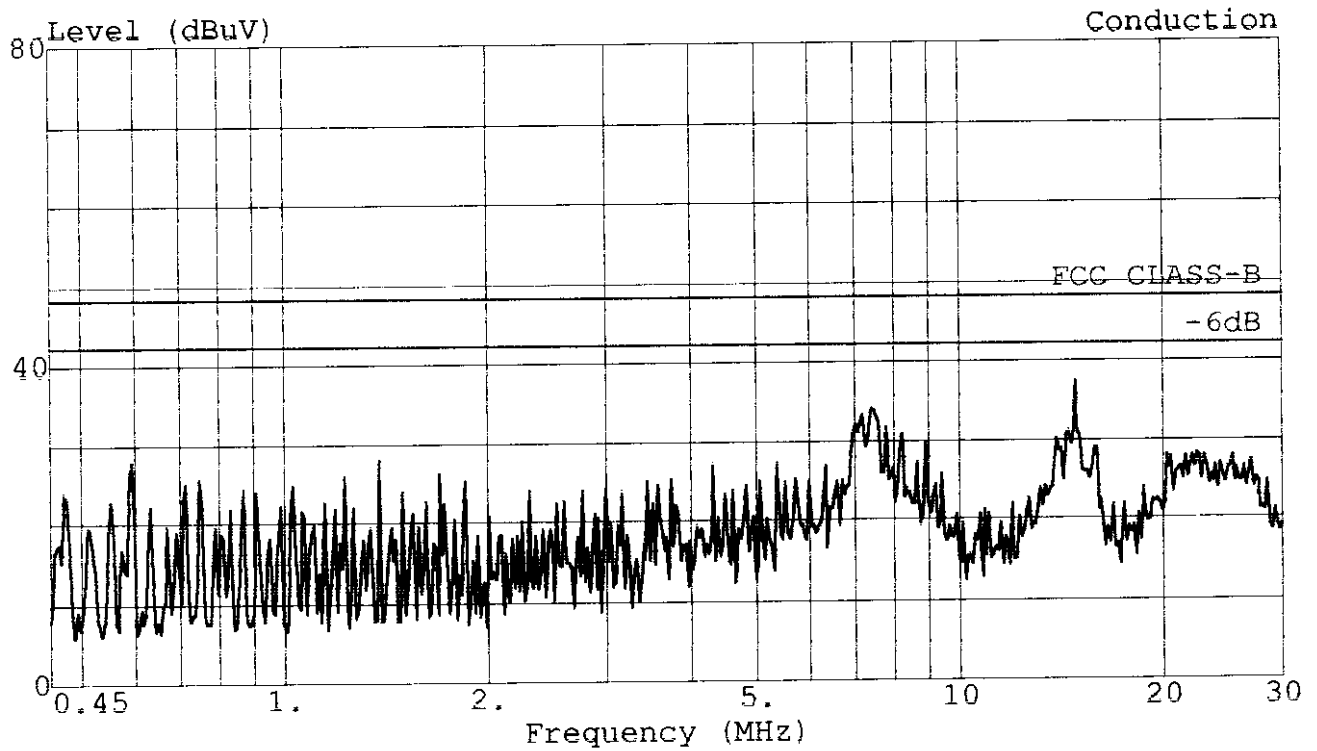

Trace: Ref Trace:  
Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 LINE  
EUT : 17" MULTI-SCAN COLOR MONITOR  
Power: 120Vac/60Hz  
Memo : M/N:TX-T7S37\*/M-T7S37\*  
: 1024\*768;58KHz  
: EUT TO PC


# TOKIN

TAIWAN TOKIN EMC ENG. CORP.

Test Site:  
#53-11 Tingfu Tsun, Linkou,  
Taipei, Taiwan R.O.C.  
Tel:02-26092133 Fax:02-26099303

Data#: 236 File#: MATSUSHI.EMI

Date: 1999-05-11 Time: 11:24:30

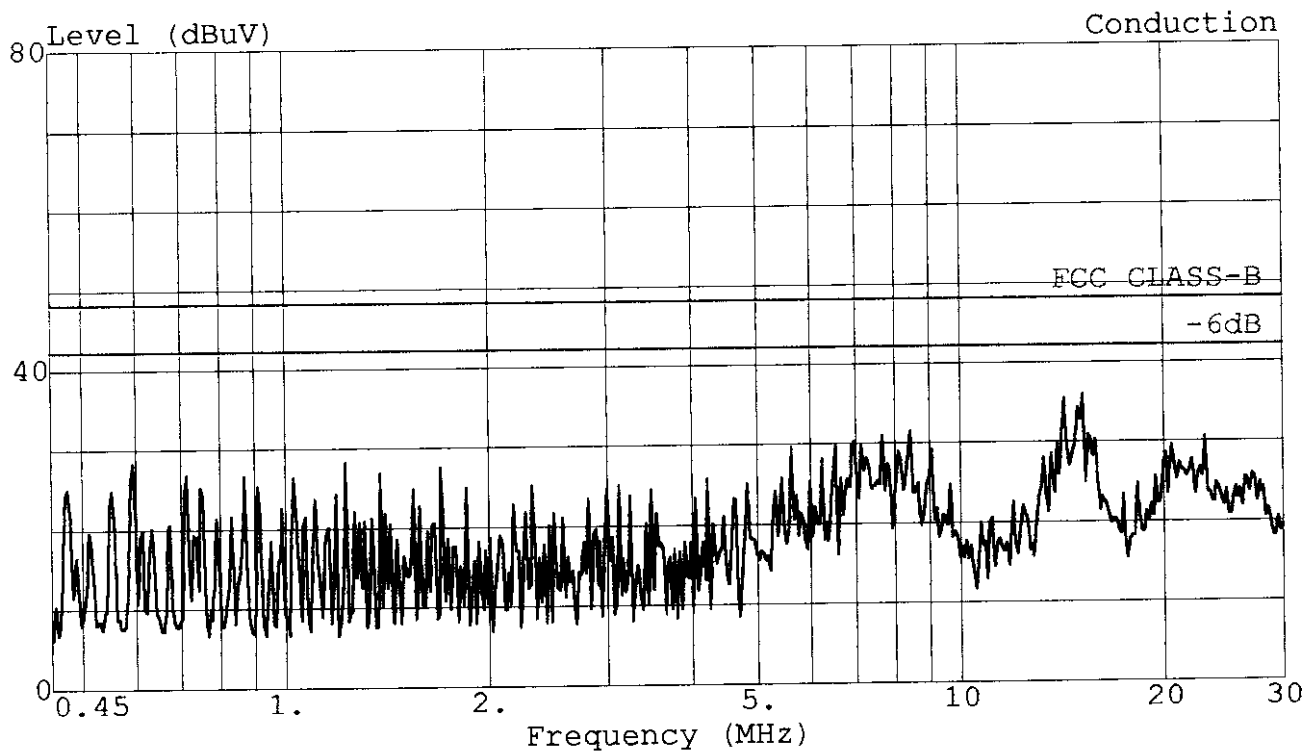

Trace: Ref Trace:  
Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 NEUTRAL  
EUT : 17" MULTI-SCAN COLOR MONITOR  
Power: 120Vac/60Hz  
Memo : M/N:TX-T7S37\*/M-T7S37\*  
: 1280\*960;61.6KHz  
: EUT TO PC


# TOKIN

TAIWAN TOKIN EMC ENG. CORP.

Test Site:  
#53-11 Tingfu Tsun, Linkou,  
Taipei, Taiwan R.O.C.  
Tel:02-26092133 Fax:02-26099303

Data#: 237 File#: MATSUSHI.EMI

Date: 1999-05-11 Time: 11:25:17

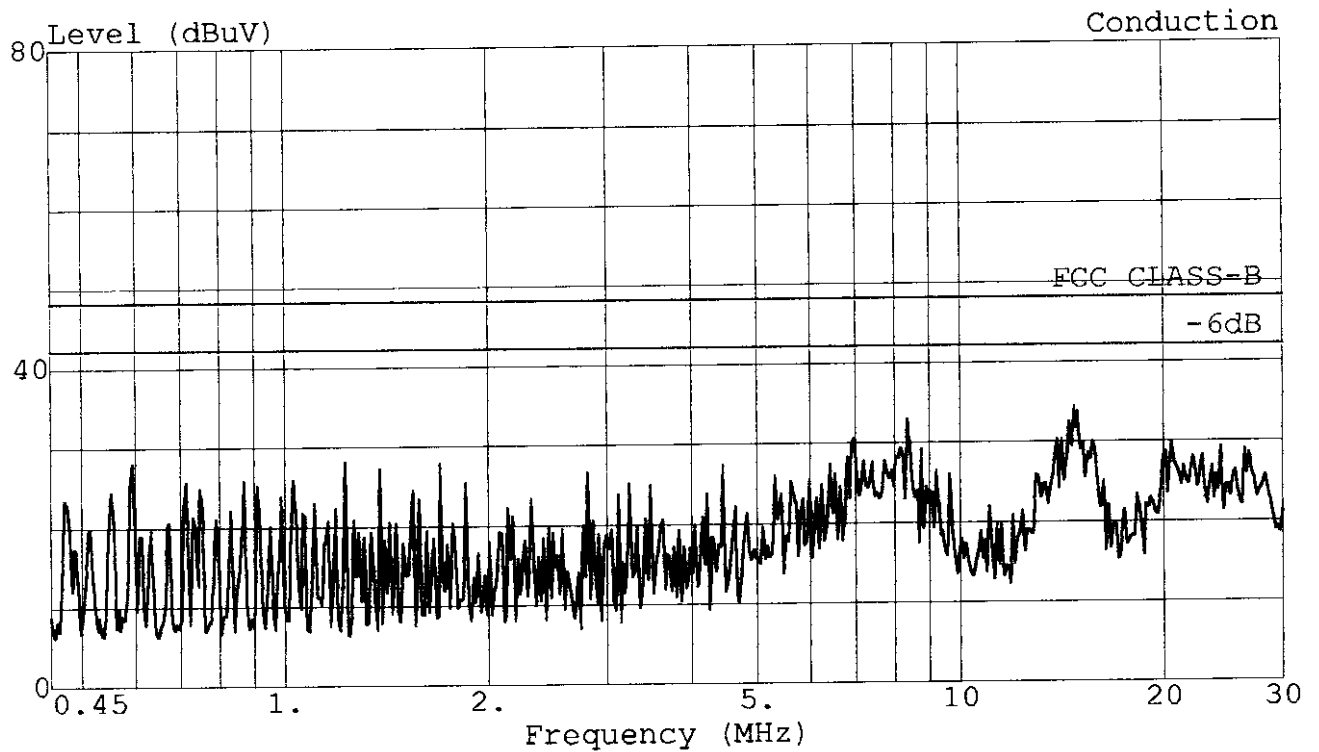

Trace:

Ref Trace:

Limit: FCC CLASS-B Probe: LISN(FCC)8-1370-10 LINE

EUT : 17" MULTI-SCAN COLOR MONITOR

Power: 120Vac/60Hz

Memo : M/N:TX-T7S37\*/M-T7S37\*


: 1280\*960;61.6KHz

: EUT TO PC

## APPENDIX II


### (Radiated Test Data at Anechoic Chamber)

Page#: 931 SP File#: MATSUSHI.E1 Date: 85-11-1999 Time: 17:14:08  
dBuV/m ANECHOIC CHAMBER TAIWAN TOKIN EMC ENG. CORP.


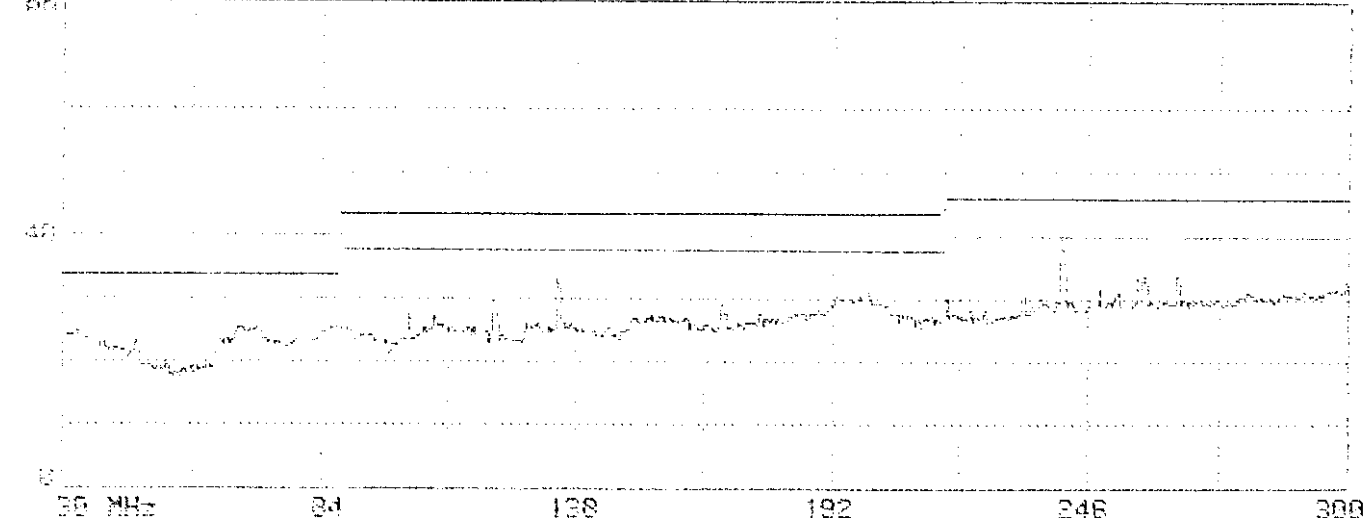



30 MHz 84 138 192 246 300  
Limit : FCC CLASS-B 3m Probe: BDA8106B(1209)A/C HORIZONTAL  
EUT : MONITOR M/N:TX-T7S37\*/M-T7S37\* Power: 120Vac;60Hz  
Margin: 6dB Standard: 0 Trace: 931, 0, 0, 0, 0  
Memo : 640X480,37.9KHz

Page#: 932 SP File#: MATSUSHI.E1 Date: 85-11-1999 Time: 17:15:47  
dBuV/m ANECHOIC CHAMBER TAIWAN TOKIN EMC ENG. CORP.

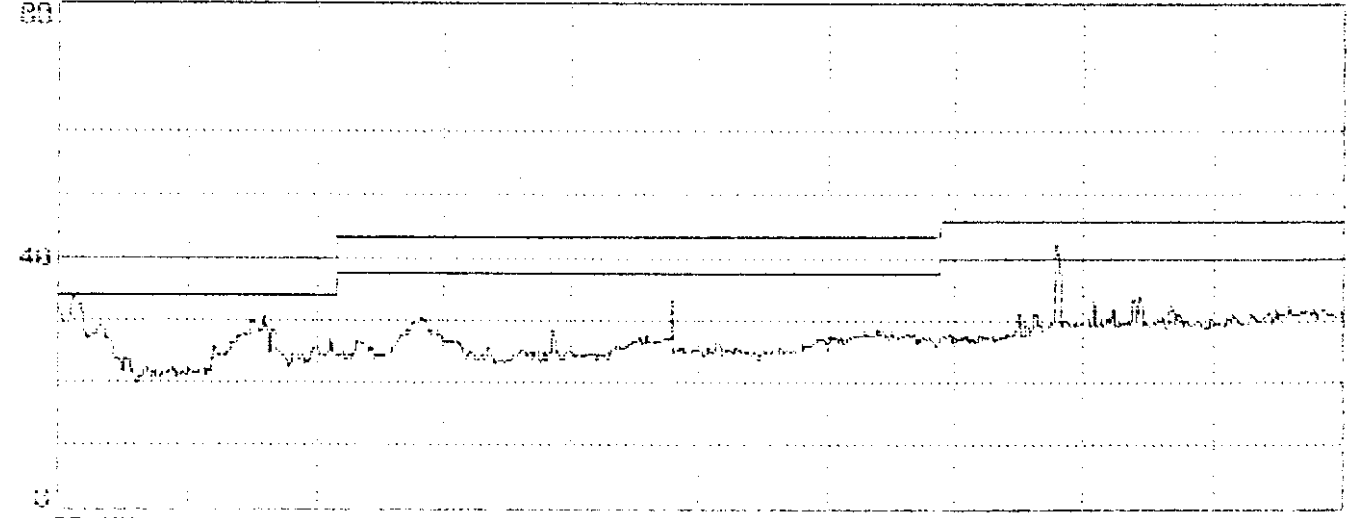


30 MHz 84 138 192 246 300  
Limit : FCC CLASS-B 3m Probe: BDA9106B(1209)A/C VERTICAL  
EUT : MONITOR M/N:TX-T7S37\*/M-T7S37\* Power: 120Vac;60Hz  
Margin: 6dB Standard: 0 Trace: 932, 0, 0, 0, 0  
Memo : 640X480,37.9KHz

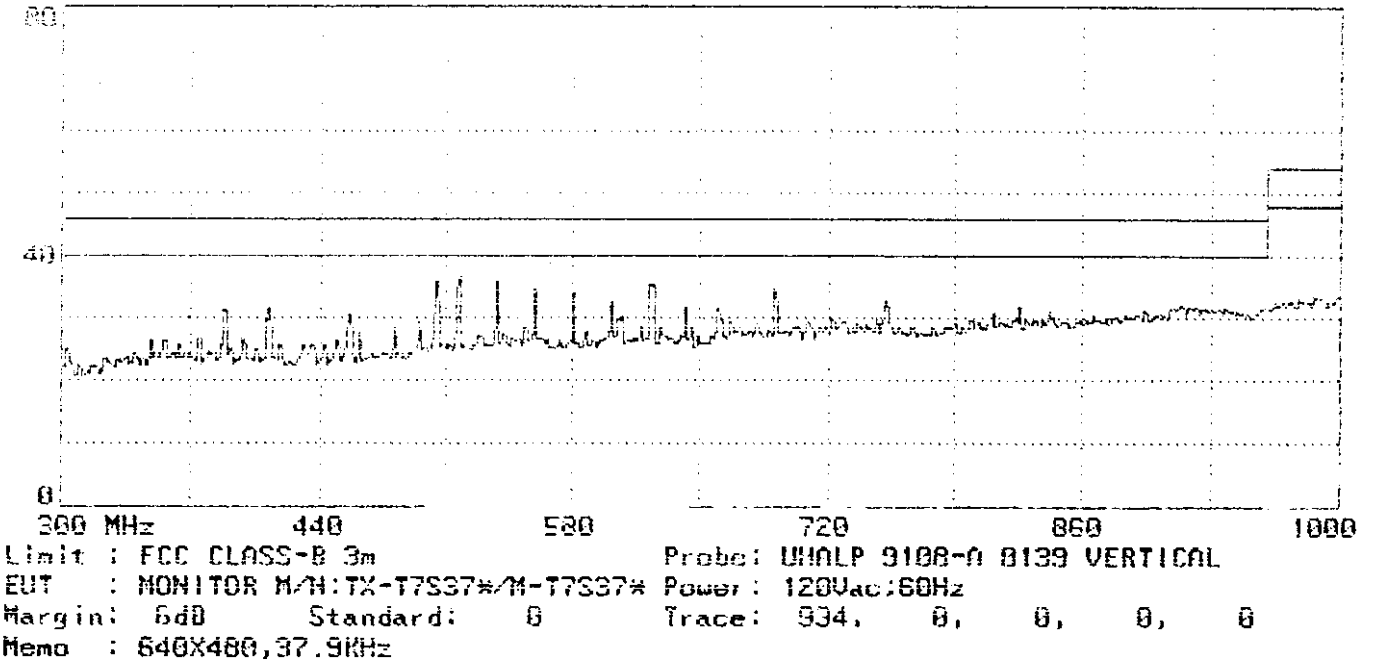
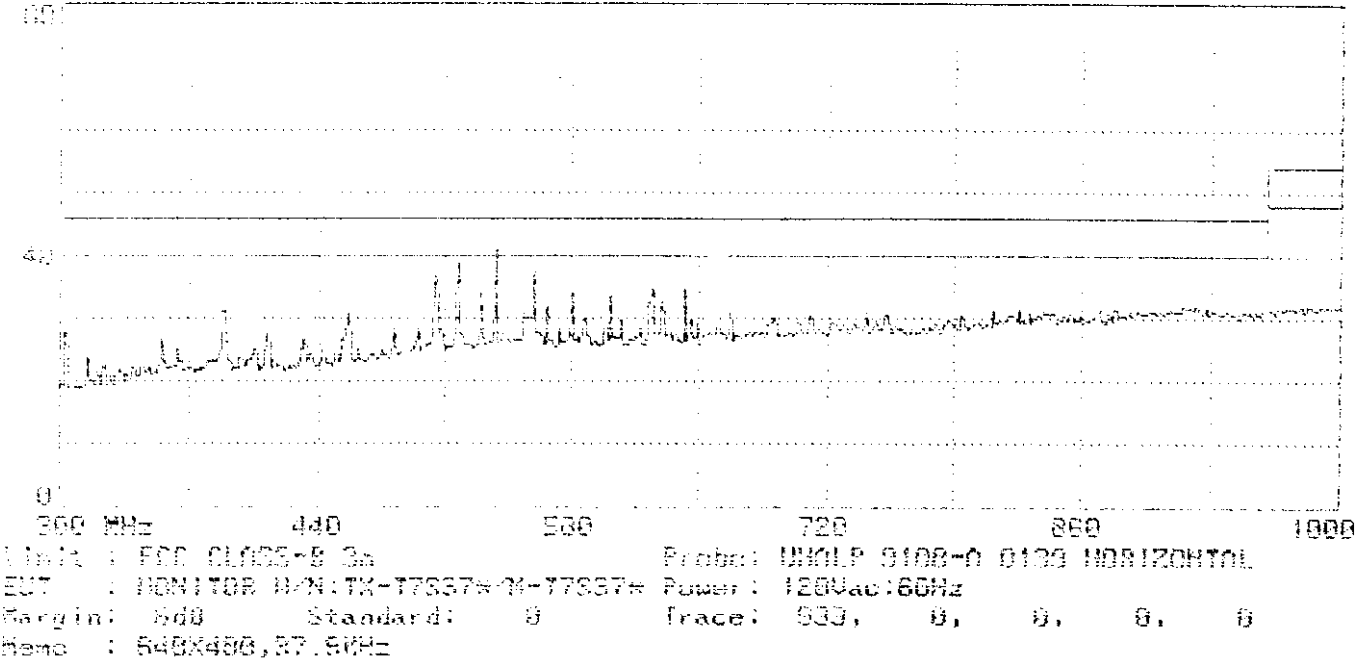



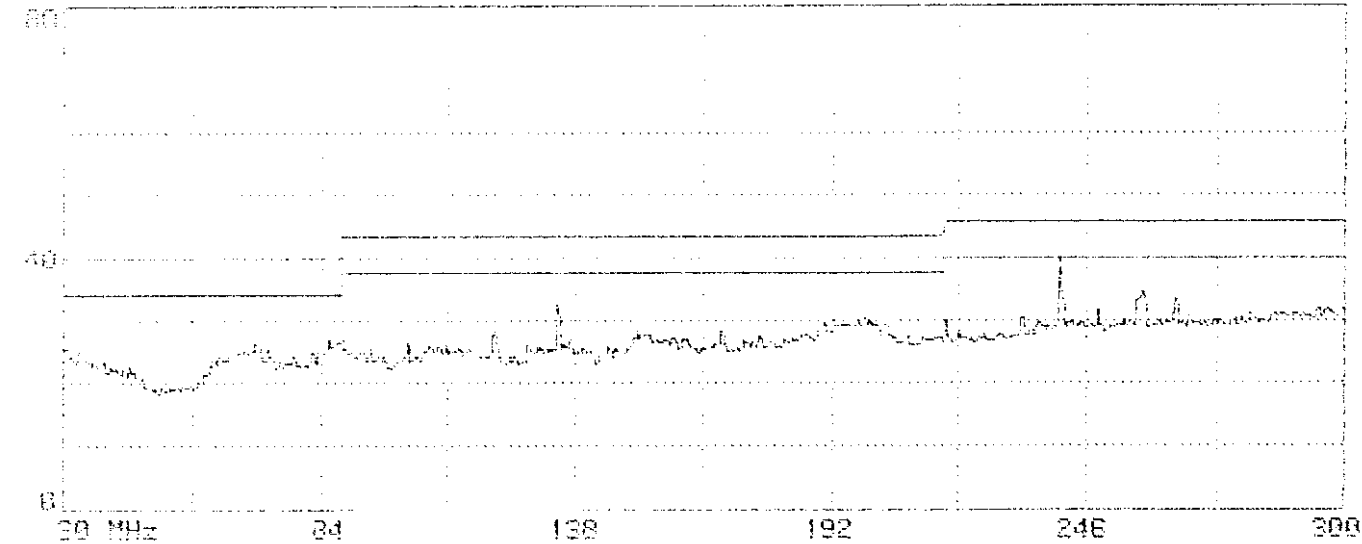



Limit : FCC CLASS-B 3a Probe: 8809105B(1209)A/C HORIZONTAL  
 EUT : MONITOR M/N:TX-T7S37\*/M-T7S37\* Power : 120Vac/60Hz  
 Margin: 6dB Standard: 0 Trace: 937, 0, 0, 0, 0  
 Memo : 800X600,48.1KHz

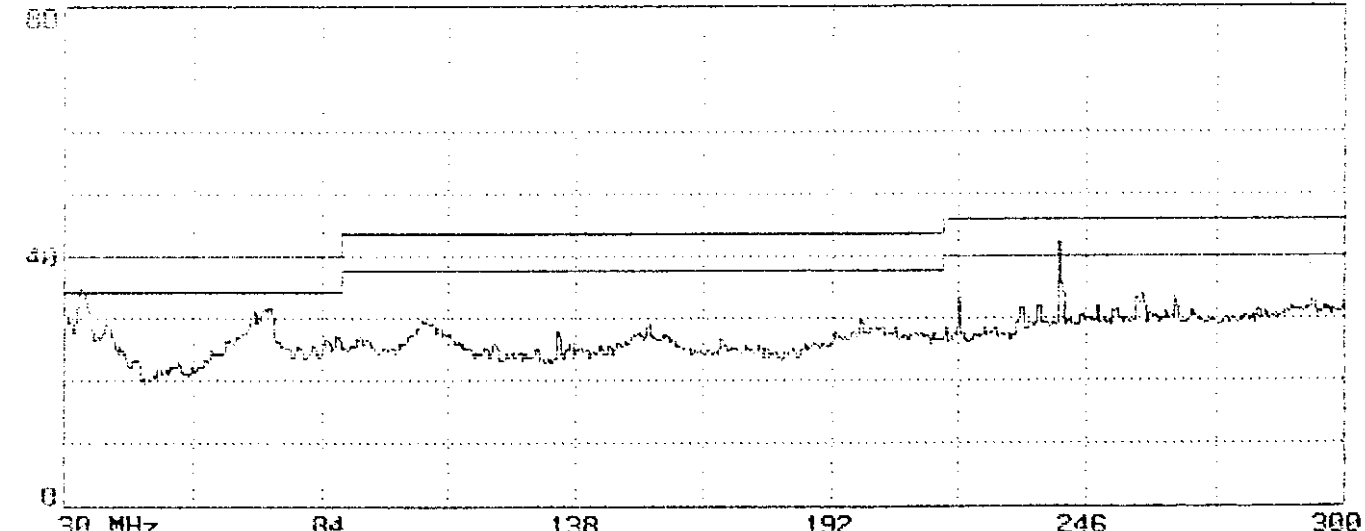


Limit : FCC CLASS-B 3a Probe: 8809105B(1209)A/C VERTICAL  
 EUT : MONITOR M/N:TX-T7S37\*/M-T7S37\* Power : 120Vac/60Hz  
 Margin: 6dB Standard: 0 Trace: 938, 0, 0, 0, 0  
 Memo : 800X600,48.1KHz

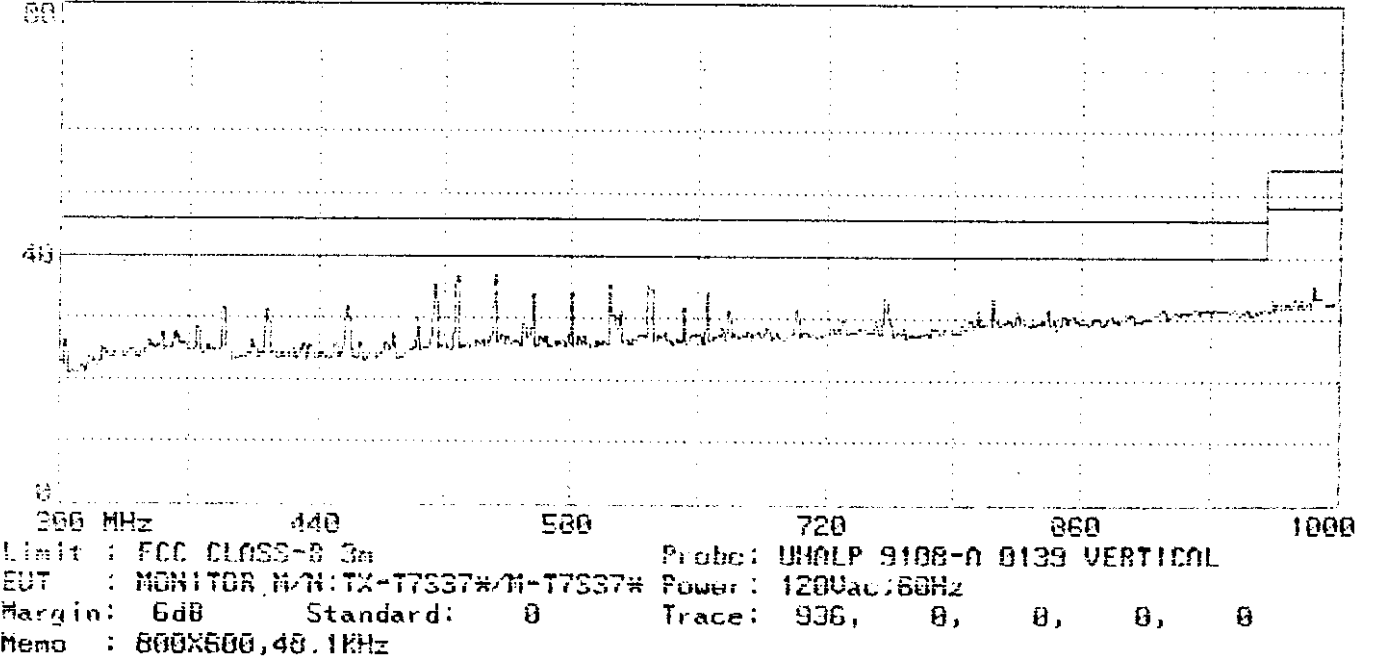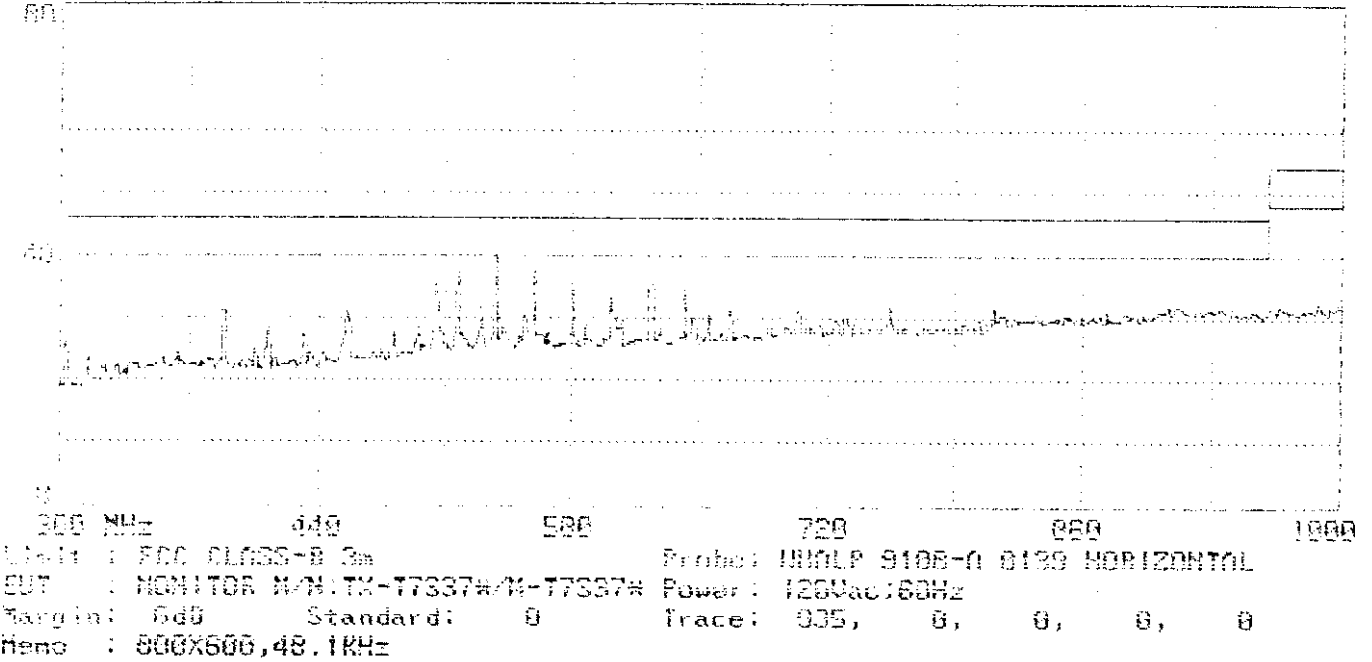

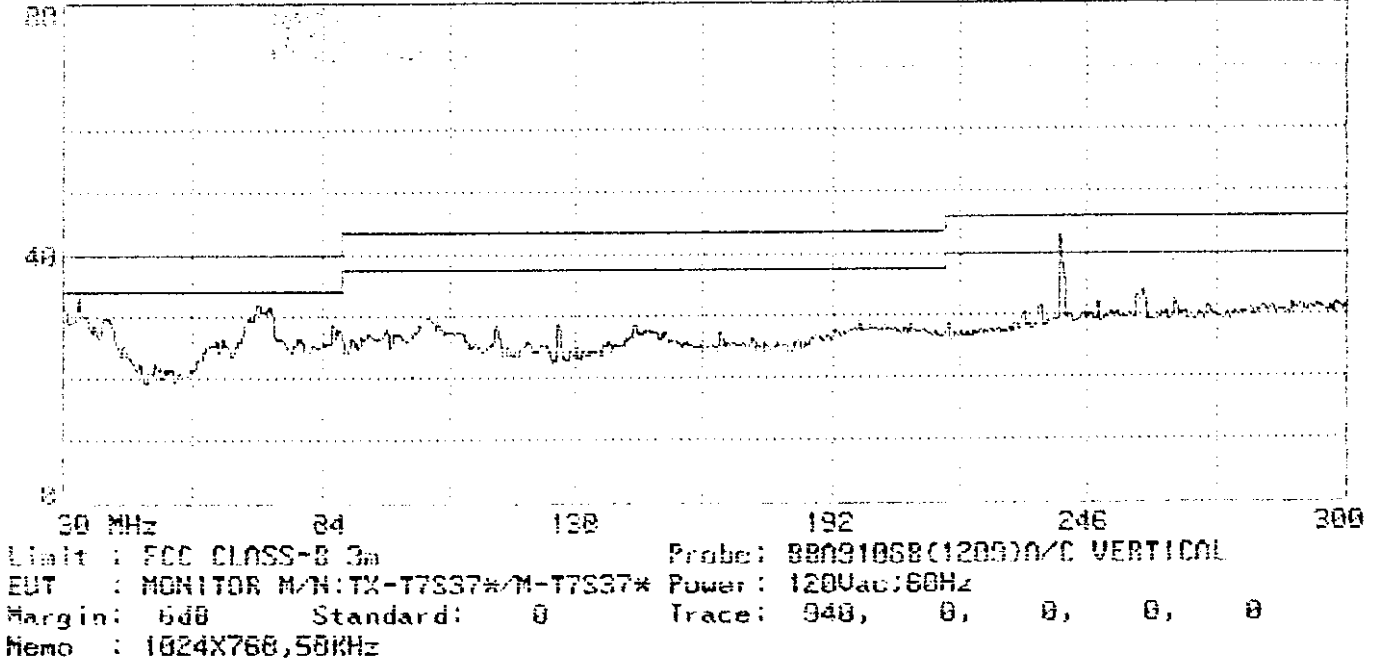
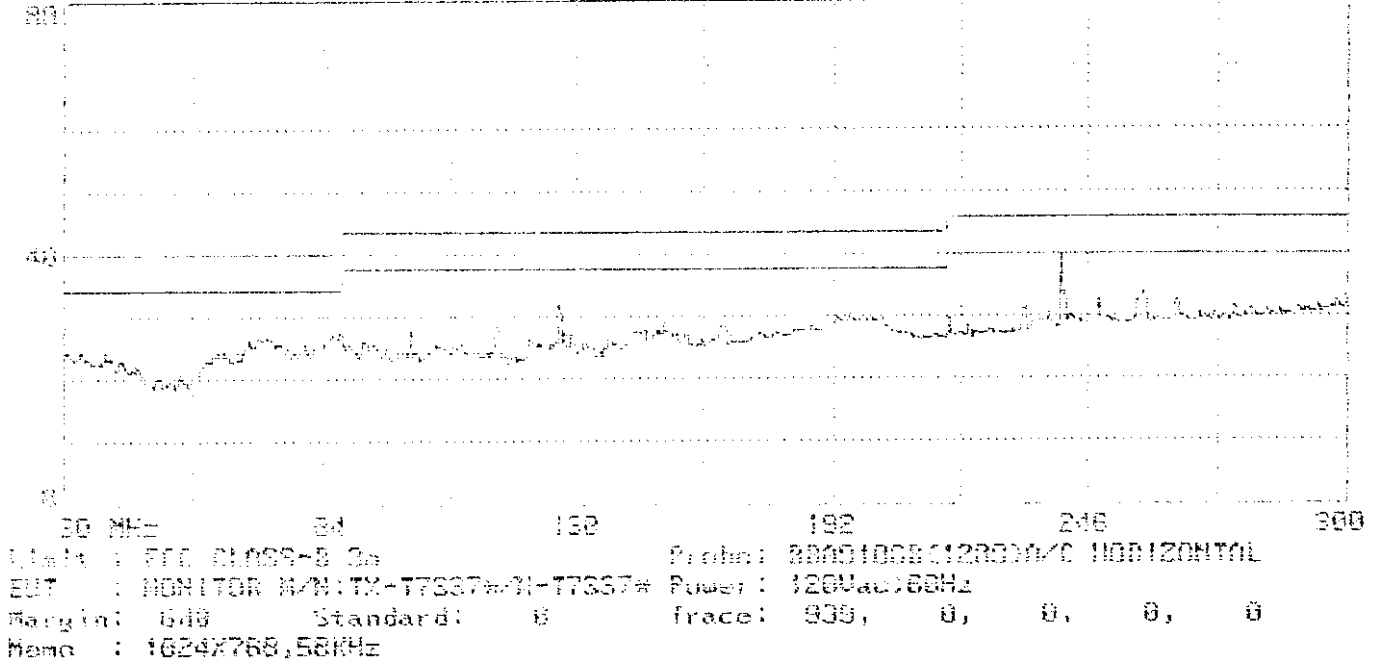



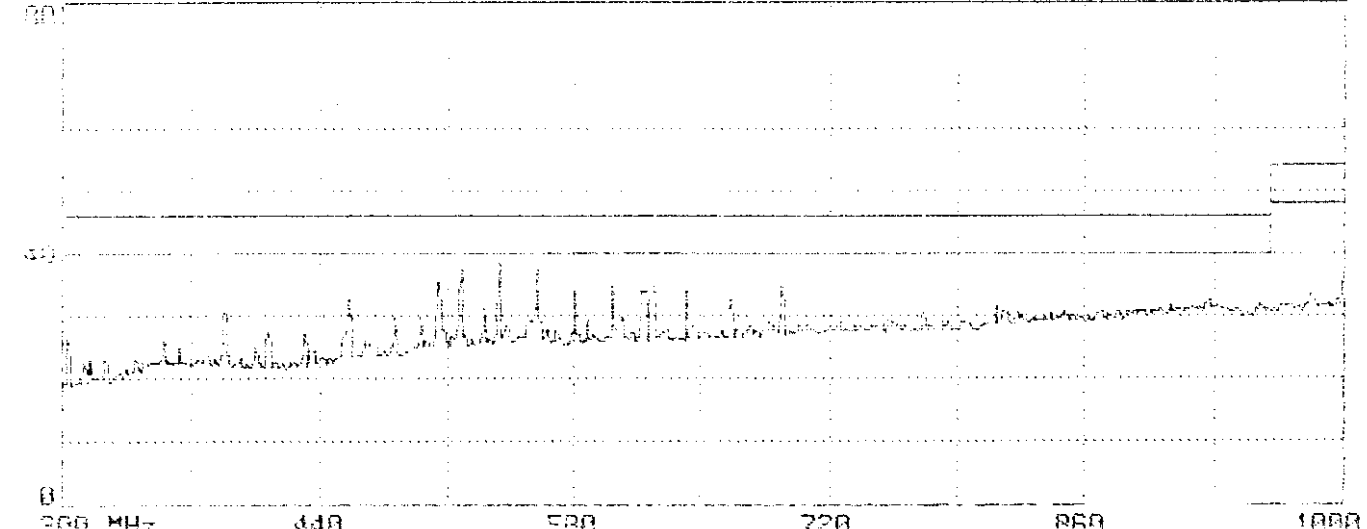



Limit : FCC CLASS-B 3m Probe: UHALP 9108-A 0139 HORIZONTAL  
EUT : MONITOR M/N:TX-T7S37\*/M-T7S37\* Power : 120Vac:60Hz  
Margin: 6dB Standard: 0 Trace: 941, 0, 0, 0, 0  
Memo : 1024X768,58KHz

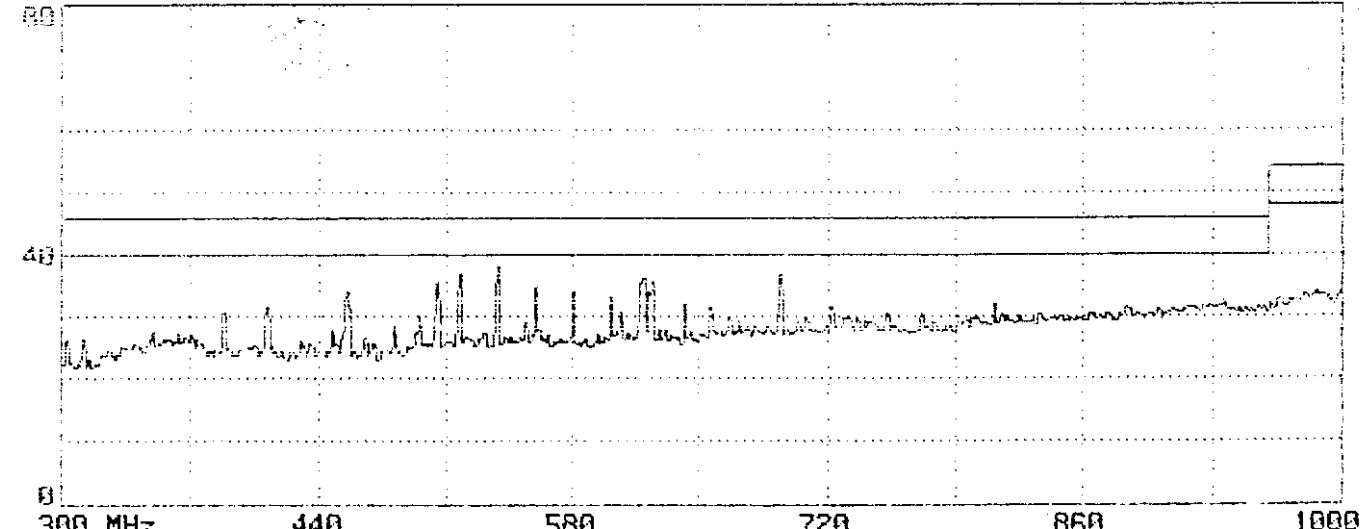


Limit : FCC CLASS-B 3m Probe: UHALP 9108-A 0139 VERTICAL  
EUT : MONITOR M/N:TX-T7S37\*/M-T7S37\* Power : 120Vac:60Hz  
Margin: 6dB Standard: 0 Trace: 942, 0, 0, 0, 0  
Memo : 1024X768,58KHz

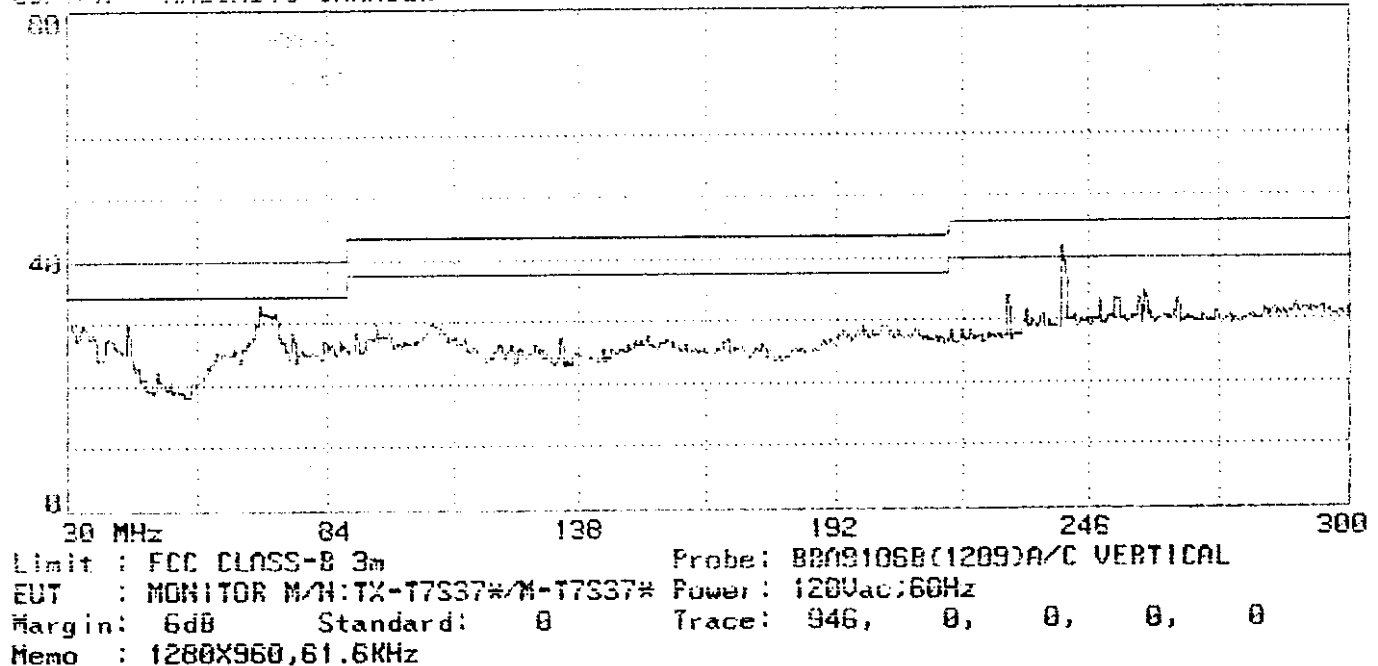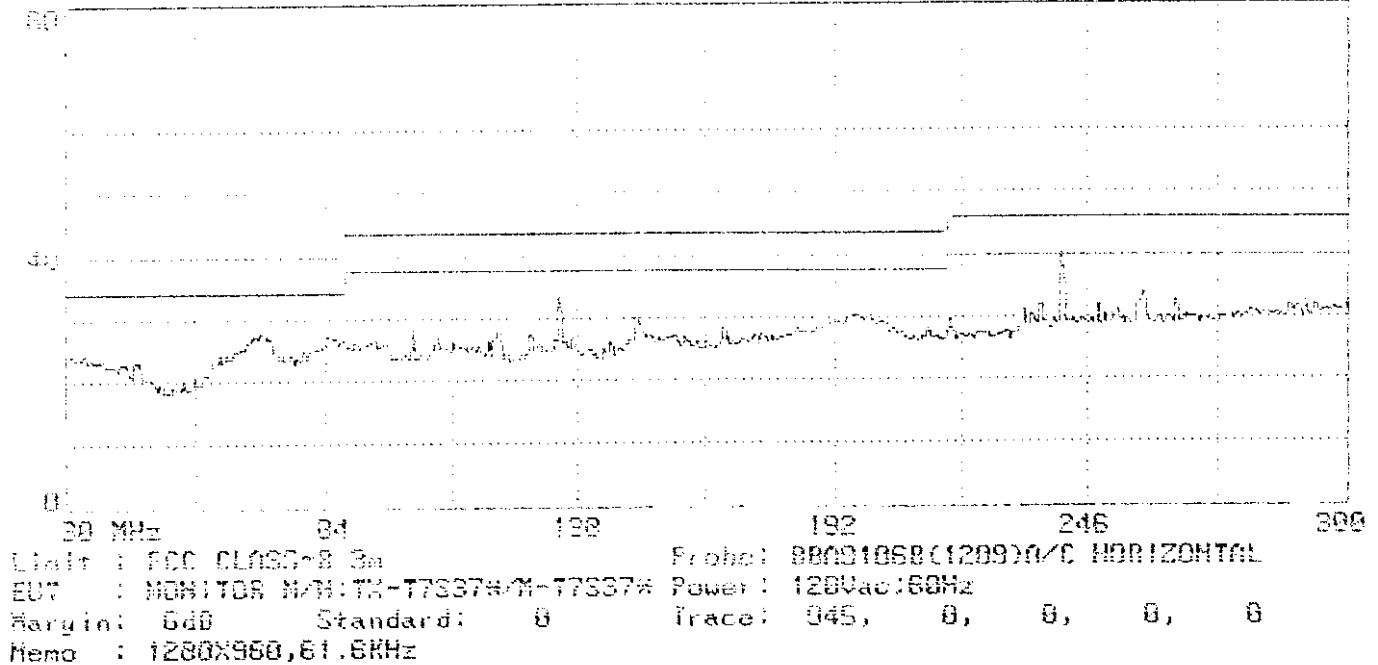

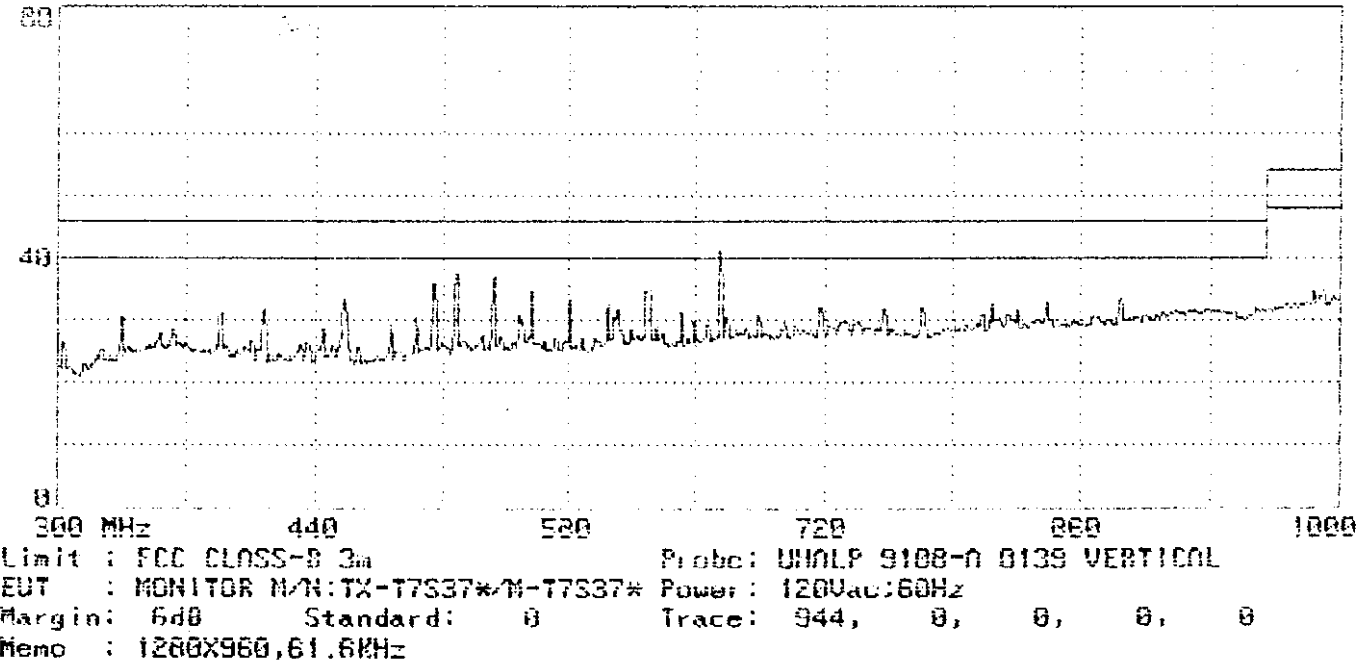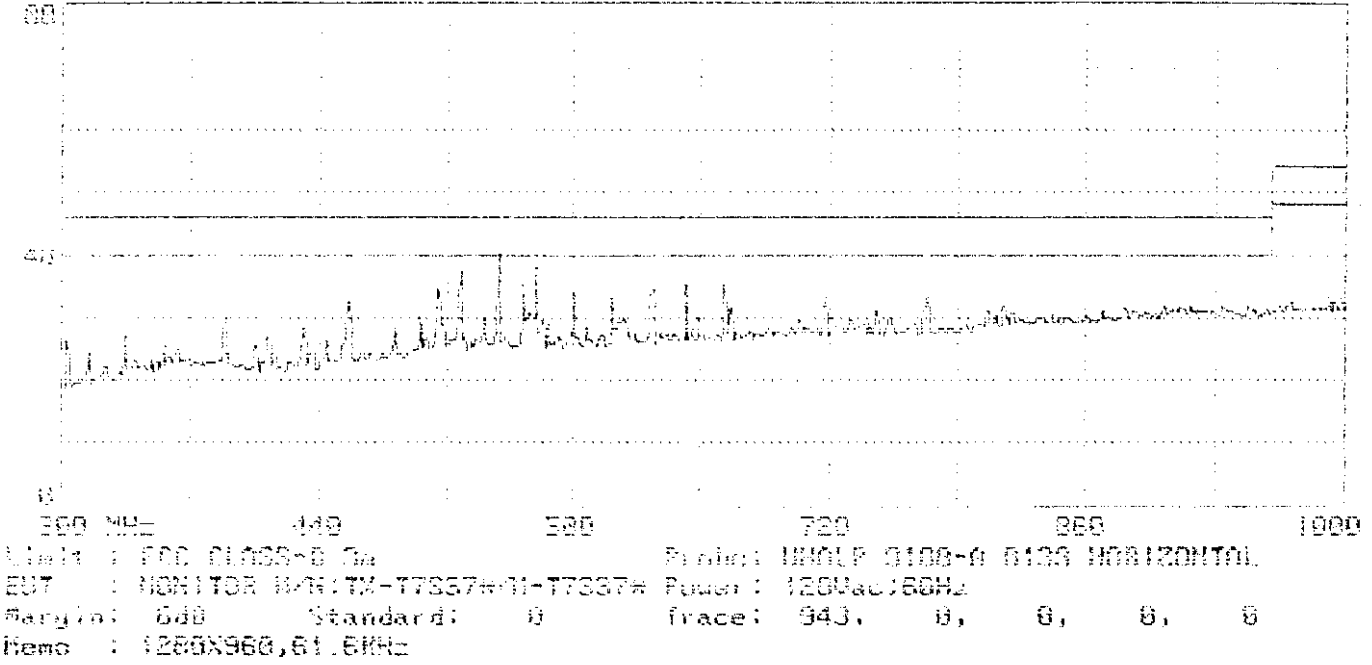

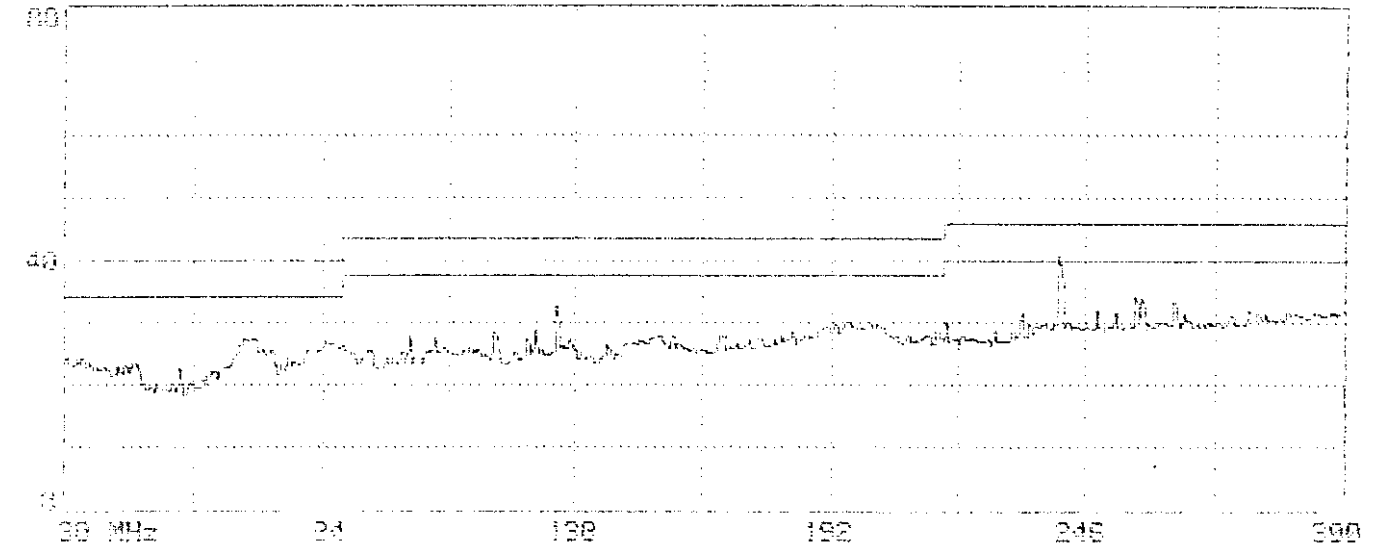

Limit : FCC CLASS-B 3m Probe: 88091068(1289)O/C HORIZONTAL  
EUT : MONITOR M/N:TX-T7337\*/M-T7337\* Power: 120Vac/60Hz  
Margin: 6dB Standard: 0 Trace: 947, 0, 0, 0, 0  
Memo : 1286X1024,66KHz

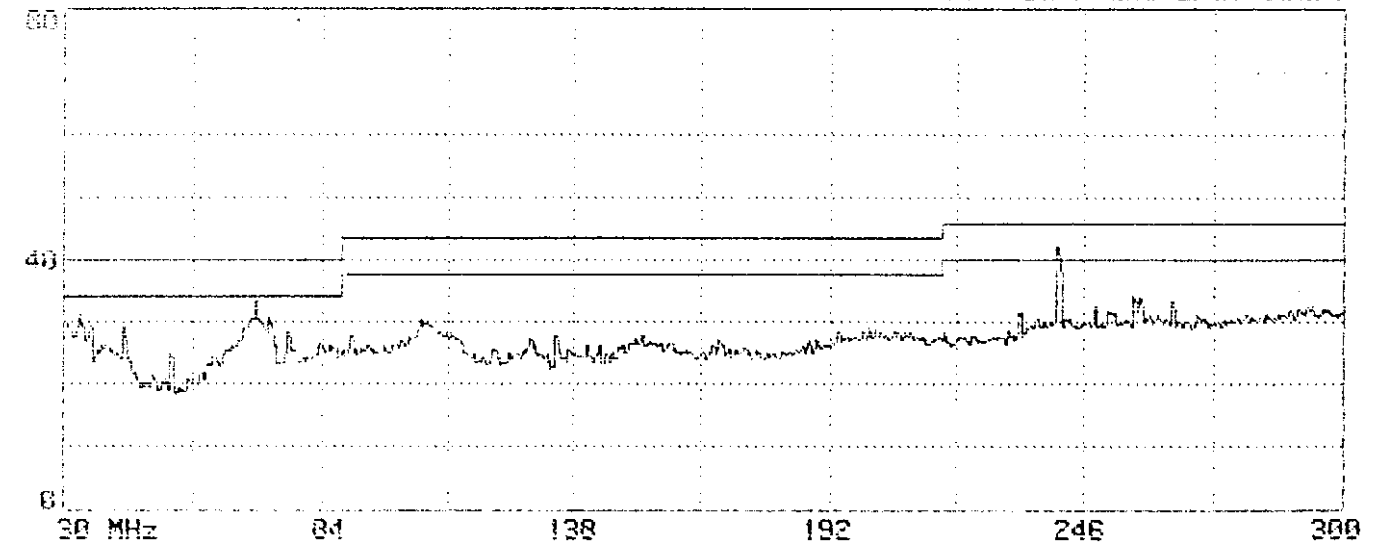

Limit : FCC CLASS-B 3m Probe: 88091068(1289)O/C VERTICAL  
EUT : MONITOR M/N:TX-T7337\*/M-T7337\* Power: 120Vac/60Hz  
Margin: 6dB Standard: 0 Trace: 948, 0, 0, 0, 0  
Memo : 1288X1024,66KHz

