





EMI TEST REPORT

Test Report No. 14913527H-A-R1

Customer	Panasonic Automotive Systems Co., Ltd.
Description of EUT	Car Navigation
Model Number of EUT	AT2405
FCC ID	ACJ932AT2405
Test Regulation	FCC Part 15 Subpart B
Test Result	Complied
Issue Date	May 15, 2025
Remarks	-

Representative test engineer	Approved by
	
Nachi Konegawa Engineer	Takumi Shimada Engineer
	 
	CERTIFICATE 5107.02
<input type="checkbox"/> The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in UL Japan, Inc.	
<input checked="" type="checkbox"/> There is no testing item of "Non-accreditation".	

Report Cover Page - Form-ULID-003532 (DCS:13-EM-F0429) Issue# 24.0

ANNOUNCEMENT

- This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
- The results in this report apply only to the sample tested. (Laboratory was not involved in sampling.)
- This sample tested is in compliance with the limits of the above regulation.
- The test results in this test report are traceable to the national or international standards.
- This test report must not be used by the customer to claim product certification, approval, or endorsement by the A2LA accreditation body.
- This test report covers EMC technical requirements. It does not cover administrative issues such as Manual or non-EMC test related Requirements. (if applicable)
- The all test items in this test report are conducted by UL Japan, Inc. Ise EMC Lab.
- The opinions and the interpretations to the result of the description in this report are outside scopes where UL Japan, Inc. has been accredited.
- The information provided by the customer for this report is identified in SECTION 1.
- The laboratory is not responsible for information provided by the customer which can impact the validity of the results.
- For test report(s) referred in this report, the latest version (including any revisions) is always referred.

REVISION HISTORY

Original Test Report No. 14913527H-A

This report is a revised version of 14913527H-A. 14913527H-A is replaced with this report.

Revision	Test Report No.	Date	Page Revised Contents
- (Original)	14913527H-A	December 19, 2024	-
1	14913527H-A-R1	May 15, 2025	2.1 Identification of EUT Corrected Test Date: September 9 to 17, 2024 -> September 9 to October 17, 2024

Reference: Abbreviations (Including words undescribed in this report)

A2LA	The American Association for Laboratory Accreditation	Hori.	Horizontal
AAN	Asymmetric Artificial Network	ICES	Interference-Causing Equipment Standard
AC	Alternating Current	I/O	Input/Output
AE	Auxiliary equipment	IEC	International Electrotechnical Commission
AM	Amplitude Modulation	IEEE	Institute of Electrical and Electronics Engineers
AMN	Artificial Mains Network	IF	Intermediate Frequency
Amp, AMP	Amplifier	ILAC	International Laboratory Accreditation Conference
ANSI	American National Standards Institute	ISED	Innovation, Science and Economic Development Canada
Ant, ANT	Antenna	ISN	Impedance Stabilization Network
AP	Access Point	ISO	International Organization for Standardization
ASK	Amplitude Shift Keying	JAB	Japan Accreditation Board
Atten., ATT	Attenuator	LAN	Local Area Network
AV	Average	LCL	Longitudinal Conversion Loss
BPSK	Binary Phase-Shift Keying	LIMS	Laboratory Information Management System
BR	Bluetooth Basic Rate	LISN	Line Impedance Stabilization Network
BT	Bluetooth	MRA	Mutual Recognition Arrangement
BT LE	Bluetooth Low Energy	N/A	Not Applicable
BW	BandWidth	NIST	National Institute of Standards and Technology
C.F	Correction Factor	NS	No signal detect.
Cal Int	Calibration Interval	NSA	Normalized Site Attenuation
CAV	CISPR AV	OBW	Occupied BandWidth
CCK	Complementary Code Keying	OFDM	Orthogonal Frequency Division Multiplexing
CDN	Coupling Decoupling Network	PER	Packet Error Rate
Ch., CH	Channel	PK	Peak
CISPR	Comite International Special des Perturbations Radioelectriques	P _{LT}	long-term flicker severity
Corr.	Correction	POHC(A)	Partial Odd Harmonic Current
CPE	Customer premise equipment	Pol., Pola.	Polarization
CW	Continuous Wave	PR-ASK	Phase Reversal ASK
DBPSK	Differential BPSK	P _{ST}	short-term flicker severity
DC	Direct Current	QAM	Quadrature Amplitude Modulation
DET	Detector	QP	Quasi-Peak
D-factor, D.fac.	Distance factor	QPSK	Quadrature Phase Shift Keying
Dmax	maximum absolute voltage change during an observation period	r.m.s., RMS	Root Mean Square
DQPSK	Differential QPSK	RBW	Resolution BandWidth
DSSS	Direct Sequence Spread Spectrum	RE	Radio Equipment
DUT	Device Under Test	REV	Reverse
EDR	Enhanced Data Rate	RF	Radio Frequency
e.i.r.p., EIRP	Equivalent Isotropically Radiated Power	RFID	Radio Frequency Identifier
EM clamp	Electromagnetic clamp	RNSS	Radio Navigation Satellite Service
EMC	ElectroMagnetic Compatibility	RSS	Radio Standards Specifications
EMI	ElectroMagnetic Interference	Rx	Receiving
EMS	ElectroMagnetic Susceptibility	S.fac.	Site factor
EN	European Norm	SINAD	Ratio of (Signal + Noise + Distortion) to (Noise + Distortion)
e.r.p., ERP	Effective Radiated Power	S/N	Signal to Noise ratio
ETSI	European Telecommunications Standards Institute	SA, S/A	Spectrum Analyzer
EU	European Union	SABS	South African Bureau of Standards
EUT	Equipment Under Test	SANS	South African National Standards
Fac.	Factor	SG	Signal Generator
FCC	Federal Communications Commission	SVSWR	Site-Voltage Standing Wave Ratio
FHSS	Frequency Hopping Spread Spectrum	THC(A)	Total Harmonic Current
FM	Frequency Modulation	THD(%)	Total Harmonic Distortion
Freq.	Frequency	TR, T/R	Test Receiver
FSK	Frequency Shift Keying	Tx	Transmitting
Fund	Fundamental	UFA	Uniform field area
FWD	Forward	VBW	Video BandWidth
GFSK	Gaussian Frequency-Shift Keying	Vert.	Vertical
GNSS	Global Navigation Satellite System	WLAN	Wireless LAN
GPS	Global Positioning System	xDSL	Generic term for all types of DSL technology (DSL: Digital Subscriber Line)

CONTENTS	PAGE
SECTION 1: Customer information	5
SECTION 2: Equipment under test (EUT)	5
SECTION 3: Test specification, procedures & results	7
SECTION 4: Operation of EUT during testing	10
SECTION 5: Radiated Emission	12
SECTION 6: Antenna Terminal	14
APPENDIX 1: Test data	15
Radiated Emission	15
Antenna Terminal Conducted Emission.....	31
APPENDIX 2: Test instruments	47
APPENDIX 3: Photographs of test setup	49
Radiated Emission	49
Antenna Terminal Conducted Tests	53

SECTION 1: Customer information

Company Name	Panasonic Automotive Systems Co., Ltd. *1)
Address	4261, Ikonobe-cho, Tsuzuki-ku, Yokohama-shi, Kanagawa-ken 224-8520, Japan
Telephone Number	+81-50-1802-5117
Contact Person	Daisuke Takahata

*1) The Grantee name in the FCC application is "Panasonic Corporation of North America".

The information provided by the customer is as follows;

- Customer, Description of EUT, Model Number of EUT, FCC ID on the cover and other relevant pages
- Operating/Test Mode(s) (Mode(s)) on all the relevant pages
- SECTION 1: Customer Information
- SECTION 2: Equipment Under Test (EUT) other than the Receipt Date and Test Date
- SECTION 4: Operation of EUT during testing

SECTION 2: Equipment under test (EUT)

2.1 Identification of EUT

Description	Car Navigation
Model Number	AT2405
Serial Number	Refer to SECTION 4.2
Condition	Production prototype (Not for Sale: This sample is equivalent to mass-produced items.)
Modification	No Modification by the test lab
Receipt Date	August 22, 2024
Test Date	September 9 to October 17, 2024

2.2 Product Description

General Specification

Rating	DC 13.2 V
Clock frequency (ies) in the system	(SOC) 38.4 MHz, (CPU) 20 MHz, 0.03277 MHz, (DTCP) 13.56 MHz, (AM/FM) 36.4 MHz, 36.864 MHz, (GNSS) 26 MHz, 0.03277 MHz, (Ether) 25 MHz, (Video) 32 MHz

Radio Specification

Bluetooth (BR / EDR / BT LE)

Equipment Type	Transceiver	
Frequency of Operation	2402 MHz to 2480 MHz	
Type of Modulation	FHSS, GFSK / $\pi/4$ -DQPSK, 8DPSK / GFSK	
Antenna Gain	4 dBi	

WLAN (IEEE802.11b/11g/11n-20/11ax-20)

Equipment Type	Transceiver	
Frequency of Operation	2412 MHz to 2462 MHz	
Type of Modulation	DSSS, OFDM	
	OFDMA (IEEE802.11ax only)	26/52/106/242-tone RU
Antenna Gain	4 dBi	

WLAN (IEEE802.11a/11n-20/11ac-20/11ax-20/11n-40/11ac-40/11ax-40/11ac-80/11ax-80)

Equipment Type	Transceiver	
Frequency of Operation	20 MHz Band	5180 MHz to 5240 MHz 5745 MHz to 5825 MHz
	40 MHz Band	5190 MHz to 5230 MHz 5755 MHz to 5795 MHz
	80 MHz Band	5210 MHz, 5775 MHz
Type of Modulation	OFDM	
	OFDMA (IEEE802.11ax only)	20 MHz: 26/52/106/242-tone RU
		40 MHz: 26/52/106/242/484-tone RU
80 MHz: 26/52/106/242/484/996-tone RU		
Antenna Gain	RF0: 5 dBi RF1: 5 dBi	

AM / FM

Equipment Type	Receiver
Frequency of Operation	AM: 530 kHz to 1710 kHz FM: 87.75 MHz to 107.9 MHz
Type of Modulation	AM FM
Antenna Connector Type	Car manufacturer original
Impedance	AM / FM: 75 ohm

SECTION 3: Test specification, procedures & results

3.1 Test Specification

Test Specification	FCC Part 15 Subpart B The latest version on the first day of the testing period
Title	FCC 47CFR Part15 Radio Frequency Device Subpart B Unintentional Radiators

3.2 Procedures and results

Item	Test Procedure	Limits	Worst margin	Result	Remarks
Conducted emission	ANSI C63.4: 2014 + C63.4a: 2017 7. AC power - line conducted emission measurements	Part 15 Subpart B 15.107(a)	-	N/A	*1)
Radiated emission	ANSI C63.4: 2014 + C63.4a: 2017 8. Radiated emission measurements	Part 15 Subpart B 15.109(a)	9.10 dB 4999.943 MHz Vertical, AV (Mode 2, Digital Other)	Complied	-
Antenna Terminal	ANSI C63.4: 2014 + C63.4a: 2017 12. Measurement of unintentional radiators other than ITE	Part 15 Subpart B 15.111(a)	23.83 dB 2099.228 MHz (Mode 4, Digital Other)	Complied	-
* Note: UL Japan, Inc.'s EMI Work Procedure: Work Instructions-ULID-003591. *1) The test is not applicable since the EUT is not the device that is designed to be connected to the public utility (AC) power line.					

3.3 Addition to standard

No addition, exclusion nor deviation has been made from the standard.

3.4 Uncertainty

Measurement uncertainty is not taken into account when stating conformity with a specified requirement. Note: When margins obtained from test results are less than the measurement uncertainty, the test results may exceed the limit.

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor $k = 2$.

Radiated emission

Measurement distance	Frequency range		Unit	Calculated Uncertainty (+/-)
3 m	9 kHz to 30 MHz		dB	3.3
10 m			dB	3.1
3 m	30 MHz to 200 MHz	Horizontal	dB	5.0
		Vertical	dB	5.0
	200 MHz to 1000 MHz	Horizontal	dB	5.2
		Vertical	dB	6.2
10 m	30 MHz to 200 MHz	Horizontal	dB	5.5
		Vertical	dB	5.4
	200 MHz to 1000 MHz	Horizontal	dB	5.5
		Vertical	dB	5.5
3 m	1 GHz to 6 GHz		dB	5.1
	6 GHz to 18 GHz		dB	5.4
1 m	10 GHz to 18 GHz		dB	5.4
	18 GHz to 26.5 GHz		dB	5.3
	26.5 GHz to 40 GHz		dB	4.8
0.5 m	26.5 GHz to 40 GHz		dB	5.0

Antenna Terminal test

Item	Unit	Calculated Uncertainty (+/-)
Antenna terminal conducted emission	dB	3.1

3.5 Test Location

UL Japan, Inc. Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 Japan

Telephone: +81-596-24-8999

A2LA Certificate Number: 5107.02 / FCC Test Firm Registration Number: 884919

ISED Lab Company Number: 2973C / CAB identifier: JP0002

Test site	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Other rooms	Maximum measurement distance
No.1 semi-anechoic chamber	19.2 x 11.2 x 7.7	7.0 x 6.0	No.1 Power source room	10 m
No.2 semi-anechoic chamber	7.5 x 5.8 x 5.2	4.0 x 4.0	-	3 m
No.3 semi-anechoic chamber	12.0 x 8.5 x 5.9	6.8 x 5.75	No.3 Preparation room	3 m
No.3 shielded room	4.0 x 6.0 x 2.7	N/A	-	-
No.4 semi-anechoic chamber	12.0 x 8.5 x 5.9	6.8 x 5.75	No.4 Preparation room	3 m
No.4 shielded room	4.0 x 6.0 x 2.7	N/A	-	-
No.5 semi-anechoic chamber	6.0 x 6.0 x 3.9	6.0 x 6.0	-	-
No.5 measurement room	6.4 x 6.4 x 3.0	6.4 x 6.4	-	-
No.6 shielded room	4.0 x 4.5 x 2.7	4.0 x 4.5	-	-
No.6 measurement room	4.75 x 5.4 x 3.0	4.75 x 4.15	-	-
No.7 shielded room	4.7 x 7.5 x 2.7	4.7 x 7.5	-	-
No.8 measurement room	3.1 x 5.0 x 2.7	3.1 x 5.0	-	-
No.9 measurement room	8.8 x 4.6 x 2.8	2.4 x 2.4	-	-
No.10 shielded room	3.8 x 2.8 x 2.8	3.8 x 2.8	-	-
No.11 measurement room	4.0 x 3.4 x 2.5	N/A	-	-
No.12 measurement room	2.6 x 3.4 x 2.5	N/A	-	-
Large Chamber	16.9 x 22.1 x 10.17	16.9 x 22.1	-	10 m
Small Chamber	5.3 x 6.69 x 3.59	5.3 x 6.69	-	-

3.6 Test data, Test instruments, and Test set up


Refer to APPENDIX.

SECTION 4: Operation of EUT during testing

4.1 Operating Mode(s)

Mode	1. FM Receiving (Local) mode (Analog / Digital): for RE 2. FM Receiving (Other) mode (Analog / Digital): for RE 3. Antenna Terminal mode (Local) (Analog / Digital): for AT 4. Antenna Terminal mode (Other) (Analog / Digital): for AT
Software(s)	YEP1RM09303B
Abbreviations for test items	RE: Radiated Emission, AT: Antenna Terminal Conducted Emission

4.2 Configuration and peripherals

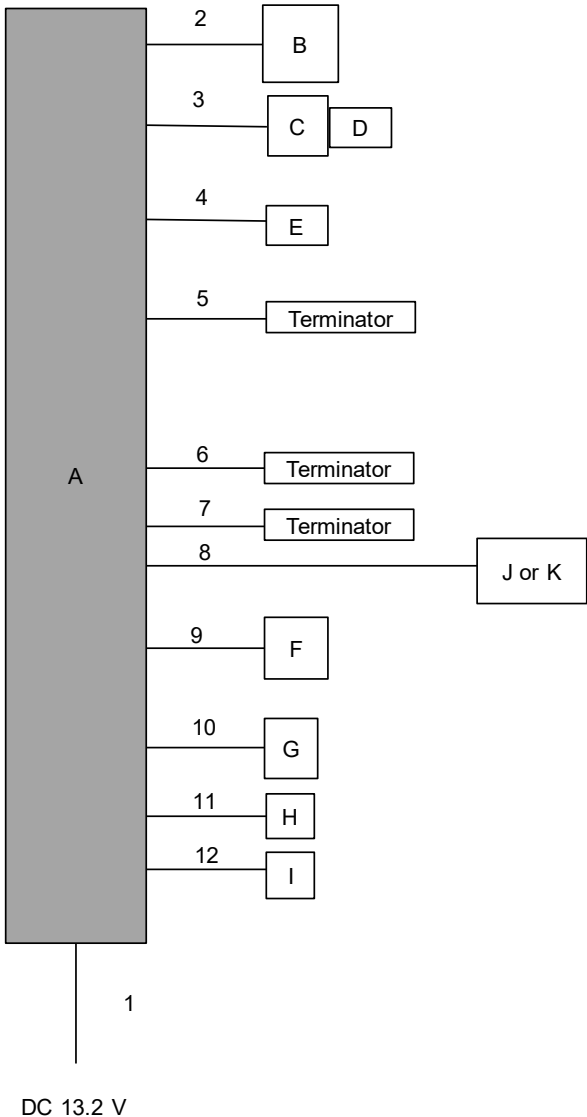

* Cabling and setup(s) were taken into consideration and test data was taken under worse case conditions.

Description of EUT and Support Equipment

No.	Item	Model number	Serial Number	Manufacturer	Remarks
A	Car Navigation	AT2405	500013	Panasonic Automotive Systems Co., Ltd.	EUT
B	ADAS Jig	GVIF3OUT2A	8	Persol AVC Technology Co., Ltd.	-
C	USB BOX	DEP38-10029	-	Japan Aviation Electronics Industry, Ltd.	-
D	USB Memory	RUF3-K16GB	P10416	Buffalo	-
E	Steering switch	-	1400	Panasonic	-
F	GPS Antenna	ANN-MS	20N40132	U-Blox	-
G	Microphone	SDA3520A	4AC011628	Panasonic	-
H	Microphone	SDA3520A	4AC011628	Panasonic	-
I	Amplifier	7669	01A230000384V	DENSO	-
J	Signal Generator	SMC100A	103408	Rohde & Schwarz	*1)
K	HD Radio Vector Signal Generator	MSG-3100	2100109	MEGURO ELECTRONICS CORPORATION	*2)

*1) RE (Analog mode) only

*2) RE (Digital mode) only

List of Cables Used

No.	Name	Length (m)	Shield		Remarks
			Cable	Connector	
1	DC Cable	4.3	Unshielded	Unshielded	-
2	Signal Cable	1.9	Unshielded	Unshielded	-
3	USB Cable	2.3	Shielded	Shielded	-
4	Signal Cable	4.3	Shielded	Shielded	-
5	XM Antenna Cable	3.0	Shielded	Shielded	-
6	Signal Cable	1.0	Shielded	Shielded	-
7	FM Cable	3.0	Shielded	Shielded	-
8	FM Cable	3.0	Shielded	Shielded	-
9	GPS Antenna Cable	2.0	Shielded	Shielded	-
10	Signal Cable	4.3	Unshielded	Unshielded	-
11	Signal Cable	4.3	Unshielded	Unshielded	-
12	Signal Cable	3.0	Unshielded	Unshielded	-

SECTION 5: Radiated Emission

5.1 Operating environment

Date : See data
 Test place : See data
 Temperature : See data
 Humidity : See data
 Test engineer : See data

5.2 Test configuration

EUT was placed on a urethane platform of nominal size, 1.0 m by 1.5 m, raised 0.8 m above the conducting ground plane.

The EUT was set on the edge of the tabletop.

Test was made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna was varied in height above the conducting ground plane to obtain the maximum signal strength.

Photographs of the set up are shown in APPENDIX 3.

5.3 Test conditions

Frequency range : 30 MHz to 200 MHz (Biconical antenna)
 200 MHz to 1000 MHz (Logperiodic antenna)
 1000 MHz to 40000 MHz (Horn antenna)
 Test distance : 3 m (Below 1 GHz)
 4 m (1 GHz to 6 GHz)
 5 m (6 GHz to 10 GHz)
 1 m (Above 10 GHz)
 EUT position : Table top
 EUT operation mode : See Clause 4.1

5.4 Test procedure

The height of the measuring antenna varied between 1 and 4 m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.

The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver, or the Spectrum Analyzer.

The radiated emission measurements were made with the following detector function of the Test Receiver and the Spectrum Analyzer.

The test of Local oscillator spurious has been measured up to appropriate frequency based on the result of the antenna terminal test.

Test antenna was aimed at the emission source for receiving the maximum signal and always kept. (Above 1 GHz)

Frequency	Below 1 GHz	1 GHz to 26 GHz *1)	26 GHz to 40 GHz *1)
Instrument used	Test Receiver	Test Receiver	Spectrum Analyzer
IF Bandwidth	QP: BW 120 kHz	PK: BW 1 MHz, CAV: BW 1 MHz	PK: RBW: 1 MHz / VBW: 3 MHz AV *2): RBW: 1 MHz / VBW: 10 Hz


*1) The measurement data was adjusted to a 3 m distance using the following Distance Factor.

Distance Factor: See Figure 1.

*2) When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

Figure 1: Test Setup


Below 1 GHz

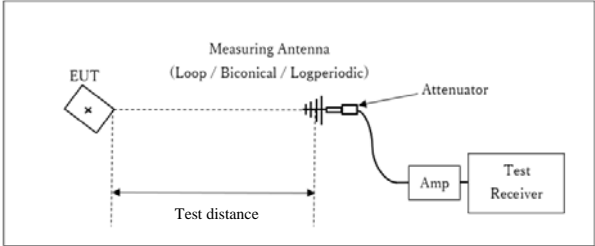

× : Center of turn table

Test Distance: 3 m

1 GHz to 10 GHz

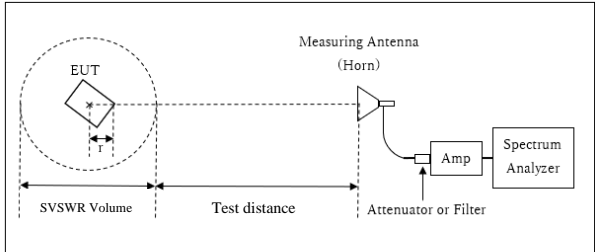

r : Radius of an outer periphery of EUT
 × : Center of turn table


[1 GHz to 6 GHz]
 Distance Factor: $20 \times \log(3.3 \text{ m}^*/3.0 \text{ m}) = 0.83 \text{ dB}$
 *(Test Distance + SVSWR Volume /2) - r = 3.3 m

Test Distance: 3 m
 SVSWR Volume: 2 m
 (SVSWR Volume has been calibrated based on CISPR 16-1-4.)
 r: 0.70 m

[6 GHz to 10 GHz]
 Distance Factor: $20 \times \log(4.3 \text{ m}^*/3.0 \text{ m}) = 3.13 \text{ dB}$
 *(Test Distance + SVSWR Volume /2) - r = 4.3 m

Test Distance: 4.3 m
 SVSWR Volume: 1.4 m
 (SVSWR Volume has been calibrated based on CISPR 16-1-4.)
 r: 0.70m

10 GHz to 40 GHz

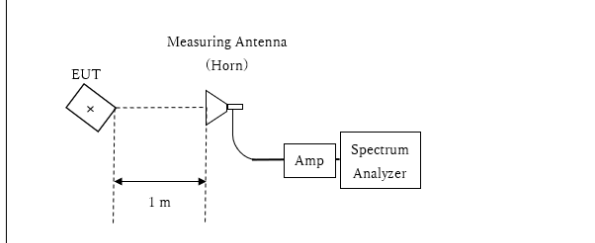

× : Center of turn table

Distance Factor: $20 \times \log(1.0 \text{ m}^* / 3.0 \text{ m}) = -9.54 \text{ dB}$
 *Test Distance: 1 m

The test was made on EUT at the normal use position.

5.5 Test result

Summary of the test results: Pass

Test results are rounded off and limit are rounded down, so some differences might be observed.

SECTION 6: Antenna Terminal

6.1 Operating environment

Date : See data
Test place : See data
Temperature : See data
Humidity : See data
Test engineer : See data

6.2 Test configuration

EUT was placed on a wooden table of nominal size, 1.0 m by 1.5 m, raised 0.8 m from the ground. Photographs of the set up are shown in APPENDIX 3.

6.3 Test conditions

Frequency range : 30 MHz to 1000 MHz / 1000 MHz to 40000 MHz
Test distance : N/A
EUT position : Table top
EUT operation mode : See Clause 4.1

6.4 Test procedure

The Antenna Terminal was measured with a spectrum analyzer connected to the antenna port.

Frequency	Below 1 GHz	Above 1 GHz
Instrument used	Spectrum Analyzer *1)	Spectrum Analyzer
IF Bandwidth	PK: RBW: 100 kHz / VBW: 300 kHz	EMI PK: RBW: 1 MHz / VBW: 3 MHz

*1) The Spectrum Analyzer was used in 3 dB resolution bandwidth.

6.5 Test result


Summary of the test results: Pass

APPENDIX 1: Test data

**Radiated Emission
(Analog)**

Test place Ise EMC Lab.
Semi Anechoic Chamber No.4
Date September 9, 2024
Temperature / Humidity 23 deg. C / 57 % RH
Engineer Nachi Konegawa
(Below 1 GHz)
Mode Mode 1 (87.75 MHz)

Limit : FCC_Part 15 Subpart B(15.109)_Class B

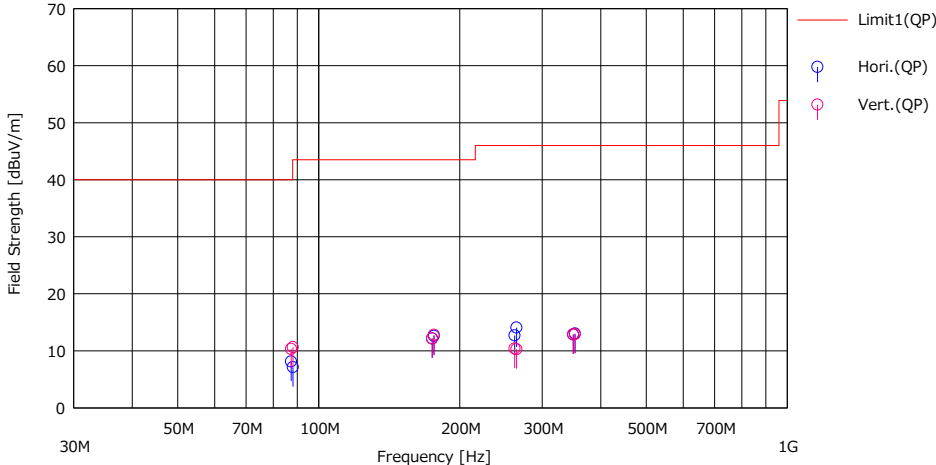


No.	Freq. [MHz]	Reading	Ant.Fac	Loss	Gain	Result	Limit	Margin	Pola. [H/V]	Height [cm]	Angle [deg]	Ant. Type	Comment
		(QP)				(QP)	(QP)	(dBuV/m)					
1	87.362	31.20	8.11	7.73	38.93	8.11	40.00	31.89	Hori.	222	254	BA	
2	88.138	30.10	8.23	7.73	38.93	7.13	43.50	36.37	Hori.	226	269	BA	
3	174.724	26.70	15.91	8.52	38.98	12.15	43.50	31.35	Hori.	100	359	BA	
4	176.276	27.00	16.04	8.53	38.97	12.60	43.50	30.90	Hori.	100	359	BA	
5	262.086	29.90	12.36	9.28	38.85	12.69	46.00	33.31	Hori.	100	359	LA22	
6	264.414	31.10	12.50	9.30	38.84	14.06	46.00	31.94	Hori.	100	359	LA22	
7	349.448	26.60	15.05	9.84	38.63	12.86	46.00	33.14	Hori.	100	359	LA22	
8	352.552	26.70	15.08	9.85	38.62	13.01	46.00	32.99	Hori.	100	359	LA22	
9	87.362	33.40	8.11	7.73	38.93	10.31	40.00	29.69	Vert.	125	274	BA	
10	88.138	33.60	8.23	7.73	38.93	10.63	43.50	32.87	Vert.	105	247	BA	
11	174.724	26.70	15.91	8.52	38.98	12.15	43.50	31.35	Vert.	100	359	BA	
12	176.276	27.20	16.04	8.53	38.97	12.80	43.50	30.70	Vert.	100	359	BA	
13	262.086	27.60	12.36	9.28	38.85	10.39	46.00	35.61	Vert.	100	359	LA22	
14	264.414	27.30	12.50	9.30	38.84	10.26	46.00	35.74	Vert.	100	359	LA22	
15	349.448	26.60	15.05	9.84	38.63	12.86	46.00	33.14	Vert.	100	359	LA22	
16	352.552	26.60	15.08	9.85	38.62	12.91	46.00	33.09	Vert.	100	359	LA22	

CHART: WITH FACTOR
ANT TYPE: - 30 MHz: LOOP, 30 MHz - 200 MHz: BICONICAL, 200 MHz - 1000 MHz: LOGPERIODIC, 1000 MHz -: HORN
CALCULATION: RESULT = READING + ANT FACTOR + LOSS(CABLE + ATT) - GAIN(AMP)
Except for the above table: adequate margin data below the limits.

Radiated Emission (Analog)

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.4
Date	September 9, 2024
Temperature / Humidity	23 deg. C / 57 % RH
Engineer	Nachi Konegawa
	(Below 1 GHz)
Mode	Mode 1 (97.9 MHz)

Limit : FCC_Part 15 Subpart B(15.109)_Class B

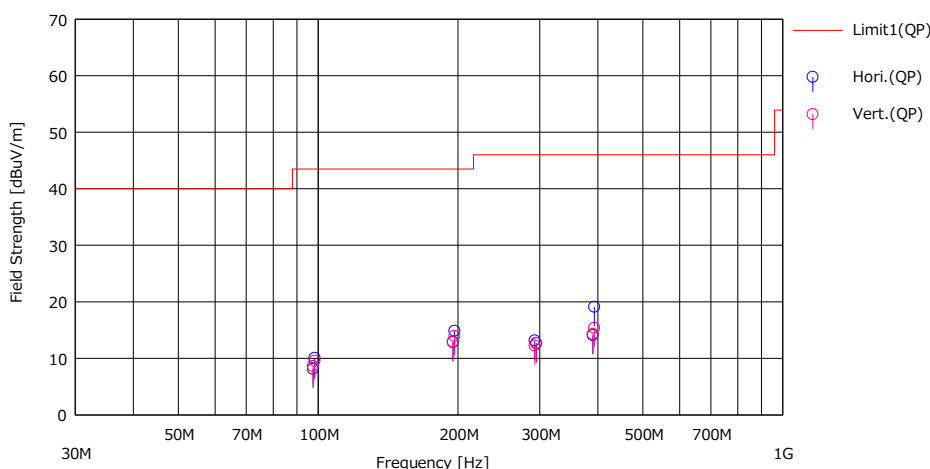

No.	Freq. [MHz]	Reading	Ant.Fac [dB/m]	Loss [dB]	Gain [dB]	Result	Limit	Margn	Pola. [H/V]	Height [cm]	Angle [deg]	Ant. Type	Comment
		[QP]				[dBuV/m]	[QP]	[dB]					
1	97.512	29.40	9.84	7.83	38.94	8.13	43.50	35.37	Hori.	302	89	BA	
2	98.288	31.20	9.97	7.83	38.94	10.06	43.50	33.44	Hori.	194	94	BA	
3	195.024	26.60	16.52	8.69	38.96	12.85	43.50	30.65	Hori.	100	359	BA	
4	196.576	28.60	16.51	8.70	38.96	14.85	43.50	28.65	Hori.	100	359	BA	
5	292.536	28.80	13.61	9.52	38.76	13.17	46.00	32.83	Hori.	100	359	LA22	
6	294.864	28.30	13.60	9.54	38.75	12.69	46.00	33.31	Hori.	100	359	LA22	
7	390.048	27.20	15.37	10.05	38.53	14.09	46.00	31.91	Hori.	100	359	LA22	
8	393.152	32.10	15.47	10.06	38.53	19.10	46.00	26.90	Hori.	100	359	LA22	
9	97.512	29.90	9.84	7.83	38.94	8.63	43.50	34.87	Vert.	100	316	BA	
10	98.288	30.70	9.97	7.83	38.94	9.56	43.50	33.94	Vert.	106	300	BA	
11	195.024	26.70	16.52	8.69	38.96	12.95	43.50	30.55	Vert.	100	359	BA	
12	196.576	27.70	16.51	8.70	38.96	13.95	43.50	29.55	Vert.	100	359	BA	
13	292.536	27.90	13.61	9.52	38.76	12.27	46.00	33.73	Vert.	100	359	LA22	
14	294.864	28.30	13.60	9.54	38.75	12.69	46.00	33.31	Vert.	100	359	LA22	
15	390.048	27.40	15.37	10.05	38.53	14.29	46.00	31.71	Vert.	100	359	LA22	
16	393.152	28.40	15.47	10.06	38.53	15.40	46.00	30.60	Vert.	100	359	LA22	

CHART: WITH FACTOR

ANT TYPE: - 30 MHz: LOOP, 30 MHz - 200 MHz: BICONICAL, 200 MHz - 1000 MHz: LOGPERIODIC, 1000 MHz -: HORN


CALCULATION: RESULT = READING + ANT FACTOR + LOSS(CABLE + ATT) - GAIN(AMP)

Except for the above table: adequate margin data below the limits.

Radiated Emission (Analog)

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.4
Date	September 9, 2024
Temperature / Humidity	23 deg. C / 57 % RH
Engineer	Nachi Konegawa
	(Below 1 GHz)
Mode	Mode 1 (107.9 MHz)

Limit : FCC_Part 15 Subpart B(15.109)_Class B

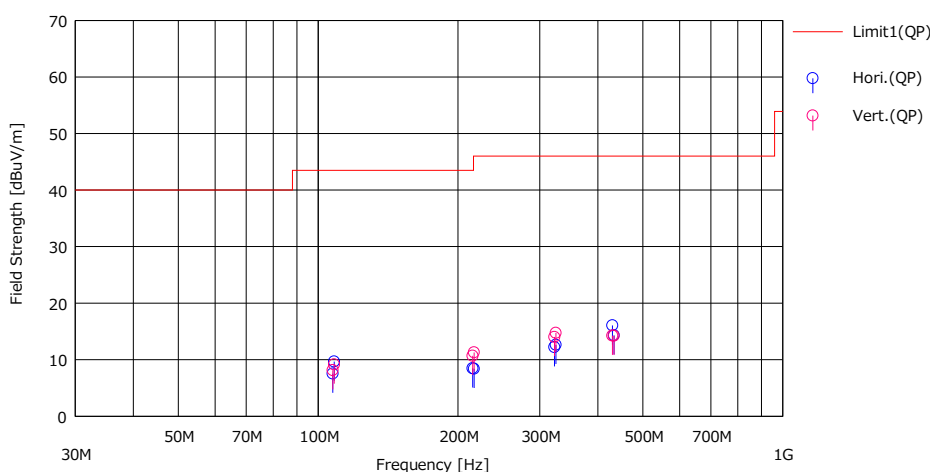

No.	Freq. [MHz]	Reading	Ant.Fac	Loss	Gain	Result	Limit	Margin	Pola	Height	Angle	Ant. Type	Comment
		(QP)				(QP)	(QP)	(QP)					
		[dBuV]	[dB/m]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	[H/V]	[cm]	[deg]		
1	107.512	27.20	11.36	7.92	38.95	7.53	43.50	35.97	Hori	100	359	BA	
2	108.288	29.20	11.47	7.93	38.95	9.65	43.50	33.85	Hori	144	89	BA	
3	215.024	27.30	11.24	8.88	38.94	8.48	43.50	35.02	Hori	100	359	LA22	
4	216.576	27.20	11.23	8.89	38.93	8.39	46.00	37.61	Hori	100	359	LA22	
5	322.536	27.00	14.20	9.70	38.69	12.21	46.00	33.79	Hori	100	359	LA22	
6	324.864	27.30	14.29	9.71	38.68	12.62	46.00	33.38	Hori	100	359	LA22	
7	430.048	28.10	16.14	10.29	38.48	16.05	46.00	29.95	Hori	100	359	LA22	
8	433.152	26.30	16.18	10.31	38.47	14.32	46.00	31.68	Hori	100	359	LA22	
9	107.512	27.80	11.36	7.92	38.95	8.13	43.50	35.37	Vert.	100	0	BA	
10	108.288	28.70	11.47	7.93	38.95	9.15	43.50	34.35	Vert.	100	4	BA	
11	215.024	29.50	11.24	8.88	38.94	10.68	43.50	32.82	Vert.	100	359	LA22	
12	216.576	30.10	11.23	8.89	38.93	11.29	46.00	34.71	Vert.	100	359	LA22	
13	322.536	28.80	14.20	9.70	38.69	14.01	46.00	31.99	Vert.	100	359	LA22	
14	324.864	29.40	14.29	9.71	38.68	14.72	46.00	31.28	Vert.	100	359	LA22	
15	430.048	26.30	16.14	10.29	38.48	14.25	46.00	31.75	Vert.	100	359	LA22	
16	433.152	26.20	16.18	10.31	38.47	14.22	46.00	31.78	Vert.	100	359	LA22	

CHART: WITH FACTOR


ANT TYPE: - 30 MHz: LOOP, 30 MHz - 200 MHz: BICONICAL, 200 MHz - 1000 MHz: LOGPERIODIC, 1000 MHz -: HORN
CALCULATION: RESULT = READING + ANT FACTOR + LOSS(CABLE + ATT) - GAIN(AMP)

Except for the above table: adequate margin data below the limits.

Radiated Emission (Analog)

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.4
Date	September 9, 2024
Temperature / Humidity	23 deg. C / 57 % RH
Engineer	Nachi Konegawa
	(Below 1 GHz)
Mode	Mode 2

Limit : FCC_Part 15 Subpart B(15.109)_Class B

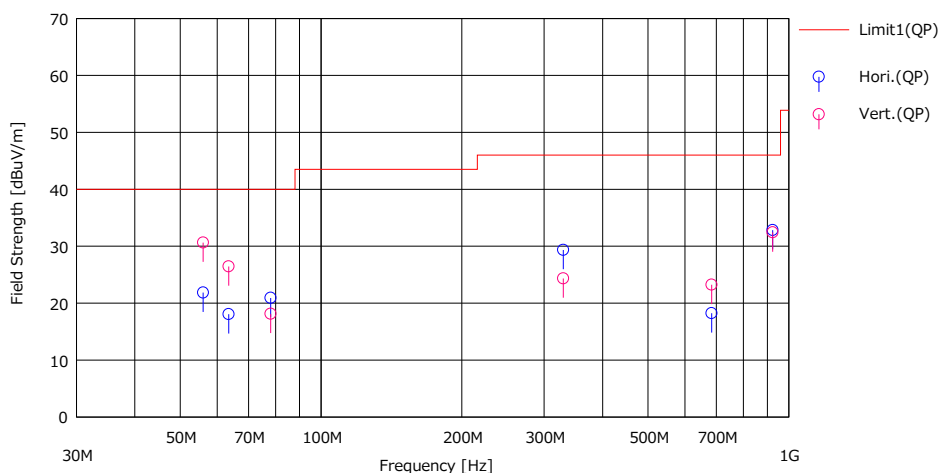

No.	Freq. [MHz]	Reading	Ant.Fac.	Loss	Gain	Result	Limit	Margin	Pola.	Height	Angle	Ant. Type	Comment
		[dBuV]				[dBuV/m]	[dB]	[dB]					
1	56.012	44.30	9.06	7.38	38.90	21.84	40.00	18.16	Hori.	375	100	BA	
2	63.490	42.40	7.09	7.47	38.91	18.05	40.00	21.95	Hori.	308	296	BA	
3	78.077	45.50	6.71	7.64	38.93	20.92	40.00	19.08	Hori.	241	271	BA	
4	329.599	43.80	14.48	9.73	38.67	29.34	46.00	16.66	Hori.	100	255	LA22	
5	683.997	25.30	19.60	11.58	38.25	18.23	46.00	27.77	Hori.	100	359	LA22	
6	923.991	36.10	22.26	12.40	37.93	32.83	46.00	13.17	Hori.	100	52	LA22	
7	56.012	53.10	9.06	7.38	38.90	30.64	40.00	9.36	Vert.	100	106	BA	
8	63.490	50.80	7.09	7.47	38.91	26.45	40.00	13.55	Vert.	100	299	BA	
9	78.077	42.70	6.71	7.64	38.93	18.12	40.00	21.88	Vert.	136	336	BA	
10	329.599	38.80	14.48	9.73	38.67	24.34	46.00	21.66	Vert.	183	324	LA22	
11	683.997	30.30	19.60	11.58	38.25	23.23	46.00	22.77	Vert.	100	8	LA22	
12	923.991	35.70	22.26	12.40	37.93	32.43	46.00	13.57	Vert.	135	342	LA22	

CHART: WITH FACTOR

ANT TYPE: - 30 MHz: LOOP, 30 MHz - 200 MHz: BICONICAL, 200 MHz - 1000 MHz: LOGPERIODIC, 1000 MHz -: HORN


CALCULATION: RESULT = READING + ANT FACTOR + LOSS(CABLE + ATT) - GAIN(AMP)

Except for the above table: adequate margin data below the limits.

Radiated Emission (Digital)

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.4
Date	September 9, 2024
Temperature / Humidity	23 deg. C / 57 % RH
Engineer	Nachi Konegawa
	(Below 1 GHz)
Mode	Mode 1 (87.75 MHz)

Limit : FCC_Part 15 Subpart B(15.109)_Class B

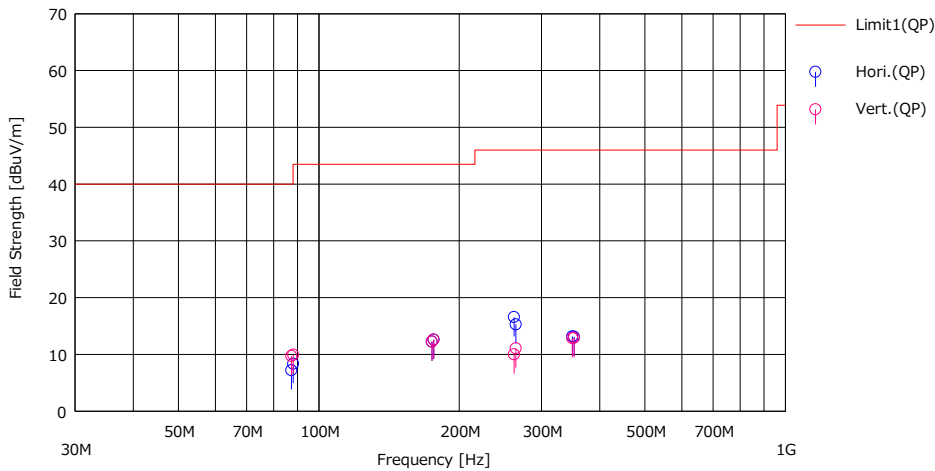


No.	Freq. [MHz]	Reading	AntFac [dB/m]	Loss [dB]	Gain [dB]	Result	Limit	Margin	Pola. [H/V]	Height [cm]	Angle [deg]	Ant. Type	Comment
		[dBuV]				[QP]	[QP]	[QP]					
1	87.362	30.30	8.11	7.73	38.93	7.21	40.00	32.79	Hori.	239	318	BA	
2	88.138	31.30	8.23	7.73	38.93	8.33	43.50	35.17	Hori.	210	317	BA	
3	174.724	26.80	15.91	8.52	38.98	12.25	43.50	31.25	Hori.	100	359	BA	
4	176.276	27.00	16.04	8.53	38.97	12.60	43.50	30.90	Hori.	100	359	BA	
5	262.086	33.80	12.36	9.28	38.85	16.59	46.00	29.41	Hori.	100	359	LA22	
6	264.414	32.30	12.50	9.30	38.84	15.26	46.00	30.74	Hori.	100	359	LA22	
7	349.448	26.90	15.05	9.84	38.63	13.16	46.00	32.84	Hori.	100	359	LA22	
8	352.552	26.80	15.08	9.85	38.62	13.11	46.00	32.89	Hori.	100	359	LA22	
9	87.362	32.80	8.11	7.73	38.93	9.71	40.00	30.29	Vert.	138	261	BA	
10	88.138	32.90	8.23	7.73	38.93	9.93	43.50	33.57	Vert.	139	243	BA	
11	174.724	26.80	15.91	8.52	38.98	12.25	43.50	31.25	Vert.	100	359	BA	
12	176.276	27.00	16.04	8.53	38.97	12.60	43.50	30.90	Vert.	100	359	BA	
13	262.086	27.20	12.36	9.28	38.85	9.99	46.00	36.01	Vert.	100	359	LA22	
14	264.414	28.10	12.50	9.30	38.84	11.06	46.00	34.94	Vert.	100	359	LA22	
15	349.448	26.60	15.05	9.84	38.63	12.86	46.00	33.14	Vert.	100	359	LA22	
16	352.552	26.60	15.08	9.85	38.62	12.91	46.00	33.09	Vert.	100	359	LA22	

CHART: WITH FACTOR
 ANT TYPE: - 30 MHz: LOOP, 30 MHz - 200 MHz: BICONICAL, 200 MHz - 1000 MHz: LOGPERIODIC, 1000 MHz -: HORN
 CALCULATION: RESULT = READING + ANT FACTOR + LOSS(CABLE + ATT) - GAIN(AMP)
 Except for the above table: adequate margin data below the limits.

Radiated Emission (Digital)

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.4
Date	September 9, 2024
Temperature / Humidity	23 deg. C / 57 % RH
Engineer	Nachi Konegawa
	(Below 1 GHz)
Mode	Mode 1 (97.9 MHz)

Limit : FCC_Part 15 Subpart B(15.109)_Class B

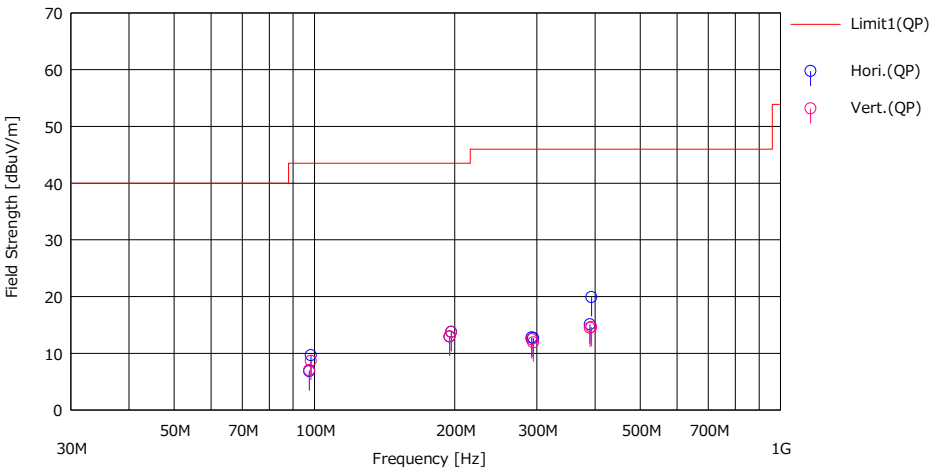


No.	Freq. [MHz]	Reading	Ant Fac [dB/m]	Loss [dB]	Gain [dB]	Result	Limit	Margin	Pola [H/V]	Height [cm]	Angle [deg]	Ant. Type	Comment
		[dBuV]				[dBuV/m]	[dBuV/m]	[dB]					
1	97.512	28.10	9.84	7.83	38.94	6.83	43.50	36.67	Hori.	317	62	BA	
2	98.288	30.80	9.97	7.83	38.94	9.66	43.50	33.84	Hori.	195	73	BA	
3	195.024	26.70	16.52	8.69	38.96	12.95	43.50	30.55	Hori.	100	359	BA	
4	196.576	27.50	16.51	8.70	38.96	13.75	43.50	29.75	Hori.	100	359	BA	
5	292.536	28.40	13.61	9.52	38.76	12.77	46.00	33.23	Hori.	100	359	LA22	
6	294.864	28.30	13.60	9.54	38.75	12.69	46.00	33.31	Hori.	100	359	LA22	
7	390.048	28.20	15.37	10.05	38.53	15.09	46.00	30.91	Hori.	100	359	LA22	
8	393.152	32.90	15.47	10.06	38.53	19.90	46.00	26.10	Hori.	100	359	LA22	
9	97.512	28.30	9.84	7.83	38.94	7.03	43.50	36.47	Vert.	157	255	BA	
10	98.288	29.80	9.97	7.83	38.94	8.66	43.50	34.84	Vert.	128	268	BA	
11	195.024	26.70	16.52	8.69	38.96	12.95	43.50	30.55	Vert.	100	359	BA	
12	196.576	27.50	16.51	8.70	38.96	13.75	43.50	29.75	Vert.	100	359	BA	
13	292.536	28.10	13.61	9.52	38.76	12.47	46.00	33.53	Vert.	100	359	LA22	
14	294.864	27.50	13.60	9.54	38.75	11.89	46.00	34.11	Vert.	100	359	LA22	
15	390.048	27.60	15.37	10.05	38.53	14.49	46.00	31.51	Vert.	100	359	LA22	
16	393.152	27.60	15.47	10.06	38.53	14.60	46.00	31.40	Vert.	100	359	LA22	

CHART: WITH FACTOR
 ANT TYPE: - 30 MHz: LOOP, 30 MHz - 200 MHz: BICONICAL, 200 MHz - 1000 MHz: LOGPERIODIC, 1000 MHz -: HORN
 CALCULATION: RESULT = READING + ANT FACTOR + LOSS(CABLE + ATT) - GAIN(AMP)
 Except for the above table: adequate margin data below the limits.

Radiated Emission (Digital)

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.4
Date	September 9, 2024
Temperature / Humidity	23 deg. C / 57 % RH
Engineer	Nachi Konegawa
	(Below 1 GHz)
Mode	Mode 1 (107.9 MHz)

Limit : FCC_Part 15 Subpart B(15.109)_Class B

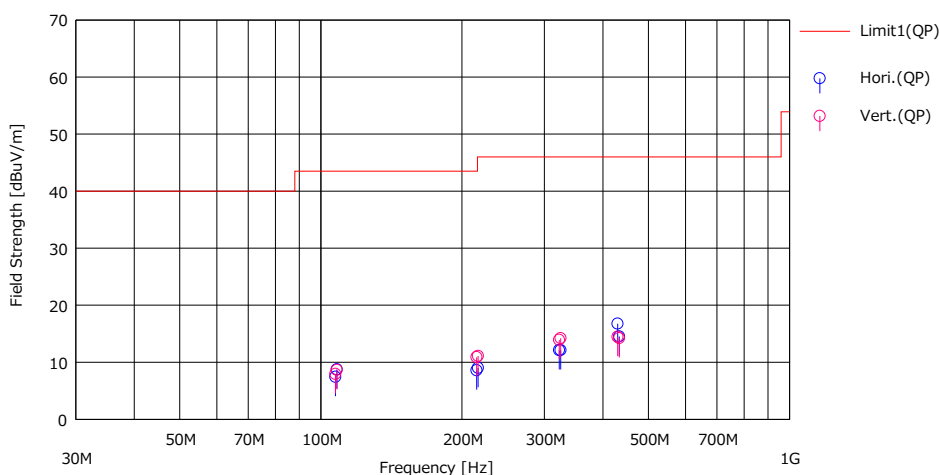

No.	Freq. [MHz]	Reading	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Result	Limit	Margn	Pda. [H/V]	Height [cm]	Angle [deg]	Ant. Type	Comment
		[dBuV]				[QP]	[QP]	[QP]					
1	107.512	27.10	11.36	7.92	38.95	7.43	43.50	36.07	Hori.	218	129	BA	
2	108.288	28.30	11.47	7.93	38.95	8.75	43.50	34.75	Hori.	197	82	BA	
3	215.024	27.40	11.24	8.88	38.94	8.58	43.50	34.92	Hori.	100	359	LA22	
4	216.576	27.80	11.23	8.89	38.93	8.99	46.00	37.01	Hori.	100	359	LA22	
5	322.536	26.90	14.20	9.70	38.69	12.11	46.00	33.89	Hori.	100	359	LA22	
6	324.864	26.80	14.29	9.71	38.68	12.12	46.00	33.88	Hori.	100	359	LA22	
7	430.048	28.80	16.14	10.29	38.48	16.75	46.00	29.25	Hori.	100	359	LA22	
8	433.152	26.50	16.18	10.31	38.47	14.52	46.00	31.48	Hori.	100	359	LA22	
9	107.512	27.60	11.36	7.92	38.95	7.93	43.50	35.57	Vert.	100	359	BA	
10	108.288	28.20	11.47	7.93	38.95	8.65	43.50	34.85	Vert.	100	1	BA	
11	215.024	29.70	11.24	8.88	38.94	10.88	43.50	32.62	Vert.	100	359	LA22	
12	216.576	29.90	11.23	8.89	38.93	11.09	46.00	34.91	Vert.	100	359	LA22	
13	322.536	28.70	14.20	9.70	38.69	13.91	46.00	32.09	Vert.	100	359	LA22	
14	324.864	28.90	14.29	9.71	38.68	14.22	46.00	31.78	Vert.	100	359	LA22	
15	430.048	26.50	16.14	10.29	38.48	14.45	46.00	31.55	Vert.	100	359	LA22	
16	433.152	26.20	16.18	10.31	38.47	14.22	46.00	31.78	Vert.	100	359	LA22	

CHART: WITH FACTOR

ANT TYPE: - 30 MHz: LOOP, 30 MHz - 200 MHz: BICONICAL, 200 MHz - 1000 MHz: LOGPERIODIC, 1000 MHz -: HORN


CALCULATION: RESULT = READING + ANT FACTOR + LOSS(CABLE + ATT) - GAIN(AMP)

Except for the above table: adequate margin data below the limits.

Radiated Emission (Digital)

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.4
Date	September 9, 2024
Temperature / Humidity	23 deg. C / 57 % RH
Engineer	Nachi Konegawa
	(Below 1 GHz)
Mode	Mode 2

Limit : FCC_Part 15 Subpart B(15.109)_Class B

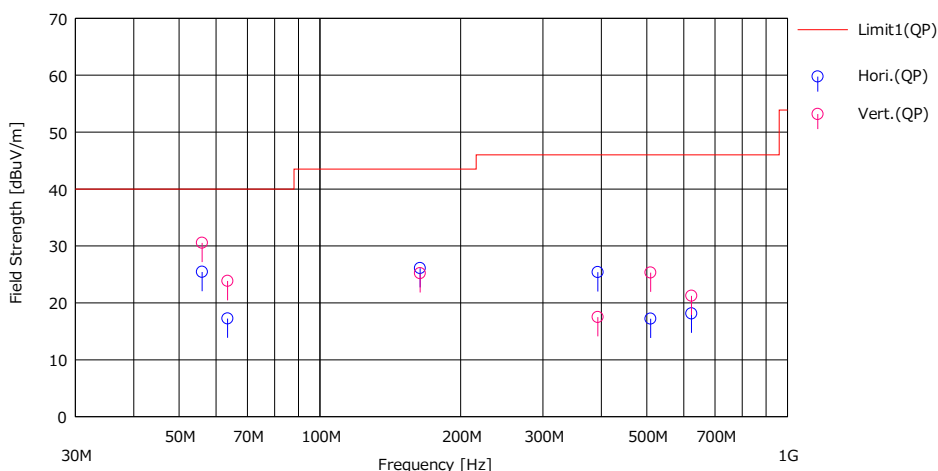

No.	Freq. [MHz]	Reading	Ant.Fac [dB/m]	Loss [dB]	Gain [dB]	Result	Limit	Margn	Pola. [H/V]	Height [cm]	Angle [deg]	Ant. Type	Comment
		[dBuV]				[QP]	[QP]	[QP]					
1	56.009	47.90	9.06	7.38	38.90	25.44	40.00	14.56	Hori.	365	10	BA	
2	63.491	41.60	7.09	7.47	38.91	17.25	40.00	22.75	Hori.	366	324	BA	
3	163.793	41.10	15.55	8.43	38.98	26.10	43.50	17.40	Hori.	126	271	BA	
4	392.812	38.40	15.46	10.06	38.53	25.39	46.00	20.61	Hori.	101	254	LA22	
5	509.600	27.10	17.73	10.76	38.38	17.21	46.00	28.79	Hori.	107	238	LA22	
6	623.199	25.50	19.51	11.36	38.24	18.13	46.00	27.87	Hori.	100	10	LA22	
7	56.009	53.00	9.06	7.38	38.90	30.54	40.00	9.46	Vert.	100	61	BA	
8	63.491	48.20	7.09	7.47	38.91	23.85	40.00	16.15	Vert.	100	329	BA	
9	163.793	40.20	15.55	8.43	38.98	25.20	43.50	18.30	Vert.	100	266	BA	
10	392.812	30.50	15.46	10.06	38.53	17.49	46.00	28.51	Vert.	139	288	LA22	
11	509.600	35.20	17.73	10.76	38.38	25.31	46.00	20.69	Vert.	100	359	LA22	
12	623.199	28.60	19.51	11.36	38.24	21.23	46.00	24.77	Vert.	100	4	LA22	

CHART: WITH FACTOR

ANT TYPE: - 30 MHz: LOOP, 30 MHz - 200 MHz: BICONICAL, 200 MHz - 1000 MHz: LOGPERIODIC, 1000 MHz -: HORN


CALCULATION: RESULT = READING + ANT FACTOR + LOSS(CABLE + ATT) - GAIN(AMP)

Except for the above table: adequate margin data below the limits.

Radiated Emission (Analog)

Test place	Ise EMC Lab.	No.4	No.4
Semi Anechoic Chamber	No.4	September 10, 2024	September 10, 2024
Date	September 10, 2024	23 deg. C / 57 % RH	23 deg. C / 73 % RH
Temperature / Humidity	23 deg. C / 57 % RH	Nachi Konegawa	Yuichiro Yamazaki
Engineer	(1 GHz to 6 GHz)	(6 GHz to 26.5 GHz)	(Above 26.5 GHz)
Mode	Mode 1 (87.75 MHz)		

Limit : FCC_Part 15 Subpart B(15.109)_Class B

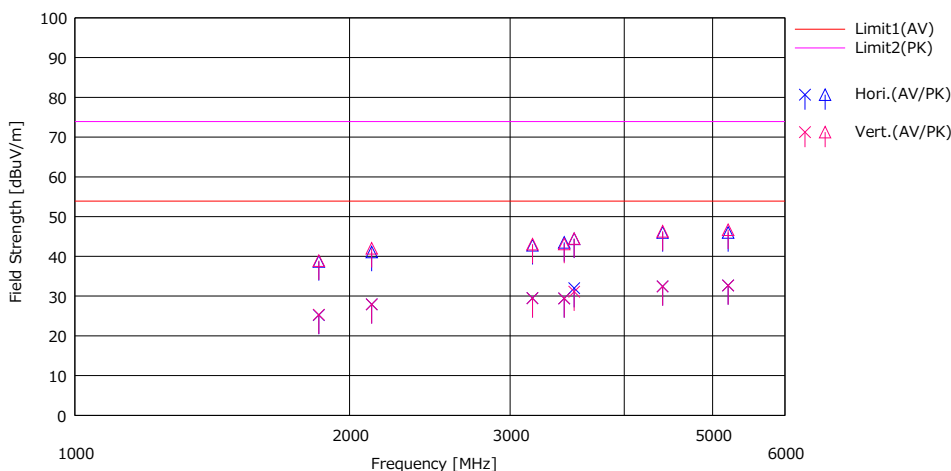

No.	Freq. [MHz]	Reading		Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Result		Limit		Margin		Pola. [H/V]	Height [cm]	Angle [deg]	Ant. Type	Comment
		(AV) [dBuV]	(PK) [dBuV]				(AV) [dBuV/m]	(PK) [dBuV/m]	(AV) [dBuV/m]	(PK) [dBuV/m]	(AV) [dB]	(PK) [dB]					
1	1850.898	29.20	42.70	25.27	3.13	32.40	25.20	38.70	53.90	73.90	28.70	35.20	Hori.	100	0	H20	
2	2115.312	29.10	42.30	27.45	3.31	31.95	27.91	41.11	53.90	73.90	25.99	32.79	Hori.	100	0	H20	
3	3172.968	28.30	41.60	28.66	3.89	31.38	29.47	42.77	53.90	73.90	24.43	31.13	Hori.	100	0	H20	
4	3437.382	28.20	42.30	28.46	4.02	31.27	29.41	43.51	53.90	73.90	24.49	30.39	Hori.	100	0	H20	
5	3525.520	30.30	42.70	28.85	4.07	31.23	31.99	44.39	53.90	73.90	21.91	29.51	Hori.	100	115	H20	
6	4406.900	28.30	41.90	30.57	4.48	30.94	32.41	46.01	53.90	73.90	21.49	27.89	Hori.	100	0	H20	
7	5200.142	27.10	40.40	31.63	4.82	30.86	32.69	45.99	53.90	73.90	21.21	27.91	Hori.	100	0	H20	
8	1850.898	29.30	42.90	25.27	3.13	32.40	25.30	38.90	53.90	73.90	28.60	35.00	Vert.	100	0	H20	
9	2115.312	29.10	43.20	27.45	3.31	31.95	27.91	42.01	53.90	73.90	25.99	31.89	Vert.	100	0	H20	
10	3172.968	28.30	41.90	28.66	3.89	31.38	29.47	43.07	53.90	73.90	24.43	30.83	Vert.	100	0	H20	
11	3437.382	28.20	41.90	28.46	4.02	31.27	29.41	43.11	53.90	73.90	24.49	30.79	Vert.	100	0	H20	
12	3525.520	29.40	42.80	28.85	4.07	31.23	31.09	44.49	53.90	73.90	22.81	29.41	Vert.	100	310	H20	
13	4406.900	28.30	42.20	30.57	4.48	30.94	32.41	46.31	53.90	73.90	21.49	27.59	Vert.	100	0	H20	
14	5200.142	27.10	41.10	31.63	4.82	30.86	32.69	46.69	53.90	73.90	21.21	27.21	Vert.	100	0	H20	

CHART: WITH FACTOR

ANT TYPE: - 30 MHz: LOOP, 30 MHz - 200 MHz: BICONICAL, 200 MHz - 1000 MHz: LOGPERIODIC, 1000 MHz -: HORN

CALCULATION: RESULT = READING + ANT FACTOR + LOSS(CABLE + ATT) - GAIN(AMP)


Except for the above table: adequate margin data below the limits.

* No signal was detected above 6 GHz.

Radiated Emission (Analog)

Test place Semi Anechoic Chamber	Ise EMC Lab. No.4	No.4
Date Temperature / Humidity Engineer	September 10, 2024 23 deg. C / 57 % RH Nachi Konegawa (1 GHz to 6 GHz)	September 10, 2024 23 deg. C / 73 % RH Yuichiro Yamazaki (6 GHz to 26.5 GHz)
Mode	Mode 1 (97.9 MHz)	No.4 September 11, 2024 21 deg. C / 60 % RH Junya Okuno (Above 26.5 GHz)

Limit : FCC_Part 15 Subpart B(15.109)_Class B

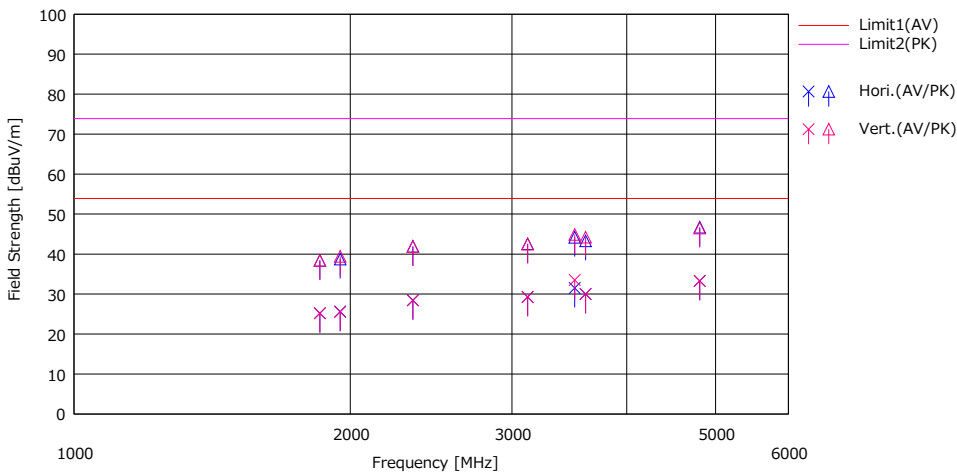

No.	Freq. [MHz]	Reading		Ant.Fac [dB/m]	Loss [dB]	Gain [dB]	Result		Limit		Margin		Pola. [H/V]	Height [cm]	Angle [deg]	Ant. Type	Comment
		(AV) [dBuV]	(PK) [dBuV]				(AV) [dBuV/m]	(PK) [dBuV/m]	(AV) [dBuV/m]	(PK) [dBuV/m]	(AV) [dB]	(PK) [dB]					
1	1852.728	29.20	42.40	25.28	3.13	32.40	25.21	38.41	53.90	73.90	28.69	35.49	Hori.	100	0	H20	
2	1950.240	28.80	41.90	25.76	3.20	32.14	25.62	38.72	53.90	73.90	28.28	35.18	Hori.	100	0	H20	
3	2340.288	29.10	42.60	27.73	3.44	31.82	28.45	41.95	53.90	73.90	25.45	31.95	Hori.	100	0	H20	
4	3120.384	28.10	41.40	28.72	3.86	31.40	29.28	42.58	53.90	73.90	24.62	31.32	Hori.	100	0	H20	
5	3510.432	29.90	42.60	28.78	4.06	31.24	31.50	44.20	53.90	73.90	22.40	29.70	Hori.	100	116	H20	
6	3607.944	28.00	41.30	29.09	4.11	31.19	30.01	43.31	53.90	73.90	23.89	30.59	Hori.	100	0	H20	
7	4802.968	28.10	41.50	31.40	4.65	30.85	33.30	46.70	53.90	73.90	20.60	27.20	Hori.	100	0	H20	
8	1852.728	29.20	42.40	25.28	3.13	32.40	25.21	38.41	53.90	73.90	28.69	35.49	Vert.	100	0	H20	
9	1950.240	28.70	42.60	25.76	3.20	32.14	25.52	39.42	53.90	73.90	28.38	34.48	Vert.	100	0	H20	
10	2340.288	29.10	42.50	27.73	3.44	31.82	28.45	41.85	53.90	73.90	25.45	32.05	Vert.	100	0	H20	
11	3120.384	28.10	41.30	28.72	3.86	31.40	29.28	42.48	53.90	73.90	24.62	31.42	Vert.	100	0	H20	
12	3510.432	31.90	43.30	28.78	4.06	31.24	33.50	44.90	53.90	73.90	20.40	29.00	Vert.	183	200	H20	
13	3607.944	28.00	42.20	29.09	4.11	31.19	30.01	44.21	53.90	73.90	23.89	29.69	Vert.	100	0	H20	
14	4802.968	28.10	41.30	31.40	4.65	30.85	33.30	46.50	53.90	73.90	20.60	27.40	Vert.	100	0	H20	


CHART: WITH FACTOR
 ANT TYPE: - 30 MHz: LOOP, 30 MHz - 200 MHz: BICONICAL, 200 MHz - 1000 MHz: LOGPERIODIC, 1000 MHz -: HORN
 CALCULATION: RESULT = READING + ANT FACTOR + LOSS(CABLE + ATT) - GAIN(AMP)
 Except for the above table: adequate margin data below the limits.

* No signal was detected above 6 GHz.

Radiated Emission (Analog)

Test place	Ise EMC Lab.	No.4	No.4
Semi Anechoic Chamber	No.4	September 10, 2024	September 10, 2024
Date	September 10, 2024	23 deg. C / 57 % RH	23 deg. C / 73 % RH
Temperature / Humidity	23 deg. C / 57 % RH	Nachi Konegawa	Yuichiro Yamazaki
Engineer	(1 GHz to 6 GHz)	(6 GHz to 26.5 GHz)	(Above 26.5 GHz)
Mode	Mode 1 (107.9 MHz)		

Limit : FCC_Part 15 Subpart B(15.109)_Class B

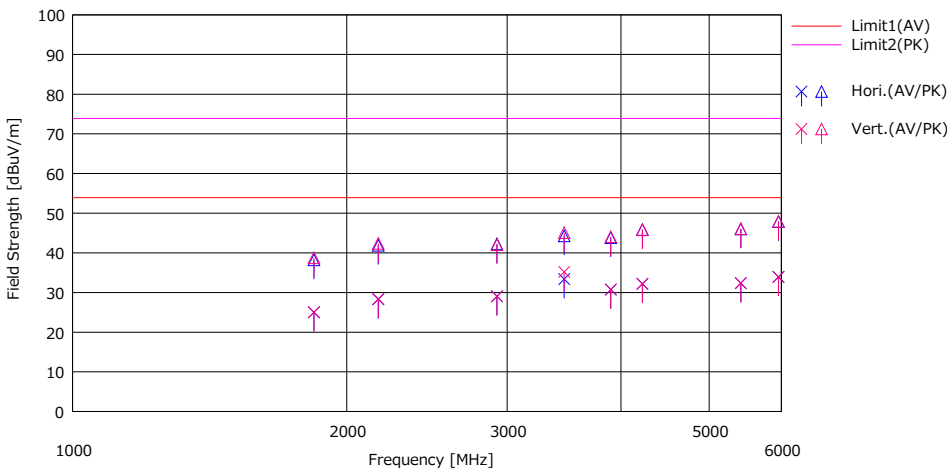

No.	Freq. [MHz]	Reading			Ant.Fac [dB/m]	Loss [dB]	Gain [dB]	Result		Limit		Margin		Pda. [H/V]	Height [cm]	Angle [deg]	Ant. Type	Comment
		(AV) [dBuV]	(PK) [dBuV]					(AV) [dBuV/m]	(PK) [dBuV/m]	(AV) [dB]	(PK) [dB]							
1	1840.896	29.10	42.30	25.23	3.13	32.43	25.03	38.23	53.90	73.90	28.87	35.67	Hori.	100	0	H20		
2	2165.760	28.90	42.50	27.97	3.34	31.92	28.29	41.89	53.90	73.90	25.61	32.01	Hori.	100	0	H20		
3	2923.776	28.20	41.40	28.58	3.76	31.49	29.05	42.25	53.90	73.90	24.85	31.65	Hori.	100	0	H20		
4	3465.216	32.00	42.90	28.58	4.04	31.25	33.37	44.27	53.90	73.90	20.53	29.63	Hori.	100	118	H20		
5	3898.368	27.90	41.00	29.65	4.26	31.07	30.74	43.84	53.90	73.90	23.16	30.06	Hori.	100	0	H20		
6	4223.232	28.50	42.20	30.28	4.40	30.98	32.20	45.90	53.90	73.90	21.70	28.00	Hori.	100	0	H20		
7	5414.400	26.70	40.30	31.68	4.92	30.92	32.38	45.98	53.90	73.90	21.52	27.92	Hori.	100	0	H20		
8	5955.840	27.60	41.50	32.30	5.13	31.09	33.94	47.84	53.90	73.90	19.96	26.06	Hori.	100	0	H20		
9	1840.896	29.10	42.80	25.23	3.13	32.43	25.03	38.73	53.90	73.90	28.87	35.17	Vert.	100	0	H20		
10	2165.760	29.00	43.00	27.97	3.34	31.92	28.39	42.39	53.90	73.90	25.51	31.51	Vert.	100	0	H20		
11	2923.776	28.20	41.20	28.58	3.76	31.49	29.05	42.05	53.90	73.90	24.85	31.85	Vert.	100	0	H20		
12	3465.216	33.80	43.70	28.58	4.04	31.25	35.17	45.07	53.90	73.90	18.73	28.83	Vert.	100	209	H20		
13	3898.368	27.90	41.20	29.65	4.26	31.07	30.74	44.04	53.90	73.90	23.16	29.86	Vert.	100	0	H20		
14	4223.232	28.50	42.10	30.28	4.40	30.98	32.20	45.80	53.90	73.90	21.70	28.10	Vert.	100	0	H20		
15	5414.400	26.70	40.40	31.68	4.92	30.92	32.38	46.08	53.90	73.90	21.52	27.82	Vert.	100	0	H20		
16	5955.840	27.60	41.60	32.30	5.13	31.09	33.94	47.94	53.90	73.90	19.96	25.96	Vert.	100	0	H20		

CHART: WITH FACTOR

ANT TYPE: - 30 MHz: LOOP, 30 MHz - 200 MHz: BICONICAL, 200 MHz - 1000 MHz: LOGPERIODIC, 1000 MHz -: HORN

CALCULATION: RESULT = READING + ANT FACTOR + LOSS(CABLE + ATT) - GAIN(AMP)


Except for the above table: adequate margin data below the limits.

* No signal was detected above 6 GHz.

Radiated Emission (Analog)

Test place Semi Anechoic Chamber	Ise EMC Lab. No.4	No.4
Date Temperature / Humidity Engineer	September 10, 2024 23 deg. C / 57 % RH Nachi Konegawa (1 GHz to 6 GHz)	September 10, 2024 23 deg. C / 73 % RH Yuichiro Yamazaki (6 GHz to 26.5 GHz)
Mode	Mode 2	No.4 September 11, 2024 21 deg. C / 60 % RH Junya Okuno (Above 26.5 GHz)

Limit : FCC_Part 15 Subpart B(15.109)_Class B

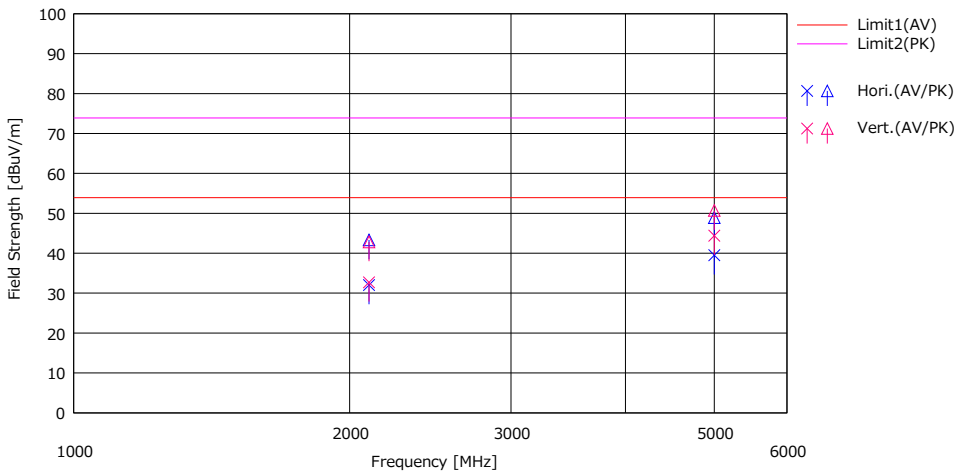

No.	Freq. [MHz]	Reading		Ant.Fac [dB/m]	Loss [dB]	Gain [dB]	Result		Limit		Margin		Pola. [H/V]	Height [cm]	Angle [deg]	Ant. Type	Comment
		(AV) [dBuV]	(PK) [dBuV]				(AV) [dBuV/m]	(PK) [dBuV/m]	(AV) [dBuV/m]	(PK) [dBuV/m]	(AV) [dB]	(PK) [dB]					
1	2099.984	33.40	44.70	27.27	3.30	31.95	32.02	43.32	53.90	73.90	21.88	30.58	Hori.	100	242	H20	
2	4999.987	33.90	43.30	31.67	4.73	30.80	39.50	48.90	53.90	73.90	14.40	25.00	Hori.	100	118	H20	
3	2099.984	34.10	44.20	27.27	3.30	31.95	32.72	42.82	53.90	73.90	21.18	31.08	Vert.	100	154	H20	
4	4999.987	38.80	45.10	31.67	4.73	30.80	44.40	50.70	53.90	73.90	9.50	23.20	Vert.	100	188	H20	


CHART: WITH FACTOR
 ANT TYPE: - 30 MHz: LOOP, 30 MHz - 200 MHz: BICONICAL, 200 MHz - 1000 MHz: LOGPERIODIC, 1000 MHz -: HORN
 CALCULATION: RESULT = READING + ANT FACTOR + LOSS(CABLE + ATT) - GAIN(AMP)
 Except for the above table: adequate margin data below the limits.

* No signal was detected above 6 GHz.

Radiated Emission (Digital)

Test place	Ise EMC Lab.	No.4	No.4
Semi Anechoic Chamber	No.4	September 10, 2024	September 10, 2024
Date	September 10, 2024	23 deg. C / 57 % RH	23 deg. C / 73 % RH
Temperature / Humidity	23 deg. C / 57 % RH	Nachi Konegawa	Yuichiro Yamazaki
Engineer	(1 GHz to 6 GHz)	(6 GHz to 26.5 GHz)	(Above 26.5 GHz)
Mode	Mode 1 (87.75 MHz)		

Limit : FCC_Part 15 Subpart B(15.109)_Class B

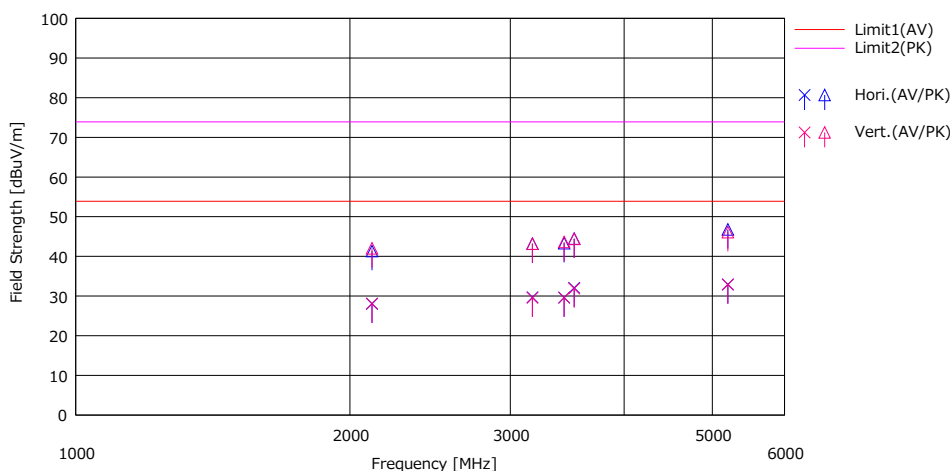

No.	Freq. [MHz]	Reading		Ant/Fac [dB/m]	Loss [dB]	Gain [dB]	Result		Limit		Margin		Pda. [H/V]	Height [cm]	Angle [deg]	Ant. Type	Comment
		(AV) [dBuV]	(PK) [dBuV]				(AV) [dBuV/m]	(PK) [dBuV/m]	(AV) [dBuV/m]	(PK) [dBuV/m]	(AV) [dB]	(PK) [dB]					
1	2115.312	29.20	42.50	27.45	3.31	31.95	28.01	41.31	53.90	73.90	25.89	32.59	Hori.	100	0	H20	
2	3172.968	28.50	42.00	28.66	3.89	31.38	29.67	43.17	53.90	73.90	24.23	30.73	Hori.	100	0	H20	
3	3437.382	28.40	42.10	28.46	4.02	31.27	29.61	43.31	53.90	73.90	24.29	30.59	Hori.	100	0	H20	
4	3525.520	30.40	42.80	28.85	4.07	31.23	32.09	44.49	53.90	73.90	21.81	29.41	Hori.	100	119	H20	
5	5200.142	27.30	41.20	31.63	4.82	30.86	32.89	46.79	53.90	73.90	21.01	27.11	Hori.	100	0	H20	
6	2115.312	29.30	43.20	27.45	3.31	31.95	28.11	42.01	53.90	73.90	25.79	31.89	Vert.	100	0	H20	
7	3172.968	28.40	42.00	28.66	3.89	31.38	29.57	43.17	53.90	73.90	24.33	30.73	Vert.	100	0	H20	
8	3437.382	28.40	42.40	28.46	4.02	31.27	29.61	43.61	53.90	73.90	24.29	30.29	Vert.	100	0	H20	
9	3525.520	30.20	42.70	28.85	4.07	31.23	31.89	44.39	53.90	73.90	22.01	29.51	Vert.	100	171	H20	
10	5200.142	27.30	40.50	31.63	4.82	30.86	32.89	46.09	53.90	73.90	21.01	27.81	Vert.	100	0	H20	

CHART: WITH FACTOR

ANT TYPE: - 30 MHz: LOOP, 30 MHz - 200 MHz: BICONICAL, 200 MHz - 1000 MHz: LOGPERIODIC, 1000 MHz -: HORN
CALCULATION: RESULT = READING + ANT FACTOR + LOSS(CABLE + ATT) - GAIN(AMP)

Except for the above table: adequate margin data below the limits.

* No signal was detected above 6 GHz.

Radiated Emission (Digital)


Test place
Semi Anechoic Chamber
Date
Temperature / Humidity
Engineer
Mode

Ise EMC Lab.
No.4
September 10, 2024
23 deg. C / 57 % RH
Nachi Konegawa
(1 GHz to 6 GHz)
Mode 1 (97.9 MHz)

No.4
September 10, 2024
23 deg. C / 73 % RH
Yuichiro Yamazaki
(6 GHz to 26.5 GHz)

No.4
September 11, 2024
21 deg. C / 60 % RH
Junya Okuno
(Above 26.5 GHz)

Limit : FCC_Part 15 Subpart B(15.109)_Class B

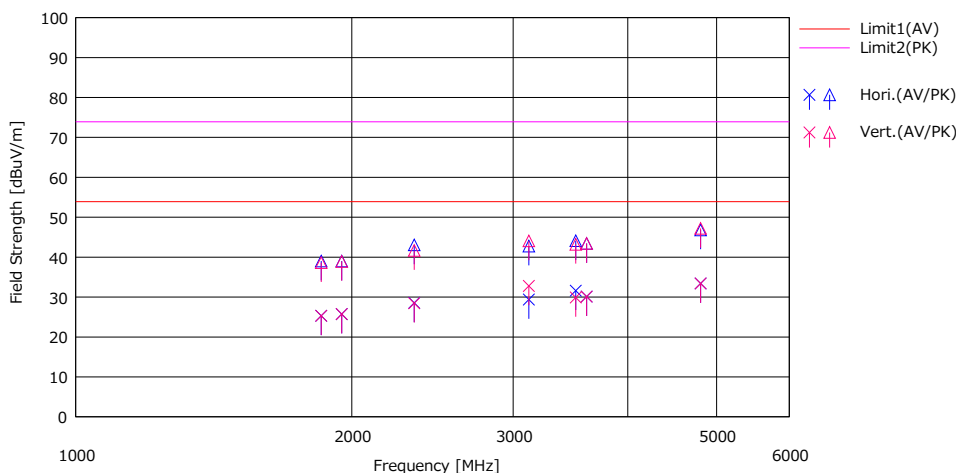

No.	Freq. [MHz]	Reading		Ant.Fac [dB/m]	Loss [dB]	Gain [dB]	Result		Limit		Margin		Pola. [H/V]	Height [cm]	Angle [deg]	Ant. Type	Comment
		(AV) [dBuV]	(PK) [dBuV]				(AV) [dBuV/m]	(PK) [dBuV/m]	(AV) [dBuV/m]	(PK) [dBuV/m]	(AV) [dB]	(PK) [dB]					
1	1852.528	29.30	43.00	25.28	3.13	32.40	25.31	39.01	53.90	73.90	28.59	34.89	Hori.	100	0	H20	
2	1950.240	28.90	42.20	25.76	3.20	32.14	25.72	39.02	53.90	73.90	28.18	34.88	Hori.	100	0	H20	
3	2340.288	29.20	43.70	27.73	3.44	31.82	28.55	43.05	53.90	73.90	25.35	30.85	Hori.	100	0	H20	
4	3120.384	28.20	41.60	28.72	3.86	31.40	29.38	42.78	53.90	73.90	24.52	31.12	Hori.	100	0	H20	
5	3510.432	30.00	42.50	28.78	4.06	31.24	31.60	44.10	53.90	73.90	22.30	29.80	Hori.	100	132	H20	
6	3607.944	28.10	41.40	29.09	4.11	31.19	30.11	43.41	53.90	73.90	23.79	30.49	Hori.	100	0	H20	
7	4802.968	28.20	41.60	31.40	4.65	30.85	33.40	46.80	53.90	73.90	20.50	27.10	Hori.	100	0	H20	
8	1852.528	29.30	42.60	25.28	3.13	32.40	25.31	38.61	53.90	73.90	28.59	35.29	Vert.	100	0	H20	
9	1950.240	28.90	42.10	25.76	3.20	32.14	25.72	38.92	53.90	73.90	28.18	34.98	Vert.	100	0	H20	
10	2340.288	29.10	42.30	27.73	3.44	31.82	28.45	41.65	53.90	73.90	25.45	32.25	Vert.	100	0	H20	
11	3120.384	31.60	42.90	28.72	3.86	31.40	32.78	44.08	53.90	73.90	21.12	29.82	Vert.	100	202	H20	
12	3510.432	28.30	41.60	28.78	4.06	31.24	29.90	43.20	53.90	73.90	24.00	30.70	Vert.	100	0	H20	
13	3607.944	28.10	41.40	29.09	4.11	31.19	30.11	43.41	53.90	73.90	23.79	30.49	Vert.	100	0	H20	
14	4802.968	28.20	42.00	31.40	4.65	30.85	33.40	47.20	53.90	73.90	20.50	26.70	Vert.	100	0	H20	

CHART: WITH FACTOR

ANT TYPE: - 30 MHz: LOOP, 30 MHz - 200 MHz: BICONICAL, 200 MHz - 1000 MHz: LOGPERIODIC, 1000 MHz -: HORN
CALCULATION: RESULT = READING + ANT FACTOR + LOSS(CABLE + ATT) - GAIN(AMP)


Except for the above table: adequate margin data below the limits.

* No signal was detected above 6 GHz.

Radiated Emission (Digital)

Test place	Ise EMC Lab.	No.4	No.4
Semi Anechoic Chamber	No.4	September 10, 2024	September 10, 2024
Date	September 10, 2024	23 deg. C / 57 % RH	23 deg. C / 73 % RH
Temperature / Humidity	23 deg. C / 57 % RH	Nachi Konegawa	Yuichiro Yamazaki
Engineer	(1 GHz to 6 GHz)	(6 GHz to 26.5 GHz)	(Above 26.5 GHz)
Mode	Mode 1 (107.9 MHz)		

Limit : FCC_Part 15 Subpart B(15.109)_Class B

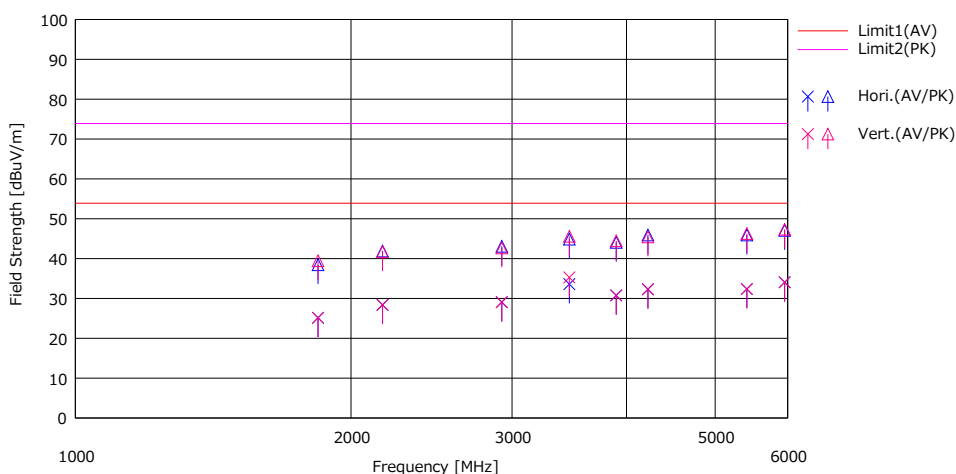

No.	Freq. [MHz]	Reading			Ant.Fac [dB/m]	Loss [dB]	Gain [dB]	Result		Limit		Margin		Pda. [H/V]	Height [cm]	Angle [deg]	Ant. Type	Comment
		(AV) [dBuV]	(PK) [dBuV]					(AV) [dBuV/m]	(PK) [dBuV/m]	(AV) [dBuV/m]	(PK) [dBuV/m]	(AV) [dB]	(PK) [dB]					
1	1840.896	29.20	42.50	25.23	3.13	32.43	25.13	38.43	53.90	73.90	28.77	35.47	Hori.	100	0	H20		
2	2165.760	29.00	42.50	27.97	3.34	31.92	28.39	41.89	53.90	73.90	25.51	32.01	Hori.	100	0	H20		
3	2923.776	28.20	42.20	28.58	3.76	31.49	29.05	43.05	53.90	73.90	24.85	30.85	Hori.	100	0	H20		
4	3465.216	32.20	43.50	28.58	4.04	31.25	33.57	44.87	53.90	73.90	20.33	29.03	Hori.	100	107	H20		
5	3898.368	27.90	41.20	29.65	4.26	31.07	30.74	44.04	53.90	73.90	23.16	29.86	Hori.	100	0	H20		
6	4223.232	28.60	42.20	30.28	4.40	30.98	32.30	45.90	53.90	73.90	21.60	28.00	Hori.	100	0	H20		
7	5414.400	26.70	40.20	31.68	4.92	30.92	32.38	45.88	53.90	73.90	21.52	28.02	Hori.	100	0	H20		
8	5955.840	27.70	40.70	32.30	5.13	31.09	34.04	47.04	53.90	73.90	19.86	26.86	Hori.	100	0	H20		
9	1840.896	29.20	43.50	25.23	3.13	32.43	25.13	39.43	53.90	73.90	28.77	34.47	Vert.	100	0	H20		
10	2165.760	29.00	42.30	27.97	3.34	31.92	28.39	41.69	53.90	73.90	25.51	32.21	Vert.	100	0	H20		
11	2923.776	28.20	41.80	28.58	3.76	31.49	29.05	42.65	53.90	73.90	24.85	31.25	Vert.	100	0	H20		
12	3465.216	33.90	44.20	28.58	4.04	31.25	35.27	45.57	53.90	73.90	18.63	28.33	Vert.	100	209	H20		
13	3898.368	27.90	41.60	29.65	4.26	31.07	30.74	44.44	53.90	73.90	23.16	29.46	Vert.	100	0	H20		
14	4223.232	28.60	41.70	30.28	4.40	30.98	32.30	45.40	53.90	73.90	21.60	28.50	Vert.	100	0	H20		
15	5414.400	26.70	40.60	31.68	4.92	30.92	32.38	46.28	53.90	73.90	21.52	27.62	Vert.	100	0	H20		
16	5955.840	27.70	41.00	32.30	5.13	31.09	34.04	47.34	53.90	73.90	19.86	26.56	Vert.	100	0	H20		

CHART: WITH FACTOR

ANT TYPE: - 30 MHz: LOOP, 30 MHz - 200 MHz: BICONICAL, 200 MHz - 1000 MHz: LOGPERIODIC, 1000 MHz -: HORN
CALCULATION: RESULT = READING + ANT FACTOR + LOSS(CABLE + ATT) - GAIN(AMP)


Except for the above table: adequate margin data below the limits.

* No signal was detected above 6 GHz.

Radiated Emission (Digital)

Test place	Ise EMC Lab.	No.4	No.4
Semi Anechoic Chamber	No.4	September 10, 2024	September 10, 2024
Date	September 10, 2024	23 deg. C / 57 % RH	23 deg. C / 73 % RH
Temperature / Humidity	23 deg. C / 57 % RH	Nachi Konegawa	Yuichiro Yamazaki
Engineer	(1 GHz to 6 GHz)	(6 GHz to 26.5 GHz)	(Above 26.5 GHz)
Mode	Mode 2		

Limit : FCC_Part 15 Subpart B(15.109)_Class B

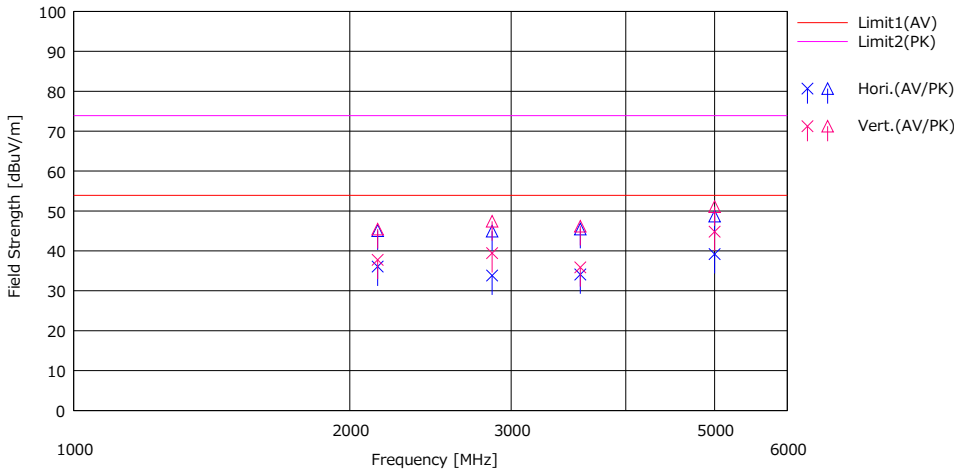

No.	Freq. [MHz]	Reading		Ant.Fac [dB/m]	Loss [dB]	Gain [dB]	Result		Limit		Margin		Pola. [H/V]	Height [cm]	Angle [deg]	Ant. Type	Comment
		(AV) [dBuV]	(PK) [dBuV]				(AV) [dBuV/m]	(PK) [dBuV/m]	(AV) [dBuV/m]	(PK) [dBuV/m]	(AV) [dB]	(PK) [dB]					
1	2144.996	36.90	45.90	27.77	3.32	31.93	36.06	45.06	53.90	73.90	17.84	28.84	Hori.	106	219	H20	
2	2859.995	33.10	44.20	28.53	3.72	31.53	33.82	44.92	53.90	73.90	20.08	28.98	Hori.	100	197	H20	
3	3568.835	32.20	43.60	29.00	4.09	31.21	34.08	45.48	53.90	73.90	19.82	28.42	Hori.	100	236	H20	
4	4999.943	33.60	43.10	31.67	4.73	30.80	39.20	48.70	53.90	73.90	14.70	25.20	Hori.	100	125	H20	
5	2144.996	38.60	46.30	27.77	3.32	31.93	37.76	45.46	53.90	73.90	16.14	28.44	Vert.	111	181	H20	
6	2859.995	38.70	46.70	28.53	3.72	31.53	39.42	47.42	53.90	73.90	14.48	26.48	Vert.	100	210	H20	
7	3568.835	34.00	44.30	29.00	4.09	31.21	35.88	46.18	53.90	73.90	18.02	27.72	Vert.	100	163	H20	
8	4999.943	39.20	45.50	31.67	4.73	30.80	44.80	51.10	53.90	73.90	9.10	22.80	Vert.	100	190	H20	


CHART: WITH FACTOR
 ANT TYPE: - 30 MHz: LOOP, 30 MHz - 200 MHz: BICONICAL, 200 MHz - 1000 MHz: LOGPERIODIC, 1000 MHz -: HORN
 CALCULATION: RESULT = READING + ANT FACTOR + LOSS(CABLE + ATT) - GAIN(AMP)
 Except for the above table: adequate margin data below the limits.

* No signal was detected above 6 GHz.

Antenna Terminal Conducted Emission (Analog)

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.4
Date	October 17, 2024
Temperature / Humidity	23 deg. C / 68 % RH
Engineer	Hiroyuki Furutaka
Mode	Mode 3 (87.75 MHz)

Limit : FCC15.111 Antenna terminal measurement

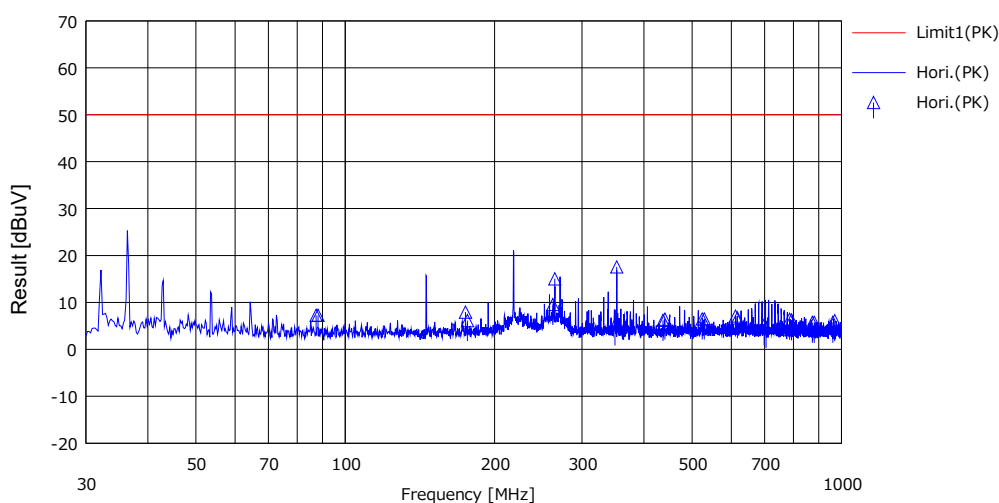

No.	Freq. [MHz]	Reading	Ant Foc	Loss	Gain	Result	Limit *1)	Margin	Pola	Ant. Type	Comment
		(PK)				[dBuV]	(PK)	(PK)			
		[dBuV]	[dB/m]	[dB]	[dB]	[dBuV]	[dBuV]	[dB]	[H/V]		
1	87.362	29.60	0.00	6.11	28.44	7.27	50.00	42.73		---	
2	88.138	29.60	0.00	6.11	28.44	7.27	50.00	42.73		---	
3	174.724	29.90	0.00	6.14	28.11	7.93	50.00	42.07		---	
4	176.276	28.10	0.00	6.14	28.10	6.14	50.00	43.86		---	
5	262.086	31.10	0.00	6.18	27.74	9.54	50.00	40.46		---	
6	264.414	36.60	0.00	6.18	27.74	15.04	50.00	34.96		---	
7	349.448	27.00	0.00	6.20	28.03	5.17	50.00	44.83		---	
8	352.552	39.40	0.00	6.21	28.05	17.56	50.00	32.44		---	
9	436.810	28.70	0.00	6.23	28.76	6.17	50.00	43.83		---	
10	440.690	29.00	0.00	6.23	28.79	6.44	50.00	43.56		---	
11	524.172	29.40	0.00	6.25	29.18	6.47	50.00	43.53		---	
12	528.828	29.40	0.00	6.26	29.19	6.47	50.00	43.53		---	
13	611.534	30.10	0.00	6.28	29.29	7.09	50.00	42.91		---	
14	616.966	29.70	0.00	6.28	29.29	6.69	50.00	43.31		---	
15	698.896	28.10	0.00	6.30	29.23	5.17	50.00	44.83		---	
16	705.104	27.60	0.00	6.30	29.22	4.68	50.00	45.32		---	
17	786.258	29.20	0.00	6.31	29.09	6.42	50.00	43.58		---	
18	793.242	29.00	0.00	6.32	29.07	6.25	50.00	43.75		---	
19	873.620	28.30	0.00	6.34	28.90	5.74	50.00	44.26		---	
20	881.380	28.30	0.00	6.34	28.88	5.76	50.00	44.24		---	
21	960.982	28.10	0.00	6.35	28.68	5.77	50.00	44.23		---	
22	969.518	28.40	0.00	6.35	28.66	6.09	50.00	43.91		---	

*1) 2 nW = -57 dBm = 50 dBuV

CHART: WITH FACTOR


CALCULATION: RESULT = READING + LOSS (CABLE + Matching Pad) – GAIN (AMP)

Except for the above table: adequate margin data below the limits.

Antenna Terminal Conducted Emission (Analog)

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.4
Date	October 17, 2024
Temperature / Humidity	23 deg. C / 68 % RH
Engineer	Hiroyuki Furutaka
Mode	Mode 3 (97.9 MHz)

Limit : FCC15.111 Antenna terminal measurement

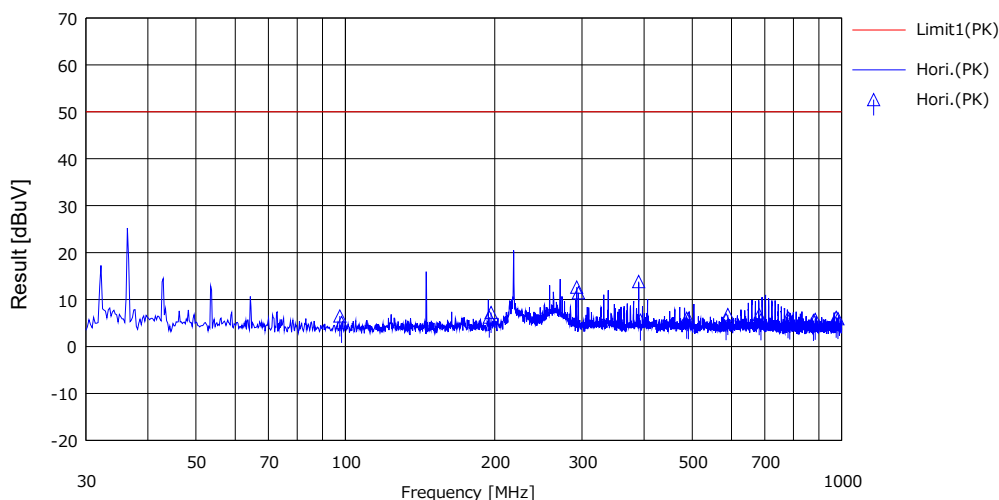

No.	Freq. [MHz]	Reading	Ant.Fac [dB/m]	Loss [dB]	Gan [dB]	Result	Limit *1)	Margin	Pola. [H/V]	Ant. Type	Comment
		[dBuV]				[dBuV]	[dB]				
1	97.512	28.80	0.00	6.12	28.42	6.50	50.00	43.50		---	
2	98.288	27.40	0.00	6.12	28.41	5.11	50.00	44.89		---	
3	195.024	28.10	0.00	6.15	28.00	6.25	50.00	43.75		---	
4	196.576	29.10	0.00	6.15	28.00	7.25	50.00	42.75		---	
5	292.536	34.20	0.00	6.19	27.73	12.66	50.00	37.34		---	
6	294.864	33.00	0.00	6.19	27.73	11.46	50.00	38.54		---	
7	390.048	36.00	0.00	6.22	28.39	13.83	50.00	36.17		---	
8	393.152	27.80	0.00	6.22	28.42	5.60	50.00	44.40		---	
9	487.560	28.80	0.00	6.25	29.05	6.00	50.00	44.00		---	
10	491.440	28.70	0.00	6.25	29.07	5.88	50.00	44.12		---	
11	585.072	28.70	0.00	6.27	29.28	5.69	50.00	44.31		---	
12	589.728	29.80	0.00	6.27	29.28	6.79	50.00	43.21		---	
13	682.584	29.70	0.00	6.30	29.25	6.75	50.00	43.25		---	
14	688.016	28.60	0.00	6.30	29.24	5.66	50.00	44.34		---	
15	780.096	28.90	0.00	6.31	29.10	6.11	50.00	43.89		---	
16	786.304	28.60	0.00	6.31	29.09	5.82	50.00	44.18		---	
17	877.608	28.10	0.00	6.34	28.89	5.55	50.00	44.45		---	
18	884.592	28.30	0.00	6.34	28.87	5.77	50.00	44.23		---	
19	975.120	28.50	0.00	6.36	28.64	6.22	50.00	43.78		---	
20	982.880	28.20	0.00	6.36	28.62	5.94	50.00	44.06		---	

*1) 2 nW = -57 dBm = 50 dBuV

CHART: WITH FACTOR


CALCULATION: RESULT = READING + LOSS (CABLE + Matching Pad) – GAIN (AMP)

Except for the above table: adequate margin data below the limits.

Antenna Terminal Conducted Emission (Analog)

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.4
Date	October 17, 2024
Temperature / Humidity	23 deg. C / 68 % RH
Engineer	Hiroyuki Furutaka
Mode	Mode 3 (107.9 MHz)

Limit : FCC15.111 Antenna terminal measurement

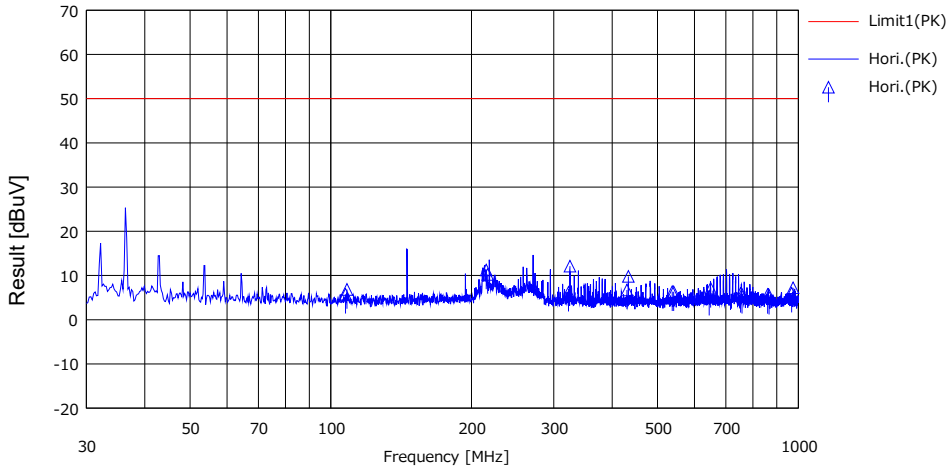

No.	Freq. [MHz]	Reading	Ant.Fac [dB/m]	Loss [dB]	Gain [dB]	Result	Limit *1)	Margin	Pda [H/V]	Ant. Type	Comment
		(PK) [dBuV]				(PK) [dBuV]	(PK) [dB]				
1	107.512	28.00	0.00	6.12	28.38	5.74	50.00	44.26		---	
2	108.288	29.10	0.00	6.12	28.38	6.84	50.00	43.16		---	
3	215.024	33.00	0.00	6.15	27.91	11.24	50.00	38.76		---	
4	216.576	32.00	0.00	6.15	27.90	10.25	50.00	39.75		---	
5	322.536	27.90	0.00	6.19	27.87	6.22	50.00	43.78		---	
6	324.864	33.80	0.00	6.19	27.88	12.11	50.00	37.89		---	
7	430.048	29.20	0.00	6.23	28.71	6.72	50.00	43.28		---	
8	433.152	32.30	0.00	6.23	28.73	9.80	50.00	40.20		---	
9	537.560	29.30	0.00	6.26	29.22	6.34	50.00	43.66		---	
10	541.440	29.30	0.00	6.26	29.23	6.33	50.00	43.67		---	
11	645.072	28.30	0.00	6.29	29.28	5.31	50.00	44.69		---	
12	649.728	30.10	0.00	6.29	29.28	7.11	50.00	42.89		---	
13	752.884	28.80	0.00	6.31	29.15	5.96	50.00	44.04		---	
14	758.016	28.60	0.00	6.31	29.14	5.77	50.00	44.23		---	
15	860.096	28.30	0.00	6.34	28.93	5.71	50.00	44.29		---	
16	866.304	28.10	0.00	6.34	28.92	5.52	50.00	44.48		---	
17	967.608	28.30	0.00	6.35	28.66	5.99	50.00	44.01		---	
18	974.592	29.50	0.00	6.36	28.65	7.21	50.00	42.79		---	

*1) 2 nW = -57 dBm = 50 dBuV

CHART: WITH FACTOR


CALCULATION: RESULT = READING + LOSS (CABLE + Matching Pad) – GAIN (AMP)

Except for the above table: adequate margin data below the limits.

Antenna Terminal Conducted Emission (Analog)

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.4
Date	October 17, 2024
Temperature / Humidity	23 deg. C / 68 % RH
Engineer	Hiroyuki Furutaka
Mode	Mode 4

Limit : FCC15.111 Antenna terminal measurement

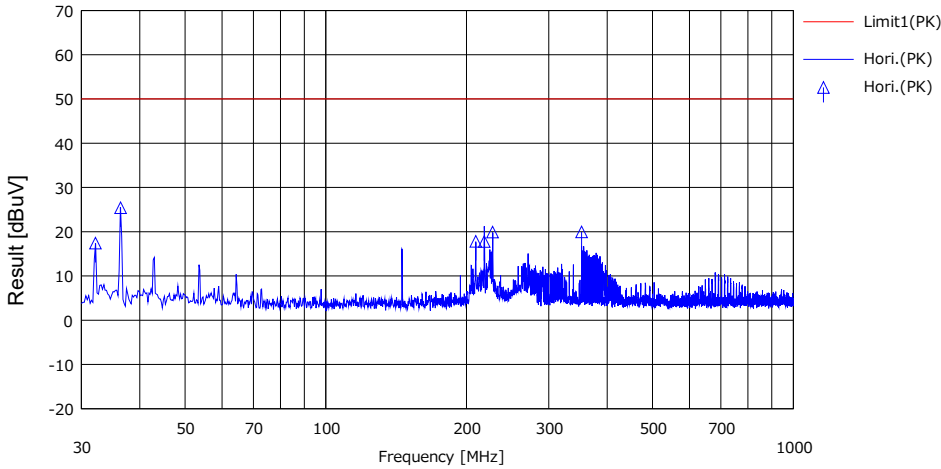

No.	Freq. [MHz]	Reading	Ant.Fac [dB/m]	Loss [dB]	Gain [dB]	Result	Limit *1)	Margin	Pda [H/V]	Ant. Type	Comment
		(PK) [dBuV]				(PK) [dBuV]	(PK) [dB]				
1	32.164	39.90	0.00	6.06	28.55	17.41	50.00	32.59		---	
2	36.404	47.90	0.00	6.06	28.54	25.42	50.00	24.58		---	
3	209.303	39.60	0.00	6.15	27.94	17.81	50.00	32.19		---	
4	218.330	39.50	0.00	6.16	27.89	17.77	50.00	32.23		---	
5	227.498	41.60	0.00	6.16	27.85	19.91	50.00	30.09		---	
6	352.496	41.80	0.00	6.21	28.05	19.96	50.00	30.04		---	

*1) 2 nW = -57 dBm = 50 dBuV

CHART: WITH FACTOR


CALCULATION: RESULT = READING + LOSS (CABLE + Matching Pad) – GAIN (AMP)

Except for the above table: adequate margin data below the limits.

Antenna Terminal Conducted Emission (Digital)

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.4
Date	October 17, 2024
Temperature / Humidity	23 deg. C / 68 % RH
Engineer	Hiroyuki Furutaka
Mode	Mode 3 (87.75 MHz)

Limit : FCC15.111 Antenna terminal measurement

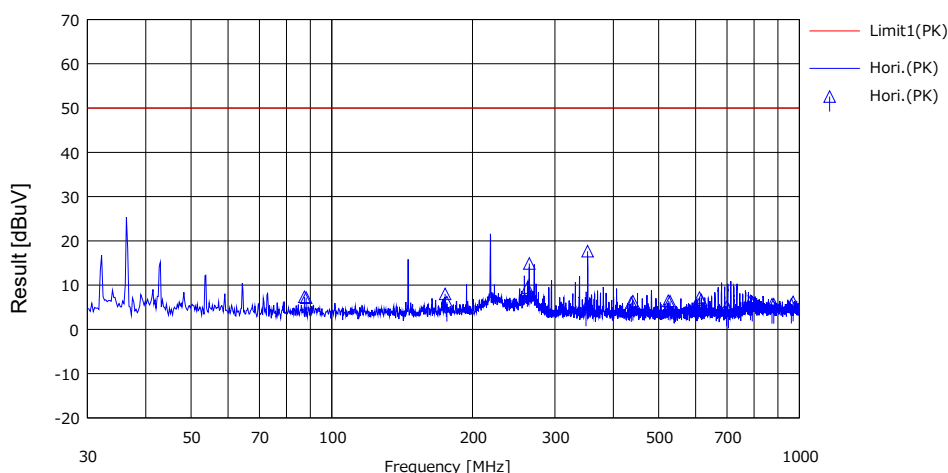

No.	Freq. [MHz]	Reading	Ant.Fac [dB/m]	Loss [dB]	Gain [dB]	Result	Limit *1)	Margn	Pda [H/V]	Ant. Type	Comment
		[dBuV]				[PK]	[PK]	[dB]			
1	87.362	29.70	0.00	6.11	28.44	7.37	50.00	42.63		---	
2	88.138	29.50	0.00	6.11	28.44	7.17	50.00	42.83		---	
3	174.724	30.00	0.00	6.14	28.11	8.03	50.00	41.97		---	
4	176.276	28.10	0.00	6.14	28.10	6.14	50.00	43.86		---	
5	262.086	31.00	0.00	6.18	27.74	9.44	50.00	40.56		---	
6	264.414	36.45	0.00	6.18	27.74	14.89	50.00	35.11		---	
7	349.448	26.90	0.00	6.20	28.03	5.07	50.00	44.93		---	
8	352.552	39.50	0.00	6.21	28.05	17.66	50.00	32.34		---	
9	436.810	28.60	0.00	6.23	28.76	6.07	50.00	43.93		---	
10	440.690	28.90	0.00	6.23	28.79	6.34	50.00	43.66		---	
11	524.172	29.40	0.00	6.25	29.18	6.47	50.00	43.53		---	
12	528.828	29.30	0.00	6.26	29.19	6.37	50.00	43.63		---	
13	611.534	30.20	0.00	6.28	29.29	7.19	50.00	42.81		---	
14	616.966	29.70	0.00	6.28	29.29	6.69	50.00	43.31		---	
15	698.896	28.00	0.00	6.30	29.23	5.07	50.00	44.93		---	
16	705.104	27.50	0.00	6.30	29.22	4.58	50.00	45.42		---	
17	786.258	29.20	0.00	6.31	29.09	6.42	50.00	43.58		---	
18	793.242	28.90	0.00	6.32	29.07	6.15	50.00	43.85		---	
19	873.620	28.20	0.00	6.34	28.90	5.64	50.00	44.36		---	
20	881.380	28.20	0.00	6.34	28.88	5.66	50.00	44.34		---	
21	960.982	28.00	0.00	6.35	28.68	5.67	50.00	44.33		---	
22	969.518	28.50	0.00	6.35	28.66	6.19	50.00	43.81		---	

*1) 2 nW = -57 dBm = 50 dBuV

CHART: WITH FACTOR


CALCULATION: RESULT = READING + LOSS (CABLE + Matching Pad) – GAIN (AMP)

Except for the above table: adequate margin data below the limits.

Antenna Terminal Conducted Emission (Digital)

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.4
Date	October 17, 2024
Temperature / Humidity	23 deg. C / 68 % RH
Engineer	Hiroyuki Furutaka
Mode	Mode 3 (97.9 MHz)

Limit : FCC15.111 Antenna terminal measurement

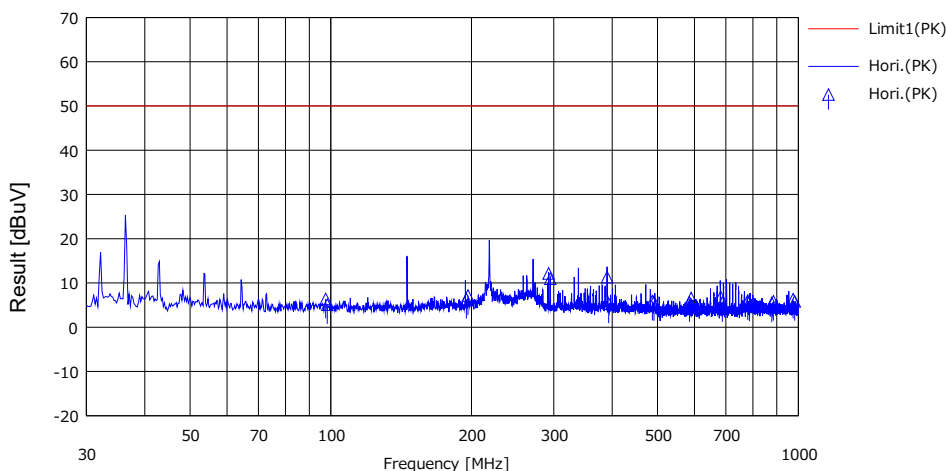

No.	Freq. [MHz]	Reading	Ant.Fac [dB/m]	Loss [dB]	Gain [dB]	Result	Limit *1)	Margn	Pda [H/V]	Ant. Type	Comment
		[dBuV]				[dBuV]	[dB]	[dBuV]			
1	97.512	28.70	0.00	6.12	28.42	6.40	50.00	43.60		---	
2	98.288	27.40	0.00	6.12	28.41	5.11	50.00	44.89		---	
3	195.024	28.20	0.00	6.15	28.00	6.35	50.00	43.65		---	
4	196.576	29.00	0.00	6.15	28.00	7.15	50.00	42.85		---	
5	292.536	33.70	0.00	6.19	27.73	12.16	50.00	37.84		---	
6	294.864	32.50	0.00	6.19	27.73	10.96	50.00	39.04		---	
7	390.048	33.50	0.00	6.22	28.39	11.33	50.00	38.67		---	
8	393.152	27.50	0.00	6.22	28.42	5.30	50.00	44.70		---	
9	487.560	28.70	0.00	6.25	29.05	5.90	50.00	44.10		---	
10	491.440	28.60	0.00	6.25	29.07	5.78	50.00	44.22		---	
11	585.072	28.60	0.00	6.27	29.28	5.59	50.00	44.41		---	
12	589.728	29.60	0.00	6.27	29.28	6.59	50.00	43.41		---	
13	682.584	29.80	0.00	6.30	29.25	6.85	50.00	43.15		---	
14	688.016	28.50	0.00	6.30	29.24	5.56	50.00	44.44		---	
15	786.096	28.80	0.00	6.31	29.10	6.01	50.00	43.99		---	
16	786.304	28.50	0.00	6.31	29.09	5.72	50.00	44.28		---	
17	877.608	28.00	0.00	6.34	28.89	5.45	50.00	44.55		---	
18	884.592	28.40	0.00	6.34	28.87	5.87	50.00	44.13		---	
19	975.120	28.60	0.00	6.36	28.64	6.32	50.00	43.68		---	
20	982.880	28.10	0.00	6.36	28.62	5.84	50.00	44.16		---	

*1) 2 nW = -57 dBm = 50 dBuV

CHART: WITH FACTOR


CALCULATION: RESULT = READING + LOSS (CABLE + Matching Pad) – GAIN (AMP)

Except for the above table: adequate margin data below the limits.

Antenna Terminal Conducted Emission (Digital)

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.4
Date	October 17, 2024
Temperature / Humidity	23 deg. C / 68 % RH
Engineer	Hiroyuki Furutaka
Mode	Mode 3 (107.9 MHz)

Limit : FCC15.111 Antenna terminal measurement

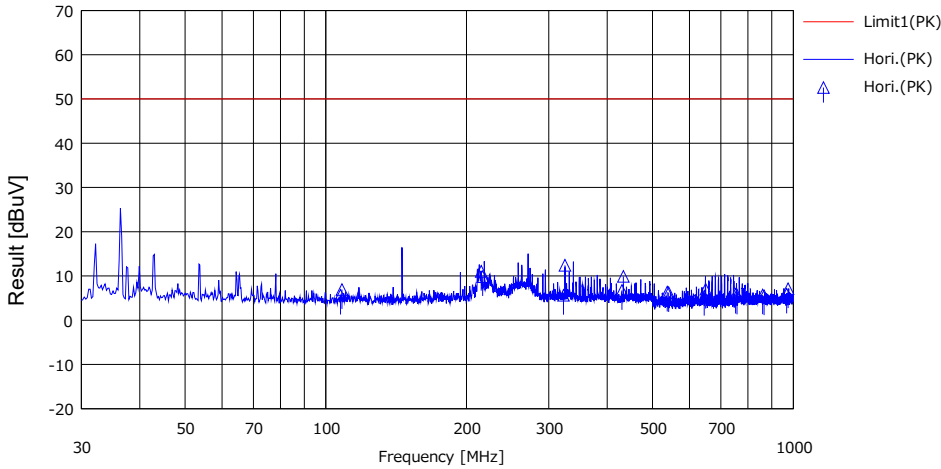

No.	Freq. [MHz]	Reading	Ant.Fac [dB/m]	Loss [dB]	Gain [dB]	Result	Limit *1)	Margn	Pda [H/V]	Ant. Type	Comment
		[dBuV]				[PK]	[PK]	[dB]			
1	107.512	27.90	0.00	6.12	28.38	5.64	50.00	44.36		---	
2	108.288	29.20	0.00	6.12	28.38	6.94	50.00	43.06		---	
3	215.024	32.80	0.00	6.15	27.91	11.04	50.00	38.96		---	
4	216.576	31.60	0.00	6.15	27.90	9.85	50.00	40.15		---	
5	322.536	27.30	0.00	6.19	27.87	5.62	50.00	44.39		---	
6	324.864	34.10	0.00	6.19	27.88	12.41	50.00	37.59		---	
7	430.048	29.20	0.00	6.23	28.71	6.72	50.00	43.28		---	
8	433.152	32.40	0.00	6.23	28.73	9.90	50.00	40.10		---	
9	537.560	29.30	0.00	6.26	29.22	6.34	50.00	43.66		---	
10	541.440	29.20	0.00	6.26	29.23	6.23	50.00	43.77		---	
11	645.072	28.40	0.00	6.29	29.28	5.41	50.00	44.59		---	
12	649.728	30.00	0.00	6.29	29.28	7.01	50.00	42.99		---	
13	752.584	28.70	0.00	6.31	29.15	5.86	50.00	44.14		---	
14	758.016	28.50	0.00	6.31	29.14	5.67	50.00	44.33		---	
15	860.096	28.30	0.00	6.34	28.93	5.71	50.00	44.29		---	
16	866.304	28.10	0.00	6.34	28.92	5.52	50.00	44.48		---	
17	967.608	28.20	0.00	6.35	28.66	5.89	50.00	44.11		---	
18	974.592	29.40	0.00	6.36	28.65	7.11	50.00	42.89		---	

*1) 2 nW = -57 dBm = 50 dBuV

CHART: WITH FACTOR


CALCULATION: RESULT = READING + LOSS (CABLE + Matching Pad) – GAIN (AMP)

Except for the above table: adequate margin data below the limits.

Antenna Terminal Conducted Emission (Digital)

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.4
Date	October 17, 2024
Temperature / Humidity	23 deg. C / 68 % RH
Engineer	Hiroyuki Furutaka
Mode	Mode 4

Limit : FCC15.111 Antenna terminal measurement

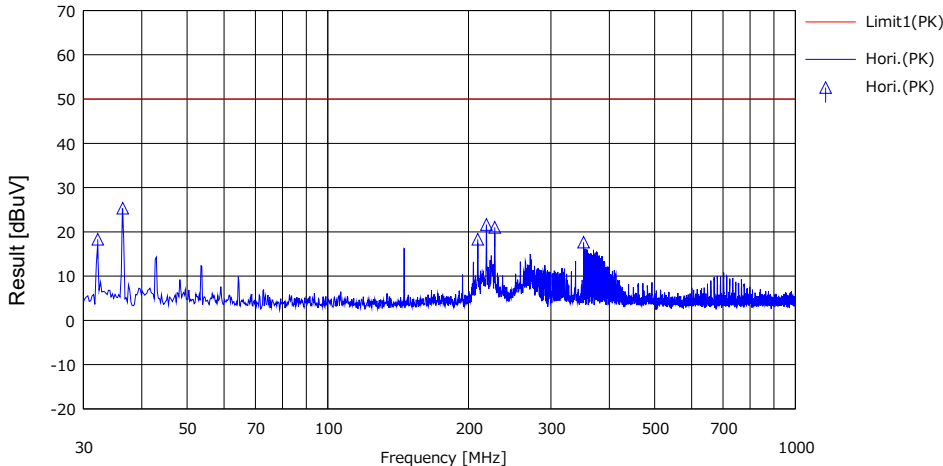


No.	Freq. [MHz]	Reading	Ant.Fac [dB/m]	Loss [dB]	Gain [dB]	Result	Limit *1)	Margin	Pda [H/V]	Ant. Type	Comment
		(PK) [dBuV]				(PK) [dBuV]	(PK) [dB]				
1	32.202	40.80	0.00	6.06	28.55	18.31	50.00	31.69		---	
2	36.406	47.80	0.00	6.06	28.54	25.32	50.00	24.68		---	
3	209.304	40.10	0.00	6.15	27.94	18.31	50.00	31.69		---	
4	218.401	43.40	0.00	6.16	27.89	21.67	50.00	28.33		---	
5	227.566	42.70	0.00	6.16	27.85	21.01	50.00	28.99		---	
6	352.518	39.50	0.00	6.21	28.05	17.66	50.00	32.34		---	

*1) 2 nW = -57 dBm = 50 dBuV
 CHART: WITH FACTOR
 CALCULATION: RESULT = READING + LOSS (CABLE + Matching Pad) – GAIN (AMP)
 Except for the above table: adequate margin data below the limits.

Antenna Terminal Conducted Emission (Analog)

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.4
Date	October 17, 2024
Temperature / Humidity	23 deg. C / 68 % RH
Engineer	Hiroyuki Furutaka
Mode	Mode 3 (87.75 MHz)

Limit : FCC15.111 Antenna terminal measurement

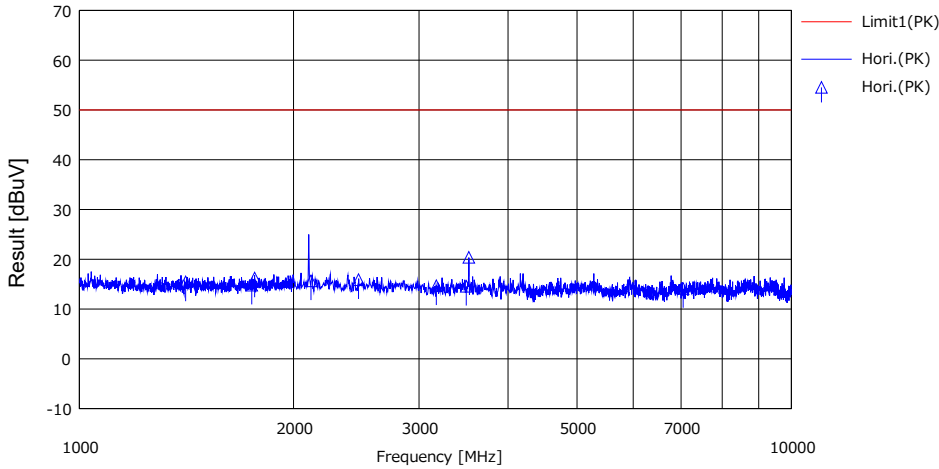

No.	Freq. [MHz]	Reading	Ant.Fac [dB/m]	Loss [dB]	Gain [dB]	Result	Limit *1	Margn	Pda	Ant. Type	Comment
		[dBuV]				[dBuV]	[dB]	[dBuV]			
1	1410.208	42.50	0.00	6.51	33.56	15.45	50.00	34.55		---	
2	1747.240	40.90	0.00	6.56	32.67	14.79	50.00	35.21		---	
3	1762.760	42.30	0.00	6.58	32.63	16.25	50.00	33.75		---	
4	2115.312	41.00	0.00	6.62	31.95	15.67	50.00	34.33		---	
5	2467.864	41.00	0.00	6.65	31.75	15.90	50.00	34.10		---	
6	3172.968	39.30	0.00	6.75	31.38	14.67	50.00	35.33		---	
7	3494.480	39.00	0.00	6.81	31.24	14.57	50.00	35.43		---	
8	3525.520	44.80	0.00	6.81	31.23	20.38	50.00	29.62		---	
9	7051.040	38.80	0.00	7.27	31.96	14.11	50.00	35.89		---	

*1) 2 nW = -57 dBm = 50 dBuV

CHART: WITH FACTOR

1000 to 2000 MHz

CALCULATION: RESULT = READING + LOSS (CABLE + Matching Pad + DC Block) – GAIN (AMP)

2000 to 10000 MHz

CALCULATION: RESULT = READING + LOSS (CABLE + ATT + DC Block) – GAIN (AMP)


Except for the above table: adequate margin data below the limits.

* No signal was detected above 10 GHz.

Antenna Terminal Conducted Emission (Analog)

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.4
Date	October 17, 2024
Temperature / Humidity	23 deg. C / 68 % RH
Engineer	Hiroyuki Furutaka
Mode	Mode 3 (97.9 MHz)

Limit : FCC15.111 Antenna terminal measurement

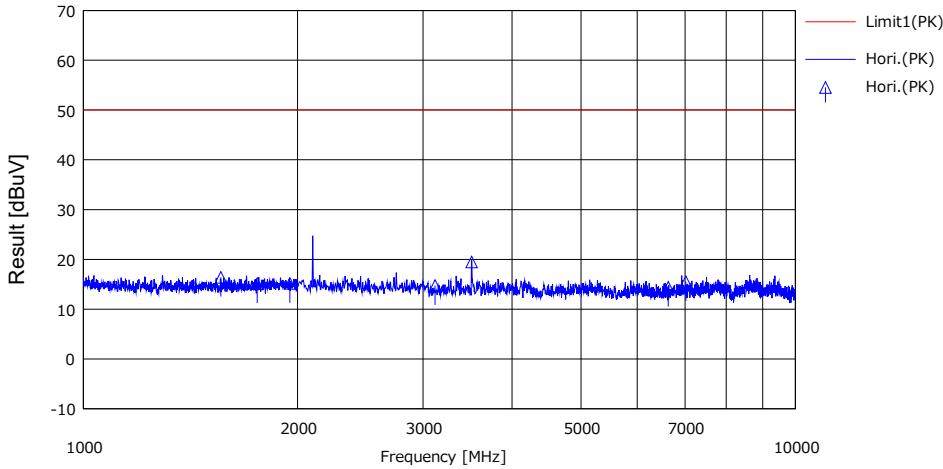

No.	Freq. [MHz]	Reading	Ant.Fac [dB/m]	Loss [dB]	Gain [dB]	Result	Limit *1)	Margn	Pda	Ant. Type	Comment
		(PK) [dBuV]				(PK) [dBuV]	(PK) [dB]	(H/V)			
1	1560.192	43.00	0.00	6.55	33.16	16.39	50.00	33.61		---	
2	1755.216	41.20	0.00	6.58	32.65	15.13	50.00	34.87		---	
3	1950.240	40.70	0.00	6.60	32.14	15.16	50.00	34.84		---	
4	3120.384	39.40	0.00	6.74	31.40	14.74	50.00	35.26		---	
5	3510.432	43.90	0.00	6.81	31.24	19.47	50.00	30.53		---	
6	6630.816	38.80	0.00	7.23	31.62	14.41	50.00	35.59		---	
7	7020.864	40.20	0.00	7.27	31.94	15.53	50.00	34.47		---	

*1) 2 nW = -57 dBm = 50 dBuV

CHART: WITH FACTOR

1000 to 2000 MHz

CALCULATION: RESULT = READING + LOSS (CABLE + Matching Pad + DC Block) – GAIN (AMP)

2000 to 10000 MHz

CALCULATION: RESULT = READING + LOSS (CABLE + ATT + DC Block) – GAIN (AMP)


Except for the above table: adequate margin data below the limits.

* No signal was detected above 10 GHz.

Antenna Terminal Conducted Emission (Analog)

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.4
Date	October 17, 2024
Temperature / Humidity	23 deg. C / 68 % RH
Engineer	Hiroyuki Furutaka
Mode	Mode 3 (107.9 MHz)

Limit : FCC15.111 Antenna terminal measurement

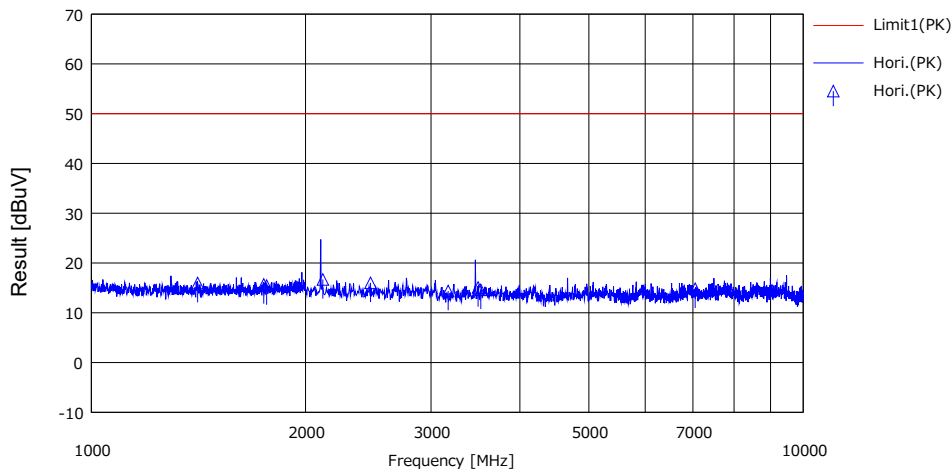

No.	Freq. [MHz]	Reading	Ant.Fac [dB/m]	Loss [dB]	Gain [dB]	Result	Limit*1)	Margn	Pda [H/V]	Ant. Type	Comment
		[dBuV]				[dBuV]	[dB]	[dBuV]			
1	1410.208	43.00	0.00	6.51	33.56	15.95	50.00	34.05		---	
2	1747.240	41.60	0.00	6.56	32.67	15.69	50.00	34.31		---	
3	1762.760	41.50	0.00	6.58	32.63	15.45	50.00	34.55		---	
4	2115.312	42.00	0.00	6.62	31.95	16.67	50.00	33.33		---	
5	2467.864	41.10	0.00	6.65	31.75	16.00	50.00	34.00		---	
6	3172.968	39.00	0.00	6.75	31.38	14.37	50.00	35.63		---	
7	3494.480	39.50	0.00	6.81	31.24	15.07	50.00	34.93		---	
8	3525.520	39.00	0.00	6.81	31.23	14.58	50.00	35.42		---	
9	7051.040	39.50	0.00	7.27	31.96	14.81	50.00	35.19		---	

*1) 2 nW = -57 dBm = 50 dBuV

CHART: WITH FACTOR

1000 to 2000 MHz

CALCULATION: RESULT = READING + LOSS (CABLE + Matching Pad + DC Block) – GAIN (AMP)

2000 to 10000 MHz

CALCULATION: RESULT = READING + LOSS (CABLE + ATT + DC Block) – GAIN (AMP)


Except for the above table: adequate margin data below the limits.

* No signal was detected above 10 GHz.

Antenna Terminal Conducted Emission (Analog)

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.4
Date	October 17, 2024
Temperature / Humidity	23 deg. C / 68 % RH
Engineer	Hiroyuki Furutaka
Mode	Mode 4

Limit : FCC15.111 Antenna terminal measurement

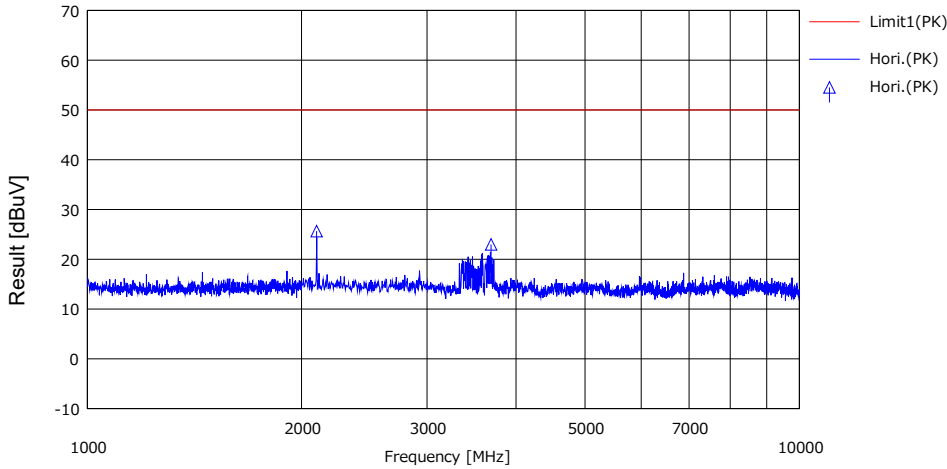

No.	Freq. [MHz]	Reading	Ant.Fac [dB/m]	Loss [dB]	Gain [dB]	Result	Limit *1)	Margin	Pdα [H/V]	Ant. Type	Comment
		[dBuV]				[dBuV]	[dB]				
1	2099.358	51.00	0.00	6.62	31.95	25.67	50.00	24.33		---	
2	3691.553	47.30	0.00	6.84	31.16	22.98	50.00	27.02		---	

*1) 2 nW = -57 dBm = 50 dBuV

CHART: WITH FACTOR

1000 to 2000 MHz

CALCULATION: RESULT = READING + LOSS (CABLE + Matching Pad + DC Block) – GAIN (AMP)

2000 to 10000 MHz

CALCULATION: RESULT = READING + LOSS (CABLE + ATT + DC Block) – GAIN (AMP)


Except for the above table: adequate margin data below the limits.

* No signal was detected above 10 GHz.

Antenna Terminal Conducted Emission (Digital)

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.4
Date	October 17, 2024
Temperature / Humidity	23 deg. C / 68 % RH
Engineer	Hiroyuki Furutaka
Mode	Mode 3 (87.75 MHz)

Limit : FCC15.111 Antenna terminal measurement

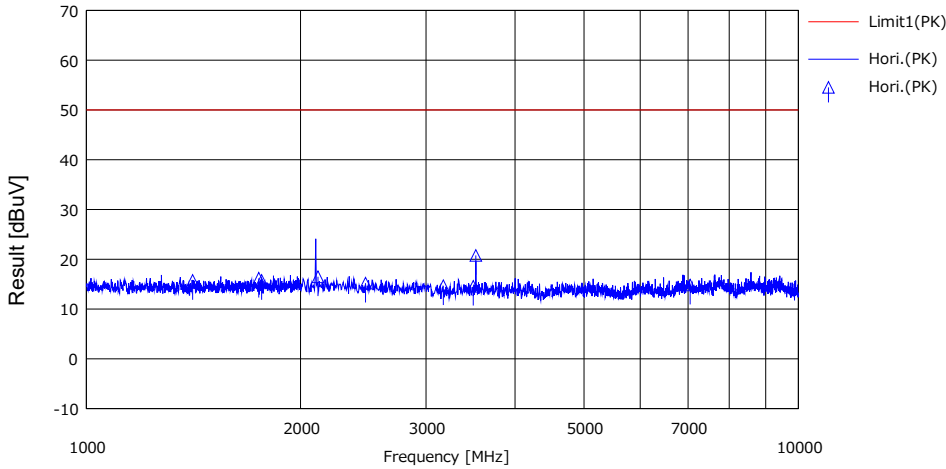

No.	Freq. [MHz]	Reading	Ant.Fac [dB/m]	Loss [dB]	Gain [dB]	Result	Limit *1)	Margn	Pda [H/V]	Ant. Type	Comment
		[dBuV]				[dBuV]	[dB]	[dBuV]			
1	1410.208	42.80	0.00	6.51	33.56	15.75	50.00	34.25		---	
2	1747.240	42.30	0.00	6.56	32.67	16.19	50.00	33.81		---	
3	1762.760	41.80	0.00	6.58	32.63	15.75	50.00	34.25		---	
4	2115.312	41.80	0.00	6.62	31.95	16.47	50.00	33.53		---	
5	2467.864	40.30	0.00	6.65	31.75	15.20	50.00	34.80		---	
6	3172.968	39.30	0.00	6.75	31.38	14.67	50.00	35.33		---	
7	3494.480	39.00	0.00	6.81	31.24	14.57	50.00	35.43		---	
8	3525.520	45.20	0.00	6.81	31.23	20.78	50.00	29.22		---	
9	7051.040	39.50	0.00	7.27	31.96	14.81	50.00	35.19		---	

*1) 2 nW = -57 dBm = 50 dBuV

CHART: WITH FACTOR

1000 to 2000 MHz

CALCULATION: RESULT = READING + LOSS (CABLE + Matching Pad + DC Block) – GAIN (AMP)

2000 to 10000 MHz

CALCULATION: RESULT = READING + LOSS (CABLE + ATT + DC Block) – GAIN (AMP)


Except for the above table: adequate margin data below the limits.

* No signal was detected above 10 GHz.

Antenna Terminal Conducted Emission (Digital)

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.4
Date	October 17, 2024
Temperature / Humidity	23 deg. C / 68 % RH
Engineer	Hiroyuki Furutaka
Mode	Mode 3 (97.9 MHz)

Limit : FCC15.111 Antenna terminal measurement

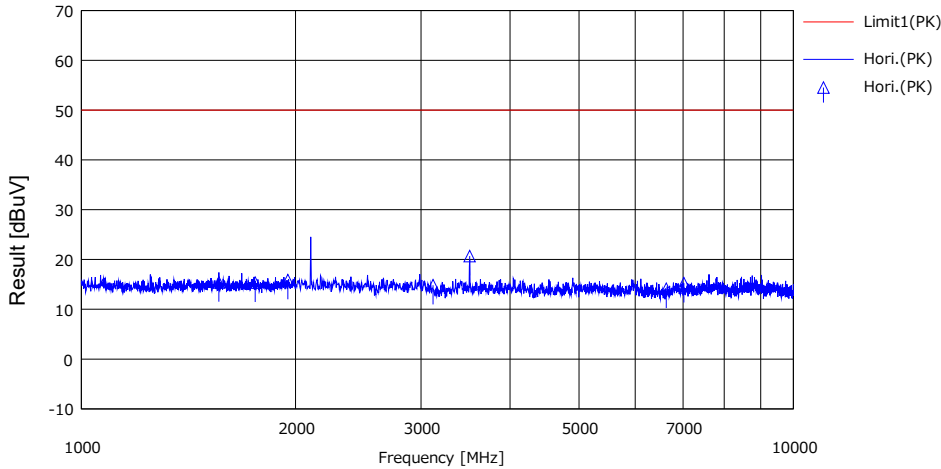

No.	Freq. [MHz]	Reading	Ant.Fac [dB/m]	Loss [dB]	Gain [dB]	Result	Limit*1)	Margn	Pda [H/V]	Ant. Type	Comment
		[dBuV]				[dBuV]	[dB]				
1	1560.192	42.00	0.00	6.55	33.16	15.39	50.00	34.61		---	
2	1755.216	41.40	0.00	6.58	32.65	15.33	50.00	34.67		---	
3	1950.240	41.40	0.00	6.60	32.14	15.86	50.00	34.14		---	
4	3120.384	39.50	0.00	6.74	31.40	14.84	50.00	35.16		---	
5	3510.432	45.10	0.00	6.81	31.24	20.67	50.00	29.33		---	
6	6630.816	38.50	0.00	7.23	31.62	14.11	50.00	35.89		---	
7	7020.864	39.90	0.00	7.27	31.94	15.23	50.00	34.77		---	

*1) 2 nW = -57 dBm = 50 dBuV

CHART: WITH FACTOR

1000 to 2000 MHz

CALCULATION: RESULT = READING + LOSS (CABLE + Matching Pad + DC Block) – GAIN (AMP)

2000 to 10000 MHz

CALCULATION: RESULT = READING + LOSS (CABLE + ATT + DC Block) – GAIN (AMP)


Except for the above table: adequate margin data below the limits.

* No signal was detected above 10 GHz.

Antenna Terminal Conducted Emission (Digital)

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.4
Date	October 17, 2024
Temperature / Humidity	23 deg. C / 68 % RH
Engineer	Hiroyuki Furutaka
Mode	Mode 3 (107.9 MHz)

Limit : FCC15.111 Antenna terminal measurement

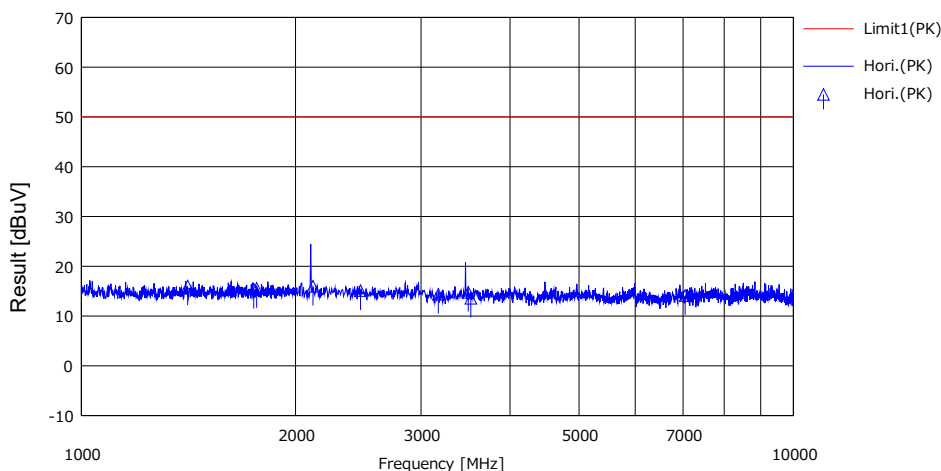

No.	Freq. [MHz]	Reading	Ant.Fac [dB/m]	Loss [dB]	Gain [dB]	Result	Limit*1	Margin	Pda	Ant. Type	Comment
		[dBuV]				[dBuV]	[dB]				
1	1410.208	43.10	0.00	6.51	33.56	16.05	50.00	33.95		---	
2	1747.240	41.50	0.00	6.56	32.67	15.39	50.00	34.61		---	
3	1762.760	41.60	0.00	6.58	32.63	15.55	50.00	34.45		---	
4	2115.312	41.30	0.00	6.62	31.95	15.97	50.00	34.03		---	
5	2467.864	40.20	0.00	6.65	31.75	15.10	50.00	34.90		---	
6	3172.968	39.00	0.00	6.75	31.38	14.37	50.00	35.63		---	
7	3494.480	39.20	0.00	6.81	31.24	14.77	50.00	35.23		---	
8	3525.520	38.00	0.00	6.81	31.23	13.58	50.00	36.42		---	
9	7051.040	38.80	0.00	7.27	31.96	14.11	50.00	35.89		---	

*1) 2 nW = -57 dBm = 50 dBuV

CHART: WITH FACTOR

1000 to 2000 MHz

CALCULATION: RESULT = READING + LOSS (CABLE + Matching Pad + DC Block) – GAIN (AMP)

2000 to 10000 MHz

CALCULATION: RESULT = READING + LOSS (CABLE + ATT + DC Block) – GAIN (AMP)


Except for the above table: adequate margin data below the limits.

* No signal was detected above 10 GHz.

Antenna Terminal Conducted Emission (Digital)

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.4
Date	October 17, 2024
Temperature / Humidity	23 deg. C / 68 % RH
Engineer	Hiroyuki Furutaka
Mode	Mode 4

Limit : FCC15.111 Antenna terminal measurement

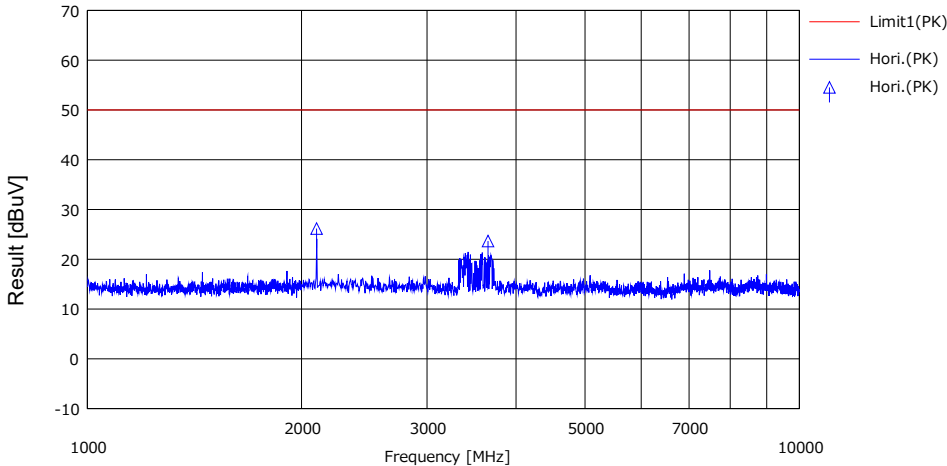

No.	Freq. [MHz]	Reading	Ant.Fac [dB/m]	Loss [dB]	Gain [dB]	Result	Limit *1)	Margin	Pda [H/V]	Ant. Type	Comment
		[dBuV]				[dBuV]	[dB]				
1	2099.228	51.50	0.00	6.62	31.95	26.17	50.00	23.83		---	
2	3653.588	48.00	0.00	6.84	31.18	23.66	50.00	26.34		---	

*1) 2 nW = -57 dBm = 50 dBuV

CHART: WITH FACTOR

1000 to 2000 MHz

CALCULATION: RESULT = READING + LOSS (CABLE + Matching Pad + DC Block) – GAIN (AMP)

2000 to 10000 MHz

CALCULATION: RESULT = READING + LOSS (CABLE + ATT + DC Block) – GAIN (AMP)

Except for the above table: adequate margin data below the limits.

* No signal was detected above 10 GHz.

APPENDIX 2: Test instruments

Test equipment (1/2)

Test Item	LIMS ID	Description	Manufacturer	Model	Serial	Last Calibration Date	Cal Int
AT	141172	Attenuator(6dB)(above 1GHz)	HIROSE ELECTRIC CO.,LTD.	AT-106	-	12/11/2023	12
AT	141398	Microwave Cable 1G-40GHz	Suhner	SUCOFLEX102	30813/2	05/27/2024	12
AT	141545	DIGITAL HiTESTER	HIOKI E.E. CORPORATION	3805	51201148	02/01/2024	12
AT	141550	Matching Pad Anritsu	Anritsu Corporation	MB-009	40063	07/04/2024	12
AT	141581	MicroWave System Amplifier	Keysight Technologies Inc	83017A	00650	10/05/2023	12
AT	141594	Pre Amplifier	Keysight Technologies Inc	8447D	2944A10150	02/17/2024	12
AT	141978	Spectrum Analyzer	Keysight Technologies Inc	E4448A	MY46180899	05/09/2024	12
AT	142011	AC4_Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 3m	DA-10005	12/13/2023	24
AT	156190	DC Block	EMC Instruments Corporation	N9398C	MY46457635	07/04/2024	12
AT	178648	EMI measurement program	TSJ (Techno Science Japan)	TEPTO-DV	-	-	-
AT	195231	Microwave Cable	Huber+Suhner	SF102D/11PC24/11PC24/1000mm	537062/126E	02/13/2024	12
AT	237927	Broadband Amplifier	ERAVANT	SBB-0115033218-2F2F-E3	27554-01	07/04/2024	12
AT	244710	Thermo-Hygrometer	HIOKI E.E. CORPORATION	LR5001	231202104	01/25/2024	12
RE	141266	Logperiodic Antenna(200-1000MHz)	Schwarzbeck Mess-Elektronik OHG	VUSLP9111B	9111B-191	08/23/2024	12
RE	141331	Attenuator(6dB)	TME	UFA-01	-	02/17/2024	12
RE	141397	Coaxial Cable	UL Japan	-	-	11/22/2023	12
RE	141425	Biconical Antenna	Schwarzbeck Mess-Elektronik OHG	VHA9103+BBA9106	VHA 91031302	08/23/2024	12
RE	141485	DC Block Filter	Keysight Technologies Inc	N9398C	51053	10/05/2023	12
RE	141506	Horn Antenna 15-40GHz	Schwarzbeck Mess-Elektronik OHG	BBHA9170	BBHA9170307	08/07/2024	12
RE	141507	Horn Antenna 1-18GHz	Schwarzbeck Mess-Elektronik OHG	BBHA9120D	258	11/20/2023	12
RE	141517	Horn Antenna 26.5-40GHz	ETS-Lindgren	3160-10	152399	11/20/2023	12
RE	141545	DIGITAL HiTESTER	HIOKI E.E. CORPORATION	3805	51201148	02/01/2024	12
RE	141550	Matching Pad Anritsu	Anritsu Corporation	MB-009	40063	07/04/2024	12
RE	141581	MicroWave System Amplifier	Keysight Technologies Inc	83017A	00650	10/05/2023	12
RE	141585	Pre Amplifier	L3 Narda-MITEQ	MLA-10K01-B01-35	1237616	02/17/2024	12
RE	141588	Pre Amplifier	L3 Narda-MITEQ	AMF-6F-2600400-33-8P / AMF-4F-2600400-33-8P	1871355 /1871328	01/22/2024	12
RE	141885	Spectrum Analyzer	Keysight Technologies Inc	E4448A	US44300523	11/29/2023	12
RE	141894	Signal Generator	Rohde & Schwarz	SMC100A	103408	10/05/2023	12
RE	141951	EMI Test Receiver	Rohde & Schwarz	ESR26	101408	05/17/2024	12
RE	142011	AC4_Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 3m	DA-10005	12/13/2023	24
RE	142017	AC4_Semi Anechoic Chamber(SVSWR)	TDK	Semi Anechoic Chamber 3m	DA-10005	04/14/2023	24
RE	142230	Measure, Tape, Steel	KOMELON	KMC-36	-	-	-
RE	145817	HD Radio Vector Signal Generator	MEGURO ELECTRONICS CORPORATION	MSG-3100	2100109	-	-
RE	160324	Coaxial Cable	Huber+Suhner	SUCOFLEX 102A	MY009/2A	10/05/2023	12

Test equipment (2/2)

Test Item	LIMS ID	Description	Manufacturer	Model	Serial	Last Calibration Date	Cal Int
RE	178648	EMI measurement program	TSJ (Techno Science Japan)	TEPTO-DV	-	-	-
RE	234602	Microwave Cable	Huber+Suhner	SF126E/11PC35/11 PC35/1000M,5000M	537063/126E / 537074/126E	03/08/2024	12
RE	244710	Thermo-Hygrometer	HIOKI E.E. CORPORATION	LR5001	231202104	01/25/2024	12
RE	245788	Double Ridge Horn Antenna	Schwarzbeck Mess- Elektronik OHG	BBHA 9120 C	690	03/06/2024	12

***Hyphens for Last Calibration Date and Cal Int (month) are instruments that Calibration is not required (e.g. software), or instruments checked in advance before use.**

The expiration date of the calibration is the end of the expired month.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

Test item:

RE: Radiated emission

AT: Antenna Terminal Conducted