

FCC Part 15 EMI TEST REPORT of

E.U.T. : Bluetooth Modular

Model : NF2301

FCC ID : ACJ932CQ-BT5107

for

APPLICANT : Panasonic Corporation of North America

ADDRESS : One Panasonic Way, Secaucus, NJ 07094 USA

Test Performed by

ELECTRONICS TESTING CENTER, TAIWAN

NO.34, LIN 5, DINGFU TSUEN, LINKOU SHIANG

TAIPEI COUNTY, TAIWAN, 24442, R.O.C.

Tel:(02)26023052

Fax:(02)26010910

<http://www.etc.org.tw> ; e-mail : emc@etc.org.tw

Report Number : 10-09-RBF-090

TEST REPORT CERTIFICATION

Applicant : Panasonic Corporation of North America
One Panasonic Way, Secaucus, NJ 07094 USA

Manufacture : Panasonic Taiwan Co., Ltd.
579, Yuan Shan Road, Chung-Ho, Taipei Hsien, Taiwan

Description of Device :

- a) Type of EUT : Bluetooth Modular
- b) Trade Name : Panasonic
- c) Model No. : NF2301
- d) Power Supply : DC 12V to Car Radio

Regulation Applied : FCC Rules and Regulations Part 15 Subpart C (2009)

I HEREBY CERTIFY THAT: The data shown in this report were made in accordance with the procedures given in ANSI C63.4, and the energy emitted by the device was founded to be within the limits applicable. I assume full responsibility for accuracy and completeness of these data.

Note: 1. The result of the testing report relate only to the item tested.
2. The testing report shall not be reproduced expect in full, without the written approval of ETC.

Date Test Item Received : *Sep. 15, 2010*
Date Test Campaign Completed : *Oct. 12, 2010*
Date of Issue : *Oct. 12, 2010*

Test Engineer : *Falcon Shi*
(Falcon Shi, Engineer)

Check By : *Charles Wang*
(Charles Wang, Supervisor)

Approve & Authorized : *Will Yauo*
Will Yauo, Manager
EMC Dept. II of ELECTRONICS
TESTING CENTER, TAIWAN

| Table of Contents | Page |
|---|-------------|
| 1 GENERAL INFORMATION | 1 |
| 1.1 Product Description..... | 1 |
| 1.2 Test Methodology | 1 |
| 1.3 Test Facility..... | 1 |
| 2 PROVISIONS APPLICABLE | 2 |
| 2.1 Definition | 2 |
| 2.2 Requirement for Compliance | 3 |
| 2.3 Restricted Bands of Operation | 5 |
| 2.4 Labeling Requirement | 6 |
| 2.5 User Information..... | 6 |
| 3 SYSTEM TEST CONFIGURATION | 7 |
| 3.1 Justification | 7 |
| 3.2 Devices for Tested System..... | 7 |
| 4 RADIATED EMISSION MEASUREMENT | 8 |
| 4.1 Applicable Standard | 8 |
| 4.2 Measurement Procedure | 8 |
| 4.3 Measuring Instrument | 10 |
| 4.4 Radiated Emission Data | 11 |
| 4.5 Field Strength Calculation..... | 16 |
| 4.6 Photos of Radiation Measuring Setup | 17 |
| 5 CONDUCTED EMISSION MEASUREMENT | 18 |
| 5.1 Description..... | 18 |
| 6 ANTENNA REQUIREMENT | 19 |
| 6.1 Standard Applicable | 19 |
| 6.2 Antenna Construction..... | 19 |
| 7 HOPPING CHANNEL SEPARATION | 20 |
| 7.1 Standard Applicable | 20 |
| 7.2 Measurement Procedure | 20 |
| 7.3 Measurement Equipment | 21 |
| 7.4 Measurement Data..... | 21 |
| 8 NUMBER OF HOPPING FREQUENCY USED | 28 |
| 8.1 Standard Applicable | 28 |
| 8.2 Measurement Procedure | 28 |
| 8.3 Measurement Equipment | 28 |

| | |
|--|-----------|
| 8.4 Measurement Data..... | 29 |
| 9 CHANNEL BANDWIDTH..... | 36 |
| 9.1 Standard Applicable | 36 |
| 9.2 Measurement Procedure | 36 |
| 9.3 Measurement Equipment | 37 |
| 9.4 Measurement Data..... | 37 |
| 10 DWELL TIME ON EACH CHANNEL..... | 44 |
| 10.1 Standard Applicable | 44 |
| 10.2 Measurement Procedure | 44 |
| 10.3 Measurement Equipment | 44 |
| 10.4 Measurement Data..... | 45 |
| 11 OUTPUT POWER MEASUREMENT..... | 53 |
| 11.1 Standard Applicable | 53 |
| 11.2 Measurement Procedure | 53 |
| 11.3 Measurement Equipment | 53 |
| 11.4 Measurement Data..... | 54 |
| 12 100 kHz BANDWIDTH OF BAND EDGES MEASUREMENT..... | 61 |
| 12.1 Standard Applicable | 61 |
| 12.2 Measurement Procedure | 61 |
| 12.3 Measurement Equipment | 61 |
| 12.4 Measurement Data..... | 62 |
| 13 CONDUCTED SPURIOUS EMISSION MEASUREMENT..... | 71 |
| 13.1 Standard Applicable | 71 |
| 13.2 Measurement Procedure | 71 |
| 13.3 Measurement Equipment | 71 |
| 13.4 Measurement Data..... | 72 |
| 14 PEAK POWER SPECTRAL DENSITY MEASUREMENT..... | 86 |
| 14.1 Standard Applicable | 86 |
| 14.2 Measurement Procedure | 86 |
| 14.3 Measurement Equipment | 86 |
| 14.4 Measurement Data..... | 87 |

1 GENERAL INFORMATION

1.1 Product Description

- a) Type of EUT : Bluetooth Modular
- b) Trade Name : Panasonic
- c) Model No. : NF2301
- d) Power Supply : DC 12V to Car Radio

1.2 Test Methodology

Both conducted and radiated emissions were performed according to the procedures illustrated in ANSI C63.4 (2003). Other required measurements were illustrated in separate sections of this test report for details.

For

1.3 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located on the roof top of Building at NO.34, LIN 5, DINGFU TSUEN, LINKOU SHIANG TAIPEI COUNTY, TAIWAN, 24442, R.O.C.

This site has been fully described in a report submitted to your office, and accepted in a letter dated Aug. 05, 2008.

2 PROVISIONS APPLICABLE

2.1 Definition

Unintentional radiator:

A device that intentionally generates and radio frequency energy for use within the device, or that sends radio frequency signals by conduction to associated equipment via connecting wiring, but which is not intended to emit RF energy by radiation or induction.

Class A Digital Device:

A digital device which is marketed for use in commercial or business environment; exclusive of a device which is market for use by the general public, or which is intended to be used in the home.

Class B Digital Device :

A digital device which is marketed for use in a residential environment notwithstanding use in a commercial, business of industrial environment. Example of such devices that are marketed for the general public.

Note : A manufacturer may also qualify a device intended to be marketed in a commercial, business, or industrial environment as a Class B digital device, and in fact is encouraged to do so, provided the device complies with the technical specifications for a Class B Digital Device. In the event that a particular type of device has been found to repeatedly cause harmful interference to radio communications, the Commission may classify such a digital device as a Class B Digital Device, Regardless of its intended use.

Intentional radiator:

A device that intentionally generates and emits radio frequency energy by radiation or induction.

2.2 Requirement for Compliance

(1) Conducted Emission Requirement

Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

| Frequency MHz | Quasi Peak dB μ V | Average dB μ V |
|------------------|--------------------------|-----------------------|
| 0.15 - 0.5 | 66-56* | 56-46* |
| 0.5 - 5.0 | 56 | 46 |
| 5.0 - 30.0 | 60 | 50 |

* Decreases with the logarithm of the frequency

For intentional device, according to §5.207(a) Line Conducted Emission Limits is same as above table.

(2) Radiated Emission Requirement

For unintentional device, according to §5.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

| Frequency MHz | Distance Meters | Radiated dB μ V/m | Radiated μ V/m |
|------------------|--------------------|--------------------------|-----------------------|
| 30 - 88 | 3 | 40.0 | 100 |
| 88 - 216 | 3 | 43.5 | 150 |
| 216 - 960 | 3 | 46.0 | 200 |
| Above 960 | 3 | 54.0 | 500 |

For intentional device, according to §5.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.

(3) Antenna Requirement

For intentional device, according to §5.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

(4) Hopping Channel Separation

According to 15.247(a)(1), frequency hopping system shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

(5) Number of Hopping frequencies used

According to 15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 non-overlapping channels.

(6) Hopping Channel Bandwidth

According to 15.247(a)(1)(ii), for frequency hopping system operating in the 5725-5850 MHz band, the maximum 20dB bandwidth of the hopping channel is 1MHz.

(7) Dwell Time of each frequency

According to 15.247(a)(1)(iii), for frequency hopping system operating in the 2400-2483.5 MHz band, the average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

(8) Output Power Requirement

According to 15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt.

For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

(9) 100 kHz Bandwidth of Frequency Band Edges Requirement

According to 15.247(c), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required.

(10) Out-of-Band Conducted Emission Requirement

According to 15.247(c), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required.

(11) Peak Power Spectral Density Requirement

According to 15.247(d), for digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

2.3 Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below :

| MHz | MHz | MHz | GHz |
|-------------------|-----------------------|---------------|-------------|
| 0.090 - 0.110 | 16.42-16.423 | 399.9-410 | 4.5-5.15 |
| 0.495 - 0.505 ** | 16.69475 - 16.69525 | 608-614 | 5.35-5.46 |
| 2.1735 - 2.1905 | 16.80425 - 16.80475 | 960-1240 | 7.25-7.75 |
| 4.125-4.128 | 25.5-25.67 | 1300-1427 | 8.025-8.5 |
| 4.17725-4.17775 | 37.5-38.25 | 1435-1626.5 | 9.0-9.2 |
| 4.20725-4.20775 | 73-74.6 | 1645.5-1646.5 | 9.3-9.5 |
| 6.215-6.218 | 74.8-75.2 | 1660-1710 | 10.6-12.7 |
| 6.26775-6.26825 | 108-121.94 | 1718.8-1722.2 | 13.25-13.4 |
| 6.31175-6.31225 | 123-138 | 2200-2300 | 14.47-14.5 |
| 8.291-8.294 | 149.9-150.05 | 2310-2390 | 15.35-16.2 |
| 8.362-8.366 | 156.52475 - 156.52525 | 2483.5-2500 | 17.7-21.4 |
| 8.37625-8.38675 | 156.7-156.9 | 2655-2900 | 22.01-23.12 |
| 8.41425-8.41475 | 162.0125-167.17 | 3260-3267 | 23.6-24.0 |
| 12.29-12.293 | 167.72-173.2 | 3332-3339 | 31.2-31.8 |
| 12.51975-12.52025 | 240-285 | 3345.8-3358 | 36.43-36.5 |
| 12.57675-12.57725 | 322-335.4 | 3360-4400 | Above 38.6 |
| 13.36-13.41 | | | |

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

2.4 Labeling Requirement

The device shall bear the following statement in a conspicuous location on the device :

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions : (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

2.5 User Information

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual.

The Federal Communications Commission Radio Frequency Interference Statement includes the following paragraph.

This equipment has been tested and found to comply with the limits for a Class B Digital Device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction may cause harmful interference to radio communication. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.

- Increase the separation between the equipment and receiver.

- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

- Consult the dealer or an experienced radio / TV technician for help.

3 SYSTEM TEST CONFIGURATION

3.1 Justification

For both radiated and conducted emissions, the bluetooth module was installed inside a car radio which it will be installed for marketing. The bluetooth module was set to different modulation modes: GFSK, DQPSK and 8DPSK for the pre-test. According to the result, GFSK mode was found the worst case hence this mode was chosen for the final test. Measurement was performed under the condition that a computer program was exercised to simulate data communication of the Bluetooth module, including transmitting and receiving.

For conducted and radiated emissions, whichever RF channel is operated, the digital circuits' function identically. As the reason, measurement of emissions from digital circuits is performed with the highest, middle and the lowest channel by transmitting mode.

3.2 Devices for Tested System

| Device | Manufacture | Model / FCC ID. | Description |
|---------------------|----------------------------|--------------------------|-------------|
| Bluetooth Modular * | Panasonic Taiwan Co., Ltd. | NF2301 / ACJ932CQ-BT5107 | ---- |

Remark “*” means equipment under test.

4 RADIATED EMISSION MEASUREMENT

4.1 Applicable Standard

For unintentional radiator, the radiated emission shall comply with §5.109(a).

For intentional radiators, according to §5.247 (a), operation under this provision is limited to frequency hopping and direct sequence spread spectrum, and the out band emission shall be comply with §5.247 (c)

4.2 Measurement Procedure

1. Setup the configuration per figure 1 and 2 for frequencies measured below and above 1 GHz respectively.
2. For emission frequencies measured below 1 GHz, a pre-scan is performed in a shielded chamber to determine the accurate frequencies of higher emissions will be checked on a open test site. As the same purpose, for emission frequencies measured above 1 GHz, a pre-scan also be performed with a 1 meter measuring distance before final test.
3. For emission frequencies measured below and above 1 GHz, set the spectrum analyzer on a 100 kHz and 1 MHz resolution bandwidth respectively for each frequency measured in step 2.
4. The search antenna is to be raised and lowered over a range from 1 to 4 meters in horizontally polarized orientation. Position the highness when the highest value is indicated on spectrum analyzer, then change the orientation of EUT on test table over a range from 0° to 360° with a speed as slow as possible, and keep the azimuth that highest emission is indicated on the spectrum analyzer. Vary the antenna position again and record the highest value as a final reading. A RF test receiver is also used to confirm emissions measured.
5. Repeat step 4 until all frequencies need to be measured were complete.
6. Repeat step 5 with search antenna in vertical polarized orientations.
7. Check the three frequencies of highest emission with varying the placement of cables associated with EUT to obtain the worse case and record the result.

Figure 1 : Frequencies measured below 1 GHz configuration


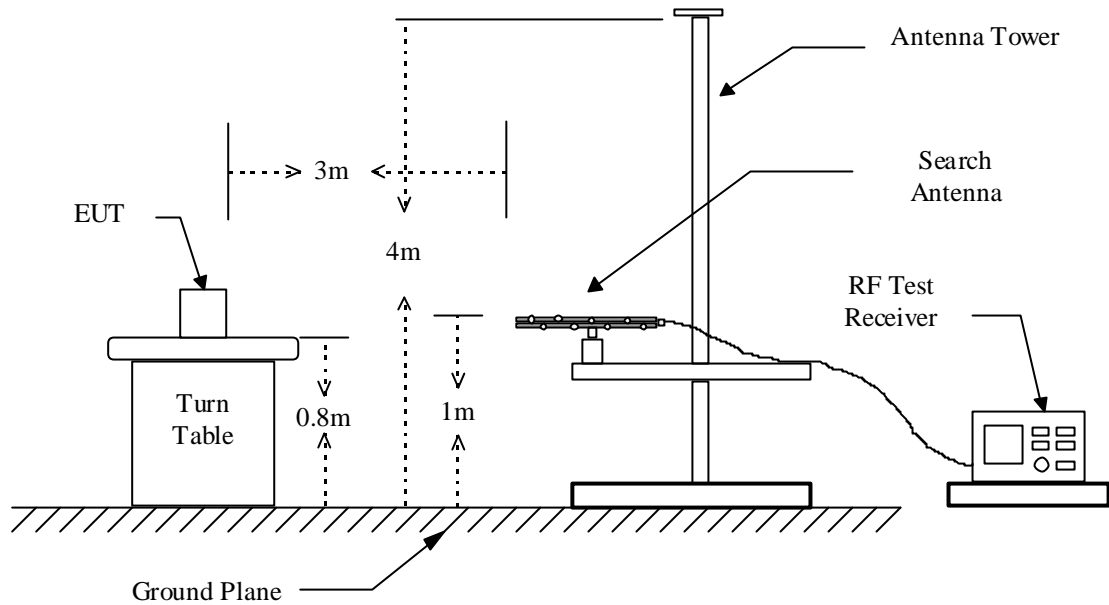


Figure 2 : Frequencies measured above 1 GHz configuration

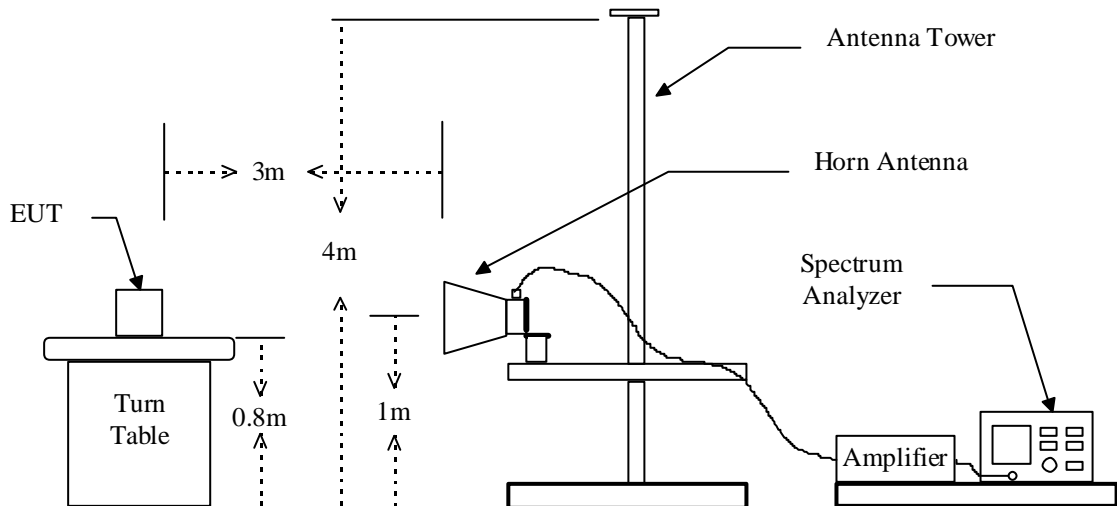

4.3 Measuring Instrument

The following instrument are used for radiated emissions measurement:

| Equipment | Manufacturer | Model No. | Calibration Date | Next Cal. Date |
|-----------------------|-----------------|-----------|------------------|----------------|
| Test Receiver | Rohde & Schwarz | ESVS30 | 2010/05/14 | 2011/05/13 |
| Spectrum | Advantest | R3162 | 2010/03/01 | 2011/02/28 |
| Bi-Log Antenna | Schaffner | CBL 6111 | 2010/05/21 | 2011/05/20 |
| Log-periodic Antenna | EMCO | 3146 | 2009/09/30 | 2010/09/29 |
| Biconical Antenna | EMCO | 3110B | 2009/09/22 | 2010/09/21 |
| Double Ridged Antenna | EMCO | 3115 | 2010/05/11 | 2011/05/10 |
| Amplifier | HP | 8449B | 2009/12/16 | 2010/12/15 |
| Amplifier | HP | 83051A | 2010/05/13 | 2011/05/12 |
| Amplifier | HP | 8447D | 2010/05/10 | 2011/05/09 |
| Spectrum | Rohde & Schwarz | FSP40 | 2010/09/09 | 2011/09/09 |

Measuring instrument setup in measured frequency band when specified detector function is used :

| Frequency Band (MHz) | Instrument | Function | Resolution bandwidth | Video Bandwidth |
|----------------------|-------------------|------------|----------------------|-----------------|
| 30 to 1000 | RF Test Receiver | Quasi-Peak | 120 kHz | N/A |
| | Spectrum Analyzer | Peak | 100 kHz | 100 kHz |
| Above 1000 | Spectrum Analyzer | Peak | 1 MHz | 1 MHz |
| | Spectrum Analyzer | Average | 1 MHz | 10 Hz |

4.4 Radiated Emission Data

4.4.1 Tx Portion

Test Mode: **Worse Case of GFSK**

A. Channel Low

Operation Mode : Transmitting

Fundamental Frequency : 2402.000 MHz

Test Date : Sep. 20, 2010 Temperature : 22 °C Humidity : 49 %

| Frequency (MHz) | Reading (dBuV) | | | | Factor (dB) Corr. | Result @3m (dBuV/m) | | Limit @3m (dBuV/m) | | Margin (dB) | Table Deg. (Deg.) | Ant. High (m) |
|--------------------|----------------|----------|-----------|----------|-------------------------|------------------------|-----|-----------------------|------|----------------|-------------------------|---------------------|
| | H Peak | V Ave | H Peak | V Ave | | Peak | Ave | Peak | Ave | | | |
| 4804.010 | 53.5 | --- | 53.2 | --- | -0.2 | 53.3 | --- | 74.0 | 54.0 | -0.7 | 67 | 1.5 |
| 7206.015 | --- | --- | --- | --- | --- | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| 9608.020 | --- | --- | --- | --- | --- | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| 12010.025 | --- | --- | --- | --- | --- | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| 14412.030 | --- | --- | --- | --- | --- | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| 16814.035 | --- | --- | --- | --- | --- | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| 19216.040 | --- | --- | --- | --- | --- | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| 21618.045 | --- | --- | --- | --- | --- | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| 24020.050 | --- | --- | --- | --- | --- | --- | --- | 74.0 | 54.0 | --- | --- | --- |

Operation Mode : Receiving

Fundamental Frequency : Local Frequency : 2402.000 MHz

Test Date : Sep. 20, 2010 Temperature : 22 °C Humidity : 49 %

| Frequency (MHz) | Reading (dBuV) | | | | Factor (dB) Corr. | Result @3m (dBuV/m) | | Limit @3m (dBuV/m) | | Margin (dB) | Table Deg. (Deg.) | Ant. High (m) |
|--------------------|----------------|----------|-----------|----------|-------------------------|------------------------|-----|-----------------------|------|----------------|-------------------------|---------------------|
| | H Peak | V Ave | H Peak | V Ave | | Peak | Ave | Peak | Ave | | | |
| * 2402.000 | --- | --- | --- | --- | --- | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| * 4804.000 | --- | --- | --- | --- | --- | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| * 7206.000 | --- | --- | --- | --- | --- | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| * 9608.000 | --- | --- | --- | --- | --- | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| * 12010.000 | --- | --- | --- | --- | --- | --- | --- | 74.0 | 54.0 | --- | --- | --- |

Note :

1. Item of margin shown in above table refer to average limit.
2. It is considered that the results of average comply with average limit when measuring data with a peak function detector meet the average limit. Mark "***" means that Peak result is meet average limit.
3. Remark "---" means that the emissions level is too low to be measured.
4. Remark "*" means the local oscillator frequency and its harmonics.
5. Item "Margin" referred to Average limit while there is only peak result.
6. The expanded uncertainty of the radiated emission tests is 3.53 dB.

B. Channel MiddleOperation Mode : TransmittingFundamental Frequency : 2441.000 MHzTest Date : Sep. 20, 2010 Temperature : 22 °C Humidity : 49 %

| Frequency (MHz) | Reading (dBuV) | | | | Factor (dB) Corr. | Result @3m (dBuV/m) | | Limit @3m (dBuV/m) | | Margin (dB) | Table Deg. (Deg.) | Ant. High (m) |
|--------------------|----------------|-----|------|-----|-------------------------|------------------------|-----|-----------------------|------|----------------|-------------------------|---------------------|
| | H | | V | | | Peak | Ave | Peak | Ave | | | |
| 4881.990 | 51.5 | --- | 52.2 | --- | -0.1 | 52.1 | --- | 74.0 | 54.0 | -1.9 | 79 | 1.60 |
| 7322.980 | --- | --- | --- | --- | --- | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| 9763.970 | --- | --- | --- | --- | --- | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| 12204.960 | --- | --- | --- | --- | --- | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| 14645.950 | --- | --- | --- | --- | --- | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| 17086.940 | --- | --- | --- | --- | --- | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| 19527.930 | --- | --- | --- | --- | --- | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| 21968.920 | --- | --- | --- | --- | --- | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| 24409.910 | --- | --- | --- | --- | --- | --- | --- | 74.0 | 54.0 | --- | --- | --- |

Operation Mode : ReceivingFundamental Frequency : Local Frequency : 2441.000 MHzTest Date : Sep. 20, 2010 Temperature : 22 °C Humidity : 49 %

| Frequency (MHz) | Reading (dBuV) | | | | Factor (dB) Corr. | Result @3m (dBuV/m) | | Limit @3m (dBuV/m) | | Margin (dB) | Table Deg. (Deg.) | Ant. High (m) |
|--------------------|----------------|-----|-----|-----|-------------------------|------------------------|-----|-----------------------|------|----------------|-------------------------|---------------------|
| | H | | V | | | Peak | Ave | Peak | Ave | | | |
| * 2441.000 | --- | --- | --- | --- | --- | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| * 4882.000 | --- | --- | --- | --- | --- | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| * 7323.000 | --- | --- | --- | --- | --- | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| * 9764.000 | --- | --- | --- | --- | --- | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| * 12205.000 | --- | --- | --- | --- | --- | --- | --- | 74.0 | 54.0 | --- | --- | --- |

Note :

1. Item of margin shown in above table refer to average limit.
2. It is considered that the results of average comply with average limit when measuring data with a peak function detector meet the average limit. Mark "***" means that Peak result is meet average limit.
3. Remark "---" means that the emissions level is too low to be measured.
4. Remark "*" means the local oscillator frequency and its harmonics.
5. Item "Margin" referred to Average limit while there is only peak result.
6. The expanded uncertainty of the radiated emission tests is 3.53 dB.

C. Channel HighOperation Mode : TransmittingFundamental Frequency : 2480.000 MHzTest Date : Sep. 20, 2010 Temperature : 22 °C Humidity : 49 %

| Frequency (MHz) | Reading (dBuV) | | | | Factor (dB) Corr. | Result @3m (dBuV/m) | | Limit @3m (dBuV/m) | | Margin (dB) | Table Deg. (Deg.) | Ant. High (m) |
|--------------------|----------------|-----|------|-----|-------------------------|------------------------|-----|-----------------------|------|----------------|-------------------------|---------------------|
| | H | | V | | | Peak | Ave | Peak | Ave | | | |
| 4959.540 | 48.2 | --- | 48.1 | --- | -0.3 | 47.9 | --- | 74.0 | 54.0 | -6.1 | 83 | 1.50 |
| 7439.080 | --- | --- | --- | --- | --- | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| 9918.620 | --- | --- | --- | --- | --- | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| 12398.160 | --- | --- | --- | --- | --- | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| 14877.700 | --- | --- | --- | --- | --- | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| 17357.240 | --- | --- | --- | --- | --- | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| 19836.780 | --- | --- | --- | --- | --- | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| 22316.320 | --- | --- | --- | --- | --- | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| 24795.860 | --- | --- | --- | --- | --- | --- | --- | 74.0 | 54.0 | --- | --- | --- |

Operation Mode : ReceivingFundamental Frequency : Local Frequency : 2480.000 MHzTest Date : Sep. 20, 2010 Temperature : 22 °C Humidity : 49 %

| Frequency (MHz) | Reading (dBuV) | | | | Factor (dB) Corr. | Result @3m (dBuV/m) | | Limit @3m (dBuV/m) | | Margin (dB) | Table Deg. (Deg.) | Ant. High (m) |
|--------------------|----------------|-----|-----|-----|-------------------------|------------------------|-----|-----------------------|------|----------------|-------------------------|---------------------|
| | H | | V | | | Peak | Ave | Peak | Ave | | | |
| * 2480.000 | --- | --- | --- | --- | --- | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| * 4960.000 | --- | --- | --- | --- | --- | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| * 7440.000 | --- | --- | --- | --- | --- | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| * 9920.000 | --- | --- | --- | --- | --- | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| * 12400.000 | --- | --- | --- | --- | --- | --- | --- | 74.0 | 54.0 | --- | --- | --- |

Note :

1. Item of margin shown in above table refer to average limit.
2. It is considered that the results of average comply with average limit when measuring data with a peak function detector meet the average limit. Mark "***" means that Peak result is meet average limit.
3. Remark "---" means that the emissions level is too low to be measured.
4. Remark "*" means the local oscillator frequency and its harmonics.
5. Item "Margin" referred to Average limit while there is only peak result.
6. The expanded uncertainty of the radiated emission tests is 3.53 dB.

4.4.2 Radiated Emissions in Restricted Bands**Test Mode:Worse Case of GFSK**Operation Mode : Receiving /TransmittingTest Date : Sep. 20, 2010 Temperature : 22 °C Humidity : 49 %**Operation Mode :CH Low Restricted Frequency band : 2310MHz-2390MHz**

| Frequency (MHz) | Reading (dBuV) | | | | Factor (dB) Corr. | Result @3m (dBuV/m) | | Limit @3m (dBuV/m) | | Margin (dB) | Table Deg. (Deg.) | Ant. High (m) |
|--------------------|----------------|-----|------|-----|-------------------------|------------------------|-----|-----------------------|------|----------------|-------------------------|---------------------|
| | H | | V | | | Peak | Ave | Peak | Ave | | | |
| | Peak | Ave | Peak | Ave | | Peak | Ave | Peak | Ave | | | |
| 2384.560 | 54.9 | --- | 54.8 | --- | -7.2 | 47.7 | --- | 74.0 | 54.0 | -6.3 | 83 | 1.60 |
| 2389.610 | 52.8 | --- | 53.5 | --- | -7.2 | 46.3 | --- | 74.0 | 54.0 | -7.7 | 21 | 1.80 |

Operation Mode : CH Hiigh Restricted Frequency band : 2483.5MHz-2500MHz

| Frequency (MHz) | Reading (dBuV) | | | | Factor (dB) Corr. | Result @3m (dBuV/m) | | Limit @3m (dBuV/m) | | Margin (dB) | Table Deg. (Deg.) | Ant. High (m) |
|--------------------|----------------|-----|------|-----|-------------------------|------------------------|-----|-----------------------|------|----------------|-------------------------|---------------------|
| | H | | V | | | Peak | Ave | Peak | Ave | | | |
| | Peak | Ave | Peak | Ave | | Peak | Ave | Peak | Ave | | | |
| 2483.690 | 54.3 | --- | 54.9 | --- | -7.3 | 47.6 | --- | 74.0 | 54.0 | -6.4 | 57 | 1.60 |
| 2487.510 | 52.1 | --- | 52.8 | --- | -7.3 | 45.5 | --- | 74.0 | 54.0 | -8.5 | 27 | 1.60 |

Note :

1. Item of margin shown in above table refer to average limit.
2. It is considered that the results of average comply with average limit when measuring data with a peak function detector meet the average limit. Mark “***” means that Peak result is meet average limit.
3. Remark “---” means that the emissions level is too low to be measured.
4. Item “Margin” referred to Average limit while there is only peak result.
5. The expanded uncertainty of the radiated emission tests is 3.53 dB.

4.4.3 Other Emissions**Test Mode:Worse Case of GFSK****a) Emission frequencies below 1 GHz**Operation Mode : Bluetooth ModeTest Date : Sep. 20, 2010 Temperature : 22 °C Humidity : 49 %

| Frequency (MHz) | Ant-Pol H/V | Meter Reading (dBuV) | Corrected Factor (dB) | Result @3m (dBuV/m) | Limit @3m (dBuV/m) | Margin (dB) | Table Degree (Deg.) | Ant. High (m) |
|--------------------|----------------|----------------------------|-----------------------------|------------------------|-----------------------|----------------|---------------------------|---------------------|
| 159.81 | V | 14.8 | 14.6 | 29.4 | 43.5 | -14.1 | 57 | 1.0 |
| 168.48 | V | 8.5 | 14.9 | 23.4 | 43.5 | -20.1 | 326 | 1.0 |
| 193.14 | V | 7.1 | 17.9 | 25.0 | 43.5 | -18.5 | 130 | 1.1 |
| 218.35 | H | 6.5 | 18.7 | 25.2 | 46.0 | -20.8 | 190 | 1.5 |
| 223.77 | H | 6.8 | 18.9 | 25.7 | 46.0 | -20.3 | 3 | 1.5 |
| 237.59 | H | 9.4 | 19.6 | 29.0 | 46.0 | -17.0 | 264 | 1.4 |

Note :

1. Remark “---” means that the emissions level is too low to be measured.
2. The expanded uncertainty of the radiated emission tests is 3.53 dB.

b) Emission frequencies above 1 GHz

Radiated emission frequencies above 1 GHz to 25 GHz were too low to be measured with a pre-amplifier of 35 dB.

4.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor, High Pass Filter Loss (if used) and Cable Loss, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation calculation is as follows:

$$\mathbf{Result = Reading + Corrected Factor}$$

where Corrected Factor

$$= \text{Antenna FACTOR} + \text{Cable Loss} + \text{High Pass Filter Loss} - \text{Amplifier Gain}$$

4.6 Photos of Radiation Measuring Setup



5 CONDUCTED EMISSION MEASUREMENT

5.1 Description

This EUT is excused from investigation of conducted emission, for it is installed in a car radio which was powered by DC 12V only. According to §5.207 (d), measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines.

6 ANTENNA REQUIREMENT

6.1 Standard Applicable

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

6.2 Antenna Construction

The antenna is permanently mounted on main PCB, no consideration of replacement. Please see photos submitted in Exhibit B.

7 HOPPING CHANNEL SEPARATION


7.1 Standard Applicable

According to 15.247(a)(1), frequency hopping system shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

7.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. The EUT must have its hopping function enabled. Then set it to any one convenient frequency within its operating range.
3. Use the following spectrum analyzer settings:
 - Span = wide enough to capture the peaks of two adjacent channels
 - Resolution (or IF) Bandwidth (RBW) $\geq 1\%$ of the span
 - Video (or Average) Bandwidth (VBW) \geq RBW
 - Sweep = auto
 - Detector function = peak
 - Trace = max hold
4. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. Plot the result on the screen of spectrum analyzer.
5. Repeat above procedures until all frequencies measured were complete.

Figure 4 : Measurement configuration.



7.3 Measurement Equipment

| Equipment | Manufacturer | Model No. | Calibration Date | Next Cal. Date |
|-------------------|--------------------------|-----------|------------------|----------------|
| Spectrum Analyzer | Rohde & Schwarz | FSP40 | 2010/09/09 | 2011/09/09 |
| Attenuator | Weinschel Engineering | 1 | N/A | N/A |

7.4 Measurement Data

Test Date : Sep. 20, 2010 Temperature : 22 °C Humidity : 49 %

Test Mode: GFSK

- a) Channel Low : Adjacent Hopping Channel Separation is 1002 kHz
- b) Channel Middle : Adjacent Hopping Channel Separation is 1002 kHz
- c) Channel High : Adjacent Hopping Channel Separation is 1002 kHz

Test Mode: 8DPSK

- a) Channel Low : Adjacent Hopping Channel Separation is 1002 kHz
- b) Channel Middle : Adjacent Hopping Channel Separation is 1002 kHz
- c) Channel High : Adjacent Hopping Channel Separation is 1002 kHz


Note : The expanded uncertainty of the hopping channel separation tests is 2dB.

Test Mode: GFSK/Channel Low



*RBW 30 kHz Delta 1 [T1]
*VBW 100 kHz -0.04 dB
SWT 5 ms 1.002000000 MHz

Ref 20.5 dBm *Att 20 dB

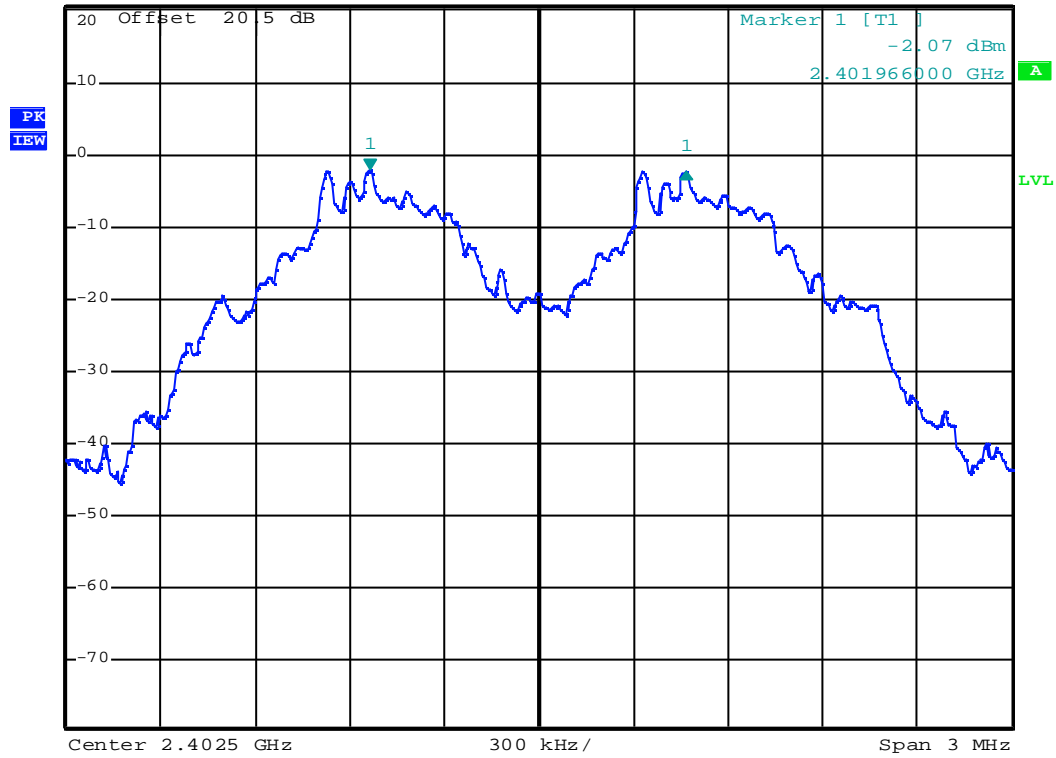

Test Mode: GFSK/Channel Middle




*RBW 30 kHz Delta 1 [T1]
*VBW 100 kHz -0.17 dB
SWT 5 ms 1.002000000 MHz

Ref 20.5 dBm

*Att 20 dB

1 PK
VIEW

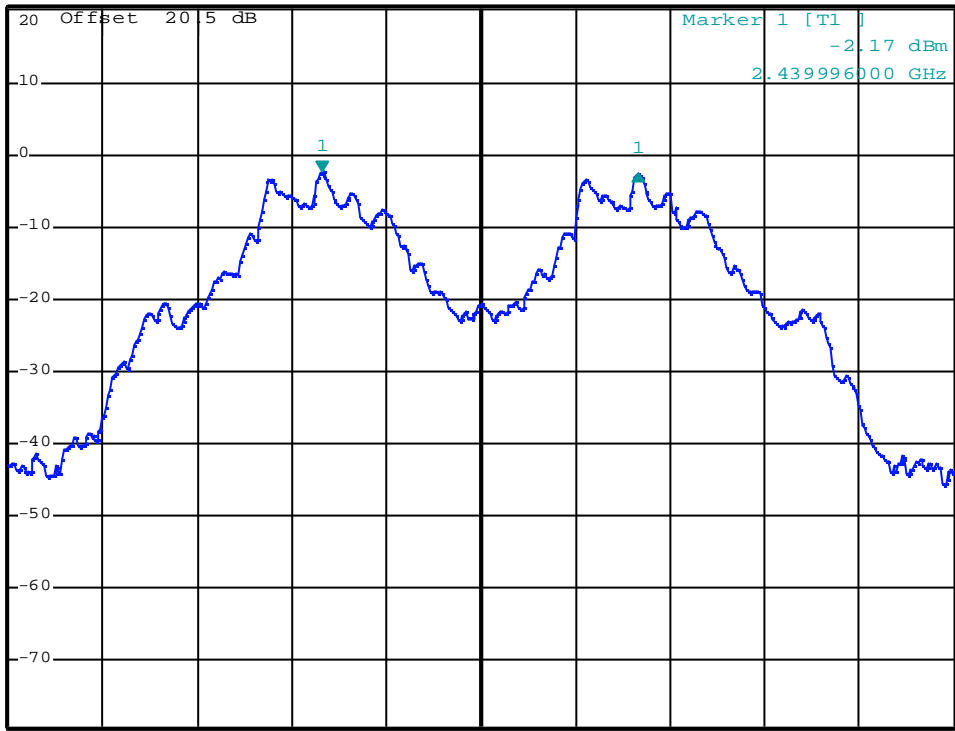

Test Mode: GFSK/Channel High




*RBW 30 kHz Delta 1 [T1]
*VBW 100 kHz -0.03 dB
SWT 5 ms 1.002000000 MHz

Ref 20.5 dBm

*Att 20 dB


1 PK
VIEW

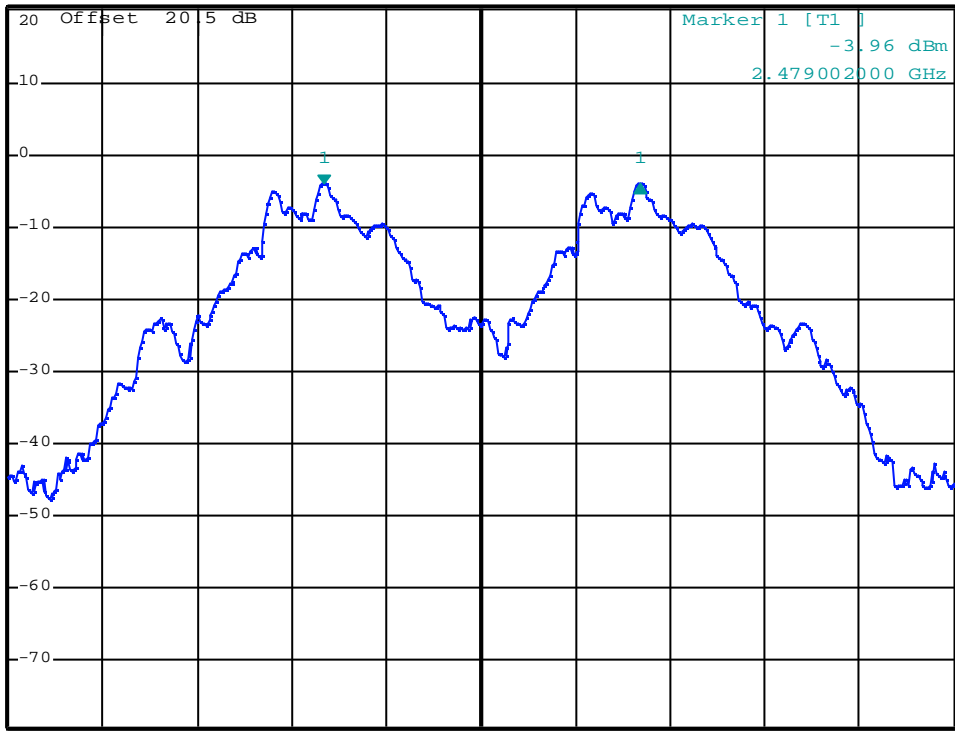

Test Mode: 8DPSK/Channel Low




Ref 21 dBm *Att 0 dB *RBW 30 kHz Delta 1 [T2] *VBW 100 kHz 0.09 dB SWT 5 ms 1.002000000 MHz

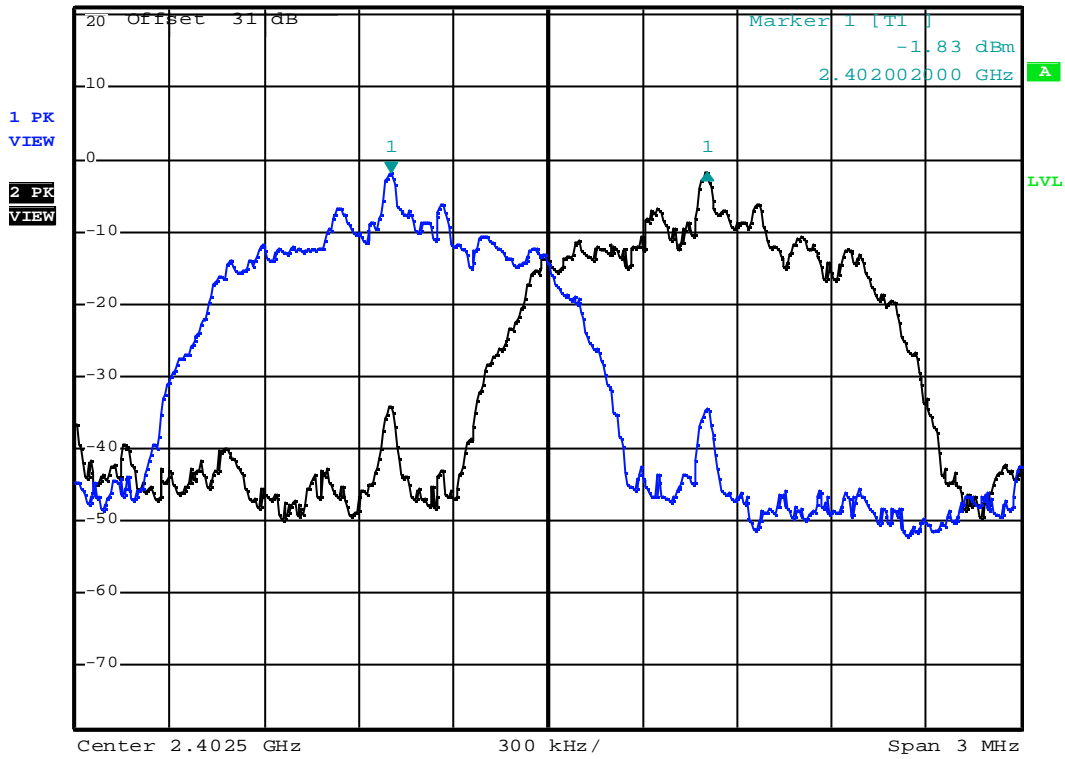


Test Mode: 8DPSK/Channel Middle



Ref 21 dBm *Att 0 dB *RBW 30 kHz Delta 1 [T2]
*VBW 100 kHz 0.07 dB
SWT 5 ms 1.002000000 MHz

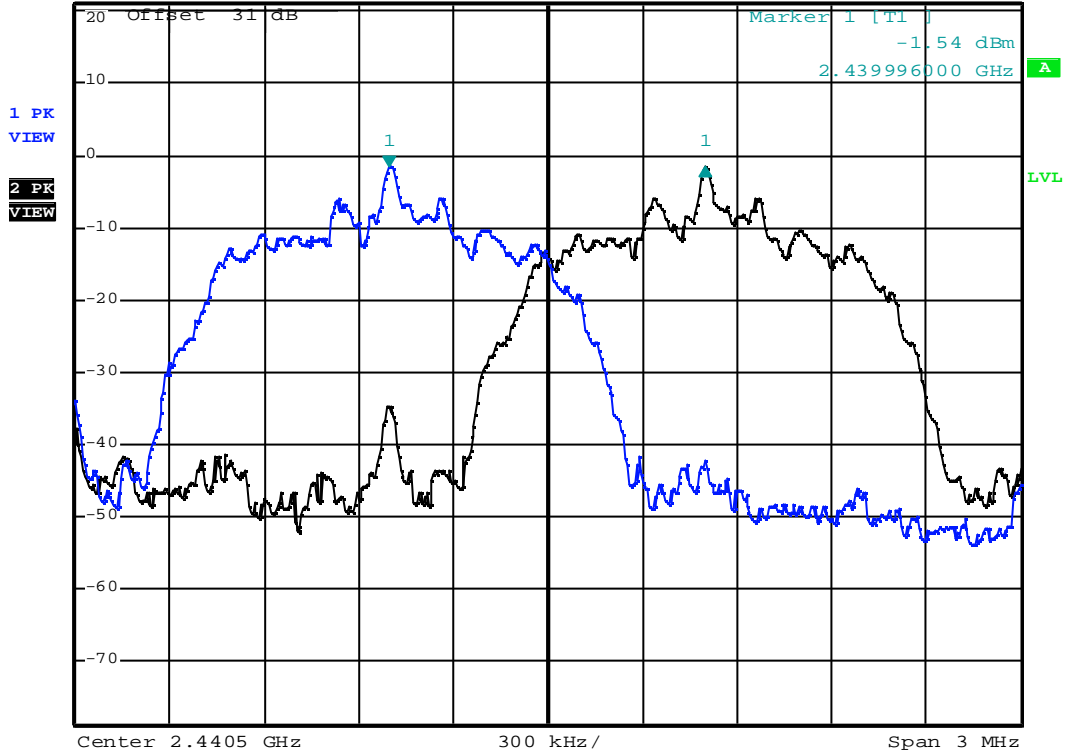

Test Mode: 8DPSK/Channel High

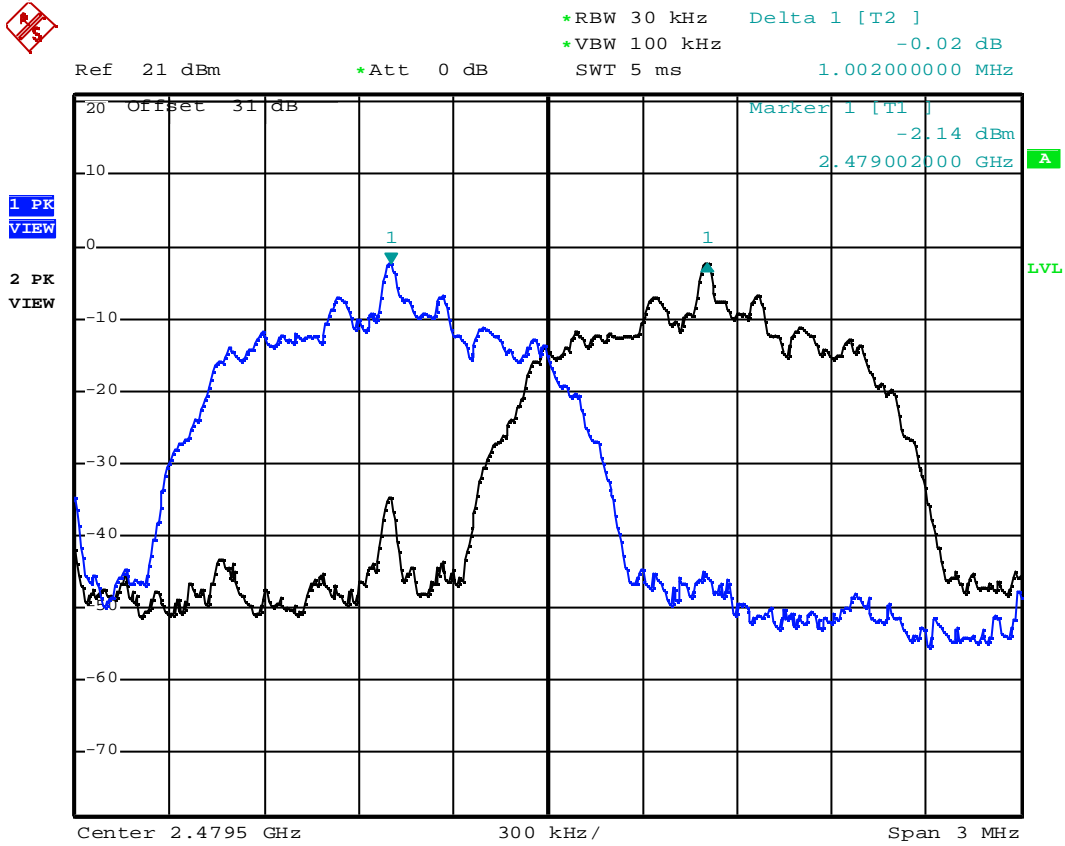

8 NUMBER OF HOPPING FREQUENCY USED

8.1 Standard Applicable

According to 15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 non-overlapping channels.

8.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. The EUT must have its hopping function enabled.
3. Use the following spectrum analyzer settings:
 - Span = the frequency band of operation
 - RBW \geq 1% of the span
 - VBW \geq RBW
 - Sweep = auto
 - Detector function = peak
 - Trace = max hold
4. Allow the trace to stabilize. Plot the result on the screen of spectrum analyzer.
5. Repeat above procedures until all frequencies measured were complete.

8.3 Measurement Equipment

| Equipment | Manufacturer | Model No. | Calibration Date | Next Cal. Date |
|-------------------|--------------------------|-----------|------------------|----------------|
| Spectrum Analyzer | Rohde & Schwarz | FSP40 | 2010/09/09 | 2011/09/09 |
| Attenuator | Weinschel Engineering | 1 | N/A | N/A |

8.4 Measurement Data

Test Date : Sep. 20, 2010 Temperature : 22 °C Humidity : 49 %

Test Mode: GFSK & 8DPSK

There are 79 hopping frequencies used.


Note : The expanded uncertainty of number of hopping frequency used tests is 2dB.

Test Mode: GFSK/Channel Low



* RBW 30 kHz
* VBW 100 kHz
SWT 35 ms

Ref 20.5 dBm * Att 20 dB

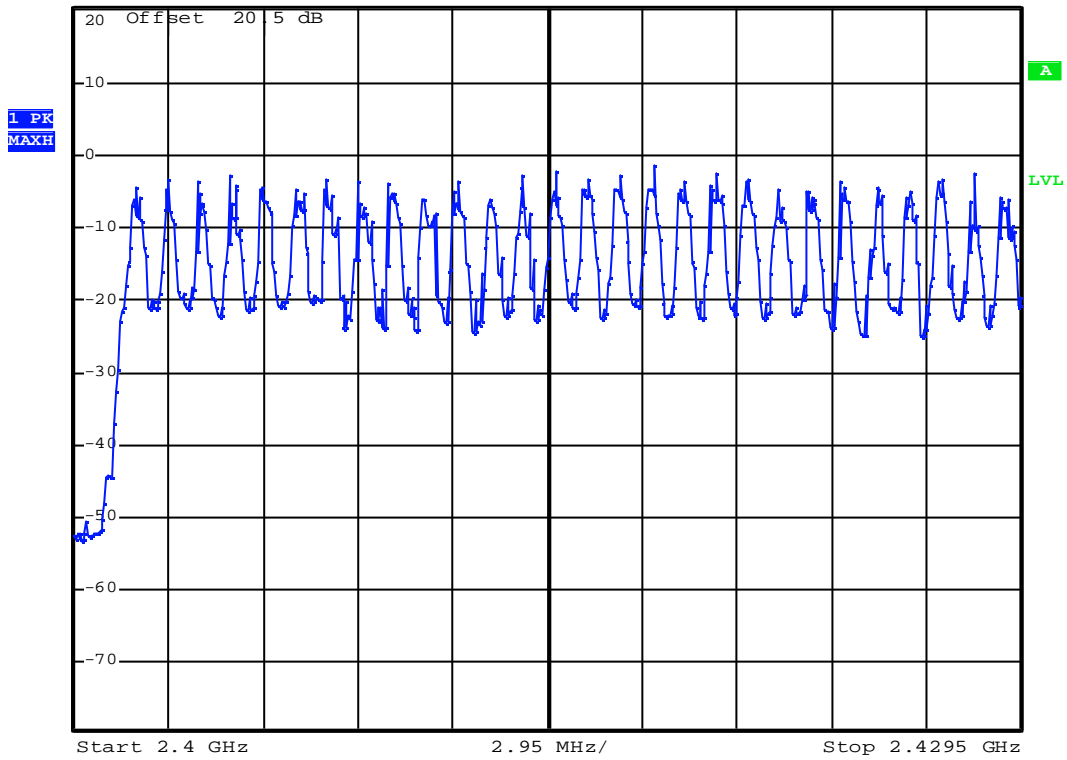


Test Mode: GFSK /Channel Middle



*RBW 30 kHz
*VBW 100 kHz
SWT 35 ms

Ref 20.5 dBm

*Att 20 dB

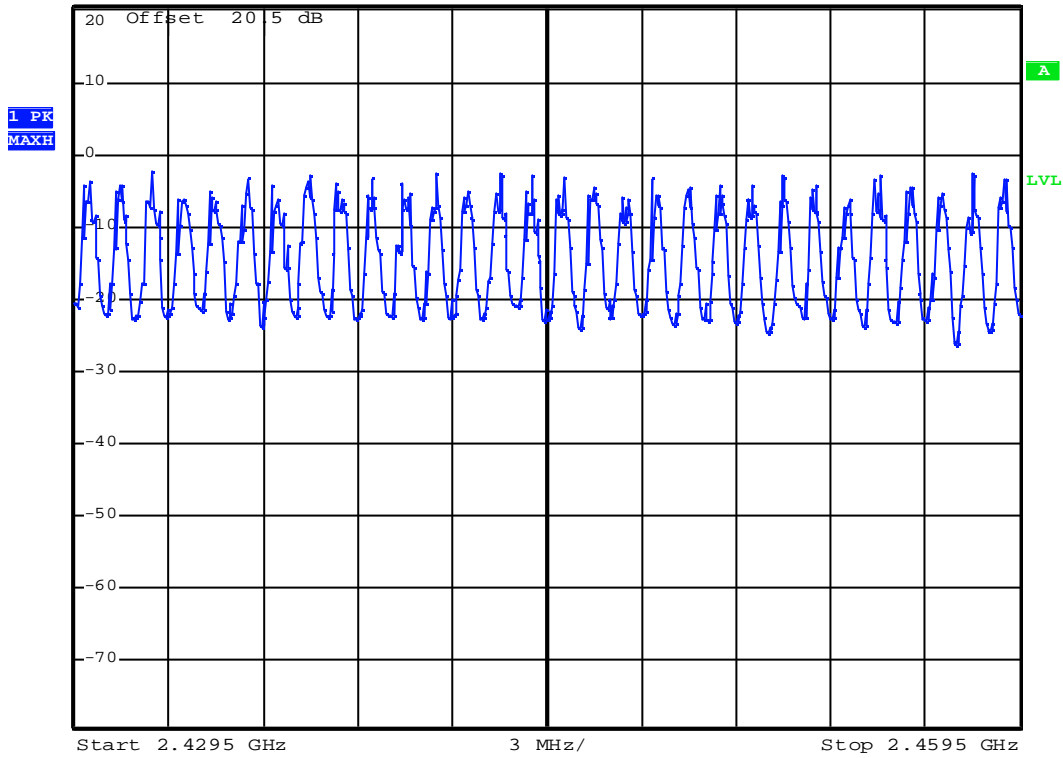


Test Mode: GFSK/Channel High



*RBW 30 kHz
*VBW 100 kHz
SWT 35 ms


Ref 20.5 dBm *Att 20 dB

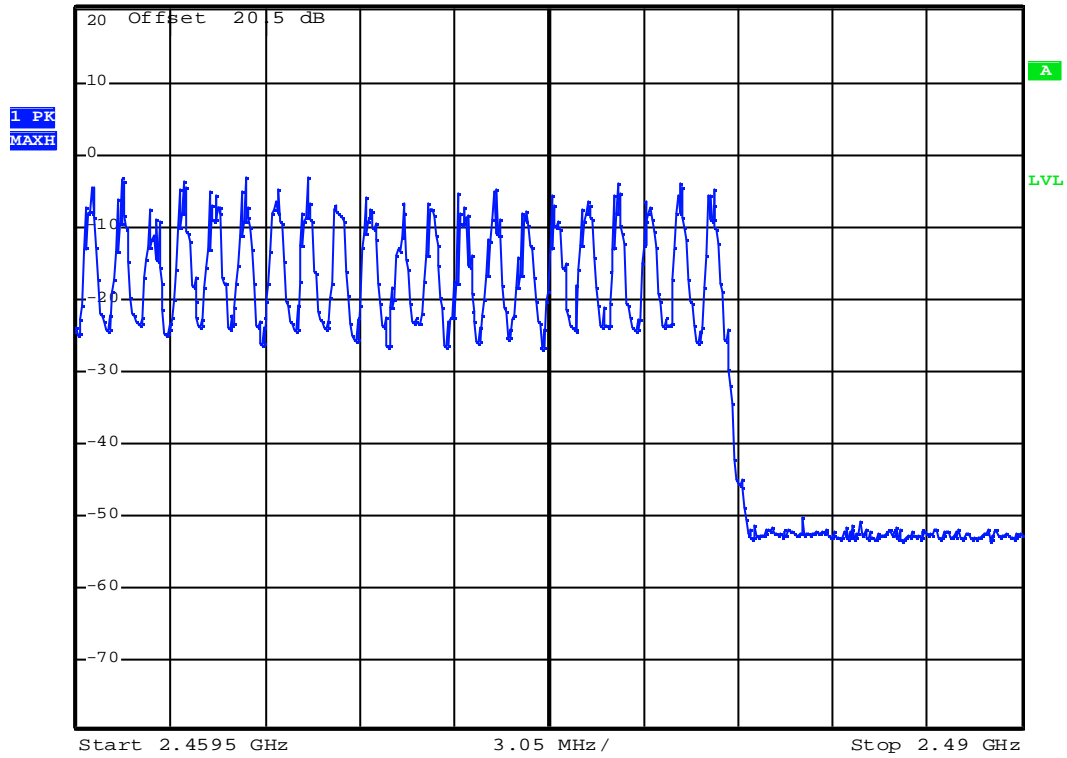

Test Mode: 8DPSK/Channel Low



Ref 21 dBm *Att 0 dB *RBW 30 kHz
*VBW 100 kHz
SWT 35 ms

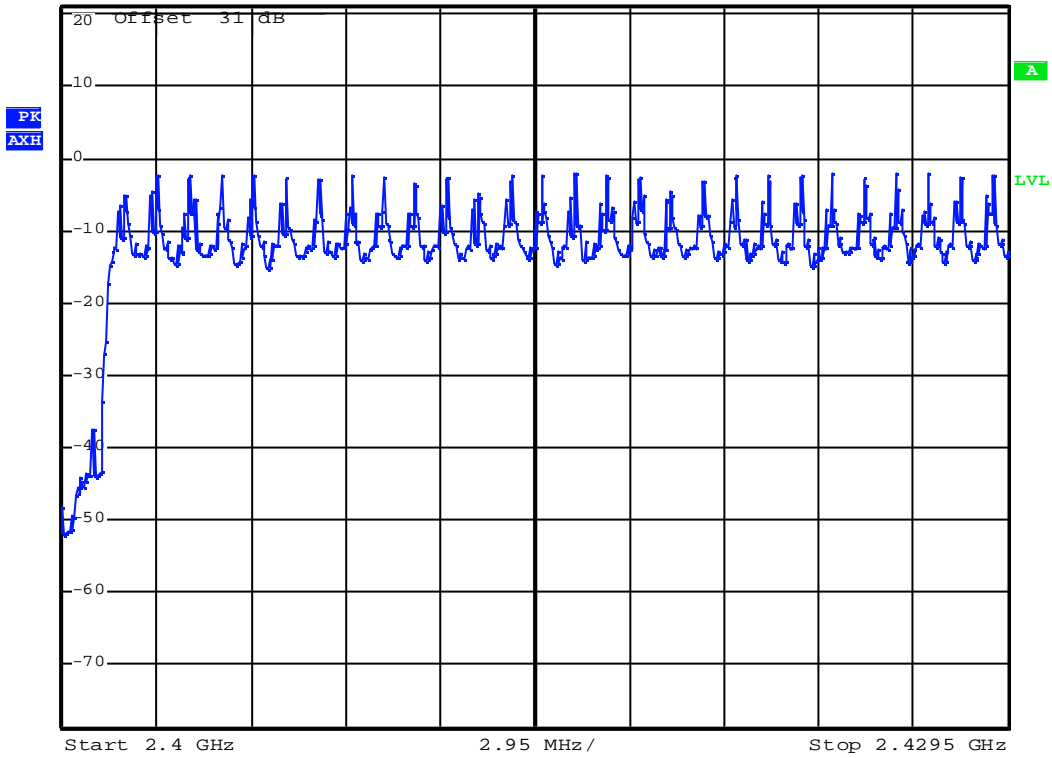

Test Mode: 8DPSK/Channel Middle




*RBW 30 kHz
*VBW 100 kHz
SWT 35 ms

Ref 21 dBm

*Att 0 dB

1 PK
MAXH

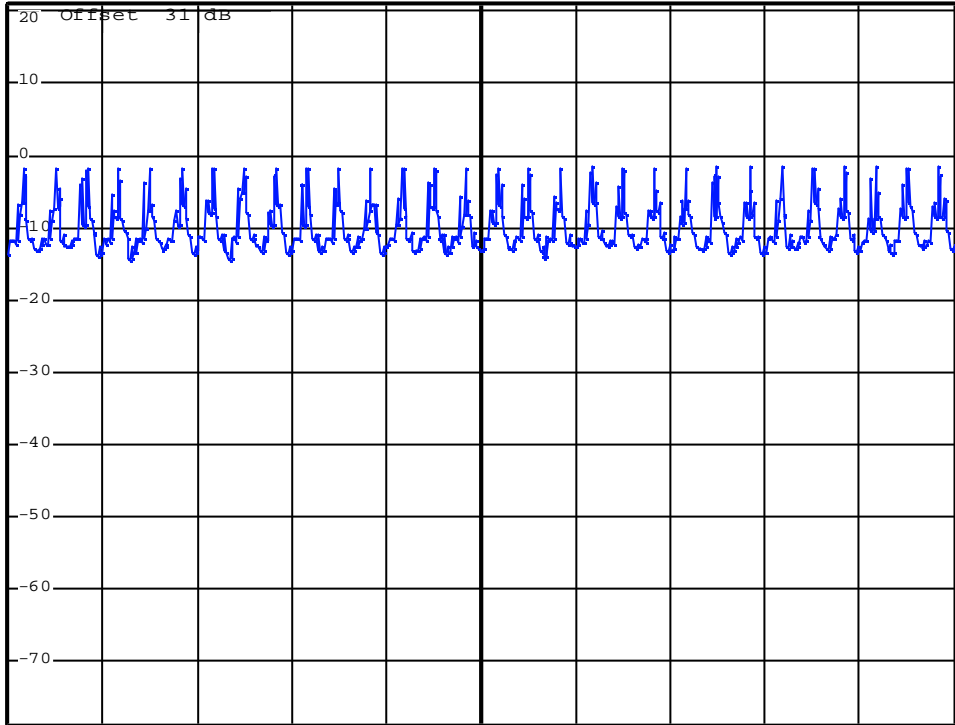

Test Mode: 8DPSK/Channel High




*RBW 30 kHz
*VBW 100 kHz
SWT 35 ms

Ref 21 dBm

*Att 0 dB

1 PK
MAXH

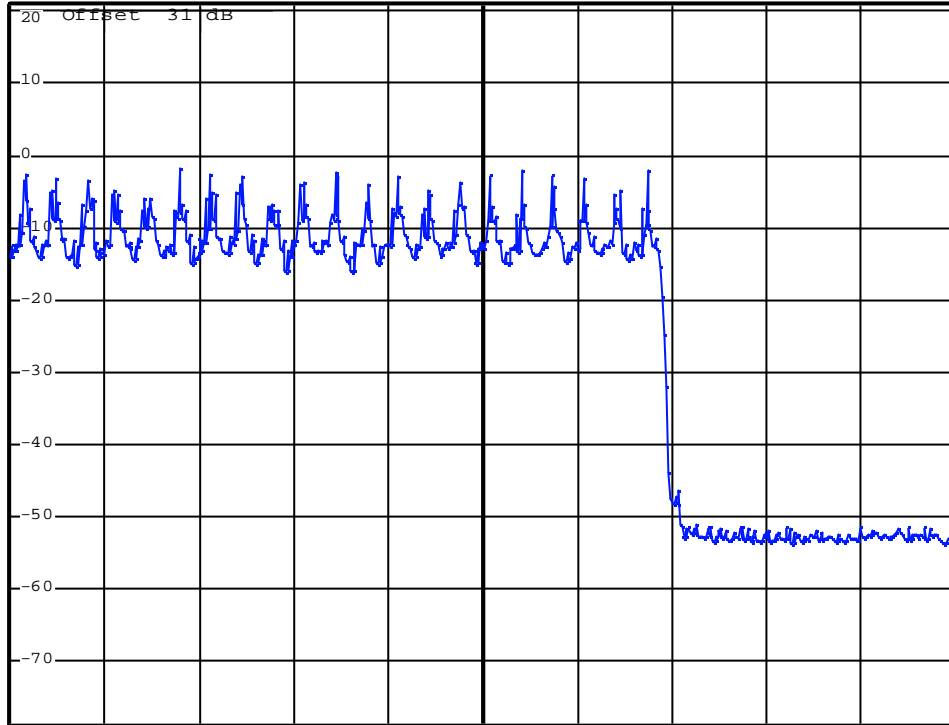

Start 2.4595 GHz

3.05 MHz/

Stop 2.49 GHz

9 CHANNEL BANDWIDTH

9.1 Standard Applicable

According to 15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudorandomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

9.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
3. Use the following spectrum analyzer settings:
 - Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel
 - RBW \geq 1% of the 20 dB bandwidth
 - VBW \geq RBW
 - Sweep = auto
 - Detector function = peak
 - Trace = max hold
4. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission. Plot the result on the screen of spectrum analyzer.
5. Repeat above procedures until all frequencies measured were complete.

9.3 Measurement Equipment

| Equipment | Manufacturer | Model No. | Calibration Date | Next Cal. Date |
|-------------------|--------------------------|-----------|------------------|----------------|
| Spectrum Analyzer | Rohde & Schwarz | FSP40 | 2010/09/09 | 2011/09/09 |
| Attenuator | Weinschel Engineering | 1 | N/A | N/A |

9.4 Measurement Data

Test Date : Sep. 20, 2010 Temperature : 22 °C Humidity : 49 %

Test Mode: GFSK

- a) Channel Low : Channel Bandwidth is 0.906 MHz
- b) Channel Middle : Channel Bandwidth is 0.864 MHz
- c) Channel High : Channel Bandwidth is 0.816 MHz

Test Mode: 8DPSK

- a) Channel Low : Channel Bandwidth is 1.206 MHz
- b) Channel Middle : Channel Bandwidth is 1.212 MHz
- c) Channel High : Channel Bandwidth is 1.212 MHz

Note : The expanded uncertainty of channel bandwidth tests is 2dB.

Test Mode: 8DPSK/Channel Low




*RBW 30 kHz Marker 1 [T1]
VBW 100 kHz -1.85 dBm
SWT 5 ms 2.402000000 GHz

Ref 21 dBm

*Att 0 dB

PK
IEW

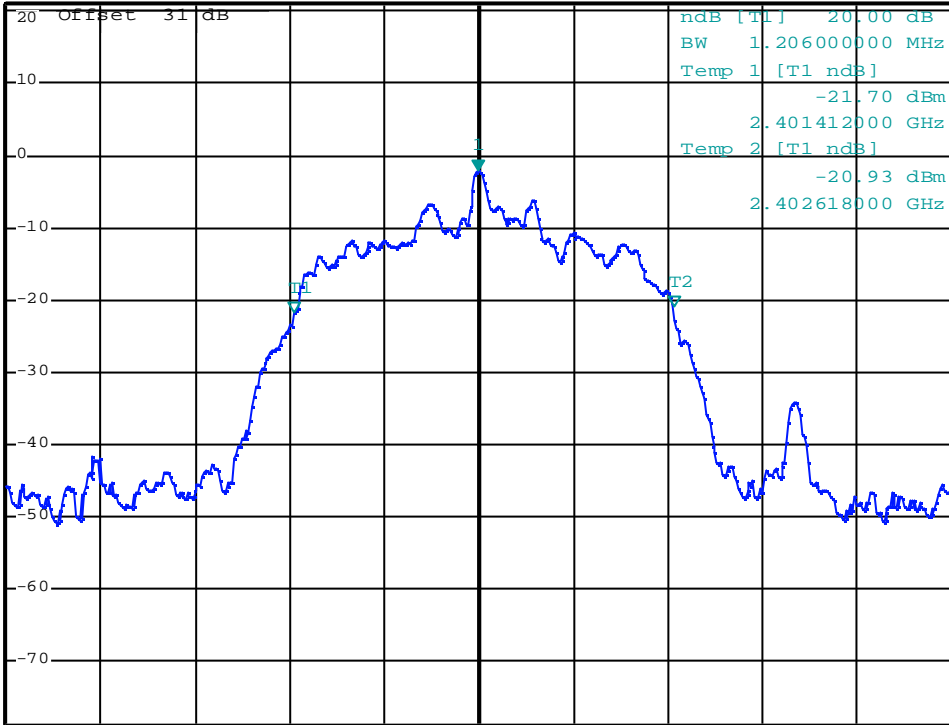


Center 2.402 GHz

300 kHz/

Span 3 MHz

Test Mode: 8DPSK /Channel Middle

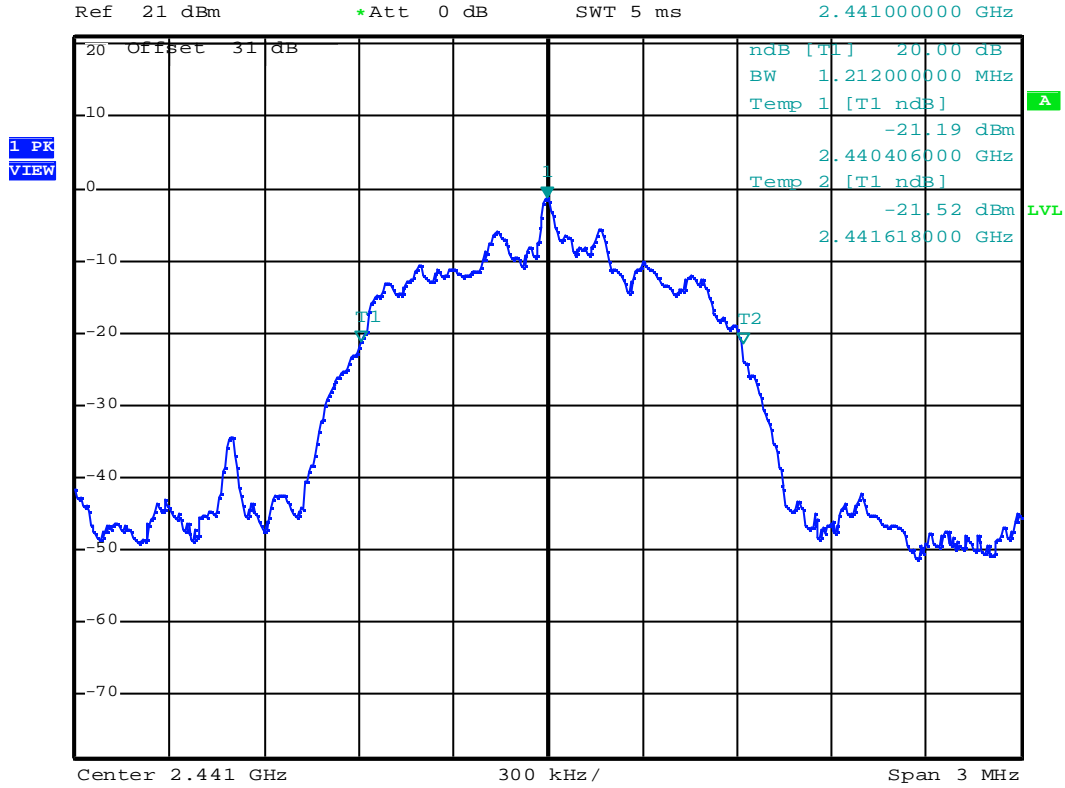

Test Mode:8DPSK/Channel High




*RBW 30 kHz Marker 1 [T1]
*VBW 100 kHz -2.07 dBm
SWT 5 ms 2.480000000 GHz

Ref 21 dBm

*Att 0 dB

1 PK
VIEW

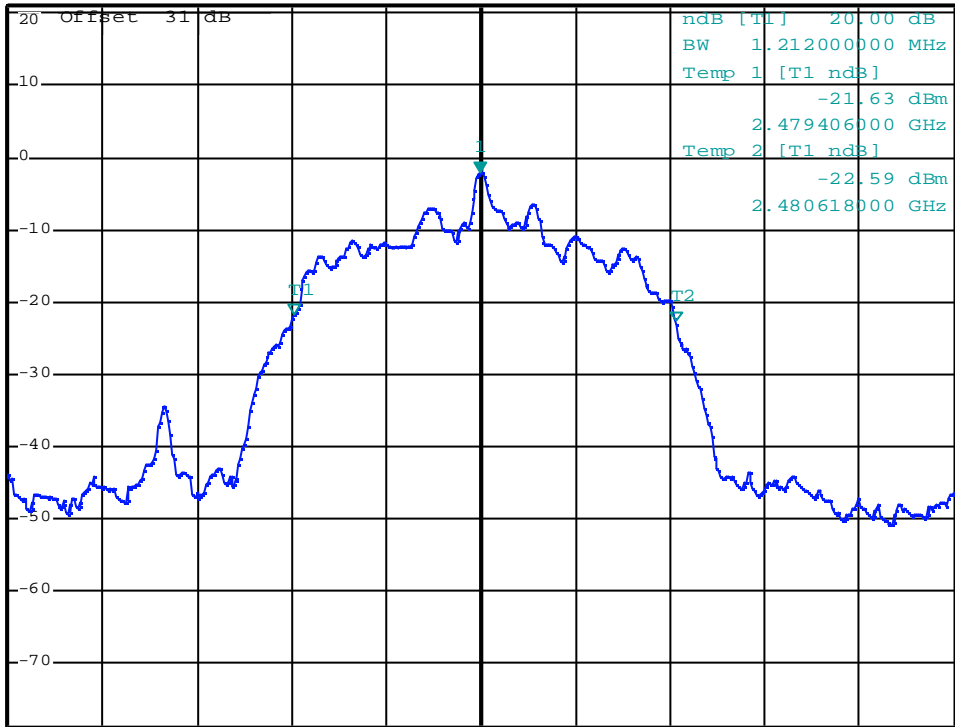

A

LVL

Center 2.48 GHz

300 kHz/

Span 3 MHz

10 DWELL TIME ON EACH CHANNEL

10.1 Standard Applicable

According to 15.247(a)(1)(iii), for frequency hopping system operating in the 2400-2483.5 band, the average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

10.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. The EUT must have its hopping function enabled.
3. Use the following spectrum analyzer settings:
 - Span = zero span, centered on a hopping channel
 - RBW = 1 MHz
 - VBW \geq RBW
 - Sweep = as necessary to capture the entire dwell time per hopping channel
 - Detector function = peak
 - Trace = max hold
4. Use the marker-delta function to determine the dwell time. Plot the result on the screen of spectrum analyzer.
5. Repeat above procedures until all frequencies measured were complete.

10.3 Measurement Equipment

| Equipment | Manufacturer | Model No. | Calibration Date | Next Cal. Date |
|-------------------|--------------------------|-----------|------------------|----------------|
| Spectrum Analyzer | Rohde & Schwarz | FSP40 | 2010/09/09 | 2011/09/09 |
| Attenuator | Weinschel Engineering | 1 | N/A | N/A |

10.4 Measurement Data

Test Mode: GFSK

Test Date : Sep. 20, 2010 Temperature : 22 °C Humidity : 49 %

$$\text{Period} = 0.4(\text{seconds}) \times 79(\text{channels}) = 31.6 \text{ seconds}$$

A. DH1 Mode

The Bluetooth system hops at a rate of 1600 times per second. This means there are 1600 timeslots in one second. The DH1 data rate operates on a one-slot transmission and one-slot receiving basis. Thus there are $1600/(1+1) = 800$ transmissions per second. In one period for each particular channel there are $10.13 \times 31.6 = 320.1$ times of transmissions.

a) Channel Low : the dwell time is $0.550\text{ms} \times 320.1 = 176.055 \text{ ms}$

The maximum time of occupancy for a particular channel is 176.055ms in any 31.6 second period, which is less than the 400ms allowed by the rules; therefore, it meets the requirements of this section.

B. DH3 Mode

The Bluetooth system hops at a rate of 1600 times per second. This means there are 1600 timeslots in one second. The DH3 data rate operates on a three-slot transmission and one-slot receiving basis. Thus there are $1600/(3+1) = 400$ transmissions per second. In one period for each particular channel there are $5.06 \times 31.6 = 159.9$ times of transmissions.

a) Channel Low : the dwell time is $1.820\text{ms} \times 159.9 = 291.018 \text{ ms}$

The maximum time of occupancy for a particular channel is 291.018ms in any 31.6 second period, which is less than the 400 ms allowed by the rules; therefore, it meets the requirements of this section.

C. DH5 Mode

The Bluetooth system hops at a rate of 1600 times per second. This means there are 1600 timeslots in one second. The DH5 data rate operates on a five-slot transmission and one-slot receiving basis. Thus there are $1600/(5+1) = 266.7$ transmissions per second. In one period for each particular channel there are $3.38 \times 31.6 = 106.81$ times of transmissions.

a) Channel Low : the dwell time is $3.120\text{ms} \times 106.81 = 333.247 \text{ ms}$

The maximum time of occupancy for a particular channel is 333.247ms in any 31.6 second period, which is less than the 400 ms allowed by the rules; therefore, it meets the requirements of this section.

Note : The expanded uncertainty of dwell time on each channel tests is 2dB.

Test Mode: 8DPSK

Test Date : Nov. 08, 2010 Temperature : 23 °C Humidity : 56 %

$$\text{Period} = 0.4(\text{seconds}) \times 79(\text{channels}) = 31.6 \text{ seconds}$$

A. DH1 Mode

The Bluetooth system hops at a rate of 1600 times per second. This means there are 1600 timeslots in one second. The DH1 data rate operates on a one-slot transmission and one-slot receiving basis. Thus there are $1600/(1+1) = 800$ transmissions per second. In one period for each particular channel there are $10.13 \times 31.6 = 320.1$ times of transmissions.

Channel Low : the dwell time is $0.460\text{ms} \times 320.1 = 147.246 \text{ ms}$

The maximum time of occupancy for a particular channel is 153.648ms in any 31.6 second period, which is less than the 400ms allowed by the rules; therefore, it meets the requirements of this section.

B. DH3 Mode

The Bluetooth system hops at a rate of 1600 times per second. This means there are 1600 timeslots in one second. The DH3 data rate operates on a three-slot transmission and one-slot receiving basis. Thus there are $1600/(3+1) = 400$ transmissions per second. In one period for each particular channel there are $5.06 \times 31.6 = 159.9$ times of transmissions.

Channel Low : the dwell time is $1.74\text{ms} \times 159.9 = 278.226 \text{ ms}$

The maximum time of occupancy for a particular channel is 281.904ms in any 31.6 second period, which is less than the 400 ms allowed by the rules; therefore, it meets the requirements of this section.

C. DH5 Mode

The Bluetooth system hops at a rate of 1600 times per second. This means there are 1600 timeslots in one second. The DH5 data rate operates on a five-slot transmission and one-slot receiving basis. Thus there are $1600/(5+1) = 266.7$ transmissions per second. In one period for each particular channel there are $3.38 \times 31.6 = 106.81$ times of transmissions.

a) Channel Low : the dwell time is $2.98\text{ms} \times 106.81 = 318.293 \text{ ms}$


The maximum time of occupancy for a particular channel is 314.983ms in any 31.6 second period, which is less than the 400 ms allowed by the rules; therefore, it meets the requirements of this section.

Note : The expanded uncertainty of dwell time on each channel tests is 2dB.

Mode: GFSK/Channel Low; DH1



Ref 20.5 dBm *Att 20 dB RBW 1 MHz Delta 1 [T1]
VBW 3 MHz -0.14 dB
SWT 5 ms 550.000000 μs

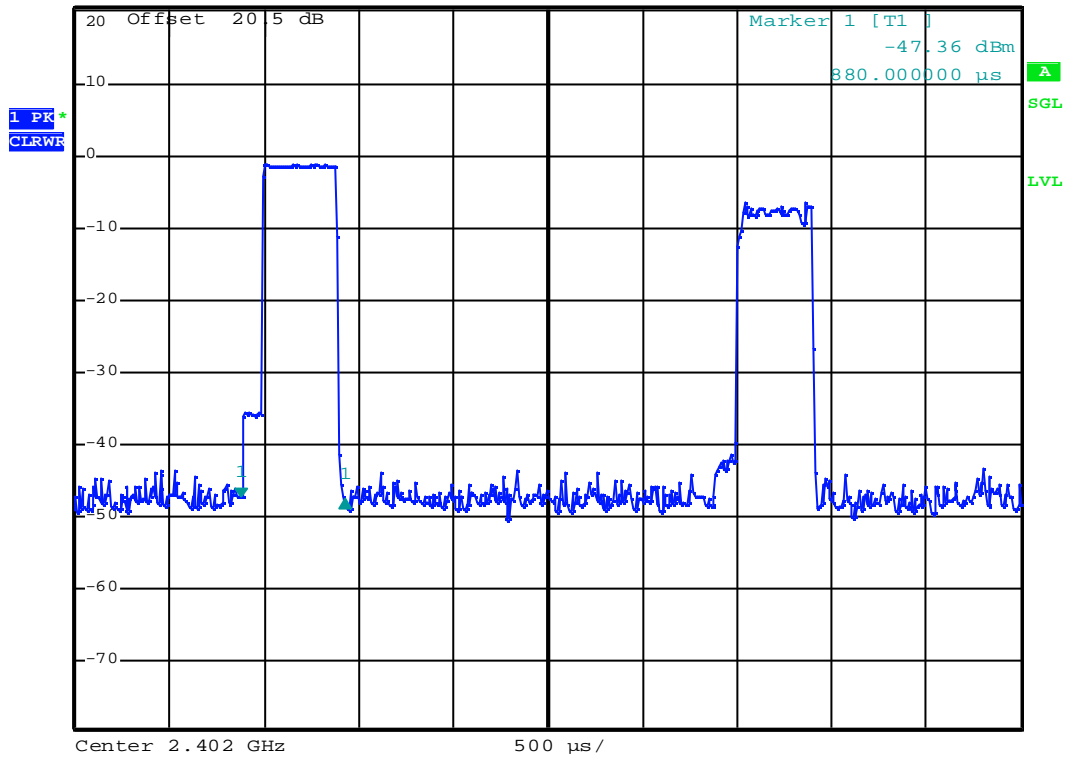


Mode: GFSK/Channel Low; DH3



RBW 1 MHz Delta 1 [T1]
VBW 3 MHz 1.57 dB
SWT 10 ms 1.820000 ms

Ref 20.5 dBm *Att 20 dB

1 PK*
CLRWF

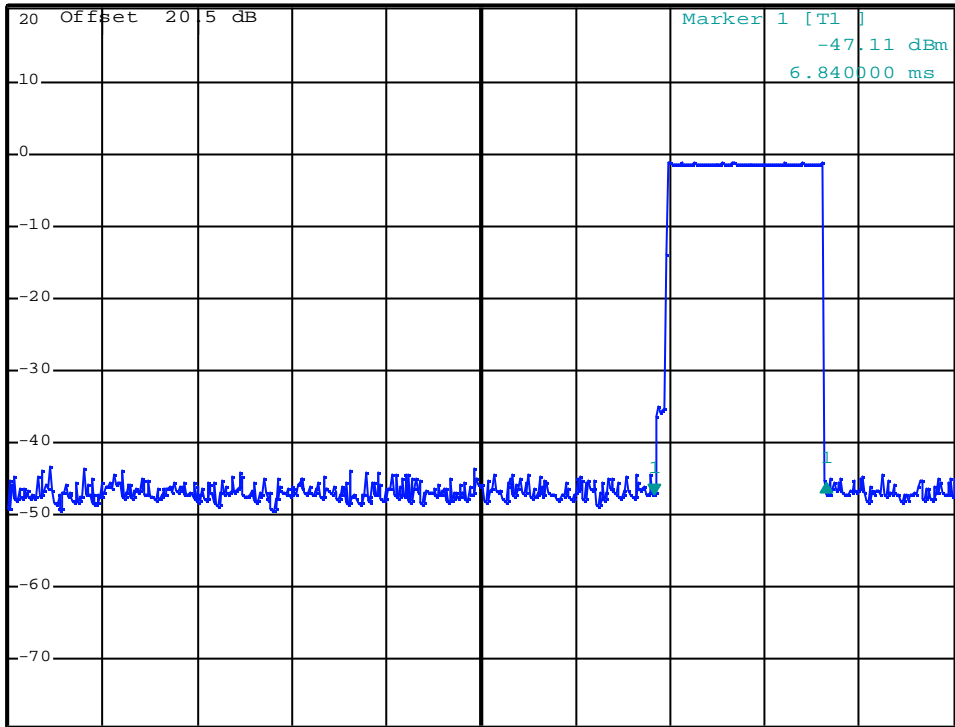

Center 2.402 GHz 1 ms/


Mode: GFSK/Channel Low; DH5



RBW 1 MHz Delta 1 [T1]
VBW 3 MHz -0.00 dB
SWT 20 ms 3.120000 ms

Ref 20.5 dBm *Att 20 dB

1 PK*
CLRWF

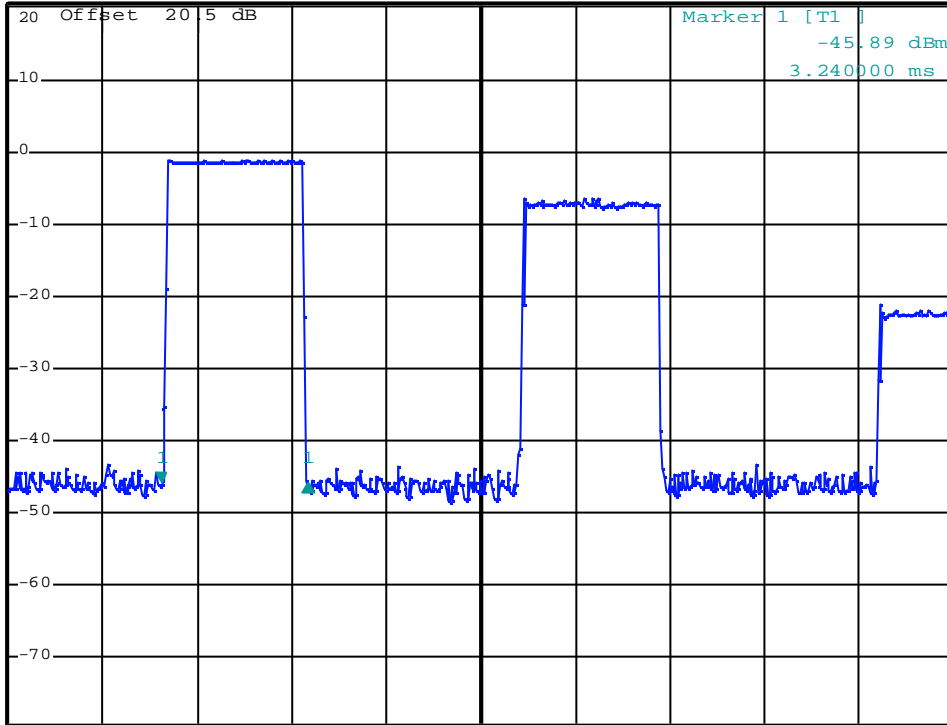


Mode: 8DPSK/Channel Low; DH1



RBW 1 MHz Delta 1 [T1]
VBW 3 MHz -2.90 dB
SWT 5 ms 460.000000 μ s

Ref 20 dBm *Att 10 dB


1 PK*
VIEW

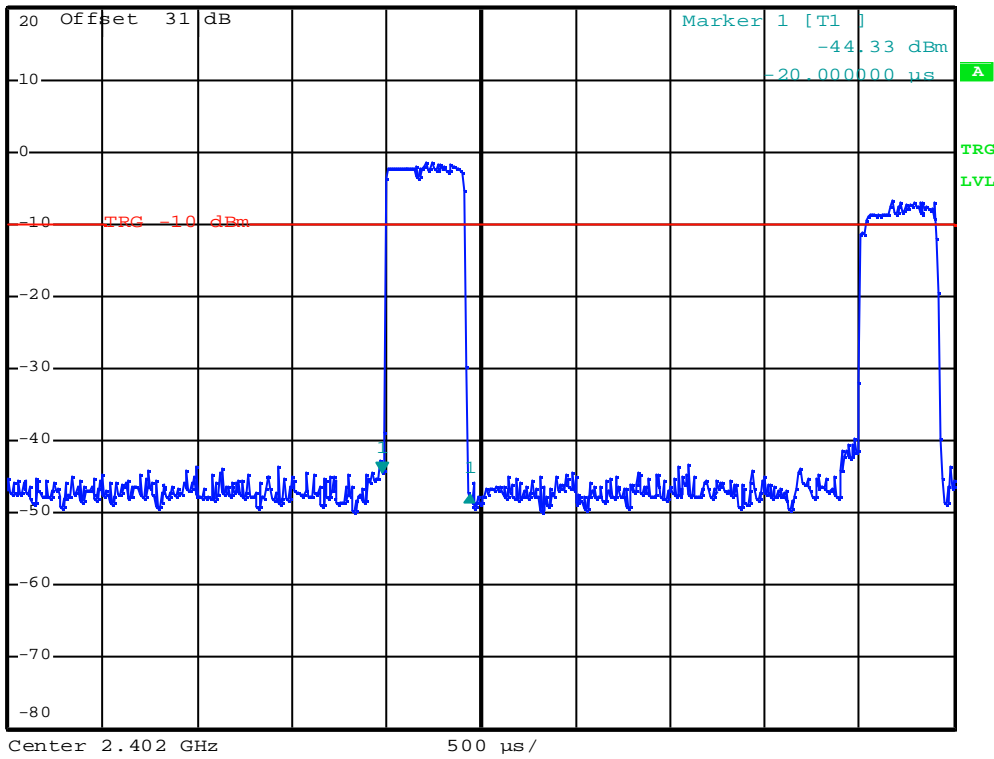

Mode: 8DPSK/Channel Low; DH3



RBW 1 MHz Delta 1 [T1]
VBW 3 MHz -2.64 dB
SWT 10 ms 1.740000 ms

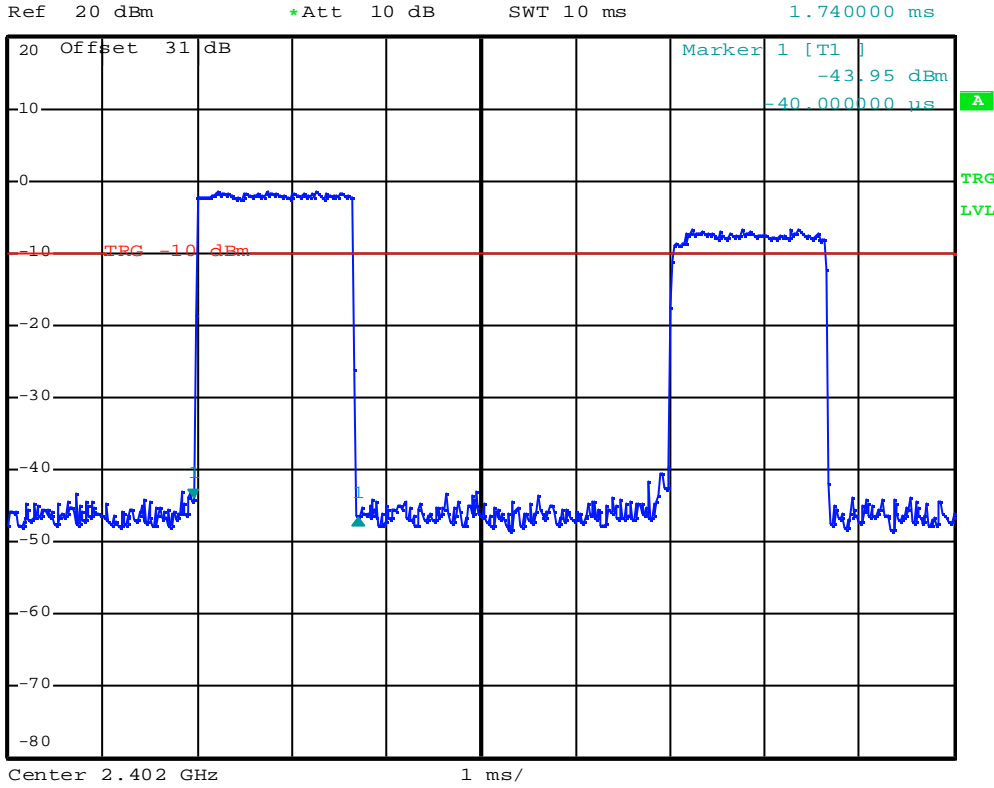


Mode: 8DPSK/Channel Low; DH5



RBW 1 MHz Delta 1 [T1]
VBW 3 MHz -0.80 dB
SWT 10 ms 2.980000 ms

Ref 20 dBm *Att 10 dB

1 PK*
VIEW

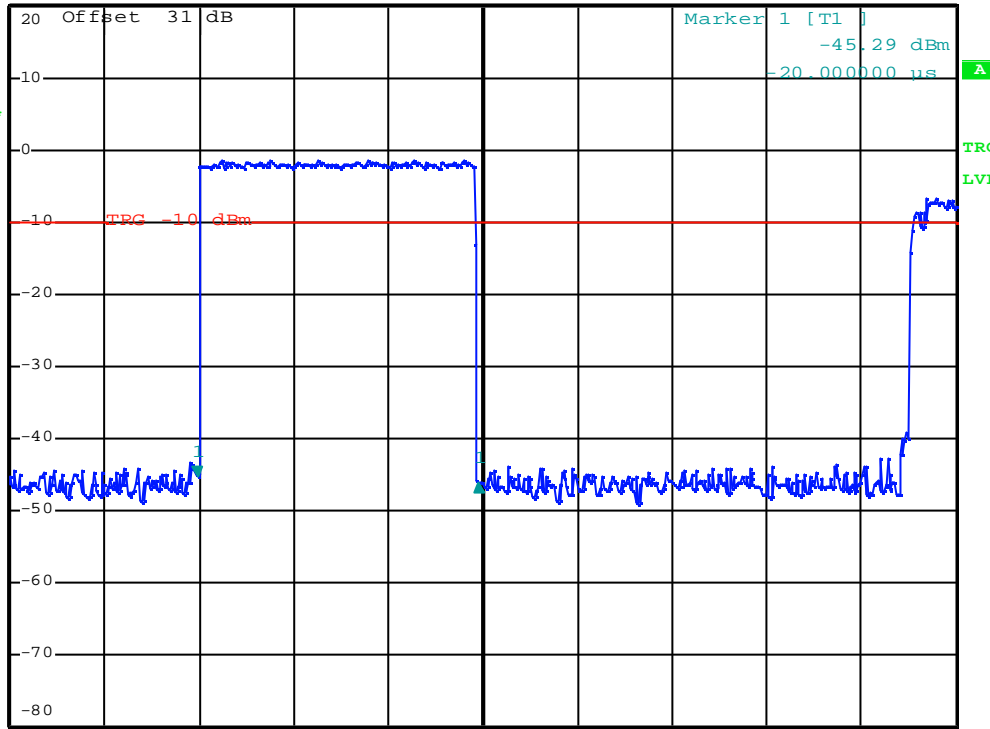

Center 2.402 GHz 1 ms/

11 OUTPUT POWER MEASUREMENT

11.1 Standard Applicable

According to 15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt.

For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

11.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Use the following spectrum analyzer settings:
 - Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel
 - RBW > the 20 dB bandwidth of the emission being measured
 - VBW \geq RBW
 - Sweep = auto
 - Detector function = peak
 - Trace = max hold
4. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power. Plot the result on the screen of spectrum analyzer.
5. Repeat above procedures until all frequencies measured were complete.

11.3 Measurement Equipment

| Equipment | Manufacturer | Model No. | Calibration Date | Next Cal. Date |
|-------------------|--------------------------|-----------|------------------|----------------|
| Spectrum Analyzer | Rohde & Schwarz | FSP40 | 2010/09/09 | 2011/09/09 |
| Attenuator | Weinschel Engineering | 1 | N/A | N/A |

11.4 Measurement Data

Test Date : Sep. 20, 2010 Temperature : 22 °C Humidity : 49 %

Test Mode: GFSK

- a) Channel Low : Output Peak Power is -0.50 dBm = **0.891** mW
- b) Channel Middle : Output Peak Power is -1.50 dBm = **0.708** mW
- c) Channel High : Output Peak Power is -3.18 dBm = **0.481** mW

Test Mode: 8DPSK


- a) Channel Low : Output Peak Power is -0.92dBm = **0.809** mW
- b) Channel Middle : Output Peak Power is -0.57dBm = **0.877** mW
- c) Channel High : Output Peak Power is -1.21 dBm = **0.757** mW

Note : The expanded uncertainty of output power measurement tests is 2dB.

Test Mode: GFSK/Channel Low



*RBW 1 MHz Marker 1 [T1]
VBW 3 MHz -0.50 dBm
SWT 2.5 ms 2.401990000 GHz

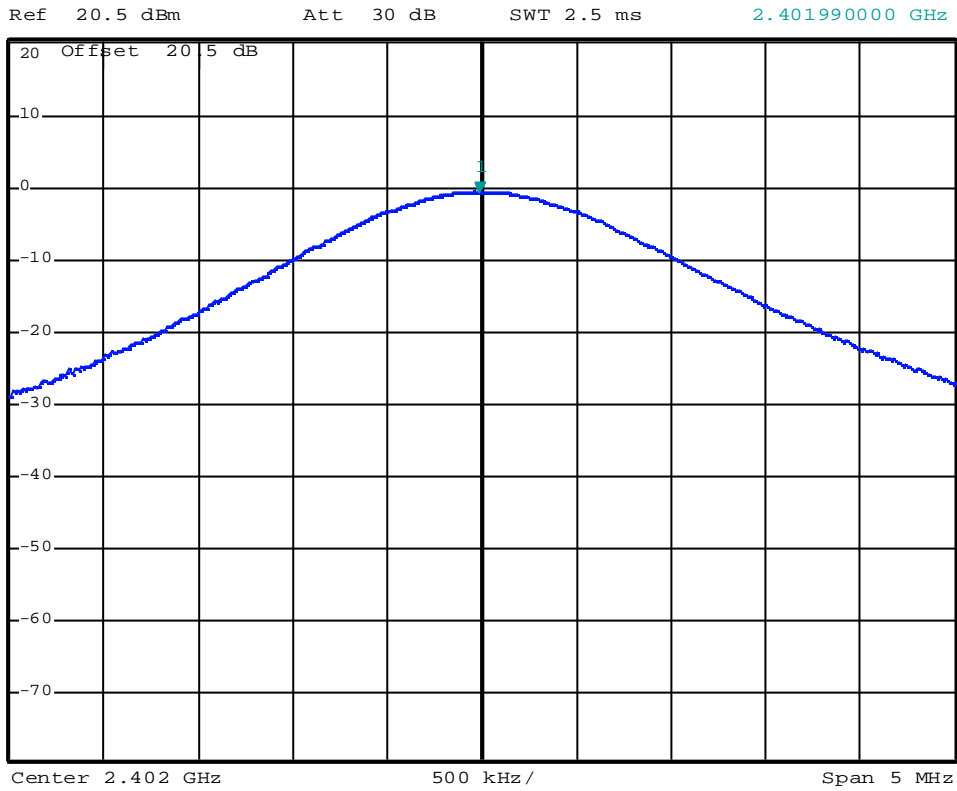

Test Mode: GFSK /Channel Middle




*RBW 1 MHz Marker 1 [T1]
VBW 3 MHz -1.50 dBm
SWT 2.5 ms 2.440870000 GHz

Ref 20.5 dBm

*Att 20 dB

1 PK
VIEW

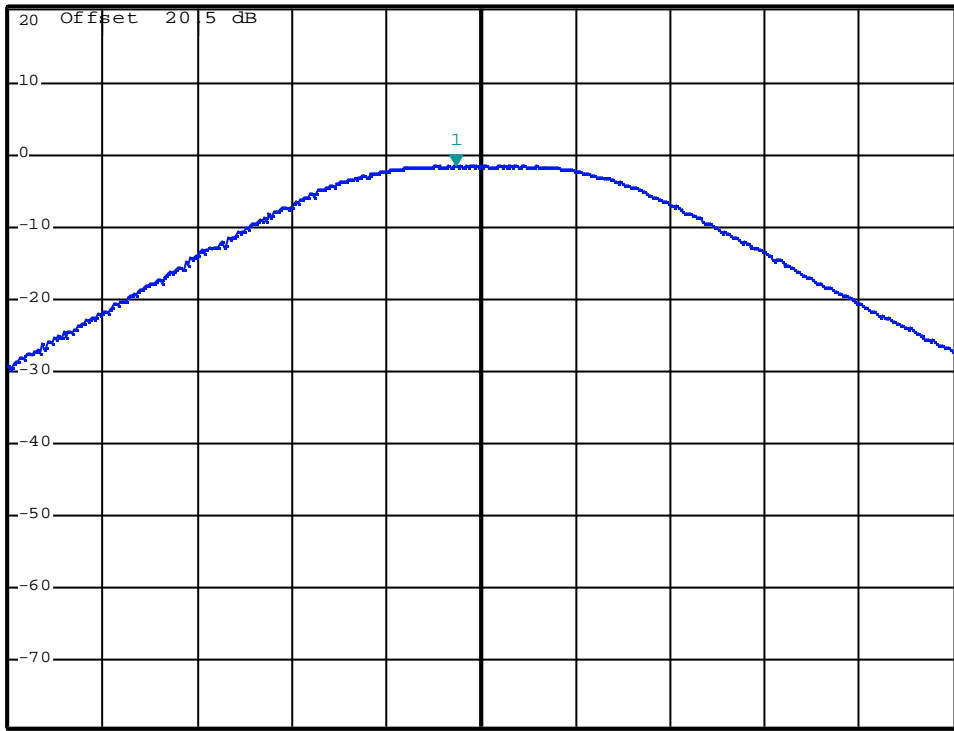


Test Mode: GFSK/Channel High



*RBW 1 MHz Marker 1 [T1]
*VBW 3 MHz -3.18 dBm
SWT 2.5 ms 2.480130000 GHz

Ref 20.5 dBm

*Att 20 dB

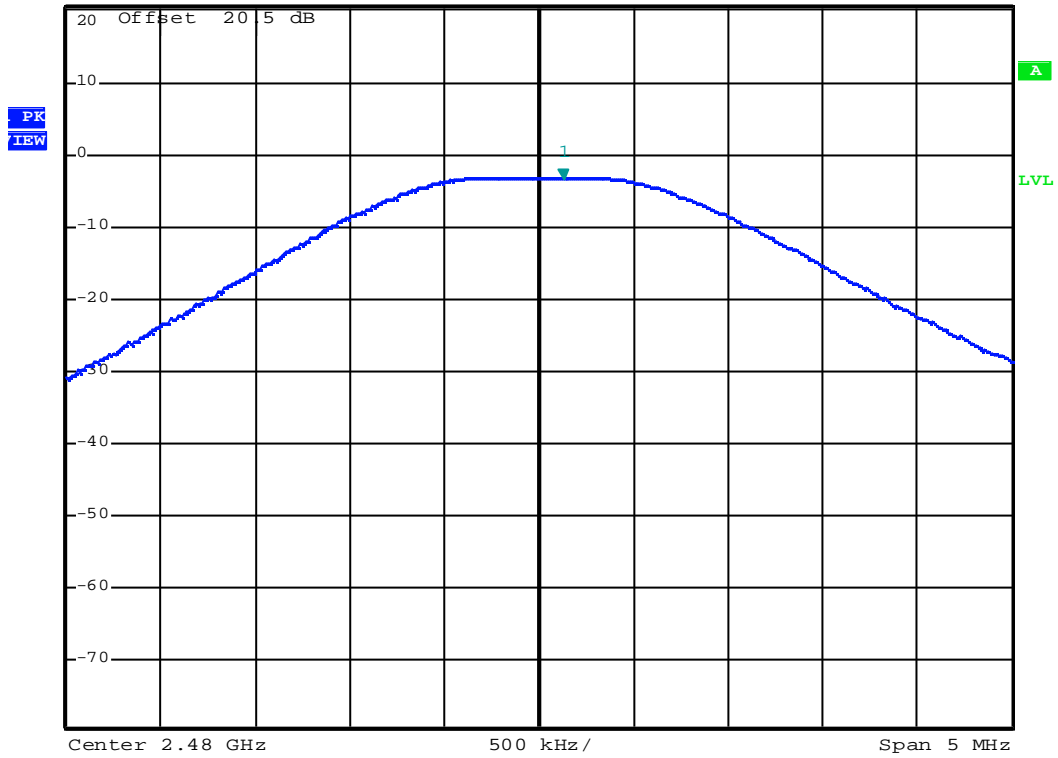

Test Mode: 8DPSK/Channel Low




*RBW 1 MHz Marker 1 [T1]
VBW 3 MHz -0.92 dBm
SWT 2.5 ms 2.40200000 GHz

Ref 21 dBm

*Att 0 dB

1 PK
VIEW

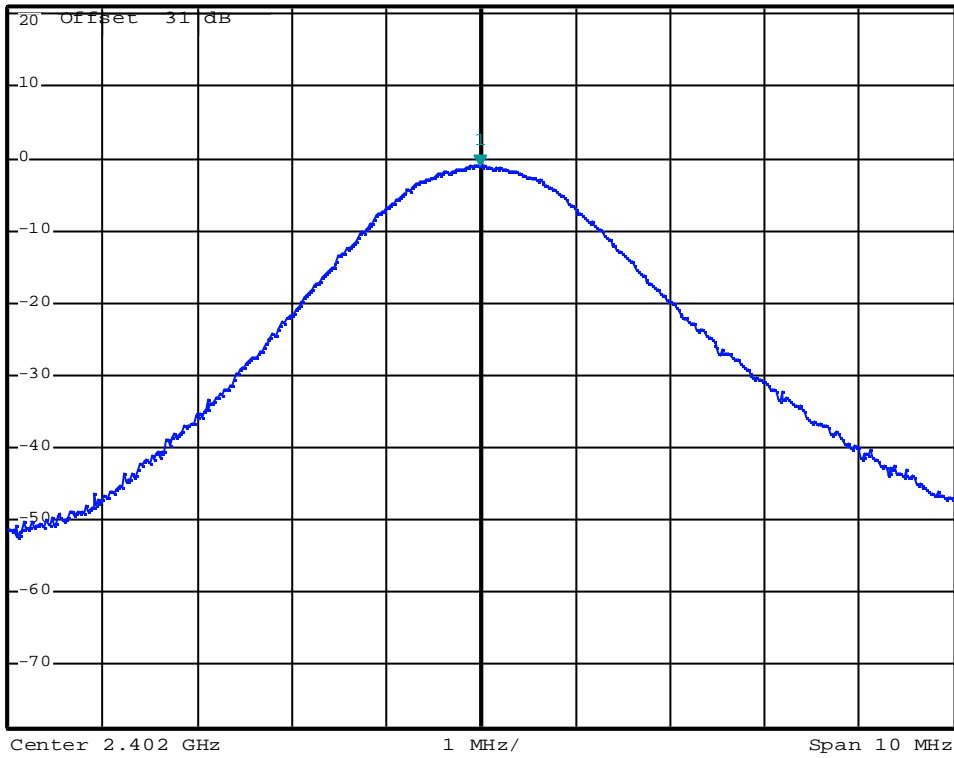

Test Mode: 8DPSK/Channel Middle




*RBW 1 MHz Marker 1 [T1]
VBW 3 MHz -0.57 dBm
SWT 2.5 ms 2.441060000 GHz

Ref 21 dBm

*Att 0 dB

1 PK
VIEW

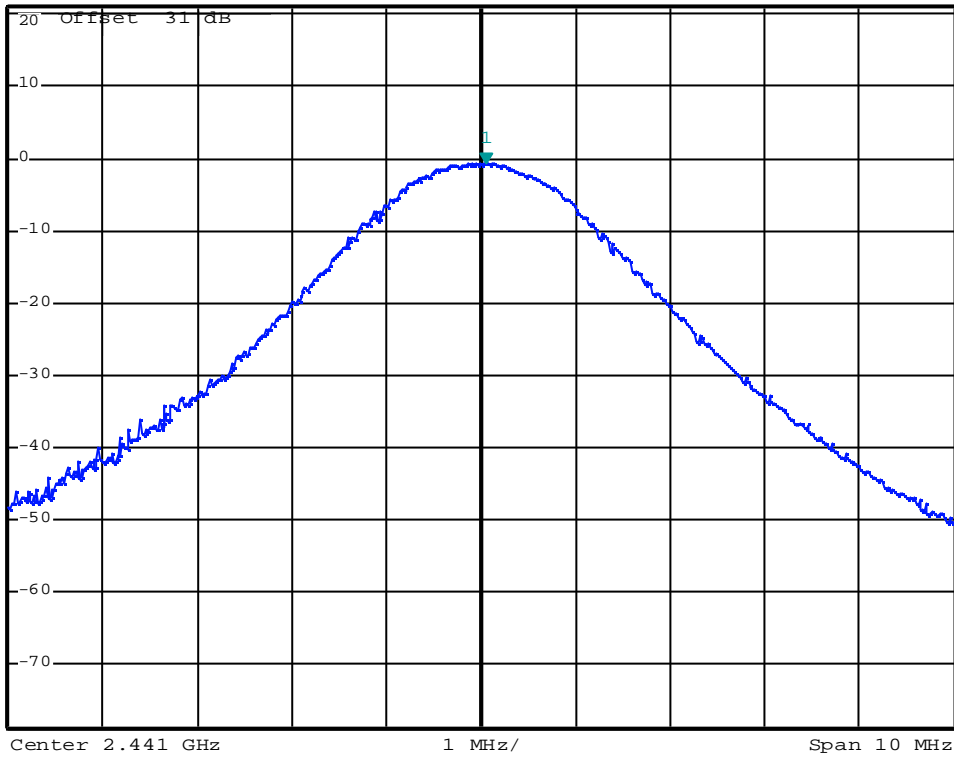

Test Mode: 8DPSK/Channel High




*RBW 1 MHz Marker 1 [T1]
VBW 3 MHz -1.21 dBm
SWT 2.5 ms 2.479960000 GHz

Ref 21 dBm

*Att 0 dB

1 PK
VIEW

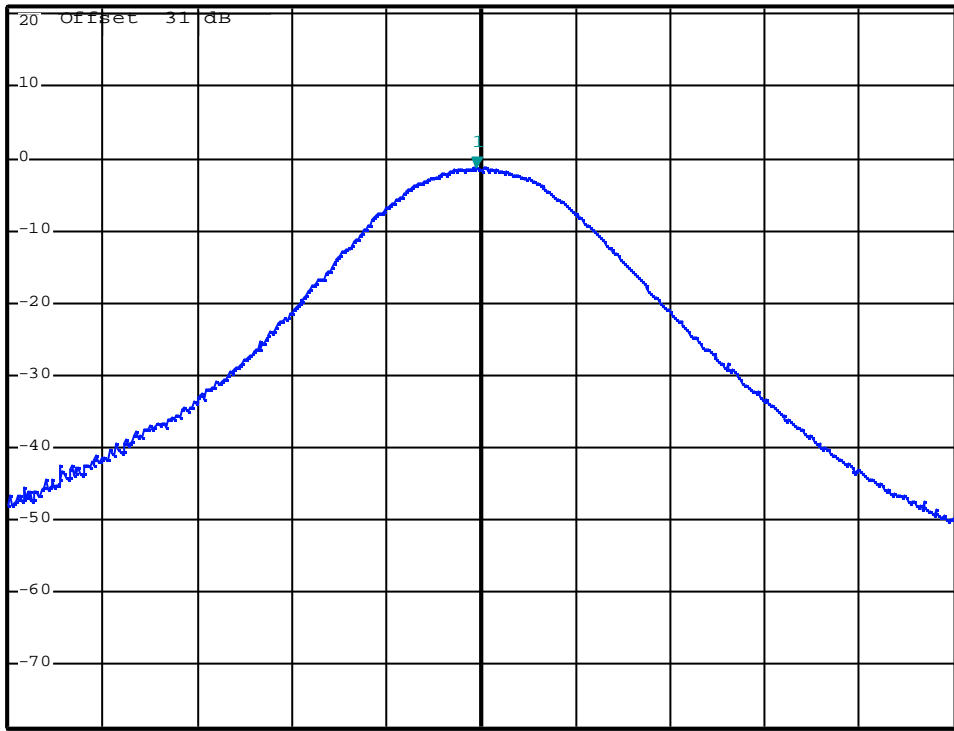

12 100 kHz BANDWIDTH OF BAND EDGES MEASUREMENT

12.1 Standard Applicable

According to 15.247(c), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required.

12.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Use the following spectrum analyzer settings:
 - Span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation
 - RBW \geq 1% of the span
 - VBW \geq RBW
 - Sweep = auto
 - Detector function = peak
 - Trace = max hold
4. Allow the trace to stabilize. Set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Plot the result on the screen of spectrum analyzer.
5. Repeat above procedures until all measured frequencies were complete.

12.3 Measurement Equipment

| Equipment | Manufacturer | Model No. | Calibration Date | Next Cal. Date |
|-------------------|--------------------------|-----------|------------------|----------------|
| Spectrum Analyzer | Rohde & Schwarz | FSP40 | 2010/09/09 | 2011/09/09 |
| Attenuator | Weinschel Engineering | 1 | N/A | N/A |

12.4 Measurement Data

Test Date : Sep. 20, 2010 Temperature : 22 °C Humidity : 49 %

Test Mode: GFSK

- a) Lower Band Edge : All emissions in this 100kHz bandwidth are attenuated more than 20dB from the carrier.
- b) Upper Band Edge : All emissions in this 100kHz bandwidth are attenuated more than 20dB from the carrier.

Test Mode: 8DPSK

- a) Lower Band Edge : All emissions in this 100kHz bandwidth are attenuated more than 20dB from the carrier.
- b) Upper Band Edge : All emissions in this 100kHz bandwidth are attenuated more than 20dB from the carrier.

Note : The expanded uncertainty of the 100 KHz bandwidth of band edges tests is 1000Hz.

Test Mode: GFSK /Lower Band Edge (Hoppin off)




*RBW 30 kHz Marker 1 [T1]
*VBW 100 kHz -46.73 dBm
SWT 15 ms 2.398528000 GHz

Ref 20.5 dBm

Att 30 dB

1 PK
VIEW

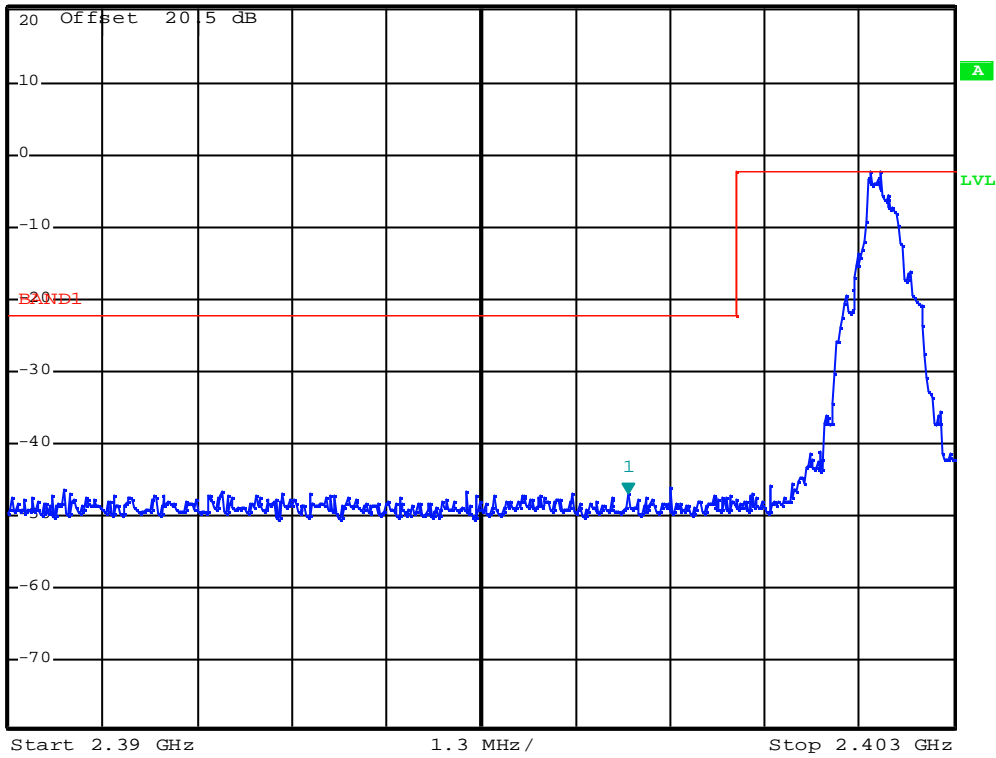

Test Mode: GFSK /Upper Band Edge (Hoppin off)




*RBW 30 kHz Marker 1 [T1]
*VBW 100 kHz -52.34 dBm
SWT 25 ms 2.484820000 GHz

Ref 20.5 dBm

*Att 20 dB

1 PK
VIEW

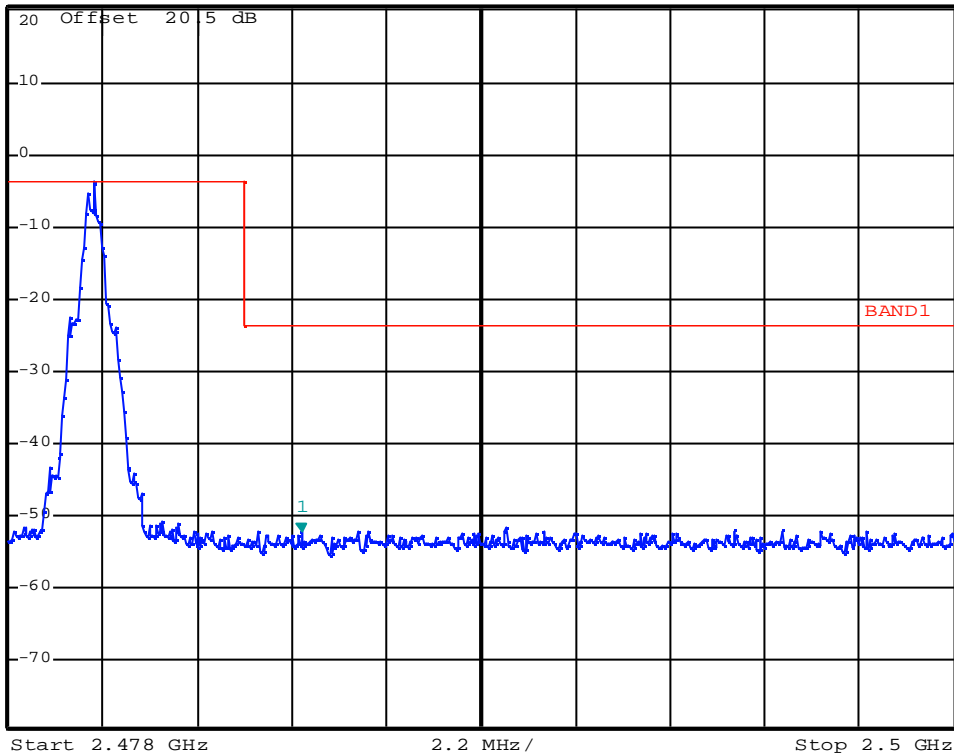

Test Mode: GFSK /Lower Band Edge (Hoppin on)




*RBW 30 kHz Marker 1 [T1]
VBW 100 kHz -41.63 dBm
SWT 20 ms 2.399520000 GHz

Ref 20 dBm

*Att 10 dB

1 PK
VIEW

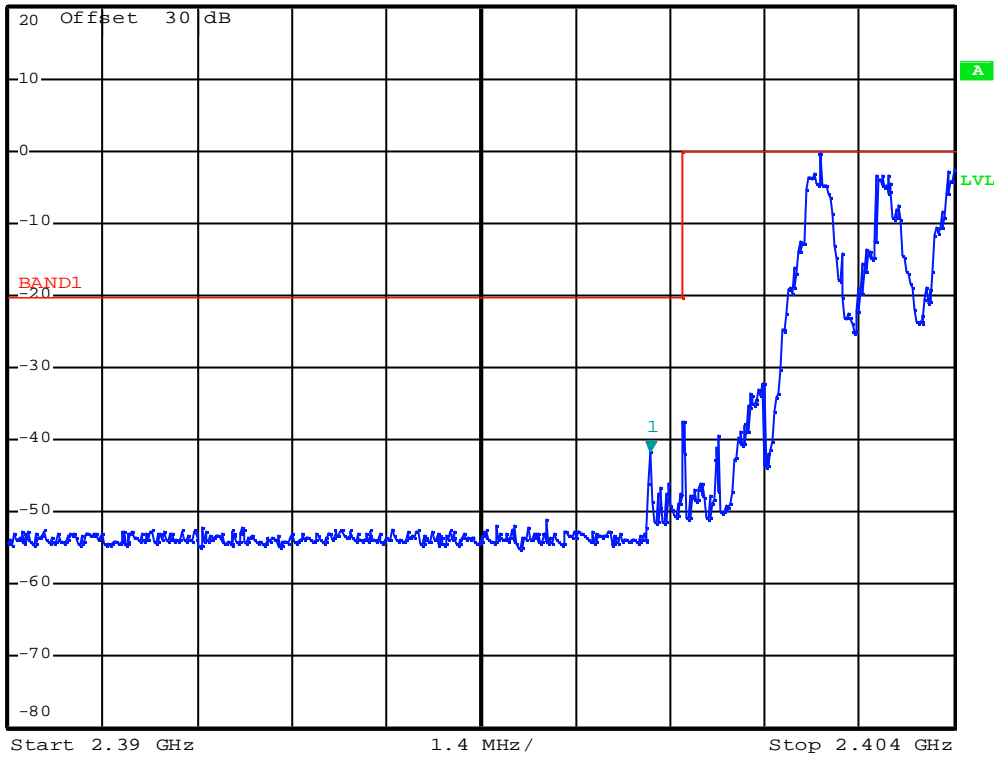

Test Mode: GFSK /Upper Band Edge (Hoppin on)




*RBW 30 kHz Marker 1 [T1]
VBW 100 kHz -51.43 dBm
SWT 30 ms 2.483728000 GHz

Ref 20 dBm

*Att 10 dB

1 PK
VIEW

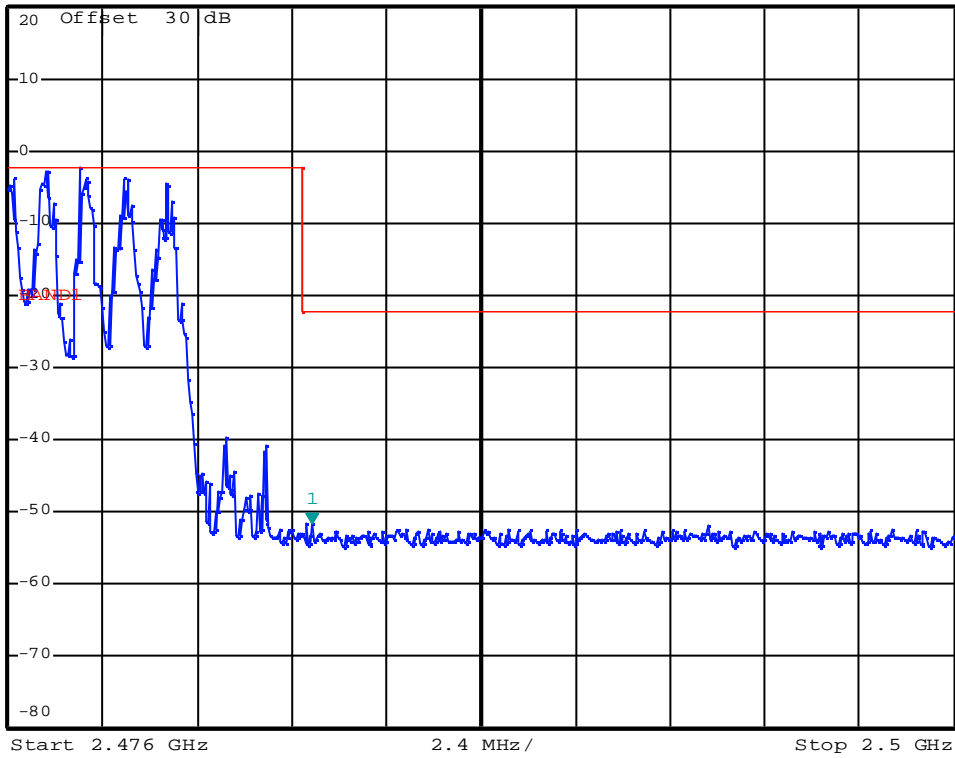

Test Mode: 8DPSK/ Lower Band Edge (Hoppin off)




*RBW 30 kHz Marker 1 [T1]
*VBW 100 kHz -51.68 dBm
SWT 20 ms 2.399632000 GHz

Ref 21 dBm

*Att 0 dB

1 PK
VIEW

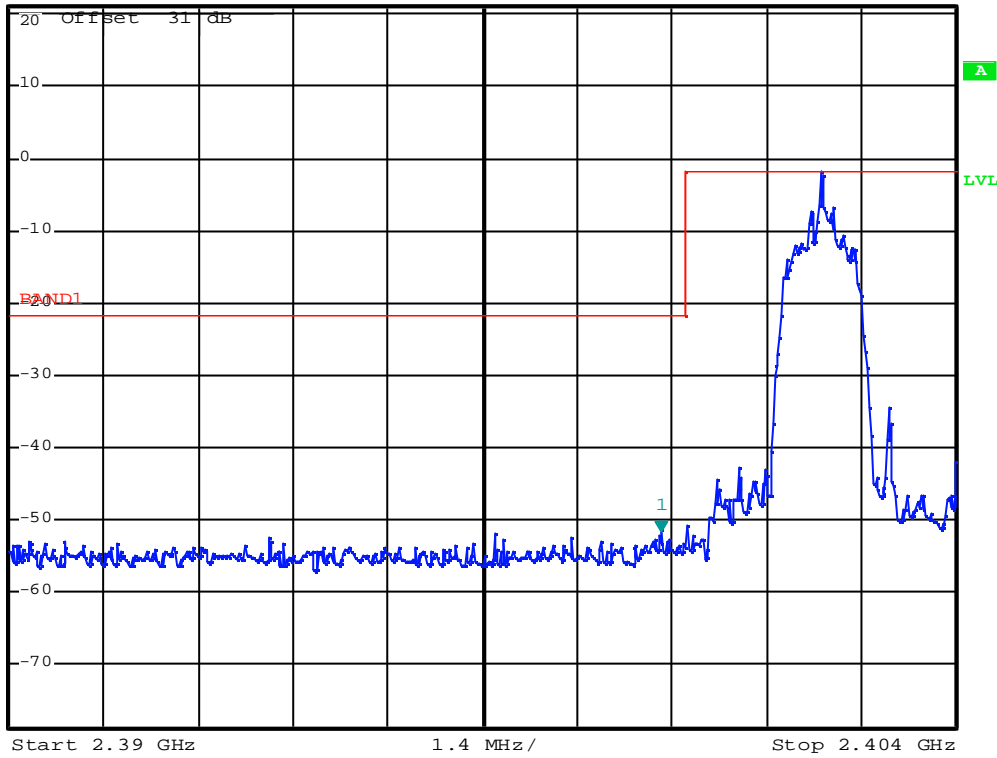

Date: 8.NOV.2010 10:33:32

Test Mode: 8DPSK//Lower Band Edge (Hoppin on)




*RBW 30 kHz Marker 1 [T1]
*VBW 100 kHz -50.58 dBm
SWT 20 ms 2.399520000 GHz

Ref 21 dBm

*Att 0 dB

1 PK
VIEW

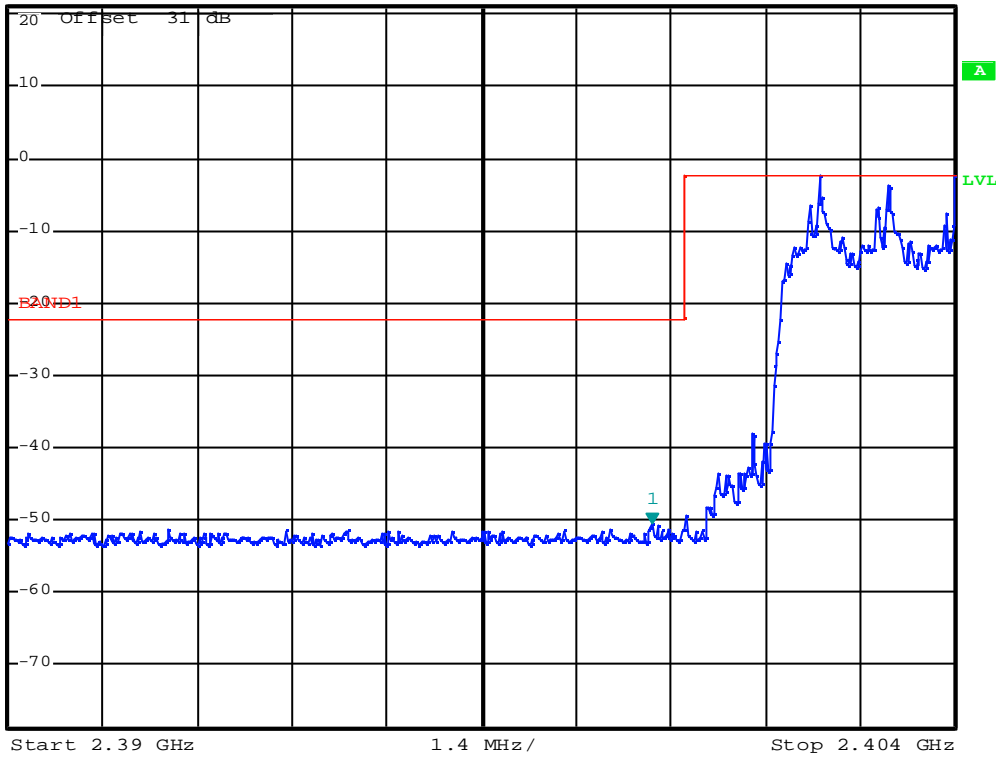

Date: 8.NOV.2010 13:38:19

Test Mode: 8DPSK// Upper Band Edge (Hoppin on)




*RBW 30 kHz Marker 1 [T1]
*VBW 100 kHz -51.69 dBm
SWT 30 ms 2.485552000 GHz

Ref 21 dBm

*Att 0 dB

1 PK
VIEW

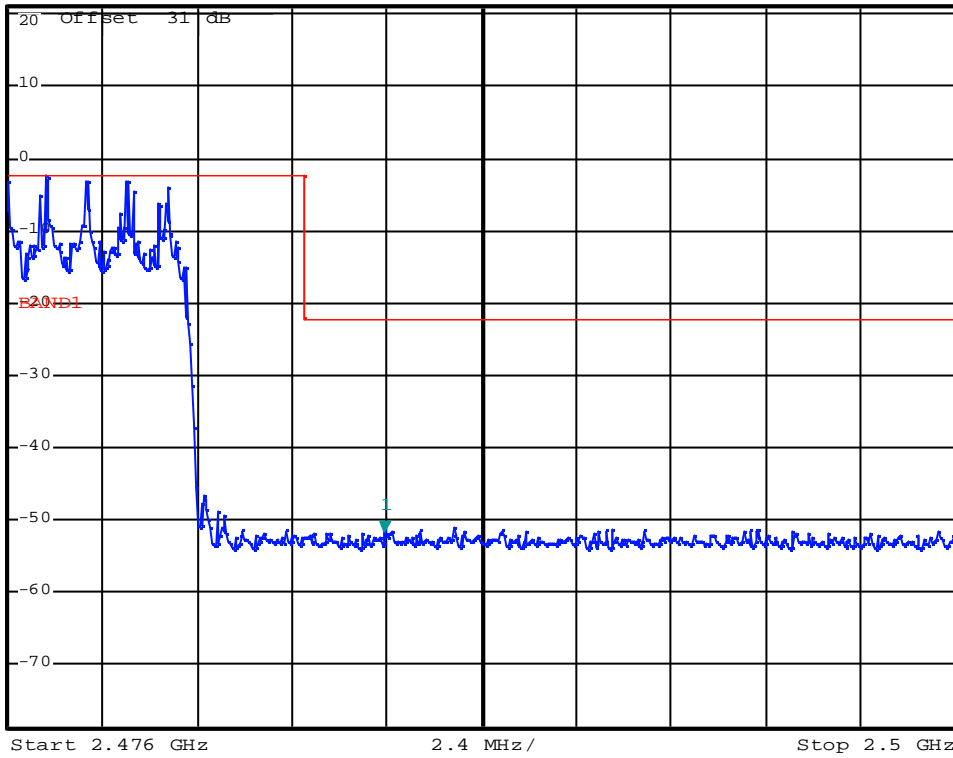

Date: 8.NOV.2010 13:25:45

13 CONDUCTED SPURIOUS EMISSION MEASUREMENT

13.1 Standard Applicable

According to 15.247(c), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required.

13.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Use the following spectrum analyzer settings:
 - Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.
 - RBW = 100 kHz
 - VBW \geq RBW
 - Sweep = auto
 - Detector function = peak
 - Trace = max hold.
4. Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded. Plot the result on the screen of spectrum analyzer.
5. Repeat above procedures until all measured frequencies were complete.

13.3 Measurement Equipment

| Equipment | Manufacturer | Model No. | Calibration Date | Next Cal. Date |
|-------------------|--------------------------|-----------|------------------|----------------|
| Spectrum Analyzer | Rohde & Schwarz | FSP40 | 2010/09/09 | 2011/09/09 |
| Attenuator | Weinschel Engineering | 1 | N/A | N/A |

13.4 Measurement Data

Test Date : Sep. 20, 2010 Temperature : 22 °C Humidity : 49 %

Test Mode: GFSK

Mode : Low Channel

- a) 1 GHz to 3 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.
- b) 3 GHz to 25 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.

Mode : Mid Channel

- a) 1 GHz to 3 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.
- b) 3 GHz to 25 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.

Mode : Hi Channel

- a) 1 GHz to 3 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.
- b) 3 GHz to 25 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.

Note : The expanded uncertainty of the out-of-band conducted emission tests is 2dB.

Test Date : Sep. 20, 2010 Temperature : 22 °C Humidity : 49 %

Test Mode: 8DPSK

Mode : Low Channel

- c) 1 GHz to 3 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.
- d) 3 GHz to 25 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.

Mode : Mid Channel

- c) 1 GHz to 3 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.
- d) 3 GHz to 25 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.

Mode : Hi Channel

- c) 1 GHz to 3 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.
- d) 3 GHz to 25 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.

Note : The expanded uncertainty of the out-of-band conducted emission tests is 2dB.

Mode: GFSK




*RBW 100 kHz Marker 1 [T1]
*VBW 100 kHz -1.36 dBm
SWT 200 ms 2.404000000 GHz

Ref 20.5 dBm

*Att 20 dB

1 PK
VIEW

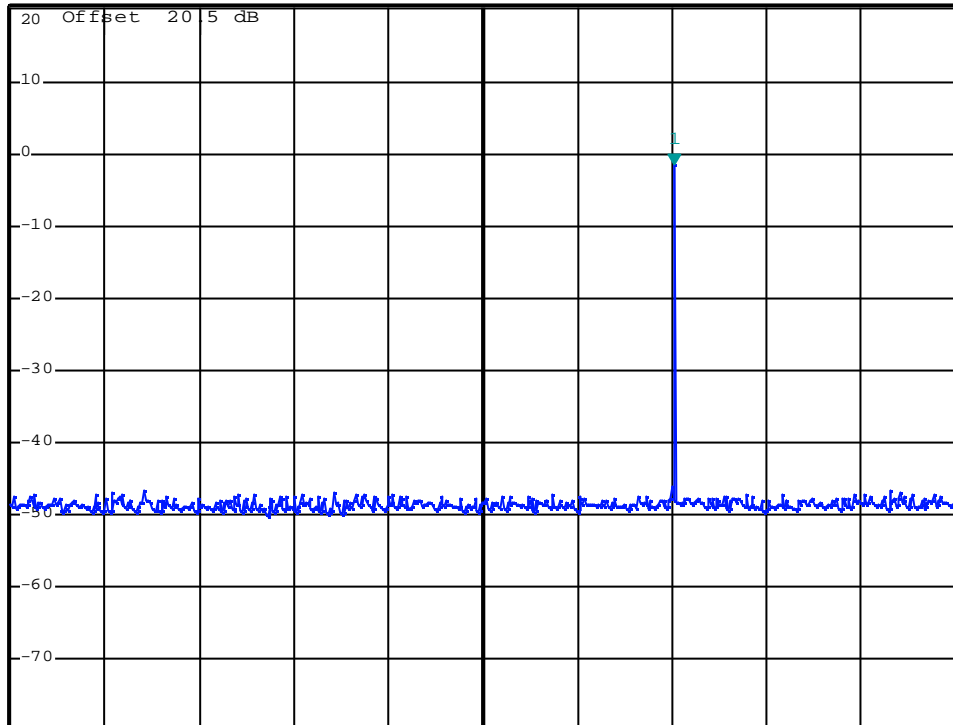

Center 2 GHz

200 MHz/

Span 2 GHz

Mode: Channel LOW




*RBW 100 kHz Marker 1 [T1]
*VBW 100 kHz -33.96 dBm
SWT 2.2 s 25.00000000 GHz

Ref 20.5 dBm

*Att 20 dB

1 PK
VIEW

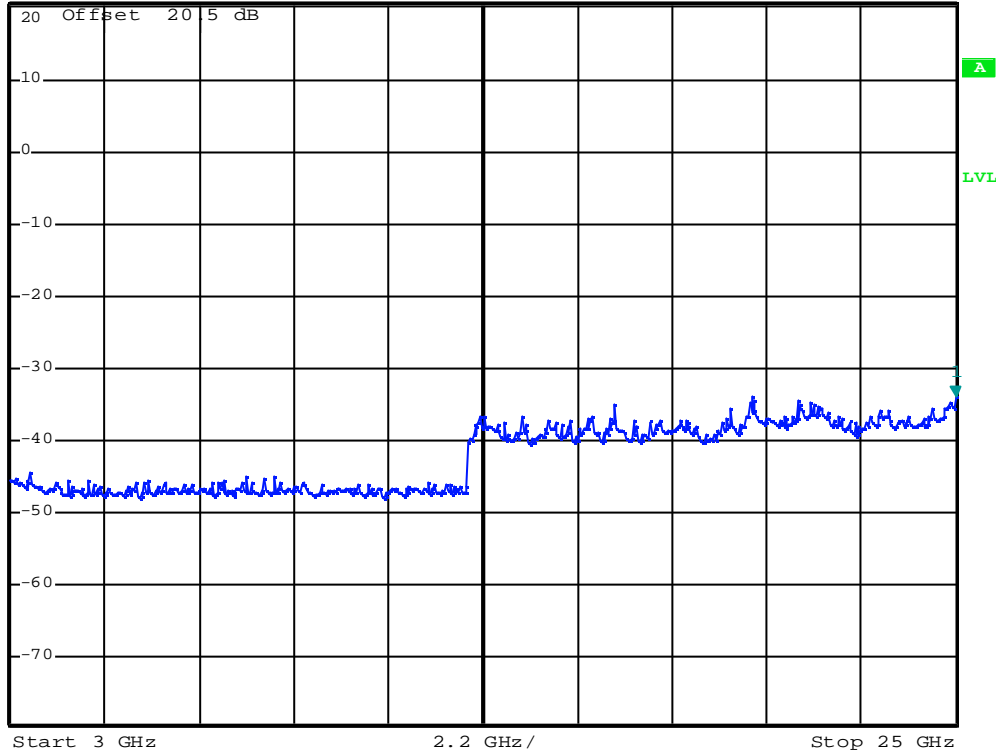

Mode: GFSK




*RBW 100 kHz Marker 1 [T1]
*VBW 100 kHz -2.84 dBm
SWT 200 ms 2.444000000 GHz

Ref 20.5 dBm

*Att 20 dB

1 PK
VIEW

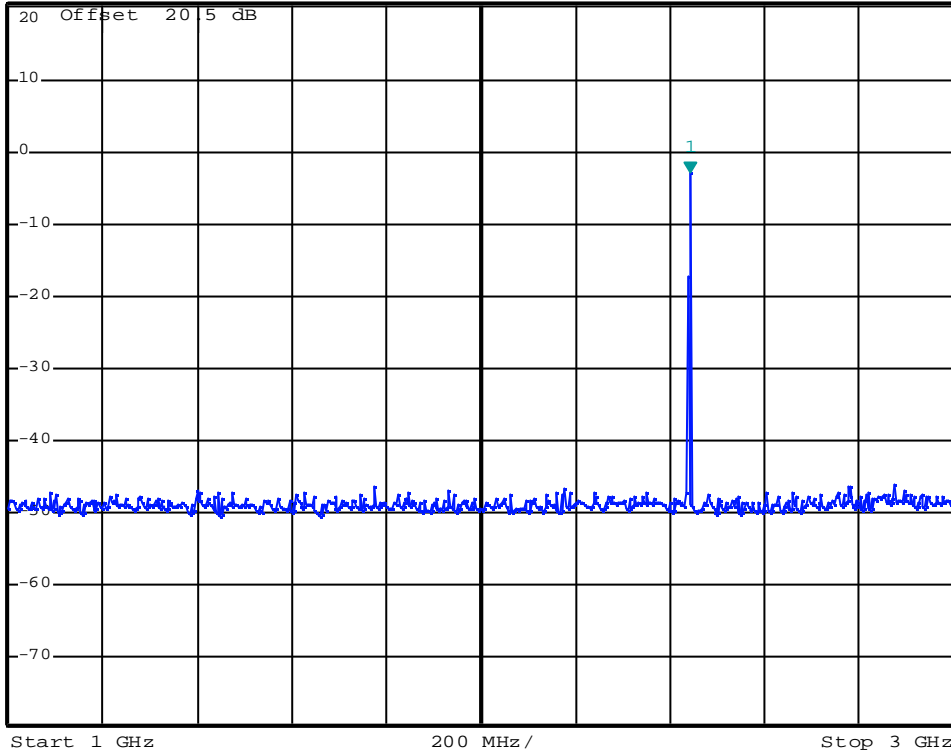

Mode: GFSK




*RBW 100 kHz Marker 1 [T1]
*VBW 100 kHz -33.99 dBm
SWT 2.2 s 22.008000000 GHz

Ref 20.5 dBm

*Att 20 dB

1 PK
VIEW

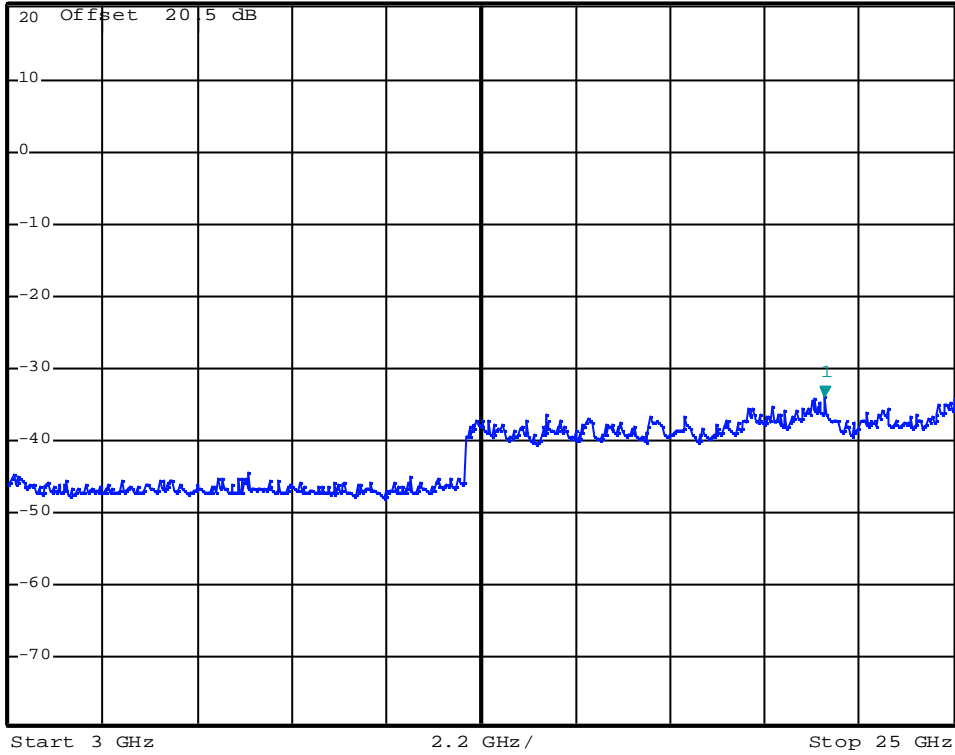

Mode: GFSK




*RBW 100 kHz Marker 1 [T1]
*VBW 100 kHz -3.33 dBm
SWT 200 ms 2.48000000 GHz

Ref 20.5 dBm

*Att 20 dB


1 PK
VIEW

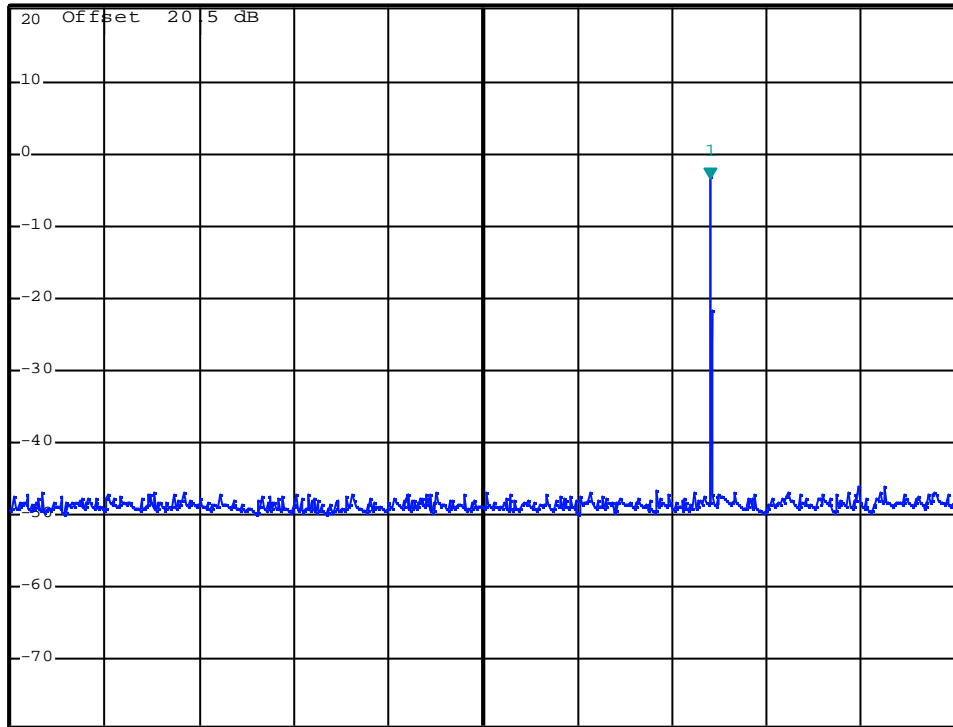

Mode: GFSK



*RBW 100 kHz Marker 1 [T1]
*VBW 100 kHz -34.47 dBm
SWT 2.2 s 24.91200000 GHz

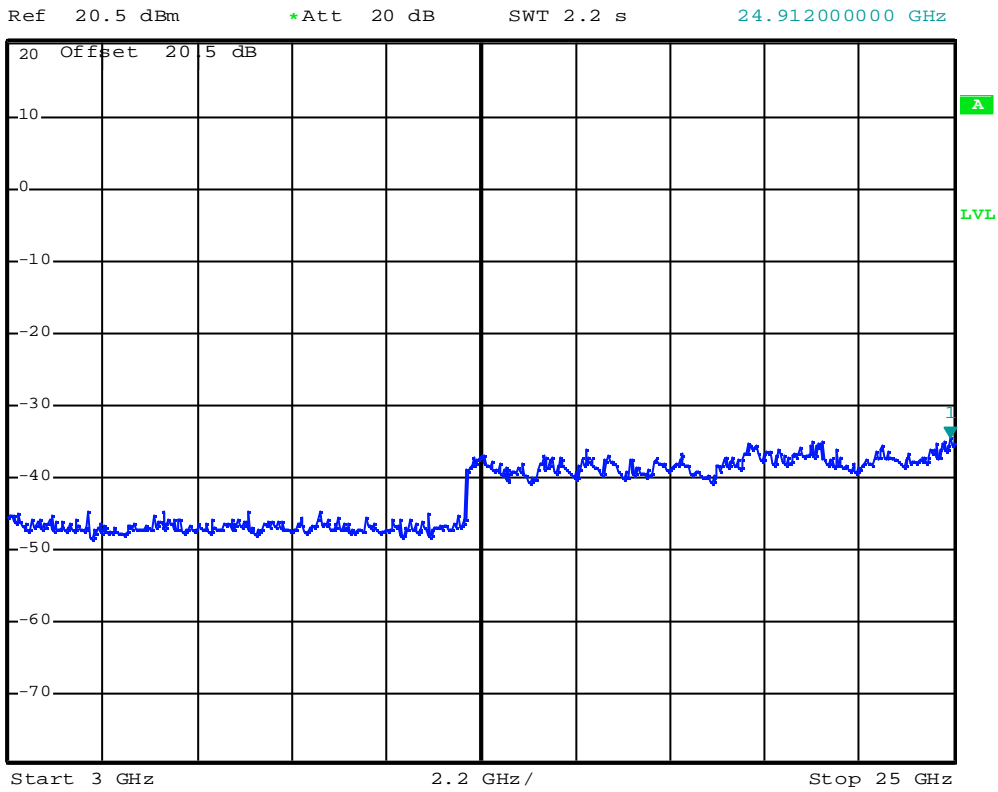


Mode: 8DPSK



Ref 21 dBm *Att 0 dB *RBW 100 kHz Marker 1 [T1]
*VBW 100 kHz -1.49 dBm
SWT 200 ms 2.40400000 GHz

1 PK
VIEW

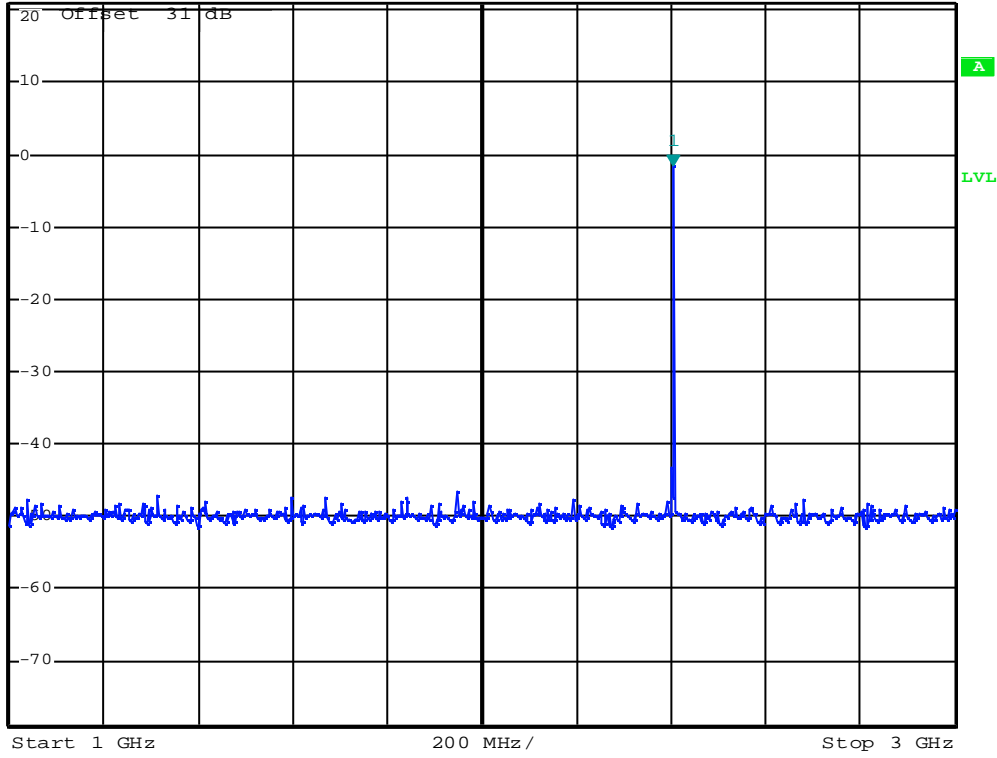


Mode: 8DPSK



Ref 21 dBm *Att 0 dB *RBW 100 kHz Marker 1 [T1]
*VBW 100 kHz -42.01 dBm
SWT 2.2 s 20.292000000 GHz


1 PK
VIEW

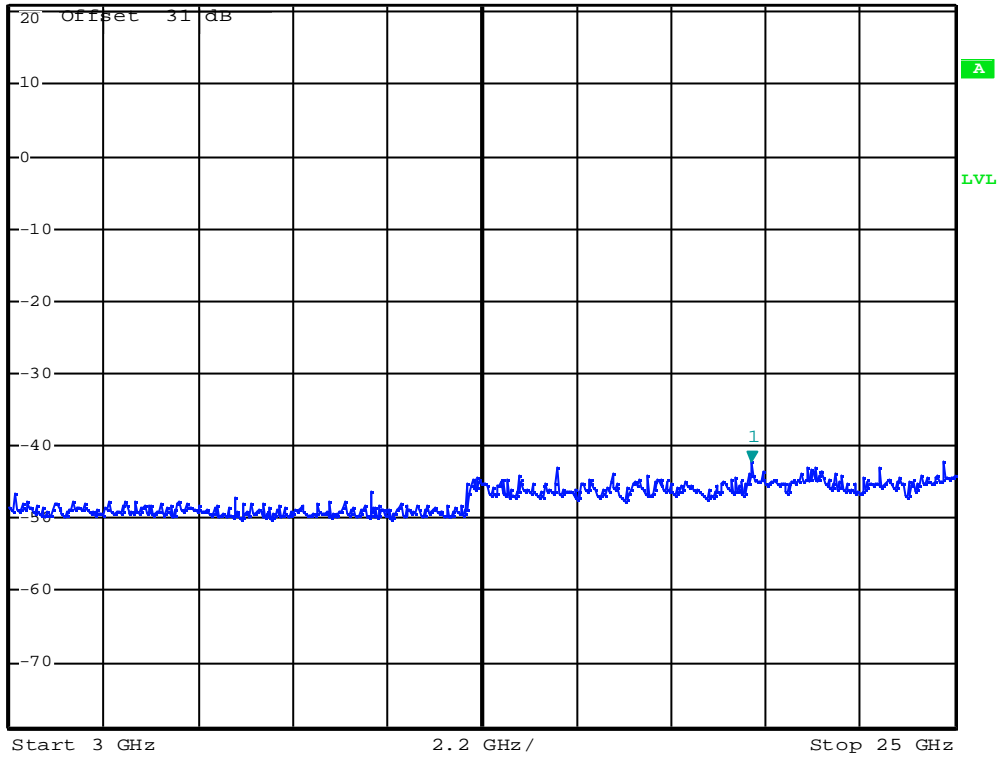

Mode: 8DPSK




Ref 21 dBm *Att 0 dB *RBW 100 kHz Marker 1 [T1]
*VBW 100 kHz -5.76 dBm
SWT 200 ms 2.444000000 GHz

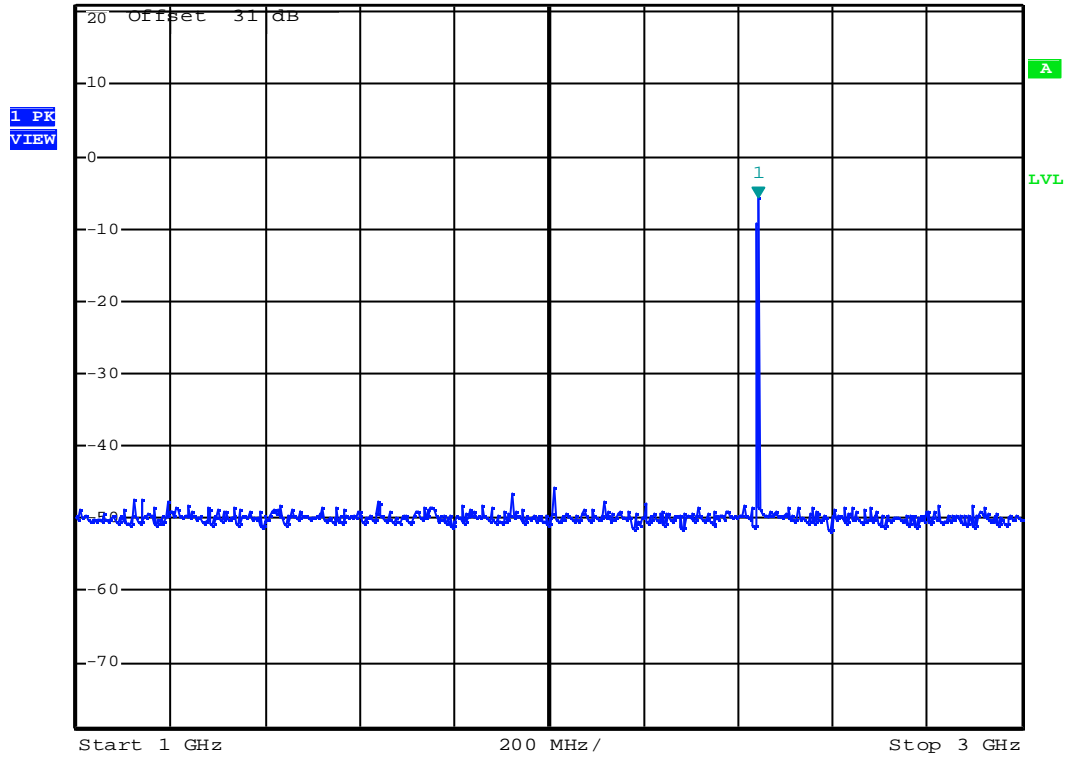

Mode: 8DPSK



Ref 21 dBm *Att 0 dB *RBW 100 kHz Marker 1 [T1]
*VBW 100 kHz -42.67 dBm
SWT 2.2 s 24.956000000 GHz

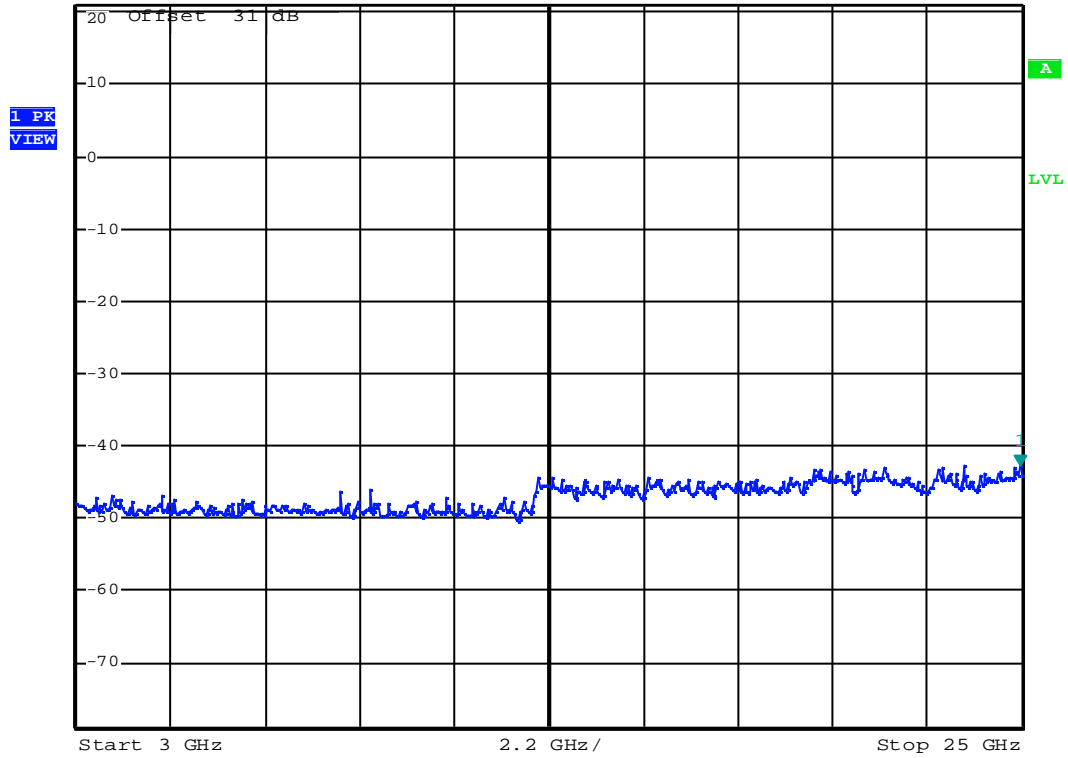

Mode: 8DPSK




*RBW 100 kHz Marker 1 [T1]
*VBW 100 kHz -3.19 dBm
SWT 200 ms 2.48000000 GHz

Ref 21 dBm

*Att 0 dB

1 PK
VIEW

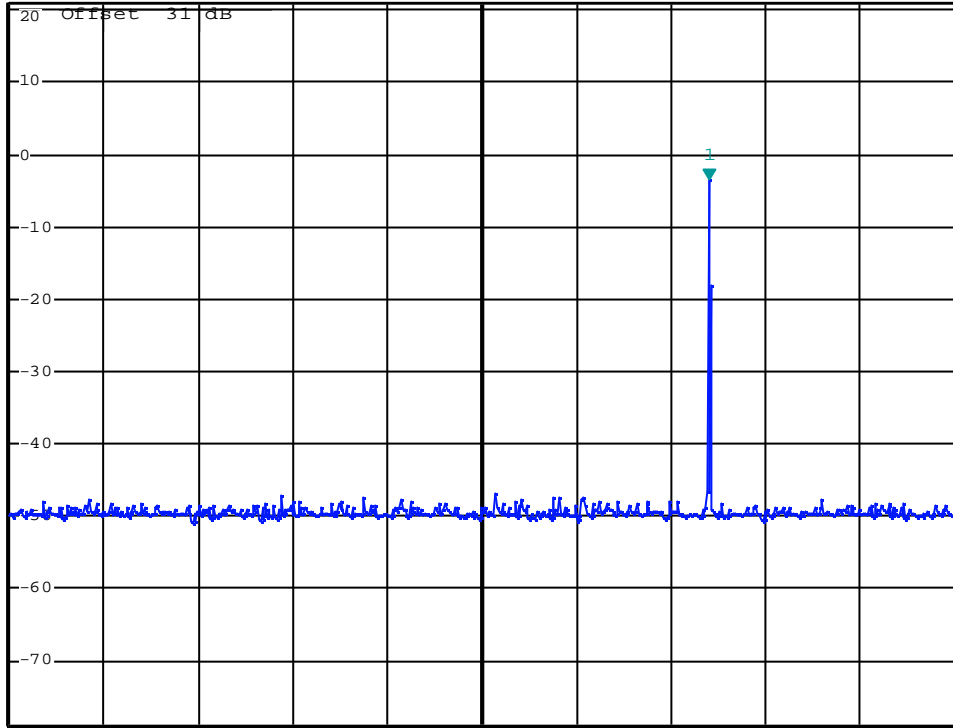

Start 1 GHz

200 MHz/


Stop 3 GHz

Mode: 8DPSK



Ref 21 dBm *Att 0 dB *RBW 100 kHz Marker 1 [T1]
*VBW 100 kHz -42.57 dBm
SWT 2.2 s 20.68800000 GHz

1 PK
VIEW

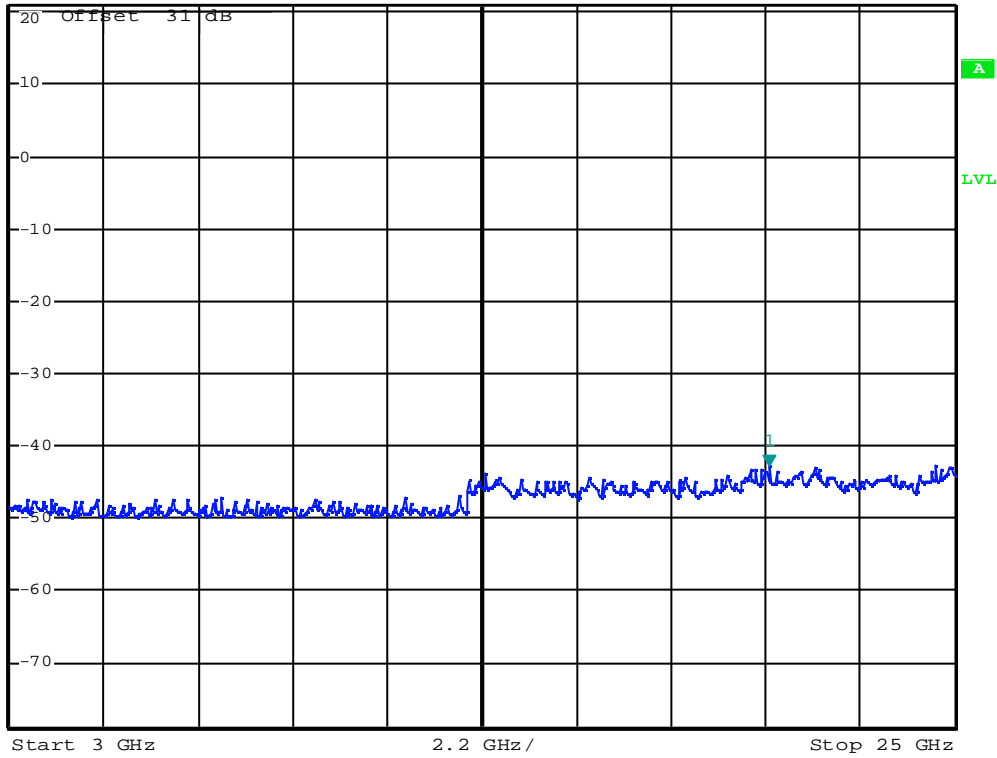

14 PEAK POWER SPECTRAL DENSITY MEASUREMENT

14.1 Standard Applicable

According to 15.247(d), for digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

14.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set EUT to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Use the following spectrum analyzer settings:
 - Span = 300 kHz, centered on highest level appearing on spectral display
 - RBW = 3 kHz
 - VBW \geq RBW
 - Sweep = 100 s
 - Detector function = peak
 - Trace = max hold
4. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Plot the result on the screen of spectrum analyzer.
5. Repeat above procedures until all measured frequencies were complete.

14.3 Measurement Equipment

| Equipment | Manufacturer | Model No. | Calibration Date | Next Cal. Date |
|-------------------|--------------------------|-----------|------------------|----------------|
| Spectrum Analyzer | Rohde & Schwarz | FSP40 | 2010/09/09 | 2011/09/09 |
| Attenuator | Weinschel Engineering | 1 | N/A | N/A |

14.4 Measurement Data

Test Date : Sep. 20, 2010 Temperature : 22 °C Humidity : 49 %

Test Mode: GFSK

- a) Channel Low : Maximun Power Density of 3 kHz Bandwidth is -13.30dBm
- b) Channel Middle : Maximun Power Density of 3 kHz Bandwidth is -14.79dBm
- c) Channel High : Maximun Power Density of 3 kHz Bandwidth is -16.65dBm

Test Mode: 8DPSK

- a) Channel Low : Maximun Power Density of 3 kHz Bandwidth is -14.22dBm
- b) Channel Middle : Maximun Power Density of 3 kHz Bandwidth is -13.93dBm
- c) Channel High : Maximun Power Density of 3 kHz Bandwidth is -14.43dBm

Note : The expanded uncertainty of the power density tests is 2dB.

Test Mode: GFSK/Channel Low




*RBW 3 kHz Marker 1 [T1]
*VBW 100 kHz -13.30 dBm
*SWT 100 s 2.401962800 GHz

Ref 20.5 dBm

Att 30 dB

1 PK
VIEW

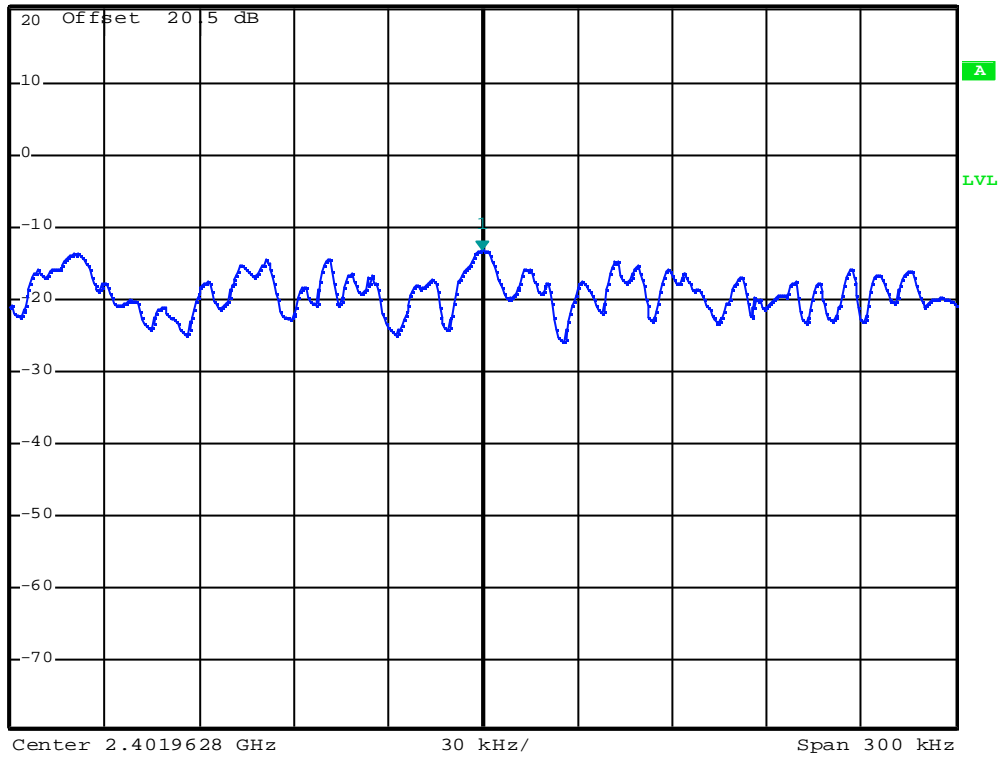

Test Mode: GFSK/Channel High




*RBW 3 kHz Marker 1 [T1]
*VBW 100 kHz -16.65 dBm
*SWT 100 s 2.479988600 GHz

Ref 20.5 dBm

*Att 20 dB


1 PK
VIEW

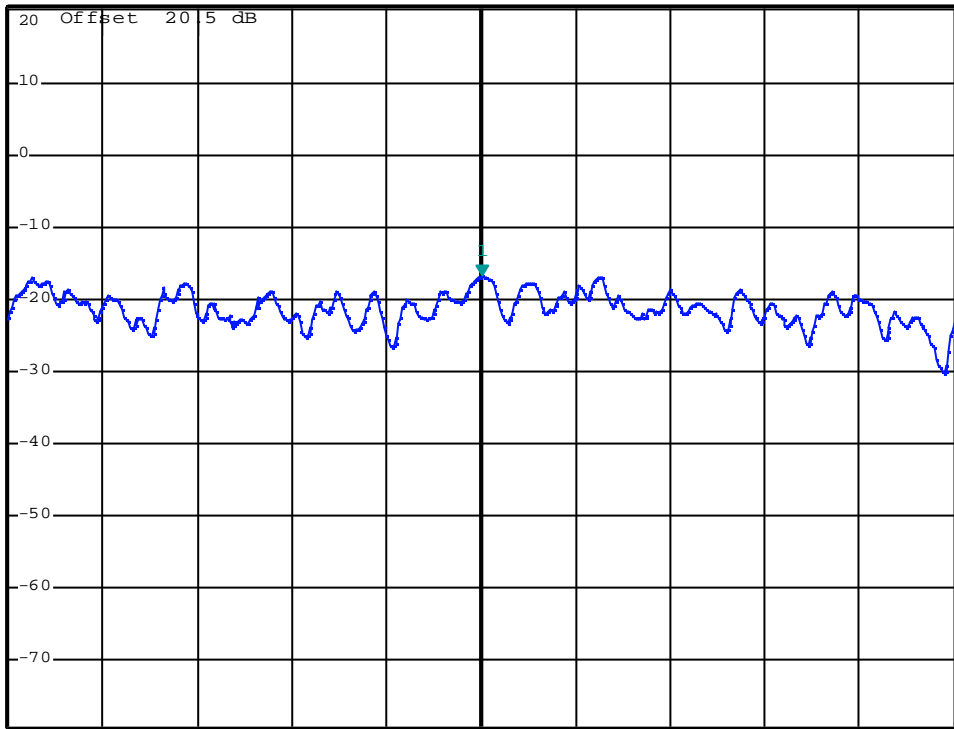

Test Mode: 8DPSK/Channel Low



Ref 21 dBm *Att 0 dB *RBW 3 kHz Marker 1 [T1]
*VBW 100 kHz -14.22 dBm
*SWT 100 s 2.401989200 GHz

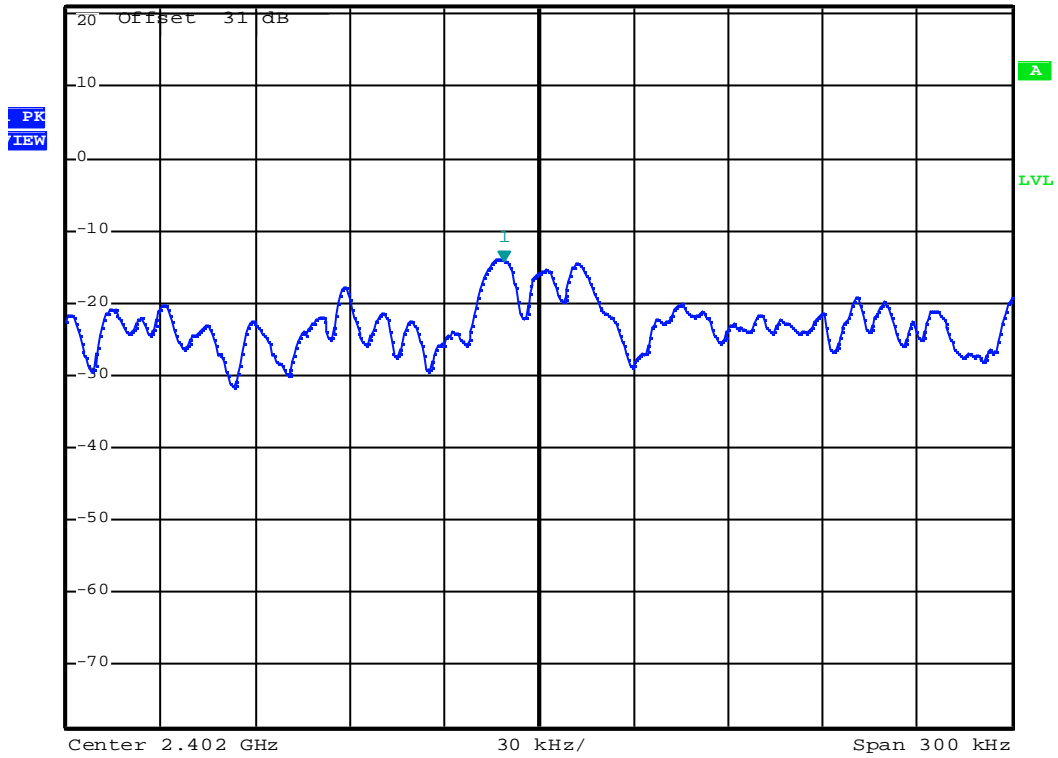

Test Mode: 8DPSK/Channel Middle




*RBW 3 kHz Marker 1 [T1]
*VBW 100 kHz -13.93 dBm
*SWT 100 s 2.440986200 GHz

Ref 21 dBm

*Att 0 dB

1 PK
VIEW

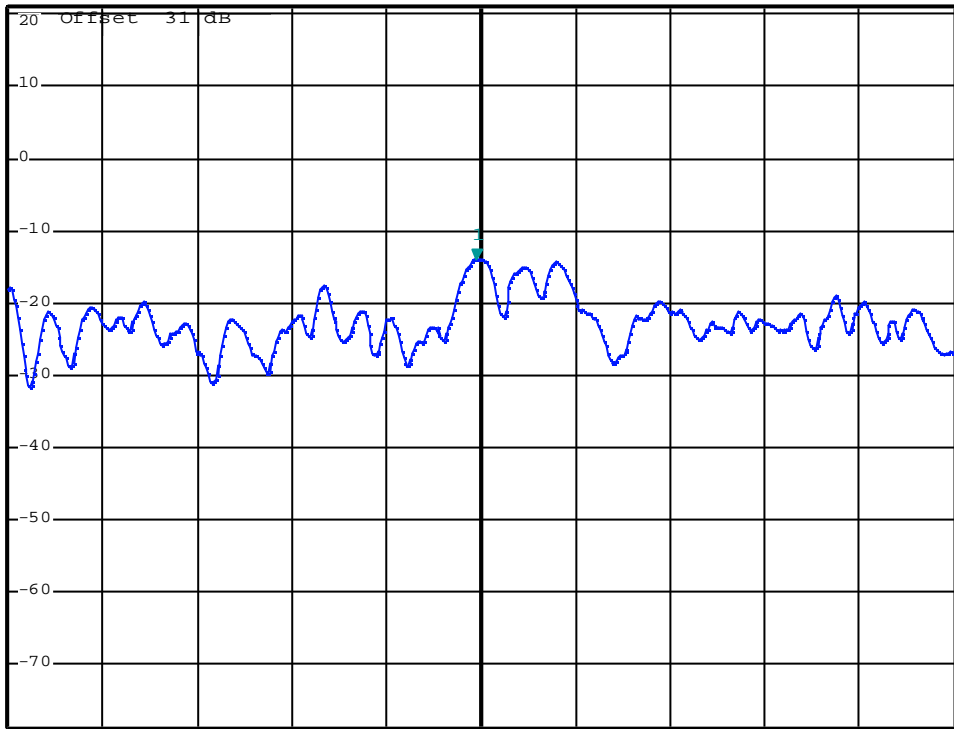

Test Mode: 8DPSK/Channel High



*RBW 3 kHz Marker 1 [T1]
*VBW 100 kHz -14.43 dBm
*SWT 100 s 2.479986800 GHz

Ref 21 dBm

*Att 0 dB

1 PK
VIEW

