

Matsushita Electric Industrial Co., Ltd.
Panasonic Automotive Systems Company
Product Development Center
600 Saedo-cho, Tsuzuki-ku, Yokohama City 224-8539, Japan

FCC ID : ACJ932CQ-EP1660
IC Number : 216J-CQEP1660
Model : YEP0PT30919714
Applicant : Matsushita Electric Industrial Co., Ltd.

Date: April 5, 2007

Request for Modular Approval


The MAINPCB (Model: YEP0PT30919714) is designed by Matsushita Electric Industrial Co., Ltd..
This modular transmitter will be equipped and used only in Car Audio, which is produced by Matsushita Electric Industrial Co., Ltd or the manufacturer consigned the production by Matsushita Electric Industrial Co., Ltd..

The modular transmitter complies the module basic requirement (Item 1 to 8) in FCC Public Notice: Part 15 Unlicensed Modular Transmitter Approval (DA00-1407) [FCC Part 15 Subpart C Section 15.212] and Canada RSS-Gen, Issue 2, 7.1.1 as indicated below:

[Module basic requirement]

- (1) Have its own RF shielding:

This modular transmitter has its own RF shielding. Please refer to the following Photo:

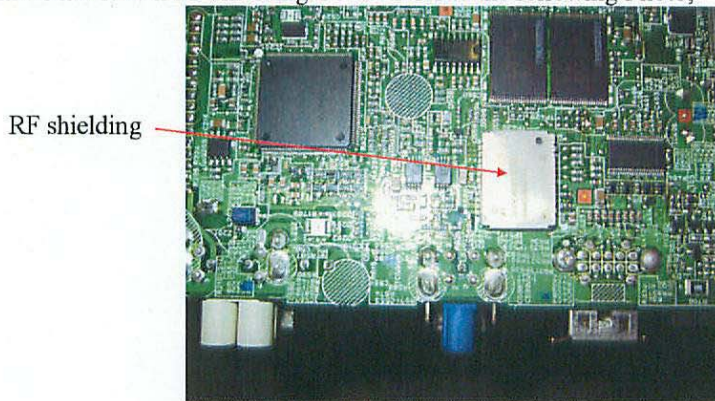

- (2) The modular transmitter must have buffered modulation/data inputs:

Data input to this modular transmitter is controlled as not generating excessive data speed and abnormal modulation.

- (3) The modular transmitter must have its own power supply regulation:

Input Voltage to Bluetooth module AV is impressed DC3.1V to 3.5V. This Input Voltage is supplied to one of the power supply input terminals of the RF-IC chip, Flash memory and B/B-IC chip inside a module. This Input Voltage is stabilized by +1.5V by the Regulator (Voltage Regulator) equipped in the module, and supplied to other power supply input terminals of B/B-IC chip.

- (4) The modular transmitter must comply with the antenna requirements of Section 15.203 and 15.204(c):

The antenna of this equipment is connected to the modular antenna with Fakra connector, and the installation is to be done by the professionals. There, the equipment complies with the antenna requirement of 15.203 and 15.204(c).

- (5) The modular transmitter must be tested in a stand alone: The test has been performed as a stand alone. Please refer to the Test Report.

- (6) The modular transmitter must be labeled with its own FCC ID, and, if the FCC ID is not visible when the module is installed inside another device, then the outside of the device into which the module is installed must also display a label referring to the enclosed module:

This modular transmitter is complied with this requirement. Please refer to the Label drawing and location. In addition, the final product will display FCC ID of the module.

- (7) The modular transmitter must comply with any specific rule or operating requirements applicable to the transmitter and the manufacturer must provide adequate instructions along with the module to explain any such requirements:

The necessary explanation to be complied with this requirement is contained in the manual.

- (8) The modular transmitter must comply with any applicable RF exposure requirements: This module may be installed into any end product both mobile and portable applications. Because the module only radiates very low power levels, it complies with RF exposure requirements.

Junichi Sakai
Staff Engineer