

## **SECTION 5: Carrier frequency separation**

### **Test procedure**

The carrier frequency separation was measured with a spectrum analyzer connected to the antenna port.

Summary of the test results: Pass  
Refer to APPENDIX 1

## **SECTION 6: 20dB bandwidth & Occupied bandwidth (99%)**

### **Test procedure**

The bandwidth was measured with a spectrum analyzer connected to the antenna port.

Summary of the test results: Pass  
Refer to APPENDIX 1

## **SECTION 7: Number of hopping frequency**

### **Test procedure**

The number of hopping frequency was measured with a spectrum analyzer connected to the antenna port.

Summary of the test results: Pass  
Refer to APPENDIX 1

## **SECTION 8: Dwell time**

### **Test procedure**

The dwell time was measured with a spectrum analyzer connected to the antenna port.

Summary of the test results: Pass  
Refer to APPENDIX 1

## **SECTION 9: Maximum peak output power**

### **Test procedure**

The maximum peak output power was measured with a power meter connected to the antenna port.

Summary of the test results: Pass  
Refer to APPENDIX 1

---

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## **SECTION 10: Radiated emission**

### **10.1 Operating environment**

Test place : See test data (APPENDIX 1)  
Temperature : See test data (APPENDIX 1)  
Humidity : See test data (APPENDIX 1)

### **10.2 Test configuration**

EUT was placed on a urethane platform of nominal size, 0.5m by 0.5m, raised 0.8m above the conducting ground plane. Photographs of the set up are shown in APPENDIX 3.

### **10.3 Test conditions**

Frequency range : 30MHz to 25GHz  
EUT position : Table top

### **10.4 Test procedure**

The Radiated Electric Field Strength intensity has been measured on a semi-anechoic chamber with a ground plane and at a distance of 3m (below 15GHz) / 1m (above 15GHz) (Refer to Figure 1). Measurements were performed with quasi-peak, peak and average detector. The measuring antenna height was varied between 1 and 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity. The measurements were performed for both vertical and horizontal antenna polarization.

The radiated emission measurements were made with the following detection of the test receiver.

Frequency	30-1000MHz	1-25GHz		20dBc
Detection type	Quasi-Peak	Peak	* Average	Peak
IF Bandwidth	120kHz	RBW: 1MHz VBW: 3MHz	RBW: 1MHz VBW: 10Hz	RBW: 100kHz VBW: 300kHz

\* When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold. Although 00-705 accepts VBW=10Hz for AV measurements, confirmed that superfluous smoothing was not performed.

The carrier level and noise levels were confirmed at each position of X, Y and Z axes of EUT to see the position of maximum noise, and the test was made at the position that has the maximum noise.

Worst position:

Frequency range		Below 1GHz	Above 1GHz	Carrier
EUT (Module & Antenna)	Horizontal	Y	Z	X
	Vertical	X	Y	Z

\* The definition of the axis was listed in a 'Pre-check of the worst position' in APPENDIX 3.

---

## **UL Japan, Inc.**


### **Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

**Figure 1. Antenna angle**

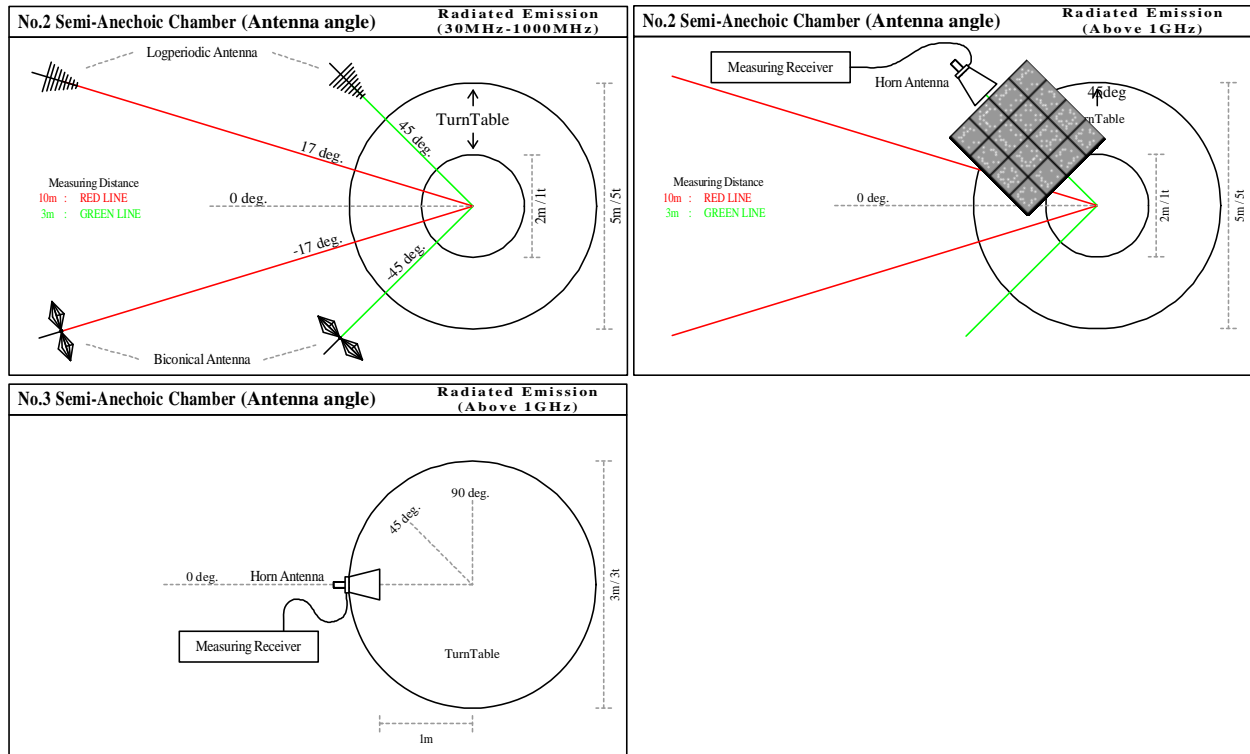

**10.5 Band edge**

Band edge level at 2390MHz and 2483.5MHz is below the limits of FCC 15.209 and band edge level at 2400MHz is below the 20dBc. Refer to the data.

**10.6 Results**

Summary of the test results : Pass \*No noise was detected above the 5<sup>th</sup> order harmonics.  
Refer to APPENDIX 1

**SECTION 11: Spurious emissions (Antenna port conducted)**

**Test procedure**

The Out of Band Emissions was measured with a spectrum analyzer connected to the antenna port. In any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator confirmed 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on a radiated measurement. In the frequency range below 30MHz, RBW was narrowed to separate the noise contents. Then, wide-band noise near the limit was checked separately, however the noise was not detected as shown in the chart. (9kHz-150kHz:RBW=200Hz, 150kHz-30MHz:RBW=10kHz)

Summary of the test results: Pass  
Refer to APPENDIX 1

## **Contents of APPENDIXES**

### **APPENDIX 1: Data of Radio tests**

20dB bandwidth and Carrier frequency separation  
Number of hopping frequency  
Dwell time  
Maximum peak output power  
Radiated emission  
Spurious emission (Antenna port conducted)  
Occupied bandwidth

### **APPENDIX 2: Test instruments**

Test instruments

### **APPENDIX 3: Photographs of test setup**

Radiated emission  
Pre-check of worst position  
Antenna type

---

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401


## APPENDIX 1: Data of Radio tests

### 20dB Bandwidth and Carrier Frequency Separation

Test place	UL Japan, Inc. Shonan EMC Lab.	No.5 Shielded Room
Date	June 26, 2012	
Temperature / Humidity	25 deg.C , 51 %RH	
Engineer	Makoto Hosaka	
Mode	Tx, Bluetooth, BDR, PRBS9	

Mode	Freq. [MHz]	20dB Bandwidth [MHz]	Carrier Frequency Separation [MHz]	Limit for Carrier Frequency Separation [MHz]
DH5	2402.0	0.940	1.000	>= 0.627
DH5	2441.0	0.946	1.000	>= 0.631
DH5	2480.0	0.960	1.000	>= 0.640
Inquiry	2441.0	0.830	2.000	>= 0.553

Limit: Two-thirds of 20dB Bandwidth or 25kHz (whichever is greater).  
 No limit applies to 20dB Bandwidth.

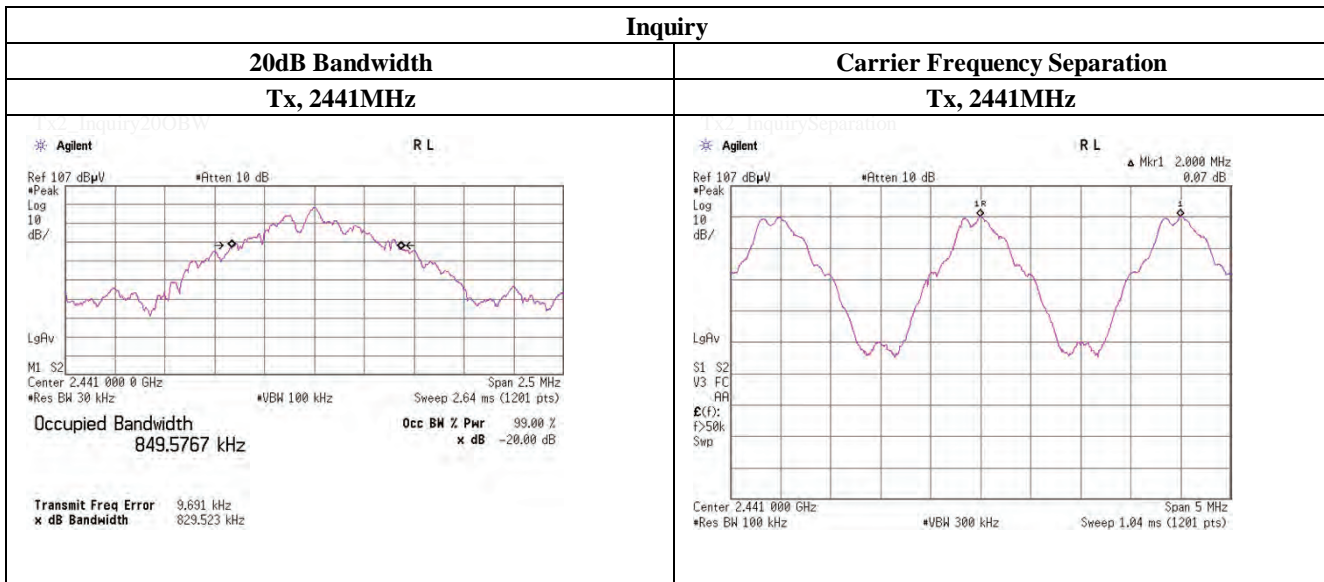

UL Japan, Inc.

Shonan EMC Lab.


1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## 20dB Bandwidth and Carrier Frequency Separation

Tx, Bluetooth, BDR, PRBS9

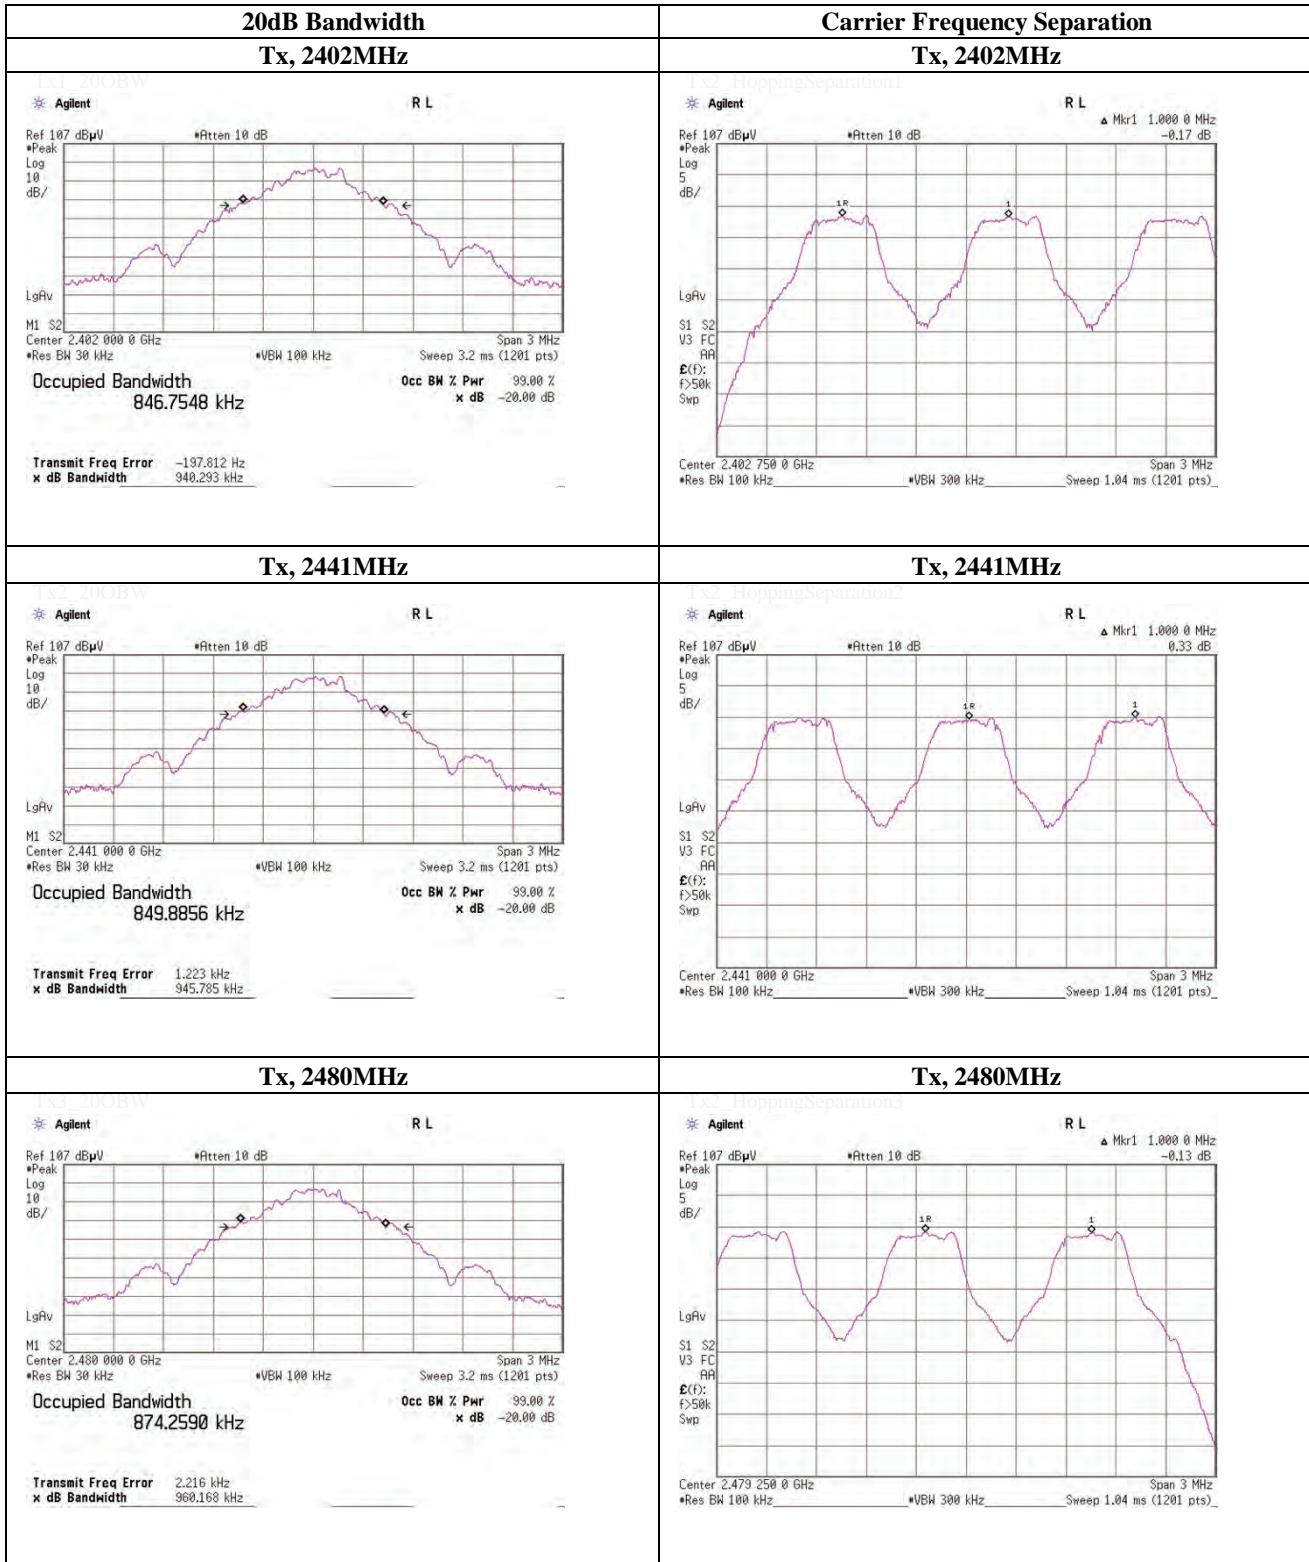

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## 20dB Bandwidth and Carrier Frequency Separation

Test place                    UL Japan, Inc. Shonan EMC Lab.                    No.5 Shielded Room  
 Date                             June 26, 2012  
 Temperature / Humidity    25 deg.C     , 51 %RH  
 Engineer                       Makoto Hosaka  
 Mode                             Tx, Bluetooth, EDR, PRBS9

Mode	Freq. [MHz]	20dB Bandwidth [MHz]	Carrier Frequency Separation [MHz]	Limit for Carrier Frequency Separation [MHz]
3-DH5	2402.0	1.315	1.000	>= 0.876
3-DH5	2441.0	1.311	1.000	>= 0.874
3-DH5	2480.0	1.315	1.000	>= 0.877

Limit: Two-thirds of 20dB Bandwidth or 25kHz (whichever is greater).  
 No limit applies to 20dB Bandwidth.

**UL Japan, Inc.**

**Shonan EMC Lab.**


1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## 20dB Bandwidth and Carrier Frequency Separation

Tx, Bluetooth, EDR, PRBS9

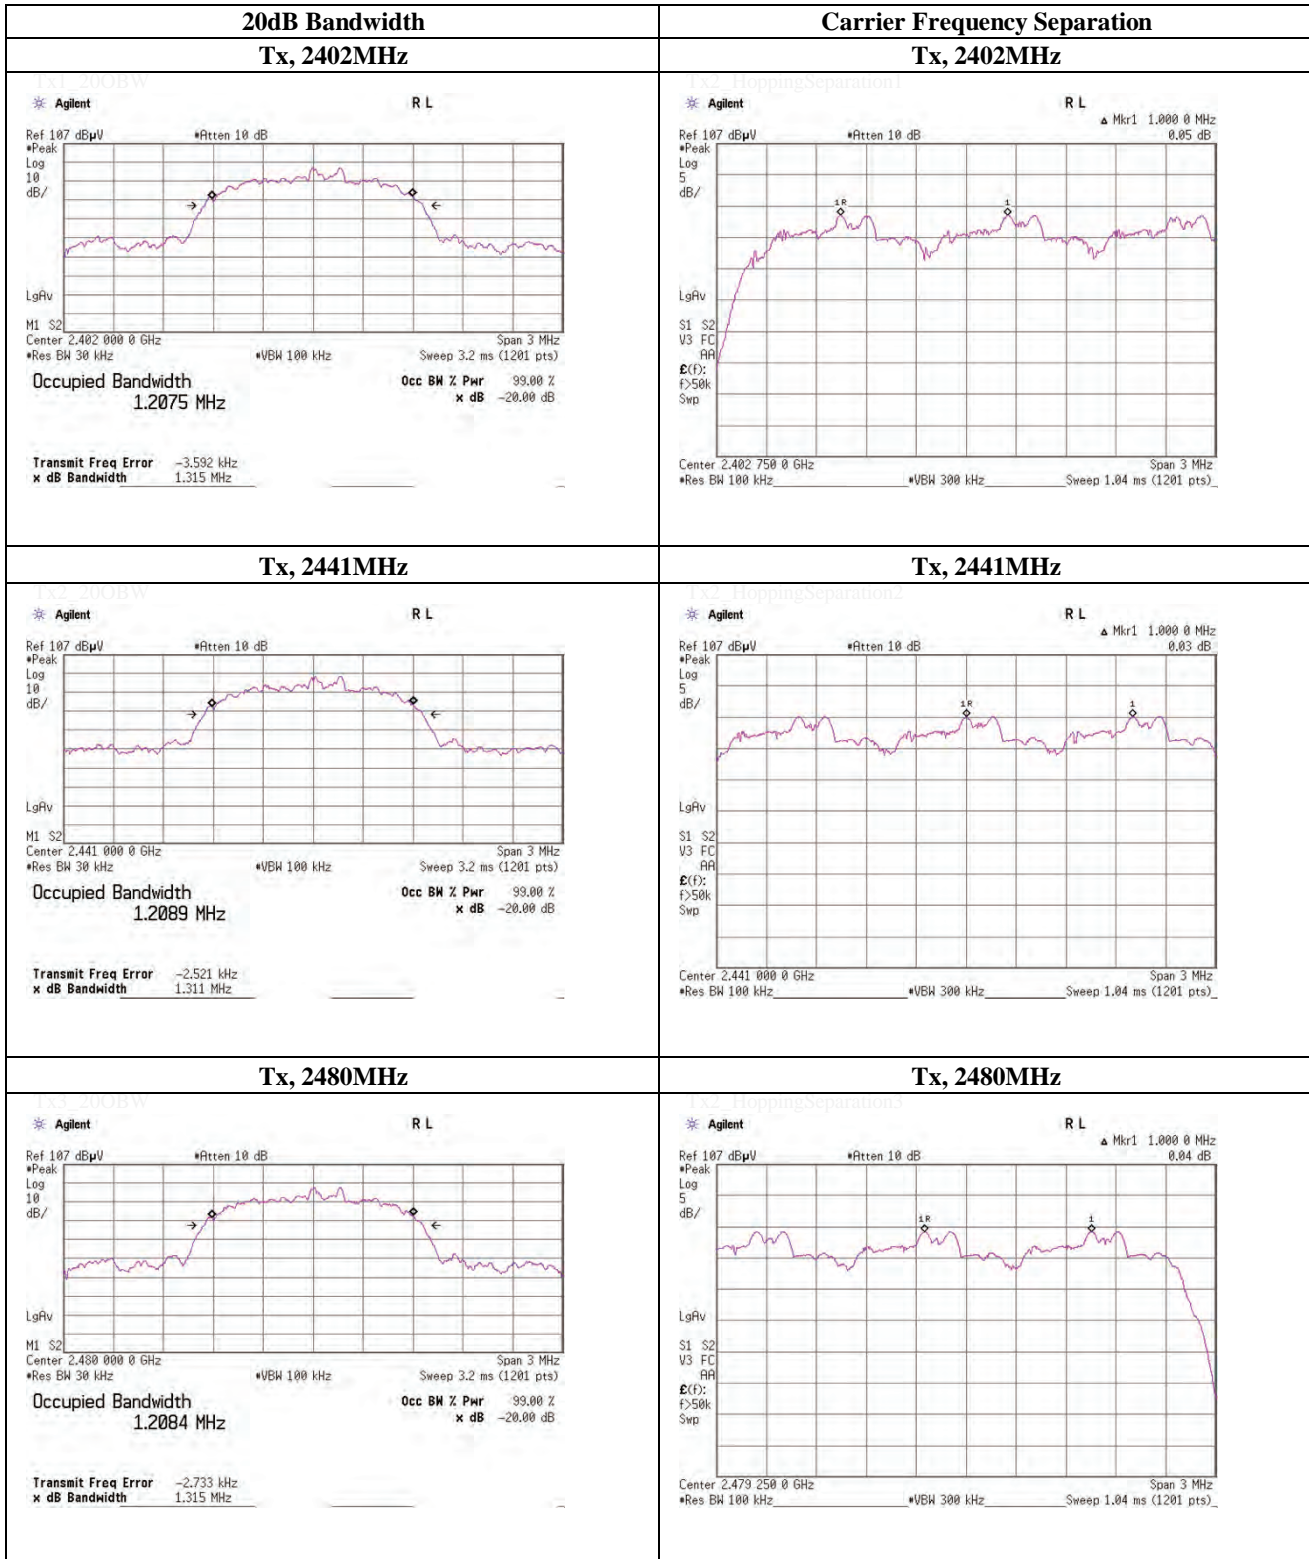

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400


Facsimile : +81 463 50 6401

## Number of Hopping Frequency

Test place	UL Japan, Inc. Shonan EMC Lab.	No.5 Shielded Room
Date	June 26, 2012	
Temperature / Humidity	25 deg.C , 51 %RH	
Engineer	Makoto Hosaka	
Mode	Tx, Bluetooth, BDR, PRBS9	

Mode	Number of Channel [times]	Limit [times]
DH5	79	>= 15

Test was not performed at AFH mode whose number of hopping channel is 20 channels because this Bluetooth radio is in compliance of Bluetooth Specification 3.0.

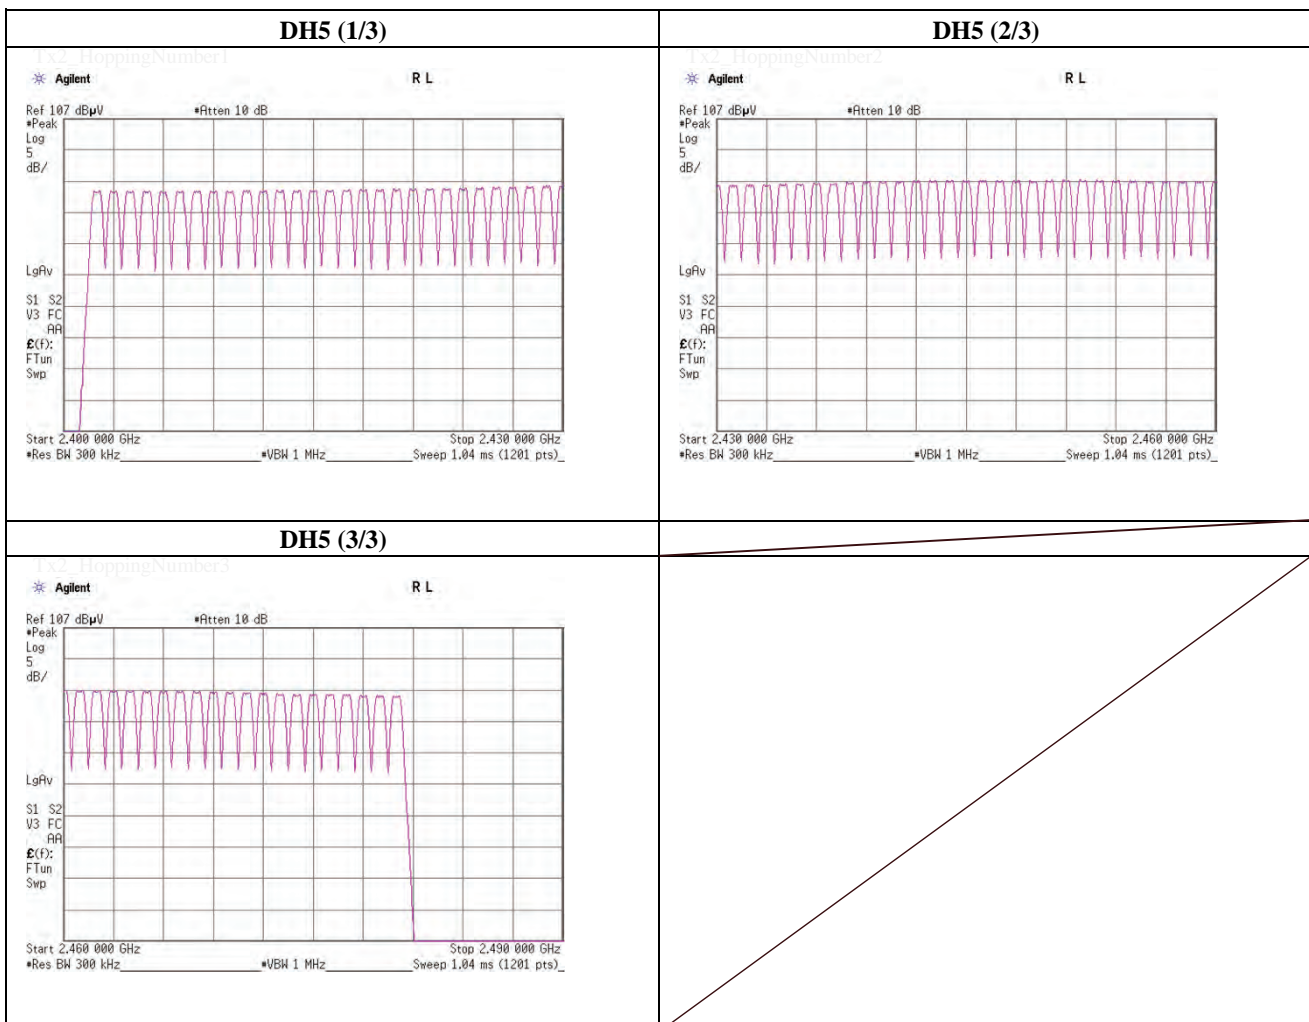

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN


Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Number of Hopping Frequency

Test place	UL Japan, Inc. Shonan EMC Lab.	No.5 Shielded Room
Date	June 28, 2012	
Temperature / Humidity	26 deg.C , 46 %RH	
Engineer	Makoto Hosaka	
Mode	Tx, Bluetooth, Inquiry	

Mode	Number of Channel [times]	Limit [times]
Inquiry	32	>= 15

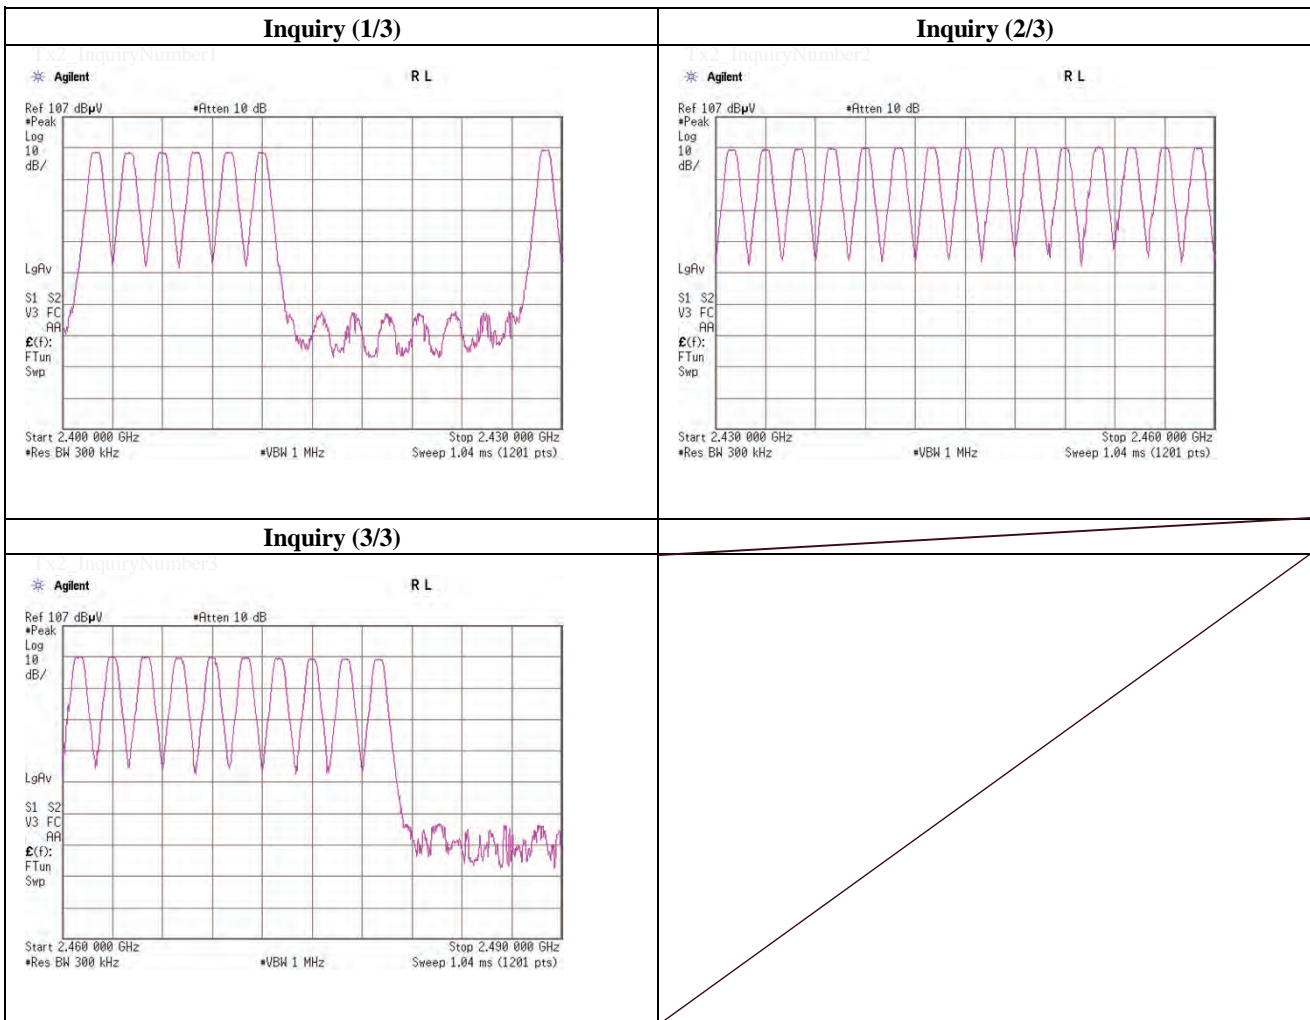

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400


Facsimile : +81 463 50 6401

### Number of Hopping Frequency

Test place	UL Japan, Inc. Shonan EMC Lab.	No.5 Shielded Room
Date	June 26, 2012	
Temperature / Humidity	25 deg.C , 51 %RH	
Engineer	Makoto Hosaka	
Mode	Tx, Bluetooth, EDR, PRBS9	

Mode	Number of Channel [times]	Limit [times]
3-DH5	79	>= 15

Test was not performed at AFH mode whose number of hopping channel is 20 channels because this Bluetooth radio is in compliance of Bluetooth Specification 3.0.

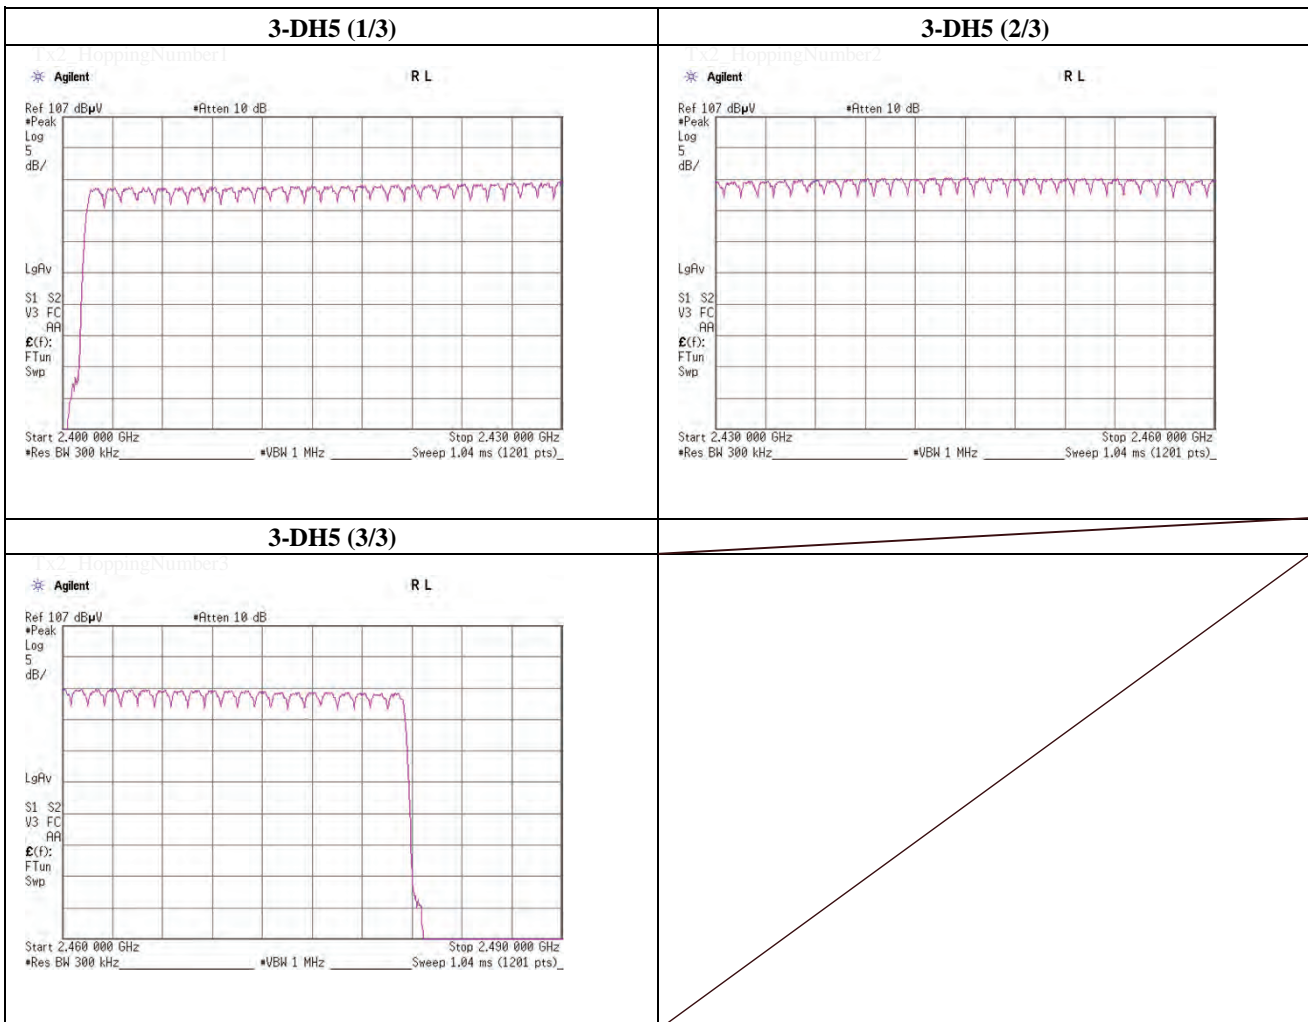

**UL Japan, Inc.**  
**Shonan EMC Lab.**  
 1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN  
 Telephone : +81 463 50 6400  
 Facsimile : +81 463 50 6401

## Dwell Time

Test place           UL Japan, Inc. Shonan EMC Lab.           No.5 Shielded Room  
 Date                 June 28, 2012  
 Temperature / Humidity 26 deg.C   , 46 %RH  
 Engineer            Makoto Hosaka  
 Mode                Tx, Bluetooth, BDR, PRBS9

Mode	Number of transmission in a 31.6 (79 Hopping x 0.4) / 12.8 (32 Hopping x 0.4) second period	Length of transmission time [msec]	Result [msec]	Limit [msec]
DH1	49.0 / 5.0 sec. x 31.6 sec. = 310 times	0.387	120	400
DH3	26.6 / 5.0 sec. x 31.6 sec. = 169 times	1.643	278	400
DH5	18.2 / 5.0 sec. x 31.6 sec. = 116 times	2.891	335	400
Inquiry	100.0 / 1.0 sec. x 12.8 sec. = 1280 times	0.093	119	400

Sample Calculation

Result = Number of transmission x Length of transmission time


\*Average data of 5 tests.(except Inquiry)

Mode	Sampling [times]					Average [times]
	1	2	3	4	5	
DH1	50	50	48	50	47	49.0
DH3	25	26	29	24	29	26.6
DH5	18	20	16	21	16	18.2
Inquiry	100	-	-	-	-	100.0

Sample Calculation

Average= Summation(Sampling 1 to 5) / 5

This device complies with the Bluetooth protocol for FHSS operation, employing a pseudo random channel selection and hopping rate to ensure that the occupancy time in  $N \times 0.4s$ , where  $N$  is the number of channels being used in the hopping sequence ( $20 \leq N \leq 79$ ), is always less than 0.4s regardless of packet size (DH1, DH3 or DH5). This is confirmed in the test report for  $N=79$ .

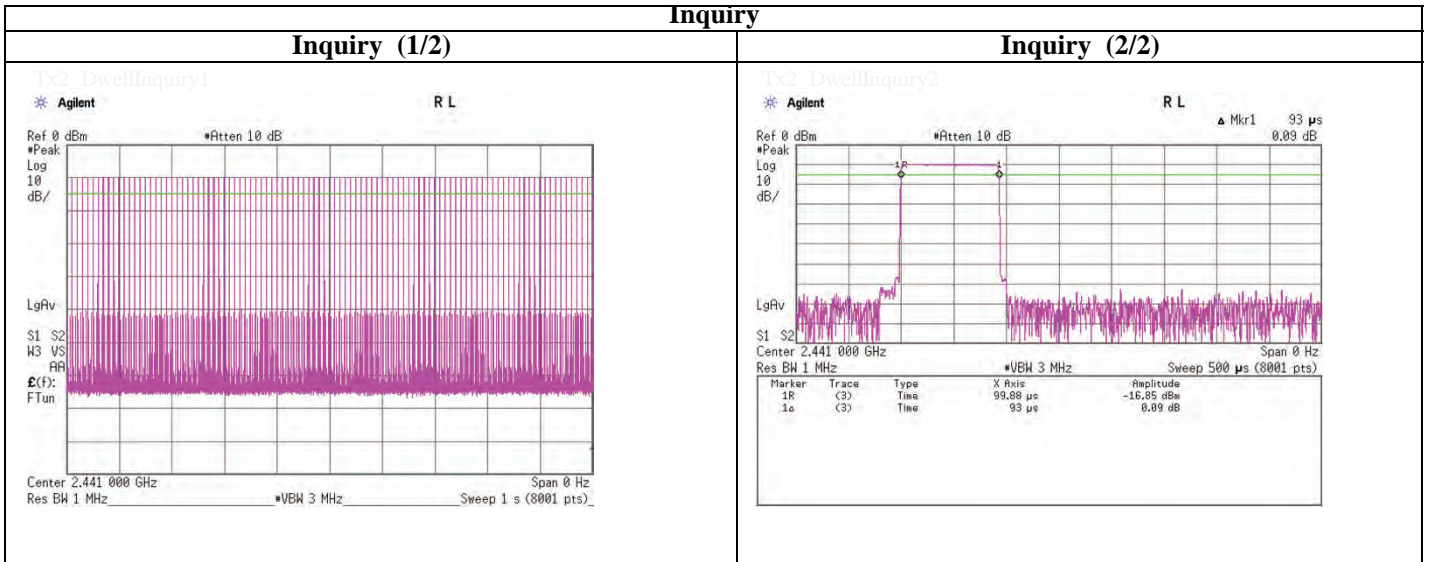

**UL Japan, Inc.**

**Shonan EMC Lab.**


1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Dwell time

Tx, Bluetooth, BDR, PRBS9

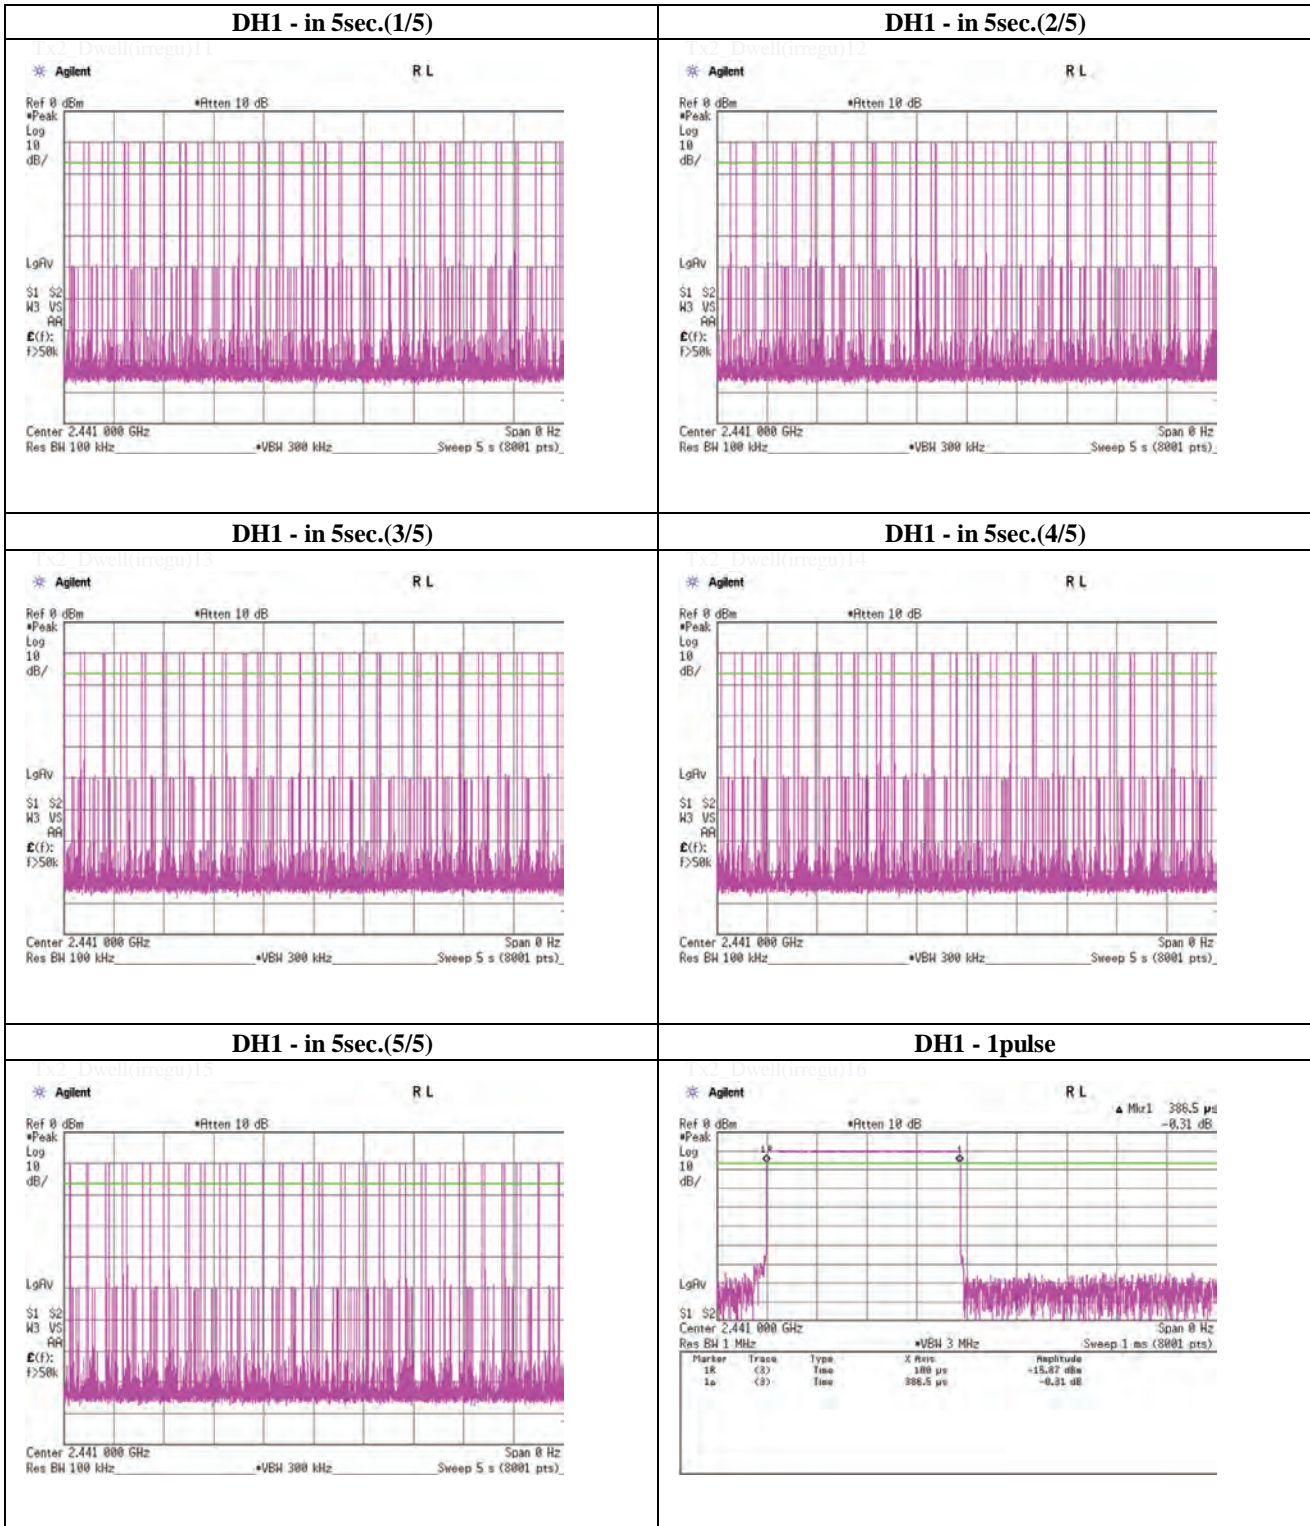

**UL Japan, Inc.**

**Shonan EMC Lab.**


1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Dwell time

Tx, Bluetooth, BDR, PRBS9

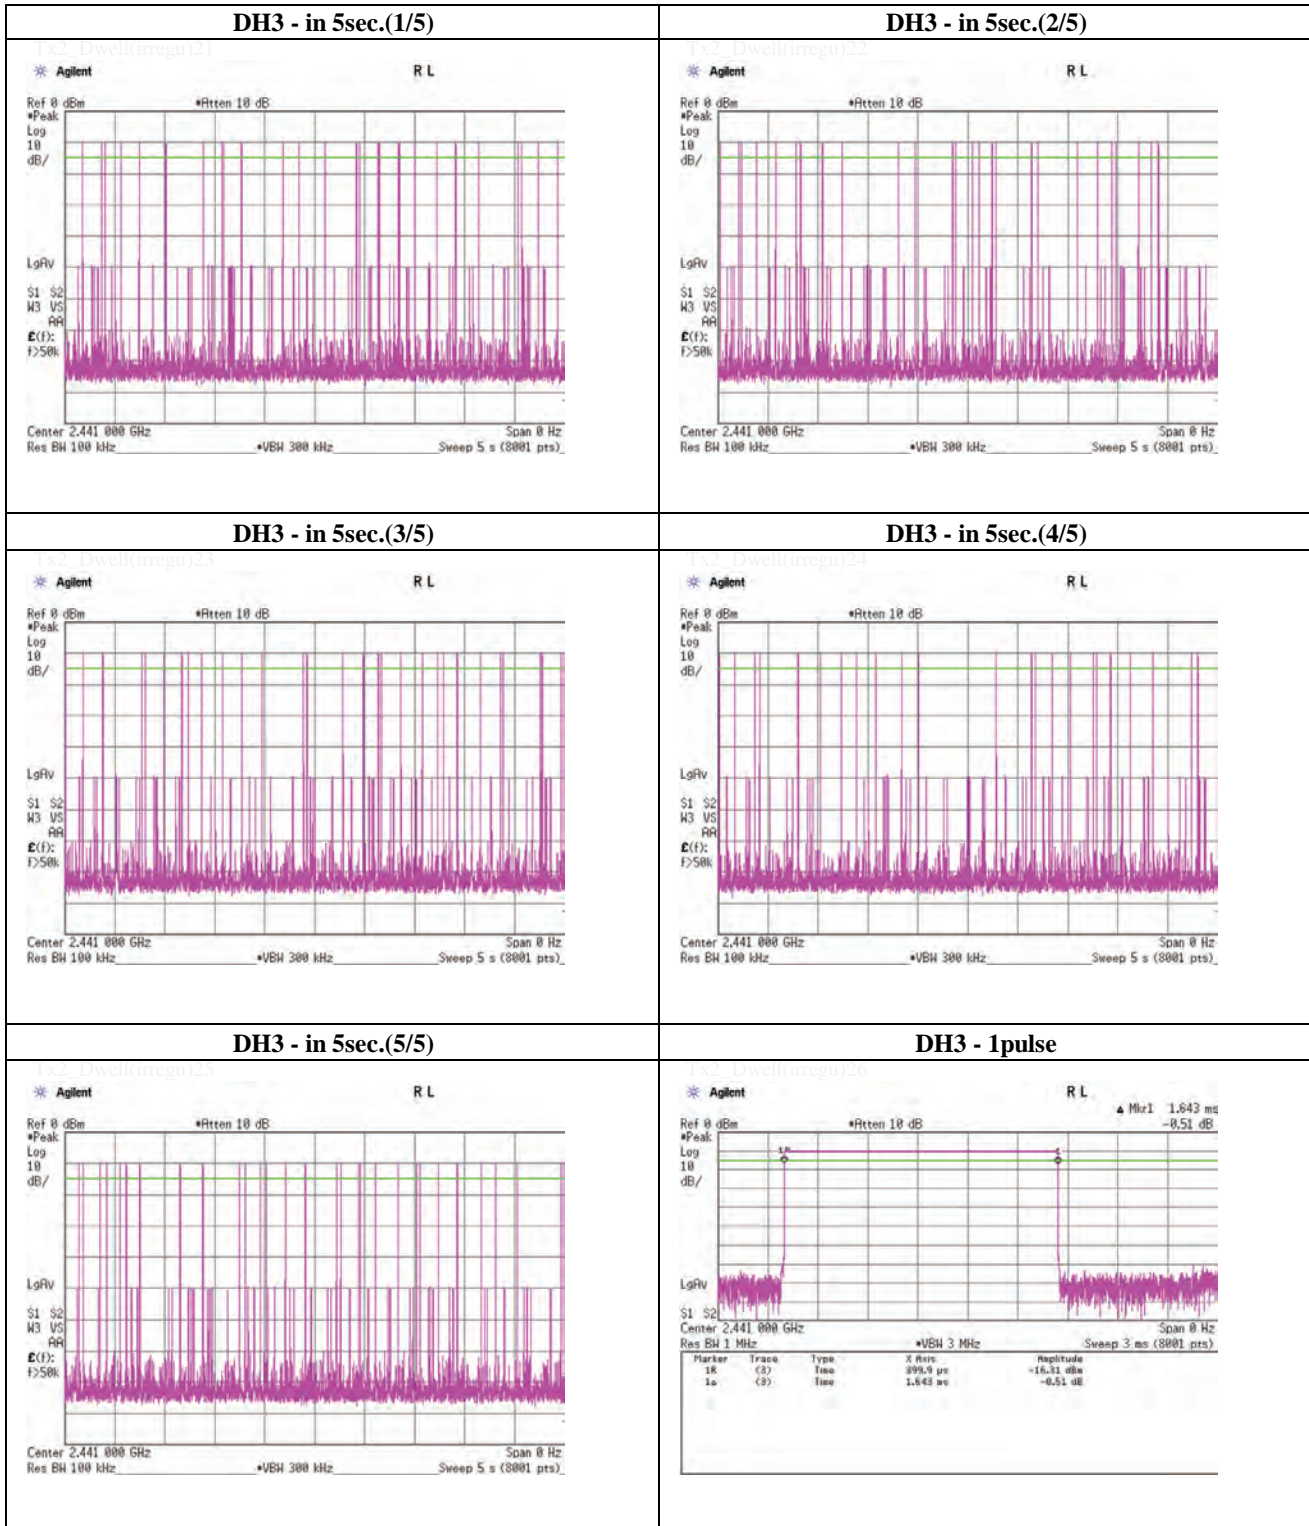

**UL Japan, Inc.**

**Shonan EMC Lab.**


1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Dwell time

Tx, Bluetooth, BDR, PRBS9

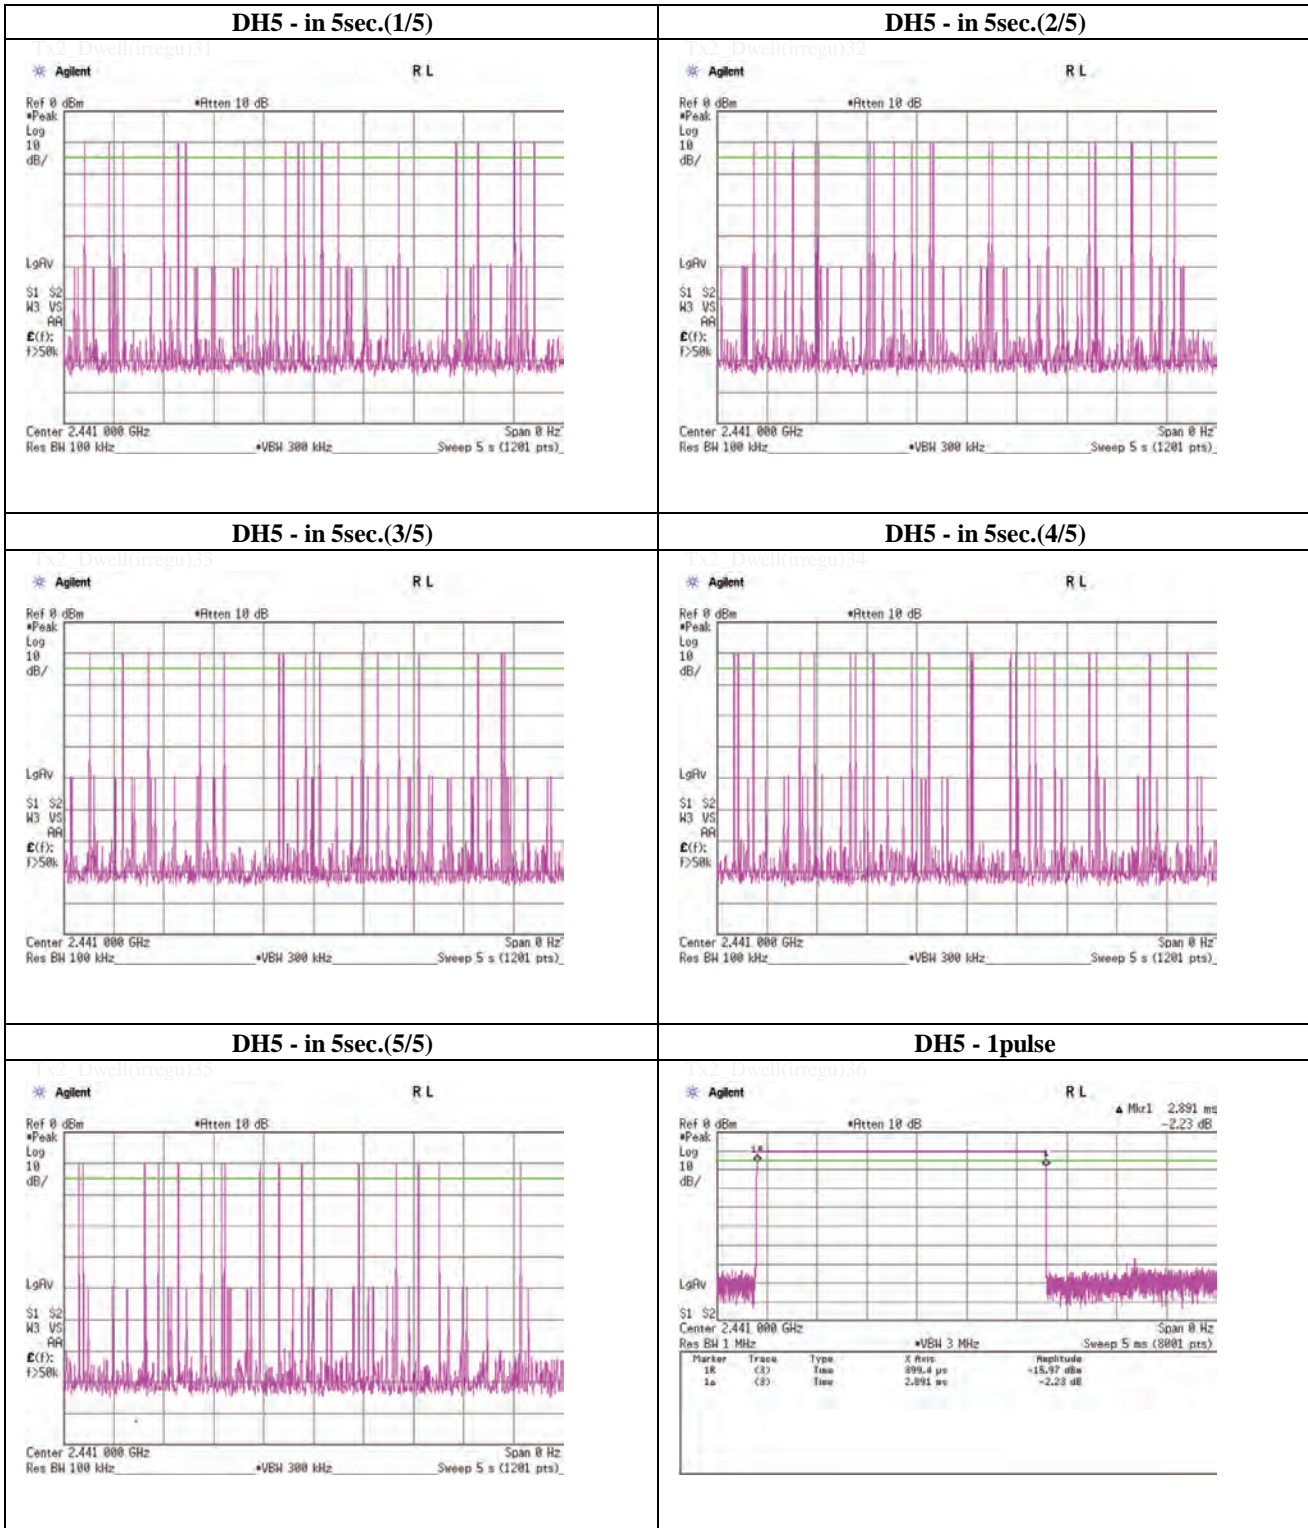

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Dwell Time

Test place           UL Japan, Inc. Shonan EMC Lab.           No.5 Shielded Room  
 Date                 June 28, 2012  
 Temperature / Humidity 26 deg.C , 46 %RH  
 Engineer            Makoto Hosaka  
 Mode                Tx, Bluetooth, EDR, PRBS9

Mode	Number of transmission in a 31.6 (79 Hopping x 0.4)	Length of transmission time [msec]	Result [msec]	Limit [msec]
3-DH1	49.4 / 5.0 sec. x 31.6 sec. = 313 times	0.388	121	400
3-DH3	26.2 / 5.0 sec. x 31.6 sec. = 166 times	1.636	272	400
3-DH5	19.4 / 5.0 sec. x 31.6 sec. = 123 times	2.884	355	400

Sample Calculation

Result = Number of transmission x Length of transmission time

\*Average data of 5 tests.(except Inquiry)

Mode	Sampling [times]					Average [times]
	1	2	3	4	5	
3-DH1	50	48	50	48	51	49.4
3-DH3	25	27	27	27	25	26.2
3-DH5	18	20	22	15	22	19.4

Sample Calculation

Average= Summation(Sampling 1 to 5) / 5

This device complies with the Bluetooth protocol for FHSS operation, employing a pseudo random channel selection and hopping rate to ensure that the occupancy time in  $N \times 0.4s$ , where  $N$  is the number of channels being used in the hopping sequence ( $20 \leq N \leq 79$ ), is always less than 0.4s regardless of packet size (3-DH1, 3-DH3 or 3-DH5). This is confirmed in the test report for  $N=79$ .

**UL Japan, Inc.**

**Shonan EMC Lab.**


1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Dwell time

Tx, Bluetooth, EDR, PRBS9

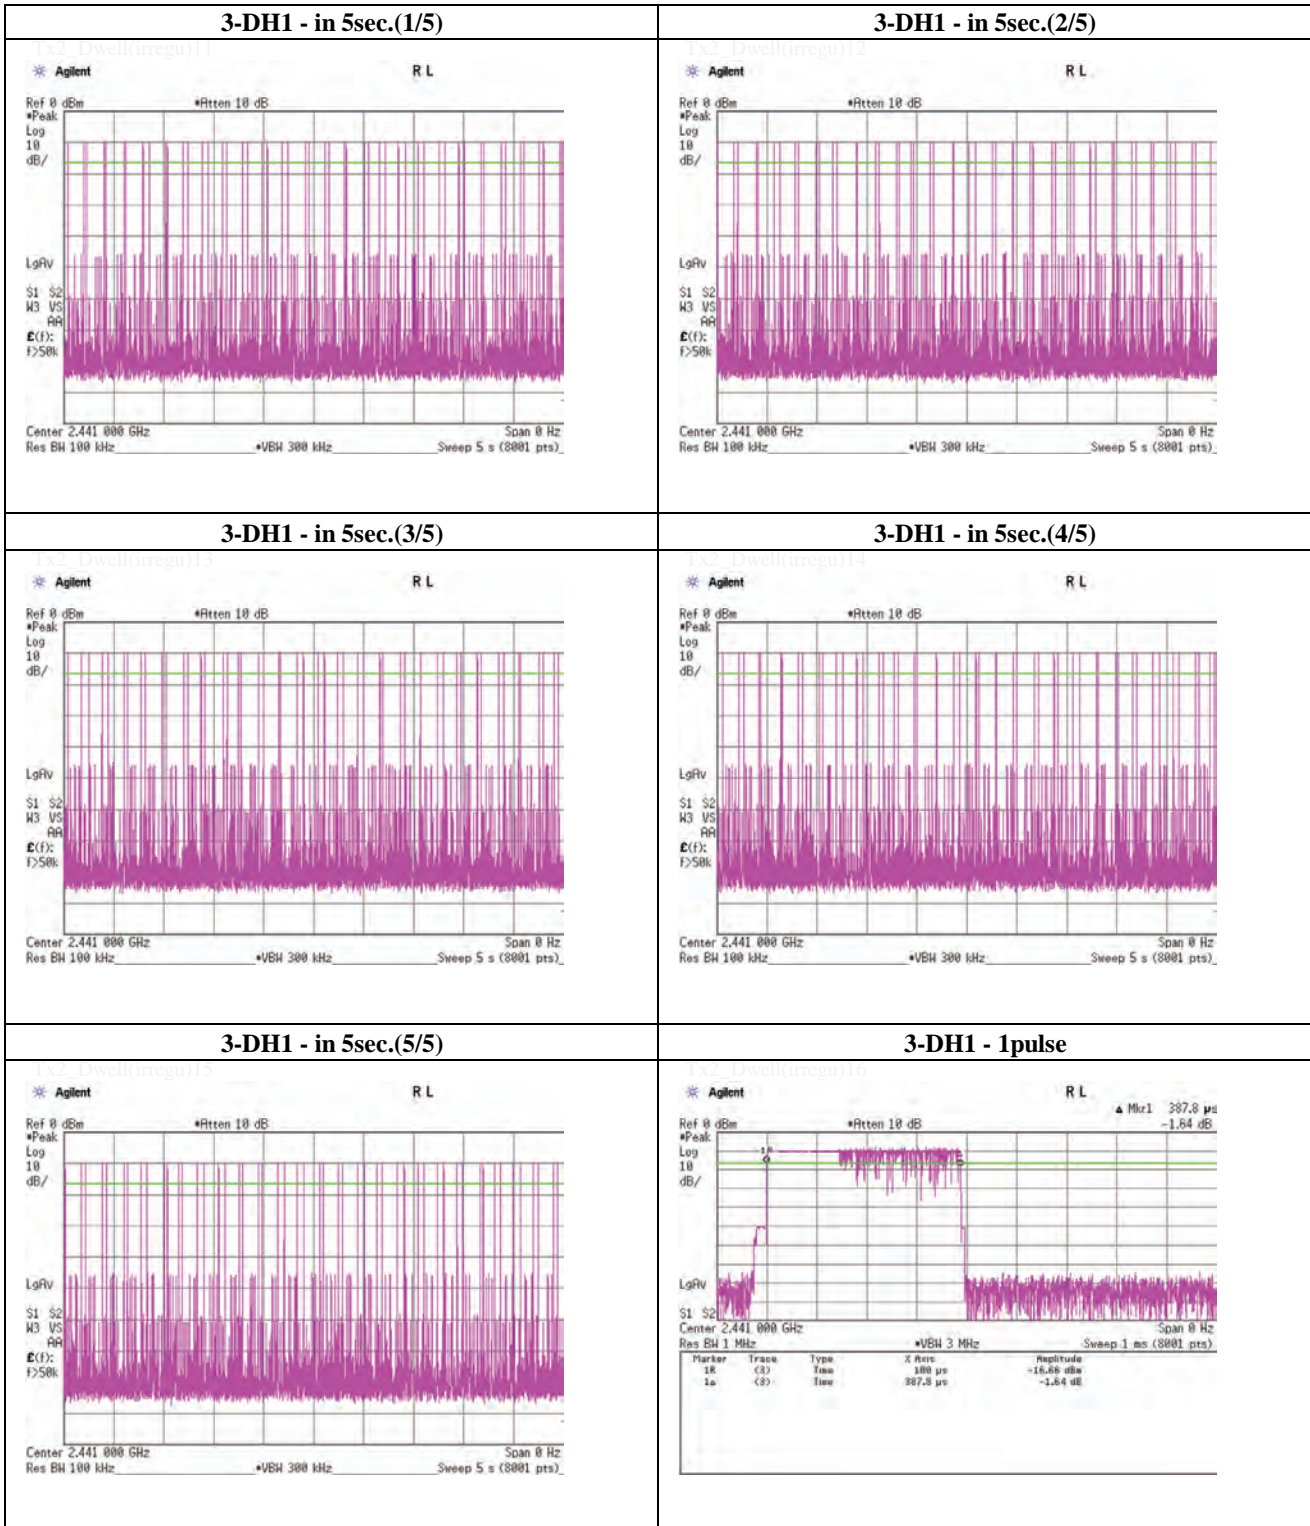

**UL Japan, Inc.**

**Shonan EMC Lab.**


1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Dwell time

Tx, Bluetooth, EDR, PRBS9

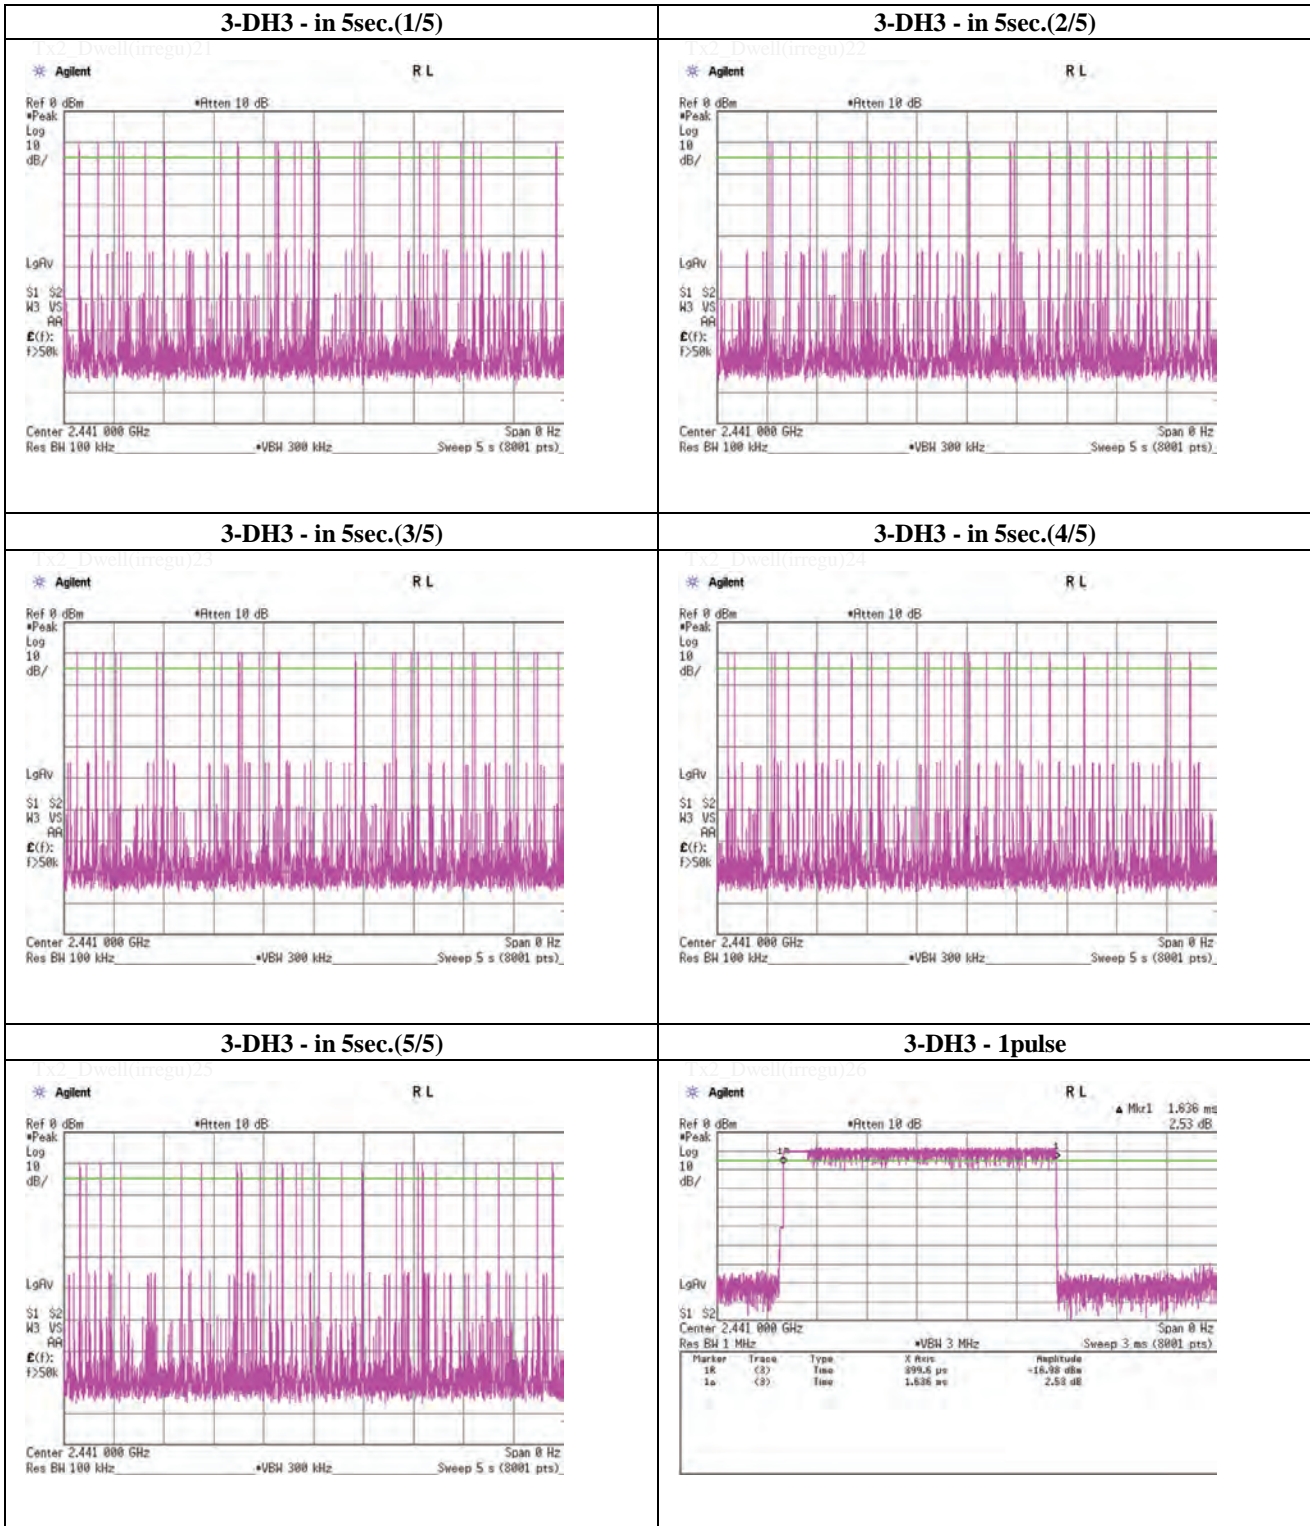

**UL Japan, Inc.**

**Shonan EMC Lab.**


1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Dwell time

Tx, Bluetooth, EDR, PRBS9

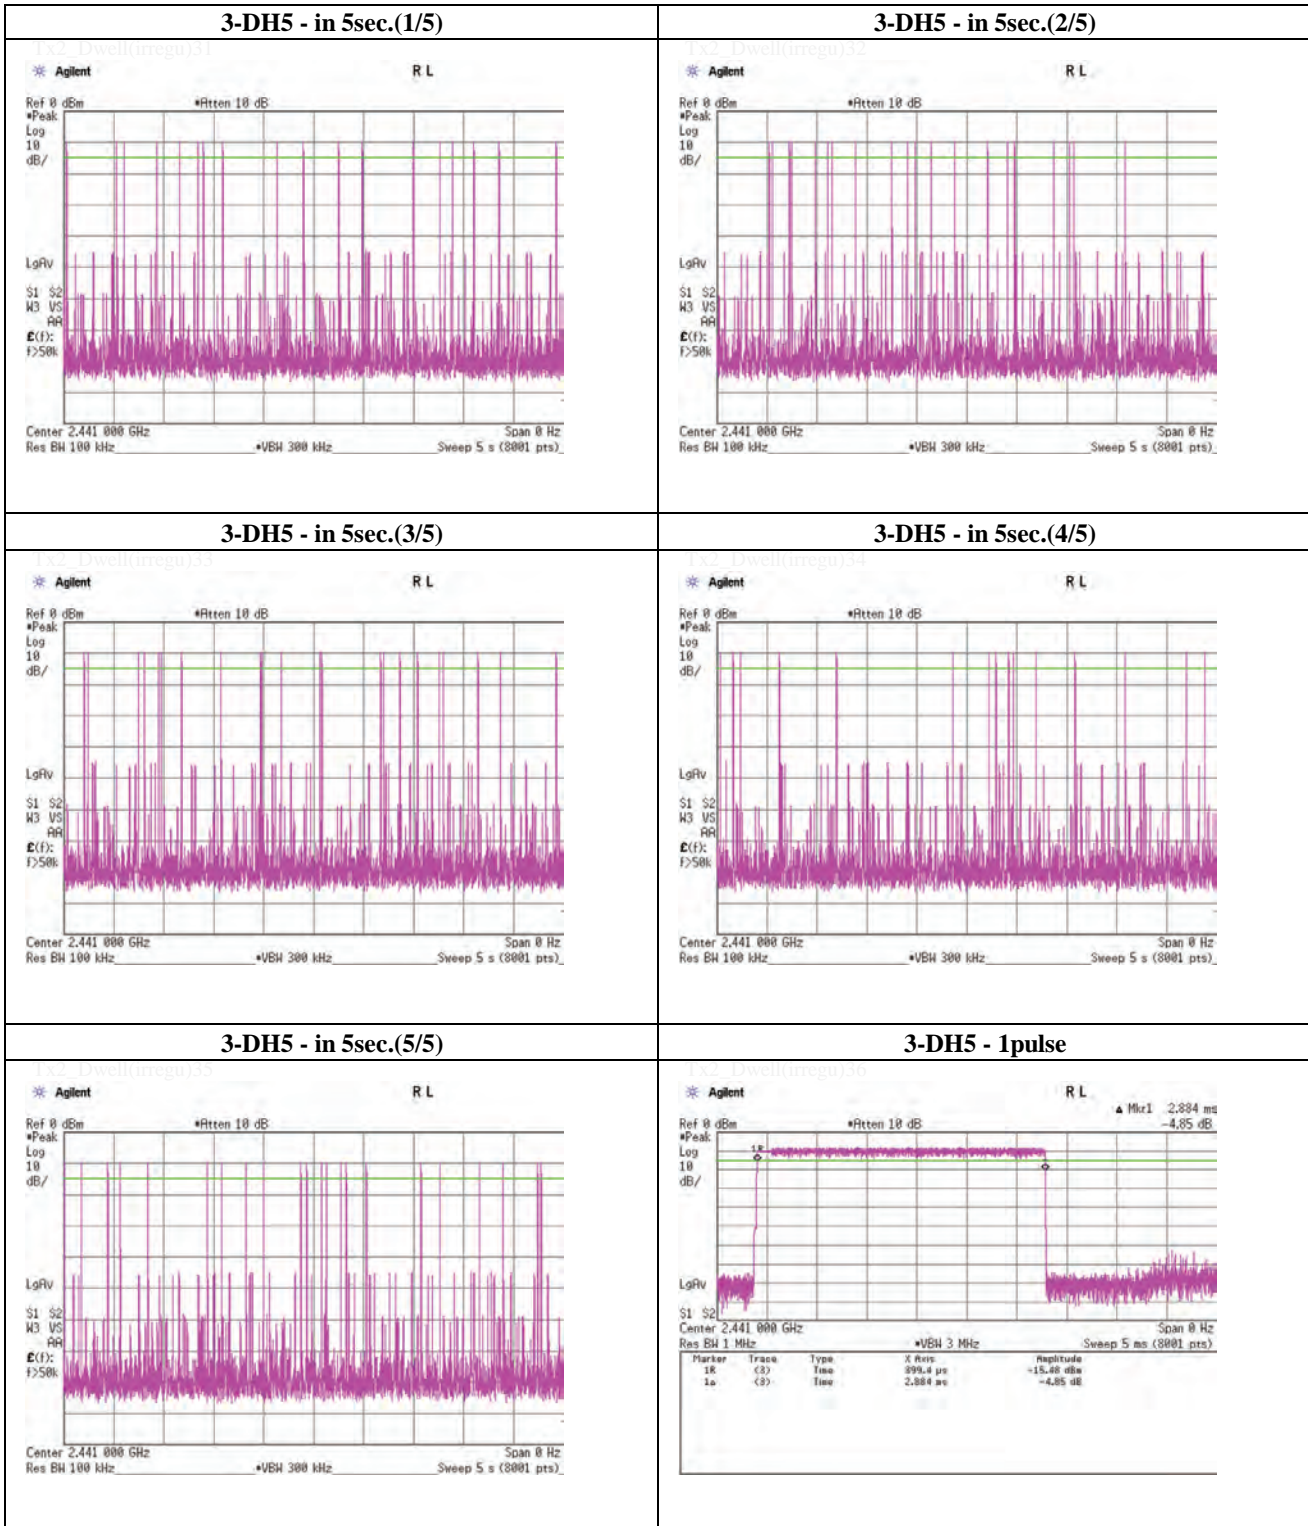

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Peak Output Power (Conducted)

Test place                   UL Japan, Inc. Shonan EMC Lab.       No.5 Shielded Room  
Date                            June 26, 2012  
Temperature / Humidity     25 deg.C   , 51 %RH  
Engineer                     Makoto Hosaka  
Mode                          Tx, Bluetooth

(\* P/M: Power Meter with power sensor)

	Freq. [MHz]	P/M (Peak) Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result		Limit		Margin [dB]
					[dBm]	[mW]	[dBm]	[mW]	
DH5	2402.0	-11.20	1.51	9.97	0.28	1.07	20.97	125	20.69
DH5	2441.0	-9.76	1.48	9.97	1.69	1.48	20.97	125	19.28
DH5	2480.0	-10.67	1.49	9.97	0.79	1.20	20.97	125	20.18
2-DH5	2402.0	-9.52	1.51	9.97	1.96	1.57	20.97	125	19.01
2-DH5	2441.0	-7.83	1.48	9.97	3.62	2.30	20.97	125	17.35
2-DH5	2480.0	-8.96	1.49	9.97	2.50	1.78	20.97	125	18.47
3-DH5	2402.0	-9.21	1.51	9.97	2.27	1.69	20.97	125	18.70
3-DH5	2441.0	-7.49	1.48	9.97	3.96	2.49	20.97	125	17.01
3-DH5	2480.0	-8.59	1.49	9.97	2.87	1.94	20.97	125	18.10

Sample Calculation:

Result = Reading + Cable Loss + Atten. Loss

**UL Japan, Inc.**  
**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Radiated Emission

Test place	UL Japan, Inc. Shonan EMC Lab.	No.2 and 3 Semi Anechoic Chamber
Date	July 3, 2012	July 11, 2012
Temperature / Humidity	25 deg.C , 62 %RH	23 deg.C , 60 %RH
Engineer	Makoto Hosaka	Makoto Hosaka
Mode	Tx, 2402 MHz Tx, Bluetooth, BDR, PRBS9	

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	182.000	QP	28.6	16.0	9.0	31.8	21.8	43.5	21.7	178	4	
Hori.	2390.000	PK	43.9	27.2	14.1	38.2	47.0	73.9	26.9	100	81	
Hori.	4804.000	PK	61.5	31.2	6.5	37.0	62.2	73.9	11.7	126	69	
Hori.	7206.000	PK	52.6	36.5	8.0	39.0	58.1	73.9	15.8	154	289	
Hori.	9608.000	PK	45.0	38.3	9.1	37.2	55.2	73.9	18.7	100	332	
Hori.	12010.000	PK	46.0	39.3	10.5	37.9	57.9	73.9	16.0	100	0	
Vert.	56.540	QP	36.1	8.9	7.2	31.9	20.3	40.0	19.7	100	112	
Vert.	75.851	QP	32.7	6.4	7.8	31.9	15.0	40.0	25.0	100	77	
Vert.	78.000	QP	37.5	6.4	8.0	31.9	20.0	40.0	20.0	100	72	
Vert.	106.498	QP	26.9	11.1	8.0	31.9	14.1	43.5	29.4	100	84	
Vert.	129.999	QP	32.6	13.7	8.3	31.9	22.7	43.5	20.8	100	222	
Vert.	182.000	QP	23.6	16.0	9.0	31.8	16.8	43.5	26.7	100	174	
Vert.	2390.000	PK	43.7	27.2	14.1	38.2	46.8	73.9	27.1	123	161	
Vert.	4804.000	PK	60.6	31.2	6.5	37.0	61.3	73.9	12.6	100	230	
Vert.	7206.000	PK	52.0	36.5	8.0	39.0	57.5	73.9	16.4	160	5	
Vert.	9608.000	PK	44.6	38.3	9.1	37.2	54.8	73.9	19.1	100	80	
Vert.	12010.000	PK	46.4	39.3	10.5	37.9	58.3	73.9	15.6	100	0	

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Dwell Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	2390.000	AV	31.5	27.2	14.1	38.2	-24.8	9.8	53.9	44.1	(AV) VBW:10Hz
Hori.	4804.000	AV	57.8	31.2	6.5	37.0	-24.8	33.7	53.9	20.2	(AV) VBW:10Hz
Hori.	7206.000	AV	44.8	36.5	8.0	39.0	-24.8	25.5	53.9	28.4	(AV) VBW:10Hz
Hori.	9608.000	AV	33.6	38.3	9.1	37.2	-24.8	19.0	53.9	34.9	(AV) VBW:10Hz
Hori.	12010.000	AV	33.8	39.3	10.5	37.9	-24.8	20.9	53.9	33.0	(AV) VBW:10Hz
Vert.	2390.000	AV	31.4	27.2	14.1	38.2	-24.8	9.7	53.9	44.2	(AV) VBW:10Hz
Vert.	4804.000	AV	56.9	31.2	6.5	37.0	-24.8	32.8	53.9	21.1	(AV) VBW:10Hz
Vert.	7206.000	AV	44.8	36.5	8.0	39.0	-24.8	25.5	53.9	28.4	(AV) VBW:10Hz
Vert.	9608.000	AV	33.0	38.3	9.1	37.2	-24.8	18.4	53.9	35.5	(AV) VBW:10Hz
Vert.	12010.000	AV	33.9	39.3	10.5	37.9	-24.8	21.0	53.9	32.9	(AV) VBW:10Hz

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 15GHz)) - Gain(Amplifier) + Dwell time factor (refer to "Dwell time factor Calculation")

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*No noise was detected above the 5th order harmonics.

Distance factor : 15GHz -40GHz : 20log(3.0m/1.0m)= 9.5dB

### 20dBc Data Sheet (RBW 100kHz, VBW 300kHz)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	2402.000	PK	90.2	27.3	14.1	38.2	93.4	-	-	Carrier
Hori.	2400.000	PK	36.6	27.3	14.1	38.2	39.8	73.4	33.6	
Vert.	2402.000	PK	88.7	27.3	14.1	38.2	91.9	-	-	Carrier
Vert.	2400.000	PK	35.9	27.3	14.1	38.2	39.1	71.9	32.8	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 15GHz)) - Gain(Amplifier)

**UL Japan, Inc.**  
**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Radiated Emission

Test place	UL Japan, Inc. Shonan EMC Lab.	No.2 and 3 Semi Anechoic Chamber
Date	July 3, 2012	July 11, 2012
Temperature / Humidity	25 deg.C , 62 %RH	23 deg.C , 60 %RH
Engineer	Makoto Hosaka	Makoto Hosaka
Mode	Tx, 2441 MHz Tx, Bluetooth, BDR, PRBS9	

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	182.000	QP	29.0	16.0	9.0	31.8	22.2	43.5	21.3	177	29	
Hori.	4882.000	PK	50.6	31.4	6.6	36.9	51.7	73.9	22.2	134	71	
Hori.	7323.000	PK	51.0	36.7	8.2	39.0	56.9	73.9	17.0	122	13	
Hori.	9764.000	PK	43.5	38.7	9.3	37.2	54.3	73.9	19.6	100	350	
Hori.	12205.000	PK	43.6	39.4	10.6	37.7	55.9	73.9	18.0	100	0	
Vert.	31.615	QP	24.3	17.8	6.8	31.9	17.0	40.0	23.0	100	187	
Vert.	53.208	QP	34.9	9.8	7.2	31.9	20.0	40.0	20.0	100	109	
Vert.	78.000	QP	37.5	6.4	8.0	31.9	20.0	40.0	20.0	100	114	
Vert.	113.151	QP	28.2	12.0	8.0	31.9	16.3	43.5	27.2	100	231	
Vert.	129.999	QP	32.8	13.7	8.3	31.9	22.9	43.5	20.6	100	269	
Vert.	4882.000	PK	49.7	31.4	6.6	36.9	50.8	73.9	23.1	100	229	
Vert.	7323.000	PK	52.1	36.7	8.2	39.0	58.0	73.9	15.9	148	12	
Vert.	9764.000	PK	42.9	38.7	9.3	37.2	53.7	73.9	20.2	100	85	
Vert.	12205.000	PK	43.2	39.4	10.6	37.7	55.5	73.9	18.4	100	0	

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Dwell Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	4882.000	AV	44.7	31.4	6.6	36.9	-24.8	21.0	53.9	32.9	(AV) VBW:10Hz
Hori.	7323.000	AV	43.4	36.7	8.2	39.0	-24.8	24.5	53.9	29.4	(AV) VBW:10Hz
Hori.	9764.000	AV	31.5	38.7	9.3	37.2	-24.8	17.5	53.9	36.4	(AV) VBW:10Hz
Hori.	12205.000	AV	31.6	39.4	10.6	37.7	-24.8	19.1	53.9	34.8	(AV) VBW:10Hz
Vert.	4882.000	AV	43.6	31.4	6.6	36.9	-24.8	19.9	53.9	34.0	(AV) VBW:10Hz
Vert.	7323.000	AV	45.0	36.7	8.2	39.0	-24.8	26.1	53.9	27.8	(AV) VBW:10Hz
Vert.	9764.000	AV	31.4	38.7	9.3	37.2	-24.8	17.4	53.9	36.5	(AV) VBW:10Hz
Vert.	12205.000	AV	31.8	39.4	10.6	37.7	-24.8	19.3	53.9	34.6	(AV) VBW:10Hz

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 15GHz)) - Gain(Amplifier) + Dwell time factor (refer to "Dwell time factor Calculation")

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*No noise was detected above the 5th order harmonics.

Distance factor : 15GHz -40GHz :  $20\log(3.0m/1.0m) = 9.5dB$

## Radiated Emission

Test place	UL Japan, Inc. Shonan EMC Lab.	No.2 and 3 Semi Anechoic Chamber
Date	July 3, 2012	July 11, 2012
Temperature / Humidity	25 deg.C , 62 %RH	23 deg.C , 60 %RH
Engineer	Makoto Hosaka	Makoto Hosaka
Mode	Tx, 2480 MHz Tx, Bluetooth, BDR, PRBS9	

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	182.000	QP	28.7	16.0	9.0	31.8	21.9	43.5	21.6	175	25	
Hori.	2483.500	PK	44.7	27.5	14.1	38.1	48.2	73.9	25.7	100	67	
Hori.	4960.000	PK	55.0	31.6	6.7	36.8	56.5	73.9	17.4	122	15	
Hori.	7440.000	PK	52.7	37.0	8.4	39.0	59.1	73.9	14.8	140	12	
Hori.	9920.000	PK	43.9	39.0	9.3	37.2	55.0	73.9	18.9	100	350	
Hori.	12400.000	PK	44.3	39.5	10.5	37.5	56.8	73.9	17.1	100	0	
Vert.	31.600	QP	24.5	17.8	6.8	31.9	17.2	40.0	22.8	100	165	
Vert.	53.200	QP	35.1	9.8	7.2	31.9	20.2	40.0	19.8	100	102	
Vert.	78.000	QP	37.6	6.4	8.0	31.9	20.1	40.0	19.9	100	114	
Vert.	113.351	QP	28.0	12.0	8.0	31.9	16.1	43.5	27.4	100	218	
Vert.	129.999	QP	32.6	13.7	8.3	31.9	22.7	43.5	20.8	100	269	
Vert.	2483.500	PK	44.0	27.5	14.1	38.1	47.5	73.9	26.4	144	140	
Vert.	4960.000	PK	54.5	31.6	6.7	36.8	56.0	73.9	17.9	155	0	
Vert.	7440.000	PK	51.1	37.0	8.4	39.0	57.5	73.9	16.4	151	7	
Vert.	9920.000	PK	42.6	39.0	9.3	37.2	53.7	73.9	20.2	100	87	
Vert.	12400.000	PK	44.5	39.5	10.5	37.5	57.0	73.9	16.9	100	0	

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Dwell Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	2483.500	AV	31.9	27.5	14.1	38.1	-24.8	10.6	53.9	43.3	(AV) VBW:10Hz
Hori.	4960.000	AV	50.6	31.6	6.7	36.8	-24.8	27.3	53.9	26.6	(AV) VBW:10Hz
Hori.	7440.000	AV	44.9	37.0	8.4	39.0	-24.8	26.5	53.9	27.4	(AV) VBW:10Hz
Hori.	9920.000	AV	31.3	39.0	9.3	37.2	-24.8	17.6	53.9	36.3	(AV) VBW:10Hz
Hori.	12400.000	AV	31.9	39.5	10.5	37.5	-24.8	19.6	53.9	34.3	(AV) VBW:10Hz
Vert.	2483.500	AV	31.7	27.5	14.1	38.1	-24.8	10.4	53.9	43.5	(AV) VBW:10Hz
Vert.	4960.000	AV	50.2	31.6	6.7	36.8	-24.8	26.9	53.9	27.0	(AV) VBW:10Hz
Vert.	7440.000	AV	43.6	37.0	8.4	39.0	-24.8	25.2	53.9	28.7	(AV) VBW:10Hz
Vert.	9920.000	AV	31.2	39.0	9.3	37.2	-24.8	17.5	53.9	36.4	(AV) VBW:10Hz
Vert.	12400.000	AV	31.8	39.5	10.5	37.5	-24.8	19.5	53.9	34.4	(AV) VBW:10Hz

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 15GHz)) - Gain(Amplifier) + Dwell time factor (refer to "Dwell time factor Calculation")


\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*No noise was detected above the 5th order harmonics.

Distance factor : 15GHz -40GHz : 20log(3.0m/1.0m)= 9.5dB

## Dwell time factor Calculation chart

### Dwell time factor Calculation Tx, Bluetooth, BDR, PRBS9

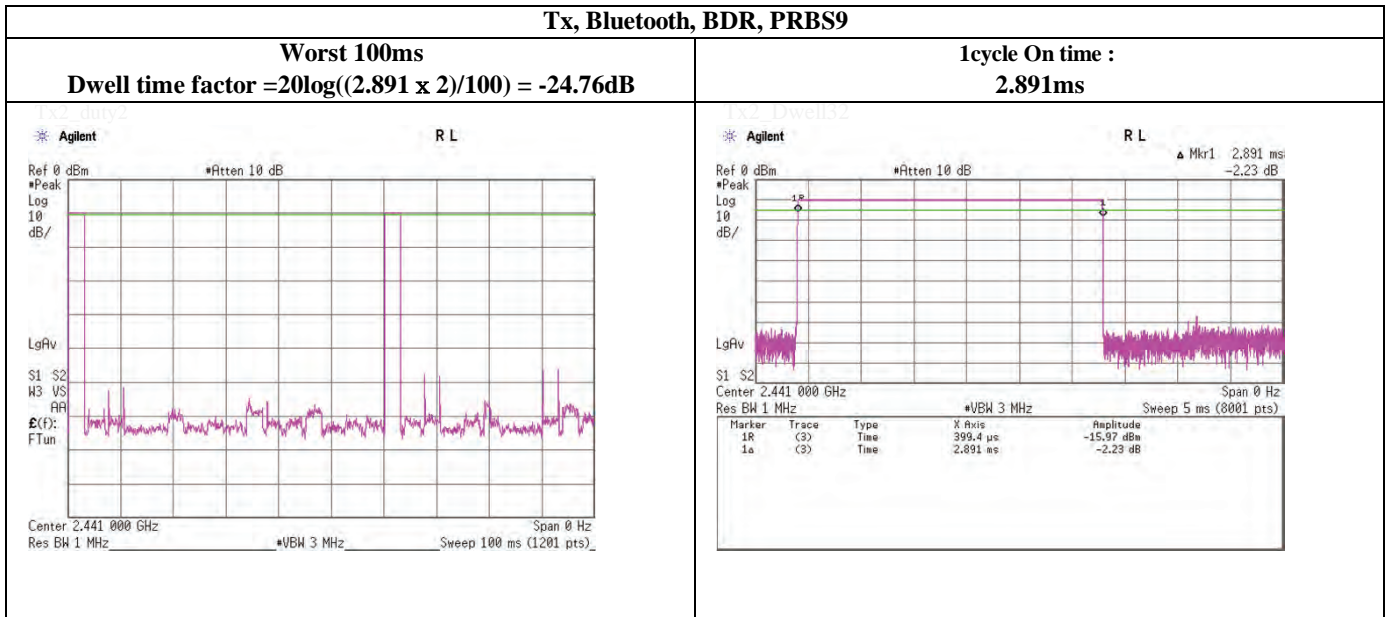

### VBW (Average) Calculation

\*Although 00-705 accepts VBW=10Hz for AV measurements, confirmed that superfluous smoothing was not performed.

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Radiated Emission

Test place	UL Japan, Inc. Shonan EMC Lab.	No.2 and 3 Semi Anechoic Chamber
Date	July 3, 2012	July 11, 2012
Temperature / Humidity	25 deg.C , 62 %RH	23 deg.C , 60 %RH
Engineer	Makoto Hosaka	Makoto Hosaka
Mode	Tx, 2402 MHz	
	Tx, Bluetooth, EDR, PRBS9	

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	182.000	QP	29.0	16.0	9.0	31.8	22.2	43.5	21.3	175	26	
Hori.	2383.484	PK	52.9	27.2	14.0	38.2	55.9	73.9	18.0	100	87	
Hori.	2390.000	PK	45.9	27.2	14.1	38.2	49.0	73.9	24.9	100	87	
Hori.	4804.000	PK	62.3	31.2	6.5	37.0	63.0	73.9	10.9	130	73	
Hori.	7206.000	PK	50.4	36.5	8.0	39.0	55.9	73.9	18.0	100	227	
Hori.	9608.000	PK	44.0	38.3	9.1	37.2	54.2	73.9	19.7	100	330	
Hori.	12010.000	PK	44.1	39.3	10.5	37.9	56.0	73.9	17.9	100	0	
Vert.	31.600	QP	24.2	17.8	6.8	31.9	16.9	40.0	23.1	100	165	
Vert.	53.200	QP	34.5	9.8	7.2	31.9	19.6	40.0	20.4	100	131	
Vert.	78.000	QP	38.0	6.4	8.0	31.9	20.5	40.0	19.5	100	111	
Vert.	113.305	QP	27.9	12.0	8.0	31.9	16.0	43.5	27.5	100	208	
Vert.	129.999	QP	32.9	13.7	8.3	31.9	23.0	43.5	20.5	100	264	
Vert.	2383.647	PK	51.7	27.2	14.0	38.2	54.7	73.9	19.2	124	132	
Vert.	2390.000	PK	45.0	27.2	14.1	38.2	48.1	73.9	25.8	124	132	
Vert.	4804.000	PK	60.7	31.2	6.5	37.0	61.4	73.9	12.5	100	226	
Vert.	7206.000	PK	51.2	36.5	8.0	39.0	56.7	73.9	17.2	146	10	
Vert.	9608.000	PK	42.8	38.3	9.1	37.2	53.0	73.9	20.9	100	80	
Vert.	12010.000	PK	44.2	39.3	10.5	37.9	56.1	73.9	17.8	100	0	

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Dwell Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	2383.484	AV	31.8	27.2	14.0	38.2	-24.8	10.0	53.9	43.9	(AV) VBW:10Hz
Hori.	2390.000	AV	31.8	27.2	14.1	38.2	-24.8	10.1	53.9	43.8	(AV) VBW:10Hz
Hori.	4804.000	AV	53.2	31.2	6.5	37.0	-24.8	29.1	53.9	24.8	(AV) VBW:10Hz
Hori.	7206.000	AV	39.5	36.5	8.0	39.0	-24.8	20.2	53.9	33.7	(AV) VBW:10Hz
Hori.	9608.000	AV	32.1	38.3	9.1	37.2	-24.8	17.5	53.9	36.4	(AV) VBW:10Hz
Hori.	12010.000	AV	32.0	39.3	10.5	37.9	-24.8	19.1	53.9	34.8	(AV) VBW:10Hz
Vert.	2383.647	AV	31.7	27.2	14.0	38.2	-24.8	9.9	53.9	44.0	(AV) VBW:10Hz
Vert.	2390.000	AV	31.6	27.2	14.1	38.2	-24.8	9.9	53.9	44.0	(AV) VBW:10Hz
Vert.	4804.000	AV	51.3	31.2	6.5	37.0	-24.8	27.2	53.9	26.7	(AV) VBW:10Hz
Vert.	7206.000	AV	41.5	36.5	8.0	39.0	-24.8	22.2	53.9	31.7	(AV) VBW:10Hz
Vert.	9608.000	AV	31.3	38.3	9.1	37.2	-24.8	16.8	53.9	37.2	(AV) VBW:10Hz
Vert.	12010.000	AV	32.0	39.3	10.5	37.9	-24.8	19.1	53.9	34.8	(AV) VBW:10Hz

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 15GHz)) - Gain(Amplifier) + Dwell time factor (refer to "Dwell time factor Calculation")

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*No noise was detected above the 5th order harmonics.

Distance factor : 15GHz -40GHz : 20log(3.0m/1.0m)= 9.5dB

**20dBc Data Sheet (RBW 100kHz, VBW 300kHz)**

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	2402.000	PK	89.9	27.3	14.1	38.2	93.1	-	-	Carrier
Hori.	2400.000	PK	42.3	27.3	14.1	38.2	45.5	73.1	27.6	
Vert.	2402.000	PK	87.8	27.3	14.1	38.2	91.0	-	-	Carrier
Vert.	2400.000	PK	40.1	27.3	14.1	38.2	43.3	71.0	27.7	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 15GHz)) - Gain(Amplifier)

**UL Japan, Inc.****Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Radiated Emission

Test place	UL Japan, Inc. Shonan EMC Lab.	No.2 and 3 Semi Anechoic Chamber
Date	July 3, 2012	July 11, 2012
Temperature / Humidity	25 deg.C , 62 %RH	23 deg.C , 60 %RH
Engineer	Makoto Hosaka	Makoto Hosaka
Mode	Tx, 2441 MHz Tx, Bluetooth, EDR, PRBS9	

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	182.000	QP	28.9	16.0	9.0	31.8	22.1	43.5	21.4	177	29	
Hori.	4882.000	PK	61.7	31.4	6.6	36.9	62.8	73.9	11.1	100	62	
Hori.	7323.000	PK	51.4	36.7	8.2	39.0	57.3	73.9	16.6	100	0	
Hori.	9764.000	PK	43.4	38.7	9.3	37.2	54.2	73.9	19.7	100	175	
Hori.	12205.000	PK	46.1	39.4	10.6	37.7	58.4	73.9	15.5	100	0	
Vert.	31.600	QP	24.5	17.8	6.8	31.9	17.2	40.0	22.8	100	160	
Vert.	53.200	QP	34.6	9.8	7.2	31.9	19.7	40.0	20.3	100	111	
Vert.	78.000	QP	37.5	6.4	8.0	31.9	20.0	40.0	20.0	100	115	
Vert.	113.305	QP	27.9	12.0	8.0	31.9	16.0	43.5	27.5	100	233	
Vert.	129.999	QP	33.0	13.7	8.3	31.9	23.1	43.5	20.4	100	265	
Vert.	4882.000	PK	60.7	31.4	6.6	36.9	61.8	73.9	12.1	163	0	
Vert.	7323.000	PK	52.6	36.7	8.2	39.0	58.5	73.9	15.4	160	10	
Vert.	9764.000	PK	43.3	38.7	9.3	37.2	54.1	73.9	19.8	100	250	
Vert.	12205.000	PK	44.0	39.4	10.6	37.7	56.3	73.9	17.6	100	0	

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Dwell Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	4882.000	AV	54.4	31.4	6.6	36.9	-24.8	30.7	53.9	23.2	(AV) VBW:10Hz
Hori.	7323.000	AV	41.2	36.7	8.2	39.0	-24.8	22.3	53.9	31.6	(AV) VBW:10Hz
Hori.	9764.000	AV	32.1	38.7	9.3	37.2	-24.8	18.1	53.9	35.8	(AV) VBW:10Hz
Hori.	12205.000	AV	31.6	39.4	10.6	37.7	-24.8	19.1	53.9	34.8	(AV) VBW:10Hz
Vert.	4882.000	AV	53.5	31.4	6.6	36.9	-24.8	29.8	53.9	24.1	(AV) VBW:10Hz
Vert.	7323.000	AV	42.7	36.7	8.2	39.0	-24.8	23.8	53.9	30.1	(AV) VBW:10Hz
Vert.	9764.000	AV	31.1	38.7	9.3	37.2	-24.8	17.1	53.9	36.8	(AV) VBW:10Hz
Vert.	12205.000	AV	31.5	39.4	10.6	37.7	-24.8	19.0	53.9	34.9	(AV) VBW:10Hz

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 15GHz)) - Gain(Amplifier) + Dwell time factor (refer to "Dwell time factor Calculation")

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*No noise was detected above the 5th order harmonics.

Distance factor : 15GHz -40GHz :  $20\log(3.0m/1.0m) = 9.5dB$ **UL Japan, Inc.****Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Radiated Emission

Test place                   UL Japan, Inc. Shonan EMC Lab.                   No.2 and 3 Semi Anechoic Chamber  
Date                            July 3, 2012   July 11, 2012   July 12, 2012  
Temperature / Humidity    25 deg.C , 62 %RH                               23 deg.C , 60 %RH                               24 deg.C , 64 %RH  
Engineer                    Makoto Hosaka                                       Makoto Hosaka                                       Makoto Hosaka  
Mode                           Tx,   2480 MHz  
                                  Tx, Bluetooth, EDR, PRBS9

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg.]	Remark
Hori.	182.000	QP	28.7	16.0	9.0	31.8	21.9	43.5	21.6	177	28	
Hori.	2483.500	PK	49.3	27.5	14.1	38.1	52.8	73.9	21.1	100	226	
Hori.	2492.100	PK	48.1	27.6	14.1	38.1	51.7	73.9	22.2	100	226	
Hori.	2492.953	PK	48.7	27.6	14.1	38.1	52.3	73.9	21.6	100	226	
Hori.	2520.000	PK	47.8	27.6	14.1	38.1	51.4	73.9	22.5	100	226	
Hori.	4960.000	PK	54.5	31.6	6.7	36.8	56.0	73.9	17.9	153	76	
Hori.	7440.000	PK	51.8	37.0	8.4	39.0	58.2	73.9	15.7	127	9	
Hori.	9920.000	PK	42.8	39.0	9.3	37.2	53.9	73.9	20.0	100	353	
Hori.	12400.000	PK	44.2	39.5	10.5	37.5	56.7	73.9	17.2	100	0	
Vert.	31.600	QP	24.3	17.8	6.8	31.9	17.0	40.0	23.0	100	136	
Vert.	53.200	QP	34.8	9.8	7.2	31.9	19.9	40.0	20.1	100	145	
Vert.	78.000	QP	37.2	6.4	8.0	31.9	19.7	40.0	20.3	100	118	
Vert.	113.260	QP	28.0	12.0	8.0	31.9	16.1	43.5	27.4	100	211	
Vert.	129.999	QP	32.1	13.7	8.3	31.9	22.2	43.5	21.3	100	262	
Vert.	2483.500	PK	49.1	27.5	14.1	38.1	52.6	73.9	21.3	152	135	
Vert.	2492.100	PK	45.8	27.6	14.1	38.1	49.4	73.9	24.5	152	135	
Vert.	2492.953	PK	47.0	27.6	14.1	38.1	50.6	73.9	23.3	152	135	
Vert.	2520.000	PK	47.3	27.6	14.1	38.1	50.9	73.9	23.0	152	135	
Vert.	4960.000	PK	55.1	31.6	6.7	36.8	56.6	73.9	17.3	169	8	
Vert.	7440.000	PK	51.1	37.0	8.4	39.0	57.5	73.9	16.4	161	0	
Vert.	9920.000	PK	43.1	39.0	9.3	37.2	54.2	73.9	19.7	100	245	
Vert.	12400.000	PK	44.0	39.5	10.5	37.5	56.5	73.9	17.4	100	0	

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Dwell Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	2483.500	AV	34.0	27.5	14.1	38.1	-24.8	12.7	53.9	41.2	(AV) VBW:10Hz
Hori.	2492.100	AV	31.8	27.6	14.1	38.1	-24.8	10.6	53.9	43.3	(AV) VBW:10Hz
Hori.	2492.953	AV	32.3	27.6	14.1	38.1	-24.8	11.1	53.9	42.8	(AV) VBW:10Hz
Hori.	2520.000	AV	36.1	27.6	14.1	38.1	-24.8	14.9	53.9	39.0	(AV) VBW:10Hz
Hori.	4960.000	AV	46.4	31.6	6.7	36.8	-24.8	23.2	53.9	30.7	(AV) VBW:10Hz
Hori.	7440.000	AV	41.9	37.0	8.4	39.0	-24.8	23.5	53.9	30.4	(AV) VBW:10Hz
Hori.	9920.000	AV	31.3	39.0	9.3	37.2	-24.8	17.6	53.9	36.3	(AV) VBW:10Hz
Hori.	12400.000	AV	31.8	39.5	10.5	37.5	-24.8	19.5	53.9	34.4	(AV) VBW:10Hz
Vert.	2483.500	AV	33.8	27.5	14.1	38.1	-24.8	12.5	53.9	41.4	(AV) VBW:10Hz
Vert.	2492.100	AV	31.7	27.6	14.1	38.1	-24.8	10.5	53.9	43.4	(AV) VBW:10Hz
Vert.	2492.953	AV	32.1	27.6	14.1	38.1	-24.8	10.9	53.9	43.0	(AV) VBW:10Hz
Vert.	2520.000	AV	35.4	27.6	14.1	38.1	-24.8	14.2	53.9	39.7	(AV) VBW:10Hz
Vert.	4960.000	AV	47.1	31.6	6.7	36.8	-24.8	23.8	53.9	30.1	(AV) VBW:10Hz
Vert.	7440.000	AV	41.4	37.0	8.4	39.0	-24.8	23.0	53.9	30.9	(AV) VBW:10Hz
Vert.	9920.000	AV	31.0	39.0	9.3	37.2	-24.8	17.3	53.9	36.6	(AV) VBW:10Hz
Vert.	12400.000	AV	31.8	39.5	10.5	37.5	-24.8	19.5	53.9	34.4	(AV) VBW:10Hz

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 15GHz)) - Gain(Amplifier) + Dwell time factor (refer to "Dwell time factor Calculation")

\*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

\*No noise was detected above the 5th order harmonics.

Distance factor :                   15GHz -40GHz :   20log(3.0m/1.0m)= 9.5dB

**UL Japan, Inc.****Shonan EMC Lab.**


1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Dwell time factor Calculation chart

### Dwell time factor Calculation Tx, Bluetooth, EDR, PRBS9

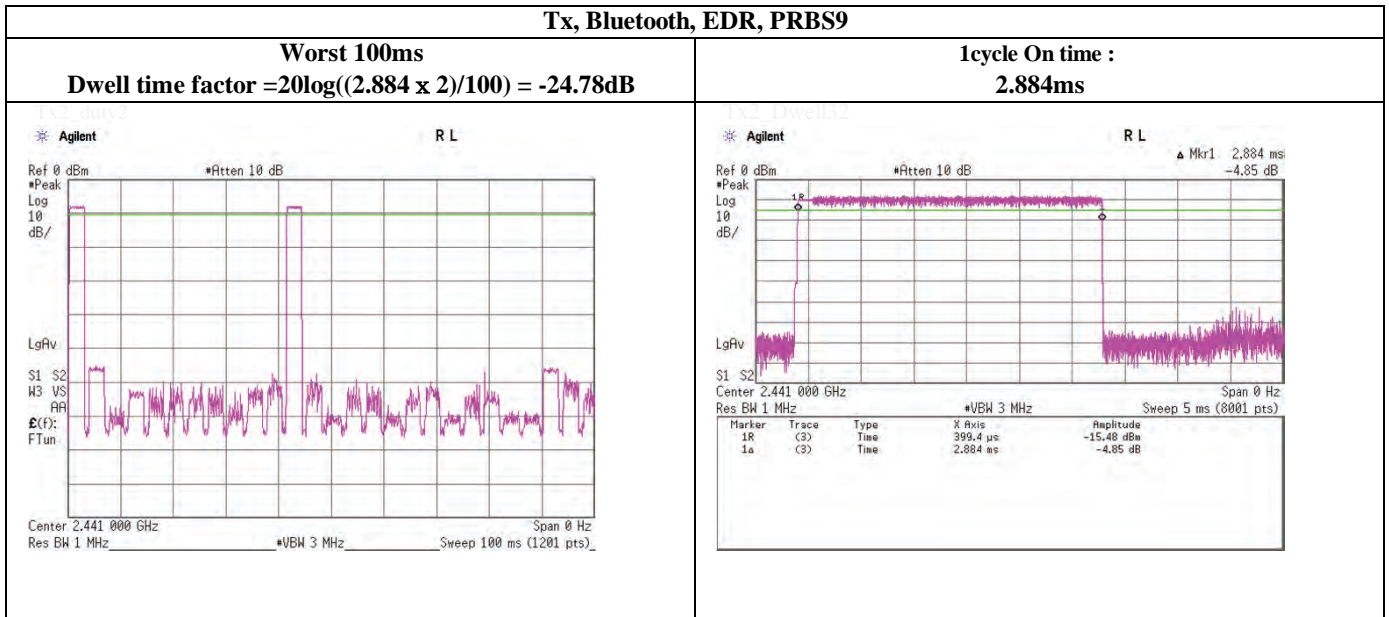

### VBW (Average) Calculation

\*Although 00-705 accepts VBW=10Hz for AV measurements, confirmed that superfluous smoothing was not performed.

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN


Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Spurious emission (Conducted)

Tx, Bluetooth, BDR, PRBS9

Tx, 2402MHz (1/2)

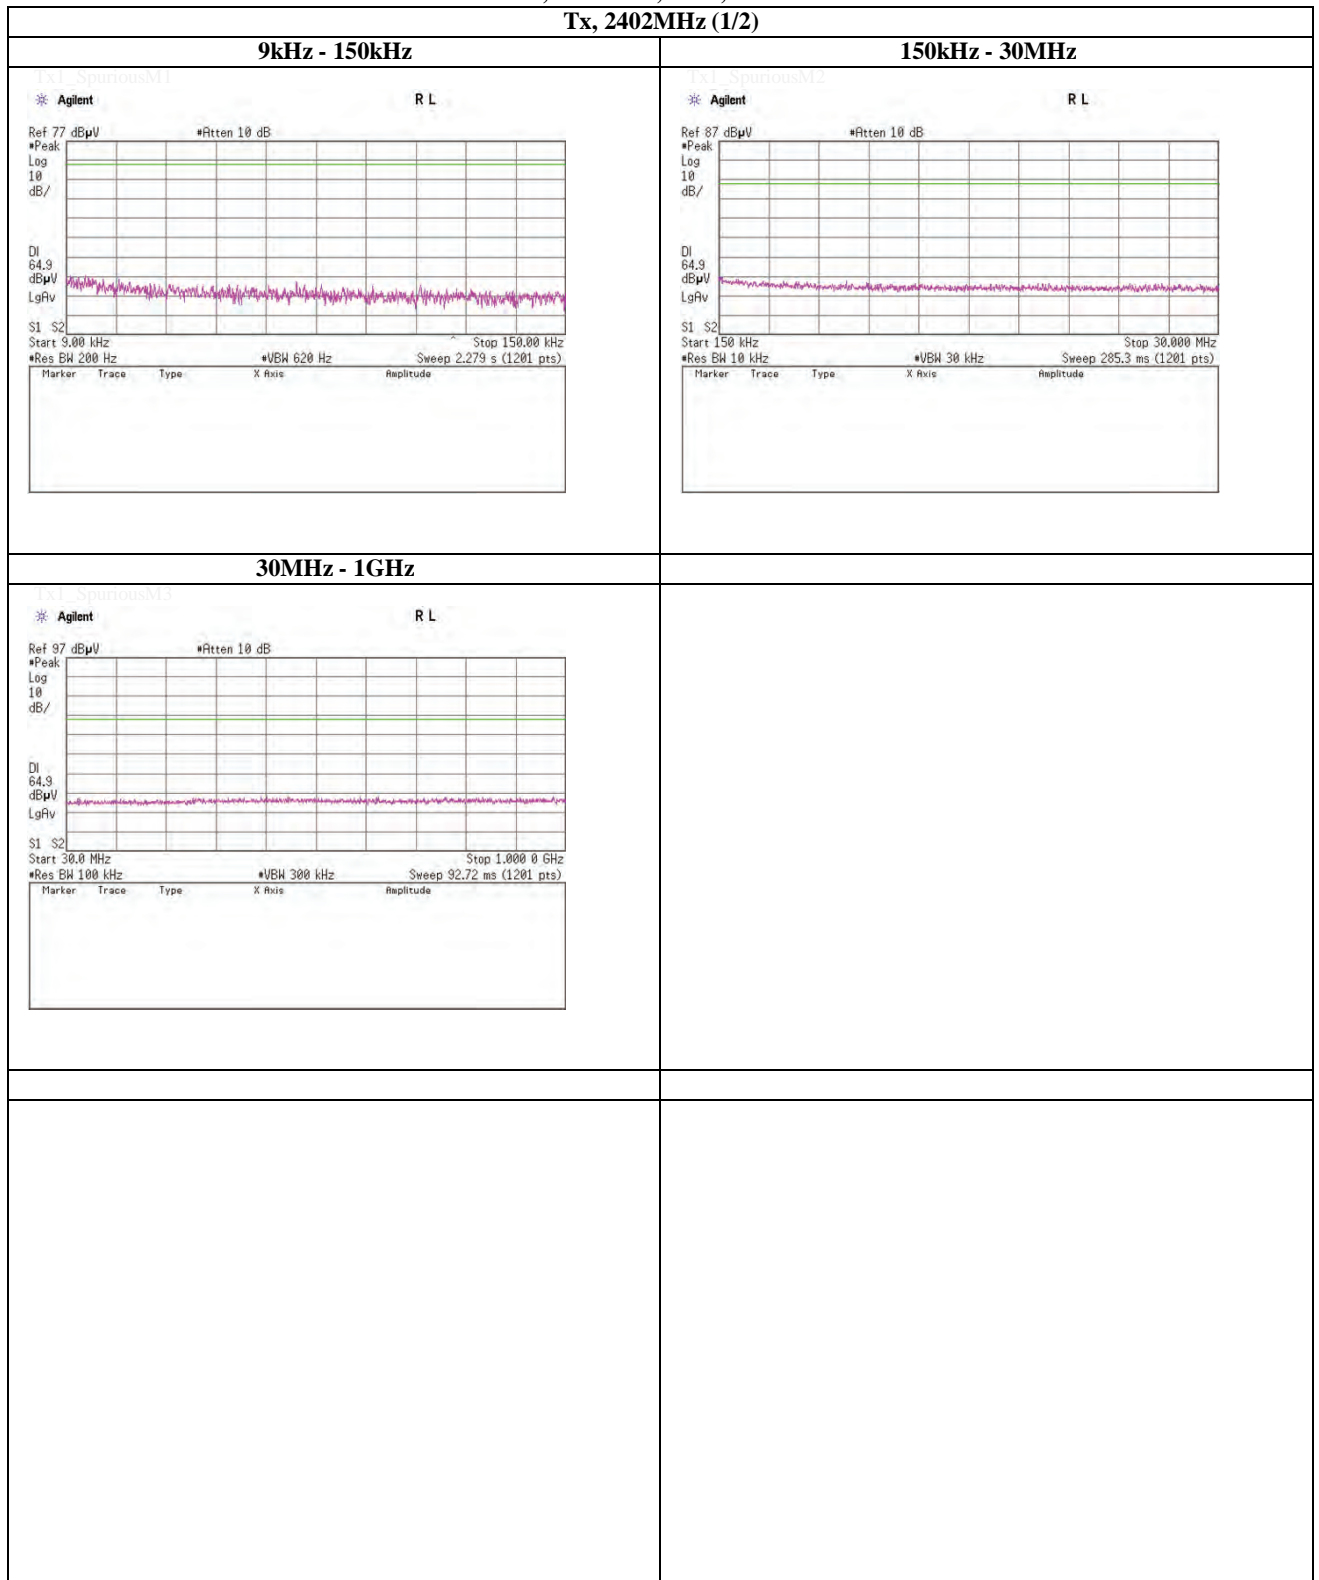

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN


Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Spurious emission (Conducted)

Tx, Bluetooth, BDR, PRBS9

Tx, 2402MHz (2/2)

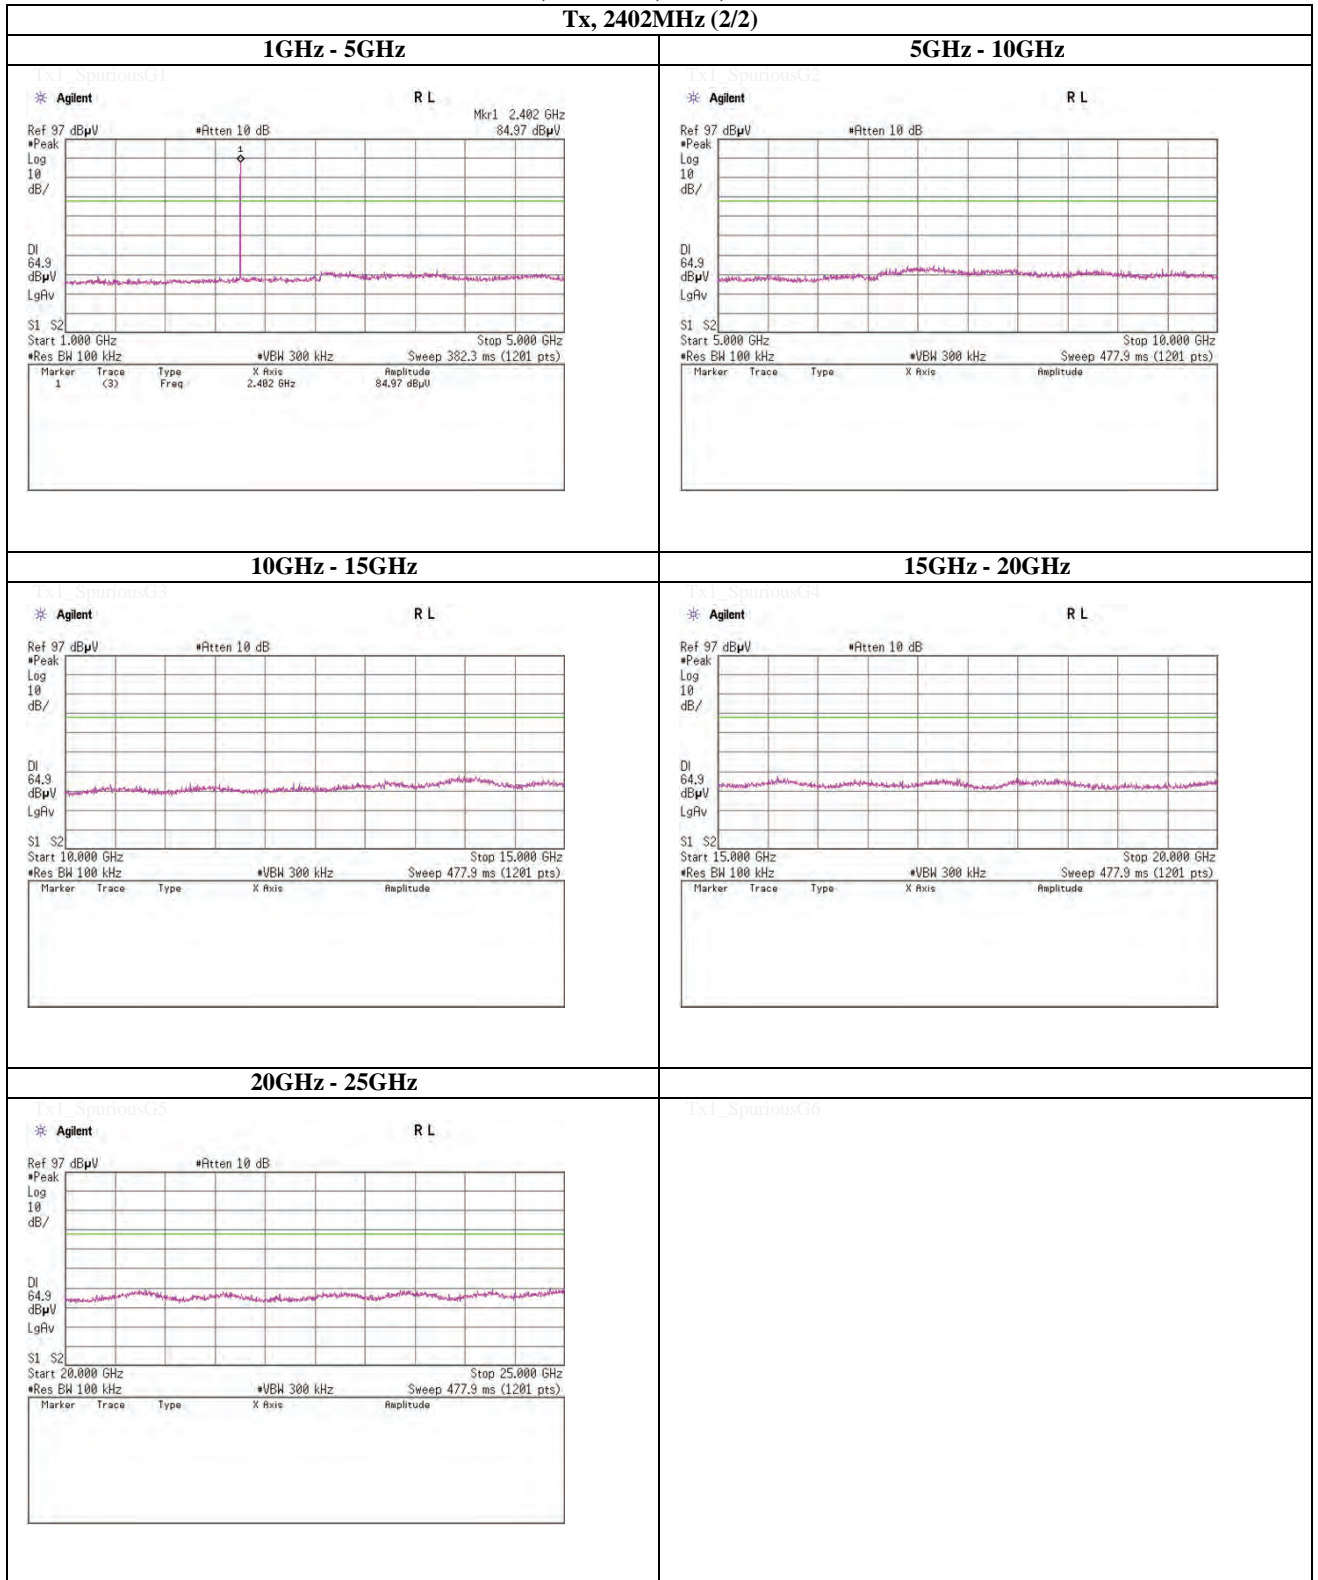

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN


Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Spurious emission (Conducted)

Tx, Bluetooth, BDR, PRBS9

Tx, 2441MHz (1/2)

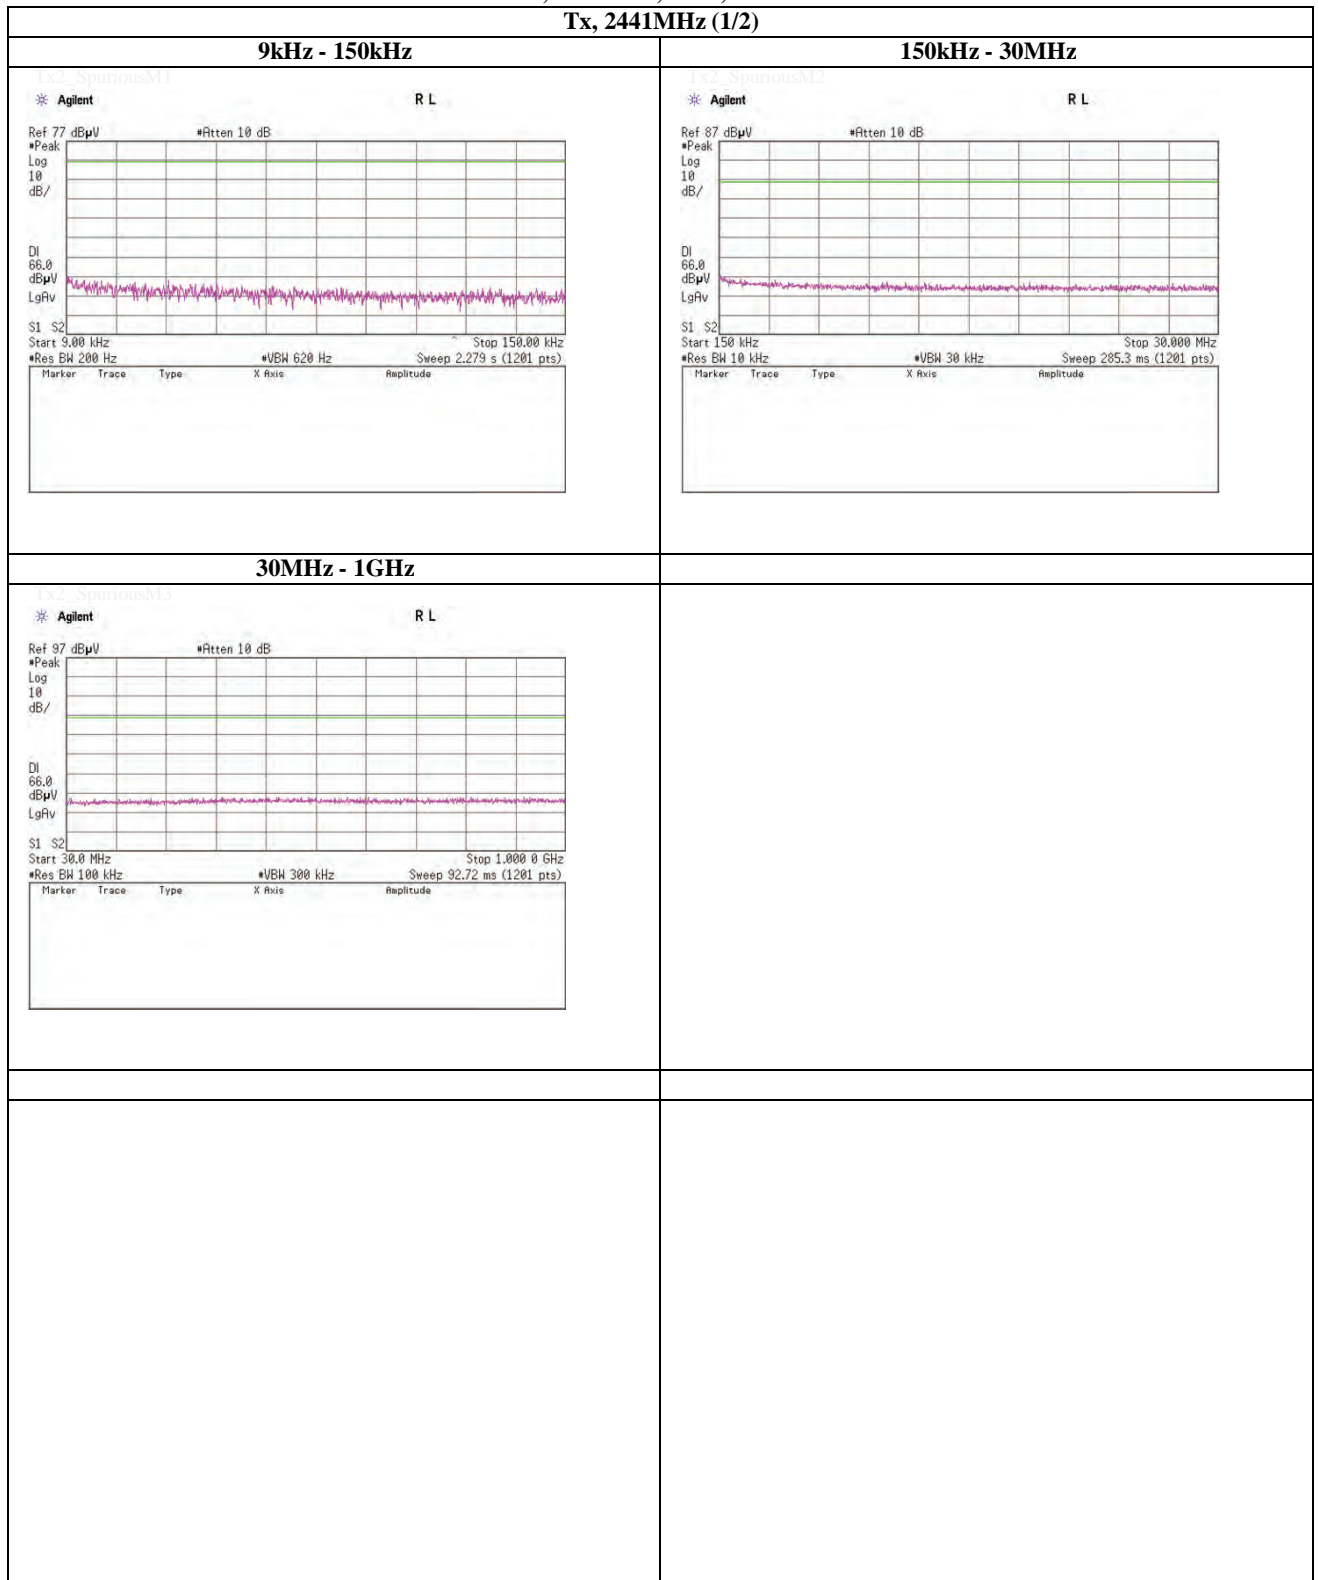

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN


Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Spurious emission (Conducted)

Tx, Bluetooth, BDR, PRBS9

Tx, 2441MHz (2/2)

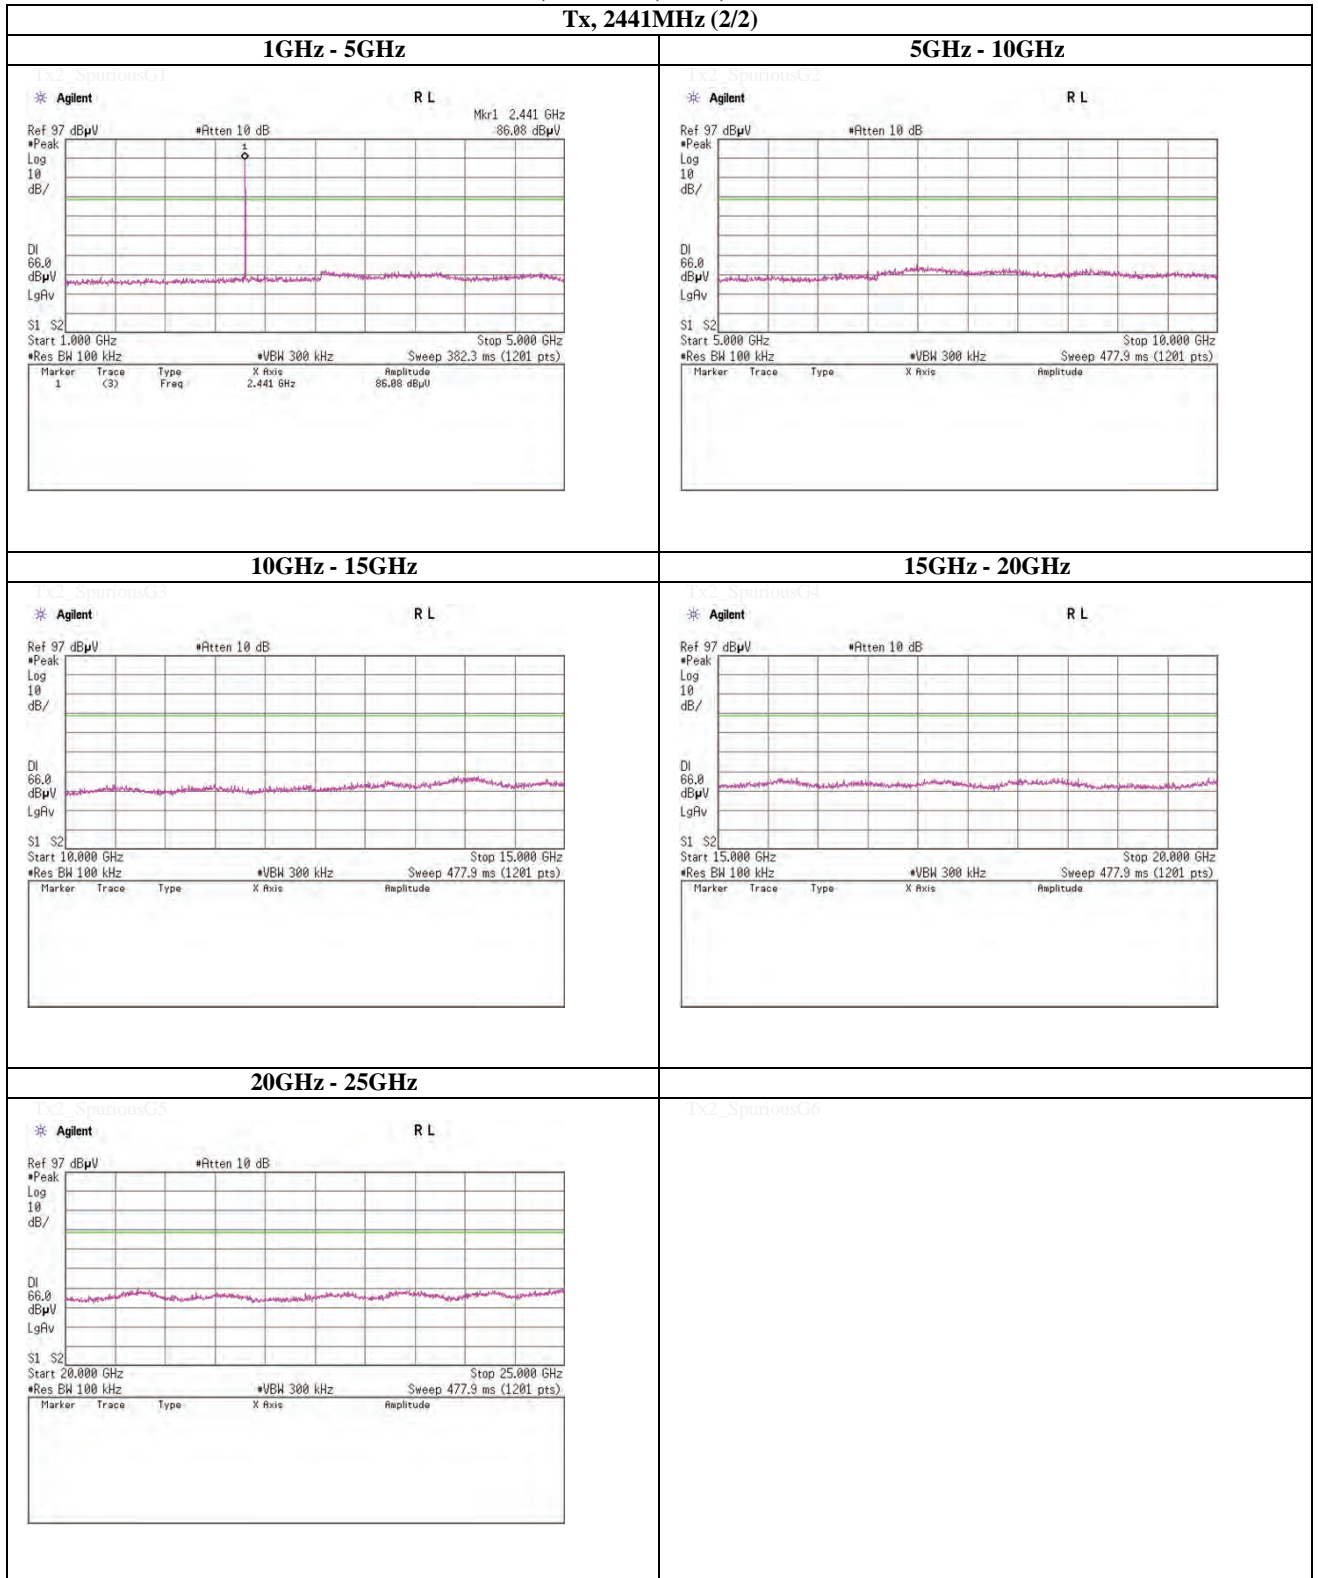

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN


Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Spurious emission (Conducted)

Tx, Bluetooth, BDR, PRBS9

Tx, 2480MHz (1/2)

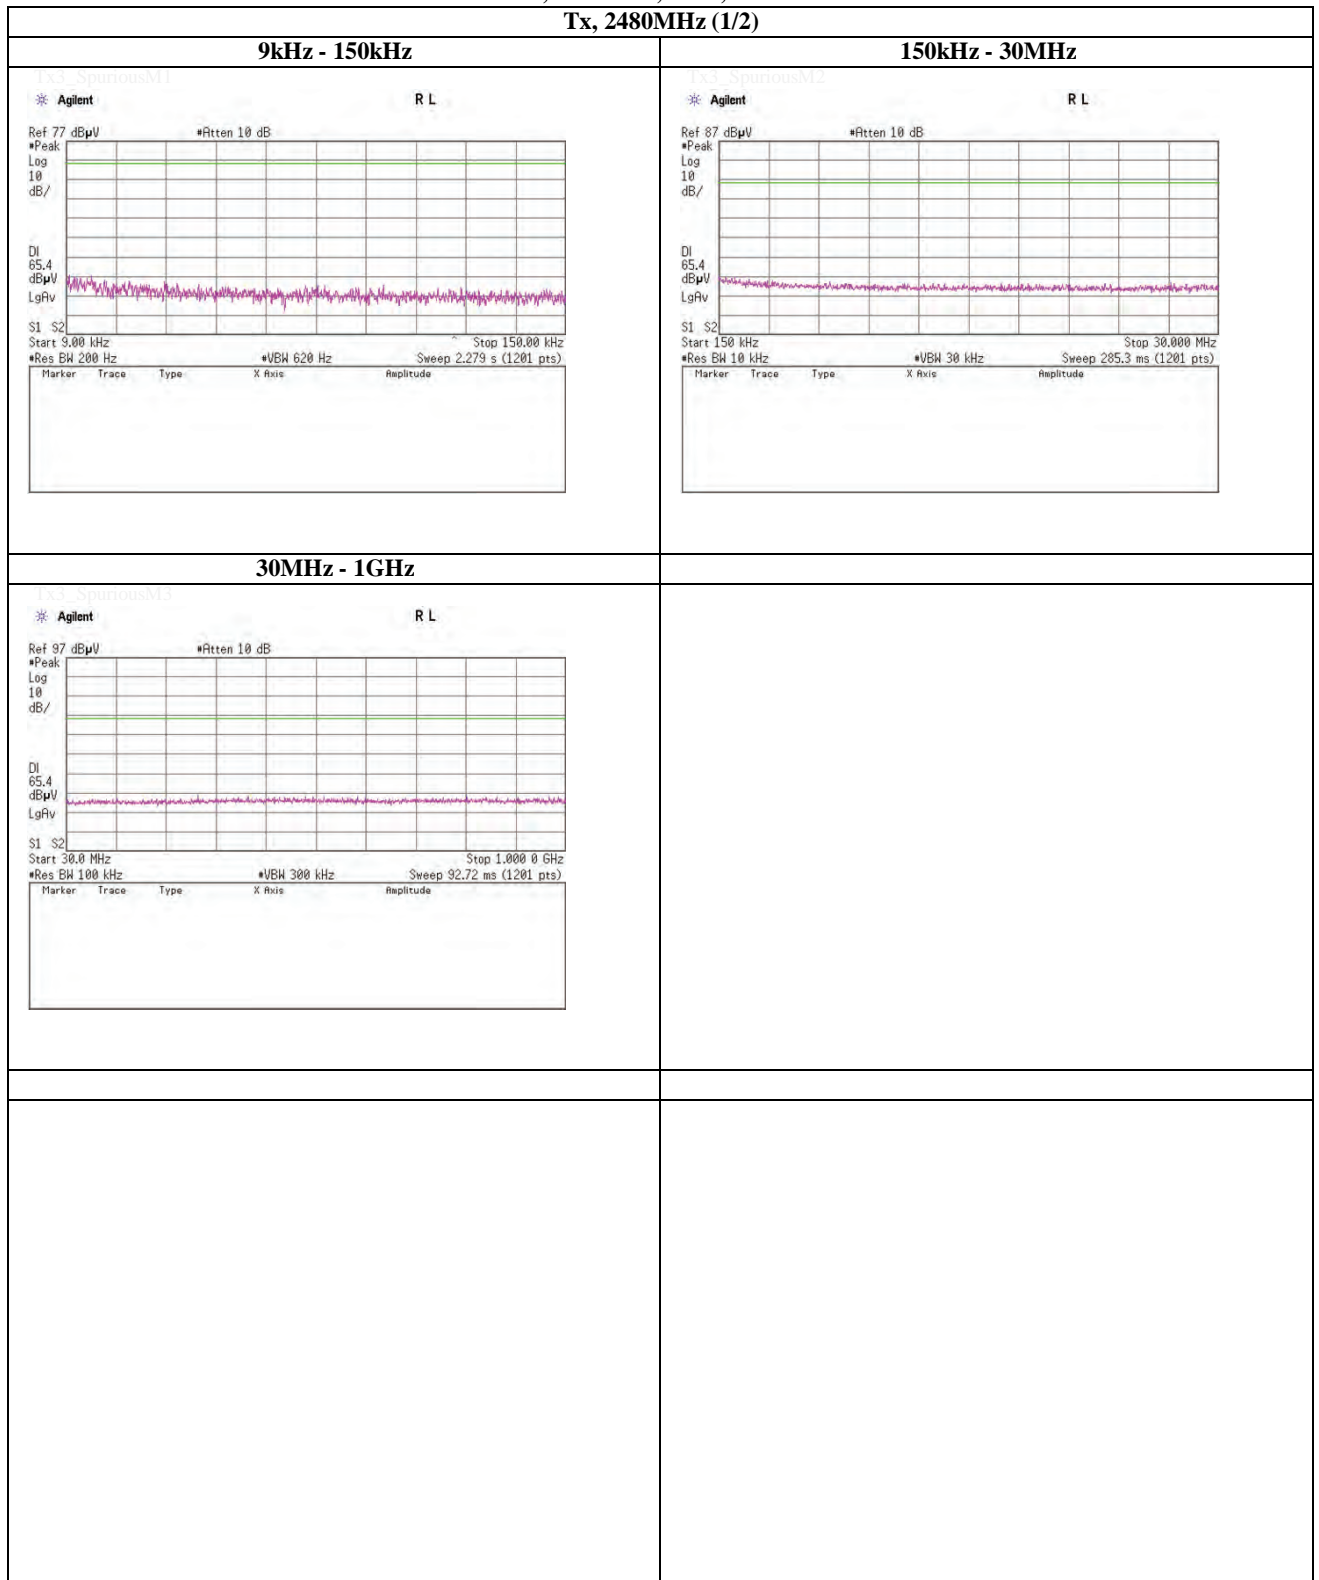

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN


Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Spurious emission (Conducted)

Tx, Bluetooth, BDR, PRBS9

Tx, 2480MHz (2/2)

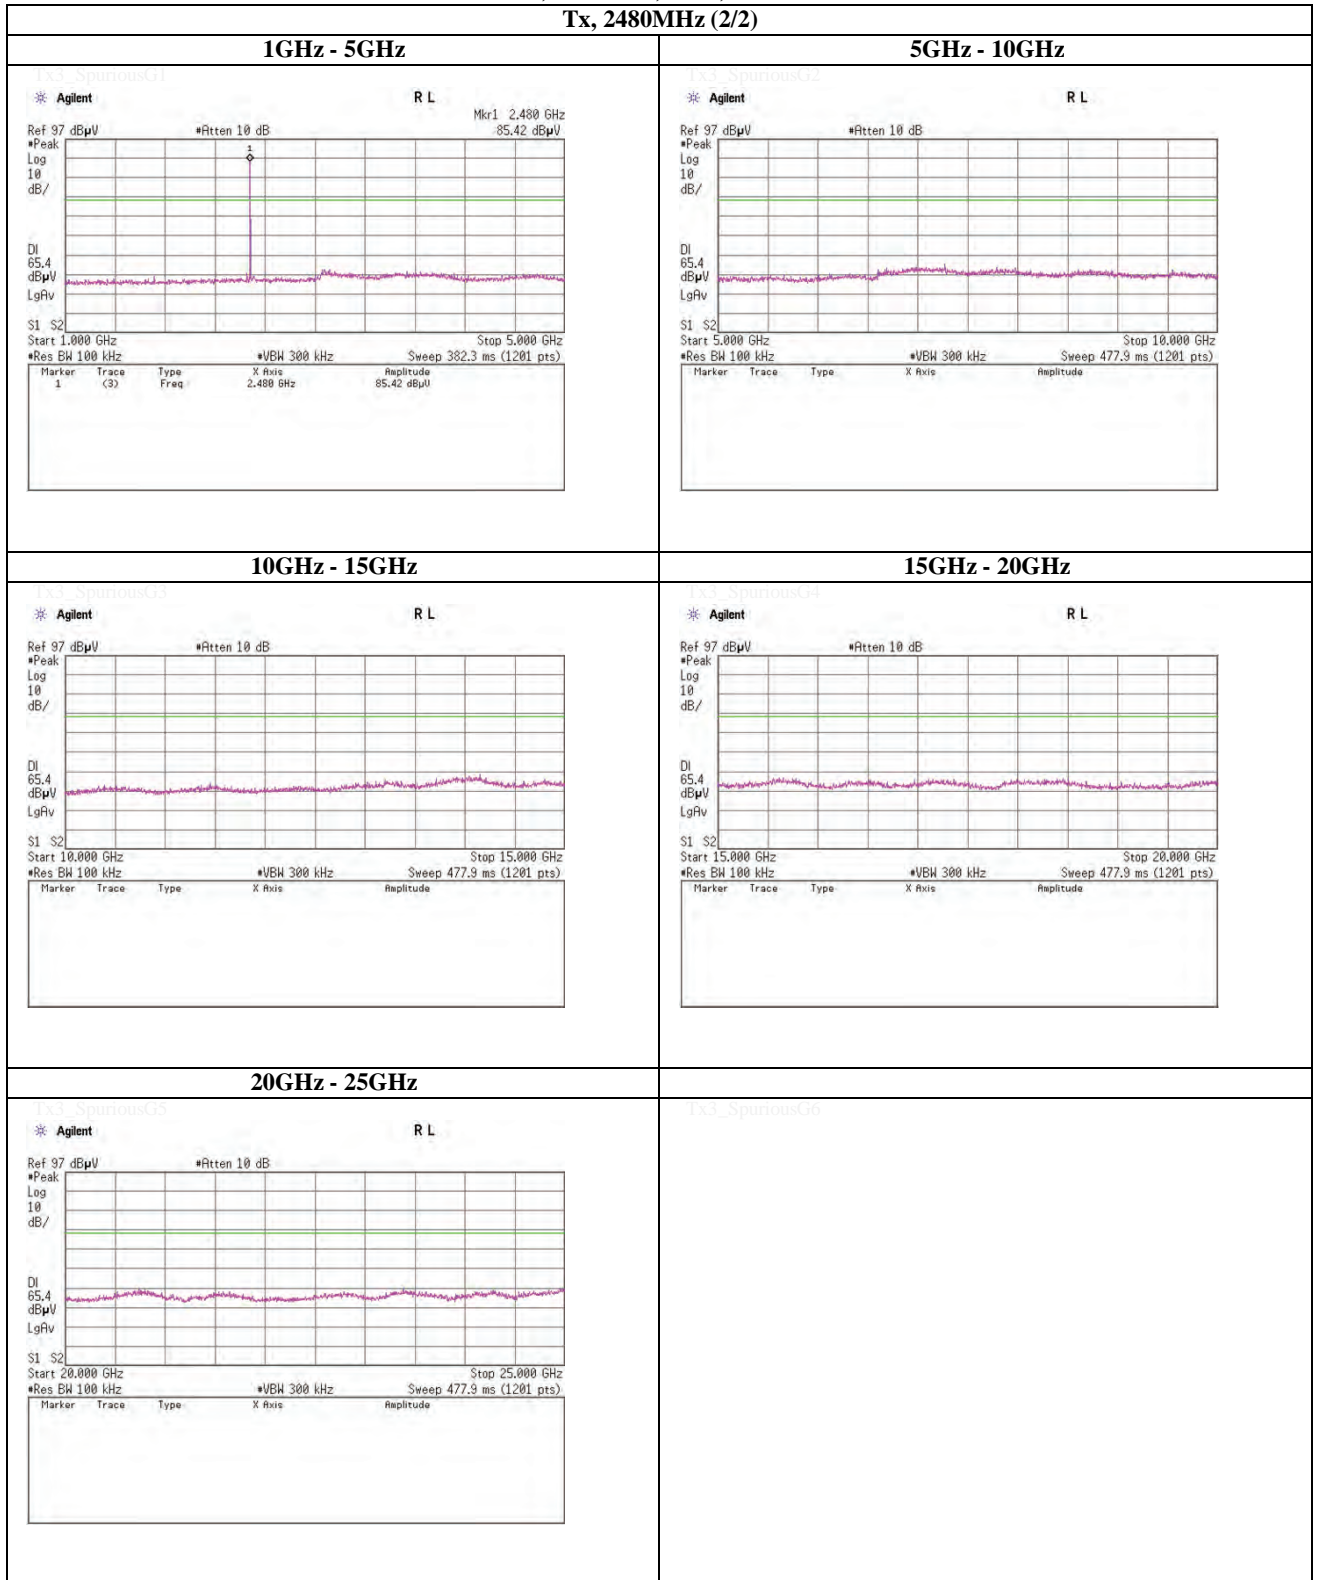

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN


Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Spurious emission (Conducted)

Tx, Bluetooth, EDR, PRBS9

Tx, 2402MHz (1/2)

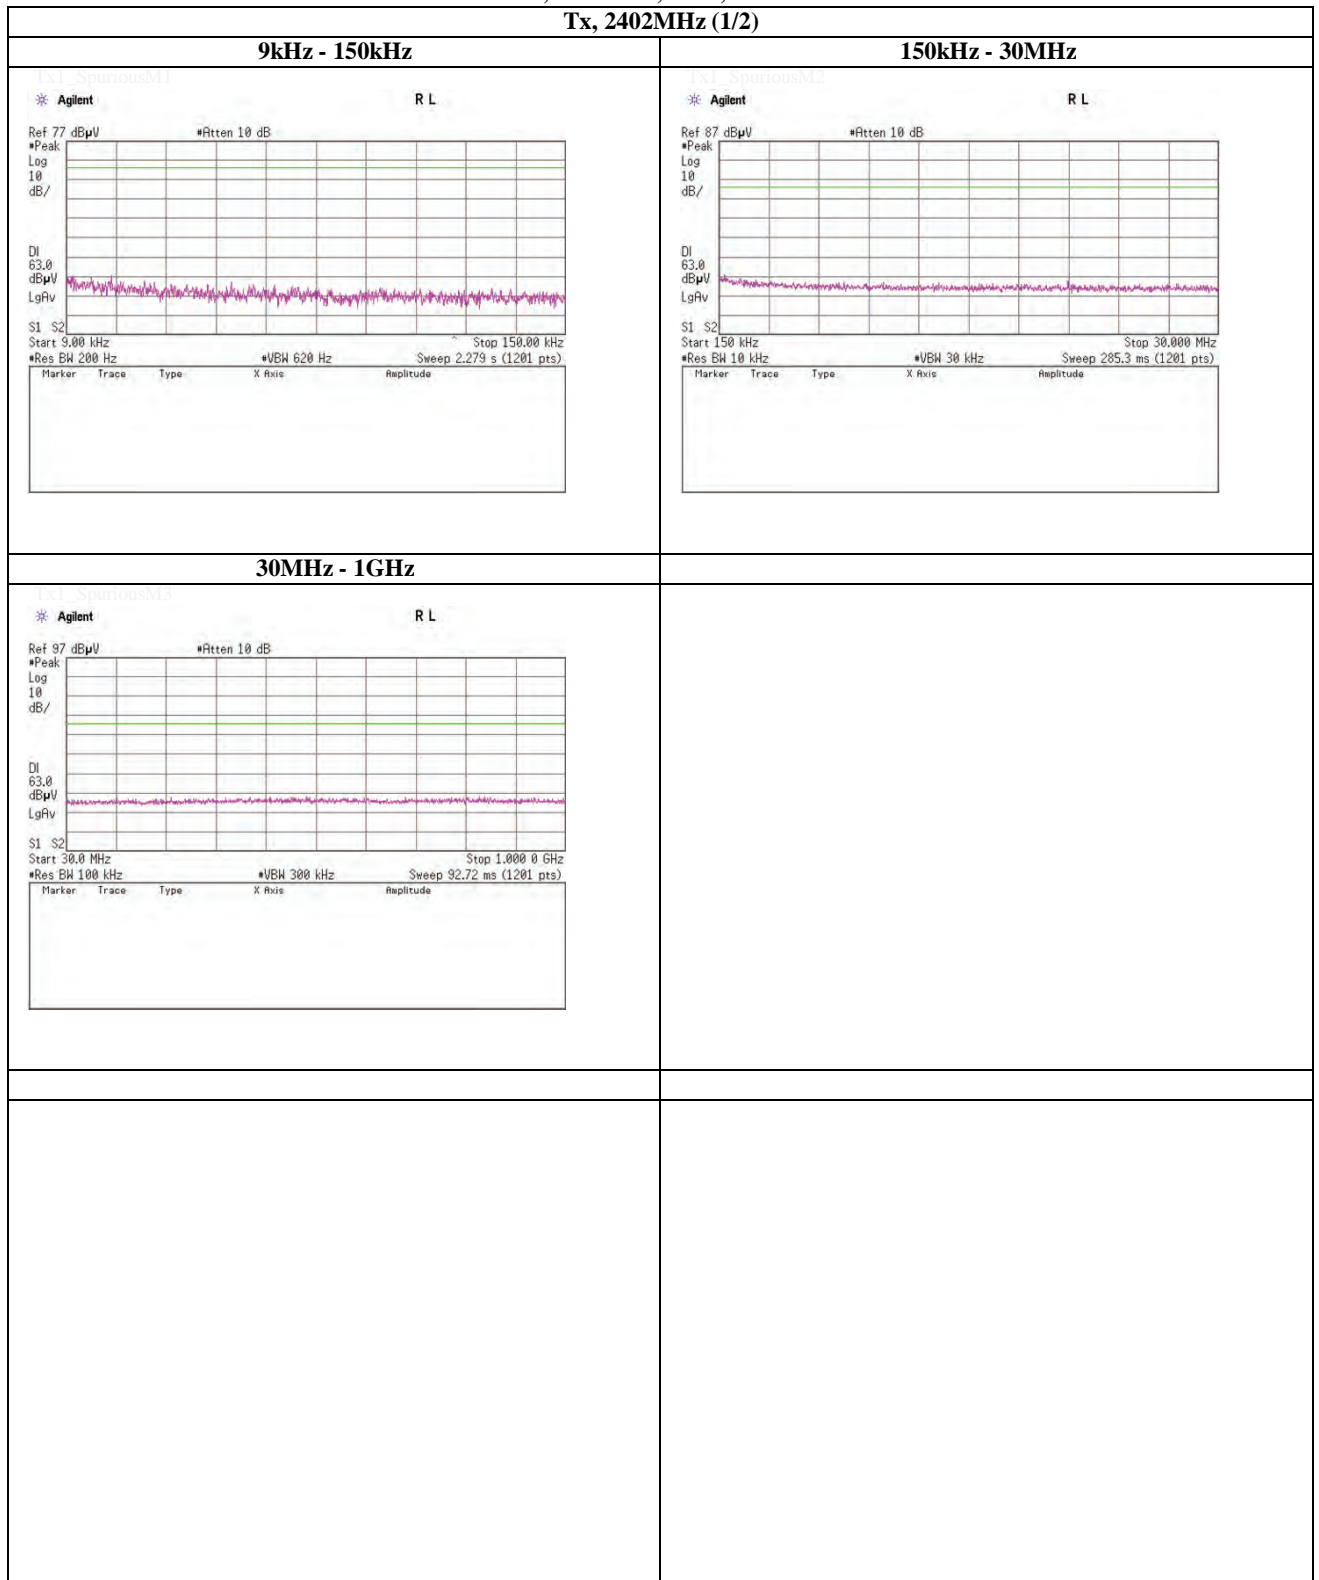

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN


Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Spurious emission (Conducted)

Tx, Bluetooth, EDR, PRBS9

Tx, 2402MHz (2/2)

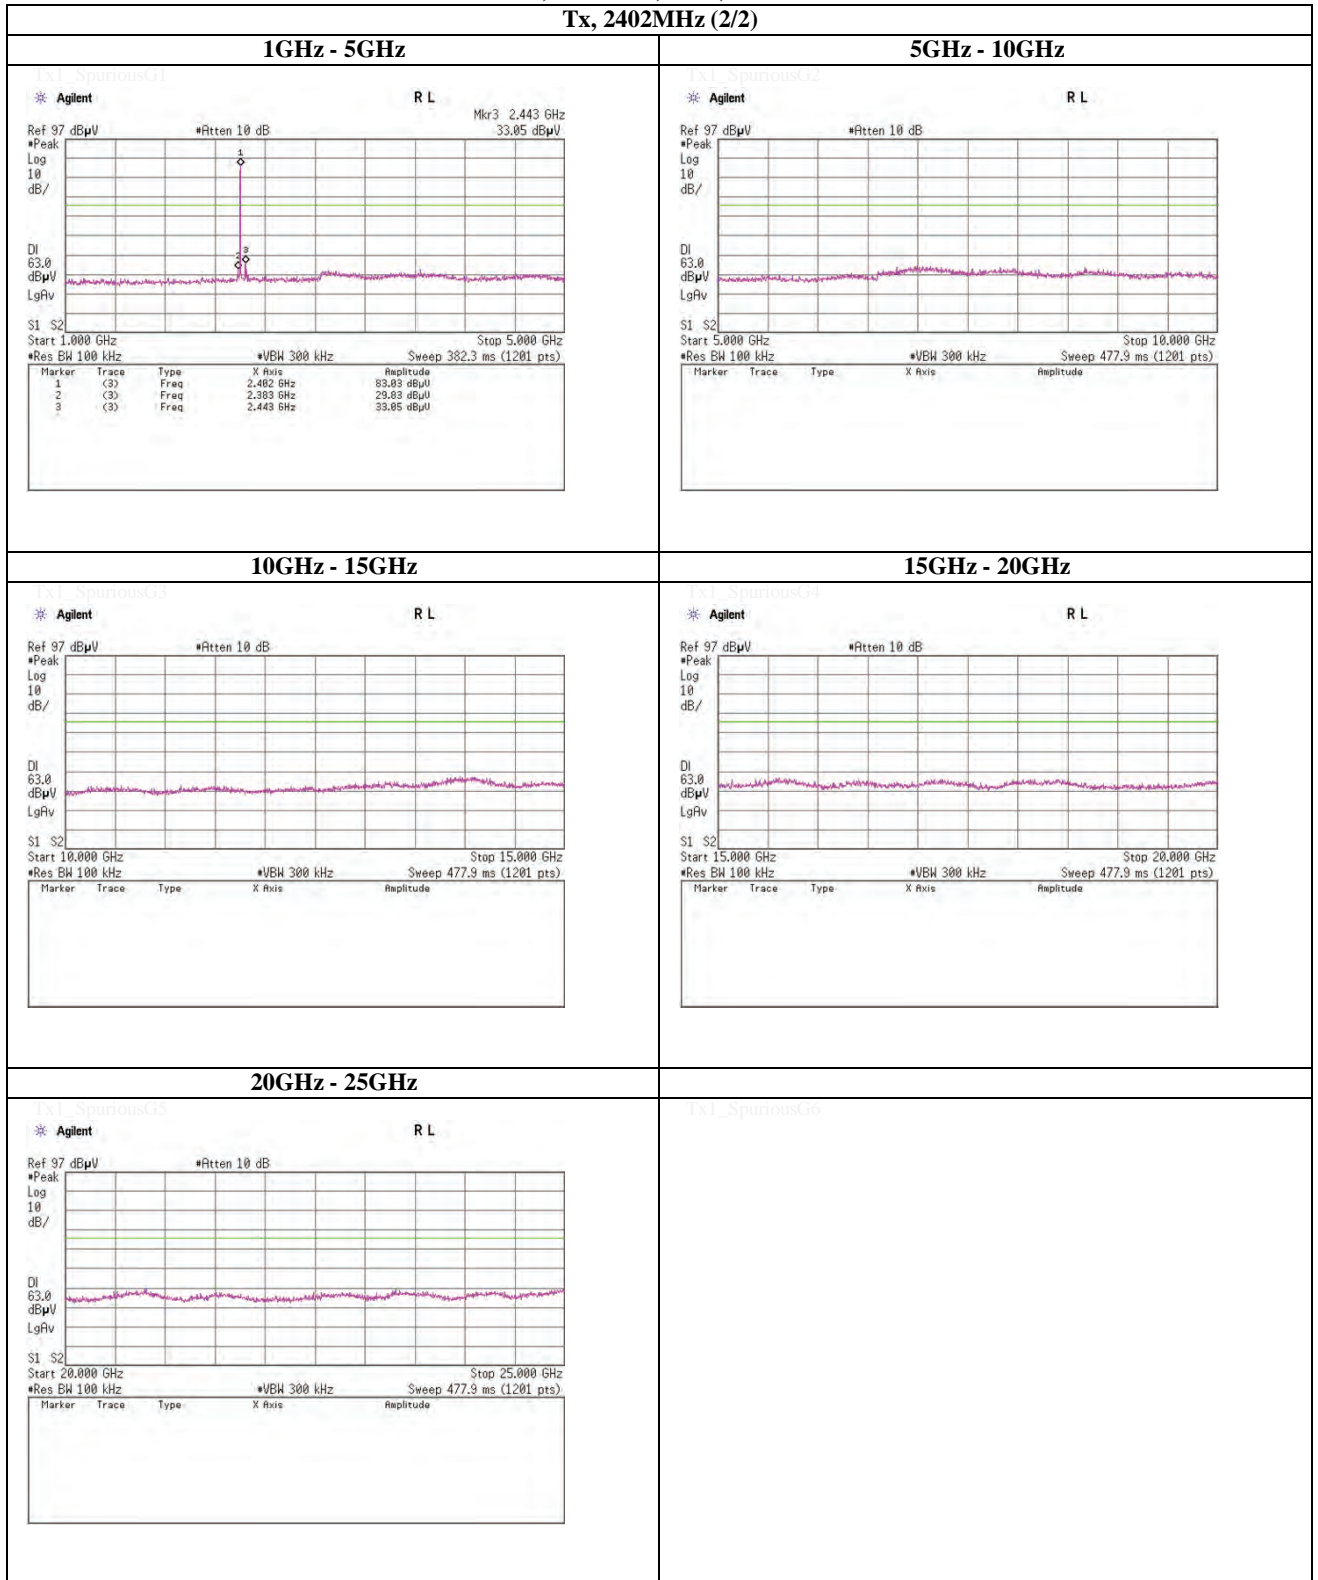

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN


Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Spurious emission (Conducted)

Tx, Bluetooth, EDR, PRBS9

Tx, 2441MHz (1/2)

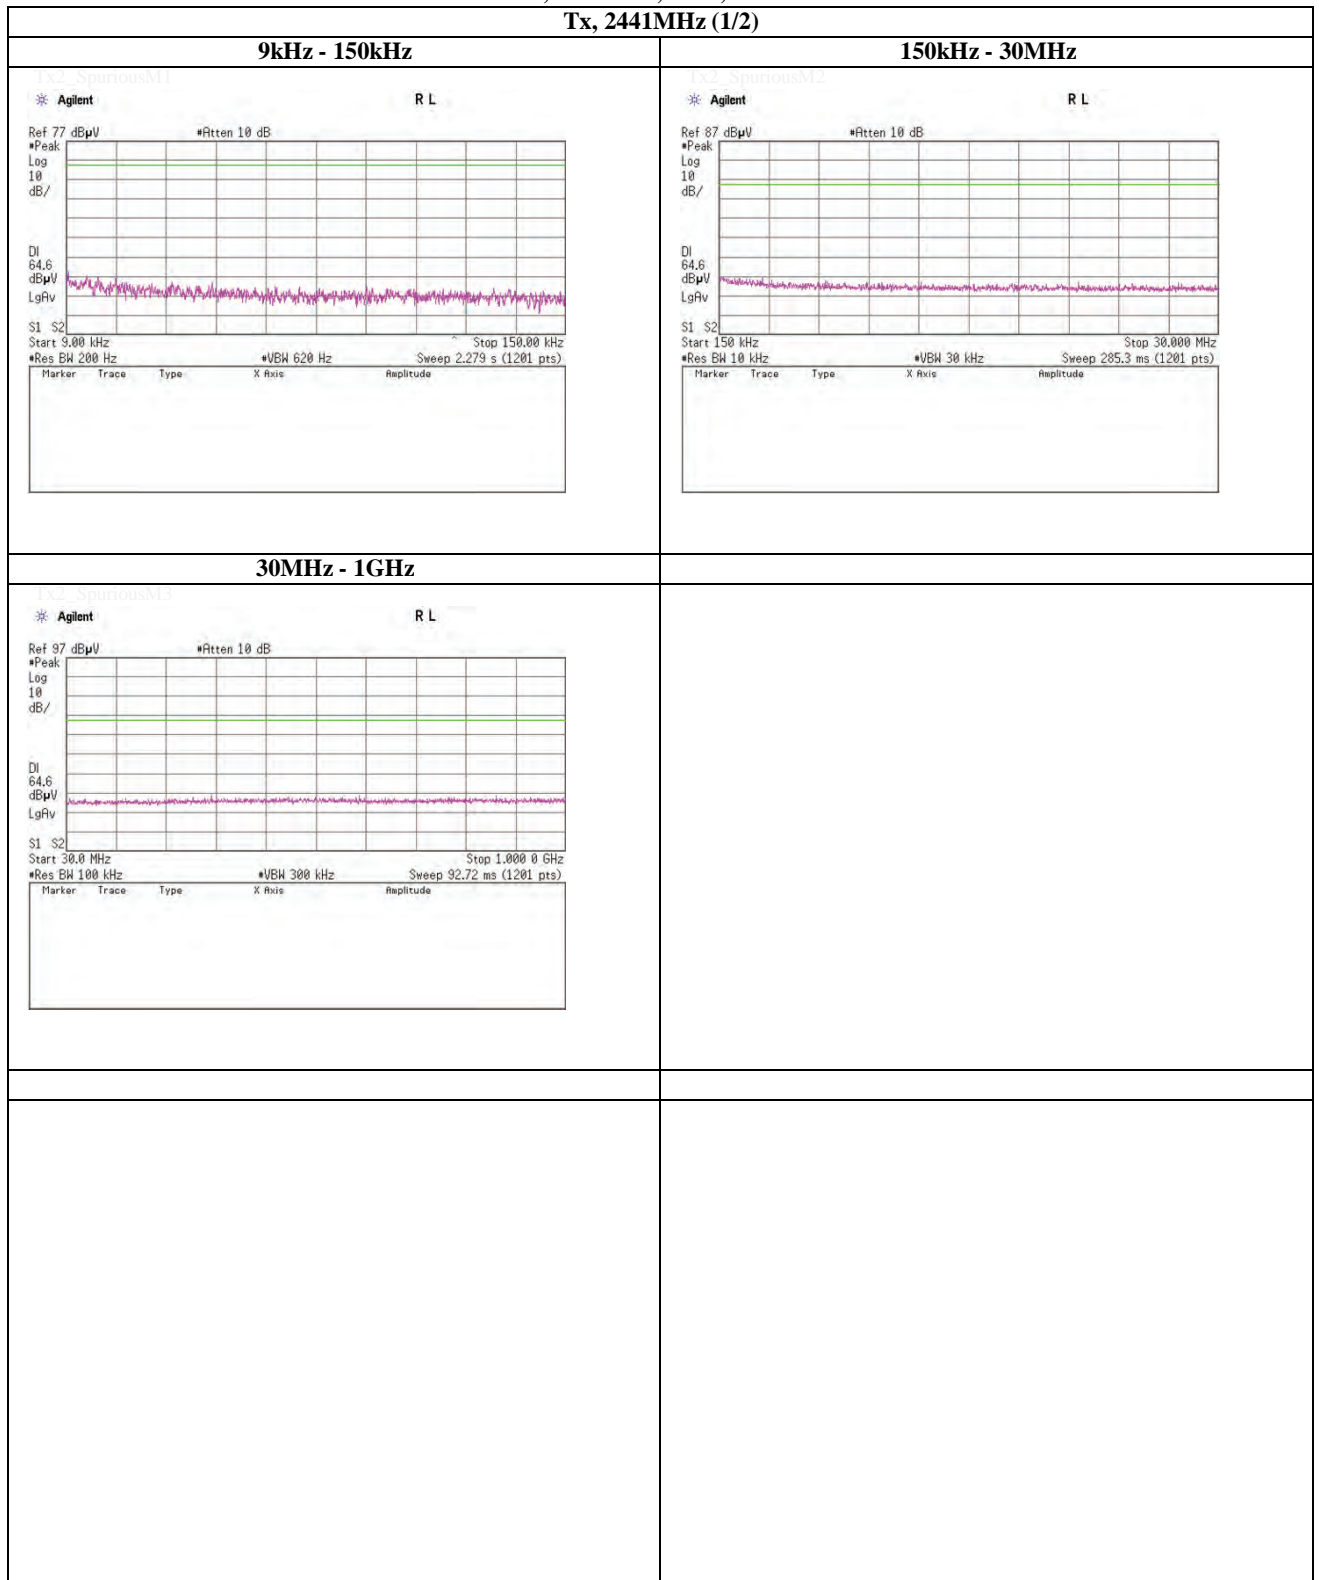

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN


Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Spurious emission (Conducted)

Tx, Bluetooth, EDR, PRBS9

Tx, 2441MHz (2/2)

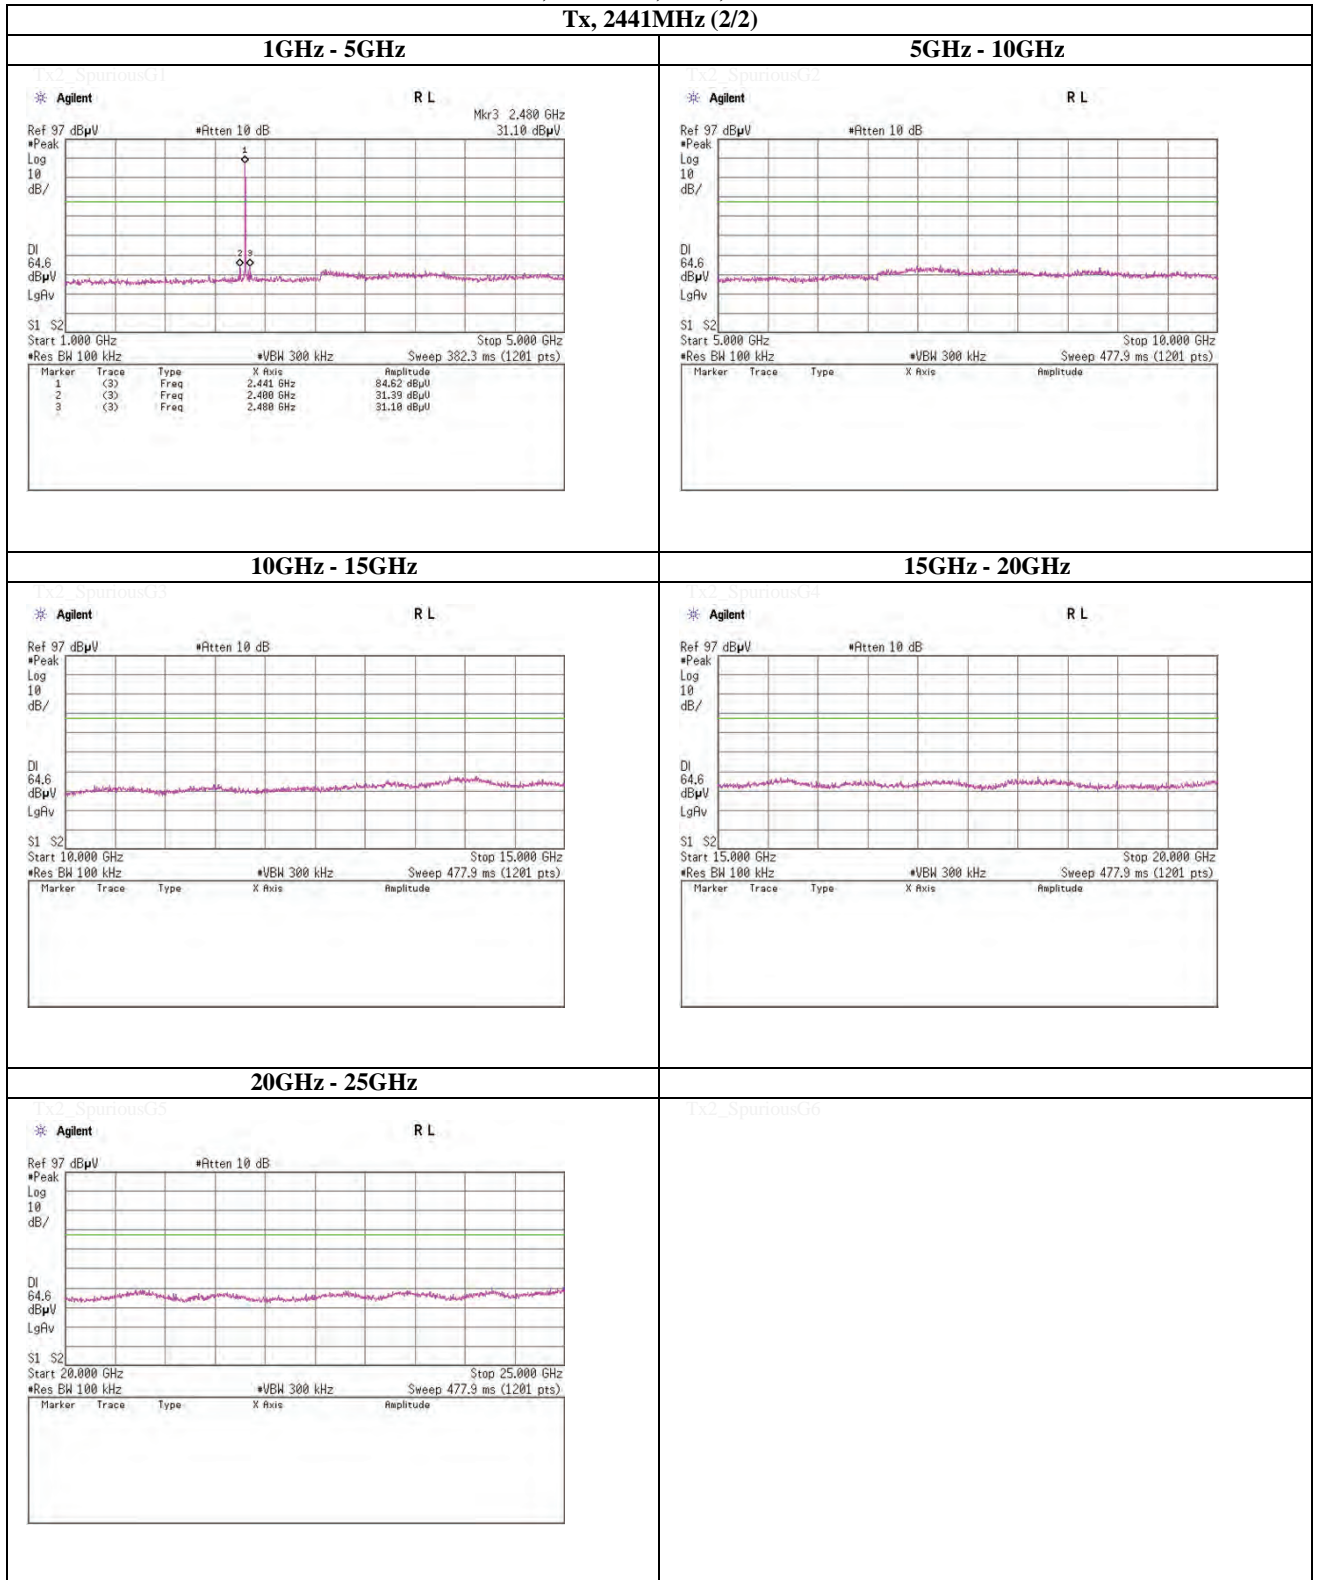

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN


Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

### Spurious emission (Conducted)

Tx, Bluetooth, EDR, PRBS9

Tx, 2480MHz (1/2)

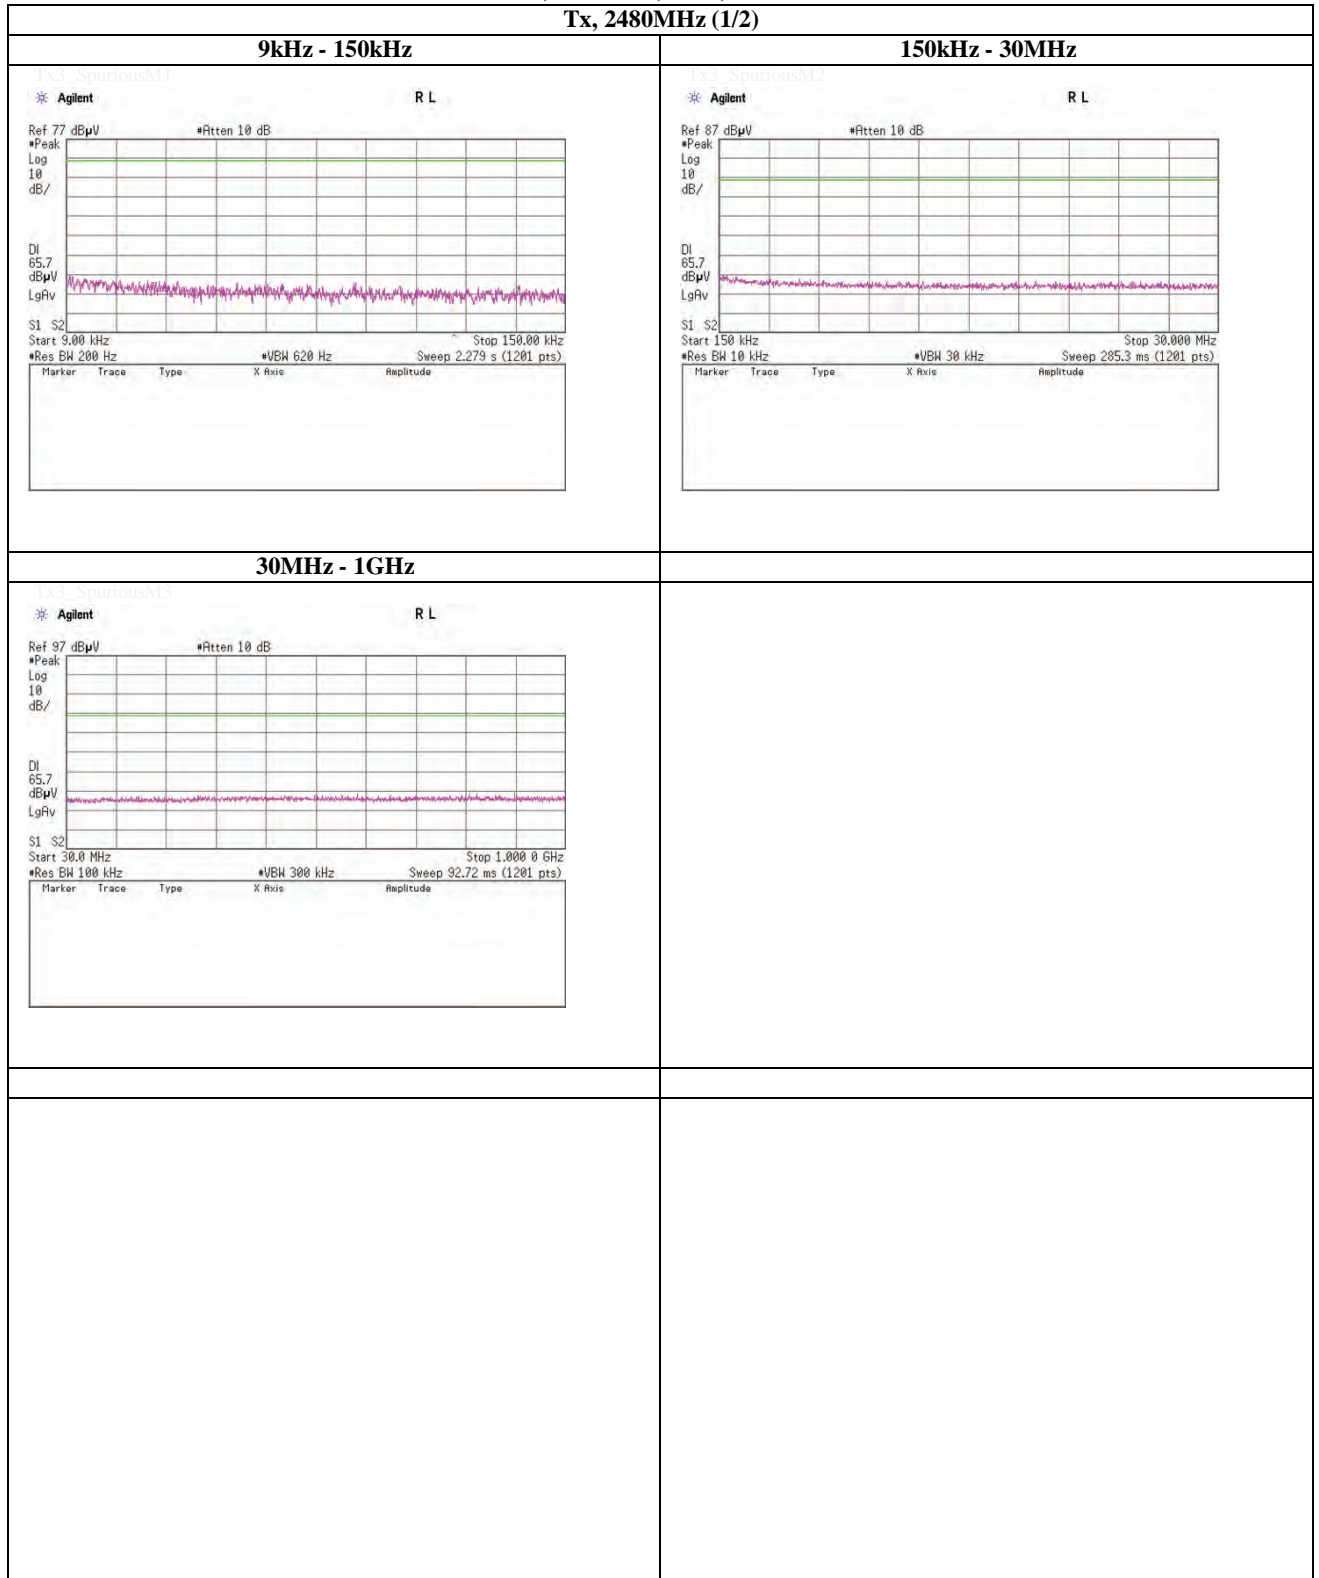

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN


Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

### Spurious emission (Conducted)

Tx, Bluetooth, EDR, PRBS9

Tx, 2480MHz (2/2)

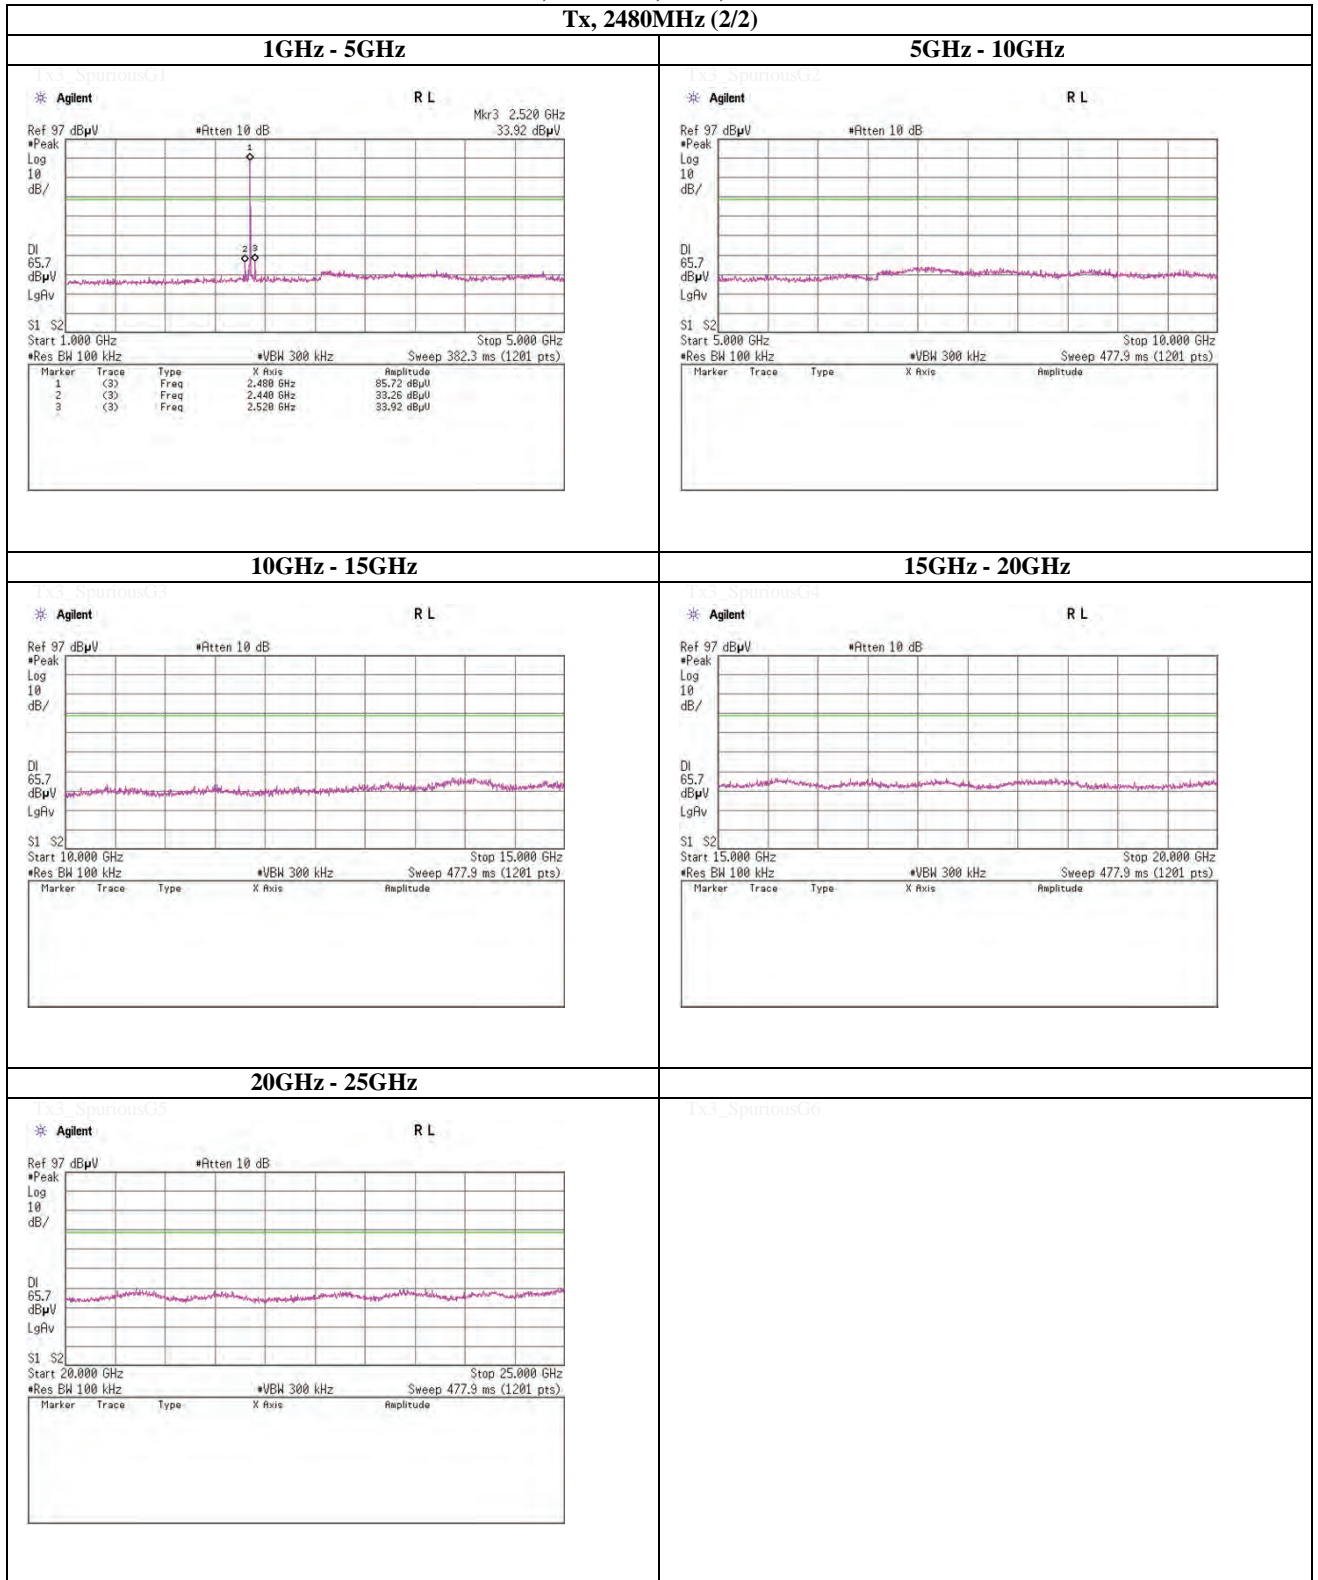

**UL Japan, Inc.**

**Shonan EMC Lab.**



1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Spurious emission (Conducted)

### Band Edge compliance

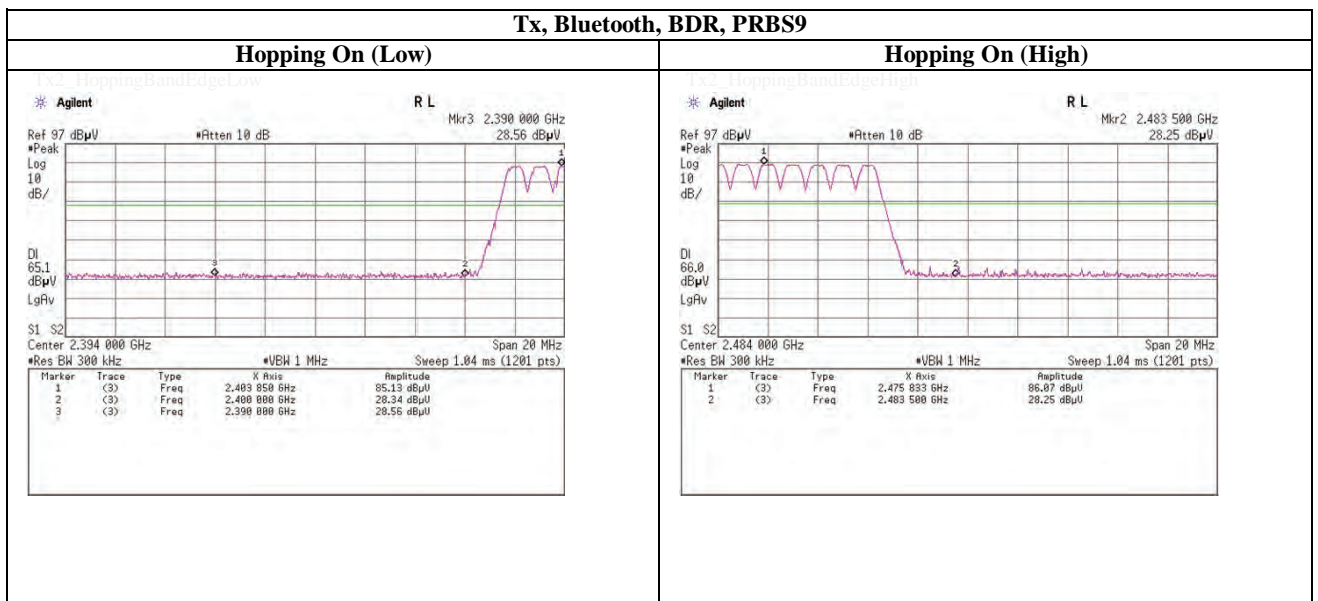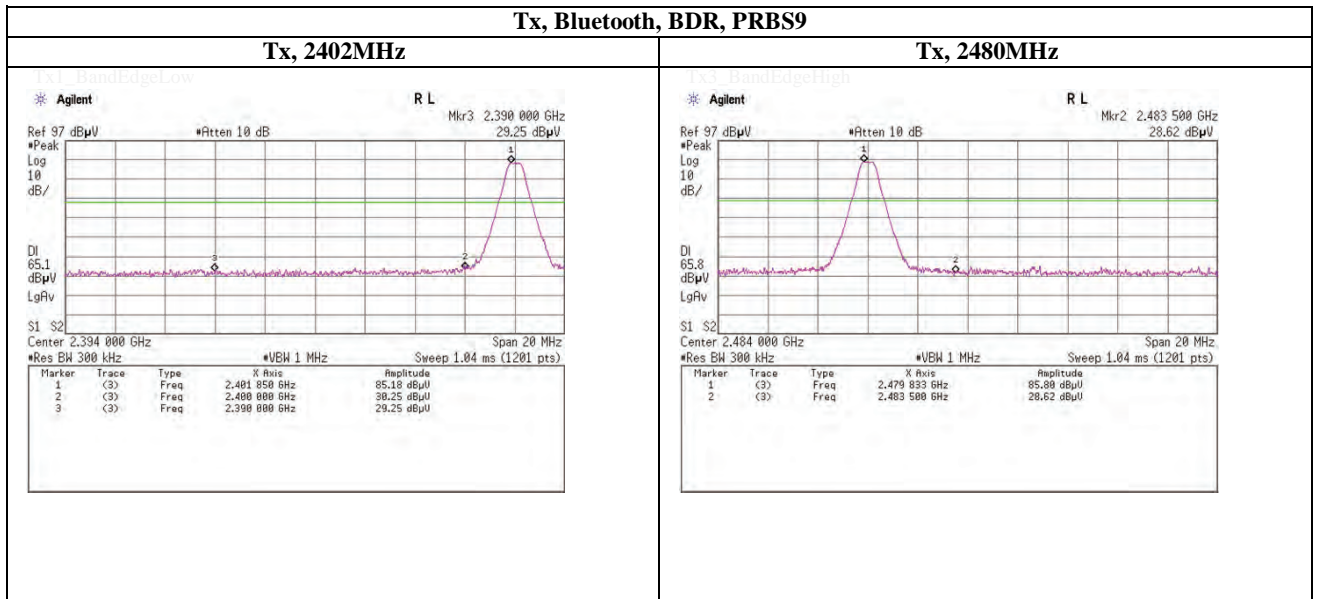

**UL Japan, Inc.**

**Shonan EMC Lab.**



1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## Spurious emission (Conducted)

### Band Edge compliance

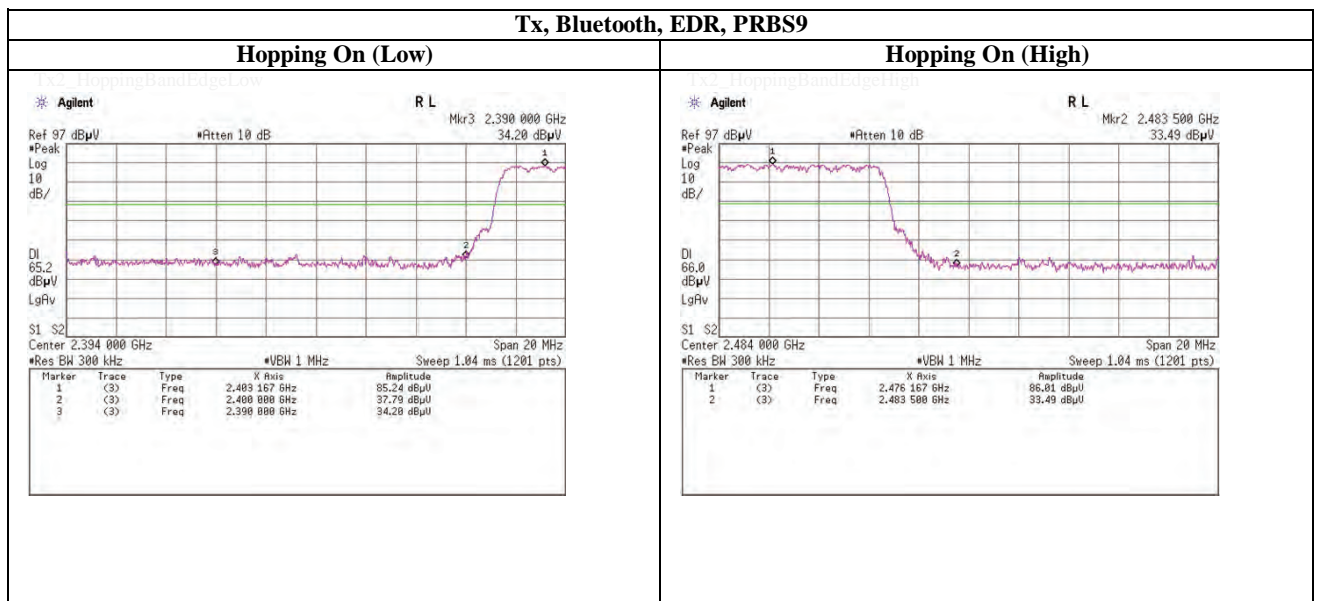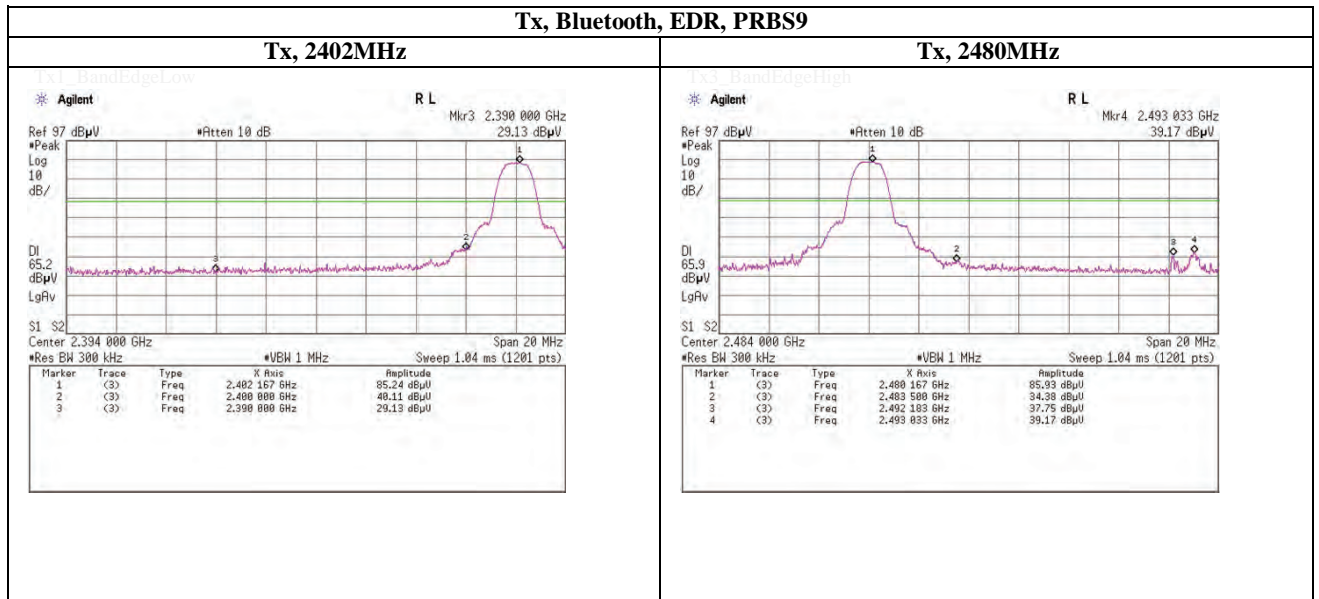

**UL Japan, Inc.**


**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## 99% Occupied Bandwidth

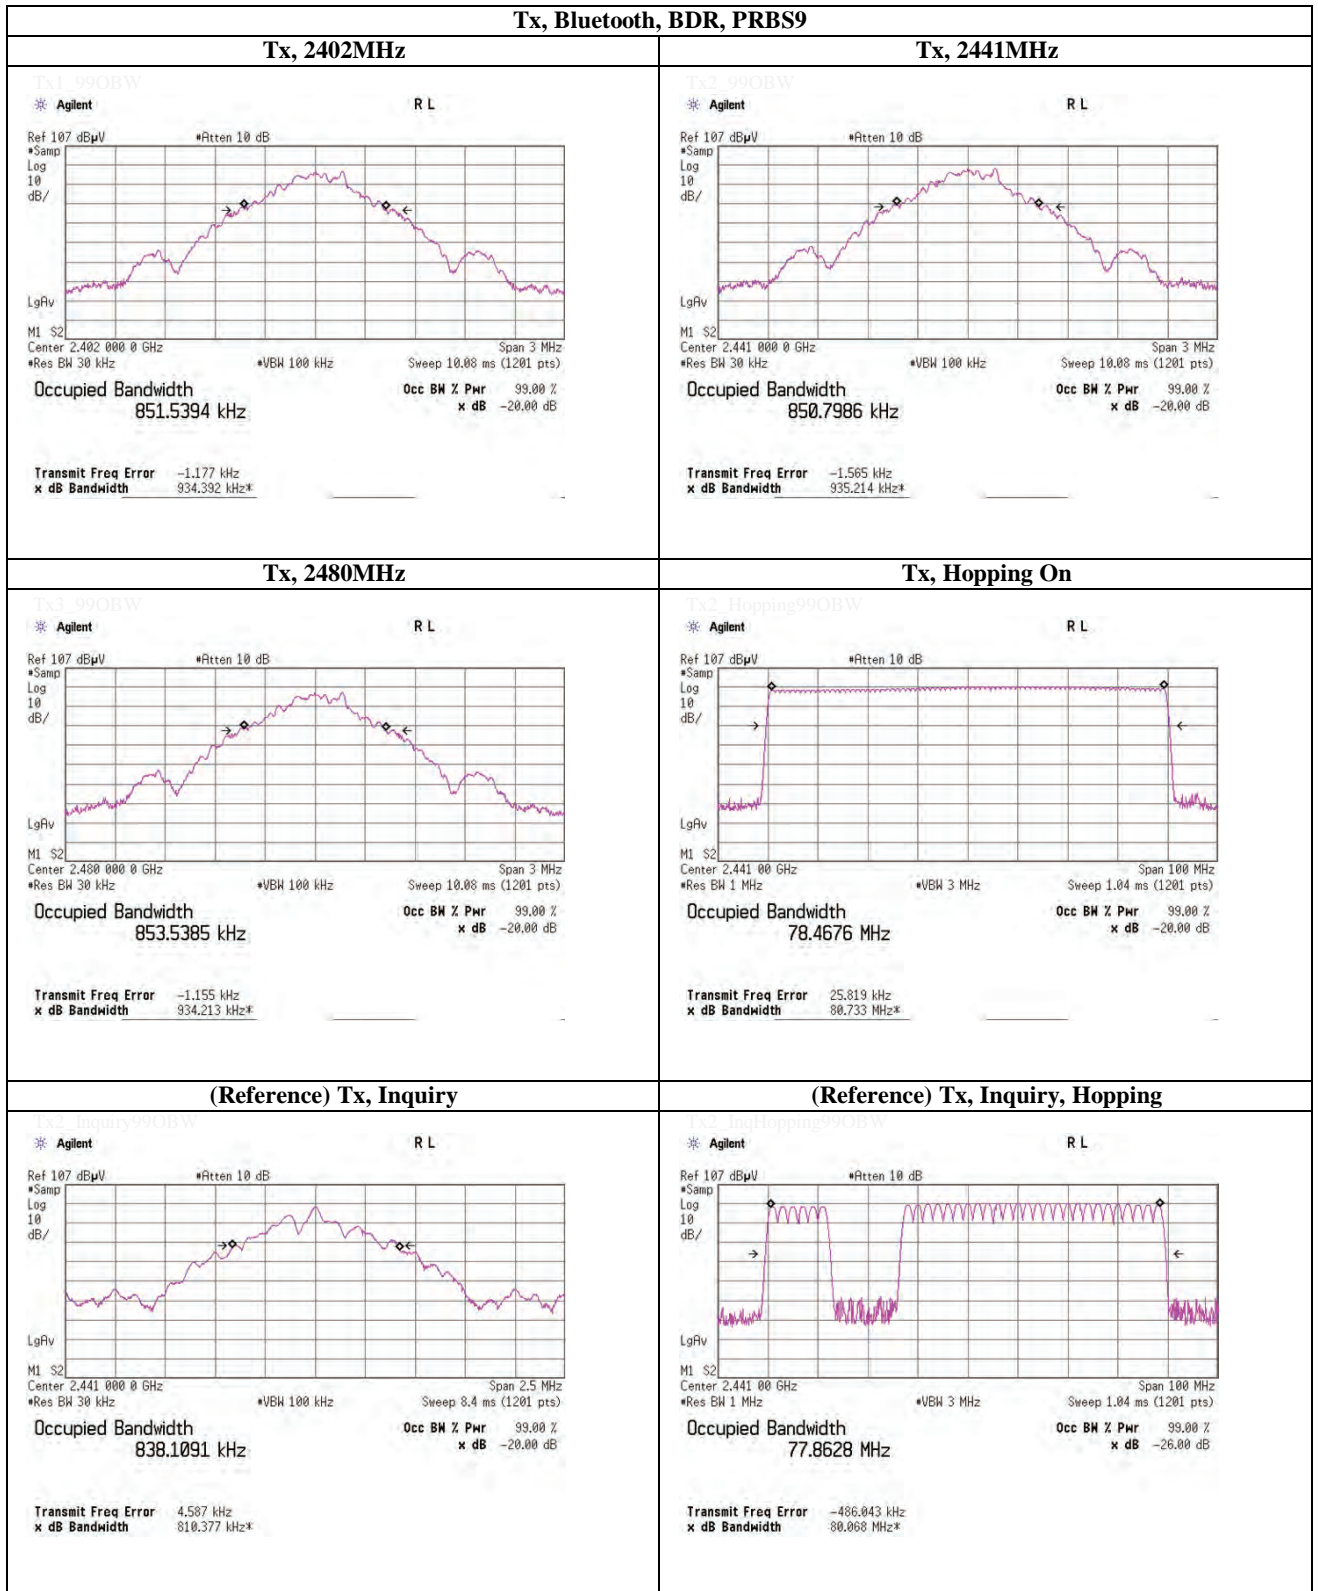

**UL Japan, Inc.**


**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## 99% Occupied Bandwidth

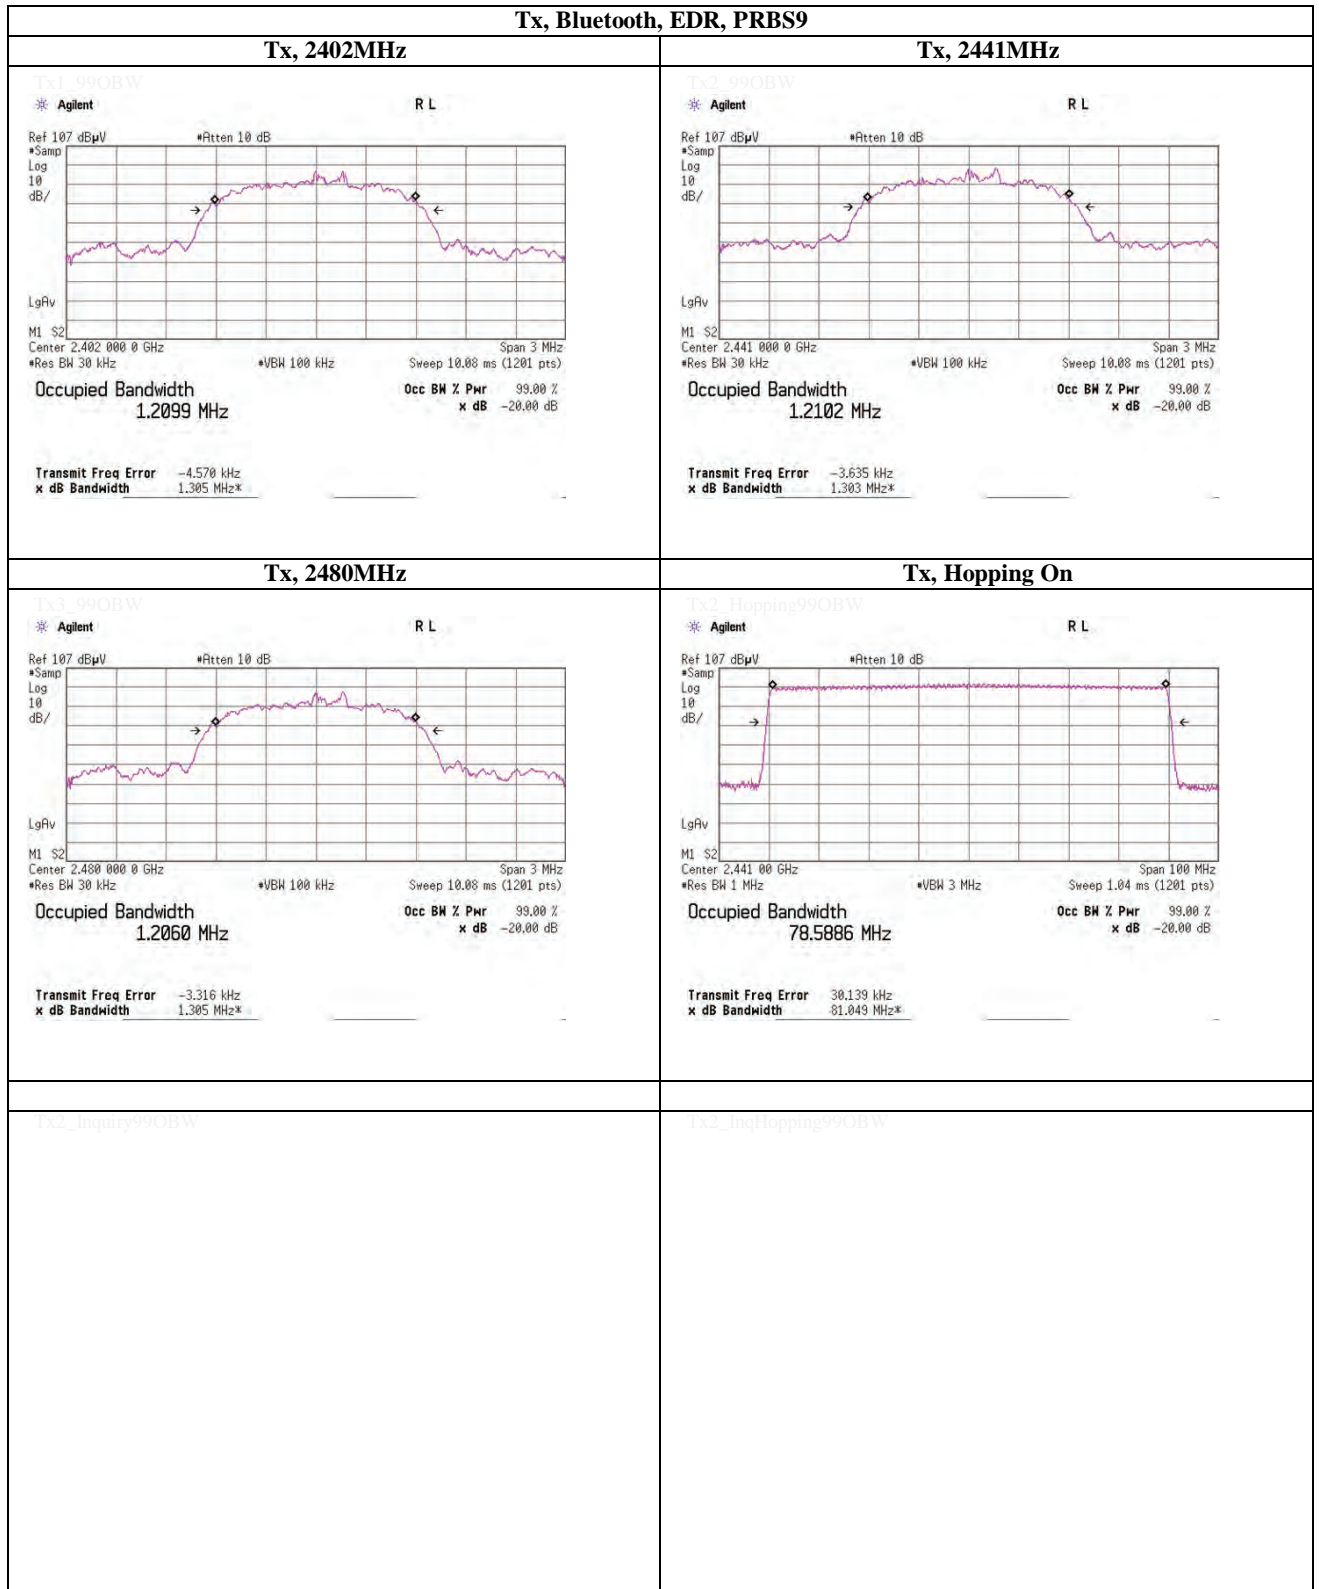

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

**APPENDIX 2**  
**Test Instruments**

**EMI test equipment**

Control No.	Instrument	Manufacturer	Model No	Serial No	Test Item	Calibration Date * Interval(month)
SPM-06	Power Meter	Anritsu	ML2495A	0850009	AT	2012/04/19 * 12
SPSS-03	Power sensor	Anritsu	MA2411B	0917063	AT	2012/04/19 * 12
SSA-03	Spectrum Analyzer	Agilent	E4448A	MY48250152	AT	2011/12/05 * 12
SAT10-10	Attenuator	Weinschel Corp.	54A-10	37584	AT	2012/04/06 * 12
SAT20-03	Attenuator	Agilent	8493C-020	74891	AT	2012/03/12 * 12
SCC-G12	Coaxial Cable	Suhner	SUCOFLEX 102	30790/2	AT	2012/03/12 * 12
SOS-09	Humidity Indicator	A&D	AD-5681	4061484	AT	2012/03/26 * 12
SAF-06	Pre Amplifier	TOYO Corporation	TPA0118-36	1440491	RE	2011/07/19 * 12
SCC-G03	Coaxial Cable	Suhner	SUCOFLEX 104A	46499/4A	RE	2012/04/10 * 12
SCC-G23	Coaxial Cable	Suhner	SUCOFLEX 104	297342/4	RE	2012/05/22 * 12
SHA-03	Horn Antenna	Schwarzbeck	BBHA9120D	9120D-739	RE	2011/08/28 * 12
SOS-05	Humidity Indicator	A&D	AD-5681	4062518	RE	2012/02/06 * 12
KSA-08	Spectrum Analyzer	Agilent	E4446A	MY46180525	RE	2012/02/16 * 12
SJM-10	Measure	PROMART	SEN1935	-	RE	-
COTS-SEMI-1	EMI Software	TSJ	TEPTO-DV(RE,CE, RFL,MF)	-	RE	-
SAT10-06	Attenuator	Agilent	8493C-010	74865	RE	2011/12/27 * 12
SFL-02	Highpass Filter	MICRO-TRONICS	HPM50111	051	RE	2011/12/27 * 12
SHA-04	Horn Antenna	ETS LINDGREN	3160-09	LM3640	RE	2012/03/30 * 12
SAF-08	Pre Amplifier	TOYO Corporation	HAP18-26W	00000019	RE	2012/03/12 * 12
SCC-G17	Coaxial Cable	Suhner	SUCOFLEX 104A	46291/4A	RE	2012/03/12 * 12
SSA-02	Spectrum Analyzer	Agilent	E4448A	MY48250106	RE	2012/03/16 * 12
SAF-02	Pre Amplifier	SONOMA	310N	290212	RE	2012/02/10 * 12
SAT6-02	Attenuator	JFW	50HF-006N	-	RE	2012/02/10 * 12
KAT3-11	Attenuator	JFW IND. INC.	50HF-003N	-	RE	2011/08/30 * 12
SBA-02	Biconical Antenna	Schwarzbeck	BBA9106	91032665	RE	2011/11/16 * 12
SCC-B1/B3/B5/B7/B8/B13/SRSE-02	Coaxial Cable&RF Selector	Fujikura/Fujikura/Suhner/Suhner/Suhner/Suhner/TOYO	8D2W/12DSFA/141PE/141PE/141PE/141PE/NS4906	-/0901-270(RF Selector)	RE	2012/04/10 * 12
SCC-B2/B4/B6/B7/B8/B13/SRSE-02	Coaxial Cable&RF Selector	Fujikura/Fujikura/Suhner/Suhner/Suhner/Suhner/TOYO	8D2W/12DSFA/141PE/141PE/141PE/141PE/NS4906	-/0901-270(RF Selector)	RE	2012/04/10 * 12
SLA-02	Logperiodic Antenna	Schwarzbeck	UHALP9108A	UHALP 9108-A 0893	RE	2011/11/16 * 12
SOS-03	Humidity Indicator	A&D	AD-5681	4063325	RE	2012/02/06 * 12
STR-02	Test Receiver	Rohde & Schwarz	ESCI	100575	RE	2011/08/04 * 12
SJM-02	Measure	KOMELON	KMC-36	-	RE	-
SAEC-02(NSA)	Semi-Anechoic Chamber	TDK	SAEC-02(NSA)	2	RE	2011/09/25 * 12
SAF-05	Pre Amplifier	TOYO Corporation	TPA0118-36	1440490	RE	2012/03/12 * 12
SCC-G02	Coaxial Cable	Suhner	SUCOFLEX 104A	46498/4A	RE	2012/04/10 * 12
SCC-G22	Coaxial Cable	Suhner	SUCOFLEX 104	296199/4	RE	2012/05/22 * 12
SHA-02	Horn Antenna	Schwarzbeck	BBHA9120D	9120D-726	RE	2011/08/28 * 12

The expiration date of the calibration is the end of the expired month .  
As for some calibrations performed after the tested dates , those test equipment have been controlled by means of an unbroken chains of calibrations .

ll equipment is calibrated with valid calibrations . Each measurement data is traceable to the national or international standards .

Test Item :

- RE: Radiated emission ,
- AT: Antenna terminal test