

Test Report

Product	Indoor Home Monitoring Camera with WiFi		
Name and address of the applicant	Panasonic Corporation of North America Two Riverfront Plaza, 9 th Floor Newark, NJ 07102-5490, USA		
Name and address of the manufacturer	Same as above		
Model	KX-HNC810 KX-HNC815C		
Rating	Mains (120 V _{AC} 60 Hz)		
Trademark	Panasonic		
Serial number	/		
Additional information	WiFi, 802.11a/b/g/n		
Tested according to	FCC Part 15, subpart B Other Class B Digital Device Industry Canada ICES-003, Issue 6 Information Technology Equipment (ITE)		
Order number	367960		
Tested in period	2018-11-26 to 2019-01-31		
Issue date	2019-02-12		
Name and address of the testing laboratory	 Instituttveien 6 Kjeller, Norway www.nemko.com	SITE NUMBER: FCC: NO0001 IC: 2040D-1	 
An accredited technical test executed under the Norwegian accreditation scheme			
 Prepared by [Frode Sveinsen]		 Approved by [G. Suhanthakumar]	
This report shall not be reproduced except in full without the written approval of Nemko. Opinions and interpretations expressed within this report are not part of the current accreditation. This report was originally distributed electronically with digital signatures. For more information contact Nemko.			

CONTENTS

1	INFORMATION	3
1.1	Tested Item.....	3
1.2	Test Environment.....	4
1.3	Test Engineer(s).....	4
1.4	Test Equipment.....	4
1.5	Other Comments	4
2	TEST REPORT SUMMARY	5
2.1	General.....	5
2.2	Test Summary	6
3	TEST RESULTS.....	7
3.1	Power Line Conducted Emissions	7
3.2	Spurious Emissions (Radiated)	9
4	MEASUREMENT UNCERTAINTY	16
5	TEST SETUPS.....	17
5.1	Radiated Emissions Test	17
5.2	Power Line Conducted Emissions Test	17
6	TEST EQUIPMENT USED	18

1 INFORMATION

1.1 Tested Item

Name	Panasonic
Model name	KX-HNC810 (US model) KX-HNC815C (Canada model)
FCC ID	ACJ96NKX-HNC810
ISED ID	216A-KXHNC815
FCC / IC Class	B
Serial number	/
Hardware identity and/or version	N/A
Software identity and/or version	N/A
Power Supply	AC Adaptor Model PNLV251 (Input: 120V 60Hz 350mA, Output: 5V _{DC} 1.8A)

Description of Tested Device(s)

The tested device is an Indoor Home Monitoring Camera with WiFi connection.

The KX-HNC810 is identical to the KX-HNC850 (FCC ID: ACJ96NKX-HNC850) except for the voltage regulator circuitry, and the KX-HNC850 is a floor standing model.

The models KX-HNC810 and KX-HNC815C are identical.

1.2 Test Environment

Temperature:	20 – 25 °C
Relative humidity:	30 – 50 %
Normal test voltage:	120 V 60 Hz

The values are the limit registered during the test period.

1.3 Test Engineer(s)

Frode Sveinsen

1.4 Test Equipment

See list of test equipment in clause 6.

1.5 Other Comments

The measurements were done with the EUT powered by 120 V AC.

All ports were populated during spurious emission measurements.

2 TEST REPORT SUMMARY

2.1 General

All measurements are traceable to national standards.

All tests were performed in accordance with ANSI C63.4-2014 where applicable. Radiated emissions are made in a 10m semi-anechoic chamber. A description of the test facility is on file with FCC and ISED.

New Submission

Production Unit

Class II Permissive Change

Pre-production Unit

JAB Equipment Code

Family Listing



THIS TEST REPORT APPLIES ONLY TO THE ITEM(S) AND CONFIGURATIONS TESTED.

Deviations from, additions to, or exclusions from the test specifications are described in "Summary of Test Data".

Nemko Group authorizes the above named entity to reproduce this report provided it is reproduced in its entirety and for use by the entity's employees only. Any reproduction of parts of this report requires approval in writing from Nemko Group.

Any use that a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko Group accepts no responsibility for damages suffered by any third party caused by decisions made or actions based on this report.

2.2 Test Summary

Name of test	FCC CFR 47, Paragraph #	ISED RSS-GEN, Issue 5, Paragraph #	ISED ICES-003, Issue 6, Paragraph #	Verdict
Power Line Conducted Emission	15.107(a) 15.207(a)	7.2 / 8.8	6.1	Complies
Spurious Emissions (Radiated)	15.109	7.3 / 8.9	6.2	Complies

Revision history

Version	Date	Comment	Sign
1.0	2019.02.12	First Edition	FS

3 TEST RESULTS

3.1 Power Line Conducted Emissions

FCC Part 15.107 (a)

ISED ICES-003 Issue 6, Clause 6.1

Measurement procedure: ANSI C63.4-2014 using 50 μ H/50 ohms LISN

Test Results: Complies

Measurement Data: See attached plots

Highest measured value (L1 and N):


110V 60Hz, Camera in Standby:

Frequency (MHz)	QuasiPeak (dB μ V)	Average (dB μ V)	Limit (dB μ V)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter
0.492	39.45	---	56.13	16.68	1000	9	L1	OFF


110V 60Hz, Camera Active:

Frequency (MHz)	QuasiPeak (dB μ V)	Average (dB μ V)	Limit (dB μ V)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter
0.500	39.41	---	56.00	16.59	1000	9	L1	OFF

110V 60Hz, Camera in Standby:

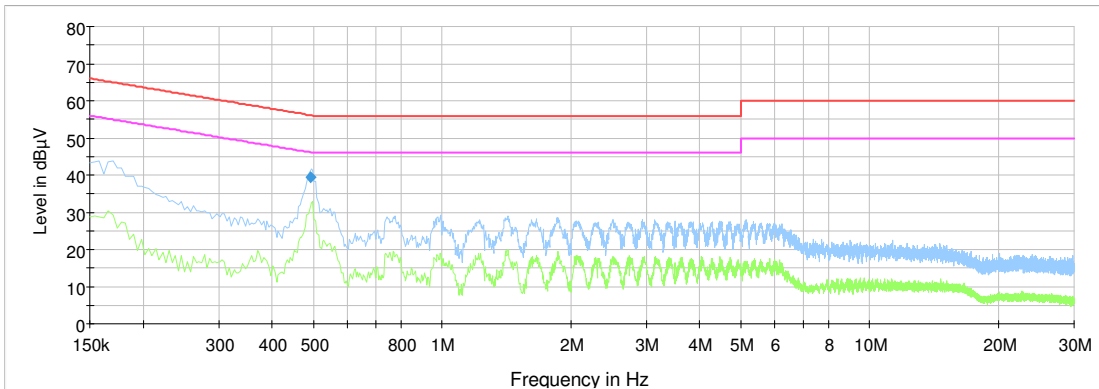

110V 60Hz, Camera Active:

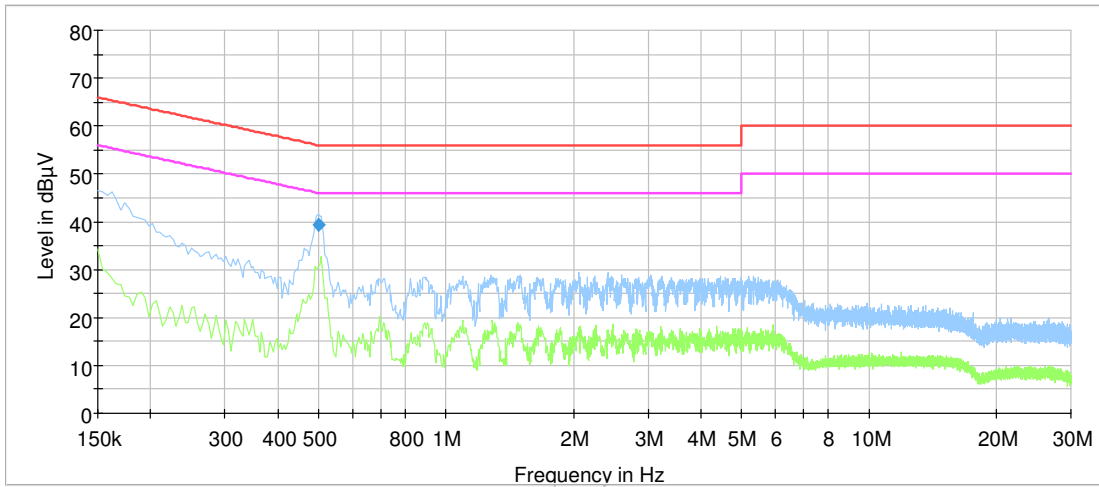

3.2 Spurious Emissions (Radiated)

FCC Part 15.109

ISED ICES-003 Issue 6, Clause 6.2

Test Results:

Radiated Emissions 30 - 1000 MHz.

Detector: Peak

Measuring distance 3 m


The EUT were rotated 360 degrees

Measured Frequency (MHz)	Measured Emission (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
30 – 88	< 25	40.0	>15
88 – 216	< 28	43.5	>15
216 – 960	< 31	46.0	>15
960 – 1000	< 34	54.0	>20

See attached plots.


Requirements/Limit

FCC	Part 15.109	
	Radiated emission limit @3 meters	
Frequency (MHz)	Quasi Peak (μ V/m)	Quasi Peak (dB μ V/m)
30 – 88	100	40.0
88 – 216	150	43.5
216 – 960	200	46.0
960 – 1000	500	54.0

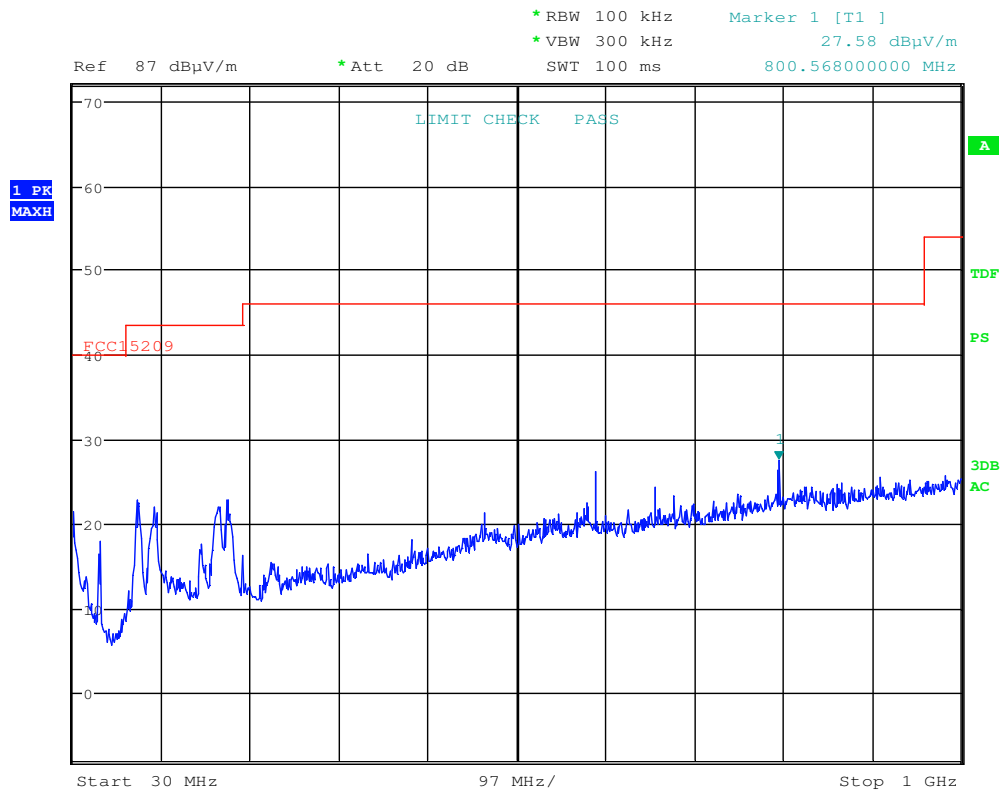

Date: 30.NOV.2018 16:44:48

Radiated Emissions, 30 – 1000 MHz, Standby, HP

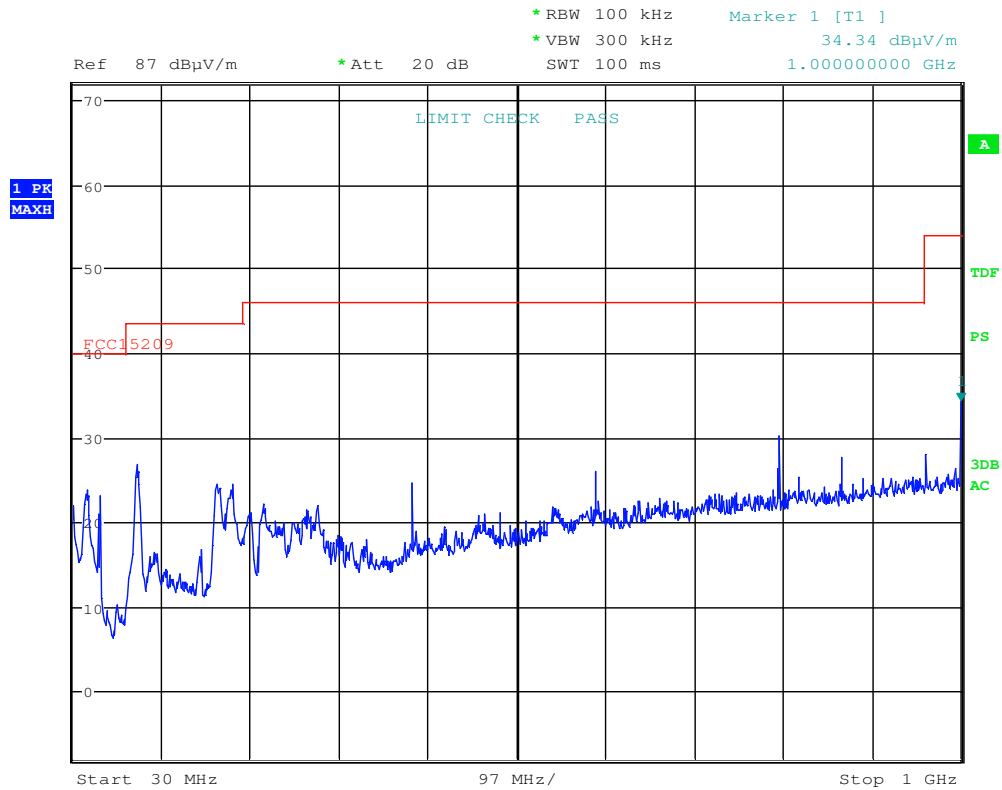

Date: 30.NOV.2018 16:42:43

Radiated Emissions, 30 – 1000 MHz, Standby, VP

Radiated Emissions, 1 - 4 GHz

Measuring distance: 3m (1 – 4 GHz)

Peak Detector, RBW=1 MHz

Measured Frequency	Measured Emission (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
2132 MHz	68.0	74	6.0
Any other	< 54	74	>20

*Worst case

Average Detector, RBW=1 MHz

Measured Frequency	Measured Emission (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
1600 MHz	30.2	54	13.8
2132 MHz	53.6	54	0.4


A Band Reject Filter was used for measurements from 1 GHz to 4 GHz.

Antenna factor, amplifier gain and cable loss are included in Spectrum Analyzer "Transducer factor".


See attached plots.

Requirements/Limit


FCC	Part 15.109	
ISED	RSS-GEN Issue 5, clause 8.9 @ frequencies defined in clause 8.10	
	Radiated emission limit @3 meters	
Frequency (MHz)	AV (dB μ V/m)	Peak (dB μ V/m)
Above 1 GHz	54.0	74.0

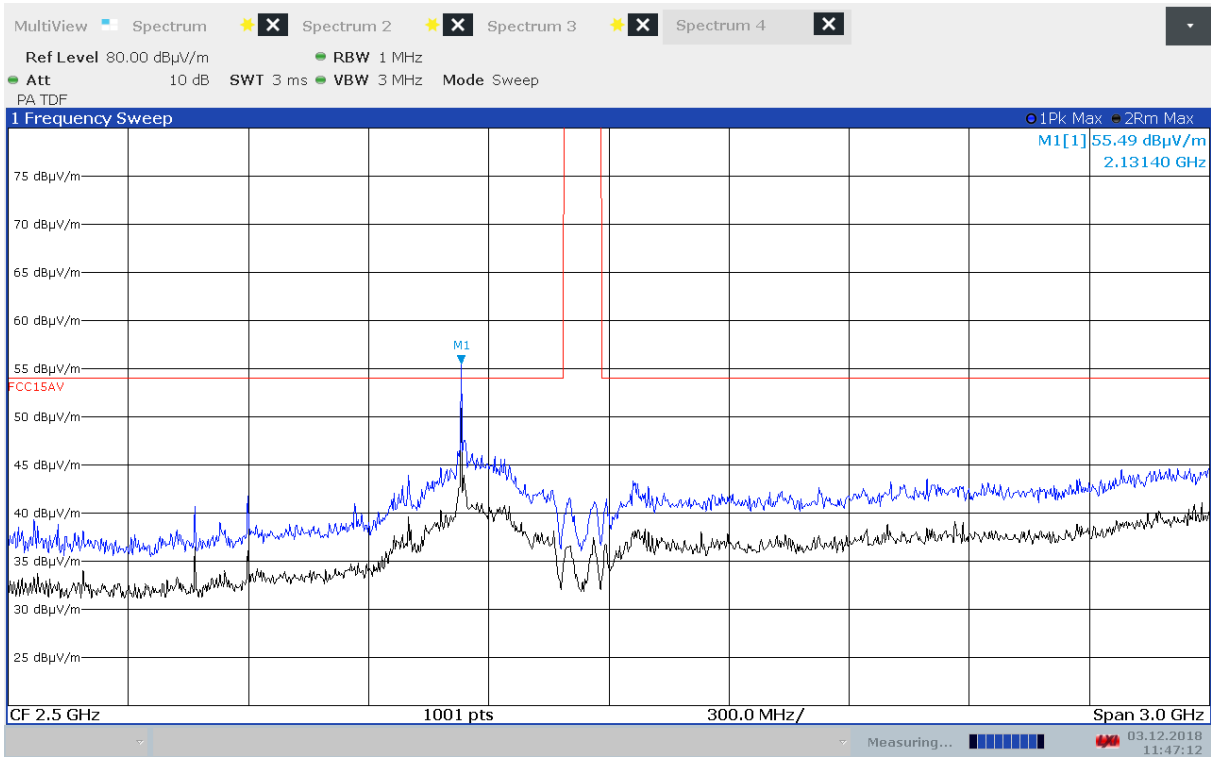


Radiated Emissions, 1000 -4000 MHz, 2412 MHz, VP, 802.11b, 1Mbps

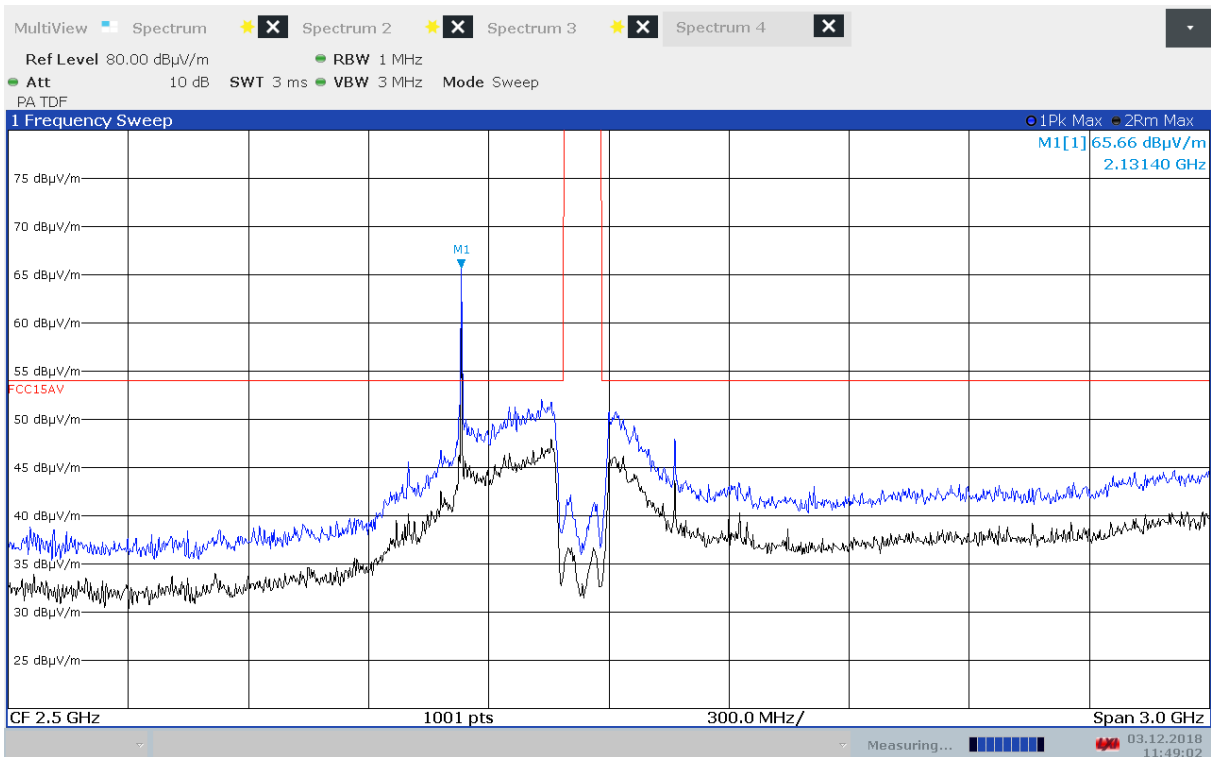


Radiated Emissions, 1000 -4000 MHz, 2412 MHz, HP, 802.11b, 1Mbps

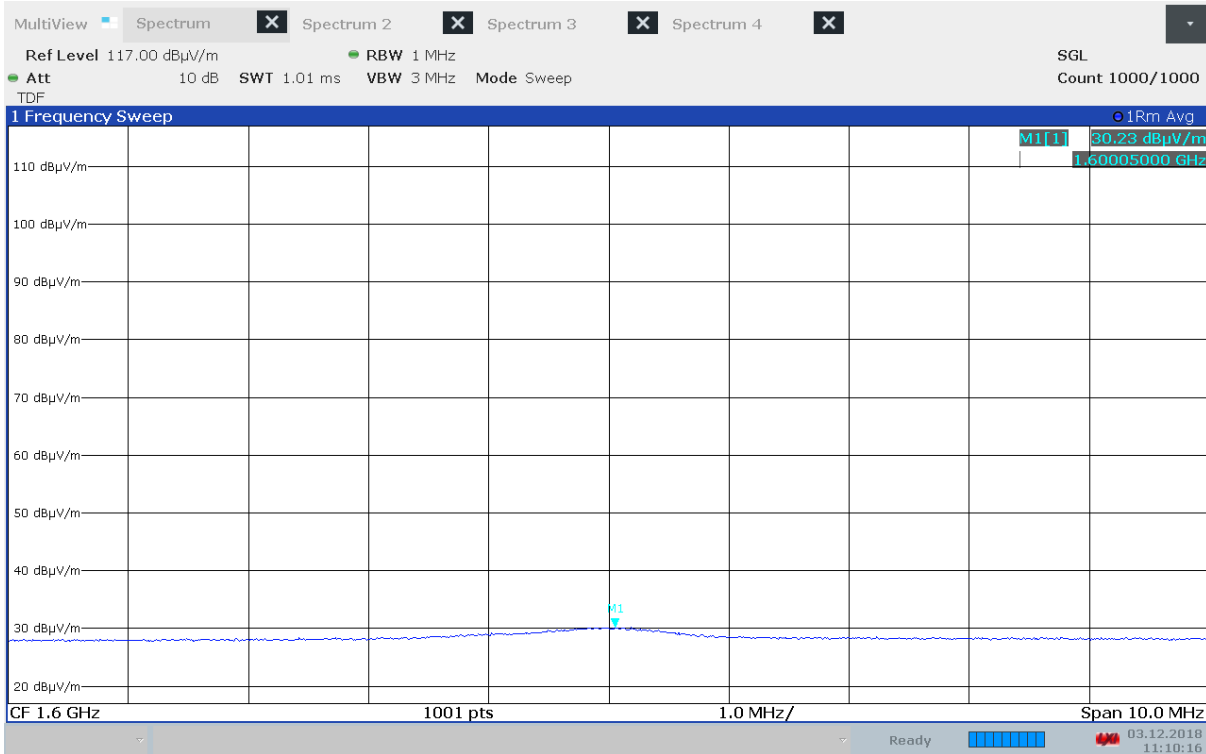

Radiated Emissions, 1600 MHz, 2412 MHz, 802.11g, 6Mbps (Max: VP), Average

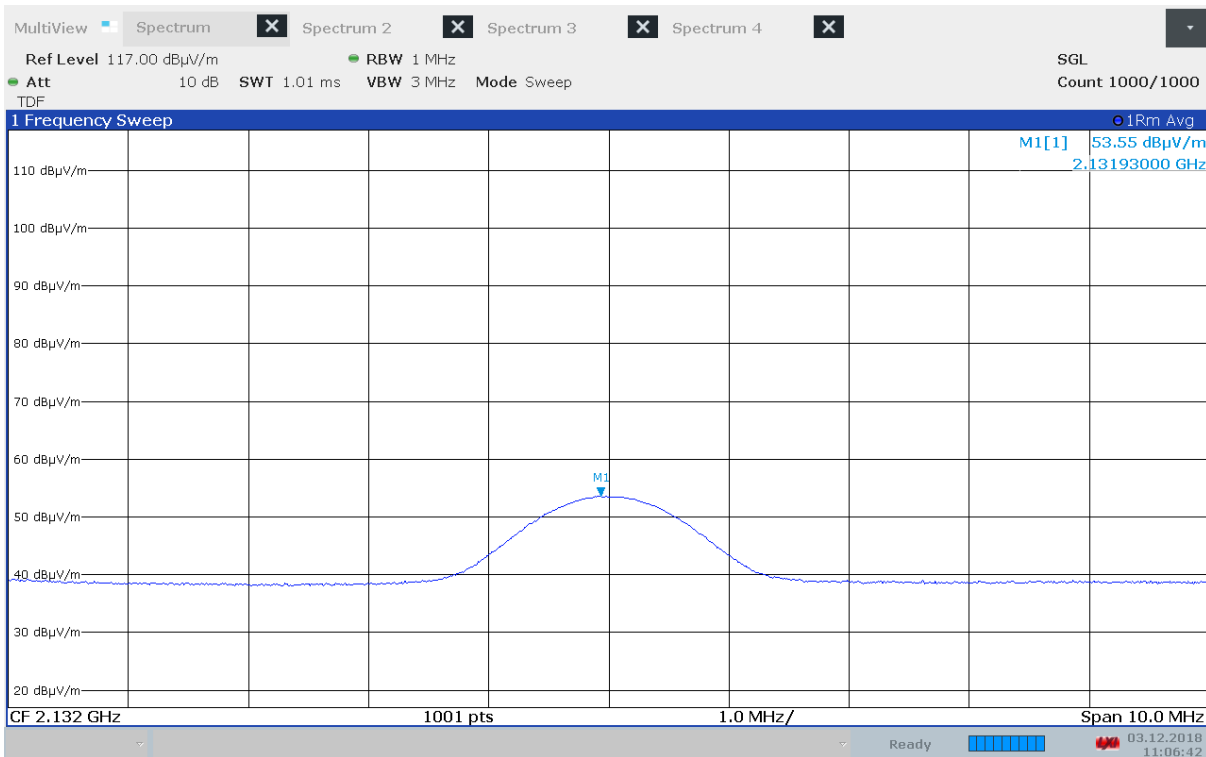

Radiated Emissions, 2132 MHz, 2412 MHz, 802.11g, 6Mbps (Max: HP), Average

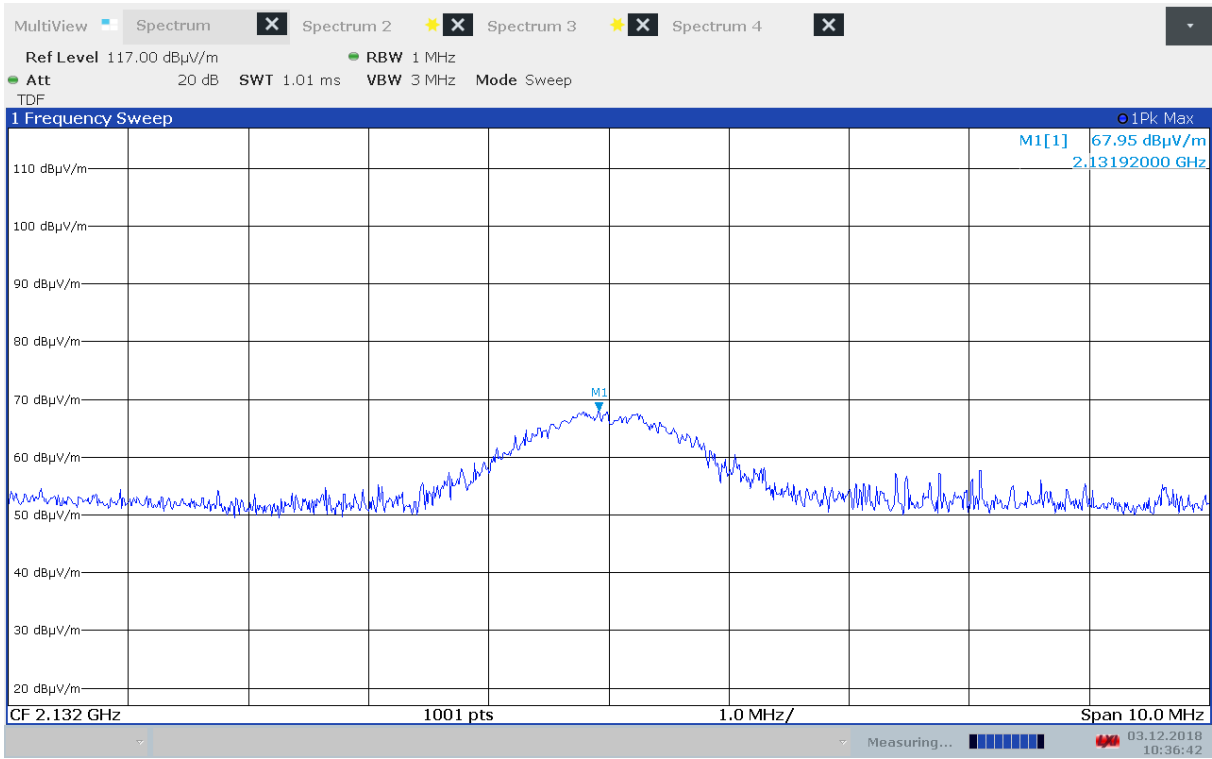

Radiated Emissions, 2132 MHz, 2412 MHz, 802.11g, 6Mbps (Max: HP), Peak


4 Measurement Uncertainty

Measurement Uncertainty Values		
Test Item		Uncertainty
Spurious Emissions, Radiated	< 1 GHz	±2.5 dB
	> 1 GHz	±2.2 dB
Power Line Conducted Emissions		+2.9 / -4.1 dB
Temperature Uncertainty		±1 °C

All uncertainty values are expanded standard uncertainty to give a confidence level of 95%, based on coverage factor k=2

5 Test Setups


5.1 Radiated Emissions Test

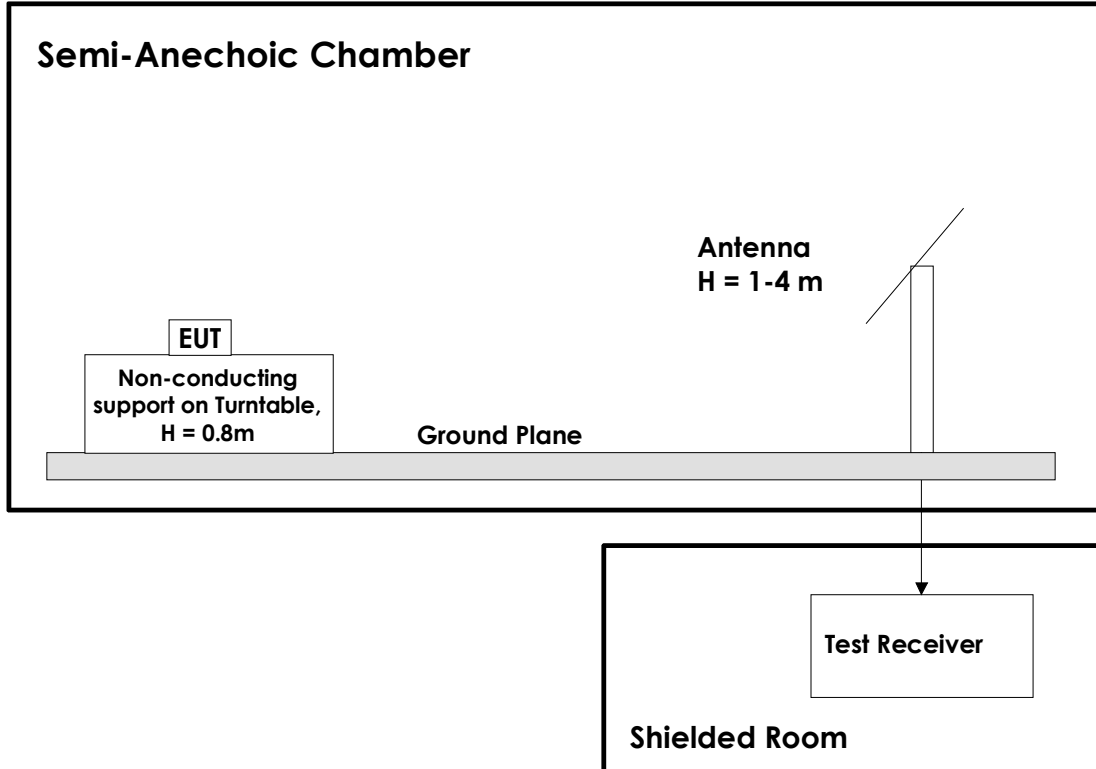

Test Set-Up 1

This test setup is used for all radiated emissions tests. For frequencies below 30 MHz the measuring distance is 10m, for all other frequencies it is 3m or 1m. Emissions above 1 GHz are measured with a Spectrum Analyzer and Horn Antenna. All measurements at 1 GHz and above were performed with turntable height 1.5m and with the ground plane covered by absorbers. A pre-amplifier is used for all measurements above 30 MHz.

5.2 Power Line Conducted Emissions Test

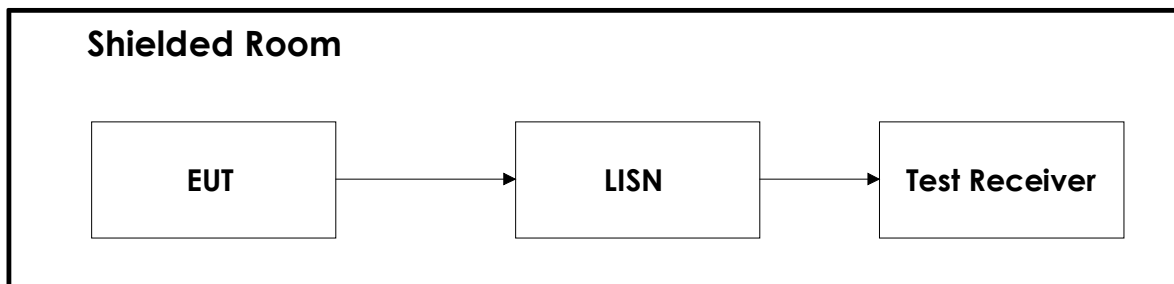

Test Set-Up 2

6 Test Equipment Used

To facilitate inclusion on each page of the test equipment used for related tests, each item of test equipment and ancillaries are identified (numbered) by the Testhouse.

No.	Model number	Description	Manufacturer	Ref. no.	Cal. date	Cal. Due
1	FSW43	Spectrum Analyzer	Rohde & Schwarz	LR 1690	2018.01 2019.01	2019.01 2020.01
2	ESU40	Measuring Receiver	Rohde & Schwarz	LR 1639	2018.03 2019.01	2019.03 2020.01
3	JB3	BiLog Antenna	Sunol Sciences	N-4525	2016.05	2019.05
4	317	Preamplifier	Sonoma Inst.	LR 1687	2018.07	2019.07
5	8449A	Pre-amplifier	Hewlett Packard	LR 1322	2018.07	2019.07
6	3115	Horn Antenna	EMCO	LR 1330	2016.10	2019.12
7	WRCG2400/2483.5	Band Reject Filter	Wainwright Inst.	LR 1530	COU	
8	Model 87 V	Multimeter	Fluke	LR 1597	2018.02	2019.02
9	6812B	AC Power Source	Agilent	LR 1515	COU	
10	ENV216	Two Line V-Network	Rohde & Schwarz	LR 1665	2017.11	2019.11
11	ESC13	Measuring Receiver	Rohde & Schwarz	N-4259	2017.10	2019.10

Note: COU – calibrate on use; N/A – Not Applicable

The software listed below has been used for one or more tests.

No.	Manufacturer	Name	Version	Comment
1	Rohde & Schwarz	EMC32	10.20.10	Power Line Conducted test software
2	Rohde & Schwarz	EMC32	10.20.10	Radiated Emission test software
3	Rohde & Schwarz	GPIBSHOT	2.7	Screenshots from R&S Spectrum Analyzers