


PCTEST Engineering Laboratory, Inc.

6660-B Dobbin Road · Columbia, MD 21045 · U.S.A.

TEL (410) 290-6652 · FAX (410) 290-6654

<http://www.pctestlab.com>



CERTIFICATE OF COMPLIANCE FCC Part 15.249 Certification

MATSUSHITA Electric Industrial Co., Ltd.
1006 Oaza Kadoma
Kadoma, Osaka 571 JAPAN
Attention: M. Mori, Manager (MEICL-KM4)
Rich Mullen (MECA-PSCD)

Dates of Tests: February 15-16, 2001
Test Report S/N: TX.210212090.ACJ
Test Site: PCTEST Lab, Columbia MD

FCC ID

ACJ96NKX-TC1403

APPLICANT

MATSUSHITA Electric Industrial Co., Ltd.

FCC Rule Part(s): § 15.249 (Subpart C – Intentional Radiator)
Classification: Low Power Transceiver, Rx Verified (DXT)
EUT Type: 900MHz Cordless Telephone (Base/Handset)
Frequency Range: 902.20 MHz ~ 904.90 MHz (Base)
925.20 MHz ~ 927.50 MHz (Handset)
Trade Name: *Panasonic*
Model(s): *KX-TC1403/KX-TC-1402*

This device has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified is ANSI C63.4-1992 with the following remarks (Note Codes):

(#68) This grant does not pertain to Registration requirements under Part 68.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

PCTEST certifies that no party to this application has been denied the FCC benefits pursuant to Section Abuse Act of 1988, 21 U.S.C. 853(a).




Randy Ortanez
President & Chief Engineer



TABLE OF CONTENTS

ATTACHMENT A:	COVER LETTER(S)	
ATTACHMENT B:	ATTESTATION STATEMENT(S)	
ATTACHMENT C:	TEST REPORT	
1.1	SCOPE	1
2.1	INTRODUCTION (SITE DESCRIPTION)	2
3.1	PRODUCTION INFORMATION	3
4.1	DESCRIPTION OF TESTS (CONDUCTED & RADIATED)	4-5
5.1	ANTENNA REQUIREMENT/APPLIED MODULATION	6
6.1	LIST OF SUPPORT EQUIPMENT	7
7.1	FREQUENCY MEASUREMENTS (Fundamental & Harmonics)	8-15
8.1	FREQUENCY MEASUREMENTS (Fundamental & Spurious)	16-17
9.1	LINE-CONDUCTED EMISSIONS	18
10.1	SAMPLE CALCULATIONS	19
11.1	ACCURACY OF MEASUREMENT	20
12.1	LIST OF TEST EQUIPMENT	21
13.1	CONCLUSION	22
ATTACHMENT D:	TEST PLOTS	
ATTACHMENT E:	FCC ID LABEL & LOCATION	
ATTACHMENT F:	BLOCK DIAGRAM(S)	
ATTACHMENT G:	SCHEMATIC DIAGRAM(S)	
ATTACHMENT H:	OPERATIONAL DESCRIPTION	
ATTACHMENT I:	TEST SETUP PHOTOGRAPHS	
ATTACHMENT J:	EXTERNAL PHOTOGRAPHS	
ATTACHMENT K:	INTERNAL PHOTOGRAPHS	
ATTACHMENT L:	USER'S MANUAL	

MEASUREMENT REPORT



1.1 Scope

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission.

Company Name:	MATSUSHITA ELECTRIC INDUSTRIAL CO., LTD.
Address:	1006 Oaza Kadoma Kadoma, Osaka 571 JAPAN
Attention:	Mr. M. Mori, Manager (MEICL-KM4) Rich Mullen, Project Manager (MECA-PSCD)

- FCC ID: **ACJ96NKX-TC1403**
- Model(s): **KX-TC1403/KX-TC-1402**
- Trade Name: **Panasonic**
- EUT Type: **900MHz Cordless Phone**
- Equipment Class: **Low Power Transceiver, Rx Verified (DXT)**
- Application Type: **Certification**
- Frequency Range: **902.20 – 904.90 (Base)
925.20 – 927.50 (Handset)**
- FCC Rule Part(s): **§ 15.249 (Subpart C - Intentional Radiator)**
- Dates of Tests: **February 15-16, 2001**
- Place of Tests: **PCTEST Lab, Columbia, MD U.S.A.**
- Test Report S/N: **TX.210212090.ACJ**

2.1 INTRODUCTION

The measurement procedure described in Section 15.249 of FCC Rules, and American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz (ANSI C63.4-1992) was used in determining radiated and conducted emissions emanating from **MATSUSHITA Electric Industrial Co., Ltd. 900MHz Cordless Phone FCC ID: ACJ96NKX-TC1403**.

These measurement tests were conducted at **PCTEST Engineering Laboratory, Inc.** facility in New Concept Business Park, Guilford Industrial Park, Columbia, Maryland. The site address is 6660-B Dobbin Road, Columbia, MD 21045. The test site is one of the highest points in the Columbia area with an elevation of 390 feet above mean sea level. The site coordinates are 39° 11'15" N latitude and 76° 49'38" W longitude. The facility is 1.5 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. There are no FM or TV transmitters within 15 miles of the site. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4 on October 19, 1992.

2.2 PCTEST Location

The map at right shows the location of the PCTEST Lab, its proximity to the FCC Lab, the Columbia vicinity area, the Baltimore-Washington International (BWI) airport, and the city of Baltimore, and the Washington, D.C. area. (see Figure 1).

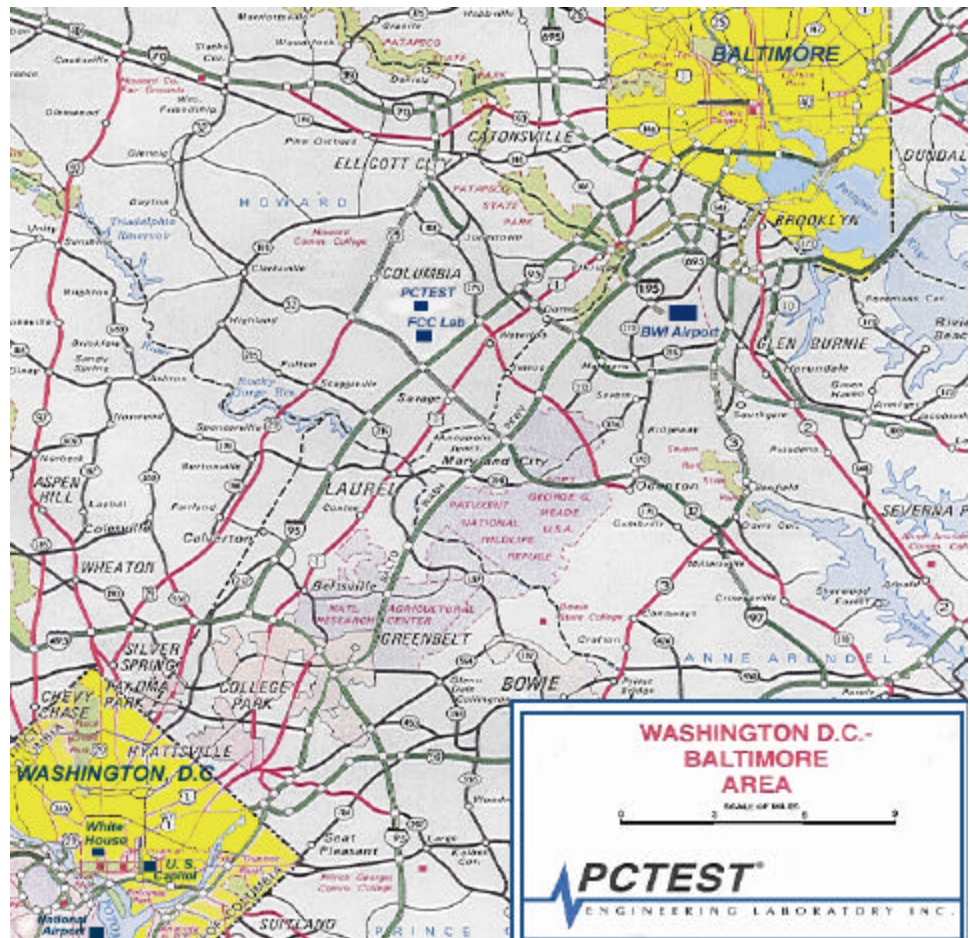


Figure 1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area.

3.1 Product Information

3.2 Equipment Description

The Equipment Under Test (EUT) is the **MATSUSHITA Electric Industrial Co., Ltd. (Panasonic Models: KX-TC1403/KX-TC1402) 900MHz Cordless Phone** FCC ID: ACJ96NKX-TC1403.

- * Tx Freq. Range(Handset): 902.20 ~ 904.90 MHz
- * Tx Freq. Range (Base): 925.20 ~ 927.50 MHz
- * Channels: Full-duplex 10-channel
- * Antenna: Permanently Attached, Omni-Directional
- * Digital Security Codes: 4 million combinations
- * Port(s)/Connector(s): (2) RJ-11C (Line/Phone), (1) DC power connector (Base Unit)
- * Power Supply: Base: Panasonic Model: PQLV15 9VDC 200mA DC Adapter
Input: AC 120V 60Hz 6.5W
Handset: Panasonic Model: KX-A36 3.6V 600mA Battery Pack
- * Power Cord: *Unshielded*
- * Cable(s): *Unshielded* Telco

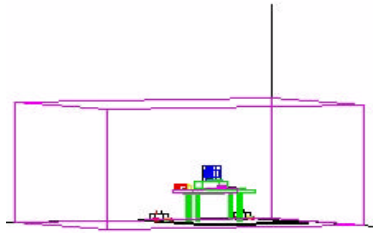


Figure 2. Shielded Enclosure Line-Conducted Test Facility

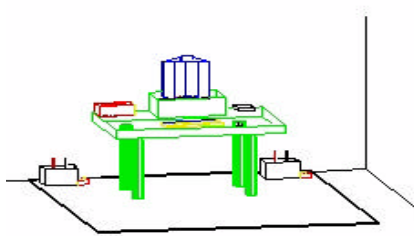


Figure 3. Line Conducted Emission Test Set-Up

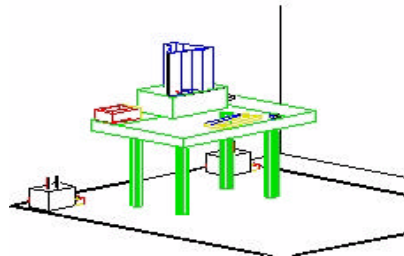


Figure 4. Wooden Table & Bonded LISNs

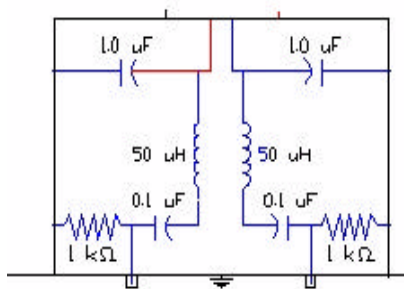


Figure 5. LISN Schematic Diagram

4.1 Description of Tests

4.2 Conducted Emissions

The line-conducted facility is located inside a 16'x20'x10' shielded enclosure. It is manufactured by Ray Proof Series 81 (see Figure 2). The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-6. A 1m. x 1.5m. wooden table 80cm. high is placed 40cm. away from the vertical wall and 1.5m away from the side wall of the shielded room (see Figure 3). Solar Electronics and EMCO Model 3725/2 (10kHz-30MHz) 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room (see Figure 4). The EUT is powered from the Solar LISN and the support equipment is powered from the EMCO LISN. Power to the LISNs are filtered by a high-current high-insertion loss Ray Proof power line filters (100dB 14kHz-10GHz). The purpose of the filter is to attenuate ambient signal interference and this filter is also bonded to the shielded enclosure. All electrical cables are shielded by braided tinned copper zipper tubing, with an inner diameter of 1/2". If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply lines will be connected to the Solar LISN. LISN schematic diagram is shown in Figure 5. All interconnecting cables more than 1 meter were shortened by non-inductive bundling (serpentine fashion) to a 1-meter length. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer to determine the frequency producing the maximum EME from the EUT. The spectrum was scanned from 450kHz to 30MHz with 20 msec. sweep time. The frequency producing the maximum level was reexamined using EMI/ Field Intensity Meter and Quasi-Peak adapter. The detector function was set to CISPR quasi-peak mode. The bandwidth of the receiver was set to 10 kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each EME emission. Each emission was maximized by: switching power lines; varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and/or support equipment, and powering the monitor from the floor mounted outlet box and the computer aux AC outlet, if applicable; whichever determined the worst-case emission. Photographs of the worst-case emission can be seen in Attachment I. Each EME reported was calibrated using the HP8640B signal generator.

4.1 Description of Tests (continued)

4.3 Radiated Emissions

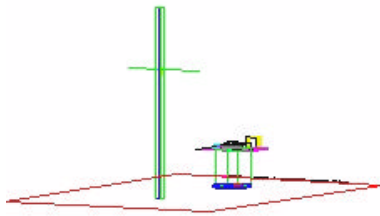


Figure 6. 3-Meter Test Site

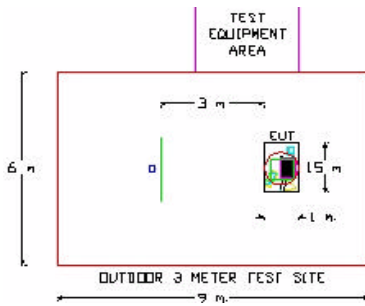


Figure 7. Dimensions of Outdoor Test Site

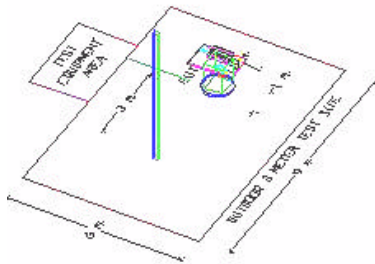


Figure 8. Turntable and System Setup

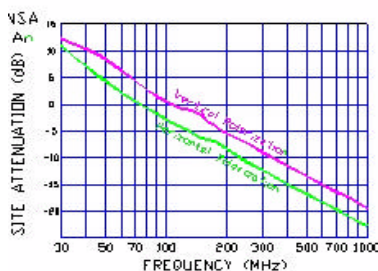


Figure 9. Normalized Site Attenuation Curves (H&V)

Preliminary measurements were made indoors at 1 meter using broadband antennas, broadband amplifier, and spectrum analyzer to determine the frequency producing the maximum EME. Appropriate precaution was taken to ensure that all EME from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, turntable azimuth with respect to the antenna were noted for each frequency found. The spectrum was scanned from 30 to 200 MHz using biconical antenna and from 200 to 1000 MHz using log-spiral antenna. Above 1 GHz, linearly polarized double ridge horn antennas were used.

Final measurements were made outdoors at 3-meter test range using Roberts™ Dipole antennas or horn antenna (see Figure 6). The test equipment was placed on a wooden and plastic bench situated on a 1.5 x 2 meter area adjacent to the measurement area (see Figure 7). Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. Each frequency found during pre-scan measurements was re-examined and investigated using EMI/Field Intensity Meter and Quasi-Peak Adapter. The detector function was set to CISPR quasi-peak mode and the bandwidth of the receiver was set to 100kHz or 1 MHz depending on the frequency or type of signal.

The half-wave dipole antenna was tuned to the frequency found during preliminary radiated measurements. The EUT, support equipment and interconnecting cables were re-configured to the set-up producing the maximum emission for the frequency and were placed on top of a 0.8-meter high non-metallic 1 x 1.5 meter table (see Figure 8). The EUT, support equipment, and interconnecting cables were re-arranged and manipulated to maximize each EME emission. The turntable containing the system was rotated; the antenna height was varied 1 to 4 meters and stopped at the azimuth or height producing the maximum emission. Each emission was maximized by: varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and/or support equipment; powering the monitor from the floor mounted outlet box and the computer aux AC outlet if applicable, and changing the polarity of the antenna; whichever determined the worst-case emission. Photographs of the worst-case emission can be seen in Attachment I. Each EME reported was calibrated using the HP8640B signal generator. The Theoretical Normalized Site Attenuation Curves for both horizontal and vertical polarization are shown in Figure 9 according to ANSI C63.4.

5.1 §15.203 Antenna Requirement

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the applicant can be used with the device. The use of a permanently attached antenna, or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with this requirement.

Base Unit

The Panasonic KX-TC1403 & KX-TC1402 base units comply with the requirement of §15.203. The antenna is a permanently attached Telescopic Omni-directional Antenna.

Handset Unit

The Panasonic KX-TC1403 & KX-TC1402 handset units comply with the requirement of §15.203. The antenna is permanently secured and made of Rubber Omni-directional Antenna.

CONCLUSION

For both units, there are no provisions for connection to an external antenna.
Both Panasonic Base and Handset units meets the Antenna Requirements of §15.203.

5.2 Applied Modulation

The modulation used was the test procedure specified in ANSI C63.4-1992. For audio modulation we used a 1kHz tone at 100dB SPL (Extech Model: 407740 Digital Sound Level Meter), an audio signal generator (Tenma), and a speaker at 10cm away from the microphone (condensor). Various audio tones were also used to simulate the sounds generated by typical use. For video modulation, various intensity of light and focus of objects were used to determine the worst-case modulation. The worst-case modulation that produces the widest bandwidth was used during final testing.

6.1 Support Equipment Used

1. PANASONIC Cordless Phone	FCC ID: ACJ96NKX-TC1403 (EUT)	(Base & Handset) S/N: Pre-production
Sample #1	a) Model: KX-TC1403	
Sample #2	b) Model: KX-TC1402 1.5 m. unshielded Telco cable	
Panasonic AC Power Adapter	Model: PQLV15 1.8 m. unshielded DC power cord	
2. MICRO SEVEN INC. Mini – PBX Simulator	Model: LS-100-4 1.8 m. unshielded AC power cord 1.5 m. unshielded RJ-11 cable	S/N: 7601869

7.1 Frequency Measurements (Fundamental & Harmonics)

A. Transmitter Portion (Base) - #1 Model: KX-TC1403

Operating Frequency: 904 MHz
 Distance of Measurements: 3 meters
 Channel: Low

FREQ. (MHz)	Level (dBm)	AFCL (dB)	POL (H/V)	DET QP/AVG	F/S ($\mu\text{V/m}$)	Margin (dB)
904	- 46.76	32.7	V	PEAK	44360.86	- 1.1
1808	- 100.2	30.9	V	PEAK	76.7362	- 16.3
2712	- 107.69	34.2	V	PEAK	47.3696	- 20.5
3616	- 117.5	37.0	V	PEAK	21.1349	- 27.5
4520	- 119.0	38.9	V	PEAK	22.1310	- 27.1
5424	- 130.0	39.0	V	PEAK	6.30957	- 38.0

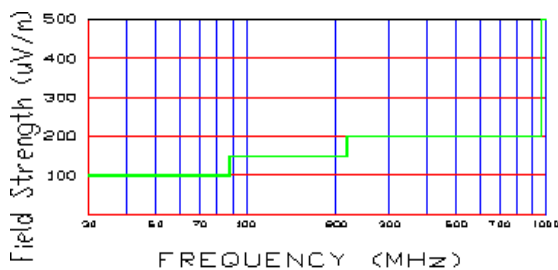


Figure 10. Harmonic Limits at 3 meters

NOTES:

1. The limit at fundamental freq. is 50,000 $\mu\text{V/m}$ @ 3m. using average detector (RBW = 1 MHz VBW = 3Hz).
2. All emissions exceeding 20 $\mu\text{V/m}$ @3m. are reported.
3. All spurious emissions in the restricted bands specified in §15.205 are below the limit shown in Fig. 10.
4. Measurements are made at 20° or between +15° C to +25° C.
5. The antenna is manipulated through typical positions and length during the tests.
6. The emissions are maximized by changing polarity of the antenna.
7. The EUT is supplied with the nominal AC voltage and/or a new/fully recharged battery.
8. All channels were investigated and the worst-case are reported.

7.2 Frequency Measurements (Fundamental & Harmonics)

B. Transmitter Portion (Base) - #1 Model: KX-TC1403

Operating Frequency: 904.9 MHz
 Distance of Measurements: 3 meters
 Channel: High

FREQ. (MHz)	Level (dBm)	AFCL (dB)	POL (H/V)	DET QP/AVG	F/S (μ V/m)	Margin (dB)
904.9	- 47.0	32.7	V	PEAK	43151.91	- 1.3
1809.8	- 99.0	30.9	V	PEAK	88.1049	- 15.1
2714.7	- 104.98	34.2	V	PEAK	64.7143	- 17.8
3619.6	- 117.6	37.0	V	PEAK	20.9894	- 27.6
4524.5	- 119.2	38.9	V	PEAK	21.6272	- 27.3
5429.4	- 130.0	39.0	V	PEAK	6.30957	- 38.0

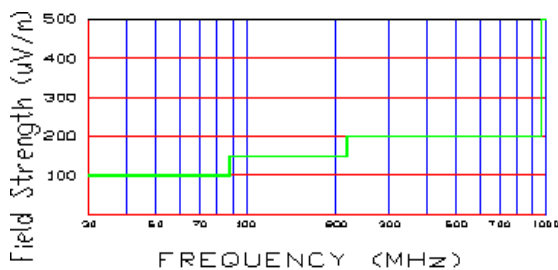


Figure 11. Harmonic Limits at 3 meters

NOTES:

1. The limit at fundamental freq. is 50,000 μ V/m @ 3m. using average detector (RBW = 1 MHz VBW = 3Hz).
2. All emissions exceeding 20 μ V/m @3m. are reported.
3. All spurious emissions in the restricted bands specified in §15.205 are below the limit shown in Fig. 11.
4. Measurements are made at 20° or between +15° C to +25° C.
5. The antenna is manipulated through typical positions and length during the tests.
6. The emissions are maximized by changing polarity of the antenna.
7. The EUT is supplied with the nominal AC voltage and/or a new/fully recharged battery.
8. All channels were investigated and the worst-case are reported.

7.3 Frequency Measurements (Fundamental & Harmonics)

C. Transmitter Portion (Base) - #2 Model: KX-TC1402

Operating Frequency: 904 MHz
 Distance of Measurements: 3 meters
 Channel: Low

FREQ. (MHz)	Level (dBm)	AFCL (dB)	POL (H/V)	DET QP/AVG	F/S (μ V/m)	Margin (dB)
904	- 46.95	32.7	V	PEAK	43401.03	- 1.3
1808	- 100.7	30.9	V	PEAK	72.4436	- 16.8
2712	- 108.0	34.2	V	PEAK	45.7088	- 20.8
3616	- 118.0	37.0	V	PEAK	19.9526	- 28.0
4520	- 119.2	38.9	V	PEAK	21.6272	- 27.3
5424	- 130.0	39.0	V	PEAK	6.30957	- 38.0

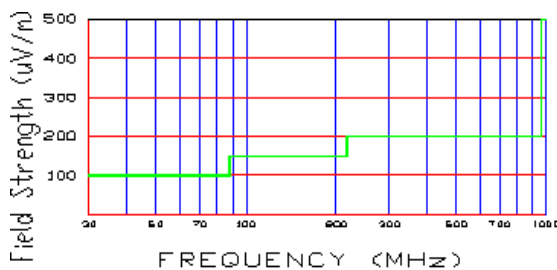


Figure 12. Harmonic Limits at 3 meters

NOTES:

1. The limit at fundamental freq. is 50,000 μ V/m @ 3m. using average detector (RBW = 1 MHz VBW = 3Hz).
2. All emissions exceeding 20 μ V/m @3m. are reported.
3. All spurious emissions in the restricted bands specified in §15.205 are below the limit shown in Fig. 12.
4. Measurements are made at 20° or between +15° C to +25° C.
5. The antenna is manipulated through typical positions and length during the tests.
6. The emissions are maximized by changing polarity of the antenna.
7. The EUT is supplied with the nominal AC voltage and/or a new/fully recharged battery.
8. All channels were investigated and the worst-case are reported.

7.4 Frequency Measurements (Fundamental & Harmonics)

D. Transmitter Portion (Base) - #2 Model: KX-TC1402

Operating Frequency: 904.9 MHz
 Distance of Measurements: 3 meters
 Channel: High

FREQ. (MHz)	Level (dBm)	AFCL (dB)	POL (H/V)	DET QP/AVG	F/S (μ V/m)	Margin (dB)
904.9	- 47.0	32.7	V	PEAK	43151.91	- 1.3
1809.8	- 99.45	30.9	V	PEAK	83.6566	- 15.6
2714.7	- 104.5	34.2	V	PEAK	68.3912	- 17.3
3619.6	- 116.56	37.0	V	PEAK	23.5505	- 26.6
4524.5	- 117.0	38.9	V	PEAK	27.8612	- 25.1
5429.4	- 130.0	39.0	V	PEAK	6.30957	- 38.0

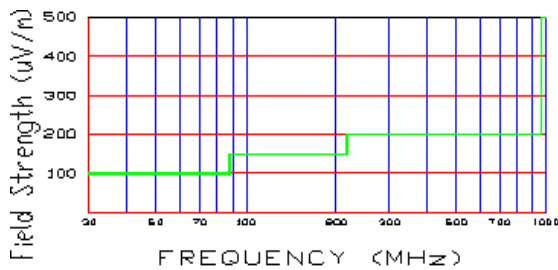


Figure 13. Harmonic Limits at 3 meters

NOTES:

1. The limit at fundamental freq. is 50,000 μ V/m @ 3m. using average detector (RBW = 1 MHz VBW = 3Hz).
2. All emissions exceeding 20 μ V/m @3m. are reported.
3. All spurious emissions in the restricted bands specified in §15.205 are below the limit shown in Fig. 13.
4. Measurements are made at 20° or between +15° C to +25° C.
5. The antenna is manipulated through typical positions and length during the tests.
6. The emissions are maximized by changing polarity of the antenna.
7. The EUT is supplied with the nominal AC voltage and/or a new/fully recharged battery.
8. All channels were investigated and the worst-case are reported.

7.5 Frequency Measurements (Fundamental & Harmonics)

E. Transmitter Portion (Handset) - #1 Model: KX-TC1403

Operating Frequency: 926.62 MHz
 Distance of Measurements: 3 meters
 Channel: Low

FREQ. (MHz)	Level (dBm)	AFCL (dB)	POL (H/V)	DET QP/AVG	F/S (μ V/m)	Margin (dB)
926.62	- 46.78	32.9	V	PEAK	45289.76	- 0.9
1853.24	- 100.9	31.1	V	PEAK	72.4436	- 16.8
2779.86	- 106.78	34.3	V	PEAK	53.2108	- 19.5
3706.48	- 116.5	37.2	V	PEAK	24.2661	- 26.3
4633.10	- 118.89	39.1	V	PEAK	22.9351	- 26.8
5559.72	- 130.0	39.3	V	PEAK	6.53131	- 37.7

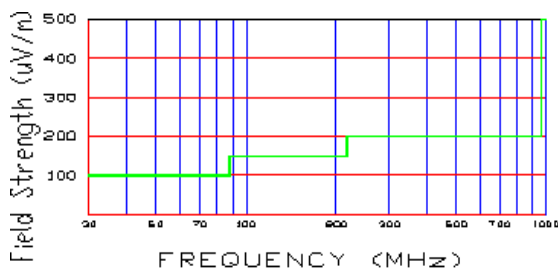


Figure 14. Harmonic Limits at 3 meters

NOTES:

1. The limit at fundamental freq. is 50,000 μ V/m @ 3m. using average detector (RBW = 1 MHz VBW = 3Hz).
2. All emissions exceeding 20 μ V/m @3m. are reported.
3. All spurious emissions in the restricted bands specified in §15.205 are below the limit shown in Fig. 14.
4. Measurements are made at 20° or between +15° C to +25° C.
5. The antenna is manipulated through typical positions and length during the tests.
6. The emissions are maximized by changing polarity of the antenna.
7. The EUT is supplied with the nominal AC voltage and/or a new/fully recharged battery.
8. All channels were investigated and the worst-case are reported.

7.6 Frequency Measurements (Fundamental & Harmonics)

F. Transmitter Portion (Handset) - #2 Model: KX-TC1402

Operating Frequency: 926.62 MHz
 Distance of Measurements: 3 meters
 Channel: Low

FREQ. (MHz)	Level (dBm)	AFCL (dB)	POL (H/V)	DET QP/AVG	F/S ($\mu\text{V}/\text{m}$)	Margin (dB)
926.62	- 46.82	32.9	V	PEAK	45081.67	- 0.9
1853.24	- 101.0	31.1	V	PEAK	71.6143	- 16.9
2779.86	- 106.67	34.3	V	PEAK	53.8890	- 19.4
3706.48	- 116.6	37.2	V	PEAK	23.9883	- 26.4
4633.10	- 118.67	39.1	V	PEAK	23.5234	- 26.6
5559.72	- 130.0	39.3	V	PEAK	6.53131	- 37.7

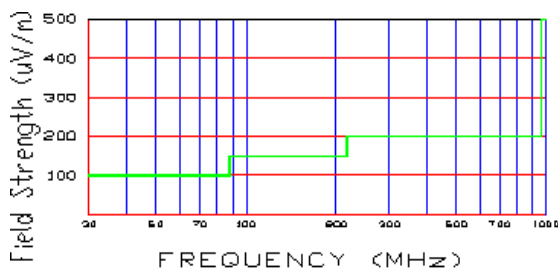


Figure 15. Harmonic Limits at 3 meters

NOTES:

1. The limit at fundamental freq. is 50,000 $\mu\text{V}/\text{m}$ @ 3m. using average detector (RBW = 1 MHz VBW = 3Hz).
2. All emissions exceeding 20 $\mu\text{V}/\text{m}$ @3m. are reported.
3. All spurious emissions in the restricted bands specified in §15.205 are below the limit shown in Fig. 15.
4. Measurements are made at 20° or between +15° C to +25° C.
5. The antenna is manipulated through typical positions and length during the tests.
6. The emissions are maximized by changing polarity of the antenna.
7. The EUT is supplied with the nominal AC voltage and/or a new/fully recharged battery.
8. All channels were investigated and the worst-case are reported.

7.7 Frequency Measurements (Fundamental & Harmonics)

G. Transmitter Portion (Handset) - #1 Model: KX-TC1403

Operating Frequency: 927.5 MHz
 Distance of Measurements: 3 meters
 Channel: High

FREQ. (MHz)	Level (dBm)	AFCL (dB)	POL (H/V)	DET QP/AVG	F/S (μV/m)	Margin (dB)
927.5	- 46.9	32.9	V	PEAK	44668.36	- 1.0
1855.0	- 98.0	31.1	V	PEAK	101.158	- 13.9
2782.5	- 104.3	34.3	V	PEAK	70.7946	- 17.0
3710.0	- 116.67	37.2	V	PEAK	23.7958	- 26.5
4637.5	- 118.0	39.1	V	PEAK	25.4097	- 25.9
5565.0	- 130.0	39.3	V	PEAK	6.53131	- 37.7

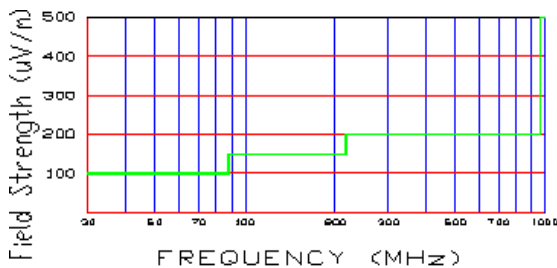


Figure 14. Harmonic Limits at 3 meters

NOTES:

1. The limit at fundamental freq. is 50,000 $\mu\text{V/m}$ @ 3m. using average detector (RBW = 1 MHz VBW = 3Hz).
2. All emissions exceeding 20 $\mu\text{V/m}$ @3m. are reported.
3. All spurious emissions in the restricted bands specified in §15.205 are below the limit shown in Fig. 14.
4. Measurements are made at 20° or between +15° C to +25° C.
5. The antenna is manipulated through typical positions and length during the tests.
6. The emissions are maximized by changing polarity of the antenna.
7. The EUT is supplied with the nominal AC voltage and/or a new/fully recharged battery.
8. All channels were investigated and the worst-case are reported.

7.8 Frequency Measurements (Fundamental & Harmonics)

H. Transmitter Portion (Handset) - #2 Model: KX-TC1402

Operating Frequency: 927.5 MHz
 Distance of Measurements: 3 meters
 Channel: High

FREQ. (MHz)	Level (dBm)	AFCL (dB)	POL (H/V)	DET QP/AVG	F/S (μ V/m)	Margin (dB)
927.5	- 46.9	32.9	V	PEAK	44668.36	- 1.0
1855.0	- 98.9	31.1	V	PEAK	91.2011	- 14.8
2782.5	- 103.33	34.3	V	PEAK	79.1590	- 16.0
3710.0	- 115.33	37.2	V	PEAK	27.7652	- 25.1
4637.5	- 117.1	39.1	V	PEAK	28.1838	- 25.0
5565.0	- 130.0	39.3	V	PEAK	6.53131	- 37.7

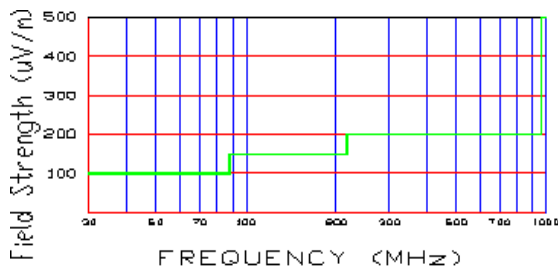


Figure 15. Harmonic Limits at 3 meters

NOTES:

1. The limit at fundamental freq. is 50,000 μ V/m @ 3m. using average detector (RBW = 1 MHz VBW = 3Hz).
2. All emissions exceeding 20 μ V/m @3m. are reported.
3. All spurious emissions in the restricted bands specified in §15.205 are below the limit shown in Fig. 15.
4. Measurements are made at 20° or between +15° C to +25° C.
5. The antenna is manipulated through typical positions and length during the tests.
6. The emissions are maximized by changing polarity of the antenna.
7. The EUT is supplied with the nominal AC voltage and/or a new/fully recharged battery.
8. All channels were investigated and the worst-case are reported.

8.1 Frequency Measurements (Fundamental & Spurious)


A. #1 Model: KX-TC1403

Operating Frequencies: 902 – 928 MHz

Distance of Measurements: 3 meters

FREQ (MHz)	Level* (dBm)	AFCL** (dB)	POL (H/V)	Height (m)	Azimuth (° angle)	F/S (mV/m)	MARGIN*** (dB)
102.7	- 83.62	9.87	V	1.9	50	46.02	- 10.25
343.63	- 92.75	22.08	H	1.6	70	65.59	- 9.67
362.7	- 96.10	22.66	H	1.5	90	47.64	- 12.45
400.9	- 96.22	23.72	V	1.4	180	53.14	- 11.50
420.0	- 97.28	24.18	V	1.3	210	49.60	- 12.10
673.5	- 100.38	29.44	V	1.2	190	63.51	- 9.95

Radiated Measurements at 3-meters.

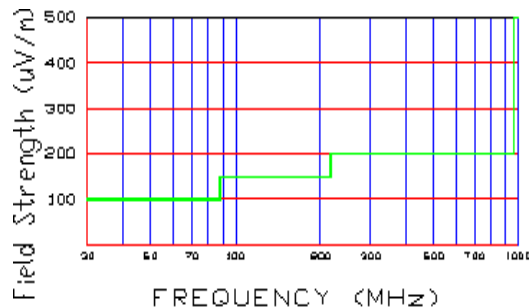

NOTES:

1. All channels were investigated and the worst-case are reported.
2. The antenna is fully extended during the tests and the emissions are maximized by changing polarity of the antenna.
3. The EUT is supplied with the nominal AC voltage and/or a new/fully-charged battery.
4. The radiated limits are shown in Fig. 16.
5. Peak readings were taken with the resolution bandwidth and video bandwidth set at 1MHz.

Figure 16. Spurious Radiated Limits at 3 meters

* All readings are calibrated by HP8640B signal generator with accuracy traceable to the National Institute of Standards and Technology (formerly NBS).

** AFCL = Antenna Factor (Roberts dipole) and Cable Loss (30 ft. RG58C/U).

*** Measurements using CISPR quasi-peak mode.

8.2 Frequency Measurements (Fundamental & Spurious)


B. #2 Model: KX-TC1402

Operating Frequencies: 902 – 928 MHz

Distance of Measurements: 3 meters

FREQ (MHz)	Level* (dBm)	AFCL** (dB)	POL (H/V)	Height (m)	Azimuth (° angle)	F/S (mV/m)	MARGIN*** (dB)
200.44	- 88.97	16.52	V	1.9	110	53.44	- 8.95
343.63	- 93.08	22.08	H	1.6	170	63.15	- 10.0
391.35	- 94.12	23.46	H	1.5	90	65.59	- 9.67
400.9	- 95.72	23.72	V	1.4	180	56.28	- 11.0
420.0	- 97.63	24.18	V	1.3	200	47.64	- 12.45
673.5	- 99.43	29.44	V	1.2	190	70.84	- 9.0

Radiated Measurements at 3-meters.

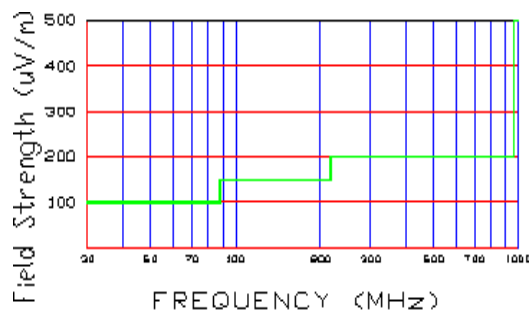

NOTES:

1. All channels were investigated and the worst-case are reported.
2. The antenna is fully extended during the tests and the emissions are maximized by changing polarity of the antenna.
3. The EUT is supplied with the nominal AC voltage and/or a new/fully-charged battery.
4. The radiated limits are shown in Fig. 17.
5. Peak readings were taken with the resolution bandwidth and video bandwidth set at 1MHz.

Figure 17. Spurious Radiated Limits at 3 meters

* All readings are calibrated by HP8640B signal generator with accuracy traceable to the National Institute of Standards and Technology (formerly NBS).

** AFCL = Antenna Factor (Roberts dipole) and Cable Loss (30 ft. RG58C/U).

*** Measurements using CISPR quasi-peak mode.

9.1 Line-Conducted Test Data

9.2 Conducted Emissions

(See Data under PLOTS – Attachment D)

NOTES:

1. All frequencies, channels, & modes of operation were investigated and the worst-case emissions are reported.
2. The limit for Class B device is 250mV from 450kHz to 30MHz.
3. Line A = Phase; Line B = Neutral
4. Deviations to the Specifications: None

10.1 Sample Calculations

$$\text{dBmV} = 20 \log_{10} (\text{mV/m})$$
$$\text{dBmV} = \text{dBm} + 107$$

10.2 Example 1:

@ 20.3 MHz

Class B limit	=	250 μV	=	47.96 dB μV
Reading	=	- 67.8 dBm (calibrated level)		
Convert to dB μV	=	- 67.8 + 107	=	39.2 dB μV
$10^{(39.2/20)}$	=	91.2 μV		
Margin	=	39.2 - 47.96	=	- 8.76
	=	8.8 dB below limit		

10.3 Example 2:

@ 66.7 MHz

Class B limit	=	100 $\mu\text{V/m}$	=	47.96 dB $\mu\text{V/m}$
Reading	=	- 76.0 dBm (calibrated level)		
Convert to dB $\mu\text{V/m}$	=	- 76.0 + 107	=	31.0 dB $\mu\text{V/m}$
Antenna Factor + Cable Loss	=	5.8 dB		
Total	=	36.8 dB $\mu\text{V/m}$		
Margin	=	36.8 - 40.0	=	- 3.2
	=	3.2 dB below limit		

11.1 Accuracy of Measurement

11.2 Measurement Uncertainty Calculations:

The measurement uncertainties stated were calculated in accordance with the requirements of NIST Technical Note 1297 and NIS 81 (1994).

Contribution (Line Conducted)	Probability Distribution	Uncertainty (\pm dB)	
		9kHz-150MHz	150-30MHz
Receiver specification	Rectangular	1.5	1.5
LISN coupling specification	Rectangular	1.5	1.5
Cable and input attenuator calibration	Normal (k=2)	0.3	0.5
Mismatch: Receiver VRC $\Gamma_1 = 0.03$ LISN VRC $\Gamma_R = 0.8$ (9kHz) 0.2 (30MHz) Uncertainty limits $20\text{Log}(1 \pm \Gamma_1 \Gamma_R)$	U-Shaped	0.2	0.35
System repeatability	Std. deviation	0.2	0.05
Repeatability of EUT		-	-
Combined standard uncertainty	Normal	1.26	1.30
Expanded uncertainty	Normal (k=2)	2.5	2.6

Calculations for 150kHz to 30MHz:

$$u_c(y) = \sqrt{\sum_{i=1}^m u_i^2(y)} = \pm \sqrt{\frac{1.5^2 + 1.5^2}{3} + \left(\frac{0.5}{2}\right)^2 + 0.35} = \pm 1.298\text{dB}$$

$$U = 2U_c(y) = \pm 2.6\text{dB}$$

Contribution (Radiated Emissions)	Probability Distribution	Uncertainties (\pm dB)	
		3 m	10 m
Ambient Signals		-	-
Antenna factor calibration	Normal (k=2)	± 1.0	± 1.0
Cable loss calibration	Normal (k=2)	± 0.5	± 0.5
Receiver specification	Rectangular	± 1.5	± 1.5
Antenna directivity	Rectangular	+ 0.5 / - 0	+ 0.5
Antenna factor variation with height	Rectangular	± 2.0	± 0.5
Antenna phase centre variation	Rectangular	0.0	± 0.2
Antenna factor frequency interpolation	Rectangular	± 0.25	± 0.25
Measurement distance variation	Rectangular	± 0.6	± 0.4
Site imperfections	Rectangular	± 2.0	± 2.0
Mismatch: Receiver VRC $\Gamma_1 = 0.2$ Antenna VRC $\Gamma_R = 0.67$ (Bi) 0.3 (Lp) Uncertainty limits $20\text{Log}(1 \pm \Gamma_1 \Gamma_R)$	U-Shaped	+ 1.1 - 1.25	± 0.5
System repeatability	Std. Deviation	± 0.5	± 0.5
Repeatability of EUT		-	-
Combined standard uncertainty	Normal	+ 2.19 / - 2.21	+ 1.74 / - 1.72
Expanded uncertainty U	Normal (k=2)	+ 4.38 / - 4.42	+ 3.48 / - 3.44

Calculations for 3m biconical antenna. Coverage factor of k=2 will ensure that the level of confidence will be approximately 95%, therefore:

$$U=2u_c(y) = 2 \times \pm 2.19 = \pm 4.38\text{dB}$$

12.1 Test Equipment

Type	Model	Cal. Due Date	S/N
Microwave Spectrum Analyzer	HP 8566B (100Hz-22GHz)	12/05/01	3638A08713
Microwave Spectrum Analyzer	HP 8566B (100Hz-22GHz)	04/17/01	2542A11898
Spectrum Analyzer/Tracking Gen.	HP 8591A (9kHz-1.8GHz)	06/02/01	3144A02458
Spectrum Analyzer	HP 8591A (9kHz-1.8GHz)	10/15/01	3108A02053
Spectrum Analyzer	HP 8594A (9kHz-2.9GHz)	11/02/01	3051A00187
Signal Generator*	HP 8640B (500Hz-1GHz)	06/02/01	2232A19558
Signal Generator*	HP 8640B (500Hz-1GHz)	06/02/01	1851A09816
Signal Generator*	Rohde & Schwarz (0.1-1000MHz)	09/11/01	894215/012
Ailtech/Eaton Receiver	NM 37/57A-SL (30-1000MHz)	04/12/01	0792-03271
Ailtech/Eaton Receiver	NM 37/57A (30-1000MHz)	03/11/01	0805-03334
Ailtech/Eaton Receiver	NM17/27A (0.1-32MHz)	09/17/01	0608-03241
Quasi-Peak Adapter	HP 85650A	08/09/01	2043A00301
Ailtech/Eaton Adapter	CCA-7 CISPR/ANSI QP Adapter	03/11/01	0194-04082
RG58 Coax Test Cable	No. 167		n/a
Harmonic/Flicker Test System	HP 6841A (IEC 555-2/3)		3531A00115
Broadband Amplifier (2)	HP 8447D		1145A00470, 1937A03348
Broadband Amplifier	HP 8447F		2443A03784
Transient Limiter	HP 11947A (9kHz-200MHz)		2820A00300
Horn Antenna	EMCO Model 3115 (1-18GHz)		9704-5182
Horn Antenna	EMCO Model 3115 (1-18GHz)		9205-3874
Horn Antenna	EMCO Model 3116 (18-40GHz)		9203-2178
Biconical Antenna (4)	Eaton 94455/Eaton 94455-1/Singer 94455-1/Compliance Design		1295, 1332, 0355
Log-Spiral Antenna (3)	Ailtech/Eaton 93490-1		0608, 1103, 1104
Roberts Dipoles	Compliance Design (1 set) A100		5118
Ailtech Dipoles	DM-105A (1 set)		33448-111
EMCO LISN (2)	3816/2		1077, 1079
EMCO LISN	3725/2		2009
Microwave Preamplifier 40dB Gain	HP 83017A (0.5-26.5GHz)		3123A00181
Microwave Cables	MicroCoax (1.0-26.5GHz)		
Ailtech/Eaton Receiver	NM37/57A-SL		0792-03271
Spectrum Analyzer	HP 8591A		3034A01395
Modulation Analyzer	HP 8901A		2432A03467
NTSC Pattern Generator	Leader 408		0377433
Noise Figure Meter	HP 8970B		3106A02189
Noise Figure Meter	Ailtech 7510		TE31700
Noise Generator	Ailtech 7010		1473
Microwave Survey Meter	Holaday Model 1501 (2.450GHz)		80931
Digital Thermometer	Extech Instruments 421305		426966
Attenuator	HP 8495A (0-70dB) DC-4GHz		
Bi-Directional Coax Coupler	Narda 3020A (50-1000MHz)		
Shielded Screen Room	RF Lindgren Model 26-2/2-0		6710 (PCT270)
Shielded Semi-Anechoic Chamber	Ray Proof Model S81		R2437 (PCT278)
Environmental Chamber	Associated Systems Model 1025 (Temperature/Humidity)		PCT285

* Calibration traceable to the National Institute of Standards and Technology (NIST).

13.1 Conclusion

The data collected shows that the **MATSUSHITA ELECTRIC INDUSTRIAL CO., LTD. *Panasonic 900MHz Cordless Phone Models: KX-TC1403/KX-TC1402*** (FCC ID: ACJ96NKX-TC1403) complies with Part 15 Subpart C of the FCC Rules.

No modifications were made to the device.