


# PCTEST Engineering Laboratory, Inc.

6660-B Dobbin Road • Columbia, MD 21045 • U.S.A.

TEL (410) 290-6652 • FAX (410) 290-6654

<http://www.pctestlab.com>



## CERTIFICATE OF COMPLIANCE

Matshushita Electric Industrial Co., Ltd.  
1006 Oaza Kadoma  
Kadoma, Osaka 571 Japan  
Attention: Rich Mullen (PSCD)  
N. Yoshizumi-Kyushu MEICL

Dates of Tests: May 14-17, 2001  
Test Report S/N: 15.210511300.ACJ  
Test Site: PCTEST Lab, Columbia MD

FCC ID

**ACJ96NKX-TG2481**

APPLICANT

**Matshushita Electric Industrial Co., Ltd.**

FCC Rule Part(s):	§ 15.247; ANSI C-63.4 (1992)
Classification:	Spread Spectrum Transceiver (DSS)
Max Output Power:	Base - 0.103 W / Handset – 0.063 W EIRP
Method/System:	Direct Sequence System (DSS)
Equipment Type:	Cordless Telephone (Base/Handset)
Frequency Range:	2401.5 – 2470.5 MHz (Base/Handset)
Model No(s):	KX-TG2481

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C-63-4.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

*PCTEST certifies that no party to this application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 862.*

  
Randy Ortanez  
President & Chief Engineer




**NVLAP**<sup>®</sup>  
LAB CODE 100431-0

## TABLE OF CONTENTS


---

<b>SCOPE</b>	<b>1</b>
<b>INTRODUCTION (SITE DESCRIPTION)</b>	<b>2</b>
<b>PRODUCT INFORMATION</b>	<b>3</b>
<b>DESCRIPTION OF TESTS</b>	
<b>A.    CONDUCTED EMISSIONS</b>	<b>4</b>
<b>B.    RADIATED EMISSIONS</b>	<b>5</b>
<b>C.    RESTRICTED BANDS</b>	<b>6</b>
<b>D.    ANTENNA REQUIREMENT</b>	<b>7</b>
<b>E.    DIRECT SEQUENCE BANDWIDTH</b>	<b>8</b>
<b>F.    MAXIMUM PEAK POWER OUTPUT</b>	<b>9</b>
<b>G.    POWER DENSITY</b>	<b>10</b>
<b>RADIATED MEASUREMENTS (FUNDAMENTAL &amp; HARMONICS)</b>	<b>11-16</b>
<b>FREQUENCY MEASUREMENTS (SPURIOUS)</b>	<b>17</b>
<b>PROCESSING GAIN</b>	<b>18-22</b>
<b>LIST OF TEST EQUIPMENT</b>	<b>23</b>
<b>CONCLUSION</b>	<b>24</b>
<b>APPENDIX A -    LABELLING REQUIREMENTS</b>	<b>25-26</b>
<b>APPENDIX B -    PLOTS OF EMISSIONS</b>	<b>27</b>
<b>APPENDIX C -    PHOTOGRAPHS OF TEST SET-UP</b>	<b>28</b>
<b>APPENDIX D -    EUT PHOTOGRAPHS</b>	<b>29</b>
<b>APPENDIX E -    USER'S MANUAL</b>	<b>30</b>
<b>APPENDIX F -    SAR MEASUREMENT REPORT</b>	<b>31</b>
<b>APPENDIX G -    SAR TEST DATA</b>	<b>32</b>
<b>APPENDIX H -    SAR TEST SETUP PHOTOGRAPHS</b>	<b>33</b>

# MEASUREMENT REPORT

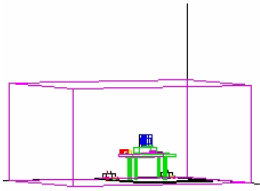

*Scope - Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission.*

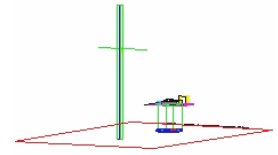

## §2983(a) General Information

<b>Applicant Name:</b>	<b>Matsushita Electric Industrial Co., Ltd.</b>
<b>Address:</b>	<b>1006 Oaza Kadoma Kadoma, Osaka 571 JAPAN</b>
<b>Attention:</b>	<b>Rich Mullen (PSCD)</b>

- FCC ID: **ACJ96NKX-TG2481**
- Class: Spread Spectrum Transceiver (DSS)
- Type: Cordless Telephone (Base/Handset)
- Freq. Range: 2401.5 – 2470.5 MHz
- Method/System: Direct Sequence System (DSS)
- Model No(s): **KX-TG2481**
- Max. RF Output Power: Base (0.103 W) / Handset (0.063 W)
- Power Supply: AC Adapter PQLV10 - Base  
3.6 VDC 850mAh Ni-Cd - Handset
- Cable(s): Telco
- USOC Jack: RJ-11
- Rule Part(s): § 15.247
- Dates of Tests: May 14-17, 2001
- Place of Tests: PCTEST Lab, Columbia, MD U.S.A.
- Test Report S/N: 210511300.ACJ

*NOTE: The receiver portion was tested and complies with Part 15B under the verification procedure.*

## INTRODUCTION

The measurement procedure described in American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz (ANSI C63.4-1992) and FCC Public Notice dated July 12, 1995 entitled "Guidance on Measurement for Direct Sequence Spread Spectrum Systems" were used in the measurement of the **Panasonic Spread Spectrum** cordless telephone.

These measurement tests were conducted at **PCTEST Engineering Laboratory, Inc.** facility in New Concept Business Park, Guilford Industrial Park, Columbia, Maryland. The site address is 6660-B Dobbin Road, Columbia, MD 21045. The test site is one of the highest points in the Columbia area with an elevation of 390 feet above mean sea level. The site coordinates are 39° 11'15" N latitude and 76° 49'38" W longitude. The facility is 1.5 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. There are no FM or TV transmitters within 15 miles of the site. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4 on October 19, 1992.

### PCTEST Location

The map at right shows the location of the PCTEST Lab, its proximity to the FCC Lab, the Columbia vicinity area, the Baltimore-Washington International (BWI) airport, and the city of Baltimore, and the Washington, D.C. area. (see Figure1).

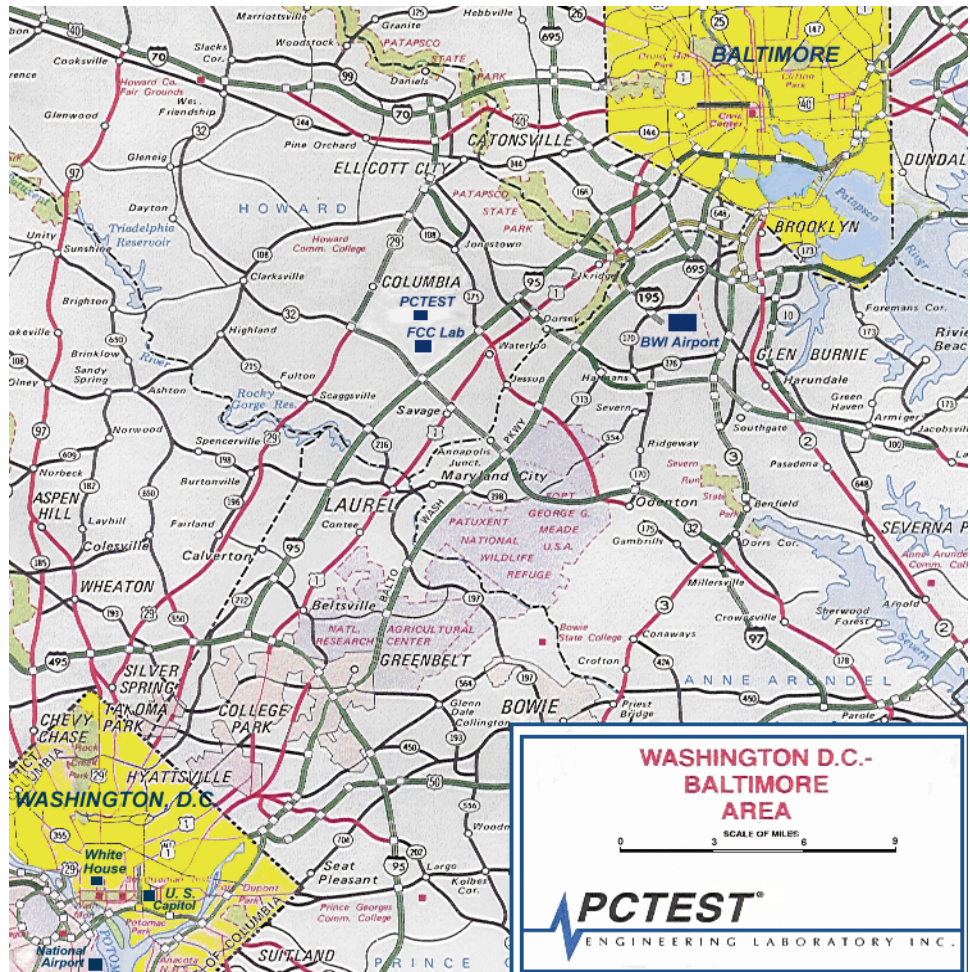


Figure 1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area.

## PRODUCT INFORMATION

---

### Equipment Description:

The Equipment under test (EUT) is the **Panasonic** cordless telephone using spread spectrum direct sequence and time division duplex techniques.

Frequency Range: 2401.5 – 2470.5 MHz  
Channels: 24 (Base/handset)  
Channel Separation: 3.0 MHz  
Spread Spectrum Method: Direct Sequence (DBPSK modulation)  
Max RF Output Power: Base (0.103 W) / Handset (0.063 W)  
Antenna: Omni-directional (base/handset)  
Battery: Ni-Cd 3.6VDC 850mAh  
Port/Connector(s): RJ-11C (base)

CH	Rx/Tx Freq. (MHz)	CH	Rx/Tx Freq. (MHz)	CH	Rx/Tx Freq. (MHz)
1	2401.5	9	2425.5	17	2449.5
2	2404.5	10	2428.5	18	2452.5
3	2407.5	11	2431.5	19	2455.5
4	2410.5	12	2434.5	20	2458.5
5	2413.5	13	2437.5	21	2461.5
6	2416.5	14	2440.5	22	2464.5
7	2419.5	15	2443.5	23	2467.5
8	2422.5	16	2446.5	24	2470.5

## Description of Tests

### Conducted Emissions (Base Unit)

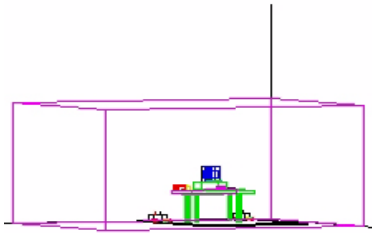


Figure 4. Shielded Enclosure Line-Conducted Test Facility

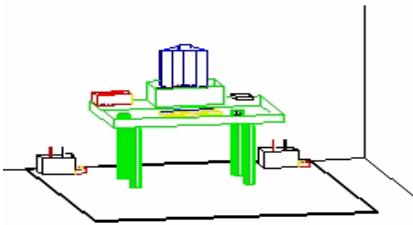


Figure 2. Line Conducted Emission Test Set-Up

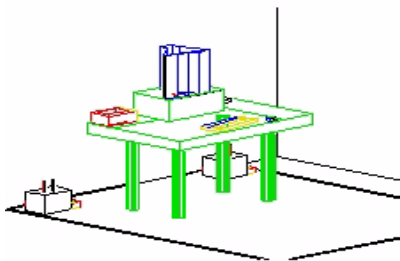


Figure 3. Wooden Table & Bonded LISNs

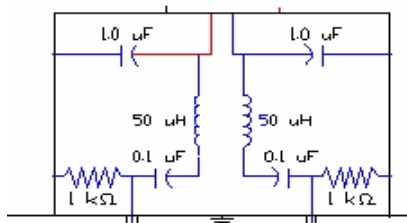


Figure 5. LISN Schematic Diagram

The line-conducted facility is located inside a 16'x20'x10' shielded enclosure. It is manufactured by Ray Proof Series 81 (see Figure 2). The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-6. A 1m. x 1.5m. wooden table 80cm. high is placed 40cm. away from the vertical wall and 1.5m away from the side wall of the shielded room (see Figure 3). Solar Electronics and EMCO Model 3725/2 (10kHz-30MHz) 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room (see Figure 4). The EUT is powered from the Solar LISN and the support equipment is powered from the EMCO LISN. Power to the LISNs are filtered by a high-current high-insertion loss Ray Proof power line filters (100dB 14kHz-10GHz). The purpose of the filter is to attenuate ambient signal interference and this filter is also bonded to the shielded enclosure. All electrical cables are shielded by braided tinned copper zipper tubing with inner diameter of 1/2". If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply lines will be connected to the Solar LISN. LISN schematic diagram is shown in Figure 5. All interconnecting cables more than 1 meter were shortened by non-inductive bundling (serpentine fashion) to a 1-meter length. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer to determine the frequency producing the maximum EME from the EUT. The spectrum was scanned from 450kHz to 30MHz with 20 msec. sweep time. The frequency producing the maximum level was reexamined using EMI/ Field Intensity Meter and Quasi-Peak adapter. The detector function was set to CISPR quasi-peak mode. The bandwidth of the receiver was set to 10 kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each EME emission. Each emission was maximized by: switching power lines; varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and/or support equipment, and powering the monitor from the floor mounted outlet box and the computer aux AC outlet, if applicable; whichever determined the worst-case emission. Photographs of the worst-case emission can be seen in Appendix C. Each EME reported was calibrated using the HP8640B signal generator.

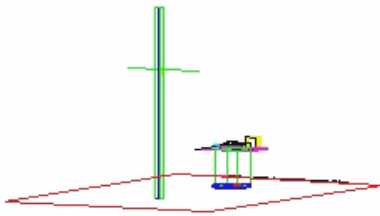


Figure 6. 3-Meter Test Site

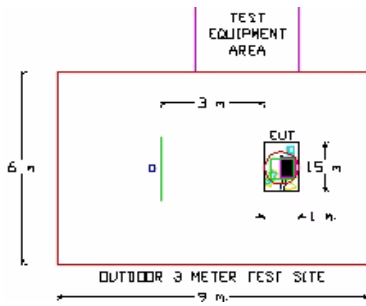


Figure 7. Dimensions of Outdoor Test Site

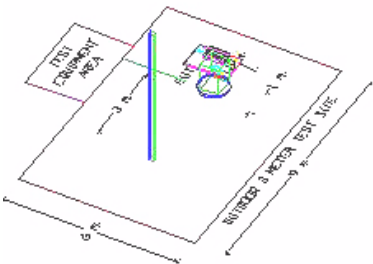


Figure 8. Turntable and System Setup

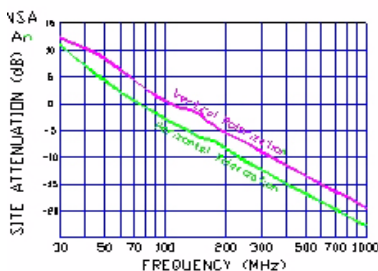


Figure 9. Normalized Site Attenuation Curves (H&V)

## Description of tests (Continued)

### Radiated Emissions (Base & Handset)

Preliminary measurements were made indoors at 1 meter using broadband antennas, broadband amplifier, and spectrum analyzer to determine the frequency producing the maximum EME. Appropriate precaution was taken to ensure that all EME from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, turntable azimuth with respect to the antenna were noted for each frequency found. The spectrum was scanned from 30 to 200 MHz using biconical antenna and from 200 to 1000 MHz using log-spiral antenna. Above 1 GHz, linearly polarized double ridge horn antennas were used.

Final measurements were made outdoors at 3-meter test range using Roberts™ Dipole antennas or horn antenna (see Figure 6). The test equipment was placed on a wooden and plastic bench situated on a 1.5 x 2 meter area adjacent to the measurement area (see Figure 7). Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. Each frequency found during pre-scan measurements was re-examined and investigated using EMI/Field Intensity Meter and Quasi-Peak Adapter. The detector function was set to CISPR quasi-peak mode and the bandwidth of the receiver was set to 100kHz or 1 MHz depending on the frequency or type of signal.

The half-wave dipole antenna was tuned to the frequency found during preliminary radiated measurements. The EUT, support equipment and interconnecting cables were re-configured to the set-up producing the maximum emission for the frequency and were placed on top of a 0.8-meter high non-metallic 1 x 1.5 meter table (see Figure 8). The EUT, support equipment, and interconnecting cables were re-arranged and manipulated to maximize each EME emission. The turntable containing the system was rotated; the antenna height was varied 1 to 4 meters and stopped at the azimuth or height producing the maximum emission. Each emission was maximized by: varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and/or support equipment, and powering the monitor from the floor mounted outlet box and the computer aux AC outlet, if applicable; and changing the polarity of the antenna, whichever determined the worst-case emission. Photographs of the worst-case emission can be seen in Appendix C. Each EME reported was calibrated using the HP8640B signal generator. The Theoretical Normalized Site Attenuation Curves for both horizontal and vertical polarization are shown in Figure 9.

## § 15.205 Restricted Bands

Special attention is made for the EUT's harmonic and spurious radiated emission in the restricted bands of operation. The EUT was tested from 9kHz and up to the tenth harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average measurements were used using RBW 1 MHz – VBW 10Hz and linearly polarized horn antennas. In addition, peak measurements were taken to ensure that the peak levels are not more than 20dB above the average limit. All out of band emissions, other than those created by the spreading sequence, data sequence, and the carrier modulation must not exceed the limits shown in Table 2 per 15.209.

Frequency (MHz)	F/S (UV/m)	Meas. Dist. (Meters)
0.009-0.490	2400/F (kHz)	300
0.490-1.705	24000/F (kHz)	30
1.705-30.00	30	30
30.0-88.0	100	3
88.0-216.0	150	3
216.0-960.0	200	3
Above 960	500	3

Tab. 2. Radiated Emission Limits Per 15.209

### Test Equipment

HP 8566B	Spectrum Analyzer 100Hz-22HGhz
HP83017A	Microwave Analyzer 40dB Gain (0.5 – 26.5 GHz)
HP 3784A	Digital Transmission Analyzer
EMCO 3115	Horn Antenna (1 – 18GHz)
HP 8495A	20dB Attenuator (DC-40GHz) 0-70dB
HP 8493B	10dB Attenuator
MicroCoax Cables	Low Loss Microwave Cables (1-26.5 GHz)
CDI Dipoles	Dipole Antennas (30 – 1000 MHz)

## § 15.203 Antenna Requirement

---

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the applicant can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with this requirement.

### Base Unit

The Panasonic **KX-TG2481** base unit complies with the requirement of §15.203. The antenna is a **permanently attached omni-directional antenna**.

### Handset Unit

The Panasonic **KX-TG2481** handset unit complies with the requirement of §15.203.

### CONCLUSION

For both units, there are no provisions for connection to an external antenna. Both Base and Handset units meet the Antenna Requirements of §15.203.

## §15.247(a)(2) – Direct Sequence Bandwidth

Minimum Standard – 6dB bandwidth for direct sequence systems must be at least 500Hz (0.5 MHz).

Res. Bandwidth = 100 kHz (5dB/div)  
Vid. BW = 100 kHz  
Span = 5 MHz  
Ref. Level - 30 dBm  
Sweep 10ms  
Attenuator 0 dB ext. pad  
**6dB Bandwidth –Mkr Delta (6dB down from peak)**  
(see attached spectrum plots)

FREQ (MHz)	Base/Handset (B/H)	Channel	6dB Bandwidth (MHz)
2401.5	B	1	1.904
2434.5	B	12	2.019
2470.5	B	24	2.124
2401.5	H	1	1.713
2434.5	H	12	1.748
2470.5	H	24	1.879

Table 3. 6dB Bandwidth measurements

**REMARKS:**

**PASS**

## §15.247(b) Maximum Peak Output Power

Minimum Standard – The maximum peak output power of the transmitter shall not exceed 1 watt.

Res. Bandwidth = 3 MHz (10dB/div)  
Vid. BW = 3 MHz  
Span = 10 MHz  
Ref. Level -20 dBm  
Sweep 5 ms sec  
Attenuator 0 dB ext. pad

Max. Power Peak + Atten = dBm  $\Rightarrow$  Watts

FREQ (MHz)	Base/Handset (B/H)	Channel	Power Output (dBm)	Power Output (mW)
2401.5	B	1	20.081	101.889
2434.5	B	12	20.111	102.594
2470.5	B	24	19.551	90.182
2401.5	H	1	17.241	52.981
2434.5	H	12	17.831	60.691
2470.5	H	24	17.961	62.535

Table 4. Output Power Measurements

REMARKS:

PASS

## §15.247(c) Power Density

---

Minimum Standard – The transmitted power density averaged over any 1 second interval shall not be greater than 8dBm in any 3kHz bandwidth within these bands.

Res. Bandwidth = 3 kHz (10dB/div)  
Vid. BW = 3 kHz  
Span = 300 kHz (3.0 MHz)  
Ref. Level - 20 dBm  
Sweep 1000 sec

Peak + Atten = dBm  $\Rightarrow$  (Limit < 8dBm)

FREQ (MHz)	Base/Handset (B/H)	Channel	Power Density (dBm)
2406.16	B	1	5.28
2441.52	B	12	4.59
2477.84	B	24	4.12
2406.16	H	1	1.31
2441.52	H	12	4.05
2477.84	H	24	2.78

Table 5. Output Power Density Data.

**REMARKS:**

**PASS**

## RADIATED Measurements (Fundamental & Harmonics)

### A. Transmitter Portion (Base)

Operating Frequency: 2401.5 MHz  
 Distance of Measurements: 3 meters  
 Channel: 1

FREQ. (MHz)	Level* (dBm)	AFCL (dB)	POL (H/V)	DET QP/AVG	F/S ( $\mu\text{V}/\text{m}$ )	F/S ( $\text{dB}\mu\text{V}/\text{m}$ )	Margin (dB)
2401.5	- 24.4	32.7	V	Peak	582773.8	115.3	n/a
4803.0	- 102.0	40.4	V	Peak	185.995	45.4	8.6
7204.5	- 119.0	47.4	V	Peak	59.020	35.4	18.6
9606.0	< - 120						

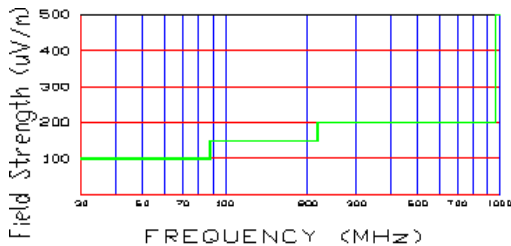


Figure 10. Restricted band harmonics and spurious limits.

Above 1 GHz limit is 500  $\mu\text{V}/\text{m}$  (54 $\text{dBu}/\text{m}$ )

#### NOTES:

- All harmonics in the restricted bands specified in §15.205 are below the limit shown in table 2. (note: \* Restricted Band)
- All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
- Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
- The peak emissions above 1 GHz are not more than 20 dB above the average limit.
- The antenna is manipulated through typical positions, polarity and length during the tests.
- The EUT is supplied with nominal AC voltage or/and a new/fully recharged battery.
- The spectrum is measured from 9kHz to the 10<sup>th</sup> harmonic and the worst-case emissions are reported.
- < - 120 are below the analyzer floor level.

## RADIATED Measurements (Fundamental & Harmonics) (CONT.)

### B. Transmitter Portion (Base)

Operating Frequency: 2434.5 MHz  
 Distance of Measurements: 3 meters  
 Channel: 12

FREQ. (MHz)	Level* (dBm)	AFCL (dB)	POL (H/V)	DET QP/AVG	F/S ( $\mu$ V/m)	F/S (dB $\mu$ V/m)	Margin (dB)
2434.5	- 24.5	32.8	V	Peak	584790.1	115.3	n/a
4869.0	- 101.5	40.5	V	Peak	199.526	46.0	8.0
7303.5	- 118.5	48.0	V	Peak	66.834	36.5	17.5
9738.0	< - 120						

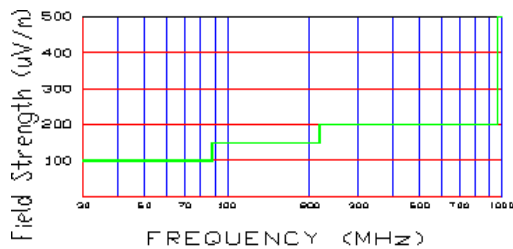


Figure 11. Restricted band harmonics and spurious limits.

Above 1 GHz limit is 500 uV/m (54dBu/m)

#### NOTES:

- All harmonics in the restricted bands specified in §15.205 are below the limit shown in table 2. (note: \* Restricted Band)
- All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
- Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
- The peak emissions above 1 GHz are not more than 20 dB above the average limit.
- The antenna is manipulated through typical positions, polarity and length during the tests.
- The EUT is supplied with nominal AC voltage or/and a new/fully recharged battery.
- The spectrum is measured from 9kHz to the 10<sup>th</sup> harmonic and the worst-case emissions are reported.
- < - 120 are below the analyzer floor level.

## RADIATED Measurements (Fundamental & Harmonics) (CONT.)

### C. Transmitter Portion (Base)

Operating Frequency: 2470.5 MHz  
 Distance of Measurements: 3 meters  
 Channel: 24

FREQ. (MHz)	Level* (dBm)	AFCL (dB)	POL (H/V)	DET QP/AVG	F/S ( $\mu$ V/m)	F/S (dB $\mu$ V/m)	Margin (dB)
2470.5	- 25.1	32.9	V	Peak	548277.0	114.8	n/a
4941.0	- 101.0	40.7	V	Peak	216.272	46.7	7.3
7411.5	- 120.0	48.2	V	Peak	57.544	35.2	18.8
9882.0	< - 120						

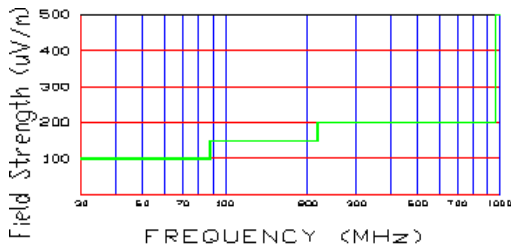


Figure 12. Restricted band harmonics and spurious limits.

Above 1 GHz limit is 500 uV/m (54dBu/m)

#### NOTES:

1. All harmonics in the restricted bands specified in §15.205 are below the limit shown in table 2. (note: \* Restricted Band)
2. All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
3. Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
4. The peak emissions above 1 GHz are not more than 20 dB above the average limit.
5. The antenna is manipulated through typical positions, polarity and length during the tests.
6. The EUT is supplied with nominal AC voltage or/and a new/fully recharged battery.
7. The spectrum is measured from 9kHz to the 10<sup>th</sup> harmonic and the worst-case emissions are reported.
8. < - 120 are below the analyzer floor level.

## RADIATED Measurements (Fundamental & Harmonics) (CONT.)

### D. Transmitter Portion (Handset)

Operating Frequency: 2401.5 MHz  
 Distance of Measurements: 3 meters  
 Channel: 1

FREQ. (MHz)	Level* (dBm)	AFCL (dB)	POL (H/V)	DET QP/AVG	F/S ( $\mu$ V/m)	F/S (dB $\mu$ V/m)	Margin (dB)
2401.5	- 27.2	32.7	V	Peak	420242.5	112.5	n/a
4803.0	- 106.0	40.4	V	Peak	117.355	41.4	12.6
7204.5	< - 120						
9606.0	< - 120						

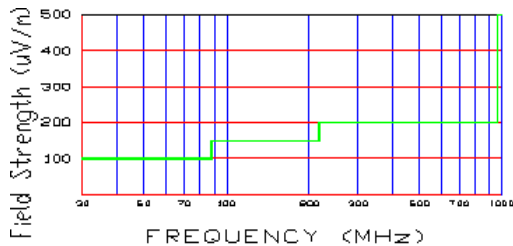


Figure 13. Restricted band harmonics and spurious limits.

Above 1 GHz limit is 500 uV/m (54dBu/m)

#### NOTES:

1. All harmonics in the restricted bands specified in §15.205 are below the limit shown in table 2. (note: \* Restricted Band)
2. All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
3. Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
4. The peak emissions above 1 GHz are not more than 20 dB above the average limit.
5. The antenna is manipulated through typical positions, polarity and length during the tests.
6. The EUT is supplied with nominal AC voltage or/and a new/fully recharged battery.
7. The spectrum is measured from 9kHz to the 10<sup>th</sup> harmonic and the worst-case emissions are reported.
8. < - 120 are below the analyzer floor level.

## RADIATED Measurements (Fundamental & Harmonics) (CONT.)

### E. Transmitter Portion (Handset)

Operating Frequency: 2434.5 MHz  
 Distance of Measurements: 3 meters  
 Channel: 12

FREQ. (MHz)	Level* (dBm)	AFCL (dB)	POL (H/V)	DET QP/AVG	F/S ( $\mu$ V/m)	F/S (dB $\mu$ V/m)	Margin (dB)
2434.5	- 26.7	32.8	V	Peak	449779.9	113.1	n/a
4869.0	- 106.5	40.5	V	Peak	112.202	41.0	13.0
7303.5	< - 120						
9738.0	< - 120						

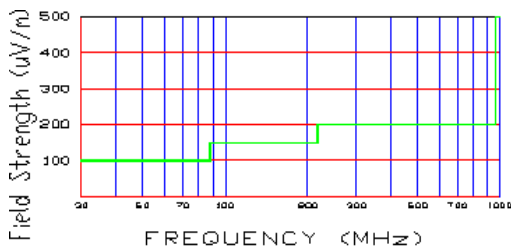


Figure 14. Restricted band harmonics and spurious limits.

Above 1 GHz limit is 500 uV/m (54dBu/m)

#### NOTES:

- All harmonics in the restricted bands specified in §15.205 are below the limit shown in table 2. (note: \* Restricted Band)
- All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
- Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
- The peak emissions above 1 GHz are not more than 20 dB above the average limit.
- The antenna is manipulated through typical positions, polarity and length during the tests.
- The EUT is supplied with nominal AC voltage or/and a new/fully recharged battery.
- The spectrum is measured from 9kHz to the 10<sup>th</sup> harmonic and the worst-case emissions are reported.
- < - 120 are below the analyzer floor level.

## RADIATED Measurements (Fundamental & Harmonics) (CONT.)

### F. Transmitter Portion (Handset)

Operating Frequency: 2470.5 MHz  
 Distance of Measurements: 3 meters  
 Channel: 24

FREQ. (MHz)	Level* (dBm)	AFCL (dB)	POL (H/V)	DET QP/AVG	F/S ( $\mu$ V/m)	F/S (dB $\mu$ V/m)	Margin (dB)
2470.5	- 26.7	32.9	V	Peak	456562.3	113.2	n/a
4941.0	- 104.2	40.7	V	Peak	149.624	43.5	10.5
7411.5	< - 120						
9882.0	< - 120						

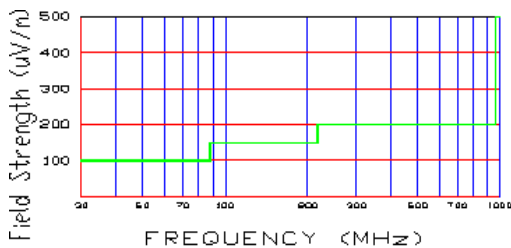


Figure 15. Restricted band harmonics and spurious limits.

Above 1 GHz limit is 500 uV/m (54dBu/m)

#### NOTES:

1. All harmonics in the restricted bands specified in §15.205 are below the limit shown in table 2. (note: \* Restricted Band)
2. All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
3. Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
4. The peak emissions above 1 GHz are not more than 20 dB above the average limit.
5. The antenna is manipulated through typical positions, polarity and length during the tests.
6. The EUT is supplied with nominal AC voltage or/and a new/fully recharged battery.
7. The spectrum is measured from 9kHz to the 10<sup>th</sup> harmonic and the worst-case emissions are reported.
8. < - 120 are below the analyzer floor level.

## RADIATED Measurements (Spurious)

### A. Transmitter Portion (Base/Handset)

Operating Frequency: 2401.5 – 2470.5 MHz  
 Distance of Measurements: 3 meters  
 Channel: 1, 12, 24

FREQ. (MHz)	Level* (dBm)	AFCL (dB)	POL (H/V)	F/S ( $\mu$ V/m)	DET QP/AVG	Margin (dB)
73.8	- 77.2	6.8	V	67.3	QP	- 3.4
147.4	- 81.0	13.5	V	93.8	QP	- 4.0
221.3	- 83.6	17.5	H	110.7	QP	- 5.1
294.7	- 86.1	20.4	H	116.3	QP	- 4.7
368.6	- 90.2	22.9	V	95.7	QP	- 6.4
442.1	- 93.3	38.4	H	83.3	QP	- 7.6

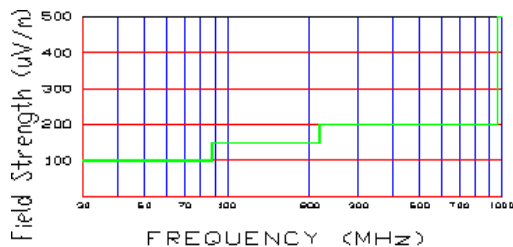


Figure 16. Restricted band harmonics and spurious limits.

Above 1 GHz limit is 500 uV/m (54dBu/m)

#### NOTES:

1. All emissions were investigated and the worst case emissions are reported
2. For hand-held devices, the EUT is rotated through three orthogonal axis to determine which configuration produces the maximum emissions
3. The EUT is supplied with the minimal AC voltage or/and a new/fully recharged battery.
4. The EUT was tested up to the 10<sup>th</sup> harmonic (9.3 GHz) and no significant emission was found.

## §15.247(e) Processing Gain (from Panasonic)

---

### REQUIREMENTS

---

According to the FCC requirement 15.247 for direct sequence spread spectrum systems, the minimum processing gain is 10 dB. The CW jamming margin method was used to determine the KX-TG2481 processing gain. The processing gain was calculated using the following equation:

$$G_p = (S/N)_o + M_j + L_{sys} \text{ where:}$$

---

$G_p$  = Processing Gain  
 $(S/N)_o$  = Signal to noise required for a given error probability. In this case  $1 \times 10^{-4}$  was used.  
 $M_j$  = J/S Jammer to signal ratio required to produce given error probability.  
 $L_{sys}$  = System losses to due non-ideal performance. Maximum allowed by the FCC is **2.0 dB**.

The  $(S/N)_o$  ratio was determined to be **11.0 dB** according to Jakes "Microwave Mobile Communications". Page 229 indicates the relevant curve showing error probability Vs  $(S/N)_o$  for a non-coherent FM system with a peak deviation equal to .35 of the modulation frequency:  
 $F_d = .35 F_s$ .

Given a minimum processing gain of 10 dB, the minimum allowable J/S ratio is -3.0 dB.

### TEST SETUP

---

The processing gain was measured using the test setup shown in Figure 1:

The following test equipment was used for this setup:

- KX-TG2481 □ Equipment under test □.
- Dummy Set: Used KX-TG2481 evaluation set.
- IFR 2051 Signal Generator (for desire signal )
- Hewlett Packard ESG D3000A Signal Generator (for jamming signal)
- Taisei SPL1141 Coupler
- Japan Radio Co Ltd.(JRC) NJZ-940 TDMA Error Ratio Measuring Equipment (BER tester)
- Semiflex SMA cables

The Dummy Set was set up at the middle channel 2.4345 GHz. The KX-TG2481 base band 3dB bandwidth is less than 1.0 MHz; therefore, the signal generator was used to inject a CW jammer from 2.4335 GHz to 2.4355 GHz in 50 kHz increments. The DUT received input power was set at -70 dBm. The jammer power was adjusted to achieve a bit error rate of  $1 \times 10^{-4}$  at each jammer frequency. The jammer power was recorded and the processing gain calculated for each jammer frequency from 2.4335 GHz to 2.4355 GHz.

### TEST RESULTS

---

The processing gain Vs jammer frequency is shown in Figure 2 and Figure 3:

## §15.247(e) Processing Gain (from Panasonic)

Processing Gain Test Results Kyushu Matsushita Electric Co., Ltd

$$G_p = (C/N)_0 + M_j + L_{sys}$$

G<sub>p</sub> = KX-TG2481 Process Gain  
 (S/N)<sub>0</sub> = S/N ratio for keeping BER=1x10<sup>-4</sup>  
 (S/N)<sub>0</sub> is 11dB on this system.  
 M<sub>j</sub> = J/S ratio (CW Jamming margin method)  
 L<sub>sys</sub> = system loss (<=2.0dB)

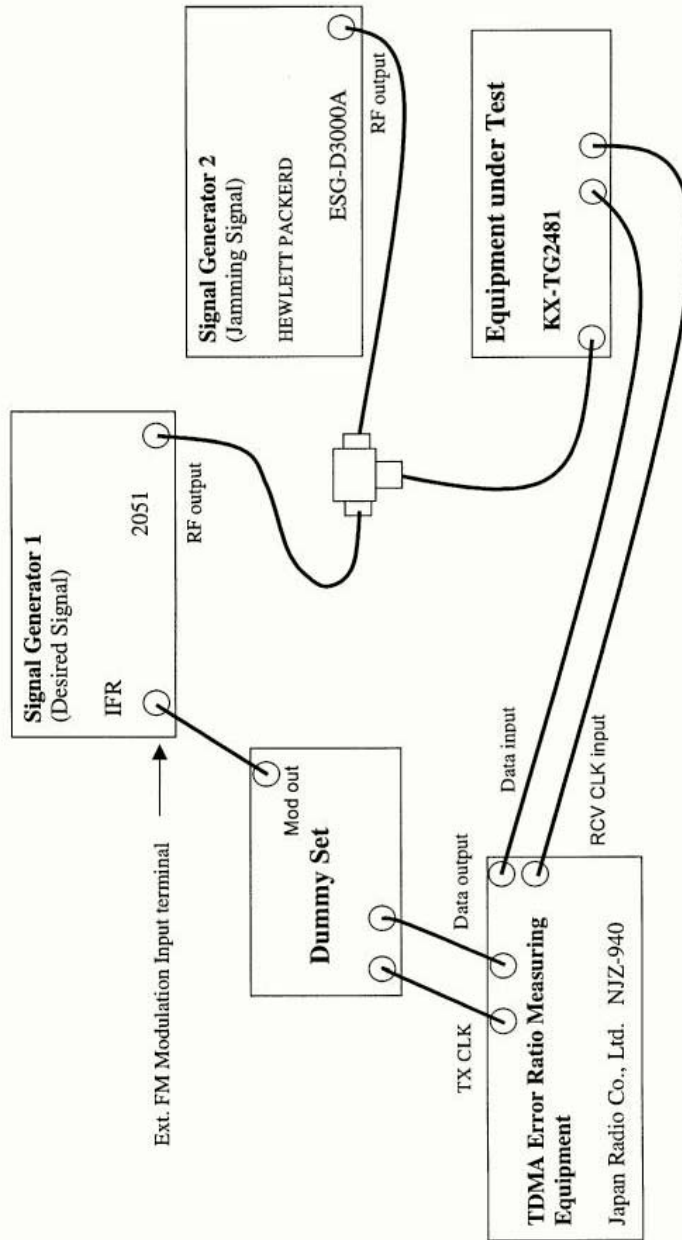


Figure 1: Processing Gain Test Setup

## §15.247(e) Processing Gain (from Panasonic)

### KX-TG2481 Processing Gain Test Results


Kyushu Matsushita Electric Co., Ltd..

Telephone Engineering Department/  
 Telecom Division

Nobutoyo Nakano

	Portable Unit	Base Unit
	KX-TG2481B-R	KX-TG2481B-H
$\Delta f$ (kHz)	J/S Ratio (dB)	J/S Ratio (dB)
1000	8.5	8.0
950	6.4	6.1
900	4.4	4.2
850	2.9	2.6
800	0.8	0.6
750	-1.1	0.0
700	-1.2	-1.4
650	-1.3	-1.7
600	-1.0	-1.5
550	-1.1	-1.6
500	-1.0	-1.4
450	-0.9	-1.8
400	-0.8	-1.4
350	-0.7	-1.5
300	-0.6	-1.0
250	-0.4	-1.0
200	-0.5	-1.0
150	0.0	-0.8
100	-0.2	-0.5
50	-1.3	-1.2
0	0.0	-1.4
-50	-1.7	-1.9
-100	0.4	-1.1
-150	-0.2	-0.6
-200	0.0	-1.0
-250	-0.2	-1.0
-300	-0.4	-0.8
-350	-0.8	-1.2
-400	-1.0	-1.0
-450	-1.4	-1.4
-500	-1.0	-1.5
-550	-1.4	-1.6
-600	-1.5	-1.9
-650	-1.5	-1.7
-700	-1.3	-1.8
-750	-1.0	-1.2
-800	0.0	-0.6
-850	2.4	1.5
-900	4.1	3.2
-950	5.8	5.3
-1000	8.2	7.8

J/S Ratio = (Jammer Signal) / (Desired Signal) Ratio

 = worst 20% points

These points are excluded.

#### Mj Jamming Margin

Mj(J/S ratio)	
Portable	-1.2dB
Base	-1.6dB

Note: Mj level is worst value  
 after exclude worst 20% points.

#### Process Gain

$$G_p = (S/N)_o + M_j + L_{sys}$$

$(S/N)_o = 11\text{dB}$

$L_{sys} = 2.0\text{dB}$

Mj: compare above table.

Gp (Process Gain)	
Portable	11.8dB
Base	11.4dB

(= -1.2 + 11 + 2)  
 (= -1.6 + 11 + 2)

Figure 2: Test Results of Process Gain

## §15.247(e) Processing Gain (from Panasonic)

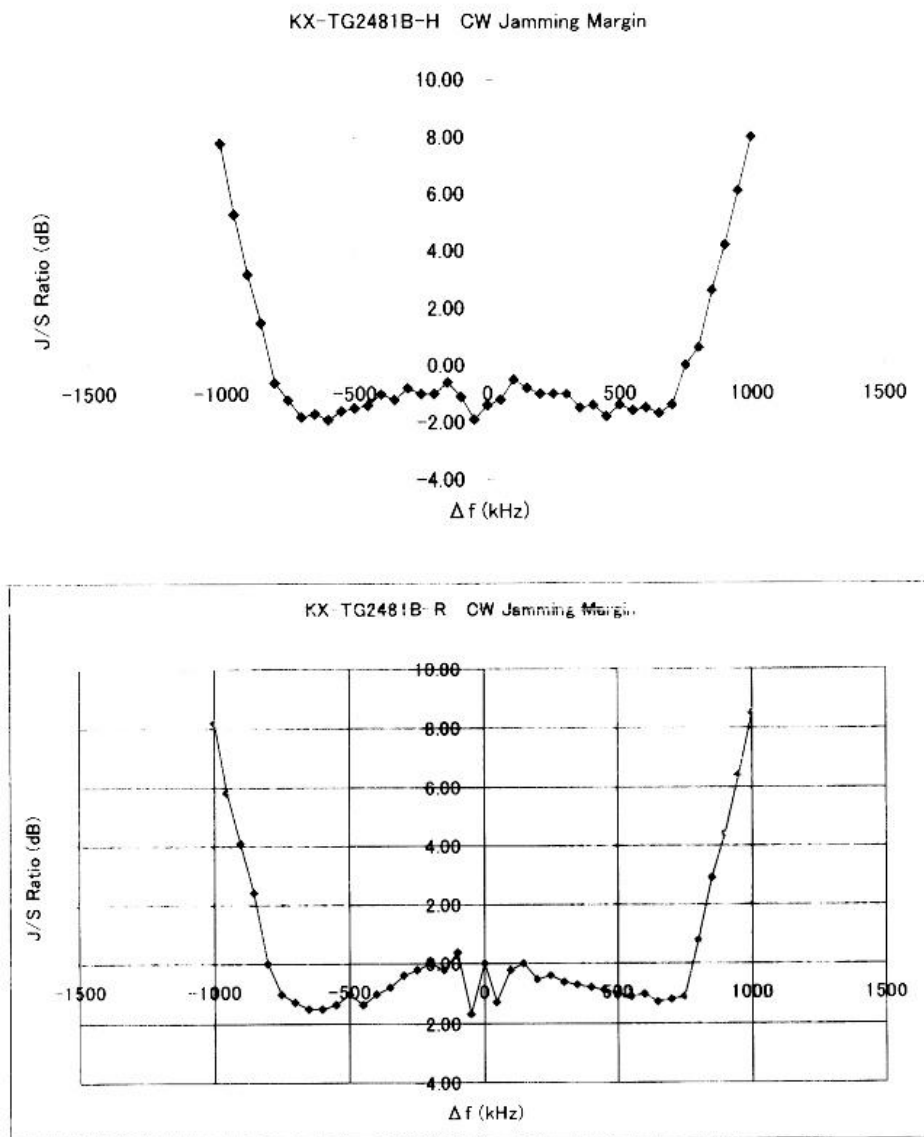


Figure 3: Test Results of Jamming Margin

## §15.247(e) Processing Gain (from Panasonic)

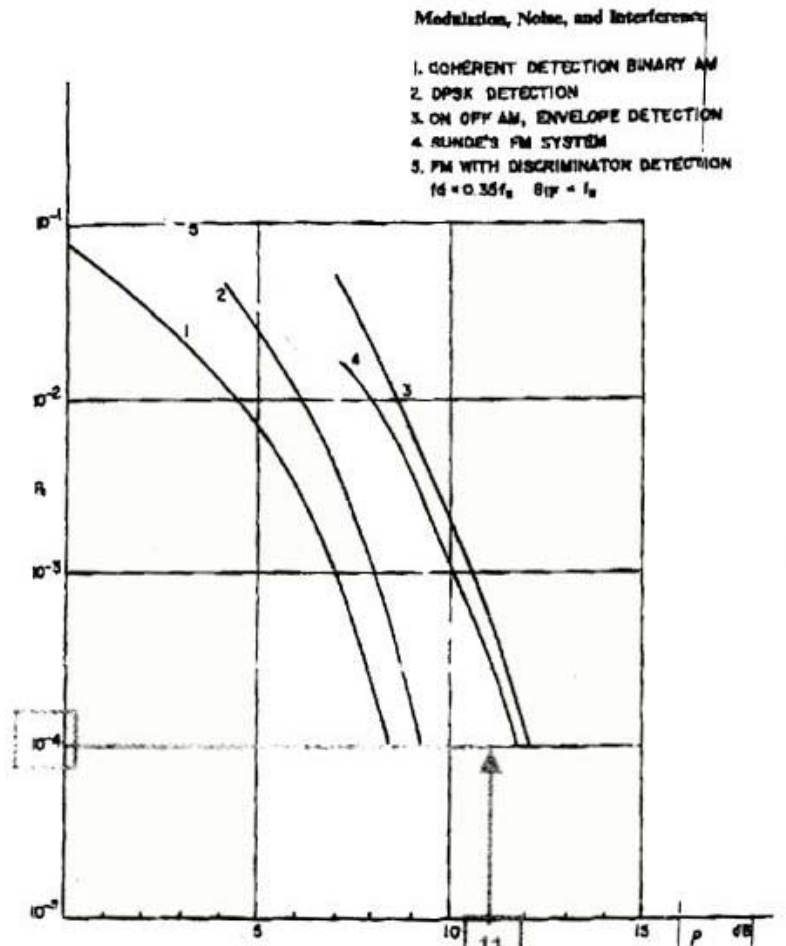


Figure 4.2-6 Error rate as a function of average transmitter power to noise ratio,  $\rho = P_T/N_{af}$ .

The peak frequency deviation is  $f_d$ . It is clear that  $x(t)$  is no longer band limited. Calculations show<sup>31, 32</sup> that for small deviations, that is,  $f_d < f_c/4$ , the spectrum of  $x(t)$  is essentially contained in a narrow RF bandwidth of  $1.5 f_c$ . A narrow-band system has been described by Salz<sup>22, 33</sup> with  $f_d = f_c/4$  and a bandwidth of  $1.5 f_c$ . The transmitted wave was no longer strictly FM but had small amplitude fluctuations. With conventional limiter discrim-

## TEST EQUIPMENT

Type	Model	Cal. Due Date	S/N
Microwave Spectrum Analyzer	HP 8566B (100Hz-22GHz)	12/05/01	3638A08713
Microwave Spectrum Analyzer	HP 8566B (100Hz-22GHz)	04/17/02	2542A11898
Spectrum Analyzer/Tracking Gen.	HP 8591A (9kHz-1.8GHz)	06/02/01	3144A02458
Spectrum Analyzer	HP 8591A (9kHz-1.8GHz)	10/15/01	3108A02053
Spectrum Analyzer	HP 8594A (9kHz-2.9GHz)	11/02/01	3051A00187
Signal Generator*	HP 8640B (500Hz-1GHz)	06/02/01	2232A19558
Signal Generator*	HP 8640B (500Hz-1GHz)	06/02/01	1851A09816
Signal Generator*	Rohde & Schwarz (0.1-1000MHz)	09/11/01	894215/012
Ailtech/Eaton Receiver	NM 37/57A-SL (30-1000MHz)	04/12/02	0792-03271
Ailtech/Eaton Receiver	NM 37/57A (30-1000MHz)	03/11/02	0805-03334
Ailtech/Eaton Receiver	NM 17/27A (0.1-32MHz)	09/17/01	0608-03241
Quasi-Peak Adapter	HP 85650A	08/09/01	2043A00301
Ailtech/Eaton Adapter	CCA-7 CISPR/ANSI QP Adapter	03/11/02	0194-04082
RG58 Coax Test Cable	No. 167		n/a
Harmonic/Flicker Test System	HP 6841A (IEC 555-2/3)		3531A00115
Broadband Amplifier (2)	HP 8447D		1145A00470, 1937A03348
Broadband Amplifier	HP 8447F		2443A03784
Transient Limiter	HP 11947A (9kHz-200MHz)		2820A00300
Horn Antenna	EMCO Model 3115 (1-18GHz)	9704-5182	
Horn Antenna	EMCO Model 3115 (1-18GHz)	9205-3874	
Horn Antenna	EMCO Model 3116 (18-40GHz)		9203-2178
Biconical Antenna (4)	Eaton 94455/Eaton 94455-1/Singer 94455-1/Compliance Design 1295, 1332, 0355		
Log-Spiral Antenna (3)	Ailtech/Eaton 93490-1		0608, 1103, 1104
Roberts Dipoles	Compliance Design (1 set) A100		5118
Ailtech Dipoles	DM-105A (1 set)		33448-111
EMCO LISN (2)	3816/2		1077, 1079
EMCO LISN	3725/2		2009
Microwave Preamplifier 40dB Gain	HP 83017A (0.5-26.5GHz)		3123A00181
Microwave Cables	MicroCoax (1.0-26.5GHz)		
Ailtech/Eaton Receiver	NM37/57A-SL		0792-03271
Spectrum Analyzer	HP 8591A		3034A01395
Modulation Analyzer	HP 8901A		2432A03467
NTSC Pattern Generator	Leader 408		0377433
Noise Figure Meter	HP 8970B		3106A02189
Noise Figure Meter	Ailtech 7510		TE31700
Noise Generator	Ailtech 7010		1473
Microwave Survey Meter	Holaday Model 1501 (2.450GHz)		80931
Digital Thermometer	Extech Instruments 421305		426966
Attenuator	HP 8495A (0-70dB) DC-4GHz		
Bi-Directional Coax Coupler	Narda 3020A (50-1000MHz)		
Shielded Screen Room	RF Lindgren Model 26-2/2-0		6710 (PCT270)
Shielded Semi-Anechoic Chamber	Ray Proof Model S81		R2437 (PCT278)
Environmental Chamber	Associated Systems Model 1025 (Temperature/Humidity)		PCT285

\* Calibration traceable to the National Institute of Standards and Technology (NIST).


## Conclusion

---

The data collected shows that the **Panasonic Cordless Telephone FCC ID: ACJ96NKX-TG2481** complies with Part 15C of the FCC Rules.


## Appendix A: FCC ID Sample Label & Location


---

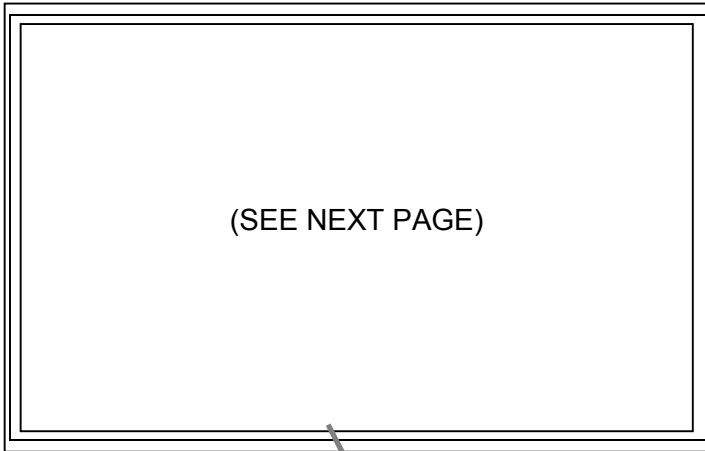

### **LABELLING** **REQUIREMENTS PER §§** **2.925 & §§ 15.19**

The Label shown shall be permanently affixed at a conspicuous location on the device and be readily visible to the user at the time of purchase.

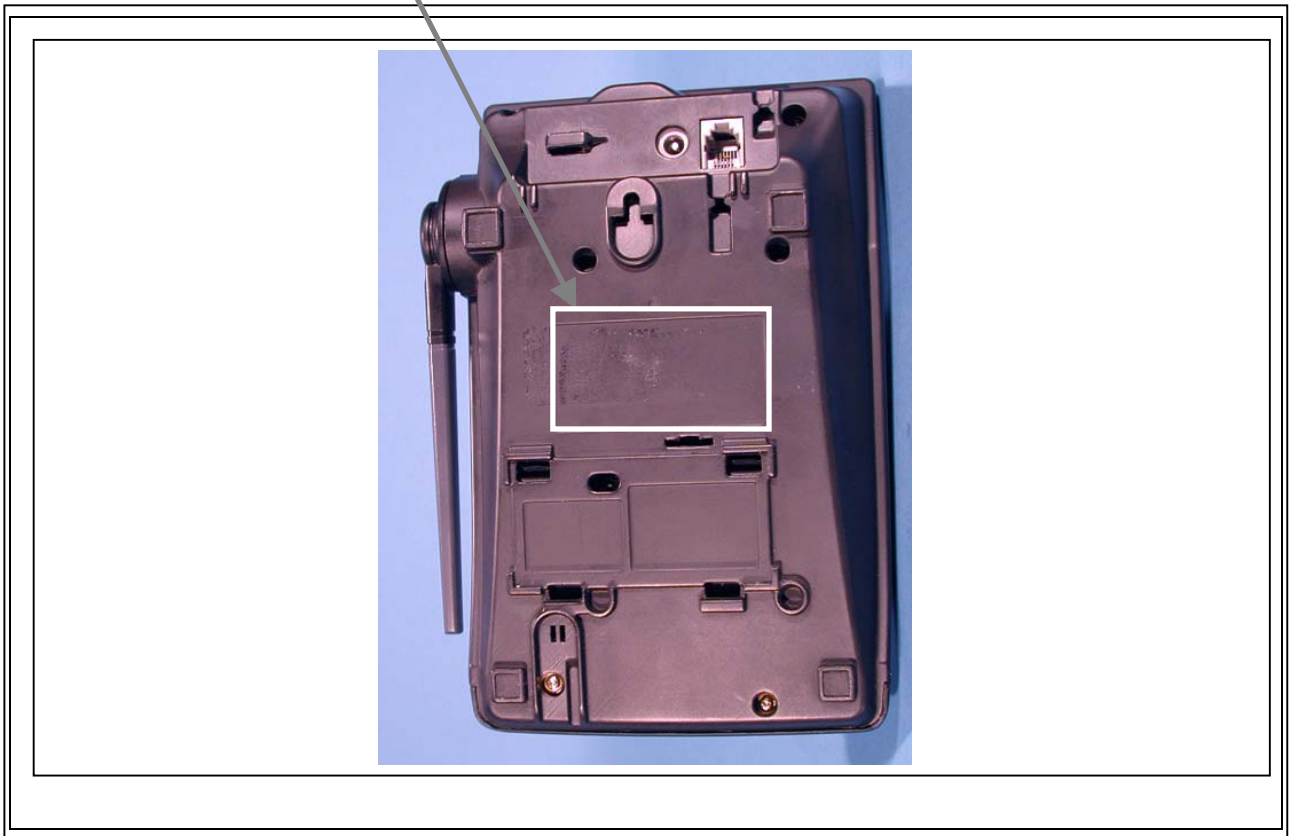

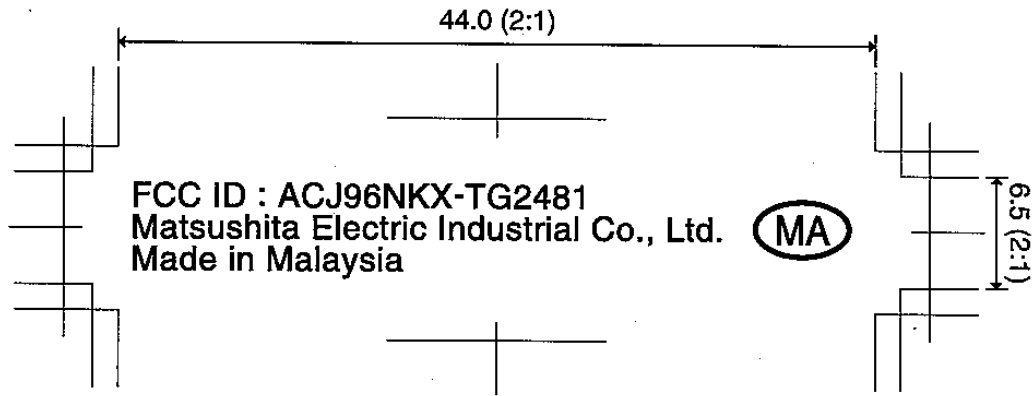


FCC ID : ACJ96NKX-TG2481  
Matsushita Electric Industrial Co., Ltd. (MA)  
Made in Malaysia

## Appendix B – Plots of Emissions


---

PANASONIC MODEL: KX-TG2481 FCC/B  
 AC Adapter Model: PQLV10 LINE A PCTEST Engineering Lab.

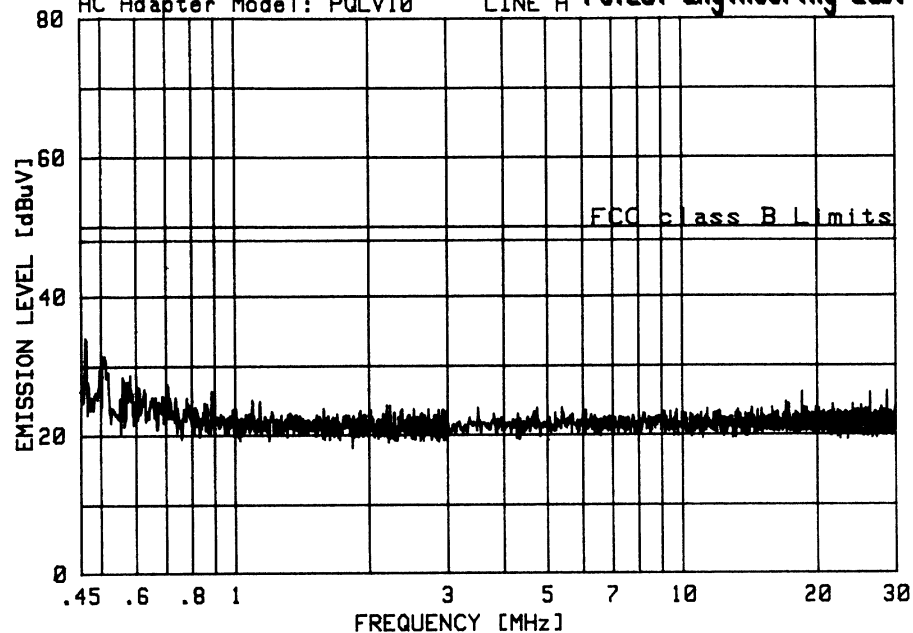


No.	Freq. [MHz]	Quasi-Pk [dBuV]	Average [dBuV]	QP-AV [dB]	Emission [dBuV]	Limit [dBuV]	Margin [dB]
1	.450	24.45	-	-	24.45	48.00	-23.55
2	.509	24.75	-	-	24.75	48.00	-23.25
3	.509	24.68	-	-	24.68	48.00	-23.32
4	.574	23.55	-	-	23.55	48.00	-24.45
5	.538	23.30	-	-	23.30	48.00	-24.70
6	.694	27.68	-	-	27.68	48.00	-20.32
7	.595	23.70	-	-	23.70	48.00	-24.30
8	.645	25.85	-	-	25.85	48.00	-22.15
9	.903	22.33	-	-	22.33	48.00	-25.67
10	28.649	25.10	-	-	25.10	48.00	-22.90

PANASONIC MODEL: KX-TG2481 FCC/B  
 AC Adapter Model: PQLV10 LINE B PCTEST Engineering Lab.

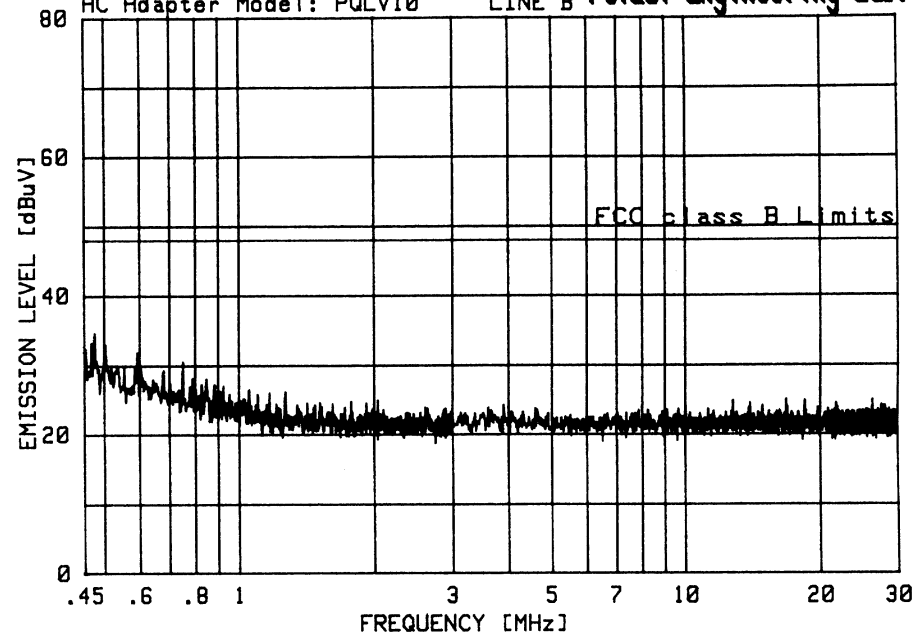


No.	Freq. [MHz]	Quasi-Pk [dBuV]	Average [dBuV]	QP-AV [dB]	Emission [dBuV]	Limit [dBuV]	Margin [dB]
1	.455	29.26	-	-	29.26	48.00	-18.74
2	.477	27.48	-	-	27.48	48.00	-20.52
3	.450	27.95	-	-	27.95	48.00	-20.05
4	.563	26.31	-	-	26.31	48.00	-21.69
5	.721	24.22	-	-	24.22	48.00	-23.78
6	.604	25.54	-	-	25.54	48.00	-22.46
7	.650	25.91	-	-	25.91	48.00	-22.09
8	.760	24.28	-	-	24.28	48.00	-23.72
9	.836	23.88	-	-	23.88	48.00	-24.12
10	.673	25.64	-	-	25.64	48.00	-22.36

\* Agilent 06:06:47 May 15, 2001

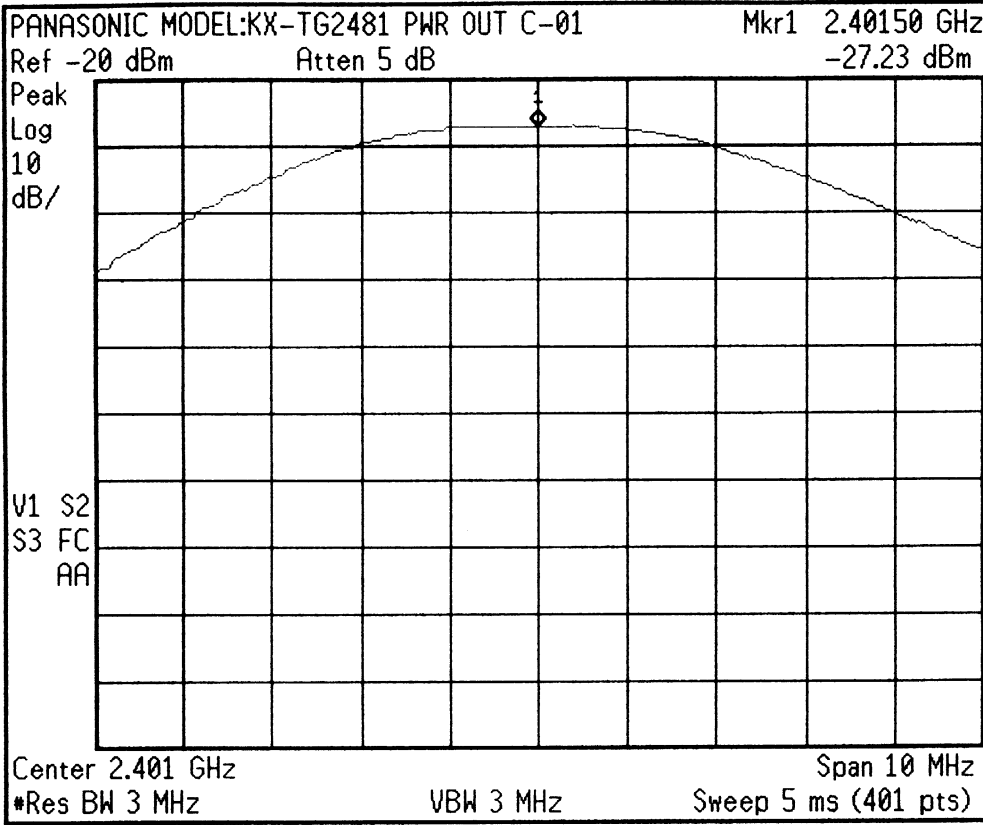

<b>Freq/Channel</b>
<b>Center Freq</b> 2.40150000 GHz
<b>Start Freq</b> 2.39650000 GHz
<b>Stop Freq</b> 2.40650000 GHz
<b>CF Step</b> 1.00000000 MHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off


\* Agilent 06:10:00 May 15, 2001

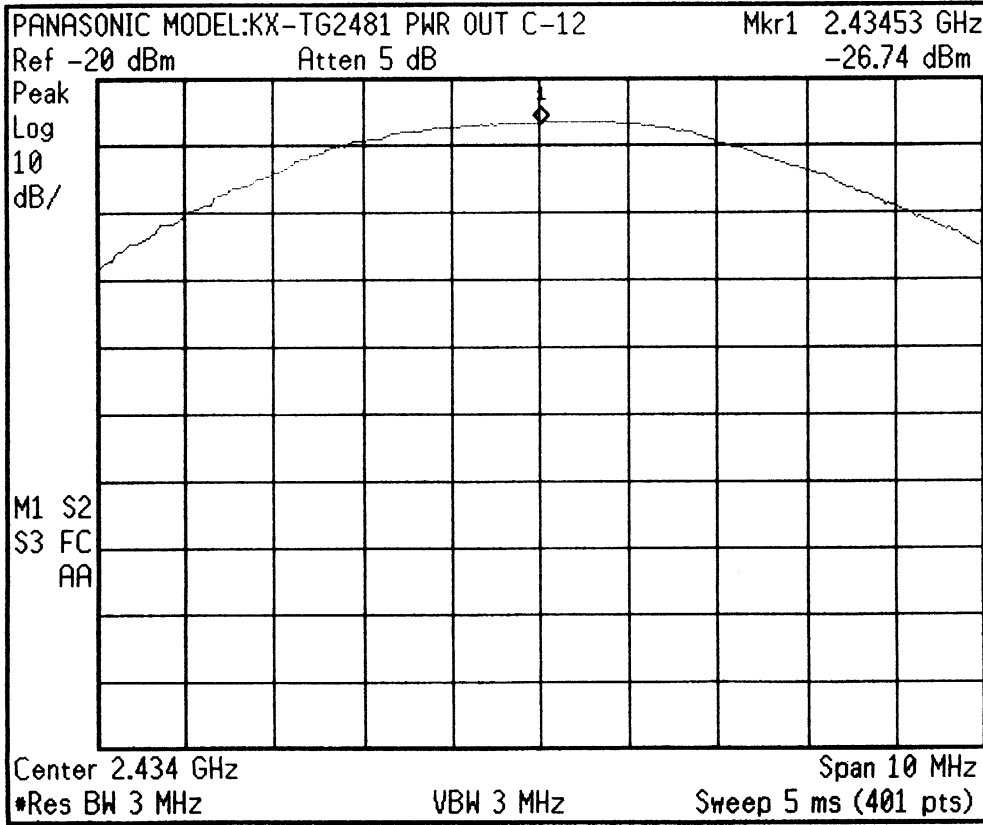

<b>Freq/Channel</b>
<b>Center Freq</b> 2.43450000 GHz
<b>Start Freq</b> 2.42950000 GHz
<b>Stop Freq</b> 2.43950000 GHz
<b>CF Step</b> 1.00000000 MHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

PANASONIC MODEL:KX-TG2481 PWR OUT C-24 Mkr1 2.47050 GHz


Ref -20 dBm Atten 5 dB -26.71 dBm

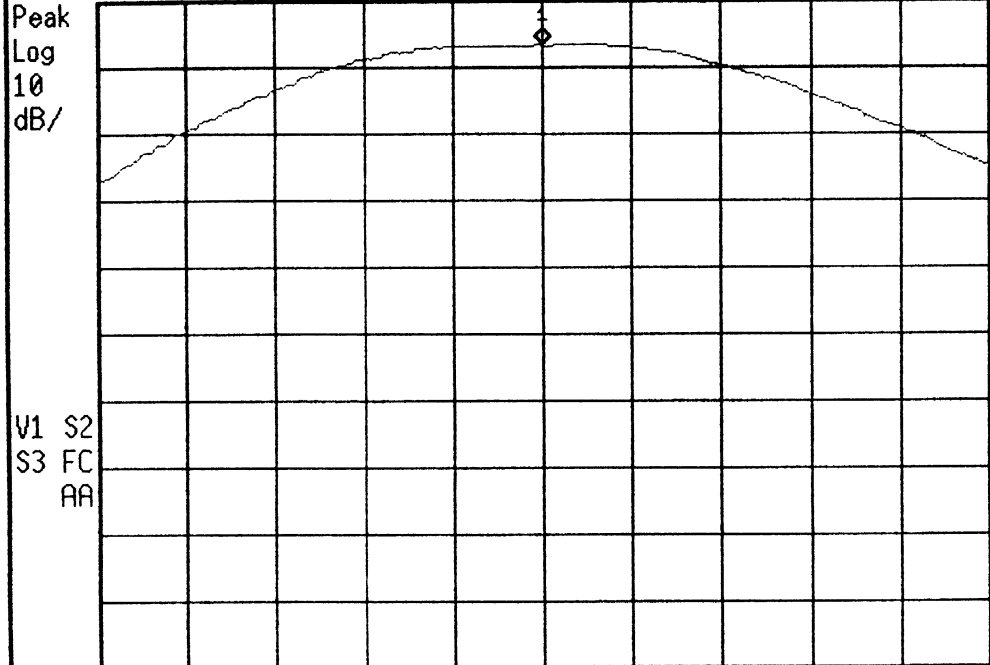

Center 2.47 GHz Span 10 MHz  
\*Res BW 3 MHz VBW 3 MHz Sweep 5 ms (401 pts)


<b>Freq/Channel</b>
<b>Center Freq</b> 2.47050000 GHz
<b>Start Freq</b> 2.46550000 GHz
<b>Stop Freq</b> 2.47550000 GHz
<b>CF Step</b> 1.00000000 MHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

\* Agilent 07:39:06 May 15, 2001

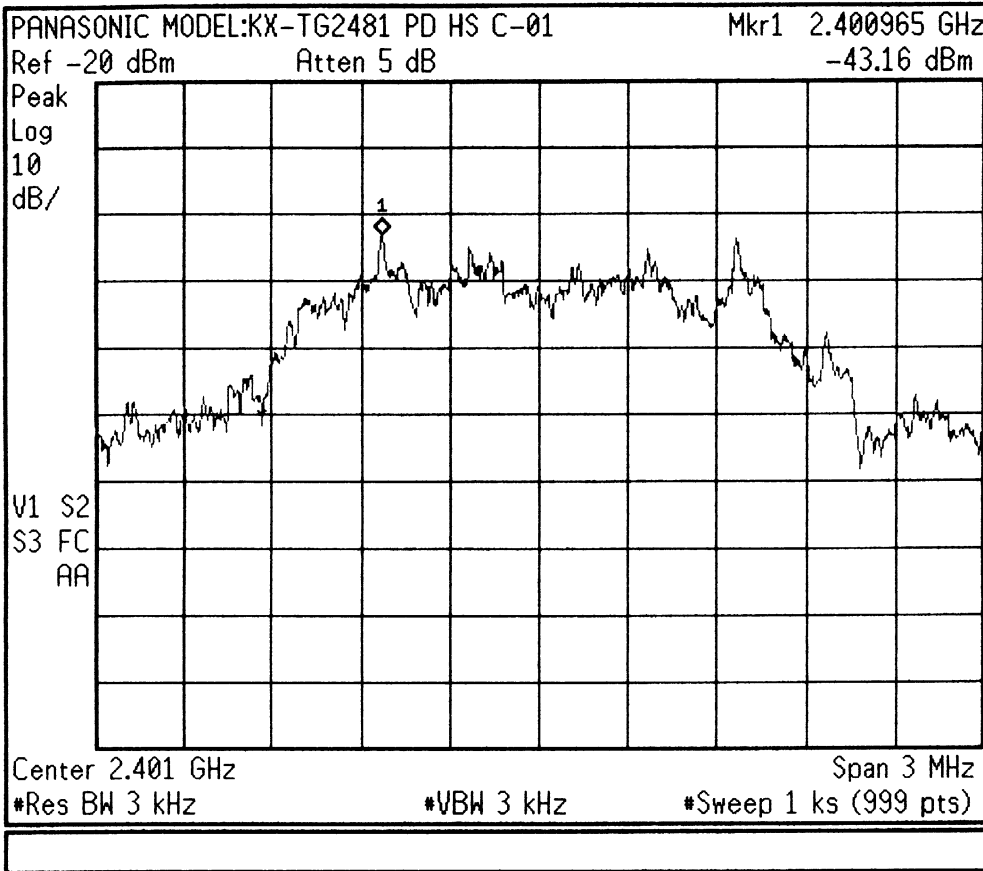

<b>Freq/Channel</b>
<b>Center Freq</b> 2.40150000 GHz
<b>Start Freq</b> 2.40000000 GHz
<b>Stop Freq</b> 2.40300000 GHz
<b>CF Step</b> 300.000000 kHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off


\* Agilent 08:25:45 May 15, 2001

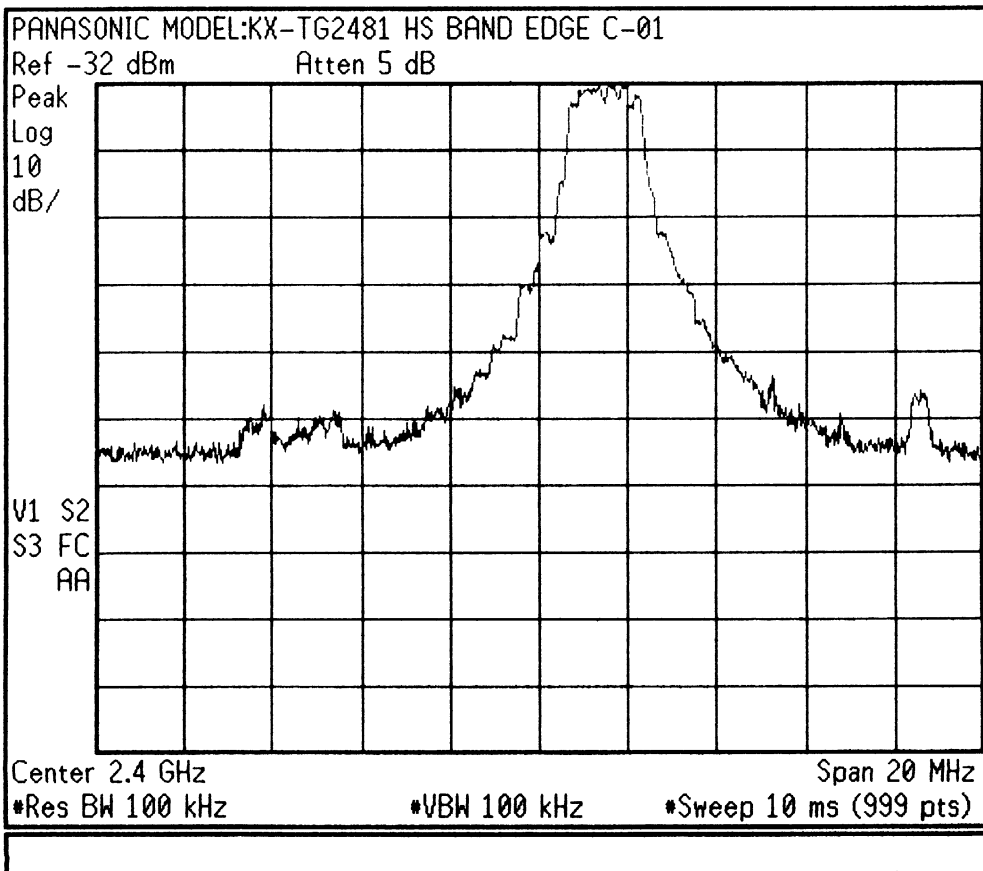

<b>Freq/Channel</b>
<b>Center Freq</b> 2.40000000 GHz
<b>Start Freq</b> 2.39000000 GHz
<b>Stop Freq</b> 2.41000000 GHz
<b>CF Step</b> 2.00000000 MHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

PANASONIC MODEL:KX-TG2481 HS BAND EDGE C-24 Mkr1 2.49785 GHz


Ref -32 dBm Atten 5 dB -86.89 dBm

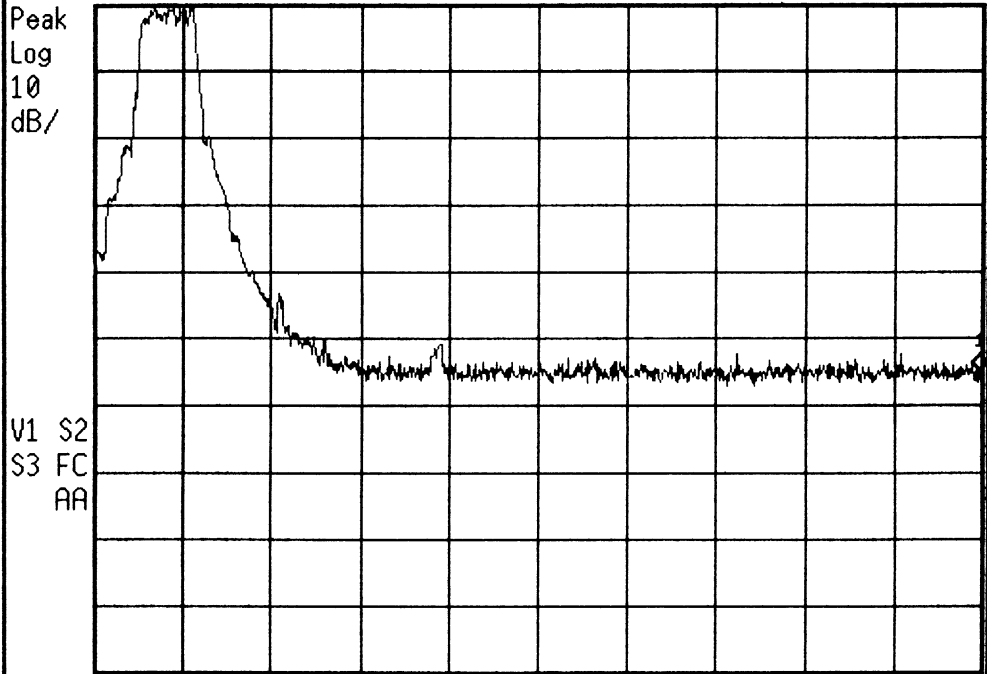

Center 2.483 GHz Span 30 MHz  
\*Res BW 100 kHz \*VBW 100 kHz \*Sweep 10 ms (999 pts)


<b>Freq/Channel</b>
<b>Center Freq</b> 2.48300000 GHz
<b>Start Freq</b> 2.46800000 GHz
<b>Stop Freq</b> 2.49800000 GHz
<b>CF Step</b> 3.00000000 MHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

Agilent 06:51:31 May 15, 2001

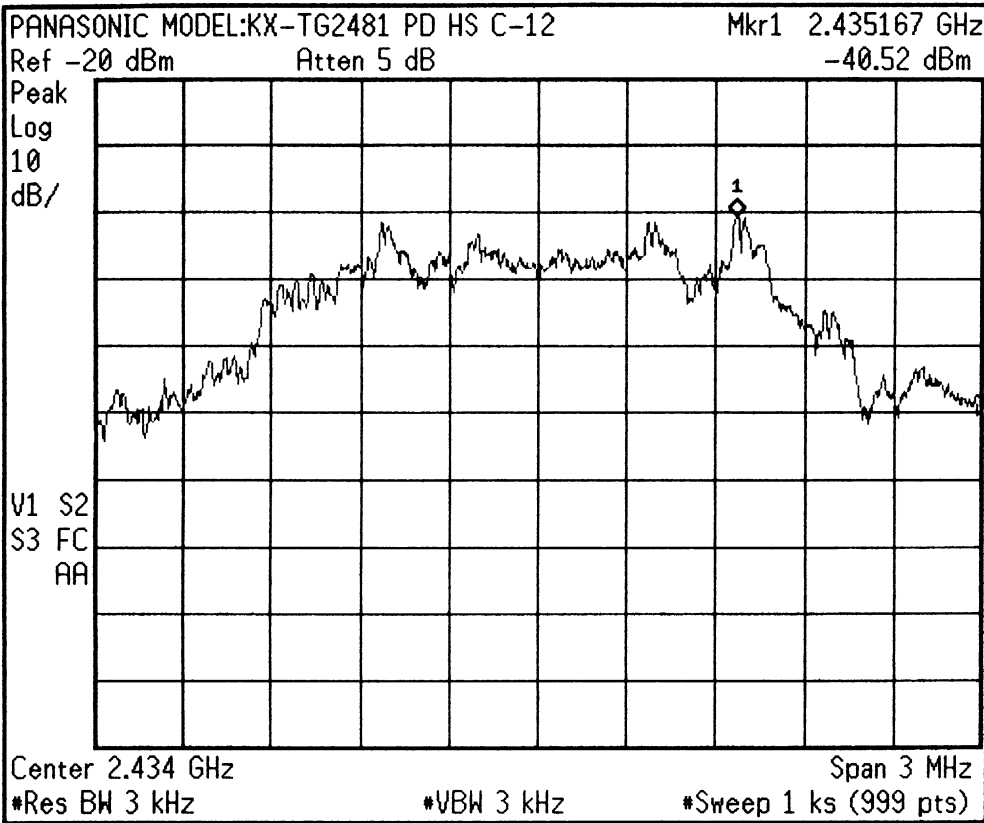


<b>Freq/Channel</b>
<b>Center Freq</b> 2.43450000 GHz
<b>Start Freq</b> 2.43300000 GHz
<b>Stop Freq</b> 2.43600000 GHz
<b>CF Step</b> 300.000000 kHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

Agilent 07:18:18 May 15, 2001

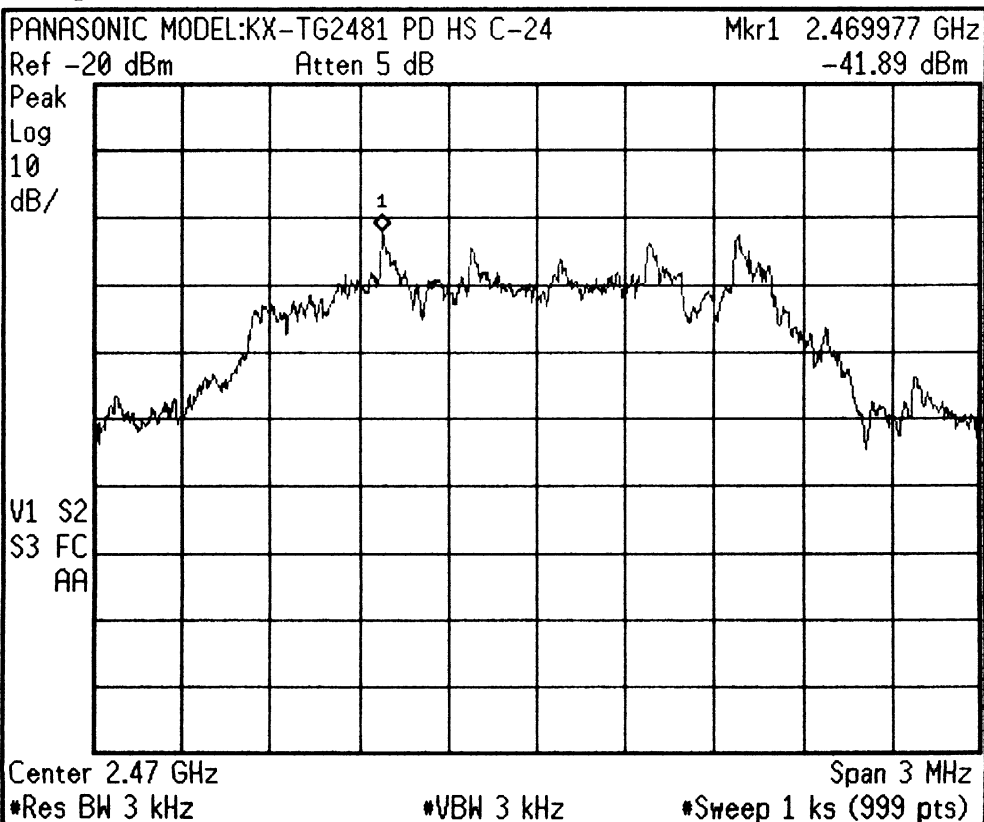


<b>Freq/Channel</b>
<b>Center Freq</b> 2.47050000 GHz
<b>Start Freq</b> 2.46900000 GHz
<b>Stop Freq</b> 2.47200000 GHz
<b>CF Step</b> 300.000000 kHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

\* Agilent 08:40:19 May 15, 2001

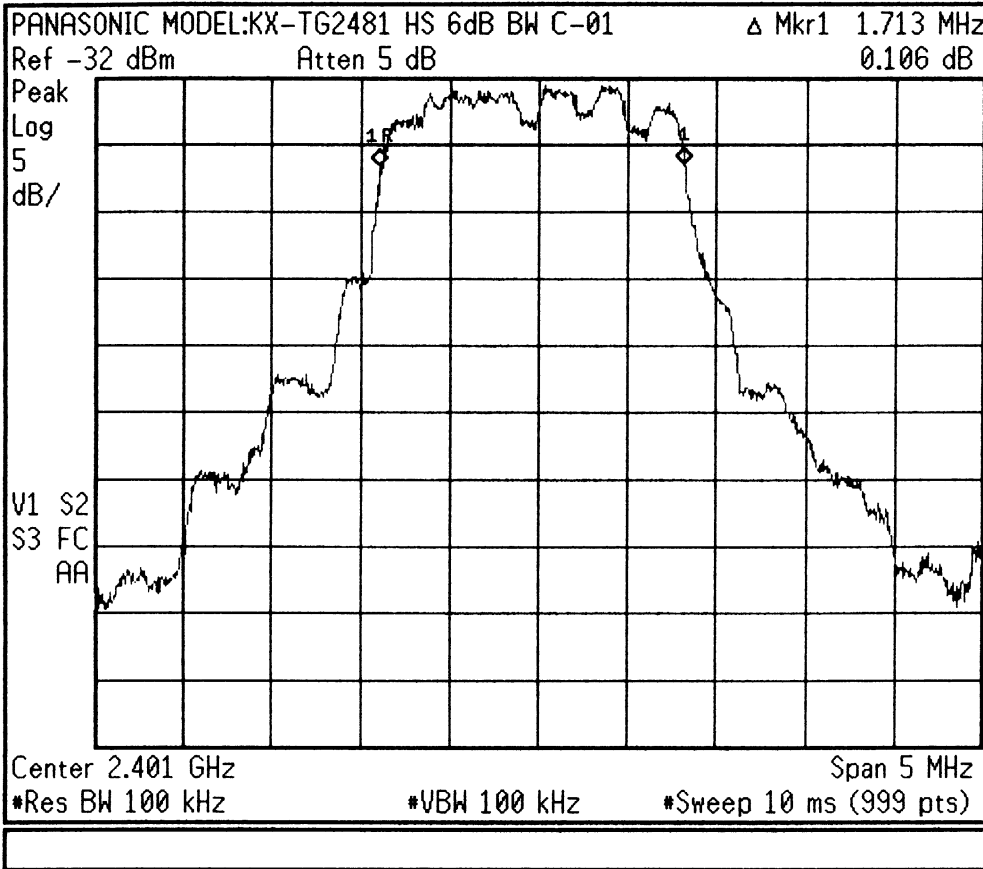

<b>Freq/Channel</b>
<b>Center Freq</b> 2.40150000 GHz
<b>Start Freq</b> 2.39900000 GHz
<b>Stop Freq</b> 2.40400000 GHz
<b>CF Step</b> 500.000000 kHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

\* Agilent 08:43:35 May 15, 2001

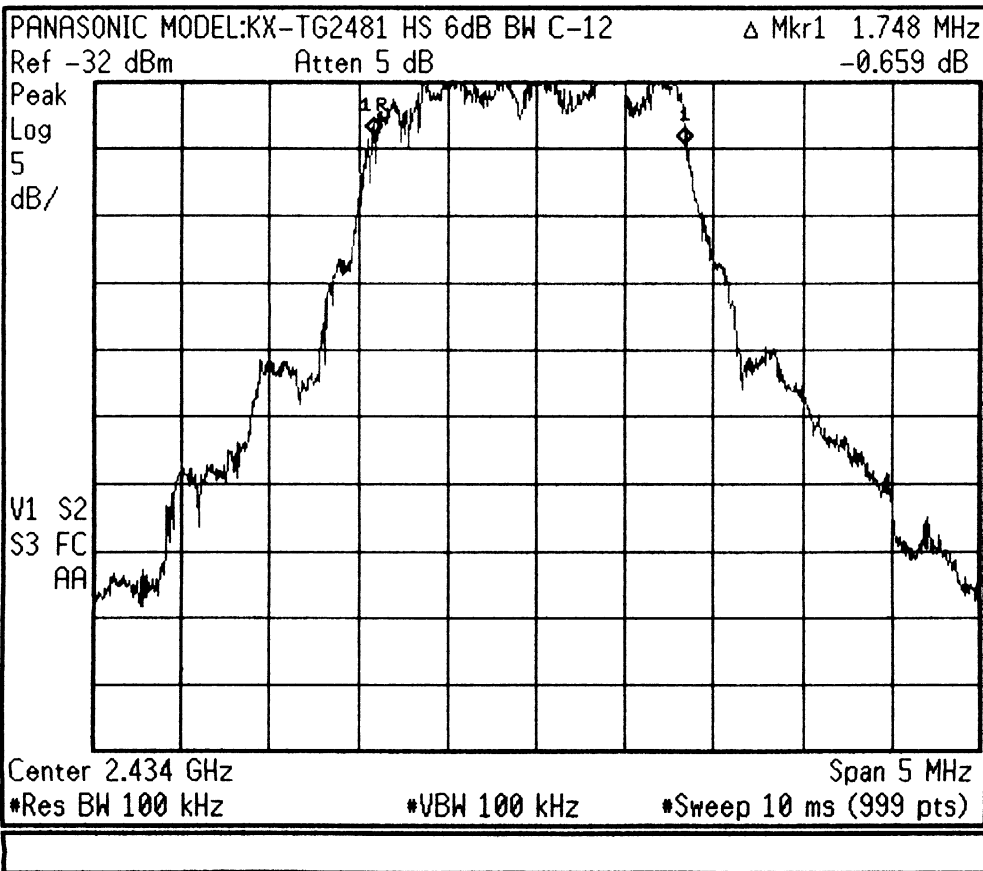

<b>Freq/Channel</b>
<b>Center Freq</b> 2.43450000 GHz
<b>Start Freq</b> 2.43200000 GHz
<b>Stop Freq</b> 2.43700000 GHz
<b>CF Step</b> 500.000000 kHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

PANASONIC MODEL:KX-TG2481 HS 6dB BW C-24  $\Delta$  Mkr1 1.879 MHz


Ref -32 dBm

Atten 5 dB

-0.044 dB

Peak  
Log  
5  
dB/

V1 S2  
S3 FC  
AA

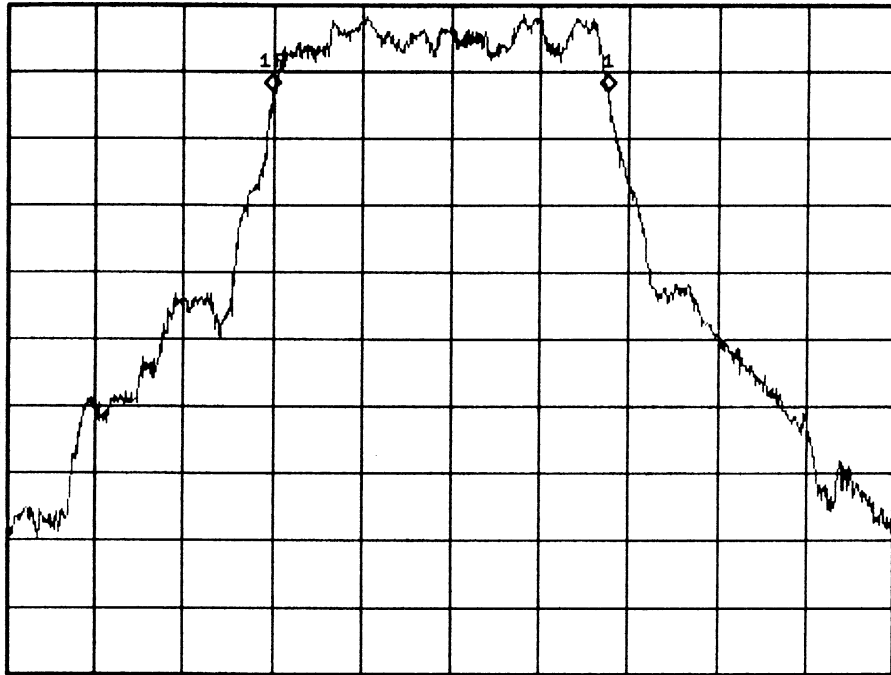

Center 2.47 GHz

Span 5 MHz

\*Res BW 100 kHz

\*VBW 100 kHz

\*Sweep 10 ms (999 pts)

Freq/Channel

Center Freq  
2.47050000 GHz

Start Freq  
2.46800000 GHz


Stop Freq  
2.47300000 GHz

CF Step  
500.000000 kHz  
Auto Man

Freq Offset  
0.00000000 Hz


Signal Track  
On Off

\* Agilent 09:01:20 May 15, 2001

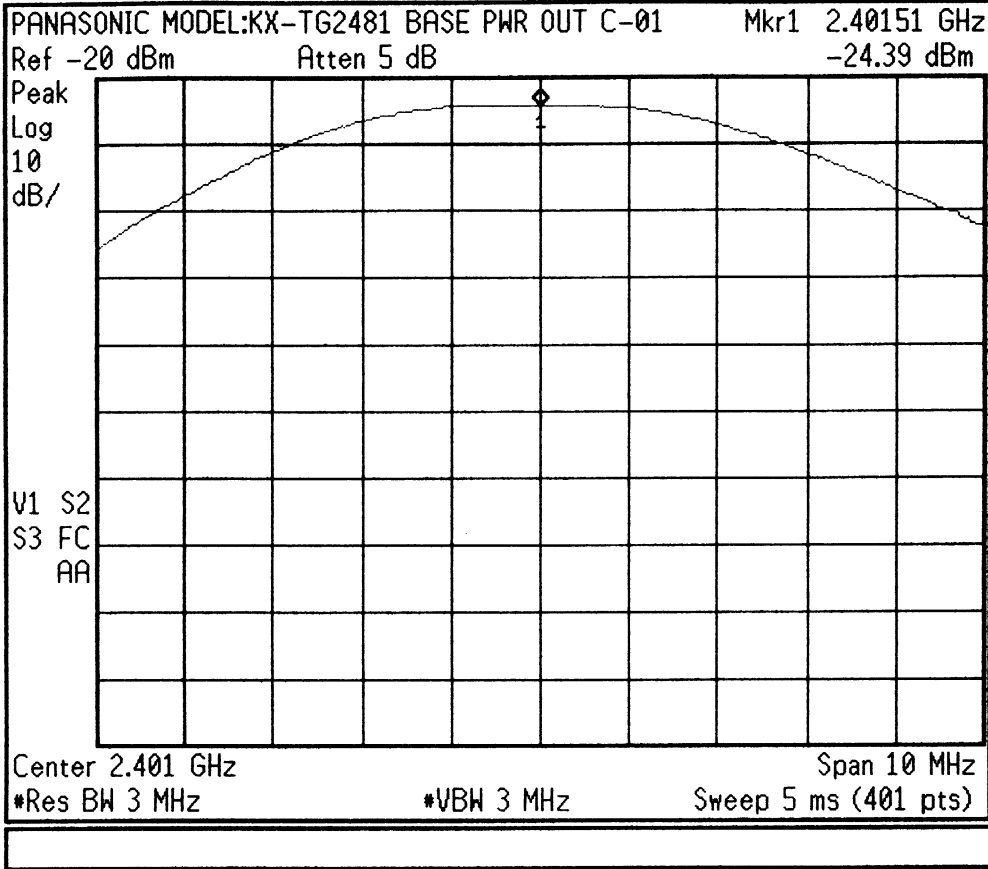


<b>Freq/Channel</b>
<b>Center Freq</b> 2.40150000 GHz
<b>Start Freq</b> 2.39650000 GHz
<b>Stop Freq</b> 2.40650000 GHz
<b>CF Step</b> 1.00000000 MHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

\* Agilent 09:06:08 May 15, 2001

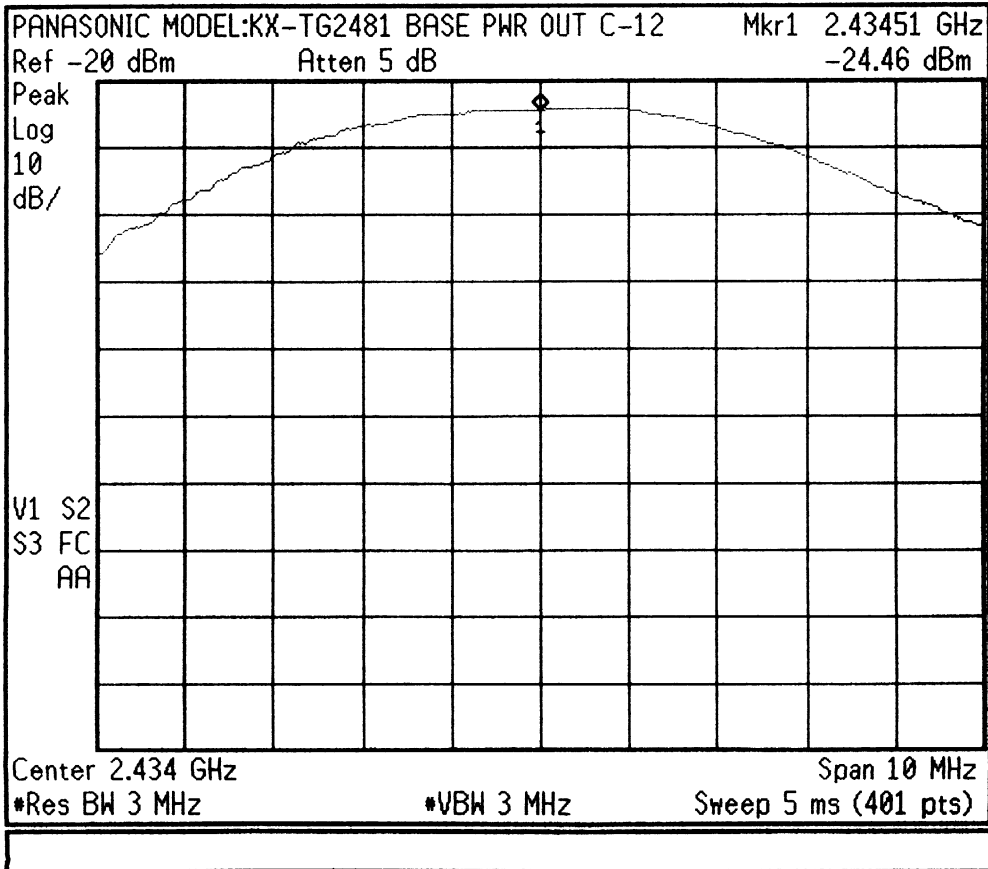

<b>Freq/Channel</b>
<b>Center Freq</b> 2.43450000 GHz
<b>Start Freq</b> 2.42950000 GHz
<b>Stop Freq</b> 2.43950000 GHz
<b>CF Step</b> 1.00000000 MHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off



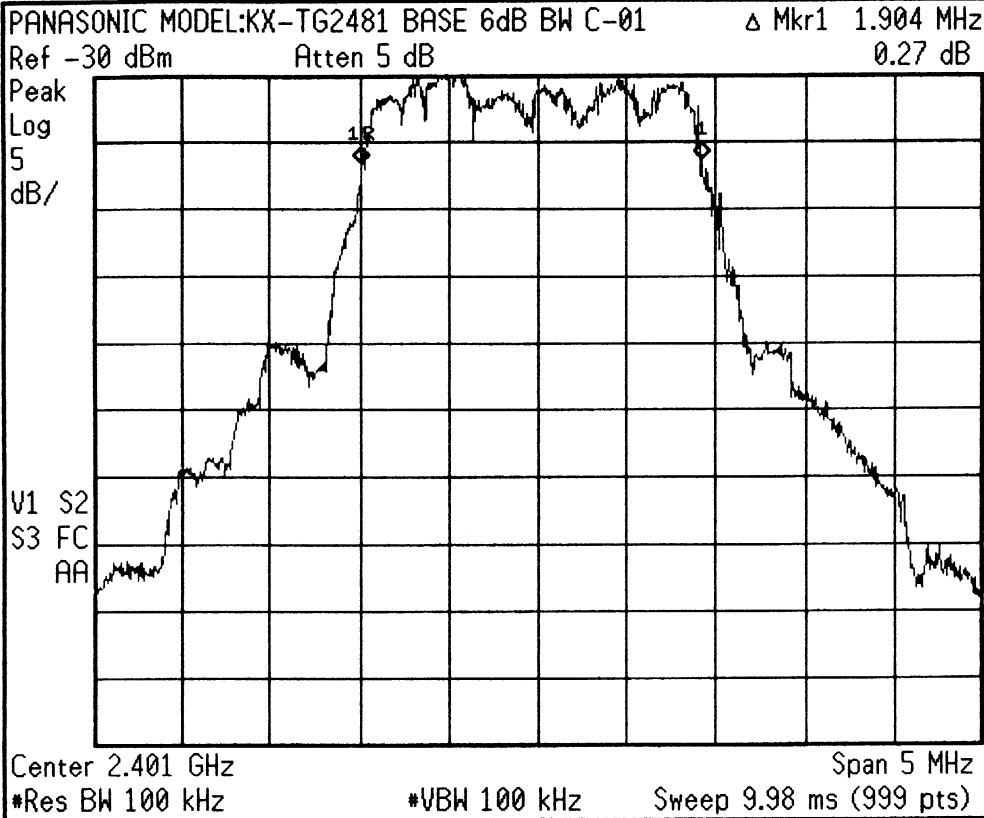

Freq/Channel

Center Freq  
2.40150000 GHz


Start Freq  
2.39900000 GHz

Stop Freq  
2.40400000 GHz


CF Step  
500.000000 kHz  
Auto Man

Freq Offset  
0.00000000 Hz

Signal Track  
On Off

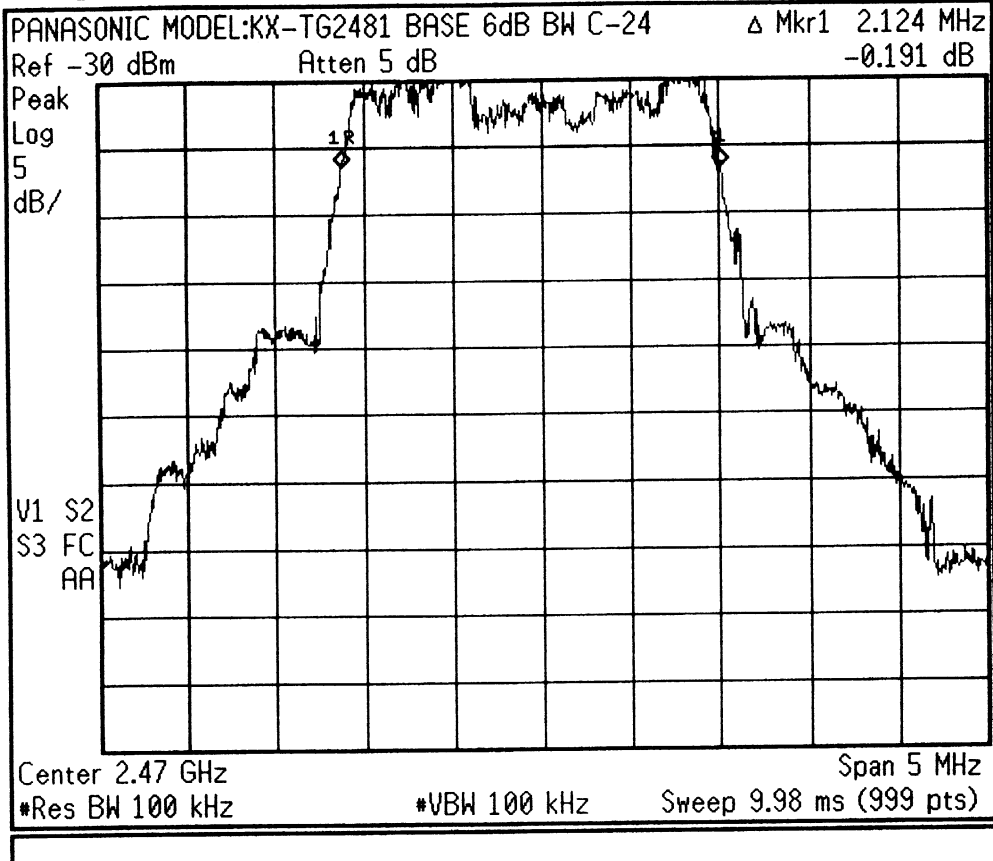

<b>Freq/Channel</b>
<b>Center Freq</b> 2.47050000 GHz
<b>Start Freq</b> 2.46800000 GHz
<b>Stop Freq</b> 2.47300000 GHz
<b>CF Step</b> 500.000000 kHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

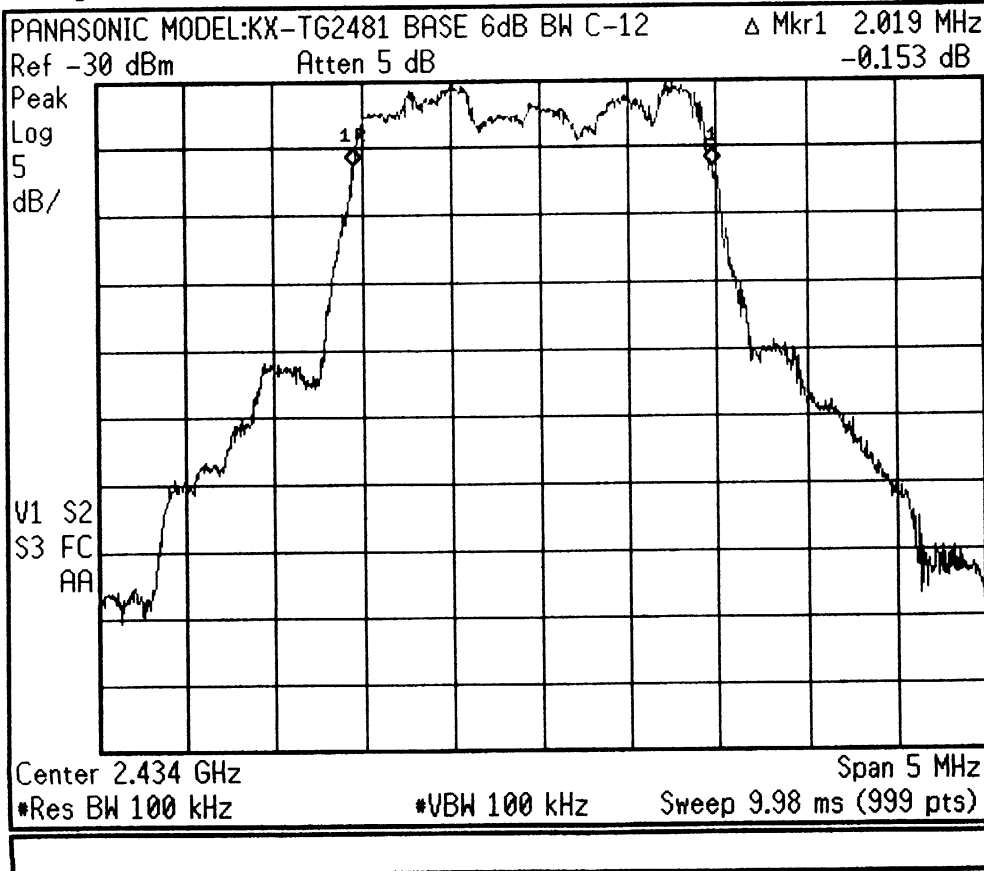


<b>Freq/Channel</b>
<b>Center Freq</b> 2.43450000 GHz
<b>Start Freq</b> 2.43200000 GHz
<b>Stop Freq</b> 2.43700000 GHz
<b>CF Step</b> 500.000000 kHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off



PANASONIC MODEL:KX-TG2481 BASE C-24 Mkr1 2.471264 GHz


Ref -20 dBm Atten 5 dB -40.55 dBm

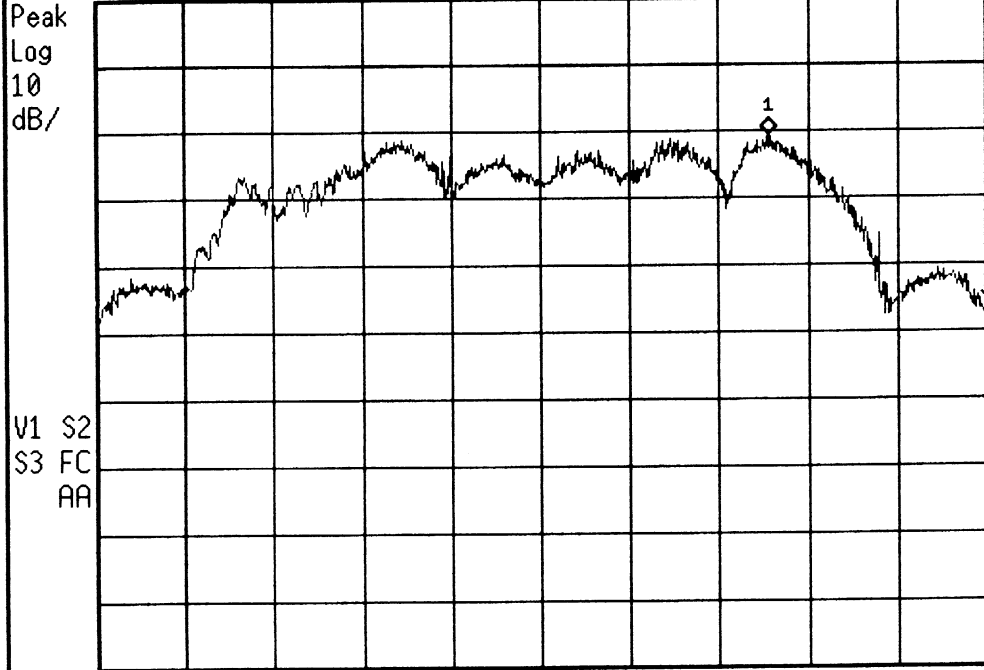

Center 2.47 GHz Span 3 MHz  
\*Res BW 3 kHz \*VBW 3 kHz \*Sweep 1 ks (999 pts)


<b>Freq/Channel</b>
<b>Center Freq</b> 2.47050000 GHz
<b>Start Freq</b> 2.46900000 GHz
<b>Stop Freq</b> 2.47200000 GHz
<b>CF Step</b> 300.000000 kHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

\* Agilent 12:51:48 May 15, 2001

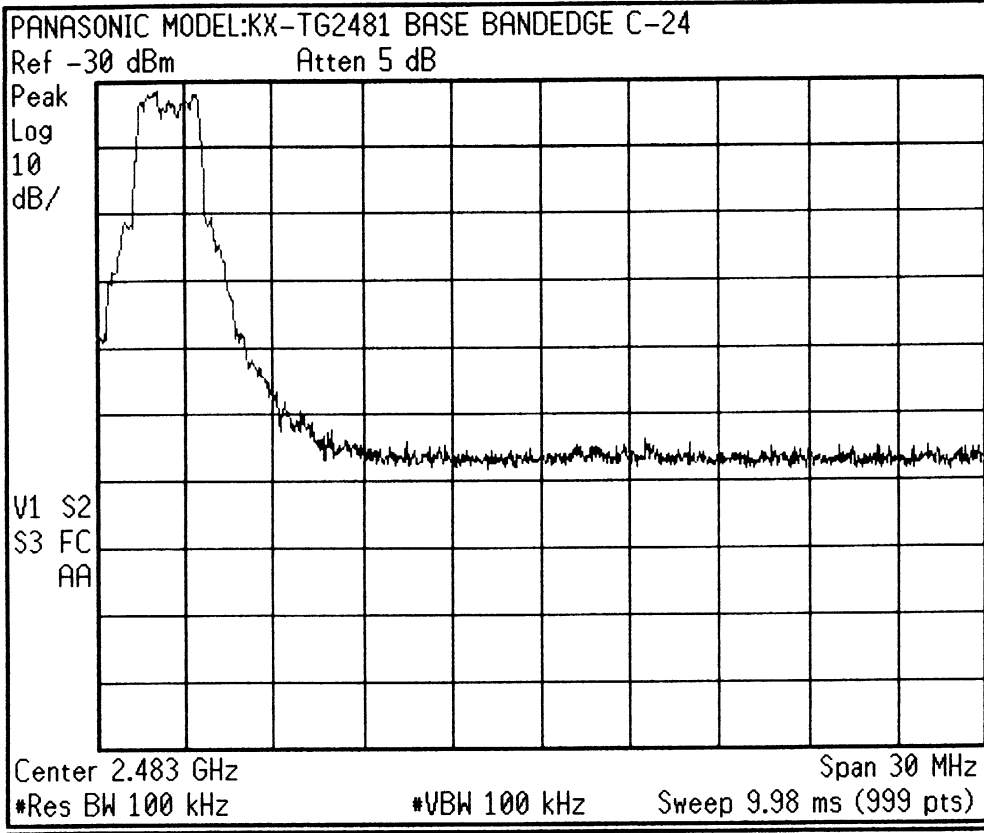

<b>Freq/Channel</b>
<b>Center Freq</b> 2.48300000 GHz
<b>Start Freq</b> 2.46800000 GHz
<b>Stop Freq</b> 2.49800000 GHz
<b>CF Step</b> 3.00000000 MHz Auto      Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On      Off

\* Agilent 12:53:45 May 15, 2001

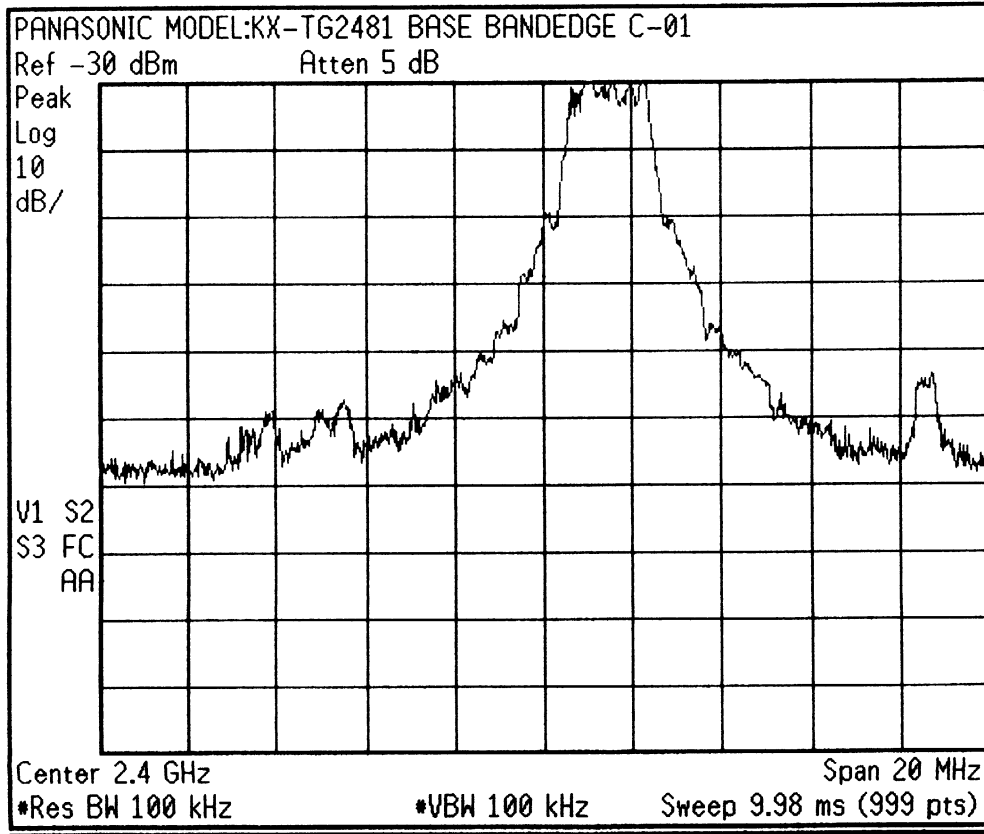

<b>Freq/Channel</b>
<b>Center Freq</b> 2.40000000 GHz
<b>Start Freq</b> 2.39000000 GHz
<b>Stop Freq</b> 2.41000000 GHz
<b>CF Step</b> 2.00000000 MHz Auto      Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On      Off