



Test report no. : 129209-2

Item tested : KX-TG6431

Type of equipment : UPCS Base

FCC ID : ACJ96NKX-TG6431

Client : Panasonic Communications Co. Ltd.

FCC Part 15, subpart D

Isochronous UPCS Device
1920 - 1930 MHz

Industry Canada RSS-213, Issue 2

2 GHz Licence-exempt Personal
Communications Service Devices
(LE-PCS)

3 June 2009

Authorized by : 

Egil Hauger
Technical Verificator



CONTENTS

1 GENERAL INFORMATION 3
1.1 Testhouse Info 3
1.2 Client Information 3
1.3 Manufacturer (if other than client) 3

2 TEST INFORMATION 4
2.1 Tested Item 4
2.2 Test Environment 5
2.3 Test Period 5
2.4 Test Engineer(s) 5
2.5 Test Equipment 5
2.6 Other Comments 5

3 TEST REPORT SUMMARY 6
3.1 General 6
3.2 Test Summary 7

4 TEST RESULTS 8
4.1 Power Line Conducted Emissions 8
4.2 Out-of-band Emissions, Conducted 11

5 TEST SETUPS 13
5.1 Conducted Emission Test 13
5.2 Power Line Conducted Emissions Test 13

6 TEST EQUIPMENT USED 14

1 GENERAL INFORMATION

1.1 Testhouse Info

Name : Nemko AS
Address : Nemko Comlab
Gåsevikveien 8, Box 96
N-2027 Kjeller, NORWAY
Telephone : +47 64 84 57 00
Fax : +47 64 84 57 05
E-mail: comlab@nemko.com
FCC test firm
registration # : 994405
IC OATS
registration # : 2040D-1
Total Number
of Pages: 14

1.2 Client Information

Name : Panasonic Communications Co. Ltd.
Address : 1-62, 4-chome, Minoshima, Hakata-ku, Fukuoka 812-8531, Japan
Telephone : +81 92 477 1405

Contact:

Name : Mr. Junji Sumi
Telephone : +81 92 477 1405
E-mail : sumi.junji@jp.panasonic.com

1.3 Manufacturer (if other than client)

Name : /
Address : /
Telephone : /
E-mail : /

2 Test Information

2.1 Tested Item

Name :	Panasonic
FCC ID :	ACJ96NKX-TG6431
Industry Canada ID :	216A-KXTG6431
Model/version :	KX-TG6431
Serial number :	/
Hardware identity and/or version:	/
Software identity and/or version :	/
Frequency Range :	1921.536 – 1928.448 MHz
Number of Channels :	5 RF Channels, 5x12 = 60 TDMA Duplex Channels
Type of Modulation :	GFSK
User Frequency Adjustment :	None
Rated Output Power :	87 mW Peak Power, 4 mW Time Averaged Power
Type of Power Supply :	Power Adaptor: PQLV219 (36 kHz)
Antenna Connector :	None
Antenna Diversity Supported :	Yes
Number of Antennas :	2

Description of Tested Device(s)

The tested equipment is a DECT base which complies with ETSI EN 300 175. The frequencies have been reprogrammed, the output power reduced and the software updated to comply with the FCC requirements to an Isochronous UPCS device after FCC Part 15D.

The EUT is an responding device as described in ANSI C63.17 and is designed to operate together with a DECT portable part (i.e. a handset), which is then the initiating device.

2.2 Test Environment

Temperature:	22 – 23 °C
Relative humidity:	30 – 40 %
Normal test voltage:	120 V 60 Hz AC

The values are the limit registered during the test period.

2.3 Test Period

Item received date:	2009-05-28
Test period :	from 2009-05-29 to 2009-05-29

2.4 Test Engineer(s)

Frode Sveinsen / Thanh Tran

2.5 Test Equipment

See list of test equipment in clause 6.

2.6 Other Comments

This test report covers only re-tests for use with the new AC Adaptor PQLV219 with frequency 36kHz.
All tests except the Power line conducted emissions tests were performed in conducted mode with a temporary antenna connector.

3 TEST REPORT SUMMARY

3.1 General

Manufacturer: Panasonic
Model No.: KX-TG6431
Serial No.: /

All measurements are traceable to national standards.

The tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with FCC CFR47 Part 15D for Isochronous UPCS Devices and Industry Canada RSS-213 Issue 2.

The conducted test methods have been in accordance with ANSI C63.17-2006 where applicable.

Radiated tests were conducted in accordance with ANSI C63.4-2003. Radiated emissions are made in a 10m semi-anechoic chamber. A description of the test facility is on file with the FCC and Industry Canada.

- | | |
|--|---|
| <input type="checkbox"/> New Submission | <input checked="" type="checkbox"/> Production Unit |
| <input checked="" type="checkbox"/> Class II Permissive Change | <input type="checkbox"/> Pre-production Unit |
| PUB Equipment Code | <input type="checkbox"/> Family Listing |

THIS TEST REPORT APPLIES ONLY TO THE ITEM(S) AND CONFIGURATIONS TESTED.

Deviations from, additions to, or exclusions from the test specifications are described in "Summary of Test Data".



TEST REPORT NO: 129209-5

TESTED BY : Frode Sveinsen
Frode Sveinsen, Chief Engineer

DATE: 2 June 2009

Nemko Group authorizes the above named company to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only. Any reproduction of parts of this report requires approval in writing from Nemko Group.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko Group accepts no responsibility for damages suffered by any third party as a result of decisions made or actions based on this report.

3.2 Test Summary

Name of test	FCC CFR 47 Paragraph #	IC RSS-213 Paragraph #	Verdict
Power Line Conducted Emission	15.107(a) 15.207(a)	6.3 RSS-GEN 7.2.2	Complies
Out-of-band emissions	15.323(d)	6.7.1	Complies ¹

¹ This report covers only frequencies below 1 GHz.

4 TEST RESULTS

4.1 Power Line Conducted Emissions

Para. No.: 15.207 (a)

Test Performed By: Thanh Tran	Date of Test: 29-May-2009
-------------------------------	---------------------------

Measurement procedure: ANSI C63.4-2003 using 50 μ H/50 ohms LISN.


Test Results: Complies

Measurement Data: See attached graph, (Peak detector).


Highest measured value (L1 and N):

All values were below the Average Limit even when measured with Peak Detector.


Frequency	Detector	Measured value	Limit	Margin
KHz	Peak/QP/AV	dB μ V	dB μ V	dB
/	QP	/	/	/
/	AV	/	/	/
/	QP	/	/	/
/	AV	/	/	/

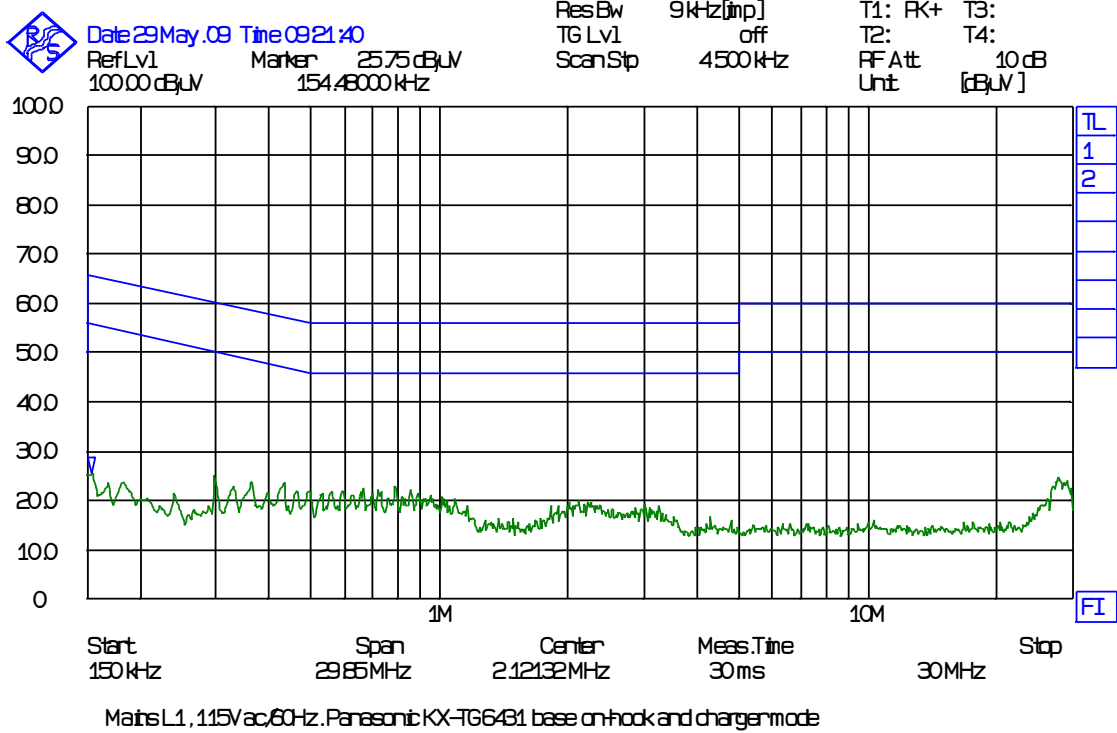


Charge Mode, Standby, Phase L1

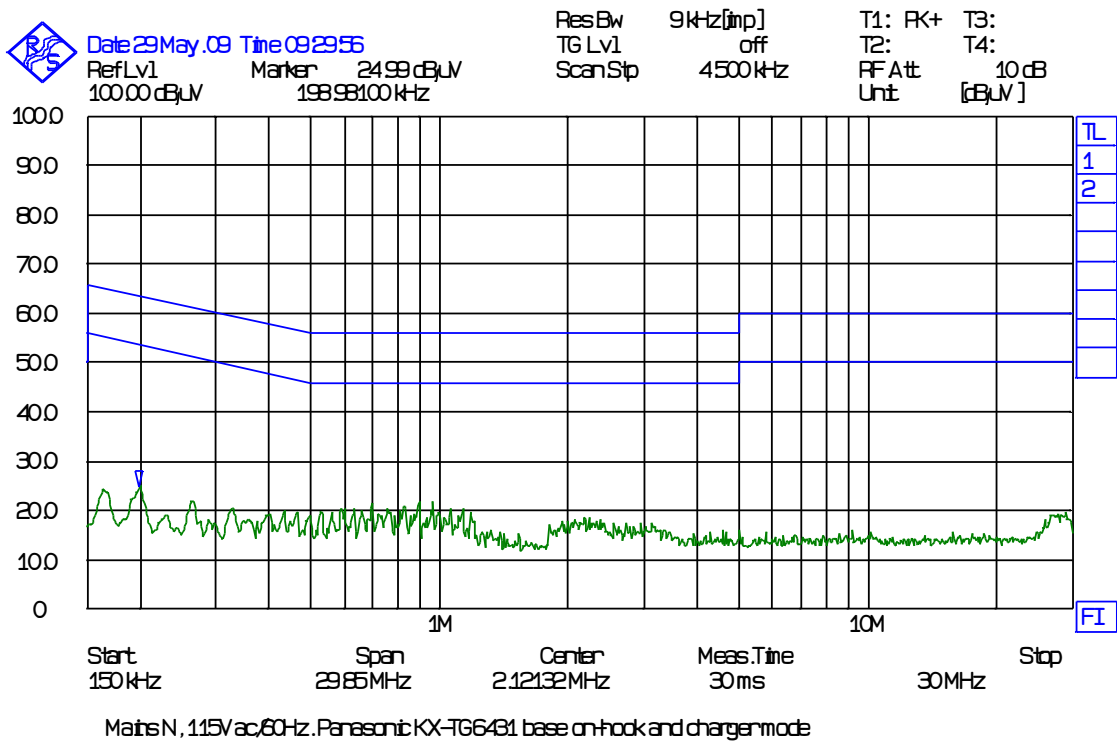

Charge Mode, Standby, Phase N

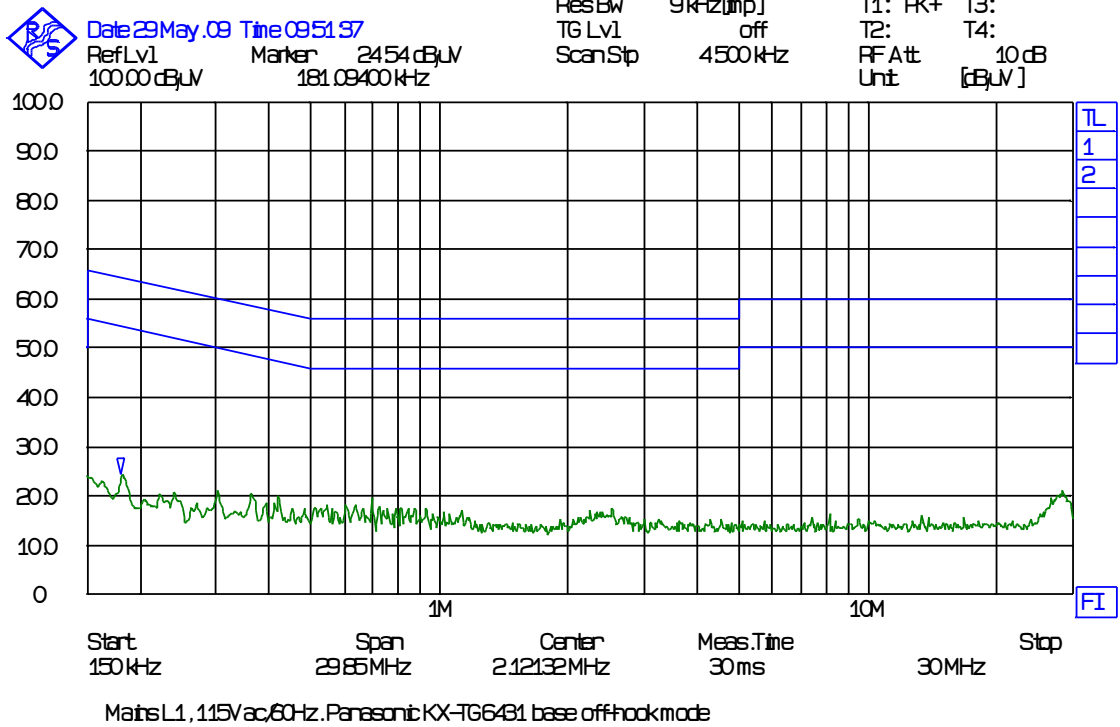

Off-Hook Mode, Phase L1

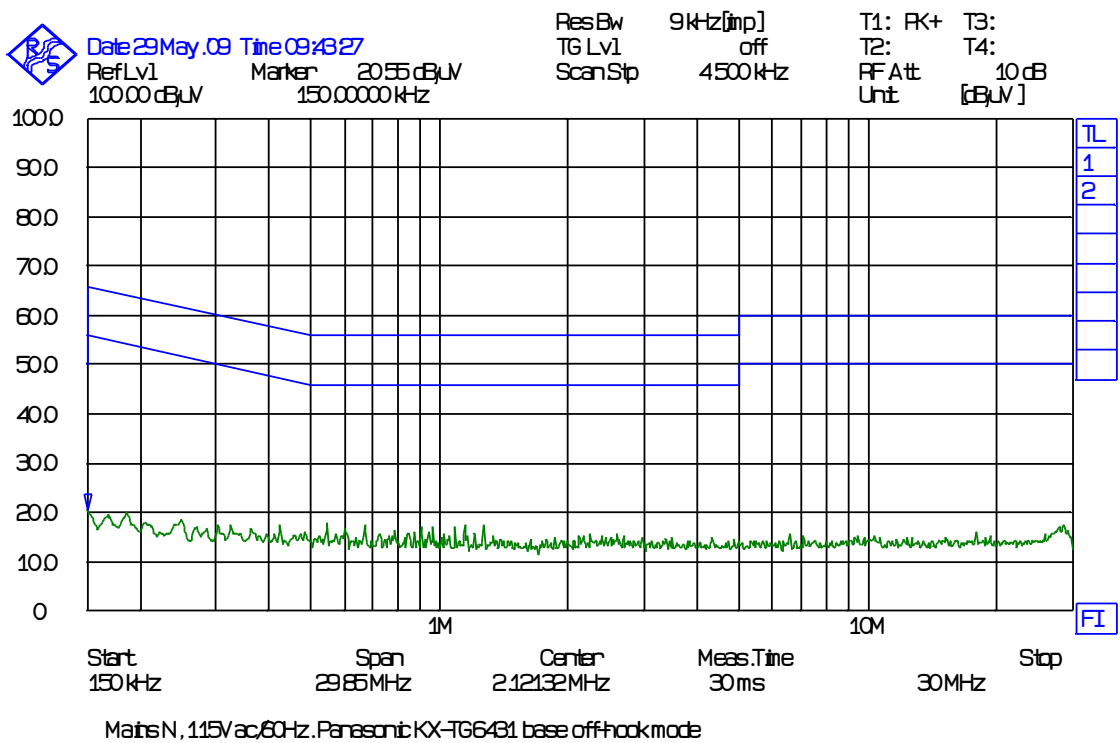

Off-Hook Mode, Phase N

4.2 Out-of-band Emissions, Conducted

Test Method:

ANSI C63.17, clause 6.1.6.2.

Test Results: Complies


Measurement Data:

See plots.

Requirements, FCC 15.323(d):


$f \leq 1.25\text{MHz}$ outside UPCS band :	$\leq -9.5\text{dBm}$
$1.25\text{MHz} \leq f \leq 2.5\text{MHz}$ outside UPCS band :	$\leq -29.5 \text{ dBm}$
$f \geq 2.5\text{MHz}$ outside UPCS band :	$\leq -39.5 \text{ dBm}$

Out-of-Band Emissions, Conducted

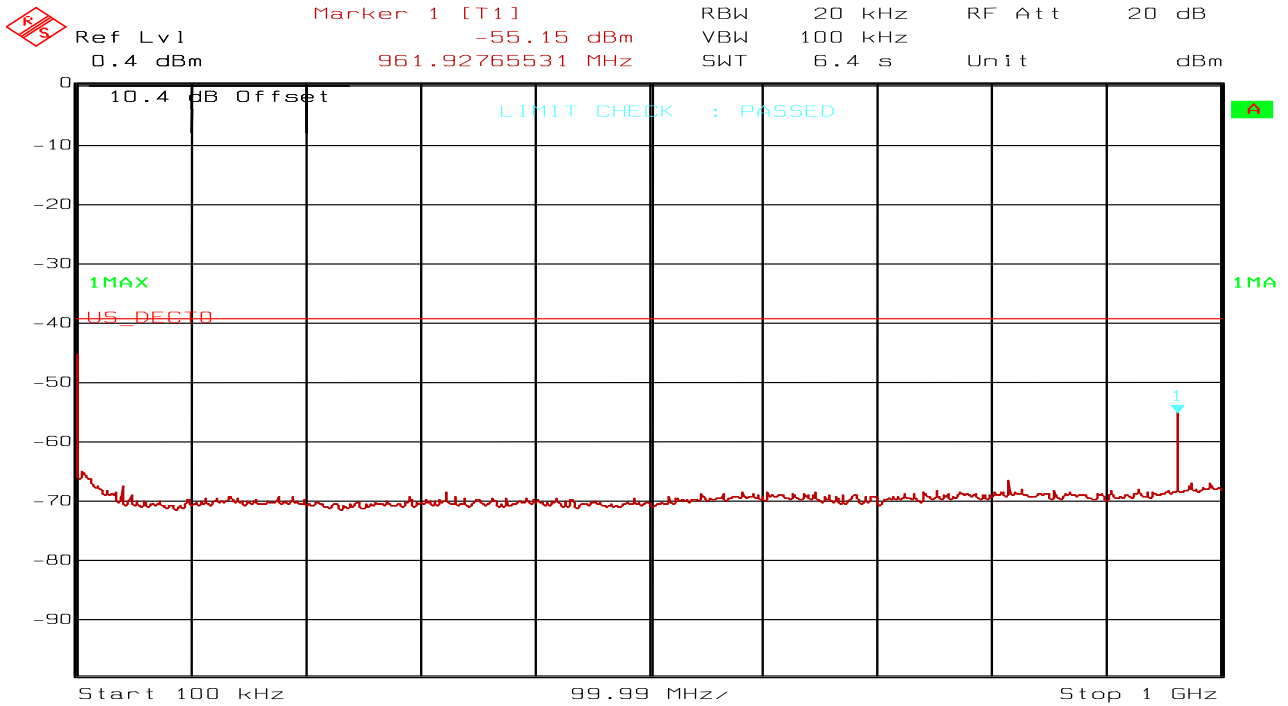

Date: 29.MAY.2009 11:57:34

Conducted Emissions, 0.1 – 1000 MHz

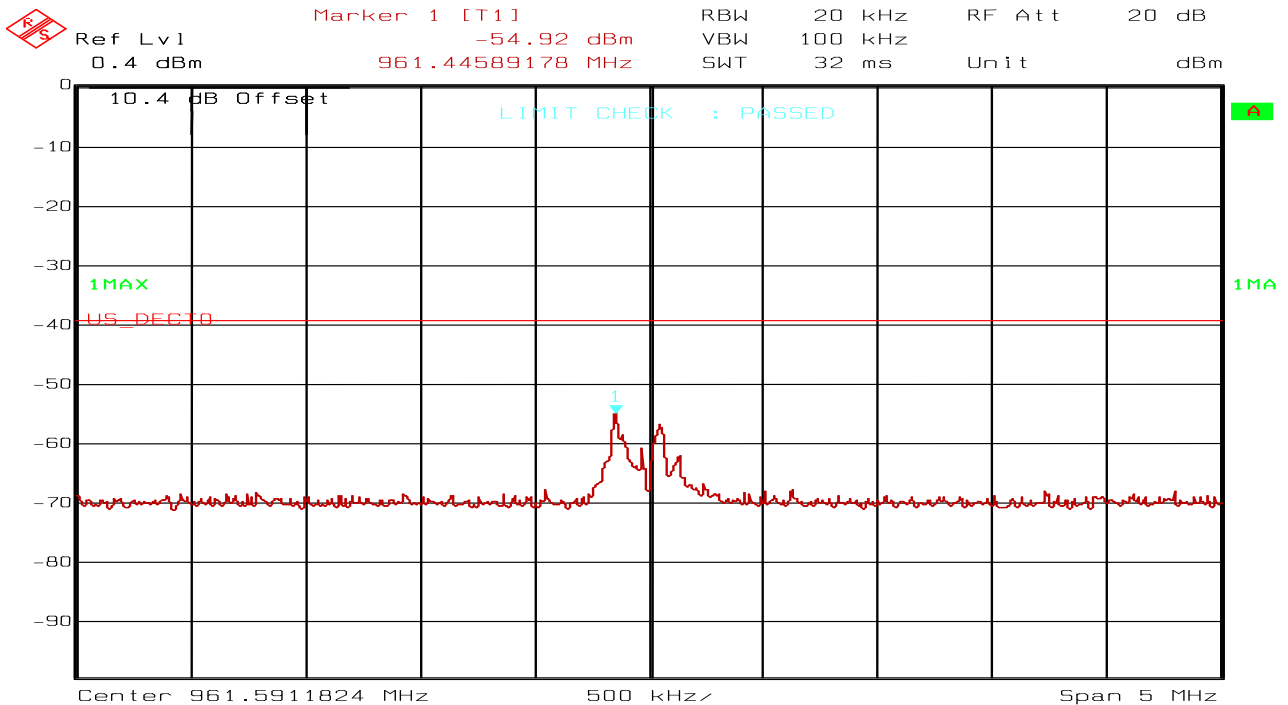


Date: 29.MAY.2009 11:44:26

Conducted Emissions, 961.59 MHz

5 Test Setups

5.1 Conducted Emission Test

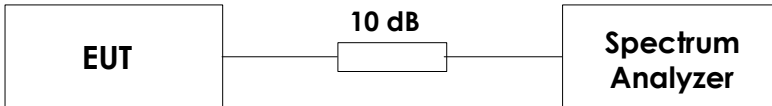


Test equipment included: 1, 13, 29

Test Set-up 3

This setup is used for all conducted emission tests.

5.2 Power Line Conducted Emissions Test

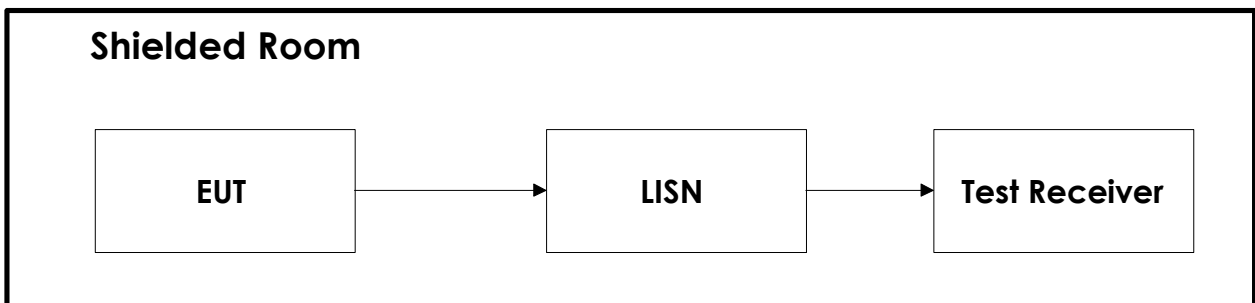

Test equipment: 12, 27, 28

Test Set-Up 5

6 Test Equipment Used

To facilitate inclusion on each page of the test equipment used for related tests, each item of test equipment and ancillaries are identified (numbered) by the Testhouse.

No.	Instrument/ancillary	Type of instrument/ancillary	Manufacturer	Ref. no.
1	FSEK30	Spectrum Analyzer	Rohde & Schwarz	LR 1337
2	SME03	Signal generator	Rohde & Schwarz	LR 1238
3	SMP04	Signal generator	Rohde & Schwarz	LR 1336
4	SMP22	Signal generator	Rohde & Schwarz	LR 1287
5	53310A	Modulation Domain Analyzer	Hewlett Packard	LR 1483
6	81104A	Pulse-/ Pattern Generator	Agilent	LR 1502
7	8470B	Crystal Detector	Hewlett Packard	LR 1207
8	8449B	Preamplifier	Hewlett Packard	LR 1322
9	4HC3000/18000	High-pass filter	Trilithic	S.No.: 9849045
10	ESVS30	Measuring Receiver	Rohde & Schwarz	LR 1101
11	ESN	Measuring Receiver	Rohde & Schwarz	LR 1237
12	ESAI	Measuring Receiver	Rohde & Schwarz	LR 1090
13	6810.17B	Attenuator	Narda	LR 1212
14	6810.17A	Attenuator	Narda	LR 1184
15	745-69	Step Attenuator	Narda	LR 1442
16	WE 1506A	Power Splitter	Weinchel	LR 244
17	WE 1506A	Power Splitter	Weinchel	LR 245
18	H-9	Hybrid	Anzac	LR 1095
19	H-9	Hybrid	Anzac	LR 257
20	S212DS	RF Switch	Narda	LR 1244
21	3115	Horn Antenna	EMCO	LR 1226
22	PM7320-X	Horn Antenna	Sivers Lab	LR 102
23	DBF-520-20	Horn Antenna	Systron Donner	LR 100
24	638	Horn Antenna	Narda	LR 1480
25	HL223	Log-period Antenna	Rohde & Schwarz	LR 1261
26	HK116	Biconical Antenna	Rohde & Schwarz	LR 1260
27	HFH2-Z2	Loop Antenna	Rohde & Schwarz	LR 285
28	ESH3-Z5	Two Line V-Network	Rohde & Schwarz	LR 1076
29	80S	Signal Generator	Powertron	LT 502
30		Power Source	Agilent	LR
31	77	Multimeter	Fluke	LR 302
32	436A	Power Meter	Hewlett Packard	LR 181
33	8485A	Power Sensor	Hewlett Packard	LR 1450