




SAR TEST REPORT


Test Report No. : 26HE0117-HO-3

Applicant : Panasonic Communications Co., Ltd.
Type of Equipment : Cordless Telephone (Portable Unit)
Model No. : KX-TGA572(Handset)
FCC ID : ACJ96NKX-TGA572
Test standard : FCC47CFR 2.1093
FCC OET Bulletin 65, Supplement C
Test Result : Complied
Max. SAR Measured : Head 0.078W/kg (5759.70240MHZ)
Body 0.261W/kg (5759.70240MHZ)

1. This test report shall not be reproduced except full or partial, without the written approval of UL Apex Co., Ltd.
2. The results in this report apply only to the sample tested.
3. This equipment is in compliance with the above standard. We hereby certify that the data contain a true representation of the SAR profile.
4. The test results in this test report are traceable to the national or international standards.

Date of test : April 6, April 9, 2006

Tested by : 
Hisayoshi Sato
EMC Services

Approved by : 
Hironobu Shimoji
Group Leader of EMC Services

<u>CONTENTS</u>	PAGE
SECTION 1 : Client information.....	3
SECTION 2 : Equipment under test (E.U.T.).....	3
2.1 Identification of E.U.T.	3
2.2 Product Description	4
SECTION 3 : Test standard information.....	5
3.1 Requirements for compliance testing defined by the FCC	5
3.2 Exposure limit	6
SECTION 4 : Test result	7
4.1 Result of Max. SAR value	7
4.2 Test Location	7
SECTION 5 : Operation of E.U.T. during testing.....	7
5.1 Operating modes.....	7
5.2 Description of the head test setup.....	8
5.3 Method of measurement (Head SAR)	9
5.4 Description of the Body-worn test setup and Method	9
SECTION 6 : Test surrounding.....	10
6.1 Measurement uncertainty	10
SECTION 7 : Confirmation before testing	11
7.1 Output Power Measurement results.....	11
SECTION 8 : Measurement results.....	12
8.1 Head 5800MHz SAR.....	12
8.2 Body-worn 5800MHz SAR	13
APPENDIX 1 : Photographs of test setup.....	14
APPENDIX 2 : Test instruments.....	22
Equipment & calibration information	23
1. Equipment used.....	23
2. Dosimetry assessment setup.....	25
3. Configuration and peripherals.....	26
4. System components	27
5. Test system specifications.....	29
6. Simulated Tissues Composition of 5GHz	30
7. Validation Measurement	30
8. System validation data	31
9. Validation uncertainty.....	33
10. Validation Measurement data	34
11. System Validation Dipole (D5GHzV2, S/N: 1039).....	36
12. Dosimetric E-Field Probe Calibration (EX3DV3,S/N: 3507)	47
13. References.....	57
APPENDIX 3 : SAR Measurement data.....	58
1. Evaluation procedure	59
2. Measurement data	60

SECTION 1 : Client information

Company Name	Panasonic Communications Co., Ltd.
Brand name	Panasonic
Address	1-62, 4-chome, Minoshima, Hakata-ku, Fukuoka, 812-8531 Japan
Telephone Number	+81-92-477-1405
Facsimile Number	+81-92-477-1487
Contact Person	Kunihiko Nawata

SECTION 2 : Equipment under test (E.U.T.)

2.1 Identification of E.U.T.

Type of Equipment	Cordless Telephone (Portable Unit)	
Model No.	KX-TGA572 (Handset)	
Serial No.	1	
Country of Manufacture	Japan	
Battery	Model Name :	HHR-P105
	Rating :	DC2.4V/830mAh
	Manufacture	Panasonic
Option Battery	N/A	
Accessories	Belt-clip and Headset (Refer to Appendix 1)	
Condition of EUT	Engineering prototype (Not for sale: This sample is equivalent to mass-produced items.)	
Operation Clock	Main clock : 13.824 MHz	
Receipt Date of Sample	March 27, 2006	
Category Identified	Portable device	

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

2.2 Product Description

Radio Specification

Equipment Type	Transceiver
Frequency band	Low Channel = 5759.70240MHz High Channel = 5838.18697MHz
Bandwidth & Channel spacing	Bandwidth:79MHz Channel spacing:891.87kHz
Type of Modulation	FHSS
Antenna Type	5/8 λ Pattern-Antenna
Antenna Connector Type	N/A
Antenna Gain	4dBi Typ.
Antenna location	Refer to Appendix 1
Max. Transmit Power tested (EIRP)	21.1dBm
Mode of Operation	Duplex
ITU code	F1E
Power Supply	DC 3.1V
Method of Frequency Generation	Synthesizer

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

SECTION 3 : Test standard information

3.1 Requirements for compliance testing defined by the FCC

The US Federal Communications Commission has released the report and order "Guidelines for Evaluating the Environmental Effects of RF Radiation", ET Docket No. 93-62 in August 1996. The order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 1.6 mW/g for an uncontrolled environment and 8.0 mW/g for an occupational/controlled environment as recommended by the ANSI/IEEE standard C95.1-1992. According to the Supplement C of OET Bulletin 65 "Evaluating Compliance with FCC Guide-lines for Human Exposure to Radio frequency Electromagnetic Fields", released on Jun 29, 2001 by the FCC, the device should be evaluated at maximum output power (radiated from the antenna) under "worst-case" conditions for normal or intended use, incorporating normal antenna operating positions, device peak performance frequencies and positions for maximum RF energy coupling.

1 Specific Absorption Rate (SAR) is a measure of the rate of energy absorption due to exposure to an RF transmitting source (wireless portable device).

2 IEEE/ANSI Std. C95.1-1992 limits are used to determine compliance with FCC ET Docket 93-62.

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

3.2 Exposure limit

(A) Limits for Occupational/Controlled Exposure (W/kg)

Spatial Average (averaged over the whole body)	Spatial Peak (averaged over any 1g of tissue)	Spatial Peak (hands/wrists/feet/ankles averaged over 10g)
0.4	8.0	20.0

(B) Limits for General population/Uncontrolled Exposure (W/kg)

Spatial Average (averaged over the whole body)	Spatial Peak (averaged over any 1g of tissue)	Spatial Peak (hands/wrists/feet/ankles averaged over 10g)
0.08	1.6	4.0

Occupational/Controlled Environments: are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

General Population/Uncontrolled Environments: are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

<p style="text-align: center;">NOTE:GENERAL POPULATION/UNCONTROLLED EXPOSURE SPATIAL PEAK(averaged over any 1g of tissue) LIMIT 1.6 W/kg</p>

SECTION 4 : Test result

4.1 Result of Max. SAR value

Max. SAR Measured : Head 0.078 W/kg (5759.70240MHz)
 Body 0.261 W/kg (5759.70240MHz)

4.2 Test Location

UL Apex Co., Ltd. Head Office EMC Lab.
4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN
Telephone : +81 596 24 8116
Facsimile : +81 596 24 8124

SECTION 5 : Operation of E.U.T. during testing

5.1 Operating modes

	<p>The frequency band and the modulation used in this test are shown as a following.</p> <p>Frequency band : 5759.70240 – 5838.18697MHz Channel : 1ch(5759.70240MHz) 44ch(5798.05084MHz) 89ch(5838.18697MHz)</p> <p>Modulation : FHSS Crest factor : 5 *</p> <p>Remark* : Because Duty Cycle is 20%, Crest factor becomes "5".</p>
--	---


5.2 Description of the head test setup

According to the OET 65 and IEEE1528, this EUT was tested on the “Cheek/Touch” and “Ear/Tilt” positions at the left head and right head section of the SAM Twin Phantom.

5.2.1 Initial ear position

A handset should be initially positioned with the earpiece region pressed against the ear spacer of a head phantom.

The device should be positioned parallel to the “N-F” line defined along the base of the ear spacer that contains the “ear reference point”. The “test device reference point” is aligned to the “ear reference point” on the head phantom and the “vertical centerline” is aligned to the “phantom reference plane”.

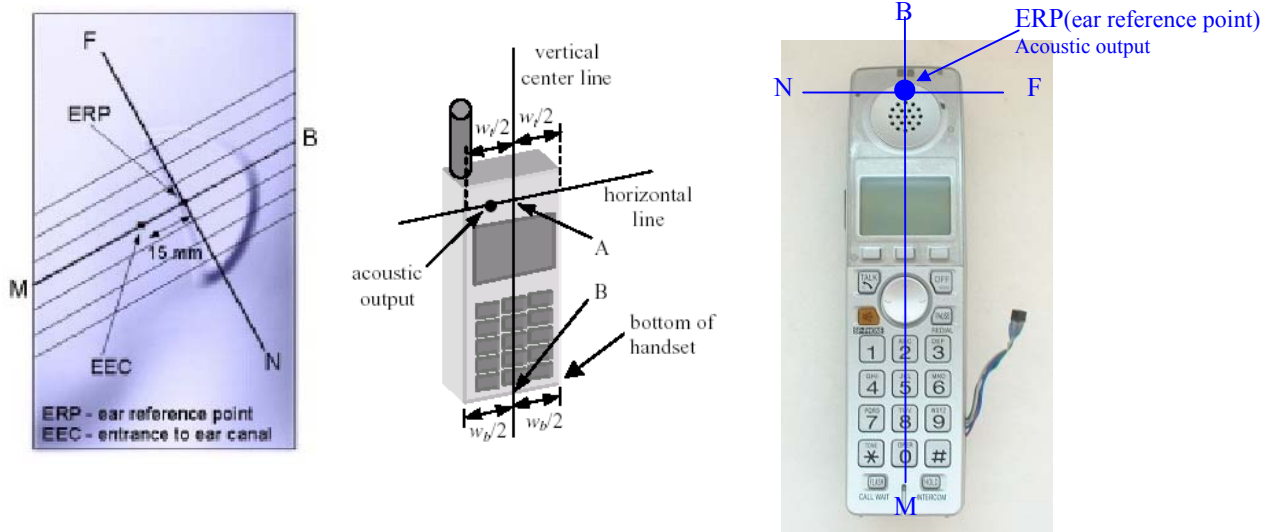


5.2.2 Cheek position

The device is brought toward the mouth of the head phantom by pivoting against the “ear reference point” or along the “N-F” line.

This test position is established:

- i) When any point on the display, keypad or mouthpiece portions of the handset is in contact with the phantom.
- ii) (or) When any portion of a foldout, sliding or similar keypad cover opened to its intended self-adjusting normal use position is in contact with the cheek or mouth of the phantom.

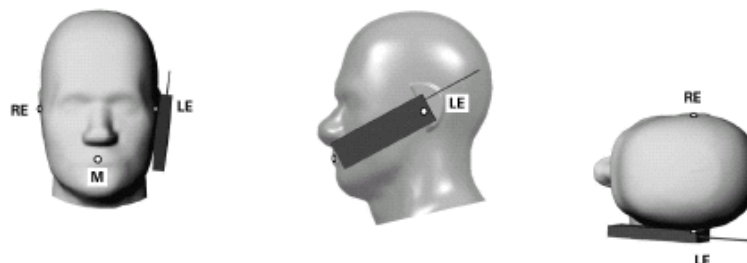

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

5.2.3 Tilt position

If the earpiece of the handset is not in full contact with the phantom's ear spacer and the peak SAR location for the "Cheek/Touch" position is located at the ear spacer region or corresponds to the earpiece region of the handset, the device should be returned to the "initial ear position" by rotating it away from the mouth until the earpiece is in full contact with the ear spacer. Otherwise the handset should be moved away from the cheek perpendicular to the line passes through both "ear reference points" for approximate 2-3 cm. While it is in this position, the handset is tilted away from the mouth with respect to the "test device reference point" by 15°. After the tilt, it is then moved back toward the head perpendicular to the line passes through both "ear reference points" until the device touches the phantom or the ear spacer. If the antenna touches the head first, the positioning process should be repeated with a tilt angle less than 15° so that the device and its antenna would touch the phantom simultaneously.



5.2.4 Antenna position

The antenna of this EUT was built-in antenna.

5.3 Method of measurement (Head SAR)

Step1. The searching for the worst position

Step2. The changing to the Low and High channels

The test was performed at the worst conditions of Step1.

5.4 Description of the Body-worn test setup and Method

This EUT was tested on the "Back" position at the flat section of SAM Twin phantom.

The tested channel was performed in each Low, Mid and High channels.

The tests were performed in the EUT with the belt-clip and headset.(Refer to the Appendix1)

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

SECTION 6 : Test surrounding

6.1 Measurement uncertainty

The uncertainty budget has been determined for the DASY4 measurement system according to the SPEAG documents[6][7] and is given in the following Table.

Error Description	Uncertainty value \pm %	Probability distribution	divisor	(ci) 1g	Standard Uncertainty (1g)	vi or veff
Measurement System						
Probe calibration	± 6.8	Normal	1	1	± 6.8	∞
Axial isotropy of the probe	± 4.7	Rectangular	$\sqrt{3}$	0.7	± 1.9	∞
Spherical isotropy of the probe	± 9.6	Rectangular	$\sqrt{3}$	0.7	± 3.9	∞
Boundary effects	± 2.0	Rectangular	$\sqrt{3}$	1	± 1.2	∞
Probe linearity	± 4.7	Rectangular	$\sqrt{3}$	1	± 2.7	∞
Detection limit	± 1.0	Rectangular	$\sqrt{3}$	1	± 0.6	∞
Readout electronics	± 1.0	Normal	1	1	± 1.0	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	± 0.5	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	± 1.5	∞
RF ambient Noise	± 3.0	Rectangular	$\sqrt{3}$	1	± 1.7	∞
RF ambient Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	± 1.7	∞
Mech. constraints of robot	± 0.8	Rectangular	$\sqrt{3}$	1	± 0.5	∞
Probe positioning	± 9.9	Rectangular	$\sqrt{3}$	1	± 5.7	∞
Extrap. and integration	± 4.0	Rectangular	$\sqrt{3}$	1	± 2.3	∞
Test Sample Related						
Device positioning	± 2.9	Normal	1	1	± 2.9	8
Device holder uncertainty	± 3.6	Normal	1	1	± 3.6	4
Power drift	± 5.0	Rectangular	$\sqrt{3}$	1	± 2.9	∞
Phantom and Setup						
Phantom uncertainty	± 4.0	Rectangular	$\sqrt{3}$	1	± 2.3	∞
Liquid conductivity (target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	± 1.8	∞
Liquid conductivity (meas.)	± 5.0	Normal	1	0.64	± 3.2	∞
Liquid permittivity (target)	± 5.0	Rectangular	$\sqrt{3}$	0.6	± 1.7	∞
Liquid permittivity (meas.)	± 5.0	Normal	1	0.6	± 3.0	∞
Combined Standard Uncertainty						
					± 13.515	
Expanded Uncertainty (k=2)						
					± 27.0	

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

SECTION 7 : Confirmation before testing

7.1 Output Power Measurement results

The output power of EUT is confirmed before the SAR test is executed.

Output power measurement method

- 1) EUT was placed on a platform of nominal size, and raised 1.0m above the conducting ground plane. Test was made with the antenna positioned in both the horizontal and vertical planes of polarization. The Radiated Electric Field Strength intensity has been measured in semi anechoic chamber with absorbent materials lined (Type VHP 12) on a ground plane and at a distance of 3m.
The measuring antenna height was varied between 1 to 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.
The measurements were performed for both vertical and horizontal antenna polarization.
- 2) Exchanged the EUT to the Substitution Antenna, the measurement was set for the same height 1.0m as the EUT. The frequency below 1GHz of the Substitution Antenna was used as the Half wave dipole Antenna, which is harmonized with the measured frequency in 1).
The frequency above 1GHz of the Substitution Antenna was used with Horn Antenna.
The Substitution Antenna was connected with the Signal Generator, and the polarized electromagnetic radiation of the Substitution Antenna was matched with the one of the measuring Antenna, which was set with the Signal Generator to the measured frequency in 1). Then, we set with the Output power (CW) of the Signal Generator where the measuring electromagnetic field is equal to the measured value in 1).
The measuring antenna height was varied between 1 to 4m to obtain the maximum receiving level.
Its Output power of Signal Generator was recorded.
- 3) Effective radiated power was calculated by subtracting the cable loss and the attenuator loss connected between the Signal Generator and the Substitution Antenna from the Output power of the Signal Generator recorded in 2).
For the usage of the Antenna (Horn Antenna) except for the Half wave dipole Antenna (2.15dBi) for the Substitution Antenna, the Effective radiated power was calculated by compensating the finite difference in the Antenna gain of the Half wave dipole Antenna, and Substitution Antenna.

EIRP (Equivalent Isotropically Radiated Power)

Ch	Freq. [MHz]	E-field [dB μ V/m]	EIRP [dBm]
Low	5759.70240	120.4	20.9
Mid.	5798.05084	120.7	21.1
High	5838.18697	120.6	21.0

(Regulation : Section FCC 15.247(b)(1))

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

SECTION 8 : Measurement results

8.1 Head 5800MHz SAR

Liquid Depth (cm) : **15.0** Model : **KX-TGA572**
Parameters : $\epsilon_r = 33.6, \sigma = 5.49$ Serial No. : **1**
Ambient temperature (deg.c.) : **24.5** Modulation : **FHSS**
Relative Humidity (%) : **36** Crest factor : **5**
Date : **April 9,2006** Measured By : **Hisayoshi Sato**

HEAD SAR MEASUREMENT RESULTS								
Frequency		Modulation (Duty 20%)	Phantom Section	EUT Set-up Conditions		Liquid Temp.[deg.c]		SAR(1g) [W/kg]
Channel	[MHz]			Antenna	Position	Before	After	Maximum value of multi-peak
Step1. Position search								
Mid	5798.05084	FHSS	Left head	Fixed	Cheek	23.5	23.5	0.058
Mid	5798.05084	FHSS	Left head	Fixed	Tilt	23.5	23.5	0.047
Mid	5798.05084	FHSS	Right head	Fixed	Cheek	23.6	23.6	0.043
Mid	5798.05084	FHSS	Right head	Fixed	Tilt	23.6	23.6	0.051
Step2. Frequency Change								
Low	5759.70240	FHSS	Left head	Fixed	Cheek	23.5	23.5	0.078
High	5838.18697	FHSS	Left head	Fixed	Cheek	23.6	23.6	0.070
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure / General Population						Body SAR: 1.6 W/kg (averaged over 1 gram)		

*See Appendix 3 for measurement data plots.

8.2 Body-worn 5800MHz SAR

Liquid Depth (cm) : **15.0** Model : **KX-TGA572**
Parameters : $\epsilon_r = 45.8, \sigma = 6.28$ Serial No. : **1**
Ambient temperature (deg.c.) : **24.5** Modulation : **FHSS**
Relative Humidity (%) : **35** Crest factor : **5**
Date : **April 6, 2006** Measured By : **Hisayoshi Ikuta**

BODY-WORN SAR MEASUREMENT RESULTS									
Frequency		Modulation Duty 20%	Phantom Section	EUT Set-up Conditions			Liquid Temp.[deg.c]		SAR(1g) [W/kg]
Channel	[MHz]			Antenna	Position	Separation [mm]	Before	After	Maximum value of multi-peak
Low	5759.70240	FHSS	Flat	Fixed	Back	0	24.0	24.0	0.261
Mid	5798.05084	FHSS	Flat	Fixed	Back	0	24.0	24.0	0.251
High	5838.18697	FHSS	Flat	Fixed	Back	0	24.0	24.0	0.256
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure / General Population							Body SAR: 1.6 W/kg (averaged over 1 gram)		

* See Appendix 3 for measurement data plots.