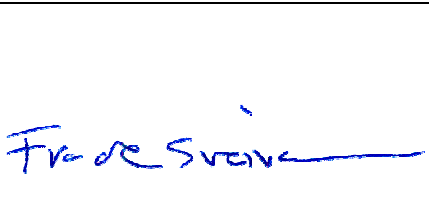
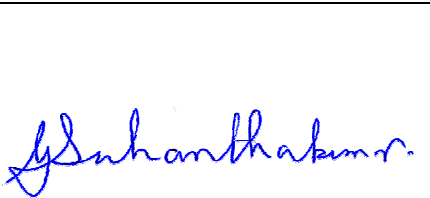


Test Report

Product	BT Transceiver in UPCS Base Station
Name and address of the applicant	Panasonic Corporation of North America
Name and address of the manufacturer	Panasonic System Networks Co., Ltd. 1-62, 4-chome, Minoshima, Hakata-ku Fukuoka 812-8531, Japan
Model	KX-TGE270
Rating	120 V AC (Mains)
Trademark	Panasonic
Serial number	/
Additional information	Bluetooth
Tested according to	FCC Part 15.247 Frequency Hopping Transmitters Industry Canada RSS-210, Issue 8 Low Power Licence-Exempt Radiocommunications Devices
Order number	248567
Tested in period	2013.11.13 to 2013.11.14 and 2013.12.05
Issue date	2013.12.10
Name and address of the testing laboratory	 FCC No: 994405 IC OATS: 2040D-1 Instituttveien 6 Kjeller, Norway TEL: (+47) 64 84 57 00 FAX: (+47) 64 84 57 05
 Prepared by [Frode Sveinsen]  Approved by [G.Suwanthakumar]	
This report shall not be reproduced except in full without the written approval of Nemko. Opinions and interpretations expressed within this report are not part of the current accreditation. This report was originally distributed electronically with digital signatures. For more information contact Nemko.	

CONTENTS

1	INFORMATION	3
1.1	Test Item.....	3
1.2	Test Environment	4
1.3	Test Engineer(s)	4
1.4	Test Equipment	4
2	TEST REPORT SUMMARY	5
2.1	General.....	5
2.2	Test Summary	6
2.3	Description of modification for Modification Filing	6
2.4	Comments	6
2.5	Family List Rational	6
3	TEST RESULTS.....	7
3.1	Power Line Conducted Emissions.....	7
3.2	Channel Separation and 20dB Bandwidth.....	12
3.3	Pseudorandom Hopping Algorithm.....	15
3.4	Occupancy Time.....	16
3.5	Occupied Bandwidth.....	19
3.6	Peak Power Output	22
3.7	Spurious Emissions (Radiated)	29
4	LIST OF TEST EQUIPMENT	55
5	BLOCK DIAGRAM	56
5.1	Power Line Conducted Emission.....	56
5.2	Test Site Radiated Emission	56

1 INFORMATION

1.1 Test Item

Name :	Panasonic
FCC ID :	ACJ96NKX-TGE270
Industry Canada ID :	216A-KXTGE270
Model/version :	KX-TGE270
Serial number :	/
Hardware identity and/or version:	PNLB2279xx
Software identity and/or version :	SW401
Frequency Range :	2402 - 2480 MHz
Number of Channels :	79
Type of Modulation :	Digital (GFSK)
User Frequency Adjustment :	None
Conducted Output Power :	0.0076 Watts (Peak)
Type of Power Supply :	AC Adaptor PNLV226
Antenna Connector :	None
Number of Antennas :	1
Antenna Diversity Supported :	No

Description of Test Item

The EUT is a Bluetooth Module in a DECT Base station.

Exposure Evaluation

The EUT is designed to be fixed to a wall etc. and the user manual contains text that it shall be mounted with a separation distance of at least 20 cm from any humans. For the purposes of exposure evaluation this EUT is a mobile or fixed device. MPE Calculation at 20 cm satisfying FCC requirements is submitted as a separate document.

The EUT is exempted from RF Exposure Evaluation to Industry Canada requirements since the output power complies with the power levels of section 2.5.2 of RSS-102 Issue 4.

1.2 Test Environment

1.2.1 Normal test condition

Temperature:	20.8 – 23.3 °C
Relative humidity:	27 – 43 %
Normal test voltage:	120 V AC

The values are the limit registered during the test period.

1.3 Test Engineer(s)

Frode Sveinsen

1.4 Test Equipment

See list of test equipment in clause 5.

2 TEST REPORT SUMMARY

2.1 General

All measurements are traceable to national standards.

The tests were conducted for the purpose of demonstrating compliance with FCC CFR 47 Part 15, paragraph 15.247 and Industry Canada RSS-210 Issue 8.

Tests were performed in accordance with ANSI C63.4-2003 and DA 00-705 Filing and Guidelines for Frequency Hopping Spread Spectrum Systems.

Radiated tests were made in a semi-anechoic chamber at measuring distances of 3m and 10m.

A description of the test facility is on file with the FCC and Industry Canada.

☒ New Submission

☒ Production Unit

☐ Class II Permissive Change

☐ Pre-production Unit

DSS Equipment Code

☐ Family Listing



THIS TEST REPORT APPLIES ONLY TO THE ITEM(S) AND CONFIGURATIONS TESTED.

Deviations from, additions to, or exclusions from the test specifications are described in "Summary of Test Data".

Nemko Group authorizes the above named company to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only. Any reproduction of parts of this report requires approval in writing from Nemko Group.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko Group accepts no responsibility for damages suffered by any third party as a result of decisions made or actions based on this report.

2.2 Test Summary

Name of test	FCC Part 15 reference	RSS-210 Issue 8 reference	Result
Supply Voltage Variations	15.31(e)	8 (RSS-GEN)	Complies
Number of Operating Frequencies	15.31(m)	A8.1	Complies
Antenna Requirement	15.203	7.1.4 (RSS-GEN)	Complies
Power Line Conducted Emission	15.107(a) 15.207(a)	7.2.2 (RSS-GEN)	Complies
Channel Separation	15.247(a)(1)	A8.1	Complies
Pseudorandom Hopping Algorithm	15.247(a)(1)	A8.1	Complies
Time of Occupancy	15.247(a)(1)(iii)	A8.1	Complies
Occupied Bandwidth	15.247(a)(1)	A8.1	Complies
Minimum 6 dB Bandwidth	15.247(a)(2)	A8.2	N/A ²
Peak Power Output	15.247(b)	A8.4	Complies
Power Spectral Density	15.247(d)	A8.2	N/A ²
Spurious Emissions (Antenna Conducted)	15.247(c)	A8.5	N/A ¹
Spurious Emissions (Radiated)	15.247(c) 15.109(a) 15.209(a)	A8.5	Complies

¹ The tested equipment has integrated antennas only

² Not Applicable for FHSS equipments

2.3 Description of modification for Modification Filing

Not applicable.

2.4 Comments

The measurements were done with the EUT powered by 120 V AC. It was checked that power variations between 85% and 115% did not have any influence on the measurements.

All ports were populated during spurious emission measurements.

2.5 Family List Rational

Not Applicable.

3 TEST RESULTS

3.1 Power Line Conducted Emissions

Para. No.: 15.207 (a)

Test Performed By: Thomas Dangle	Date of Test: 5 Dec 2013
----------------------------------	--------------------------

Measurement procedure: ANSI C63.4-2009 using 50 μ H/50 ohms LISN.

Test Results: Complies

Measurement Data: See attached graph, (Peak detector).

Highest measured value (L1 and N):

On-Hook Mode, Handset Charging, AC Adaptor PNLV226 (UC):


Frequency [MHz]	Level [dBuV]	Af [dB]	Limit [dBuV]	Margin [dB]	Det	Position	Verdict [Pass/Fail]
0.150000	42.60	10.10	66.00	23.40	QP	N	Pass
0.330000	39.60	10.20	59.50	19.90	QP	N	Pass
0.360000	42.20	10.20	58.70	16.50	QP	N	Pass
2.055000	27.40	10.30	56.00	28.60	QP	N	Pass
2.510000	30.40	10.30	56.00	25.60	QP	N	Pass
3.480000	34.30	10.30	56.00	21.70	QP	N	Pass
3.685000	35.10	10.30	56.00	20.90	QP	N	Pass
4.940000	35.00	10.40	56.00	21.00	QP	N	Pass
0.150000	24.40	10.10	56.00	31.60	AV	N	Pass
0.210000	22.60	10.10	53.20	30.60	AV	L1	Pass
0.330000	29.60	10.20	49.50	19.90	AV	N	Pass
0.360000	33.40	10.20	48.70	15.30	AV	N	Pass
0.510000	25.70	10.20	46.00	20.30	AV	L1	Pass
0.690000	18.90	10.20	46.00	27.10	AV	N	Pass
0.840000	16.00	10.20	46.00	30.00	AV	N	Pass
1.060000	15.80	10.20	46.00	30.20	AV	N	Pass
1.620000	15.00	10.30	46.00	31.00	AV	N	Pass
2.055000	16.10	10.30	46.00	29.90	AV	N	Pass
2.510000	19.20	10.30	46.00	26.80	AV	N	Pass
3.480000	24.20	10.30	46.00	21.80	AV	N	Pass
3.685000	24.70	10.30	46.00	21.30	AV	N	Pass
4.940000	24.90	10.40	46.00	21.10	AV	N	Pass
6.155000	22.80	10.50	50.00	27.20	AV	N	Pass
8.040000	20.20	10.60	50.00	29.80	AV	N	Pass
10.805000	18.00	10.60	50.00	32.00	AV	N	Pass
13.595000	16.60	10.80	50.00	33.40	AV	N	Pass

On-Hook Mode, Handset Charging, AC Adaptor PNLV226 (FW):


Frequency [MHz]	Level [dBuV]	Af [dB]	Limit [dBuV]	Margin [dB]	Det	Position	Verdict [Pass/Fail]
0.390000	44.50	10.20	58.10	13.60	QP	N	Pass
0.470000	41.40	10.20	56.50	15.10	QP	N	Pass
0.735000	40.50	10.20	56.00	15.50	QP	N	Pass
0.865000	42.60	10.20	56.00	13.40	QP	N	Pass
1.165000	41.70	10.20	56.00	14.30	QP	N	Pass
1.250000	41.20	10.20	56.00	14.80	QP	N	Pass
1.635000	39.70	10.30	56.00	16.30	QP	N	Pass
2.370000	37.80	10.30	56.00	18.20	QP	N	Pass
2.945000	36.90	10.30	56.00	19.10	QP	N	Pass
3.710000	36.00	10.30	56.00	20.00	QP	N	Pass
4.720000	34.10	10.40	56.00	21.90	QP	N	Pass
0.165000	23.90	10.10	55.20	31.30	AV	L1	Pass
0.235000	17.00	10.10	52.30	35.30	AV	L1	Pass
0.270000	18.60	10.10	51.10	32.50	AV	N	Pass
0.390000	31.90	10.20	48.10	16.20	AV	N	Pass
0.470000	28.50	10.20	46.50	18.00	AV	N	Pass
0.735000	25.20	10.20	46.00	20.80	AV	N	Pass
0.865000	30.80	10.20	46.00	15.20	AV	N	Pass
1.165000	27.60	10.20	46.00	18.40	AV	N	Pass
1.250000	27.40	10.20	46.00	18.60	AV	N	Pass
1.635000	25.70	10.30	46.00	20.30	AV	N	Pass
2.370000	26.30	10.30	46.00	19.70	AV	N	Pass
2.945000	26.10	10.30	46.00	19.90	AV	N	Pass
3.710000	25.90	10.30	46.00	20.10	AV	N	Pass
4.720000	24.30	10.40	46.00	21.70	AV	N	Pass
6.190000	21.10	10.50	50.00	28.90	AV	N	Pass
8.130000	18.70	10.60	50.00	31.30	AV	L1	Pass

On-Hook Mode, Handset Charging, AC Adaptor PNLV226 (ZP):


Frequency [MHz]	Level [dBuV]	Af [dB]	Limit [dBuV]	Margin [dB]	Det	Position	Verdict [Pass/Fail]
0.385000	41.80	10.20	58.20	16.40	QP	L1	Pass
0.735000	33.90	10.20	56.00	22.10	QP	N	Pass
0.865000	34.20	10.20	56.00	21.80	QP	N	Pass
0.995000	33.80	10.20	56.00	22.20	QP	N	Pass
1.255000	33.40	10.20	56.00	22.60	QP	N	Pass
3.580000	30.70	10.30	56.00	25.30	QP	N	Pass
4.470000	31.40	10.40	56.00	24.60	QP	L1	Pass
4.715000	31.70	10.40	56.00	24.30	QP	L1	Pass
7.870000	35.90	10.50	60.00	24.10	QP	N	Pass
8.220000	35.60	10.60	60.00	24.40	QP	N	Pass
13.440000	35.60	10.70	60.00	24.40	QP	N	Pass
13.700000	35.60	10.80	60.00	24.40	QP	N	Pass
0.175000	21.70	10.10	54.70	33.00	AV	L1	Pass
0.240000	21.30	10.10	52.10	30.80	AV	L1	Pass
0.260000	23.60	10.10	51.40	27.80	AV	L1	Pass
0.385000	36.50	10.20	48.20	11.70	AV	L1	Pass
0.420000	7.60	10.20	47.40	39.80	AV	N	Pass
0.475000	21.80	10.20	46.40	24.60	AV	N	Pass
0.520000	20.30	10.20	46.00	25.70	AV	N	Pass
0.735000	22.00	10.20	46.00	24.00	AV	N	Pass
0.865000	22.20	10.20	46.00	23.80	AV	N	Pass
0.995000	23.10	10.20	46.00	22.90	AV	N	Pass
1.255000	20.90	10.20	46.00	25.10	AV	N	Pass
1.645000	15.40	10.30	46.00	30.60	AV	N	Pass
2.600000	15.90	10.30	46.00	30.10	AV	N	Pass
3.580000	18.10	10.30	46.00	27.90	AV	N	Pass
4.470000	23.10	10.40	46.00	22.90	AV	L1	Pass
4.715000	23.40	10.40	46.00	22.60	AV	L1	Pass
7.870000	24.90	10.50	50.00	25.10	AV	N	Pass
8.220000	25.00	10.60	50.00	25.00	AV	N	Pass
13.440000	23.70	10.70	50.00	26.30	AV	N	Pass
13.700000	23.10	10.80	50.00	26.90	AV	N	Pass

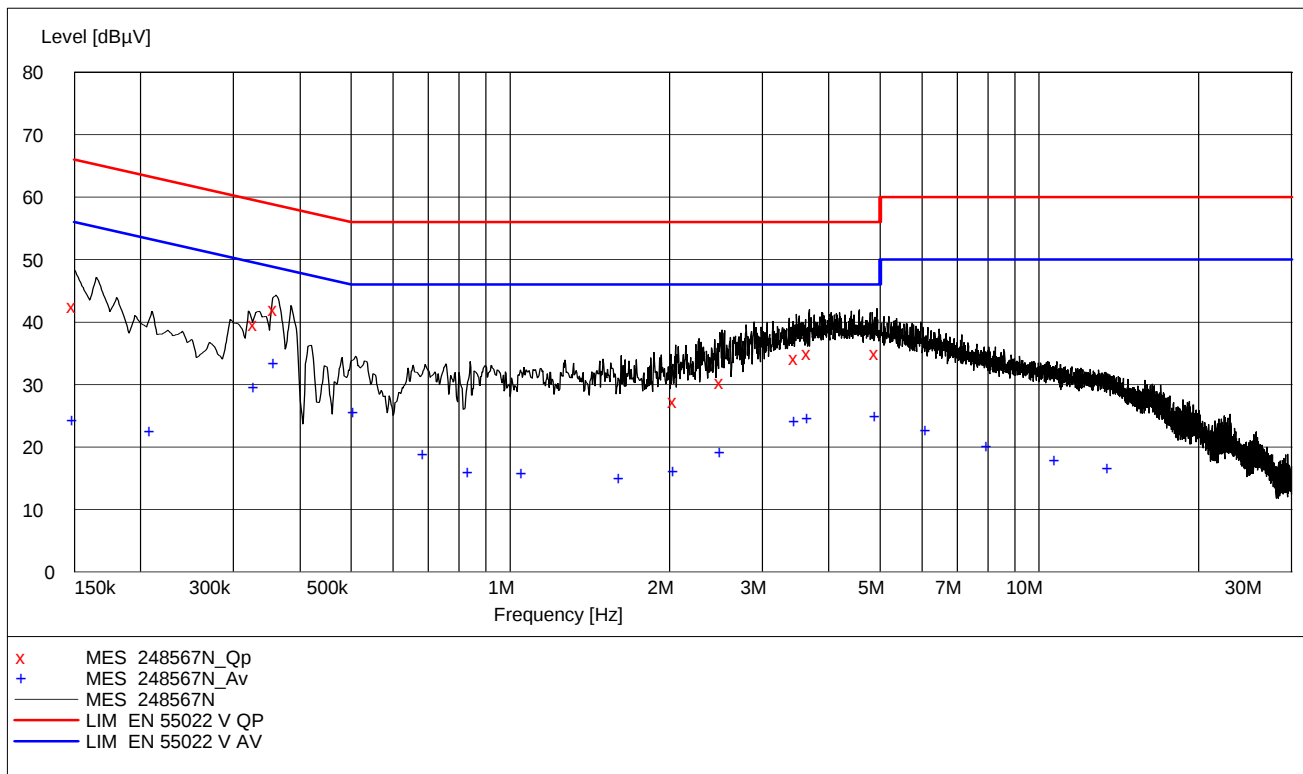

On-Hook Mode, Handset Charging, 120 V AC, AC Adaptor PNLV226 (UC)
Plot shows maximum of Phase L1 and N

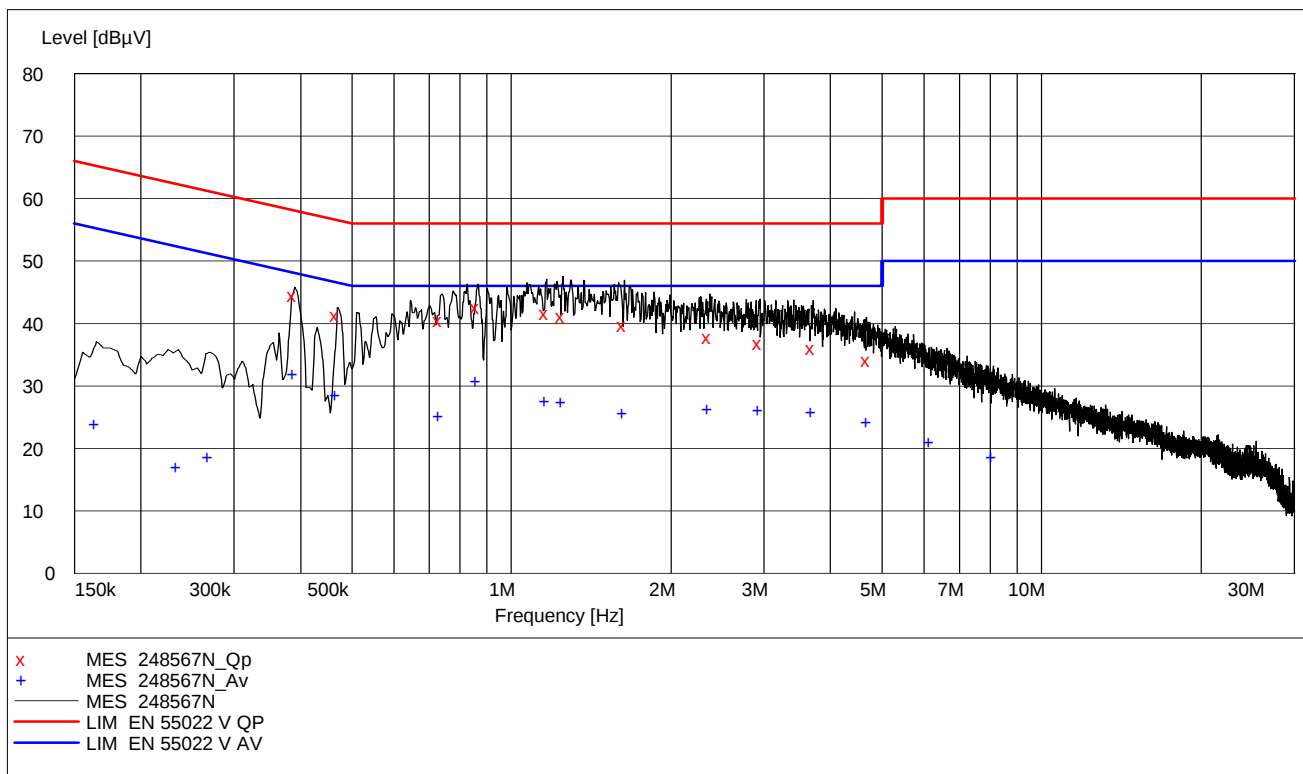

On-Hook Mode, Handset Charging, 120 V AC, AC Adaptor PNLV226 (FW)
Plot shows maximum of Phase L1 and N

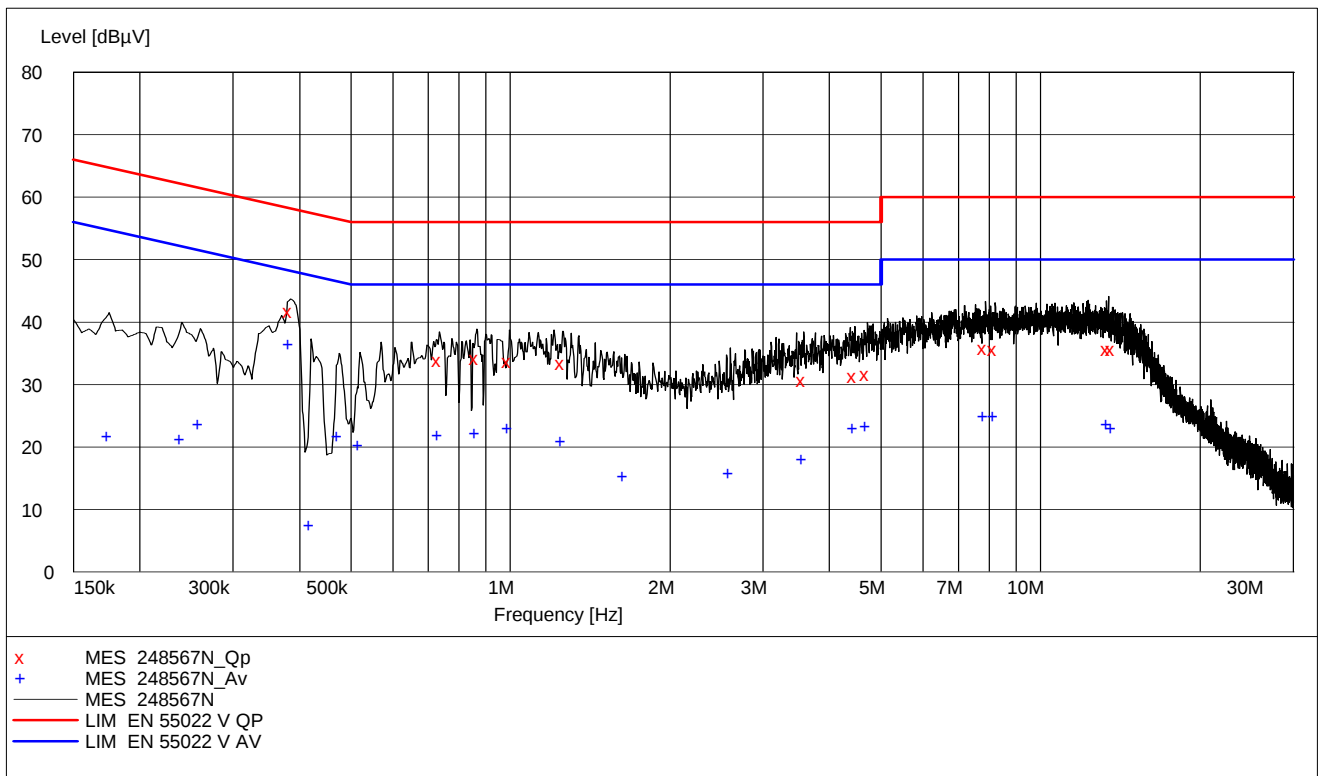

On-Hook Mode, Handset Charging, 120 V AC, AC Adaptor PNLV226 (ZP)
Plot shows maximum of Phase L1 and N

3.2 Channel Separation and 20dB Bandwidth

Para. No.: 15.247 (a)(1)

Test Results: **Complies**

Measurement Data:

Channel Separation:	1.0 MHz
Nominal value for Channel Separation	1.0 MHz
20 dB BW of hopping channel, 2402MHz:	923.1 kHz
20 dB BW of hopping channel, 2441MHz:	921.1 kHz
20 dB BW of hopping channel, 2480MHz:	921.1 kHz

See attached plots


Requirement:

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


or:

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the system operates with an output power no greater than 125 mW.


No requirements for Digital Transmission Systems.

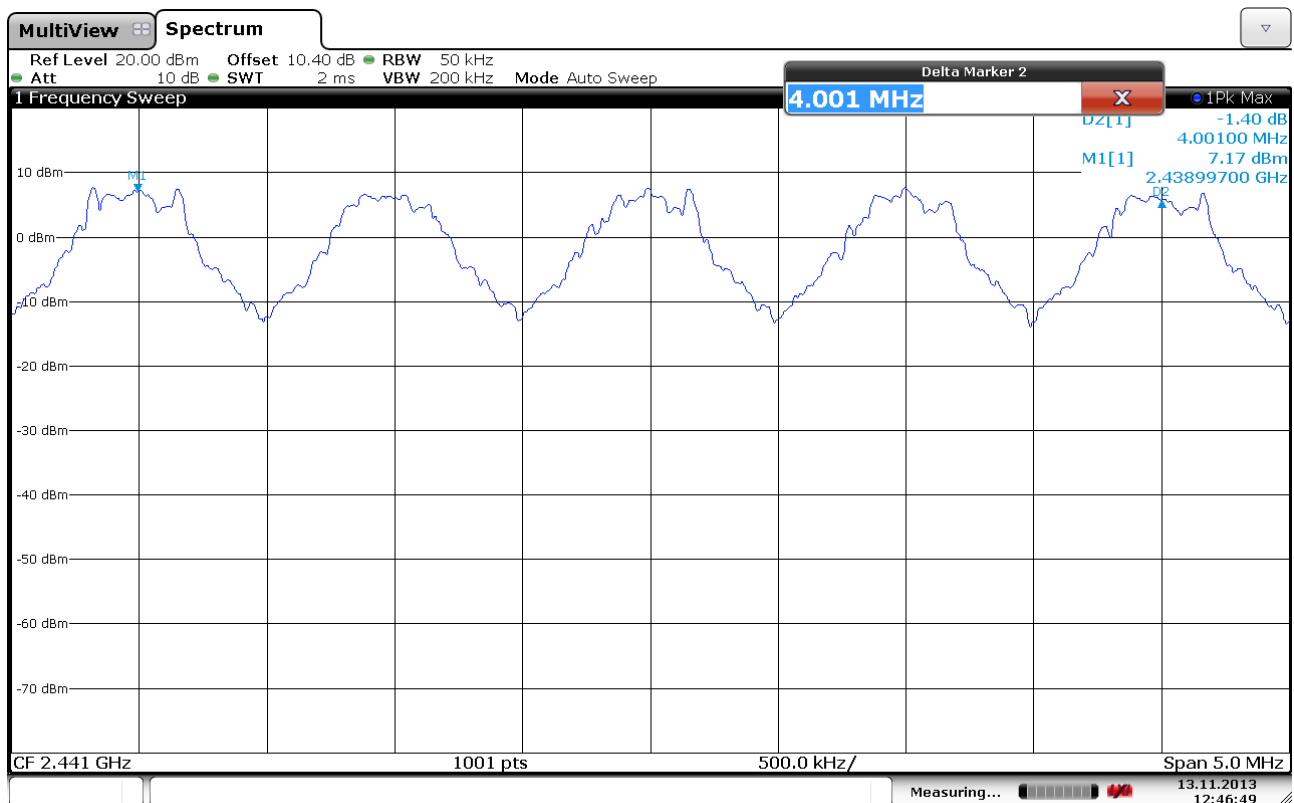


Channel Separation

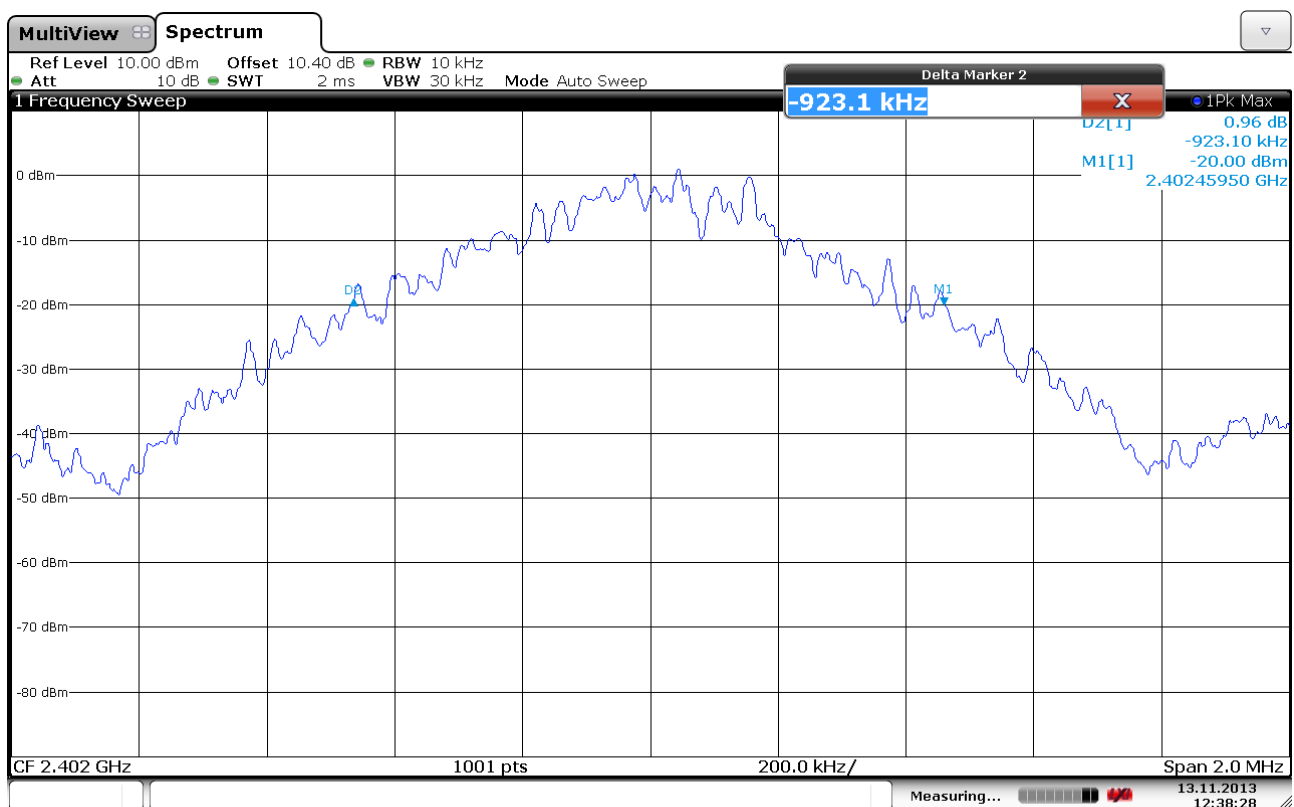

20dB Bandwidth, 2402MHz

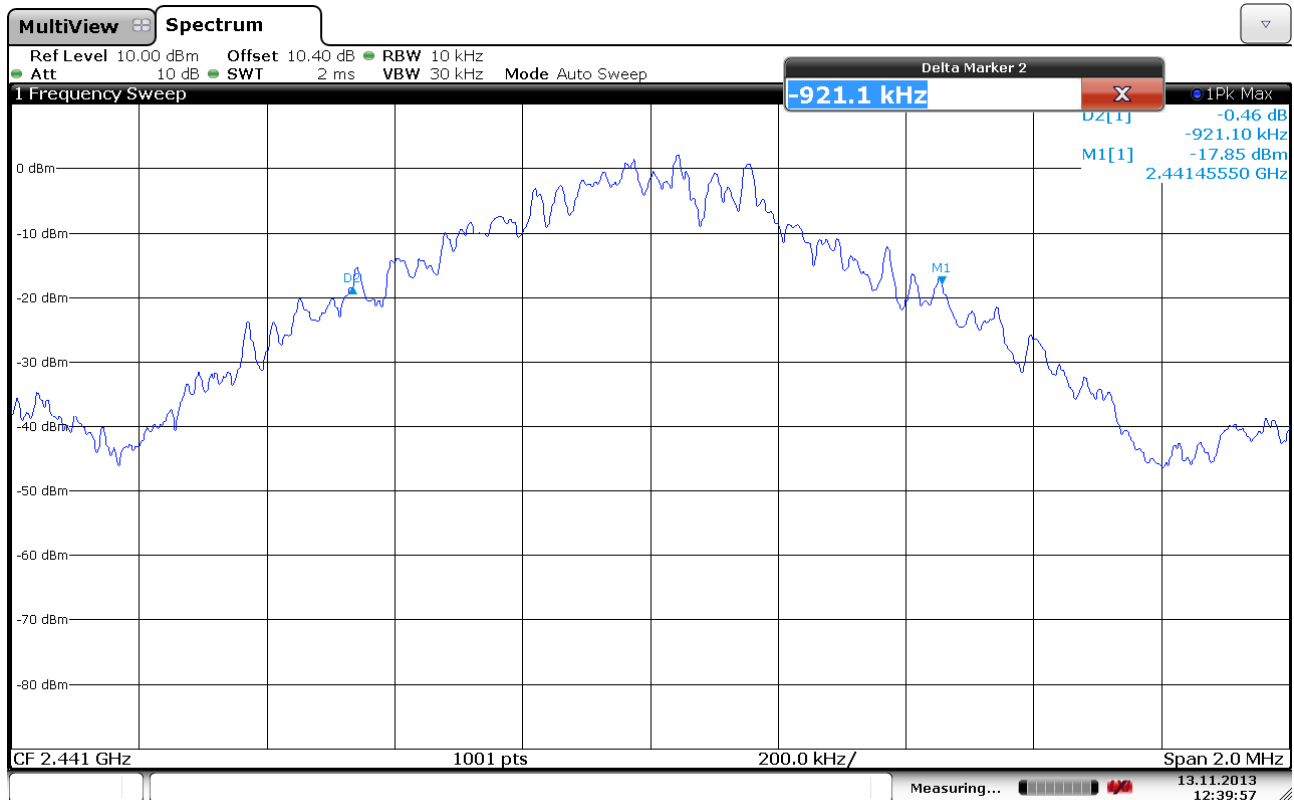

20dB Bandwidth, 2441MHz

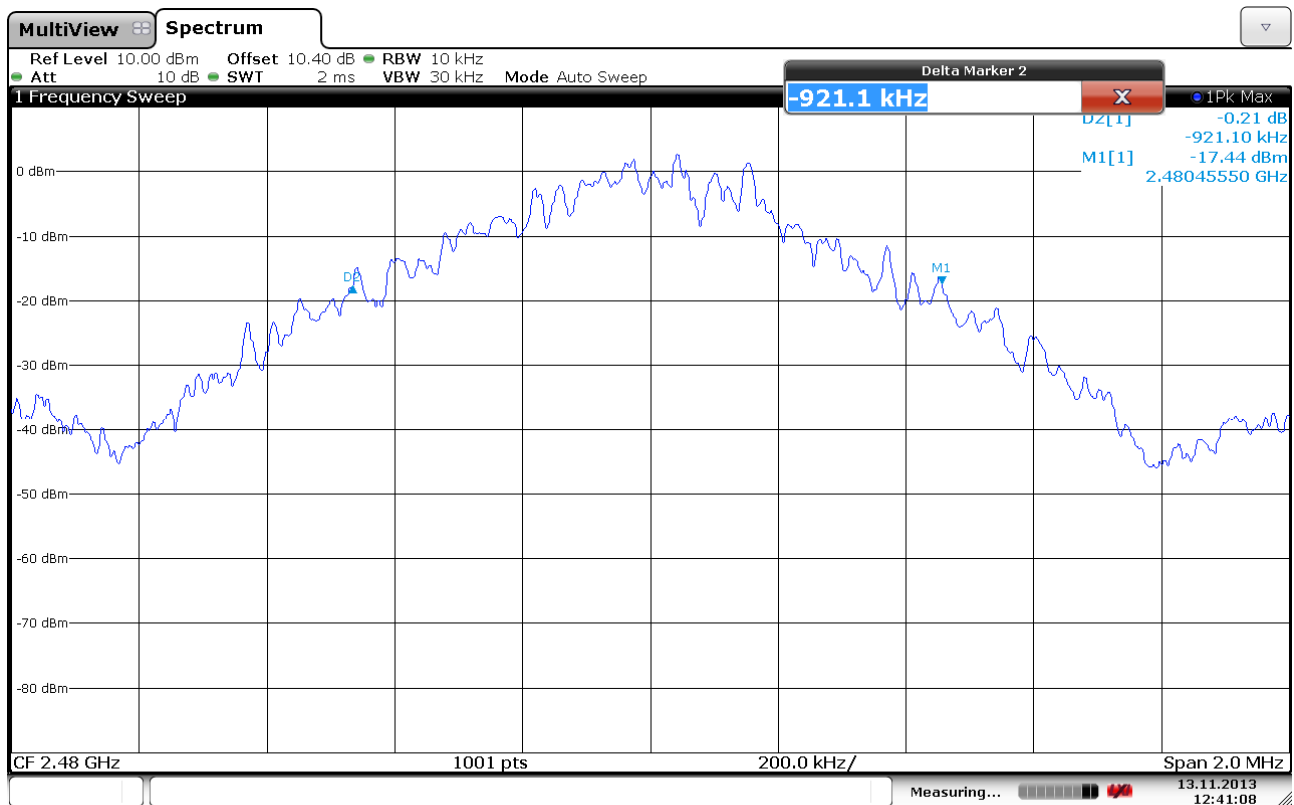

20dB Bandwidth, 2480MHz

3.3 Pseudorandom Hopping Algorithm

Para. No.: 15.247 (a)(1)

Test Results: Complies

Measurement Data: /

Requirements:

The channel frequencies shall be selected from a pseudorandom ordered list of hopping frequencies. Each frequency must be used equally by the transmitter.

No requirements for Digital Transmission Systems.

3.4 Occupancy Time

Para. No.: 15.247 (a)(1)(iii)

Test Results: Complies

Measurement Data:

Minimum Number of RF Channels:	20
Maximum Number of RF Channels:	79
Maximum Length of RF Burst pr. channel	2.90 ms
Time between RF Burst on same RF Channel	75.0 ms (20 ch)
	296.25 ms (79 ch)
Time of Occupancy (20 and 79 ch mode)	309.3 ms

20 Ch Mode:

Time between RF burst on same channel: $3.75 \times 20 \text{ ms} = 75.0 \text{ ms}$

Time of occupancy: $(2.90 \times 400 \times 20) / 75.0 = 309.3 \text{ ms}$

79 Ch Mode:

Time between RF burst on same channel: $3.75 \times 79 \text{ ms} = 296.25 \text{ ms}$


Time of occupancy: $(2.90 \times 400 \times 79) / 296.25 = 309.3 \text{ ms}$

See attached graph.


Requirements:

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.


No requirements for Digital Transmission Systems.

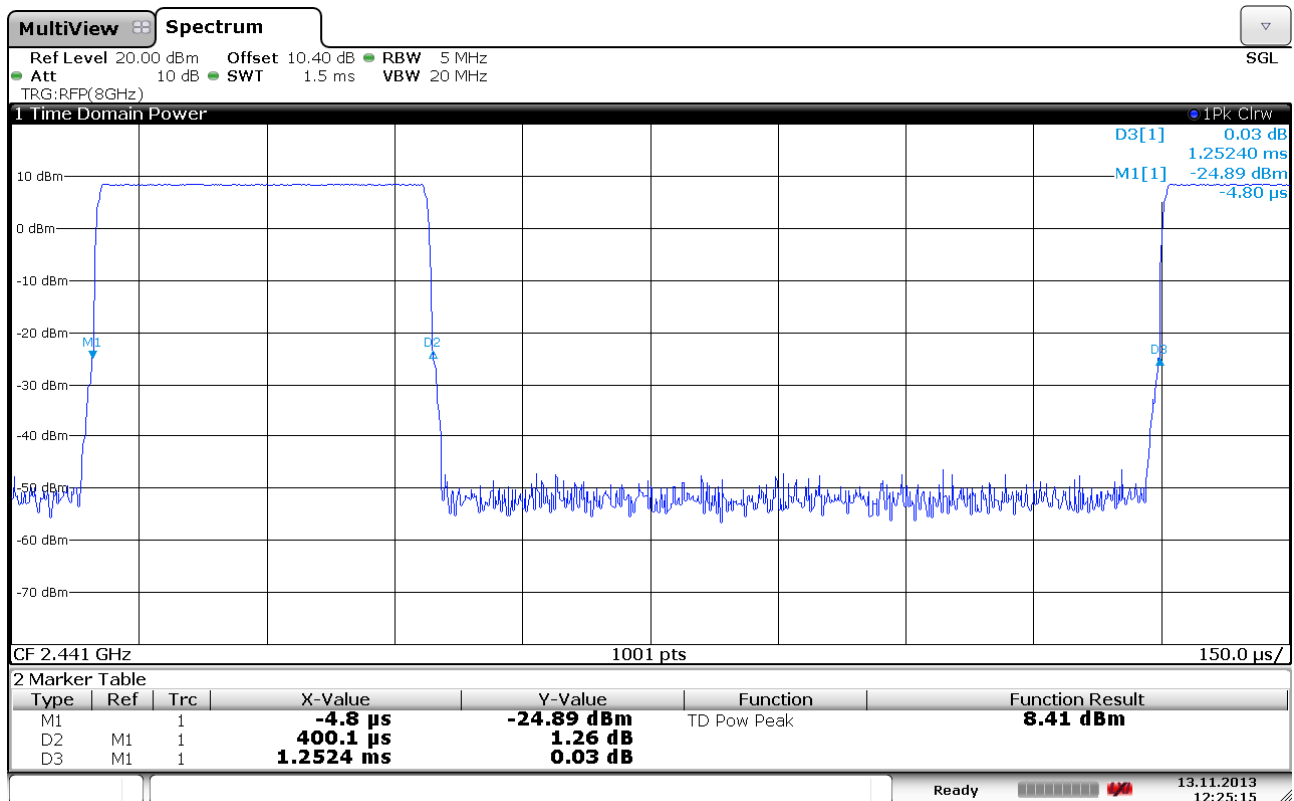

Burst Length, DH1

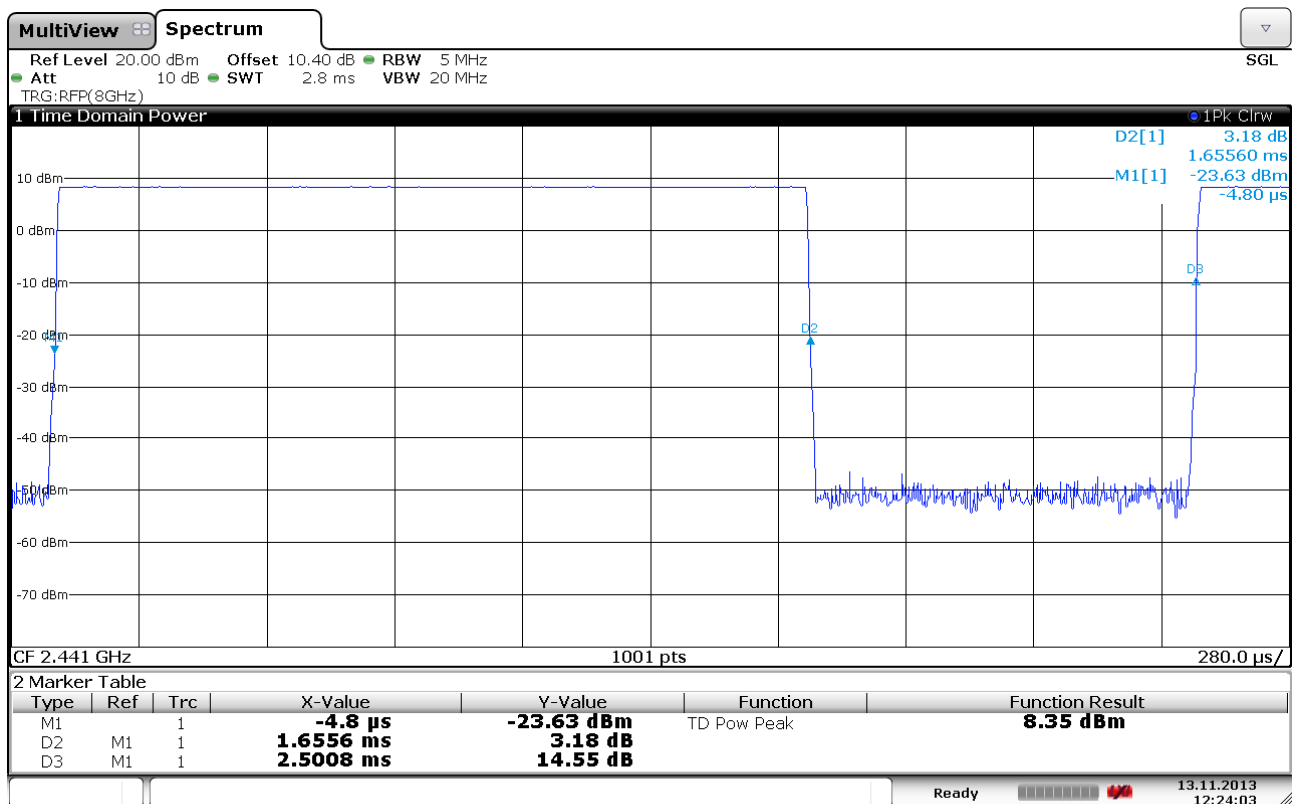

Burst Length, DH3

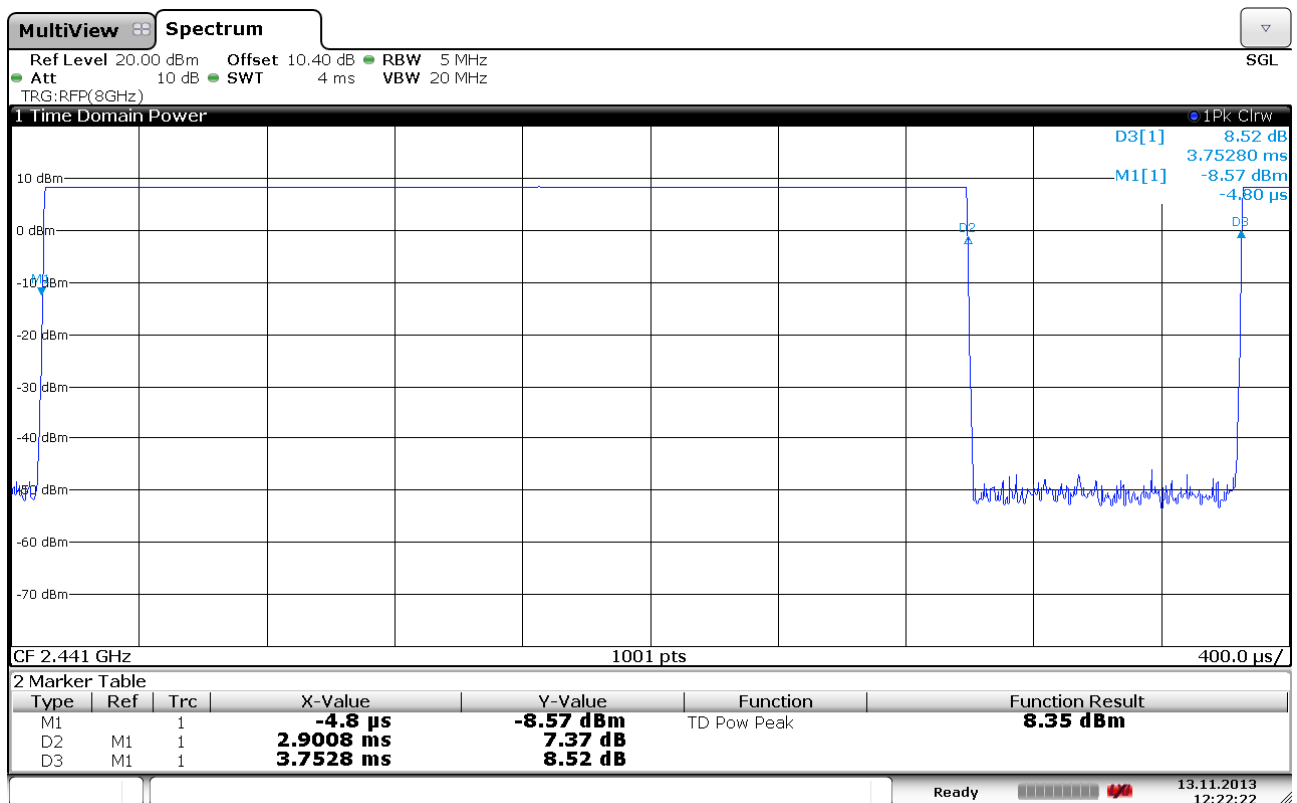

Burst Length, DH5

3.5 Occupied Bandwidth

Para. No.: 15.247 (a)(1)(iii)

Test Results: **Complies**

Measurement Data:

Number of RF Channels in use:	20 or 79 RF channels in use
Channel Centre Frequencies:	The channels are centered at each full MHz from 2402 to 2480 MHz

See attached plots.


Requirements:

Frequency hopping systems in the 2400 - 2483.5 MHz band shall use at least 15 non-overlapping channels.


No requirements for bandwidth for this frequency band.

No requirements for Digital Transmission Systems.


No requirement for 99% BW, reported for information only.

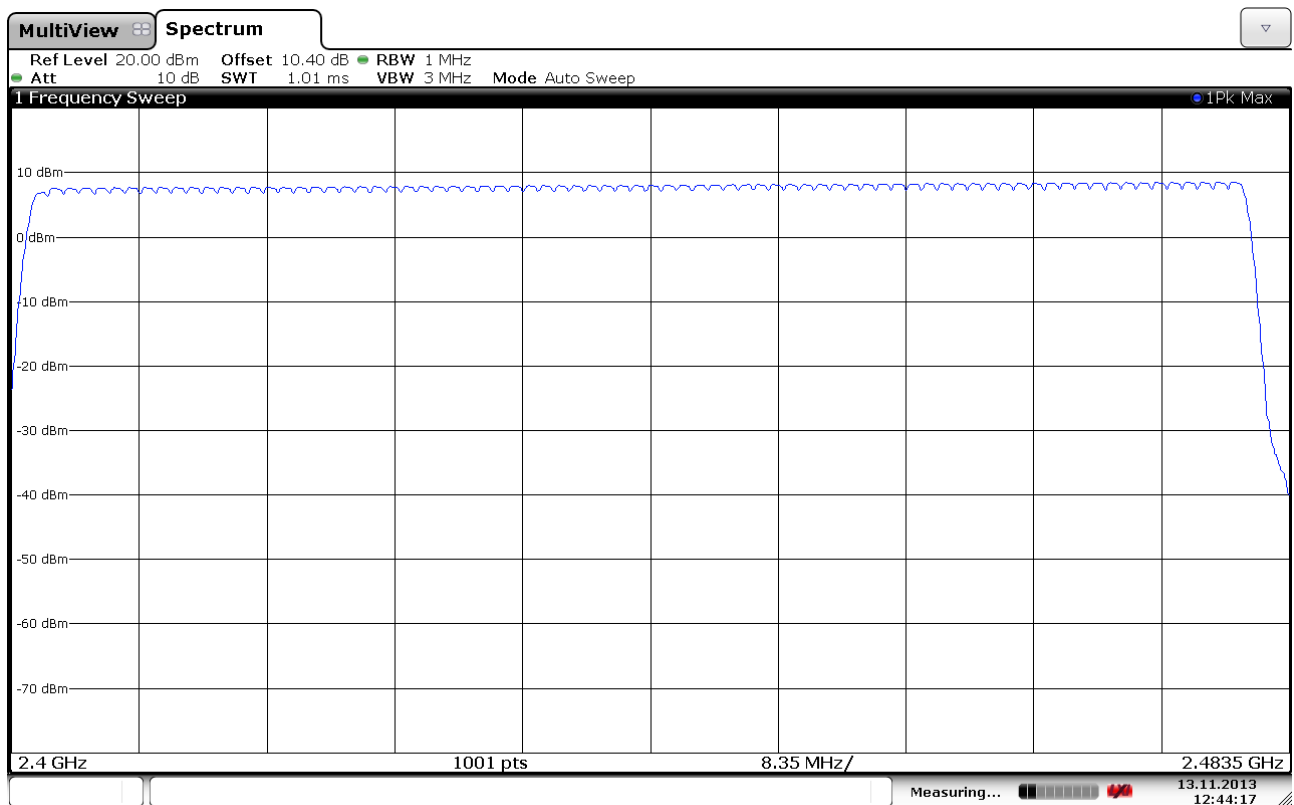


RF Channels in Use, Full Band

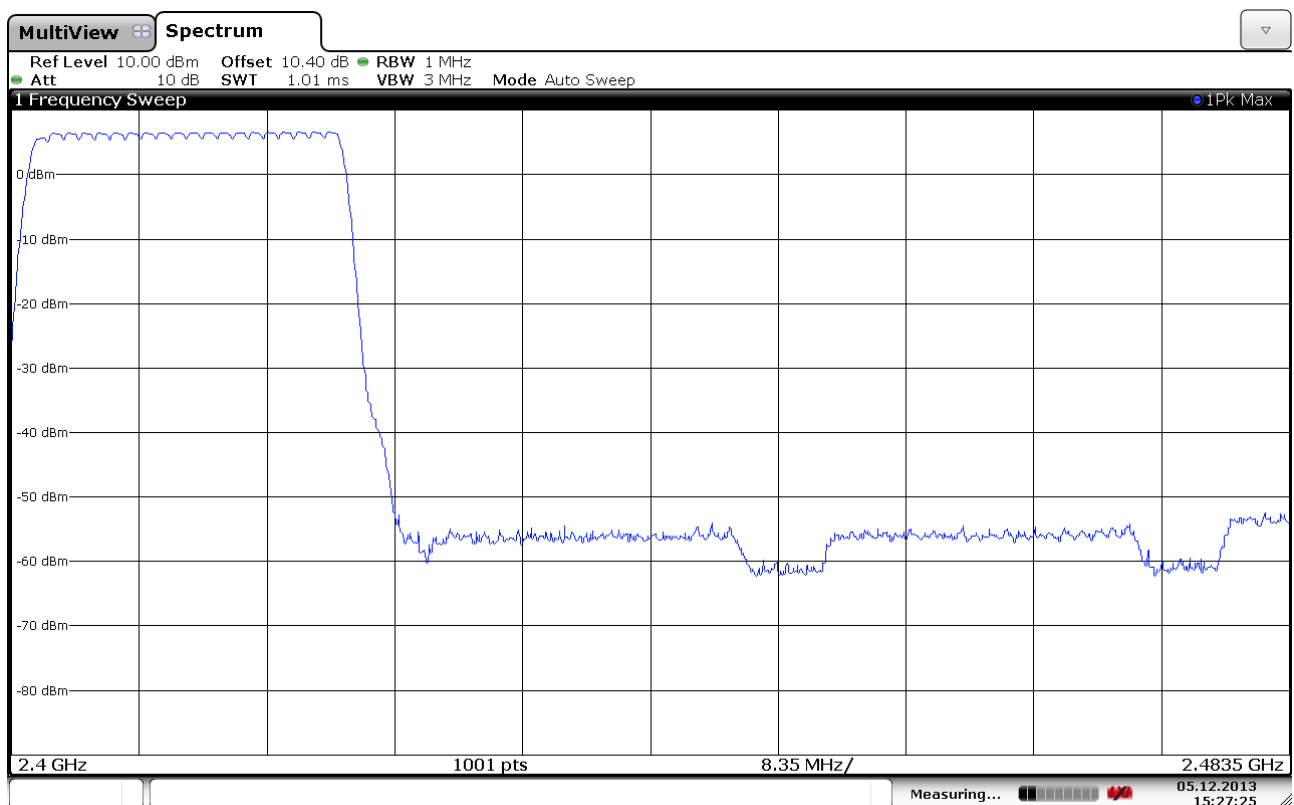

RF Channels in Use, 20 Channels, Lower

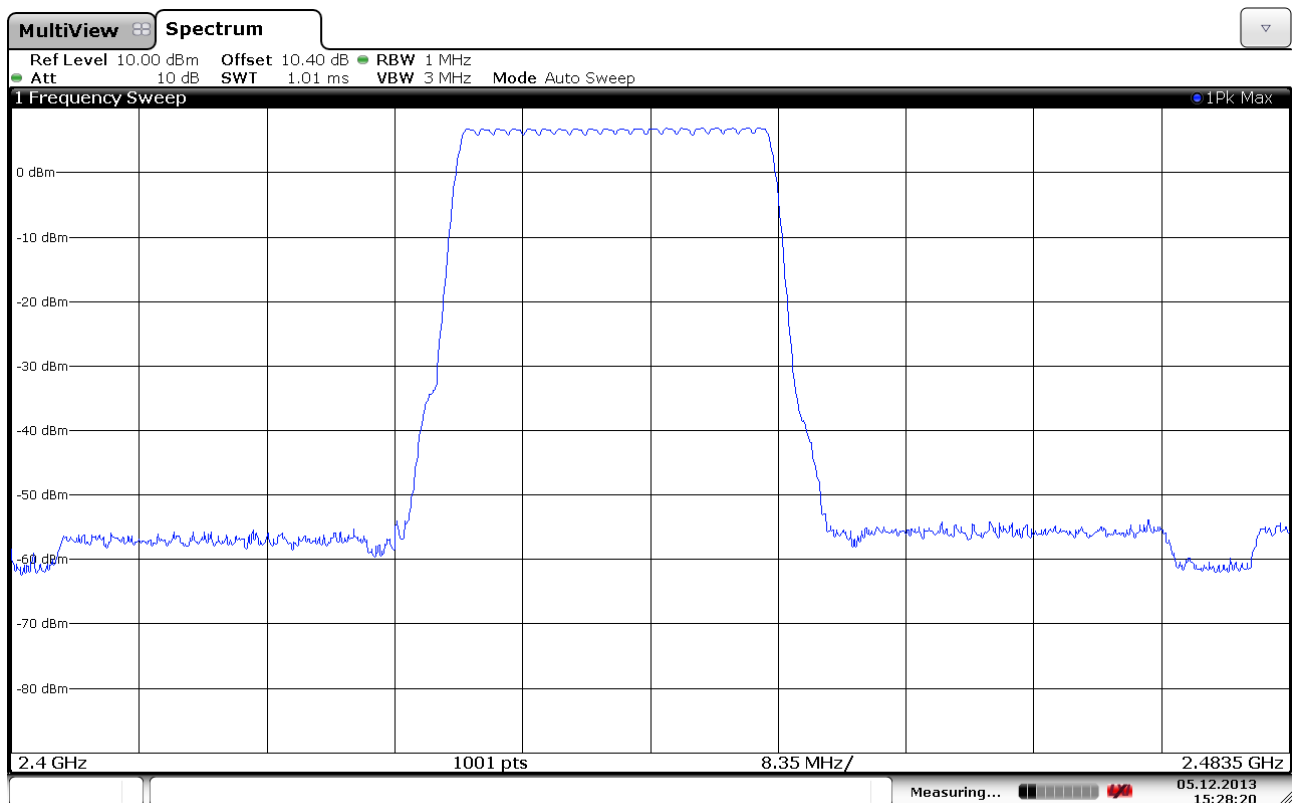

RF Channels in Use, 20 Channels, Middle

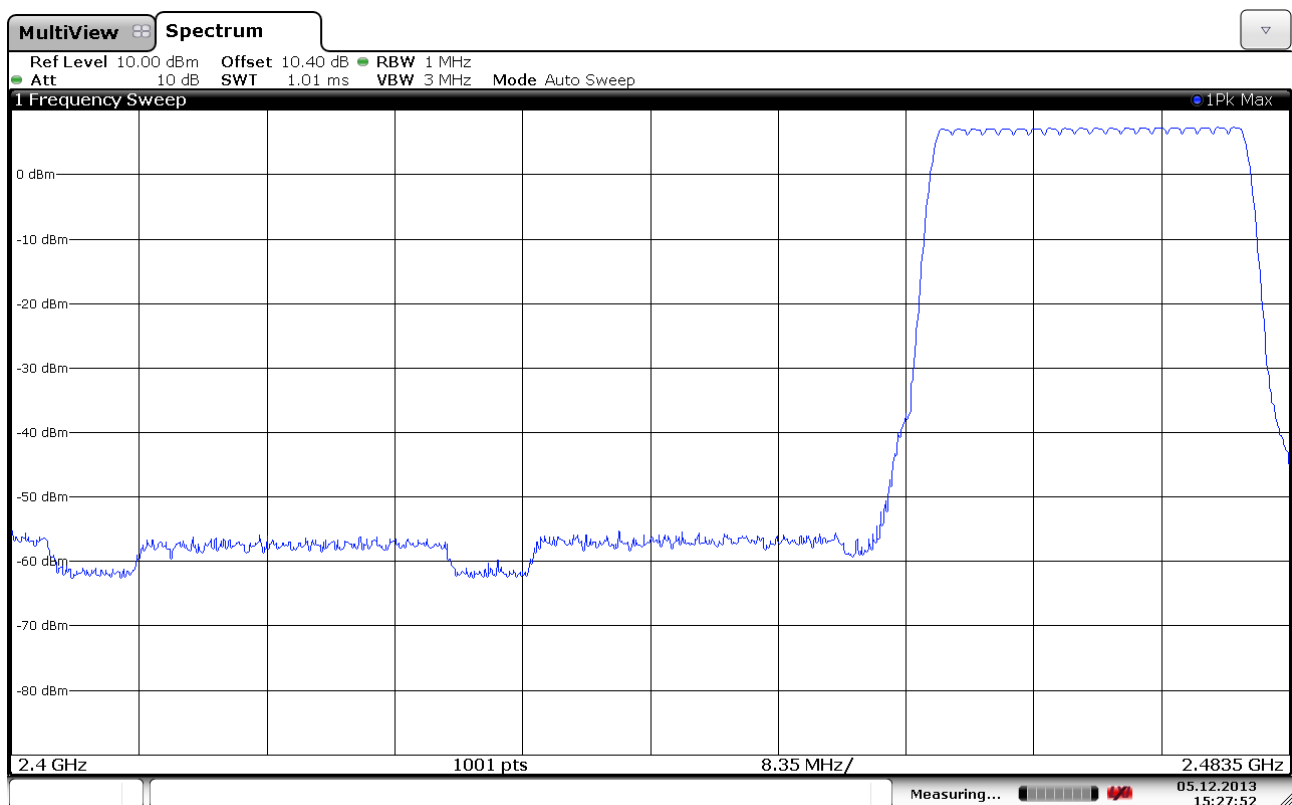

RF Channels in Use, 20 Channels, Upper

3.6 Peak Power Output

Para. No.: 15.247 (b)

Test Results: Complies

Measurement Data:

	2402 MHz	2441 MHz	2480 MHz
Peak Power (dBm)	7.3	8.4	8.8
Peak Power (Watts)	0.0053	0.0069	0.0076
Field Strength (dBμV/m)	98.0	99.0	100.7
EIRP, Calculated (Watts)	0.0019	0.0024	0.0035
Antenna gain (dBi)	-4.5	-4.6	-3.3

Antenna gain = $10 \cdot \log(\text{EIRP} / \text{Conducted power})$ dBi

EIRP is calculated from measured field strength by the formulas in KDB 412172 D01 Determining ERP and EIRP v01.

See attached graph.

Detachable antenna?

☐ Yes ☒ No

If detachable, is the antenna connector non-standard?

☐ Yes ☐ No

Type of antenna connector: /

Requirements:


The maximum peak output power shall not exceed the following limits:

For frequency hopping systems employing at least 75 hopping channels: 1 Watt

For all other frequency hopping systems in the 2400 - 2483.5 MHz band: 0.125 Watts

For Digital Transmission Systems in the 2400 - 2483.5 MHz band: 1 Watt

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power from the intentional radiator shall be reduced below the stated value above by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

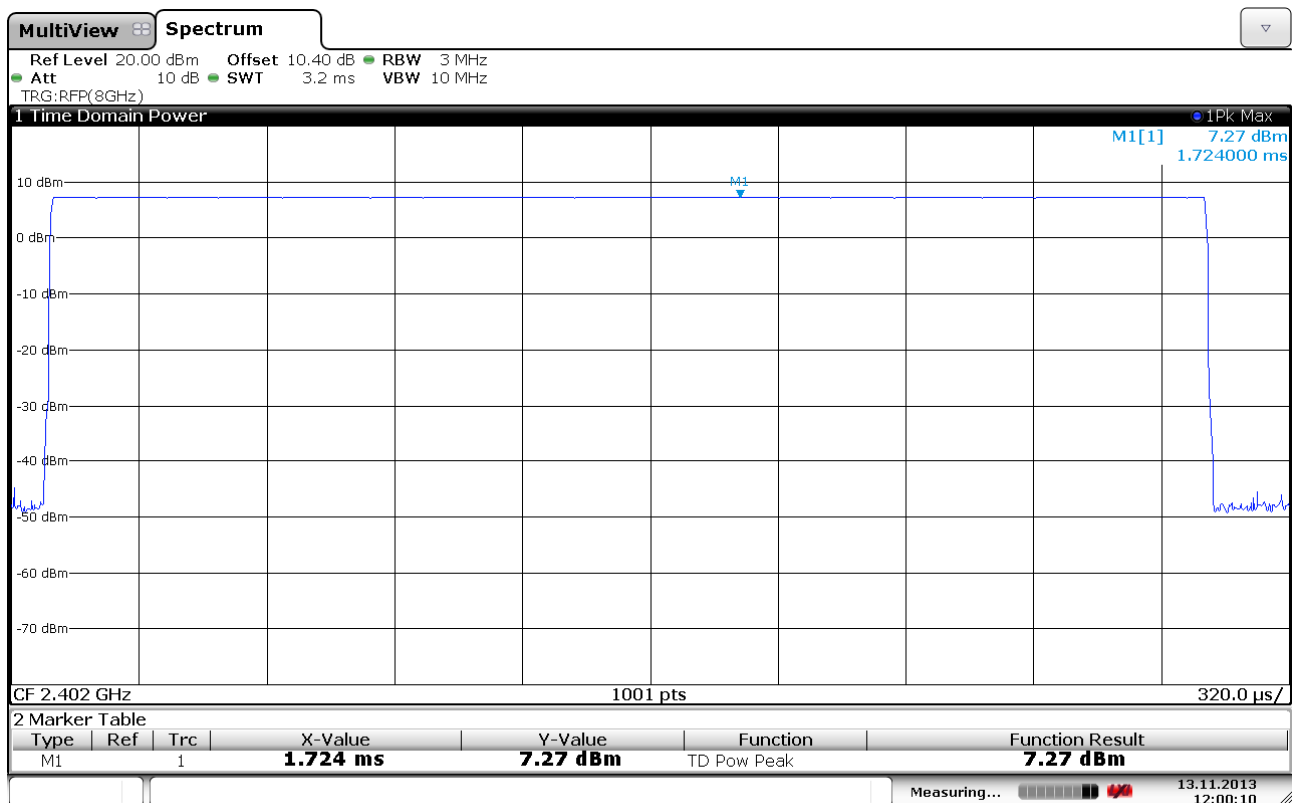


Conducted Output Power, 2402MHz



MARKER 1
5.128205128 μ s
Ref 110 dB μ V/m * Att 10 dB


RBW 3 MHz
VBW 10 MHz
SWT 3.2 ms

Marker 1 [T1]
97.98 dB μ V/m
5.128205 μ s

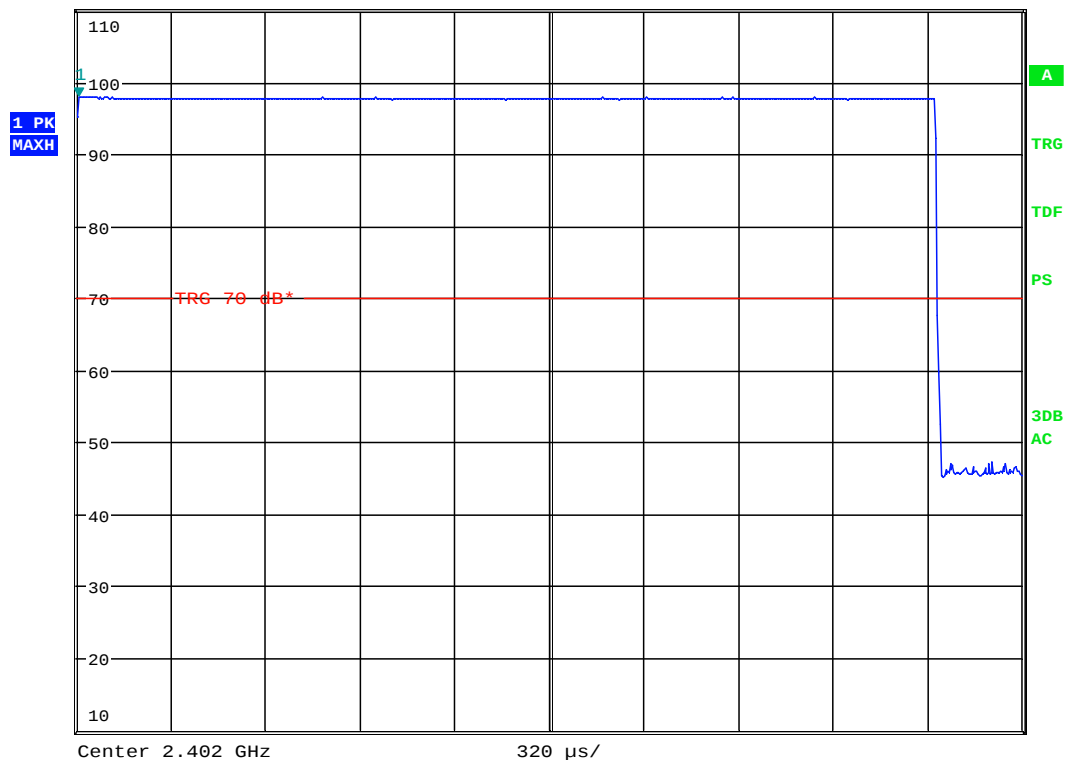

Date: 14.NOV.2013 15:09:50

Maximum Field Strength, 2402MHz (Max: VP)

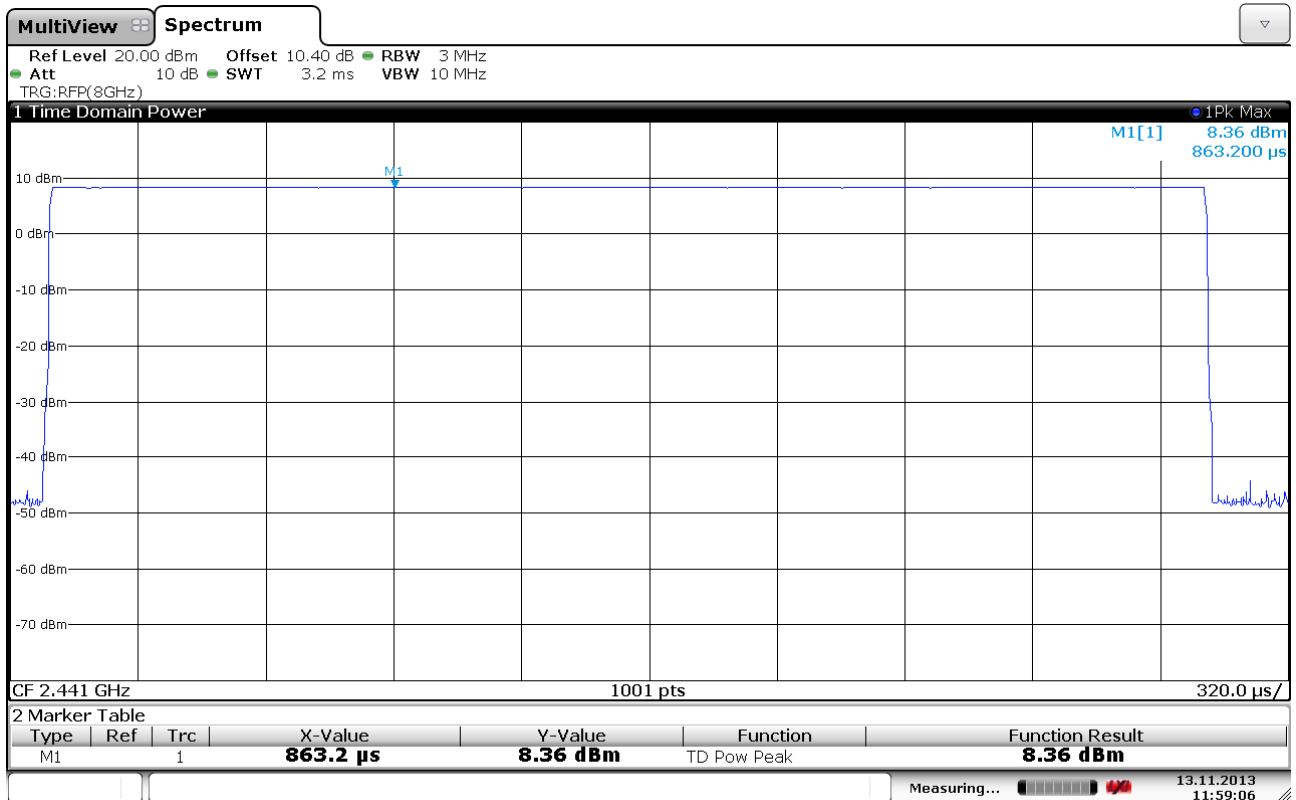

Conducted Output Power, 2441MHz




MARKER 1
5.128205128 μ s
Ref 110 dB μ V/m * Att 10 dB

RBW 3 MHz
VBW 10 MHz
SWT 3.2 ms

Marker 1 [T1]
98.95 dB μ V/m
5.128205 μ s

1 PK
MAXH

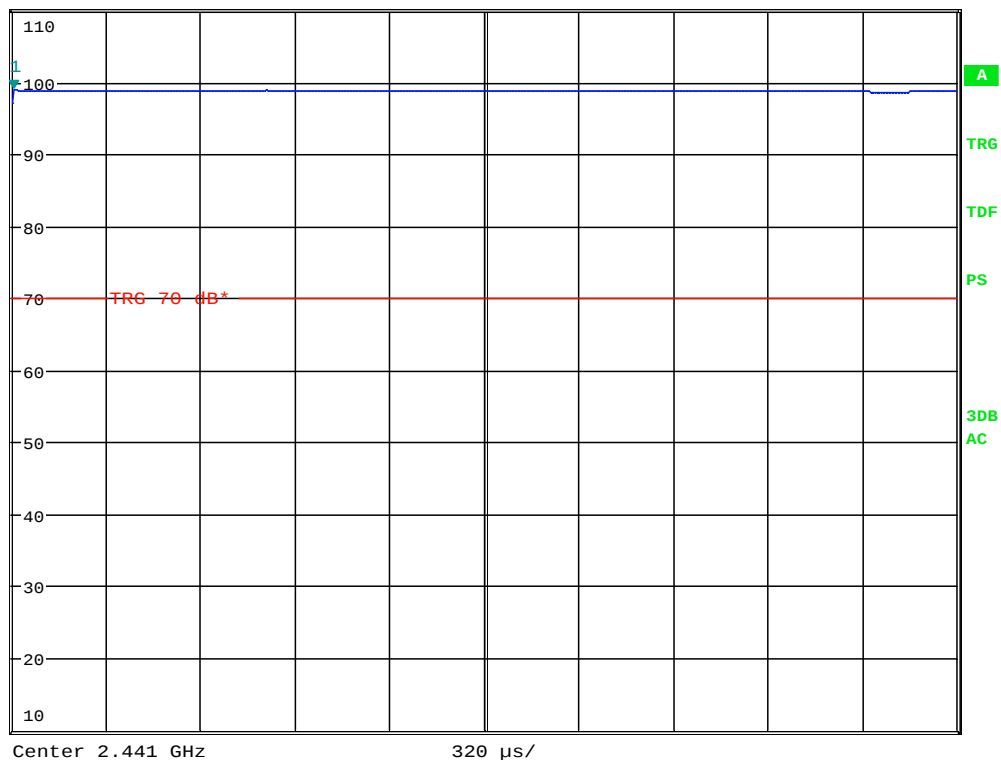


Date: 14.NOV.2013 15:16:04

Maximum Field Strength, 2441MHz (Max: VP)



Conducted Output Power, 2480MHz

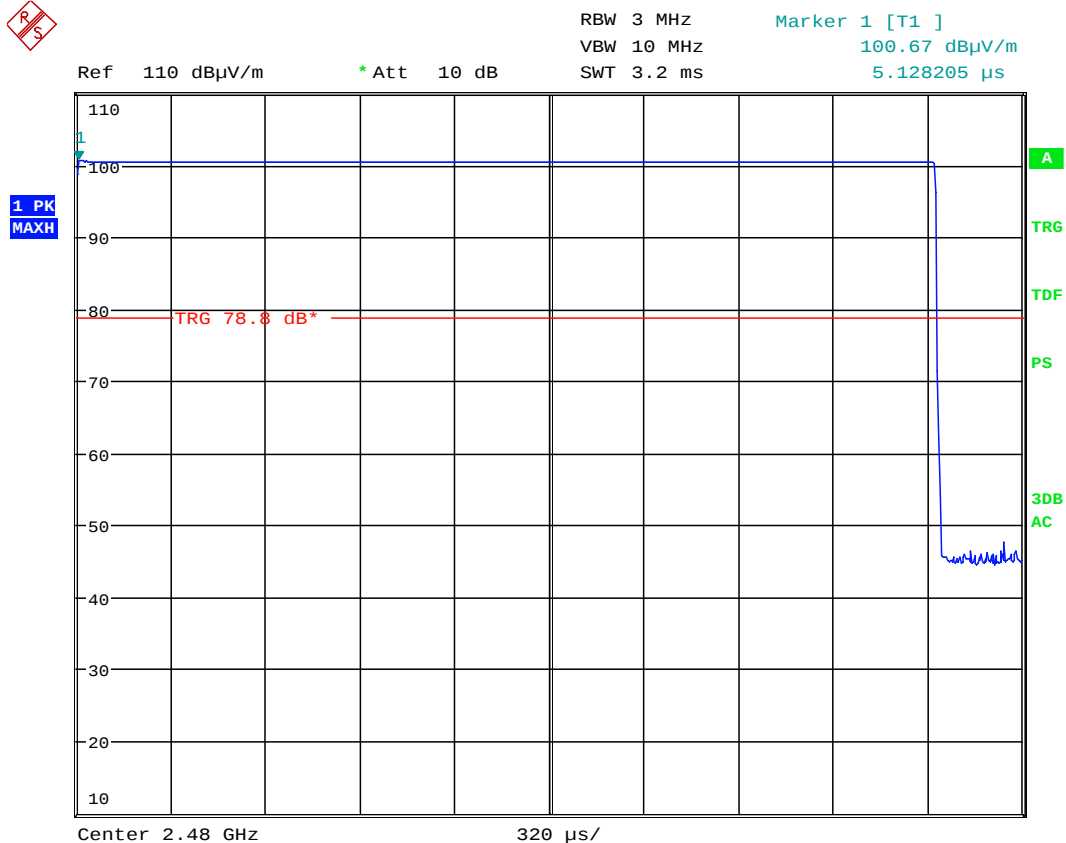

Date: 14.NOV.2013 15:51:04

Maximum Field Strength, 2480MHz (Max: VP)

3.7 Spurious Emissions (Radiated)

Para. No.: 15.247 (c)

Test Results: Complies

Measurement Data:

Band-edge conducted power, Hopping OFF:

	Measured field strength @3m (dBµV/m)		Limit	Margin	
	2390 MHz	2483.5 MHz	dBµV/m	dB	
Peak Detector	42.8	60.4	74	31.2	13.6
Average Detector	22.8	40.4	54	31.2	13.6

Band-edge conducted power, Hopping ON:

	Measured field strength @3m (dBµV/m)		Limit	Margin	
	2390 MHz	2483.5 MHz	dBµV/m	dB	
Peak Detector	42.6	59.5	74	31.4	14.5
Average Detector	22.6	39.5	54	31.4	14.5

Average Detector values are measured with Peak Detector and corrected for Duty Cycle.

All field strength values above are at 3m.

See attached plots.

Duty Cycle Correction Factor Calculation:

Maximum Duty Cycle Correction Factor according to Para 15.35 (b): 20 dB


RF conducted power to 25 GHz see attached graph.

Maximum RF level outside operating band:

RF ch 00: >50 dB/C, margin >30 dB

RF ch 39: >50 dB/C, margin >30 dB

RF ch 78: >50 dB/C, margin >30 dB

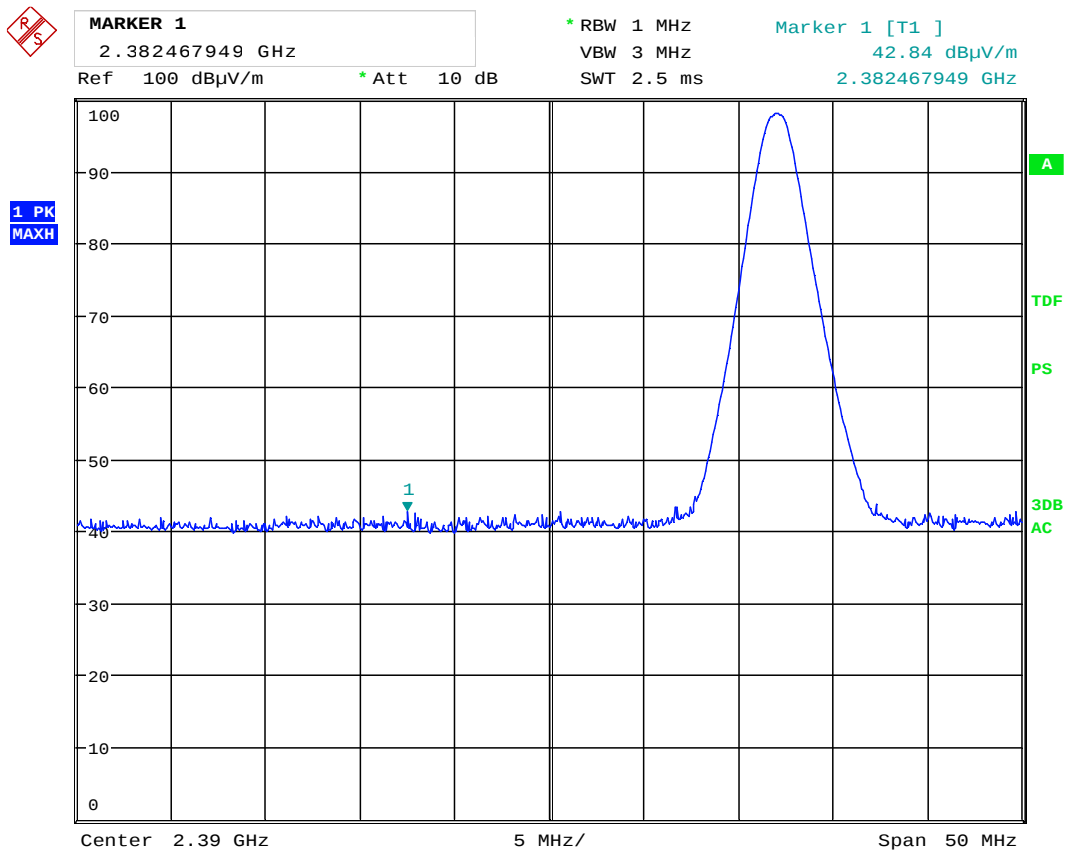

Date: 14.NOV.2013 15:11:30

Band Edge Lower Channel, Radiated, Peak, Hopping OFF




MARKER 1
2.389679487 GHz
Ref 110 dBμV/m * Att 10 dB

* RBW 1 MHz
VBW 3 MHz
SWT 2.5 ms

Marker 1 [T1]
42.57 dBμV/m
2.389679487 GHz

1 PK
MAXH

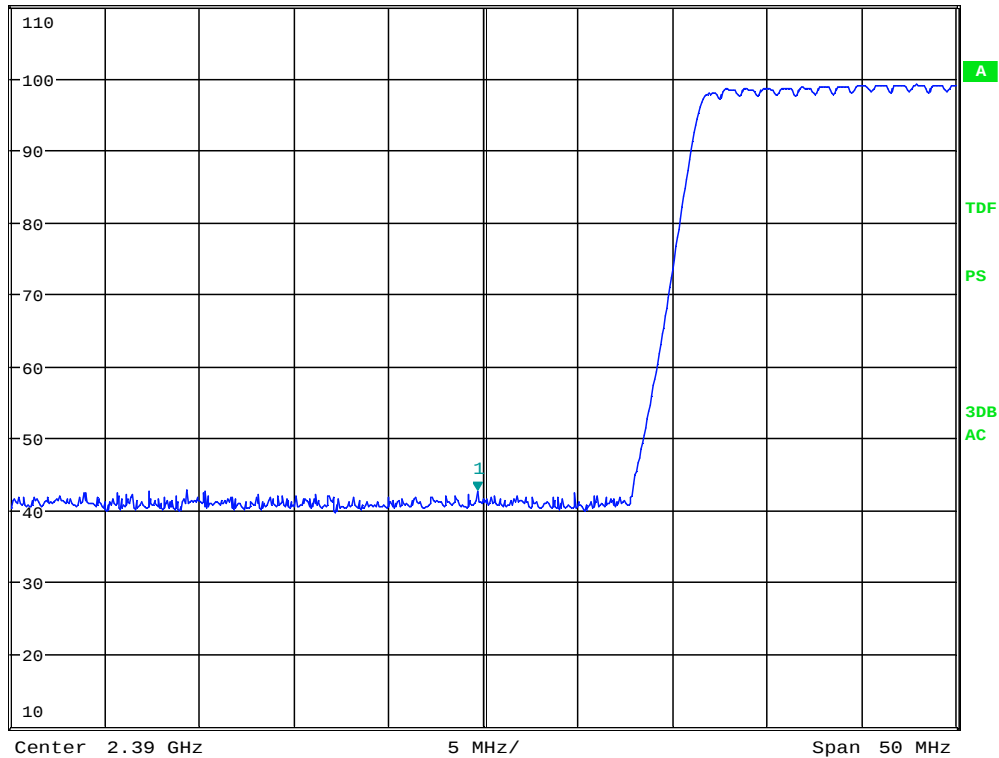

Date: 14.NOV.2013 16:05:12

Band Edge Lower Channel, Radiated, Peak, Hopping ON



MARKER 1

2.4835 GHz

Ref 110 dBμV/m

* Att 10 dB

* RBW 1 MHz

VBW 3 MHz


SWT 2.5 ms

Marker 1 [T1]

60.38 dBμV/m

2.483500000 GHz

1 PK
MAXH

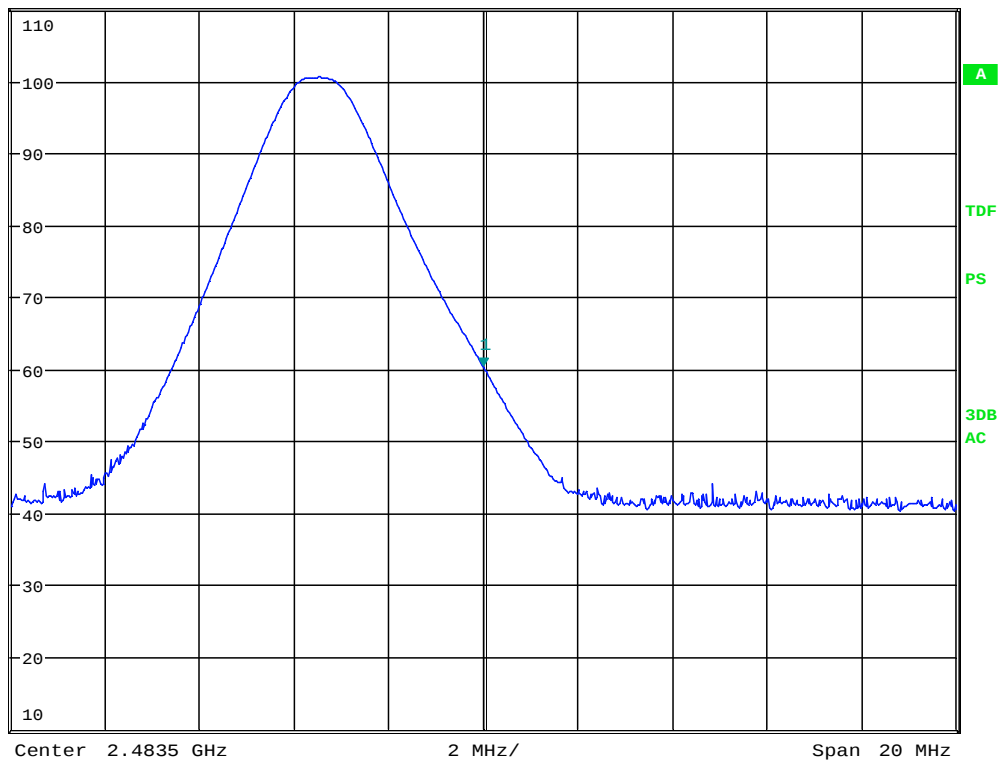

Date: 14.NOV.2013 15:53:17


Band Edge Upper Channel, Radiated, Peak, Hopping OFF



MARKER 1
2.4835 GHz
Ref 110 dBμV/m * Att 10 dB


* RBW 1 MHz
VBW 3 MHz
SWT 2.5 ms

Marker 1 [T1]
59.46 dBμV/m
2.483500000 GHz

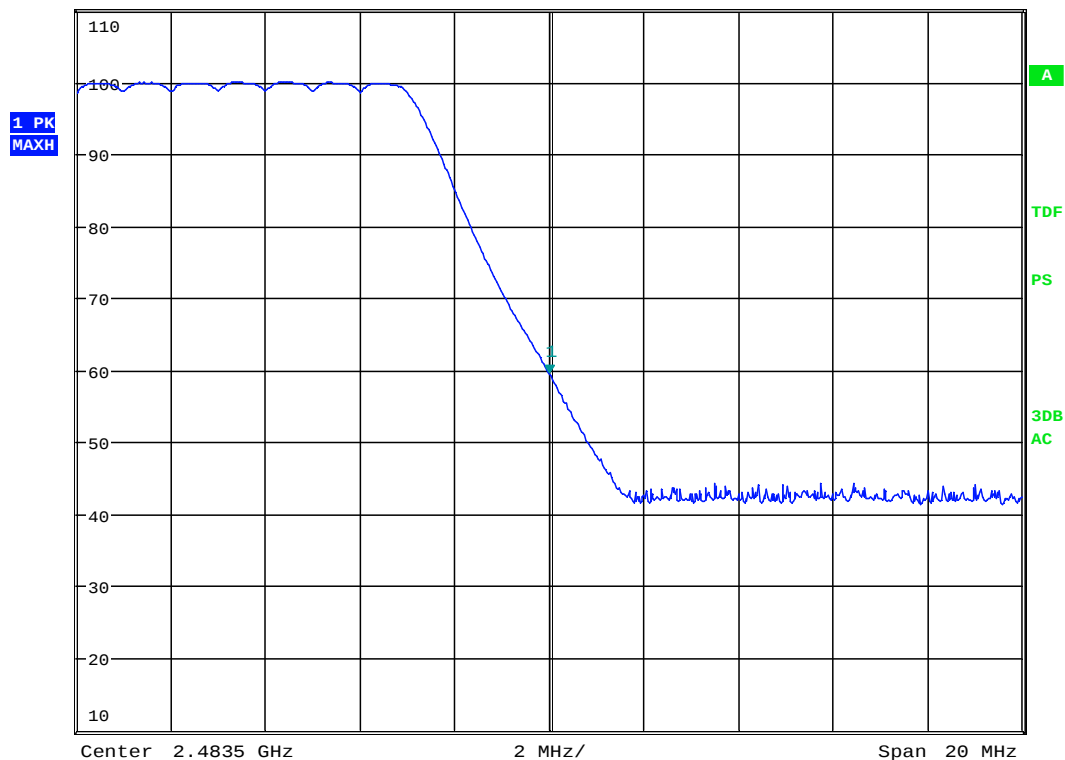


Date: 14.NOV.2013 16:03:36


Band Edge Upper Channel, Radiated, Peak, Hopping ON

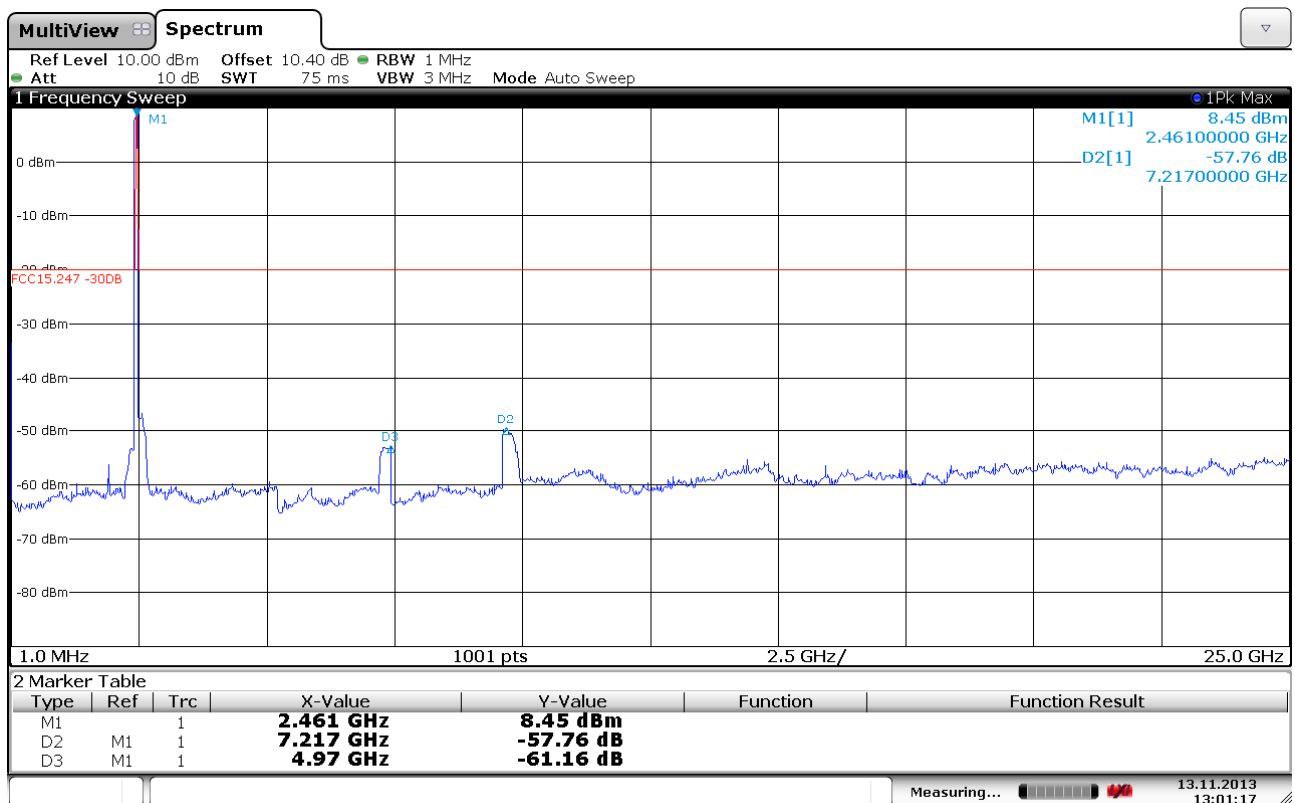

Conducted Emissions, 1MHz -25GHz, Hopping On

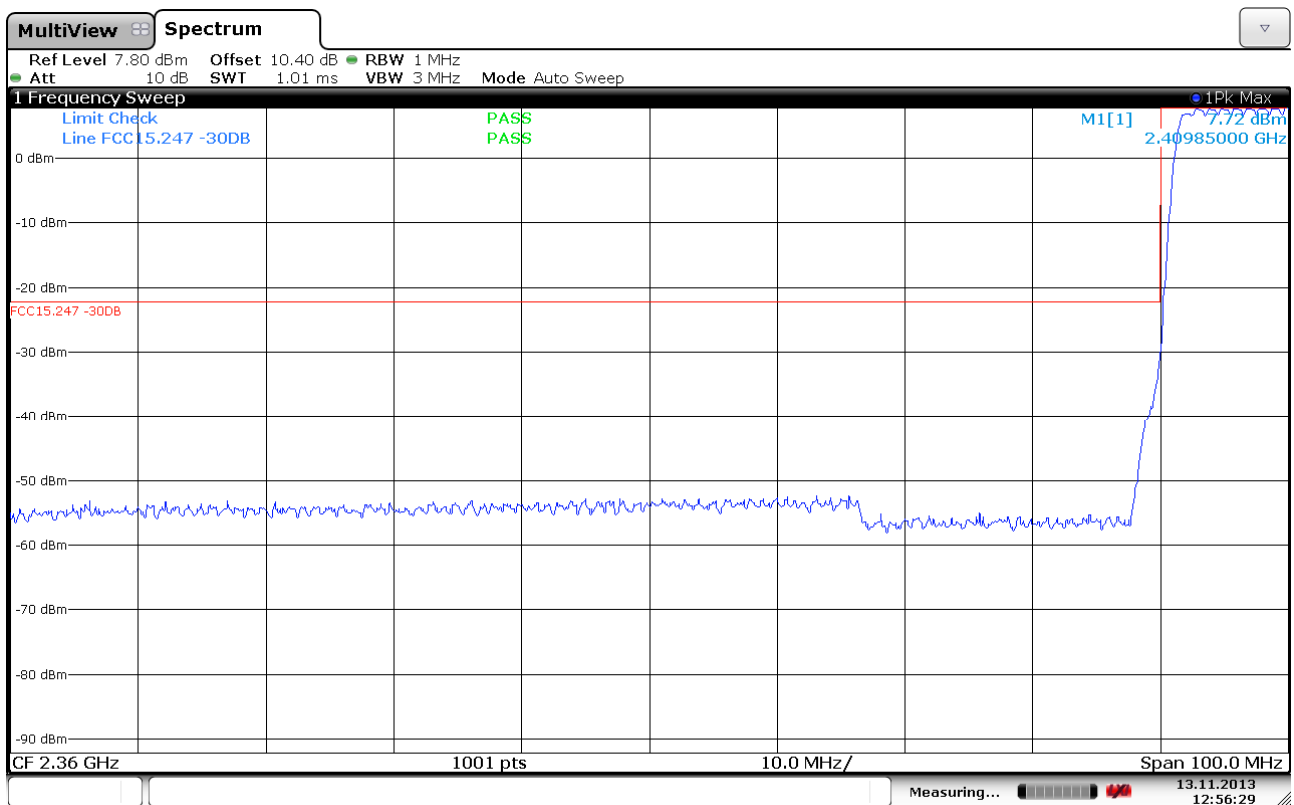

Conducted Emissions, 2310 -2410 MHz, Hopping ON

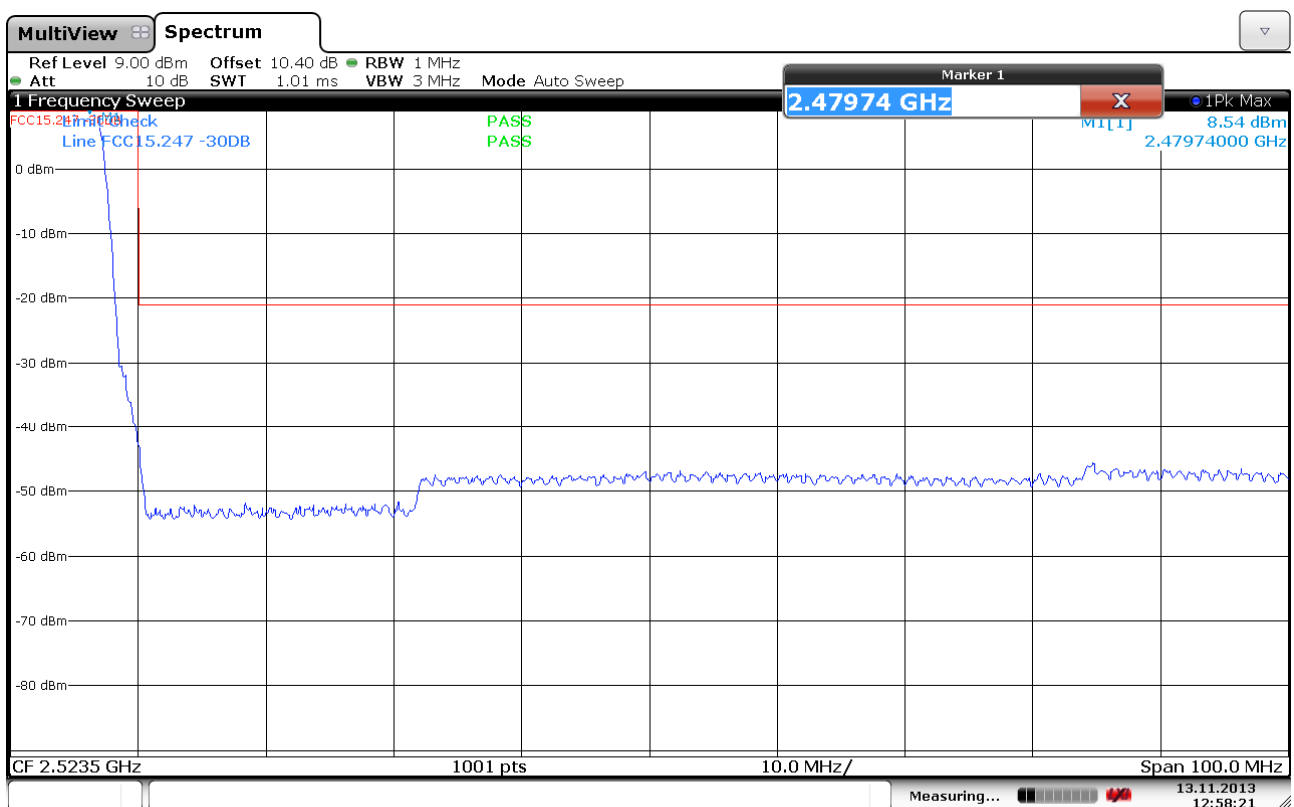


Conducted Emissions, 2473.5 -2573.5 MHz, Hopping ON

Radiated emissions 9 kHz-30 MHz.

Measuring distance 10 m, measured with Peak detector.

No component detected, see attached graph.

Limit is converted to 10 m using 40 dB/decade according to 15.31 (f) (2).

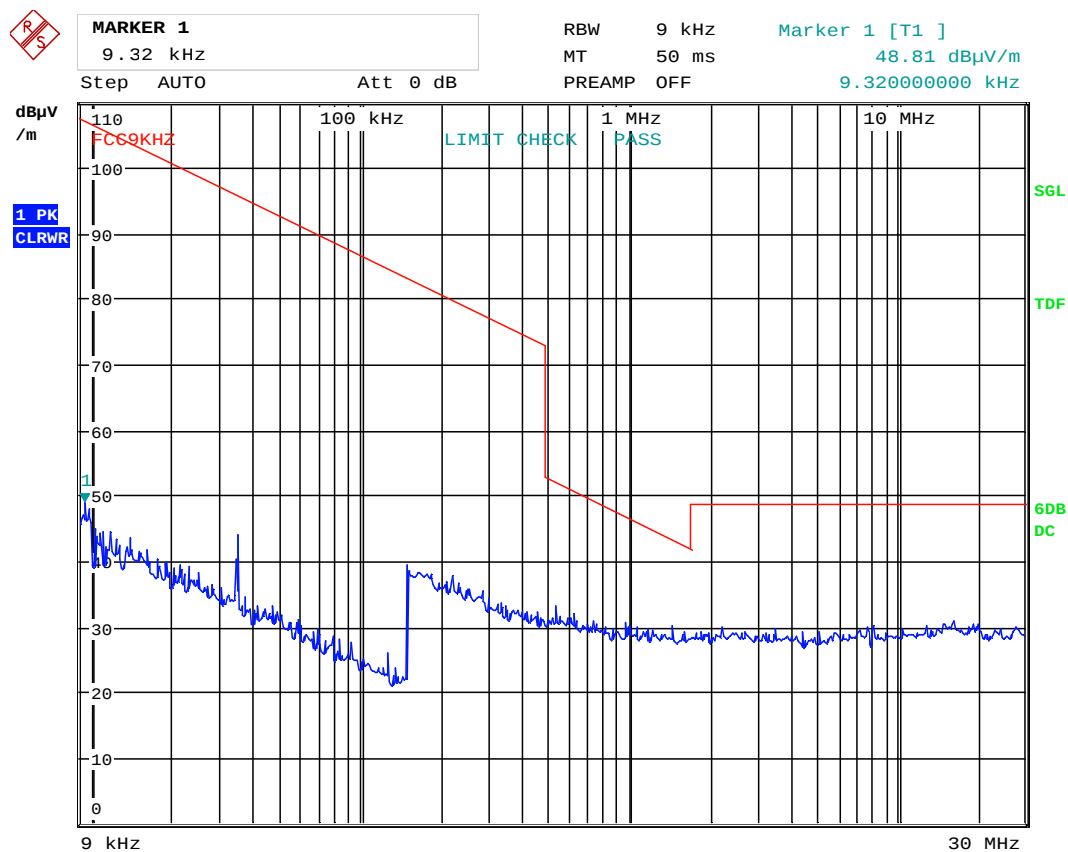

Date: 14.NOV.2013 17:36:47

Radiated emission 30 – 1000 MHz.

Detector: Quasi-Peak

Measuring distance 3 m according to ANSI C63.4-2003.


Tested in speech mode with active connection.

Final Result 1

Frequency (MHz)	QuasiPeak (dB μ V/m)	Polarization	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)	Comment
54.578953	26.3	V	-14.3	13.7	40.0	
485.647331	14.5	H	-4.9	31.5	46.0	
515.917658	14.9	V	-4.3	31.1	46.0	
531.672228	17.6	V	-4.1	28.4	46.0	

See plot.

NTC FCC Pt15 Class B 30-1000M 3m

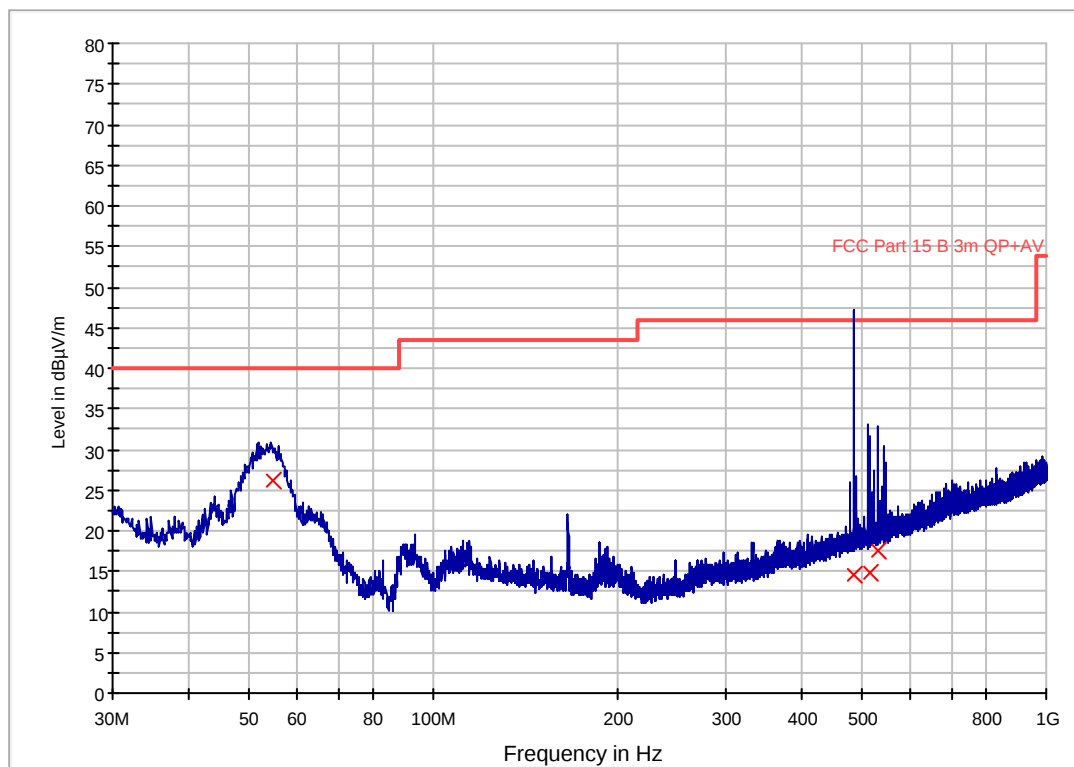

Radiated Emissions, 1-25 GHz

Measuring distance: 3m (1 – 8.5 GHz)
1m (5.5 – 18 GHz)

A pre-scan was performed above 18 GHz and no spurious emissions were detected.

Peak Detector:

Frequency	RF channel	Dist. corr. factor	Field strength, Peak Detector, 3m	Limit	Margin
MHz	L,M,H	dB	dBμV/m	dBμV/m	dB
9608	L	9.5	47.0	74	27.0
9762	M	9.5	48.3	74	25.7
9920	H	9.5	44.7	74	29.3

Average Detector:


Frequency	RF channel	Dist. corr. factor	Field strength, Peak Detector, 3m	Duty cycle corr. factor	Limit	Margin
MHz	L,M,H	dB	dBμV/m	dB	dBμV/m	dB
9608	L	9.5	27.0	20	54	27.0
9762	M	9.5	28.3	20	54	25.7
9920	H	9.5	24.7	20	54	29.3

Average Detector values are calculated from Peak values by Duty Cycle Correction Factor.

Antenna factor, amplifier gain and cable loss are included in spectrum analyzer "Transducer factor".

Distance correction factor is included on the plots for measurements @1m.

See plots.

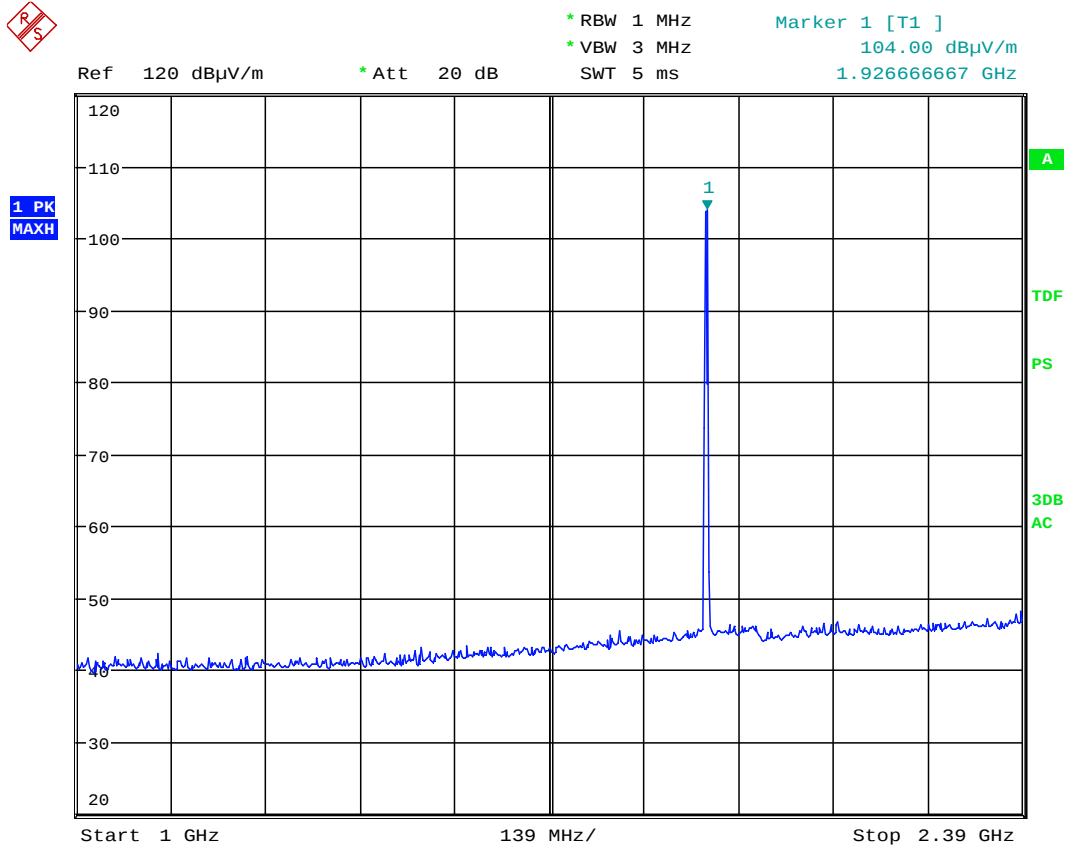


Date: 14.NOV.2013 16:13:33

Radiated Emissions, 1000 -2390MHz, VP, Hopping ON, UPCS Active
(Strong signal @1926MHz is UPCS Transmitter)



* RBW 1 MHz Marker 1 [T1]
* VBW 3 MHz 108.93 dBμV/m
SWT 5 ms 1.924439103 GHz

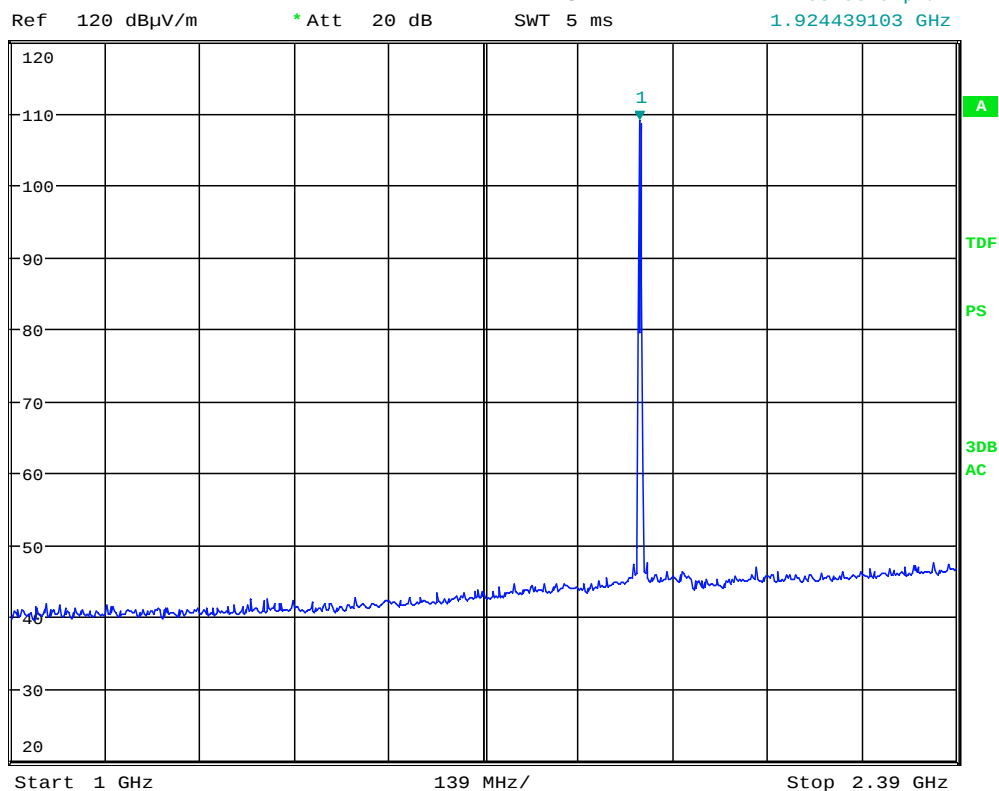

Date: 14.NOV.2013 16:15:24

Radiated Emissions, 1000 -2390MHz, HP, Hopping ON, UPCS Active
(Strong signal @1924MHz is the UPCS Transmitter)




* RBW 1 MHz
* VBW 3 MHz
SWT 2.5 ms

Marker 1 [T1]
48.03 dBμV/m
2.611057692 GHz

Ref 97.5 dBμV/m * Att 10 dB

1 PK
MAXH

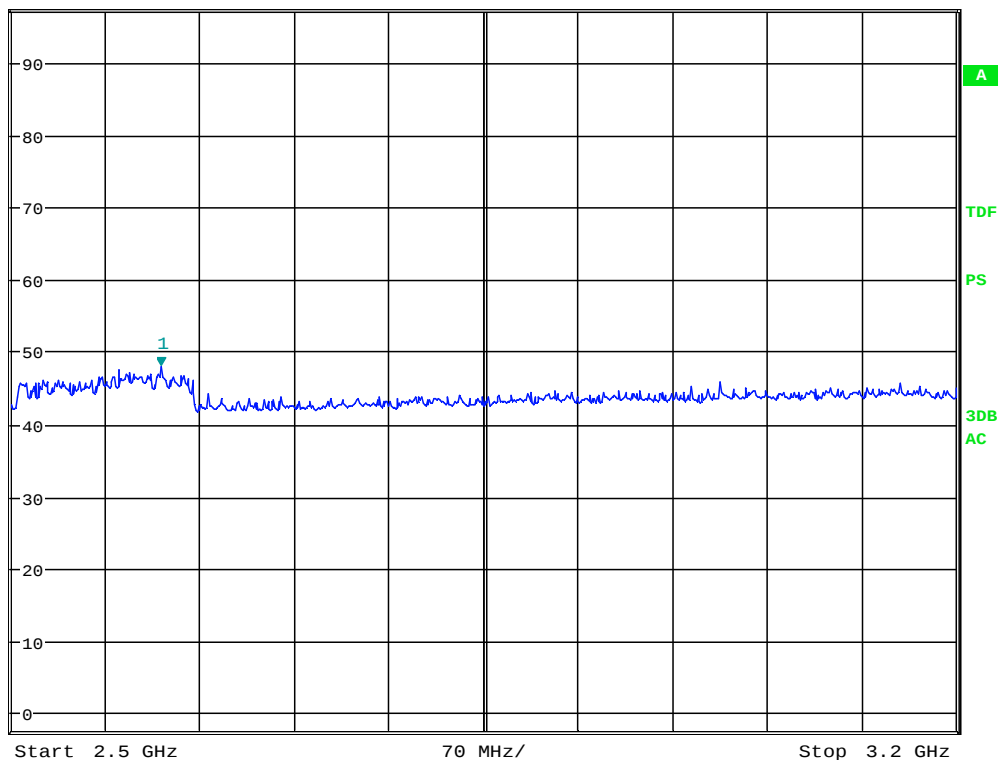

Date: 14.NOV.2013 16:09:24

Radiated Emissions, 2500 -3200MHz, VP, Hopping ON, UPCS Active




* RBW 1 MHz
* VBW 3 MHz
SWT 2.5 ms

Marker 1 [T1]
48.50 dBμV/m
2.630128205 GHz

Ref 97.5 dBμV/m * Att 10 dB

1 PK
MAXH

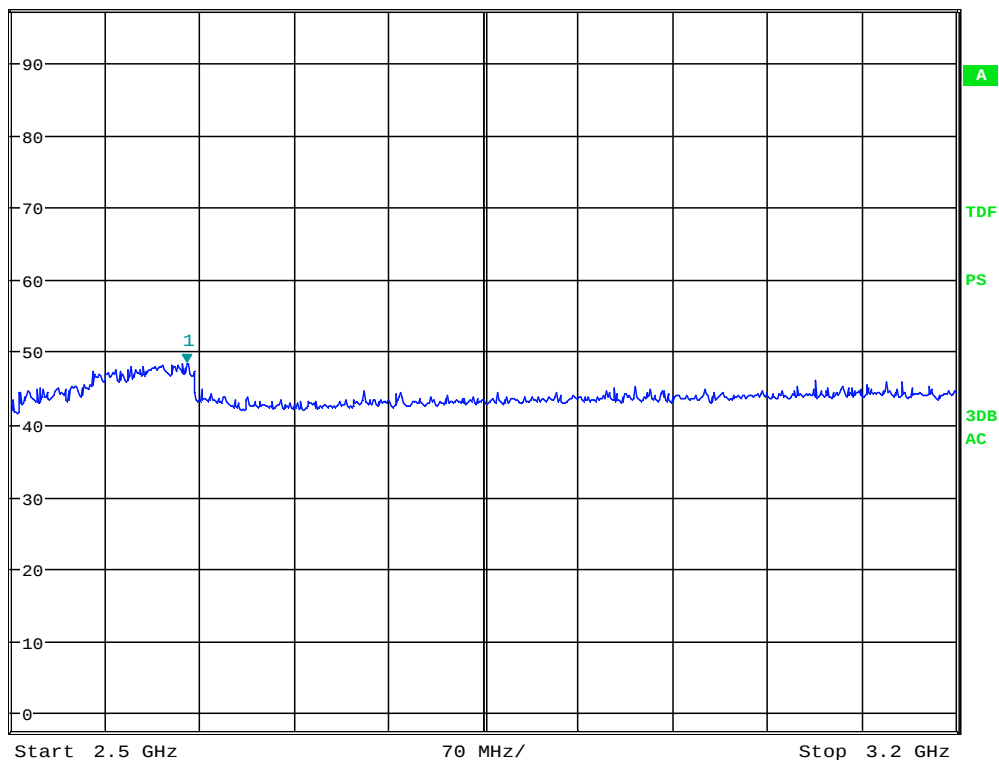

Date: 14.NOV.2013 16:11:14

Radiated Emissions, 2500 -3200MHz, HP, Hopping ON, UPCS Active



* RBW 1 MHz
* VBW 3 MHz
SWT 35 ms

Marker 1 [T1]
52.38 dBμV/m
8.473557692 GHz


Ref 82 dBμV/m

* Att 10 dB

SWT 35 ms

8.473557692 GHz

1 PK
MAXH

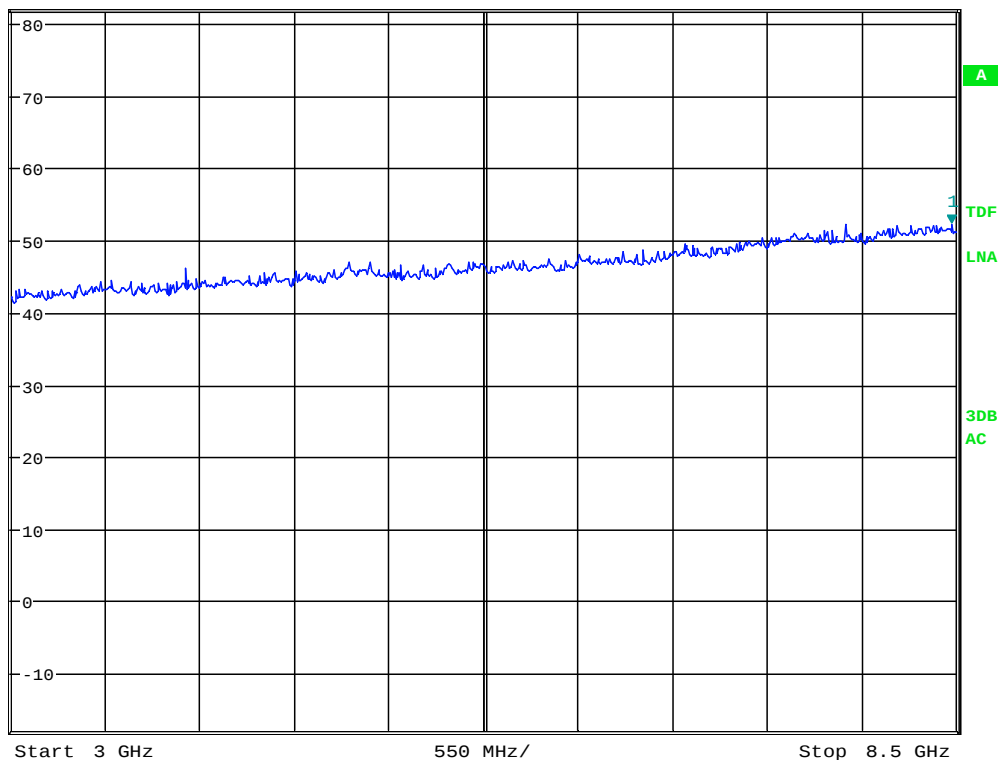

Date: 14.NOV.2013 13:53:13

Radiated Emissions, 3000 -8500MHz, VP



* RBW 1 MHz
* VBW 3 MHz
SWT 35 ms

Marker 1 [T1]
53.11 dBμV/m
8.297275641 GHz


Ref 82 dBμV/m

* Att 10 dB

SWT 35 ms

8.297275641 GHz

1 PK
MAXH

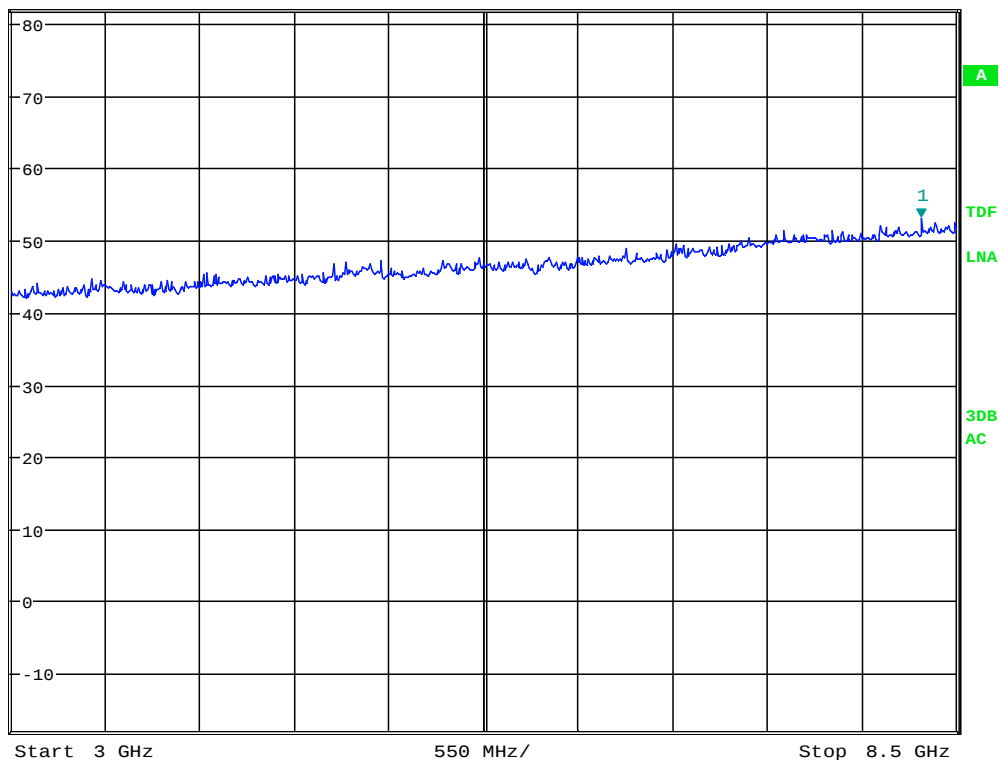


Date: 14.NOV.2013 13:54:55

Radiated Emissions, 3000 -8500MHz, HP



* RBW 1 MHz
* VBW 3 MHz
SWT 20 ms

Marker 1 [T1]
38.70 dBμV/m
7.322115385 GHz

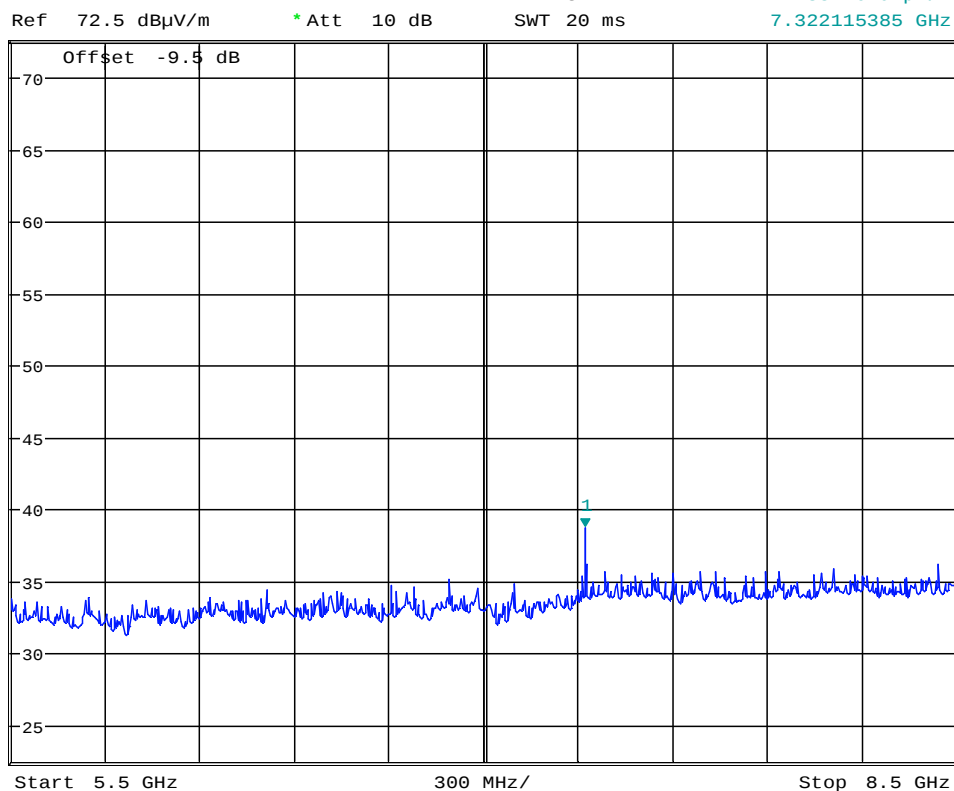


Date: 14.NOV.2013 13:35:41

Radiated Emissions, 5500 -8500MHz, VP, @1m



* RBW 1 MHz
* VBW 3 MHz
SWT 20 ms
Marker 1 [T1]
38.44 dBμV/m
7.322115385 GHz

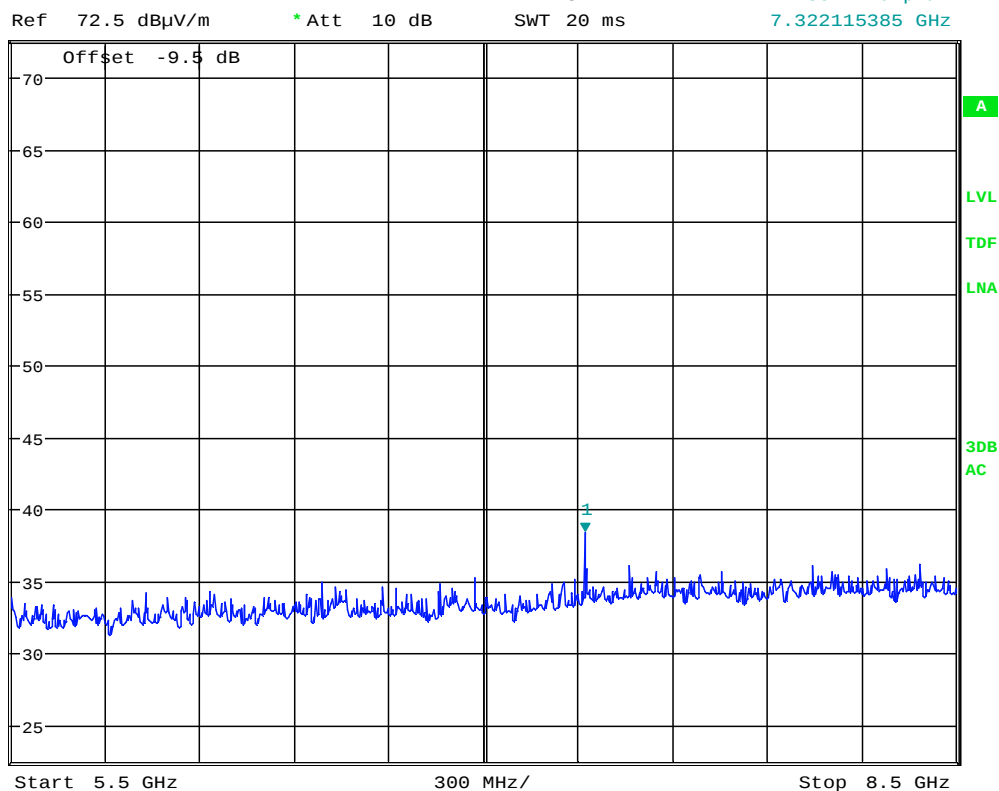


Date: 14.NOV.2013 13:37:23

Radiated Emissions, 5500 -8500MHz, HP, @1m



* RBW 1 MHz
* VBW 3 MHz
SWT 25 ms

Marker 1 [T1]
47.83 dBμV/m
9.762019231 GHz

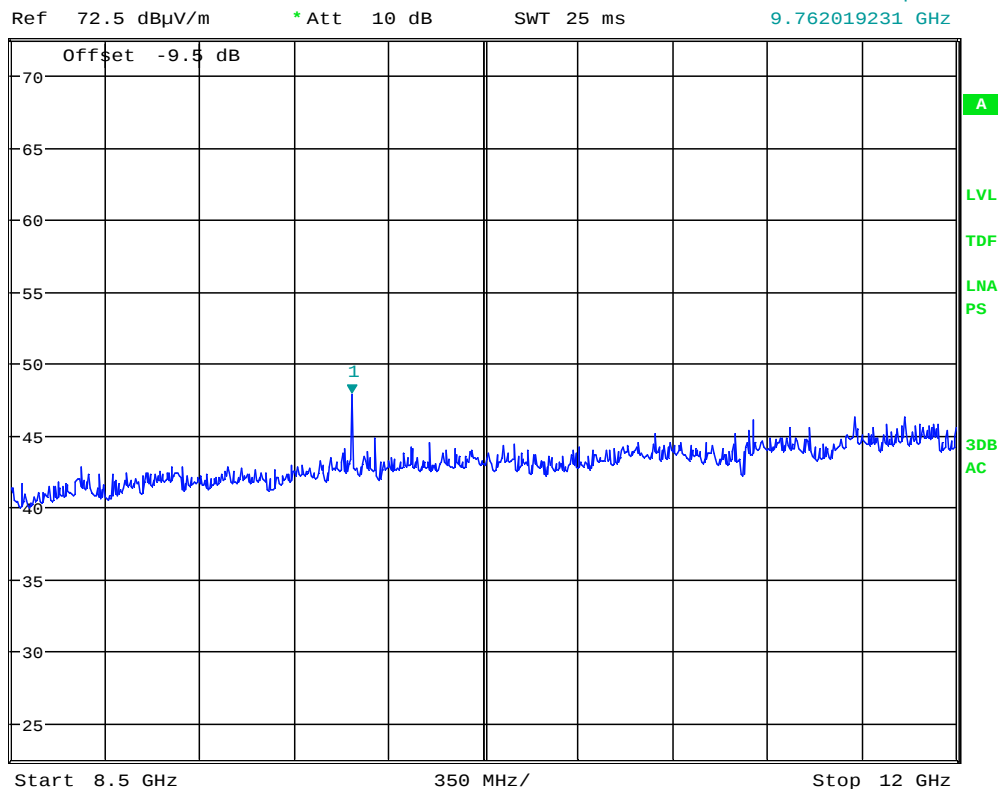

Date: 14.NOV.2013 13:08:30


Radiated Emissions, 8500 -12000MHz, VP, @1m



* RBW 1 MHz
* VBW 3 MHz
Marker 1 [T1]
46.21 dBμV/m
9.762019231 GHz

Ref 72.5 dBμV/m * Att 10 dB SWT 25 ms

1 PK
MAXH

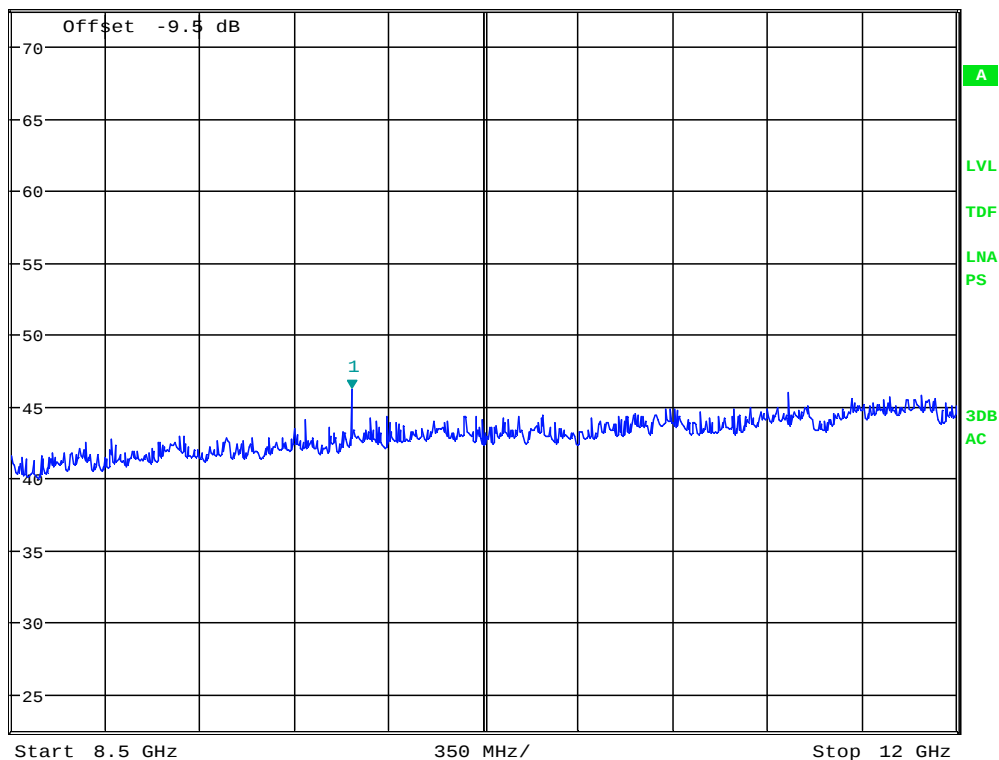

Date: 14.NOV.2013 13:10:12

Radiated Emissions, 8500 -12000MHz, HP, @1m




MARKER 1
9.609041667 GHz
Ref 72.5 dBμV/m * Att 10 dB

* RBW 1 MHz
VBW 3 MHz
SWT 20 ms

Marker 1 [T1]
46.97 dBμV/m
9.609041667 GHz

1 PK
MAXH

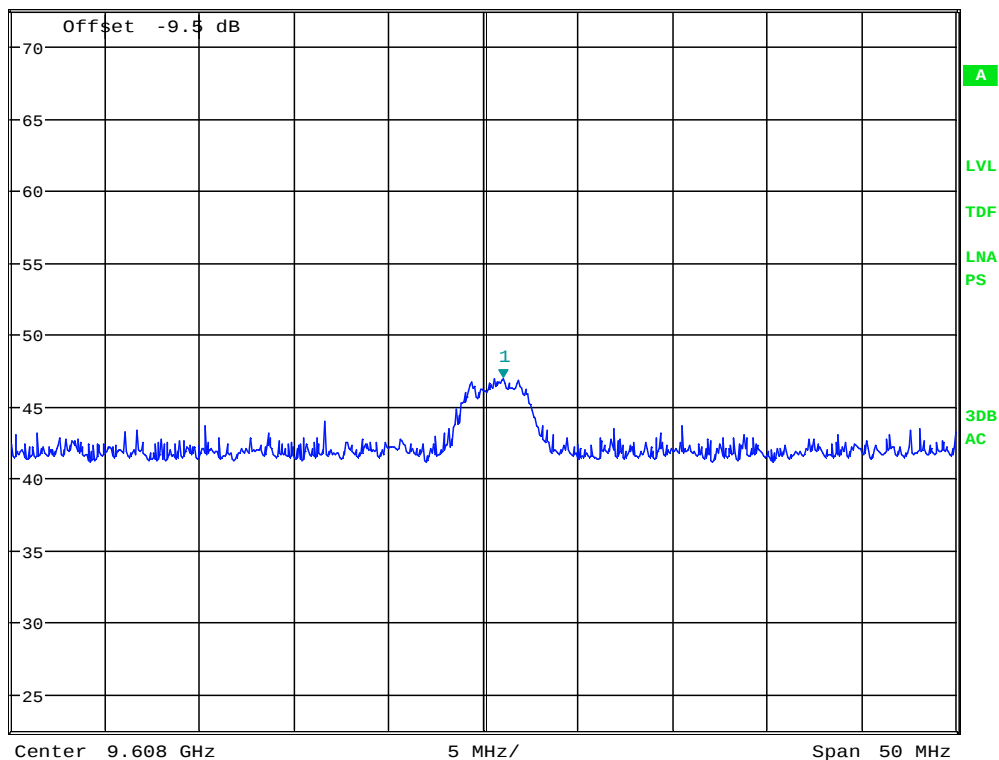


Date: 14.NOV.2013 13:26:59

Radiated Emissions, 9608MHz, VP, @1m



* RBW 1 MHz
* VBW 3 MHz
* SWT 100 ms
Marker 1 [T1]
48.32 dBμV/m
9.764641026 GHz

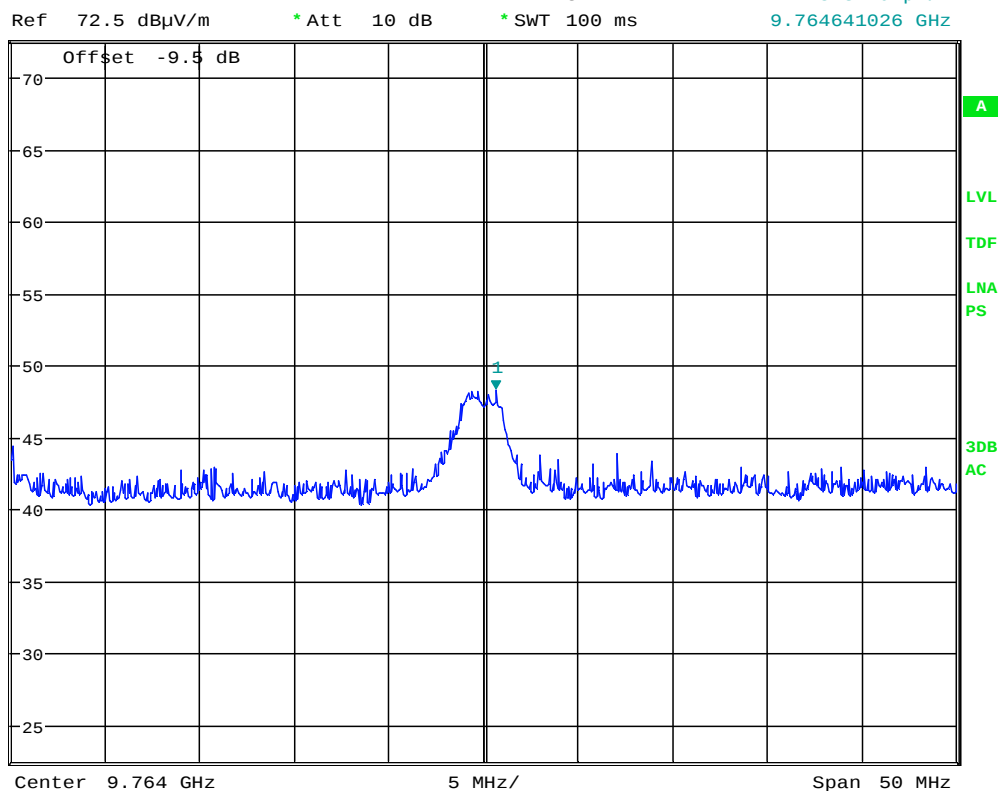

Date: 14.NOV.2013 13:18:47

Radiated Emissions, 9764MHz, VP, @1m




MARKER 1
9.918798077 GHz
Ref 72.5 dBμV/m * Att 10 dB

* RBW 1 MHz
VBW 3 MHz
SWT 20 ms

Marker 1 [T1]
44.70 dBμV/m
9.918798077 GHz

1 PK
MAXH

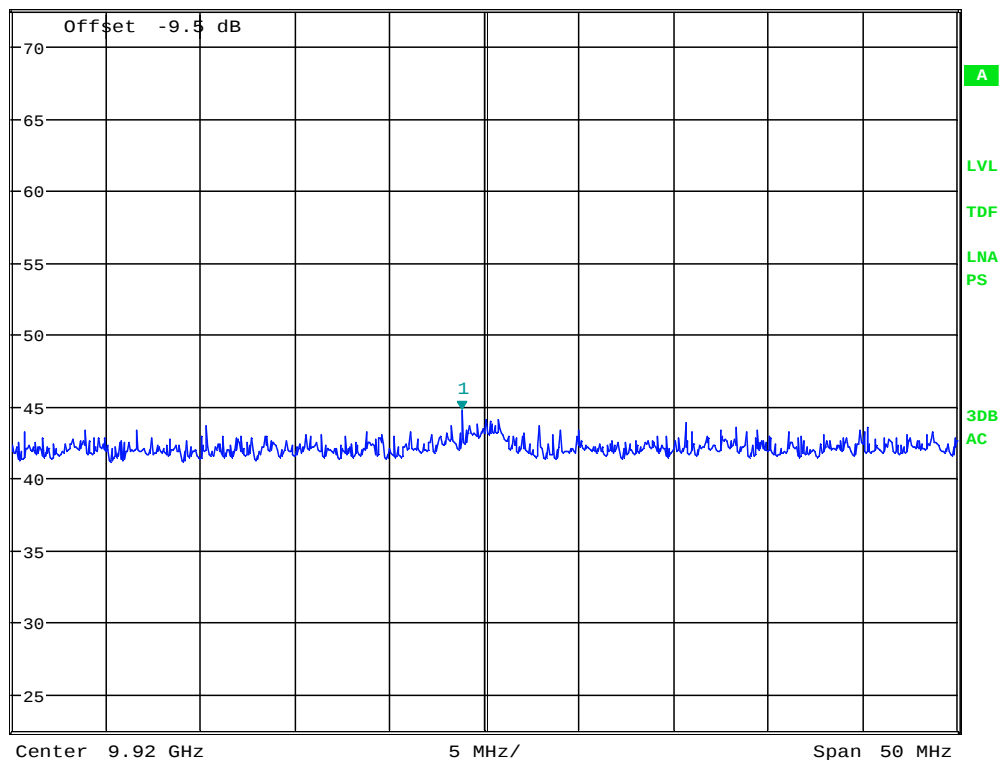


Date: 14.NOV.2013 13:29:44

Radiated Emissions, 9920MHz, VP, @1m



* RBW 1 MHz
* VBW 3 MHz
SWT 35 ms

Marker 1 [T1]
50.41 dB μ V/m
17.923076923 GHz

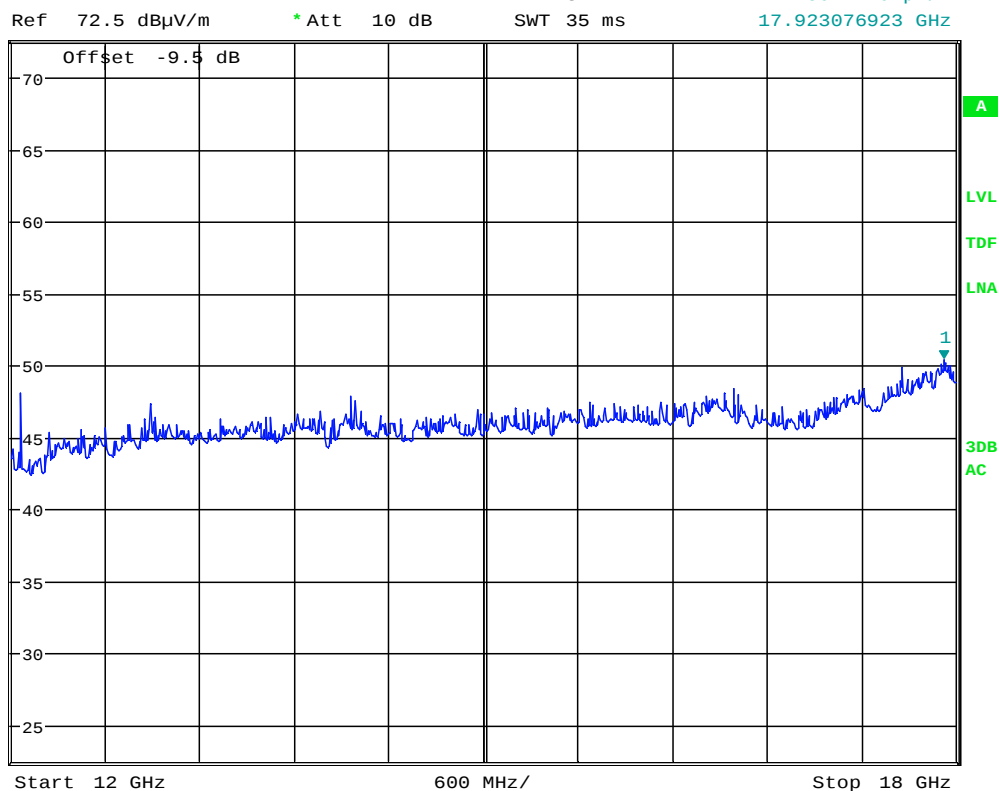

Date: 14.NOV.2013 13:00:14

Radiated Emissions, 12000 -18000MHz, VP, @1m




* RBW 1 MHz
* VBW 3 MHz
SWT 35 ms

Marker 1 [T1]
50.69 dBμV/m
17.865384615 GHz


Ref 72.5 dBμV/m * Att 10 dB

1 PK
MAXH

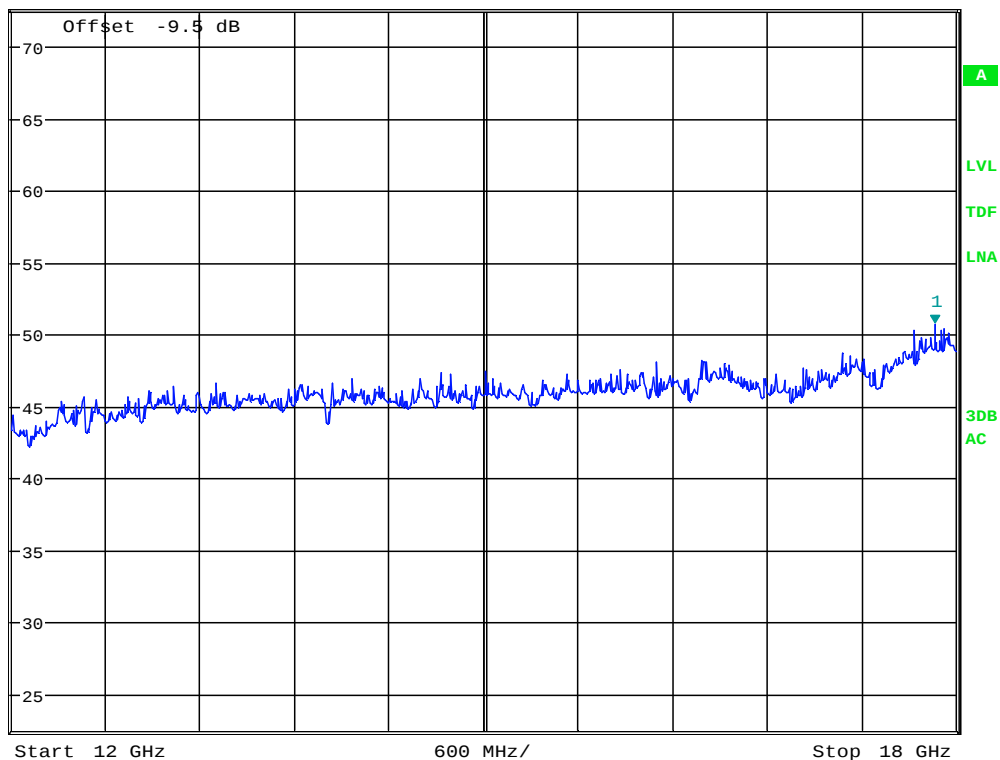

Date: 14.NOV.2013 13:01:56

Radiated Emissions, 12000 -18000MHz, HP, @1m

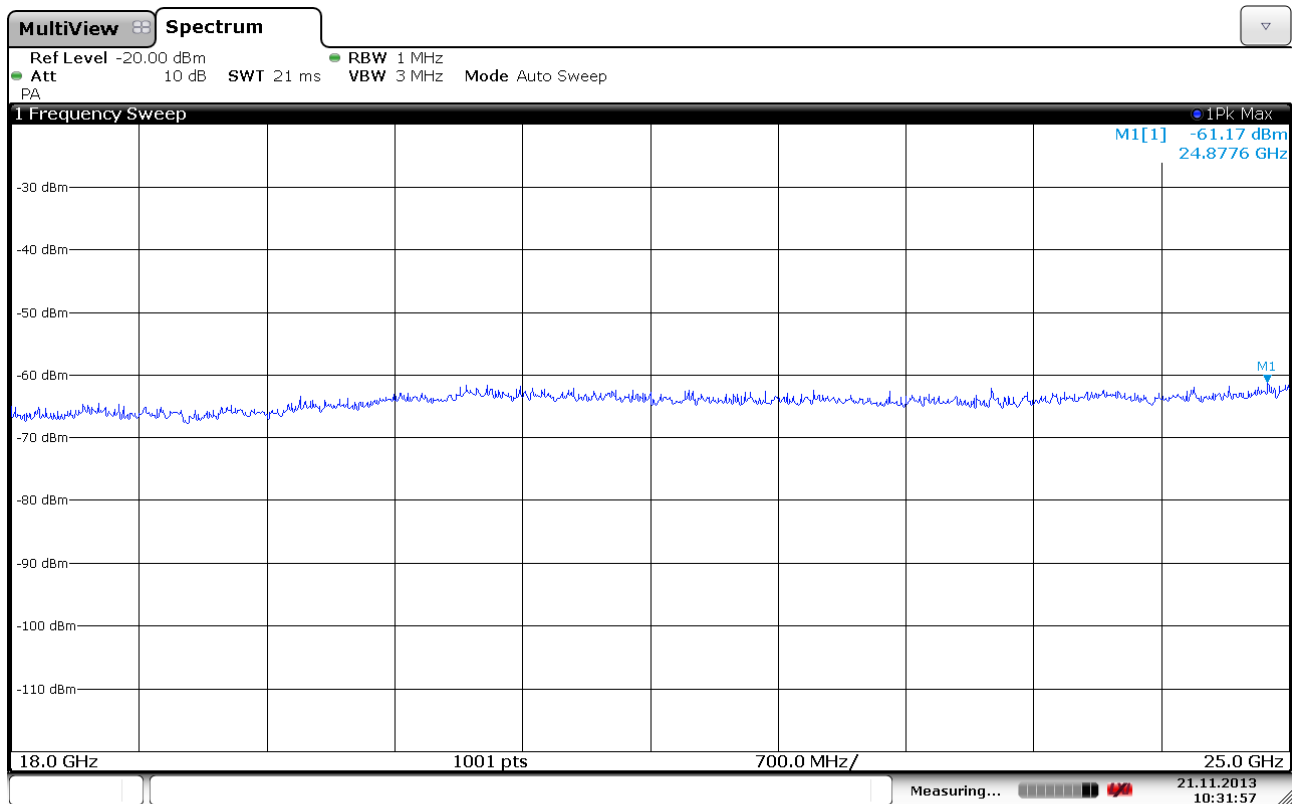

2487.000MHz

Pre-scan, 18000 -25000MHz, @ appox. 10cm


4 LIST OF TEST EQUIPMENT

To facilitate inclusion on each page of the test equipment used for related tests, each item of test equipment and ancillaries are identified (numbered) by the Test Laboratory.

No.	Model number	Description	Manufacturer	Ref. no.	Cal. date	Cal. Due
1	FSW26	Spectrum Analyzer	Rohde & Schwarz	LR 1640	2013.08.30	2014.08.30
2	ESU40	Measuring Receiver	Rohde & Schwarz	LR 1639	2013.09.24	2014.09.24
3	4768-10	Attenuator	Narda	LR 1356	Cal b4 use	
4	6HC3000/18000	Highpass Filter	Trilithic	LR 1614	Cal b4 use	
5	JB3	BiLog Antenna	Sunol Sciences	N-4525	2012.10.11	2015.10.11
6	LNA6900	Preamplifier	Teseq	LR 1593	2011.11.24	2013.11.24
7	3115	Horn Antenna	EMCO	LR 1330	2010.08.05	2015.08.05
8	8449A	Pre-amplifier	Hewlett Packard	LR 1322	2013-09	2014-09
9	643	Antenna Horn	Narda	LR 093	2009.01.26	2014.01.26
10	PM7320X	Antenna Horn	Sivers Lab	LR 102	2009.01.26	2014.01.26
11	DBF-520-20	Antenna Horn	Systron Donner	LR 100	2009.01.26	2014.01.26
12	638	Antenna Horn	Narda	LR 1480	2010.06.17	2015.06.17
14	HFH2-Z2	Loop Antenna	Rohde & Schwarz	LR 285	2010.10	2015.10.08
15	Model 87V	Multimeter	Fluke	N-4669	2013.09	2014.09
16	6812B	AC Power Source	Agilent	LR 1515	2013.10.28	2014.10.28
17	ESHS10	Measuring Receiver	Rohde & Schwarz	N- 3528	2012.06.28	2014.06.28
18	ESH3-Z5	Two Line V-Network	Rohde & Schwarz	LR 1076	Cal b4 use	
19	ESH3-Z2	Pulse Limiter	Rohde & Schwarz	LR 1074	2012.04.24	2014.04.24

5 BLOCK DIAGRAM

5.1 Power Line Conducted Emission

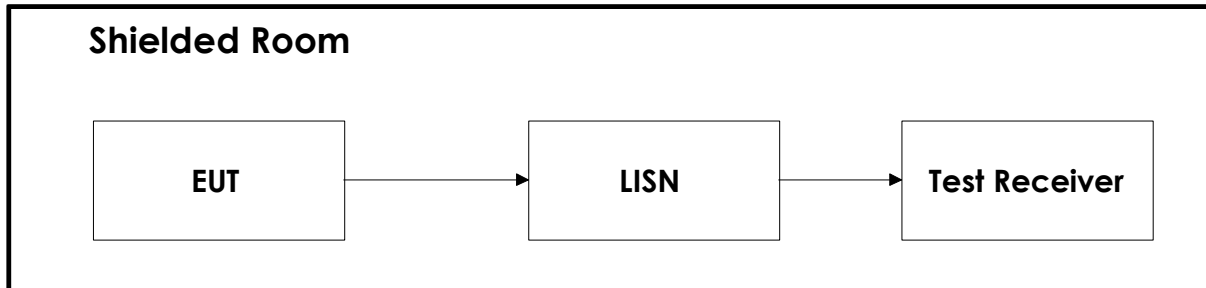

5.2 Test Site Radiated Emission

