


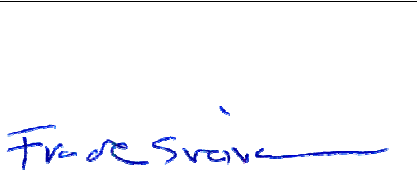


Test Report

Product	Bluetooth Transceiver in DECT Handset		
Name and address of the applicant	Panasonic Corporation of North America Two Riverfront Plaza, 9 th Floor Newark, 07102-5490, NJ, USA		
Name and address of the manufacturer	Panasonic Corporation 1-62, 4-chome, Minoshima, Hakata-ku Fukuoka, 812-8531, Japan		
Model	KX-TPA73		
Rating	3.7V _{DC} (Secondary Battery, 3.7V Li-ion)		
Trademark	Panasonic		
Serial number	/		
Additional information	DECT 6.0, Bluetooth		
Tested according to	FCC Part 15.247 Frequency Hopping Transmitters / Digital Transmission Systems Industry Canada RSS-247, Issue 2 Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices		
Order number	379524		
Tested in period	2019.10.01 to 2019.10.30		
Issue date	2020.01.30		
Name and address of the testing laboratory	 Instituttveien 6 Kjeller, Norway	CAB Number: FCC: NO0001 ISED: NO0470 TEL: +47 22 96 03 30 FAX: +47 22 96 05 50	 
An accredited technical test executed under the Norwegian accreditation scheme			
 Prepared by [Frode Sveinsen]		 Approved by [G.Suhanthakumar]	
<p>This report shall not be reproduced except in full without the written approval of Nemko. Opinions and interpretations expressed within this report are not part of the current accreditation. This report was originally distributed electronically with digital signatures. For more information contact Nemko.</p>			

CONTENTS

1	INFORMATION	3
1.1	Test Item	3
1.2	Normal test condition	4
1.3	Test Engineer(s)	4
1.4	Description of modification for Modification Filing	4
1.5	Family List Rational	4
1.6	Antenna Requirement	4
1.7	Comments	4
2	TEST REPORT SUMMARY	5
2.1	General	5
2.2	Test Summary	6
3	TEST RESULTS	7
3.1	Power Line Conducted Emissions	7
3.2	Channel Separation and 20dB Bandwidth	8
3.3	Pseudorandom Hopping Algorithm	11
3.4	Occupancy Time	11
3.5	Occupied Bandwidth (99% BW) and Hopping Bandwidth	14
3.6	Peak Power Output	16
3.7	Conducted Emissions at Antenna Connector	19
3.8	Restricted Bands of Operation	25
3.9	Radiated Emissions, Band Edge	26
3.10	Radiated Emissions, 30 – 1000 MHz	28
3.11	Radiated Emissions, 1 - 26 GHz	32
4	Measurement Uncertainty	43
5	LIST OF TEST EQUIPMENT	44
6	BLOCK DIAGRAM	45
6.1	Power Line Conducted Emission	45
6.2	Test Site Radiated Emission	45

1 INFORMATION

1.1 Test Item

Name	Panasonic
Model name	KX-TPA73 (USA Model) KX-TPA73C (Canada Model)
FCC ID	ACJN96KX-TPA73
ISED ID	216A-KXTPA73
Serial number	/
Hardware identity and/or version	Main board: PNLB2818ZA Bluetooth unit: PNLB2188
Software identity and/or version	Main board: Ver 00.01 Bluetooth unit: Ver. 14.03
Frequency Range	2402 – 2480 MHz
Number of Channels	79
Operating Modes	Bluetooth Classic (Frequency Hopping)
Type of Modulation	GFSK
User Frequency Adjustment	None
Rated Output Power	6.5 mW (Conducted)
Power Supply	Secondary Battery (3.7 V, 800mAh, 3.0Wh, Li-ion)
Antenna Connector	None
Number of Antennas	1
Diversity or Smart Antennas	No

Description of Test Item

The EUT is a DECT Handset with Bluetooth.

The models KX-TPA73 and KX-TPA73C are identical.

1.2 Normal test condition

Temperature:	20 - 24 °C
Relative humidity:	20 - 50 %
Normal test voltage:	3.7 V DC

The values are the limit registered during the test period.

1.3 Test Engineer(s)

Frode Sveinsen

1.4 Description of modification for Modification Filing

Not applicable.

1.5 Family List Rational

Not Applicable.

1.6 Antenna Requirement

Is the antenna detachable?

Yes No

If detachable, is the antenna connector non-standard?

Yes No

Type of antenna connector: N/A

Ref. FCC §15.203

1.7 Comments

The measurements were performed with a fully charged battery.

2 TEST REPORT SUMMARY

2.1 General

All measurements are traceable to national standards.

The tests were conducted for demonstrating compliance with FCC CFR 47 Part 15, paragraph 15.247 and Industry Canada RSS-247 Issue 2 and RSS-GEN Issue 5.

Tests were performed in accordance with ANSI C63.4-2014 and ANSI C63.10-2013.

Radiated tests were made in a semi-anechoic chamber at measuring distances of 1m, 3m and 10m.

A description of the test facility is on file with FCC and ISED.

New Submission

Production Unit

Class II Permissive Change

Pre-production Unit

DSS Equipment Code

Family Listing



THIS TEST REPORT APPLIES ONLY TO THE ITEM(S) AND CONFIGURATIONS TESTED.

Deviations from, additions to, or exclusions from the test specifications are described in "Summary of Test Data".

Nemko Group authorizes the above named entity to reproduce this report provided it is reproduced in its entirety and for use by the entity's employees only. Any reproduction of parts of this report requires approval in writing from Nemko Group.

Any use that a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko Group accepts no responsibility for damages suffered by any third party caused by decisions made or actions based on this report.

2.2 Test Summary

Name of test	FCC Part 15 reference	RSS-247 Issue 2, RSS-GEN Issue 5 reference	ANSI C63.10-2013 Reference	Result
Supply Voltage Variations	15.31(e)	6.11 (RSS-GEN)	5.13	Complies
Antenna Requirement	15.203	6.8 (RSS-GEN)	5.8	Complies
Power Line Conducted Emission	15.107(a) 15.207(a)	7.2 / 8.8 (RSS-GEN)	6.2	Complies
Channel Separation and 20 dB BW	15.247(a)(1)	5.1 (4) (RSS-247)	7.8.2 (FHSS)	Complies
Number of Hopping Frequencies	15.31(m)	5.1 (6) (RSS-247)	7.8.3 (FHSS)	Complies
Pseudorandom Hopping Algorithm	15.247(a)(1)	5.1 (3) (RSS-247)	N/A (FHSS)	Complies
Time of Occupancy (dwell time)	15.247(a)(1)(iii)	5.1 (5) (RSS-247)	7.8.4 (FHSS)	Complies
Occupied Bandwidth	15.247(a)(1)	5.1 (7) (RSS-247)	6.9.2 FHSS)	Complies
Occupied Bandwidth (99% BW)	N/A	6.7 (RSS-GEN)	6.9.3	Complies
Peak Power Output	15.247(b)	5.4 (RSS-247)	11.9.1.1	Complies
Spurious Emissions (Antenna Conducted)	15.247(c)	5.5 (RSS-247)	6.7 7.8.6 (FHSS) 7.8.8 (FHSS)	Complies
Spurious Emissions (Radiated)	15.247(c) 15.109(a) 15.209(a)	5.5 (RSS-247) 7.3 (RSS-GEN) 8.9 (RSS-GEN)	6.3, 6.5, 6.6, 6.10	Complies

Revision history

Revision	Date	Comment	Sign
00	2019.11.05	First edition	FS
01	2020.01.30	Corrected test equipment list	FS

3 TEST RESULTS

3.1 Power Line Conducted Emissions

FCC Part 15.207

ISED RSS-GEN Issue 5, Clause 7.2/8.8

Measurement procedure: ANSI C63.4-2014 using 50 μ H/50 ohms LISN.

Test Results: Complies


Measurement Data: See attached plots.

Highest measured value (L1 and N):

Frequency (MHz)	QuasiPeak (dB μ V)	Average (dB μ V)	Limit (dB μ V)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter
---	---	---	---	---	---	---		

Measured with handset Charging, 120V 60Hz

Full Spectrum

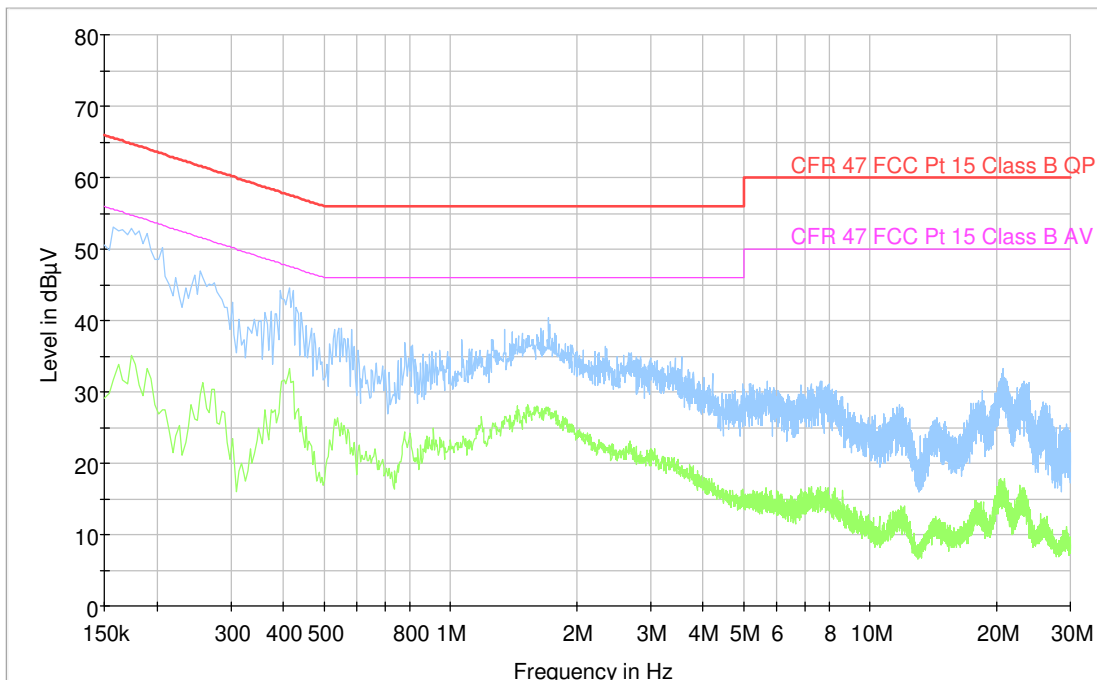

3.2 Channel Separation and 20dB Bandwidth

FCC Part 15.247(a)(1)

ISED RSS-247 Issue 2, Clause 5.1 (b)

Measurement procedure: ANSI C63.10-2013 Clause 7.8.2

Test Results: Complies

Measurement Data:


Channel Separation:	1.0 MHz
Nominal value for Channel Separation	1.0 MHz

Carrier Frequency	20 dB Bandwidth
2402 MHz	885 kHz
2441 MHz	889 kHz
2480 MHz	841 kHz

See attached plots

Requirement:


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the system operates with an output power no greater than 125 mW.

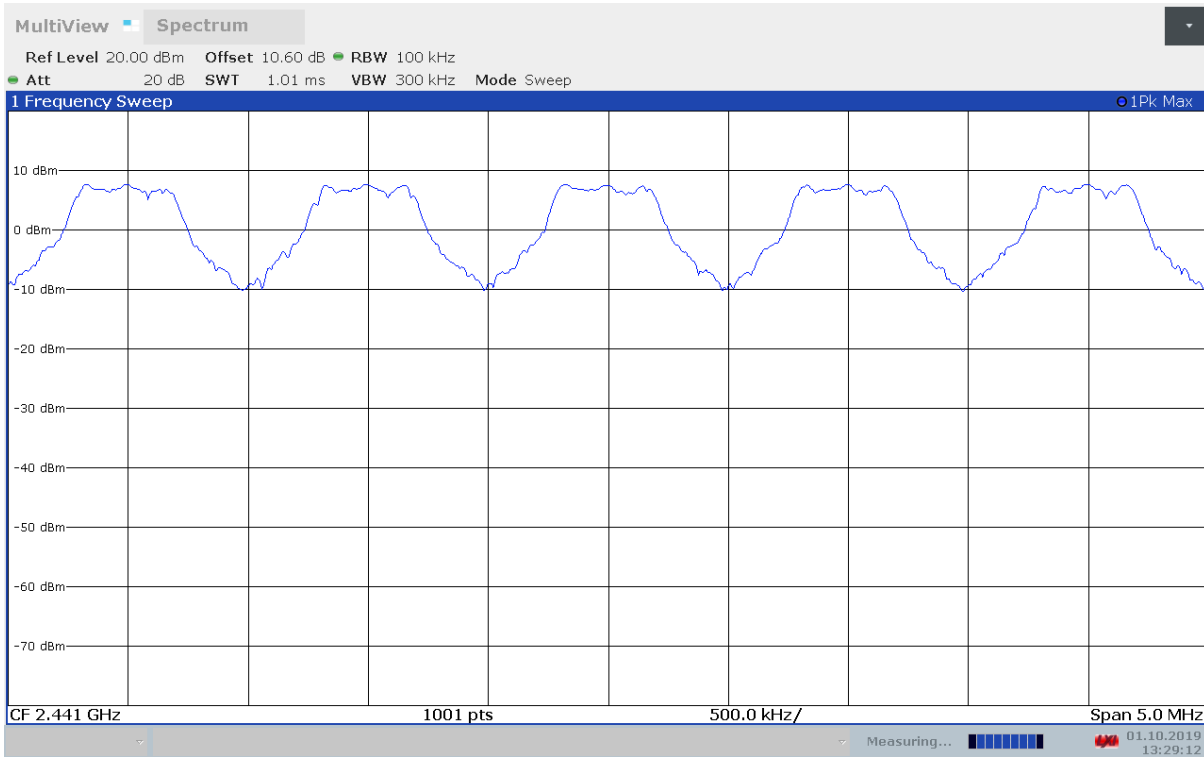


Channel Separation



20dB Bandwidth, 2402 MHz

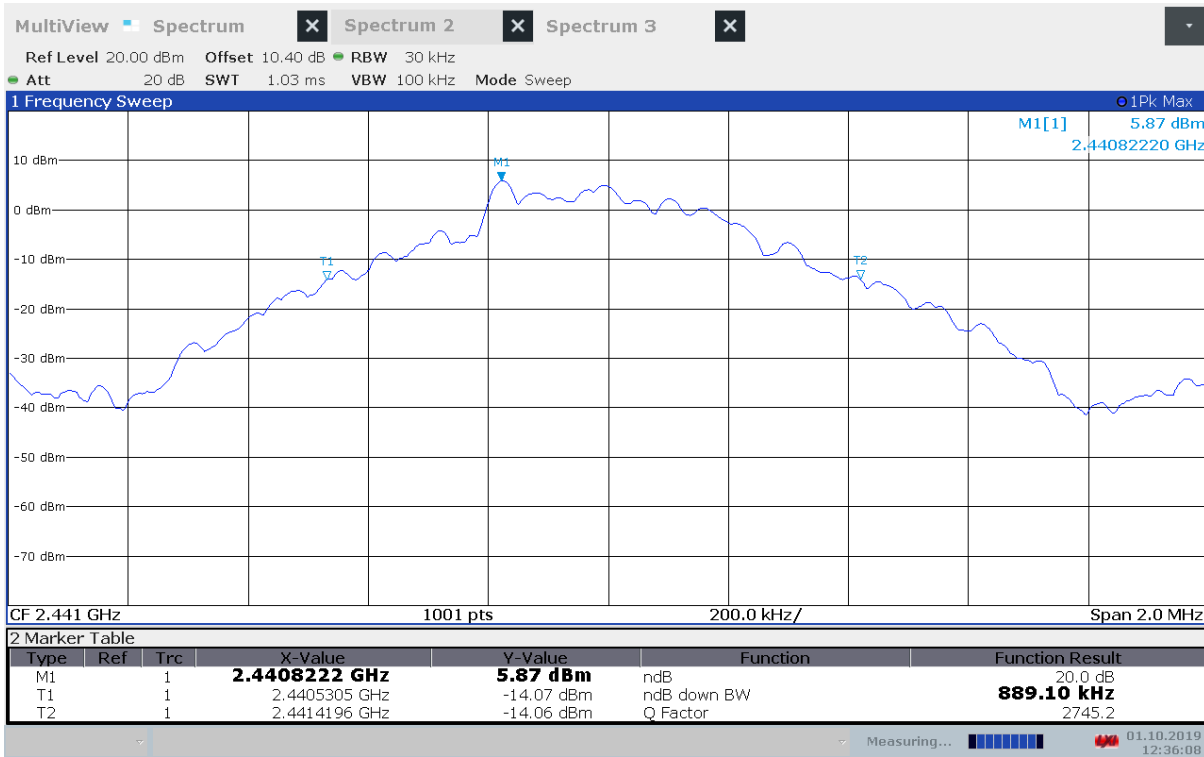

20dB Bandwidth, 2441 MHz

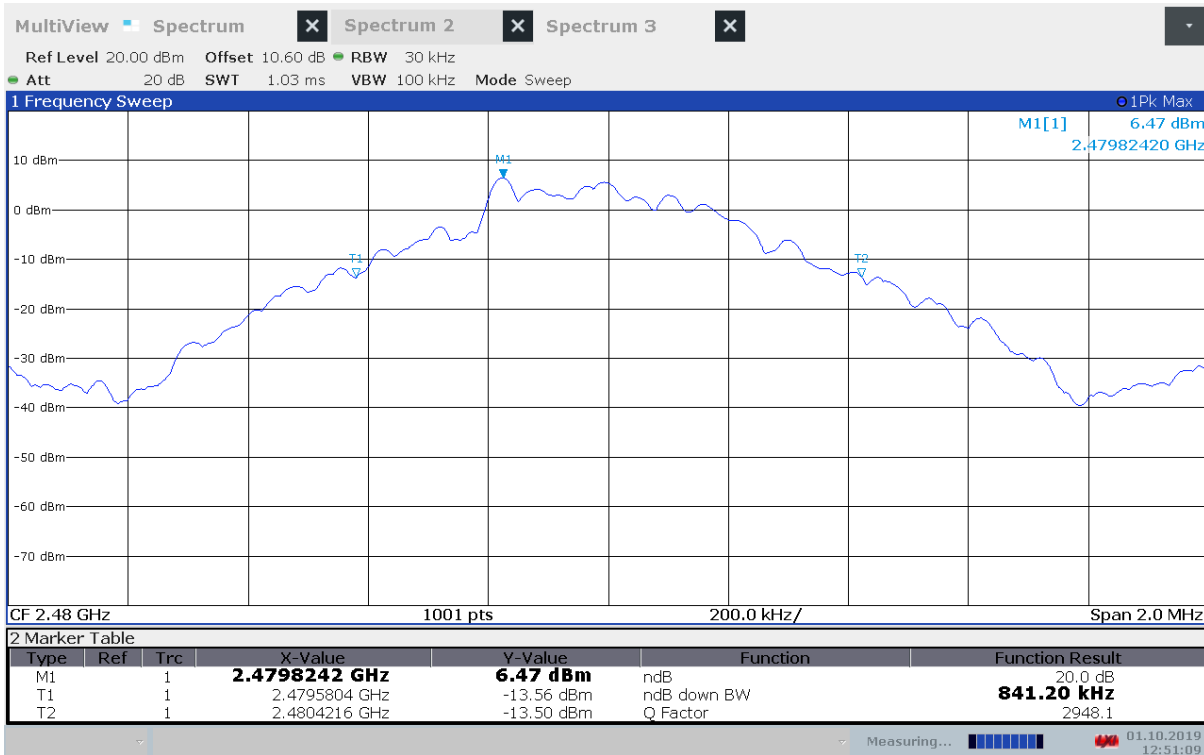

20dB Bandwidth, 2480 MHz

3.3 Pseudorandom Hopping Algorithm

FCC Part 15.247 (a)(1)

ISED Canada RSS-247 Issue 2, Clause 5.1

Test Results: **Complies**

Measurement Data: /

Requirements:

The channel frequencies shall be selected from a pseudorandom ordered list of hopping frequencies. Each frequency must be used equally by the transmitter.

3.4 Occupancy Time

FCC Part 15.247 (a)(1)(iii)

ISED Canada RSS-247 Issue 2, Clause 5.1 (c)

Measurement procedure: **ANSI C63.10-2013 Clause 7.8.4**

Test Results: **Complies**

Measurement Data:

Frame Type and Data Rate	Burst Length (ms)	Frame Length (ms)	Time of Occupancy (ms)	Verdict
DH1 – Basic Rate	0.395	1.25	126	Complies
DH3 – Basic Rate	1.65	2.50	264	Complies
DH5 – Basic Rate	2.90	3.75	310	Complies

Time between RF burst on same channel = Frame Length * Number of Channels


Time of occupancy = (Burst Length * Number of Channels * 400 ms) / Time Between Burst on Same Channel
 = (Burst Length * 400 ms) / Frame Length

Number of RF channels is minimum 20 and maximum 78


See attached plots

Requirements:


The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

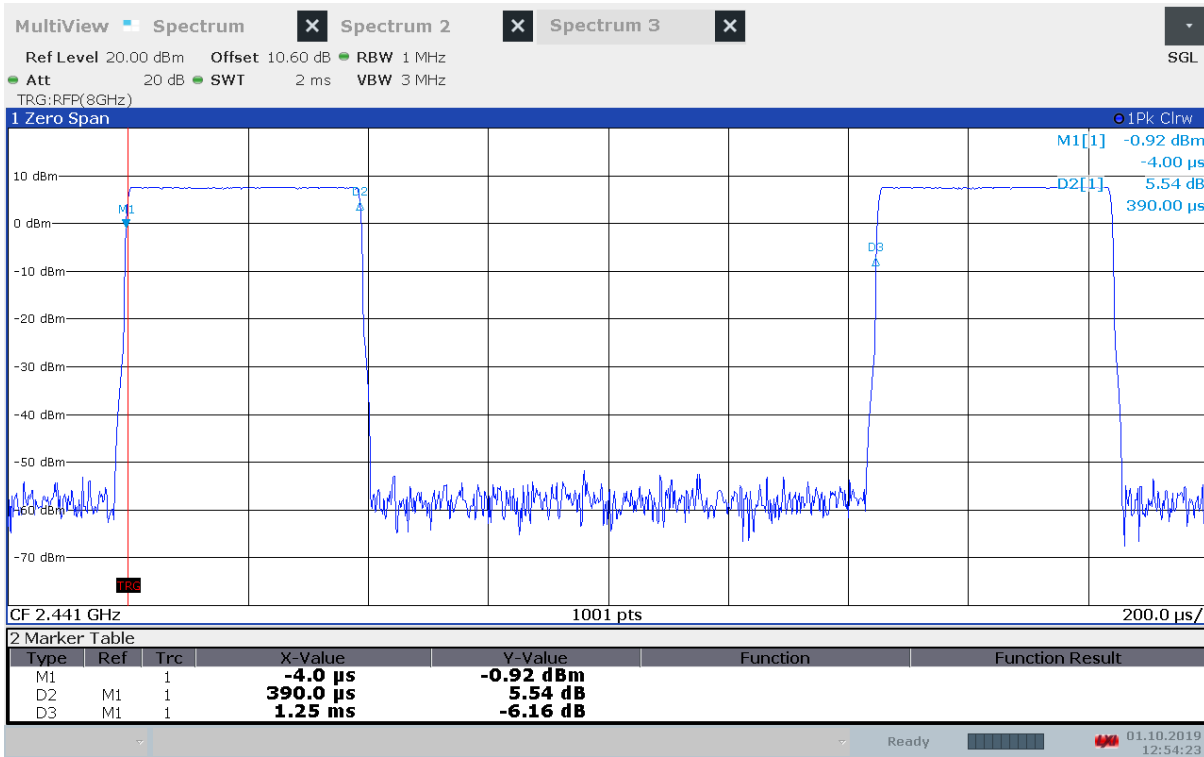

Burst Length, DH1

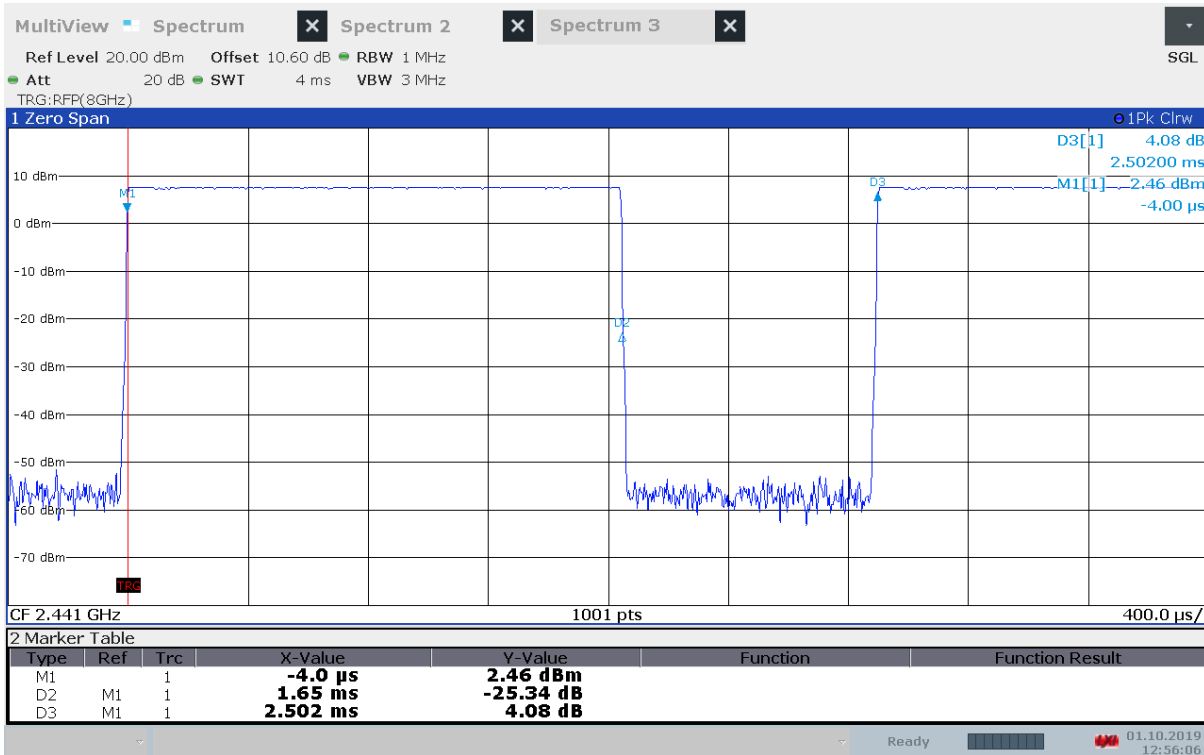

Burst Length, DH3

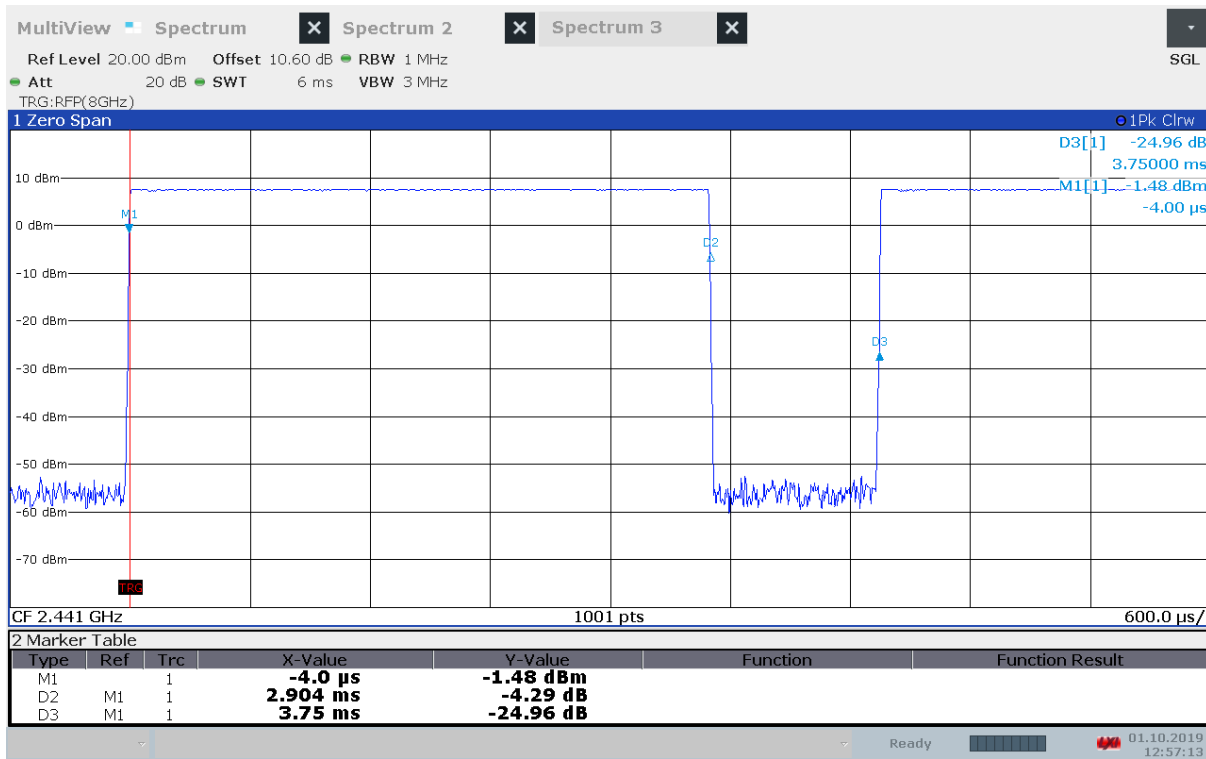

Burst Length, DH5

3.5 Occupied Bandwidth (99% BW) and Hopping Bandwidth

FCC Part 15.247 (a)(1)(iii)

ISED Canada RSS-247 Issue 2, Clause 5.1

ISED Canada RSS-GEN Issue 5, Clause 6.7

Measurement procedure: ANSI C63.10-2013 Clause 6.9.3 / 7.8.3

Test Results: Complies

Measurement Data:


Number of RF Channels in use:	79
Channel Centre Frequencies:	Every full MHz from 2402 to 2480 MHz
99% BW Measured on Centre Channel (2441 MHz)	848 kHz

See attached plots.

Requirements:

Frequency hopping systems in the 2400 - 2483.5 MHz band shall use at least 15 non-overlapping channels. No requirements for bandwidth for this frequency band.

No requirement for 99% BW, reported for information only.

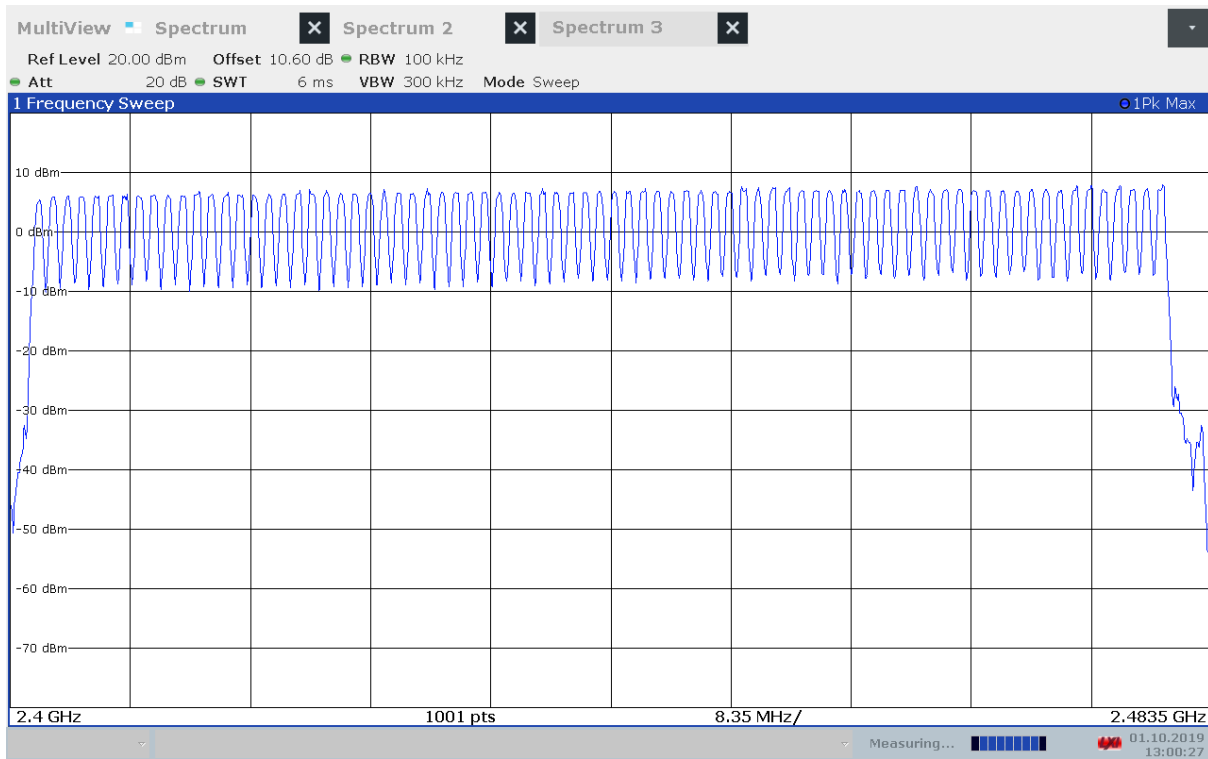

RF Channels in Use



99% Bandwidth

3.6 Peak Power Output

FCC Part 15.247 (b)

ISED Canada RSS-247 Issue 2, Clause 5.4

Measurement procedure: ANSI C63.10-2013 Clause 11.9.1.2

Test Results: Complies

Measurement Data:

	2402 MHz	2441 MHz	2480 MHz
Conducted Power (dBm)	6.3	7.7	8.1
Conducted Power (mW)	4.3	5.9	6.5
Antenna gain (dBi)	0	0	0

Antenna Gain is value declared by applicant.

See attached plots.


Requirements:

The maximum peak output power shall not exceed the following limits:


For frequency hopping systems employing at least 75 hopping channels: 1 Watt

For all other frequency hopping systems in the 2400 - 2483.5 MHz band: 0.125 Watts


If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power from the intentional radiator shall be reduced below the stated value above by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

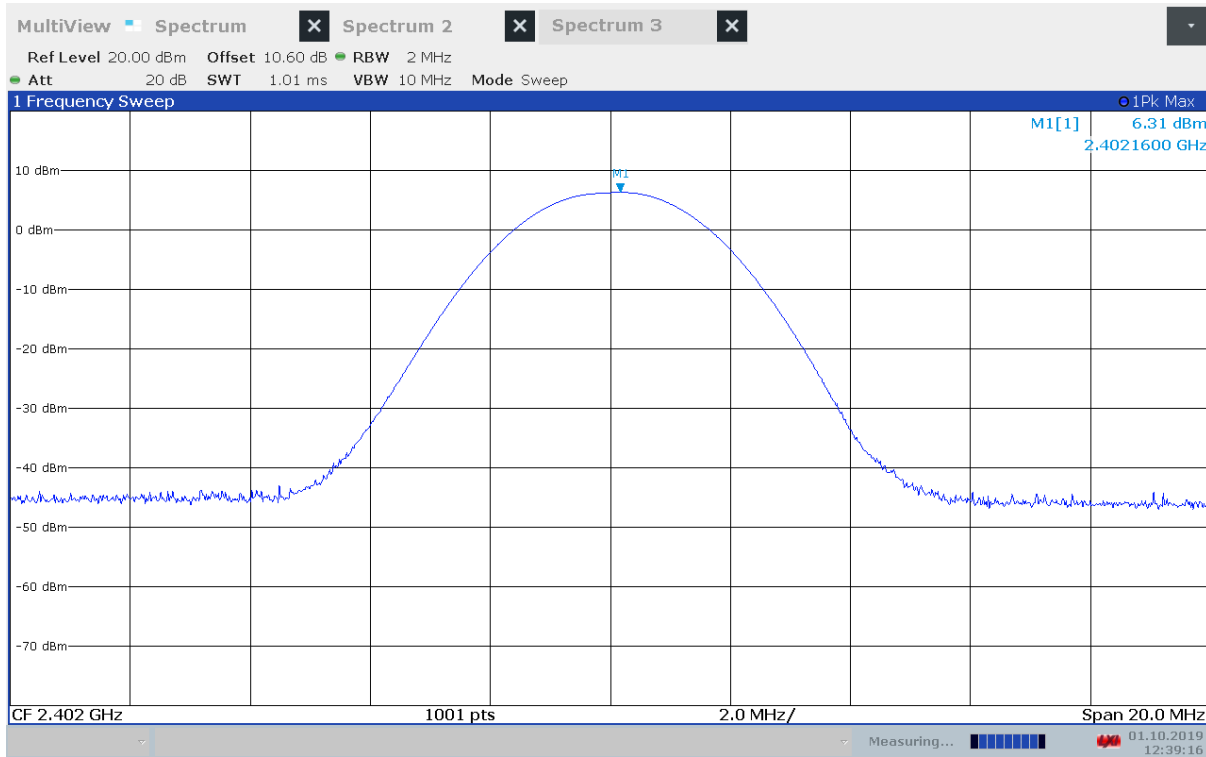

Conducted Output Power, 2402 MHz

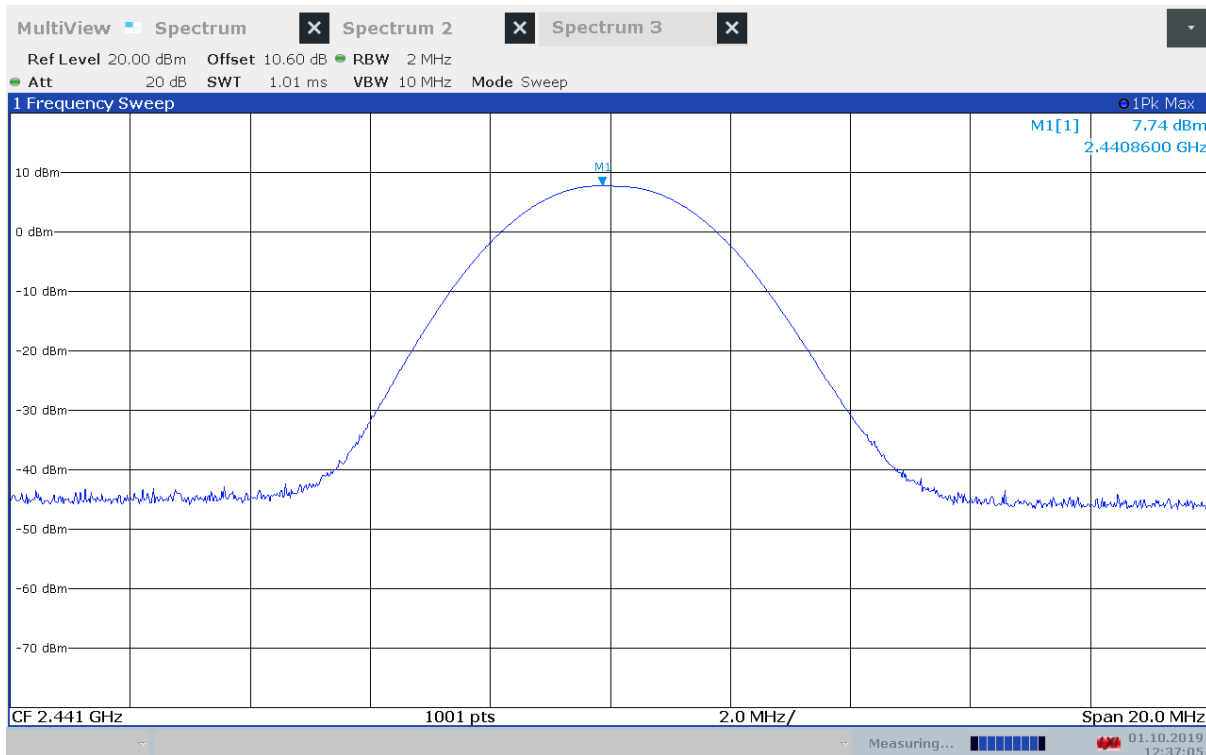

Conducted Output Power, 2441 MHz

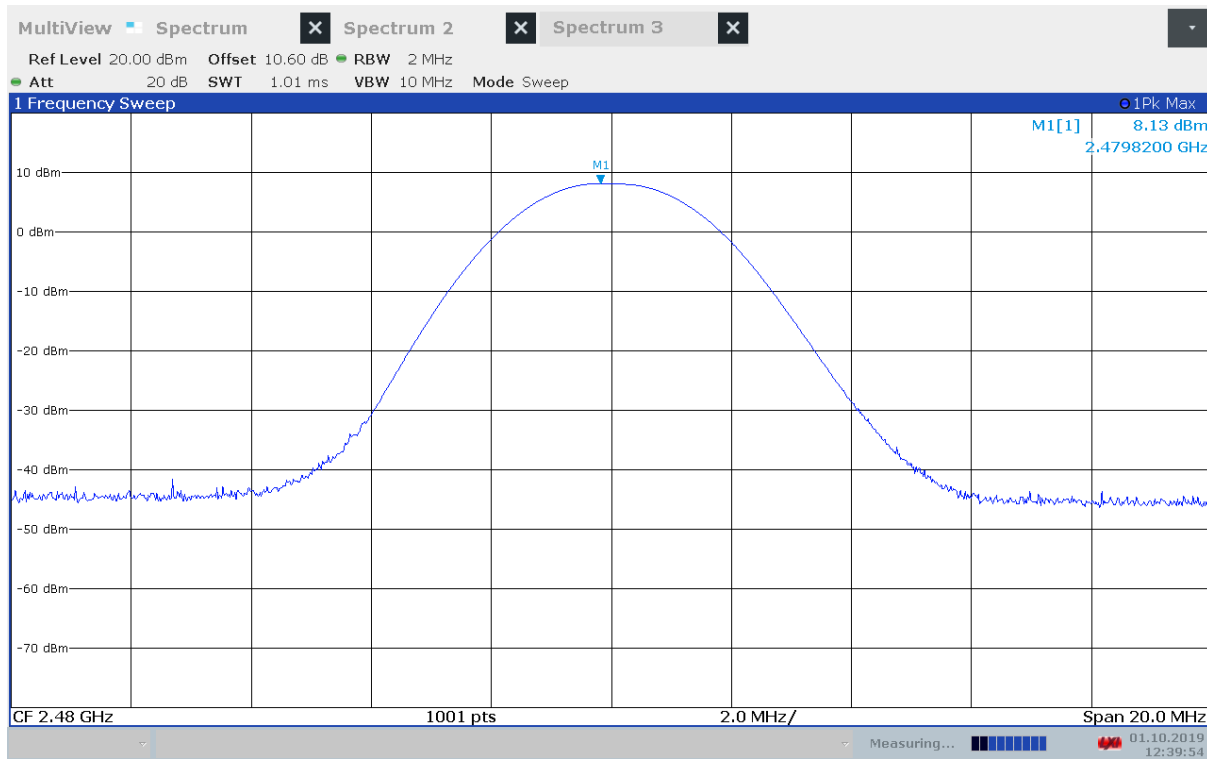

Conducted Output Power, 2480 MHz

3.7 Conducted Emissions at Antenna Connector

FCC Part 15.247 (d)

ISED Canada RSS-247 Issue 2, Clause 5.5

Measurement procedure: ANSI C63.10-2013 Clause 11.11

Test Results: Complies

Measurement Data:

Carrier Frequency	Highest Value (dBc)	Margin (dB)	Verdict
2402 MHz	> 50	> 30	Pass
2441 MHz	> 50	> 30	Pass
2480 MHz	> 50	> 30	Pass

Measured with Peak Detector


RF conducted power to 26 GHz: see attached plots.

Limit


Peak measurement	RMS averaging
20 dBc or more in 100 kHz bandwidth	30 dBc or more in 100 kHz bandwidth

Detector type shall be the same as used for measuring Output Power.


Attenuation below the general limits specified in part 15.209(a) is not required.

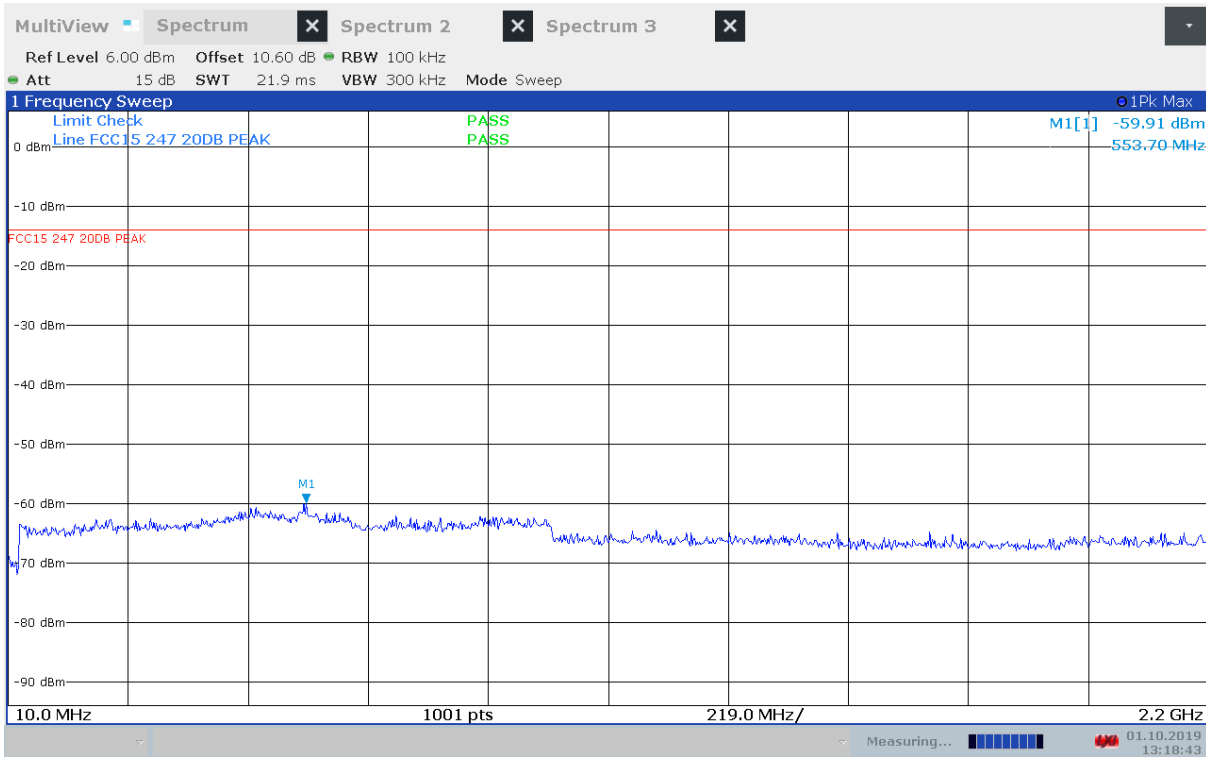


Conducted Emissions, 10 – 2200 MHz, Carrier 2402 MHz

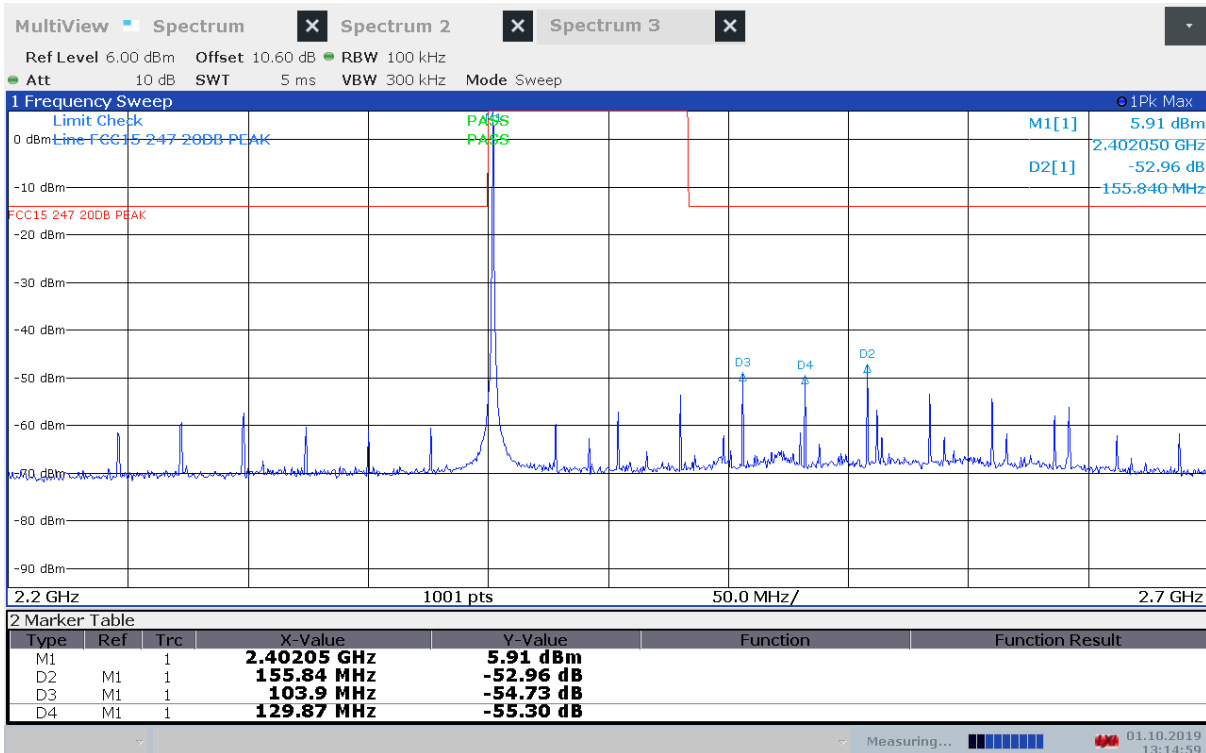


Conducted Emissions, 2200 – 2700 MHz, Carrier 2402 MHz

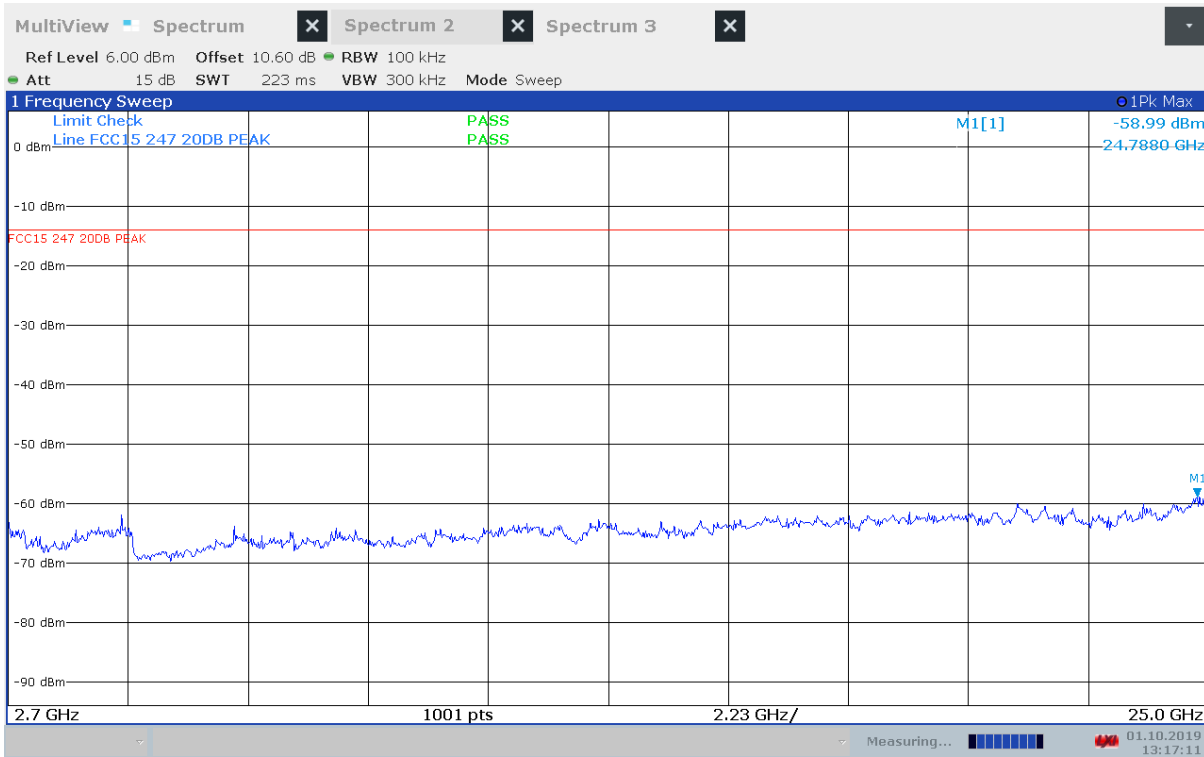


Conducted Emissions, 2700 – 25000 MHz, Carrier 2402 MHz

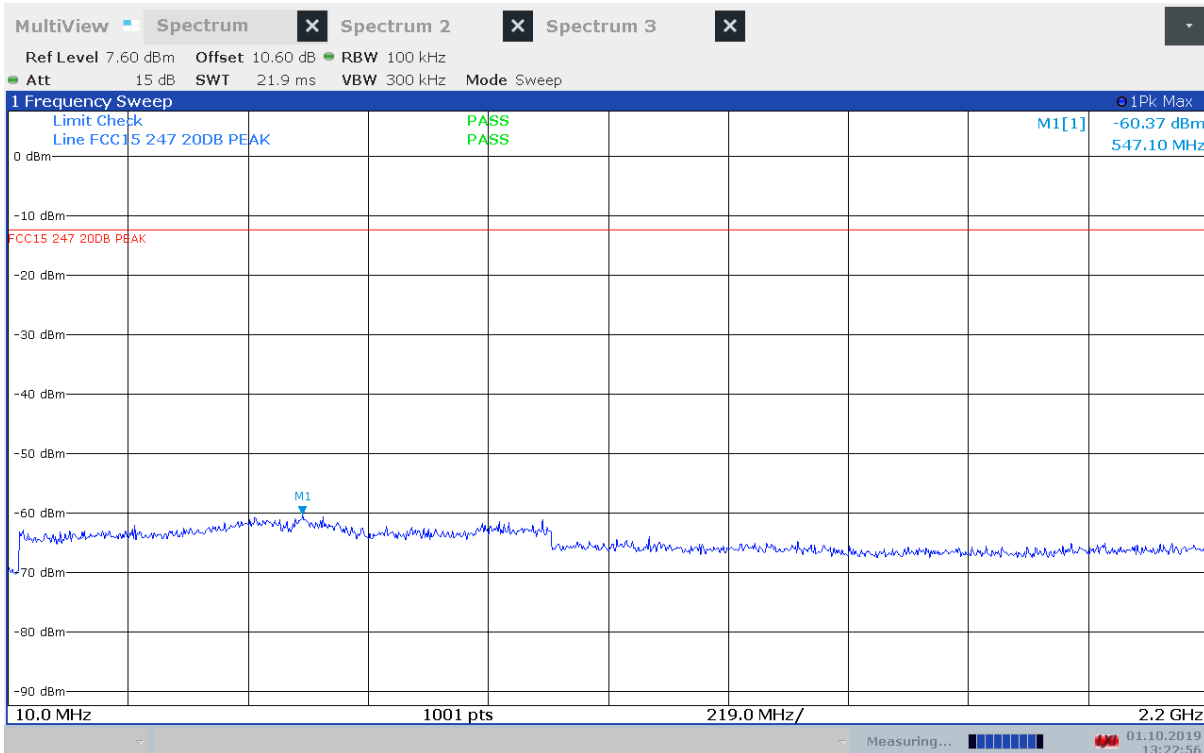


Conducted Emissions, 10 – 2200 MHz, Carrier 2441 MHz

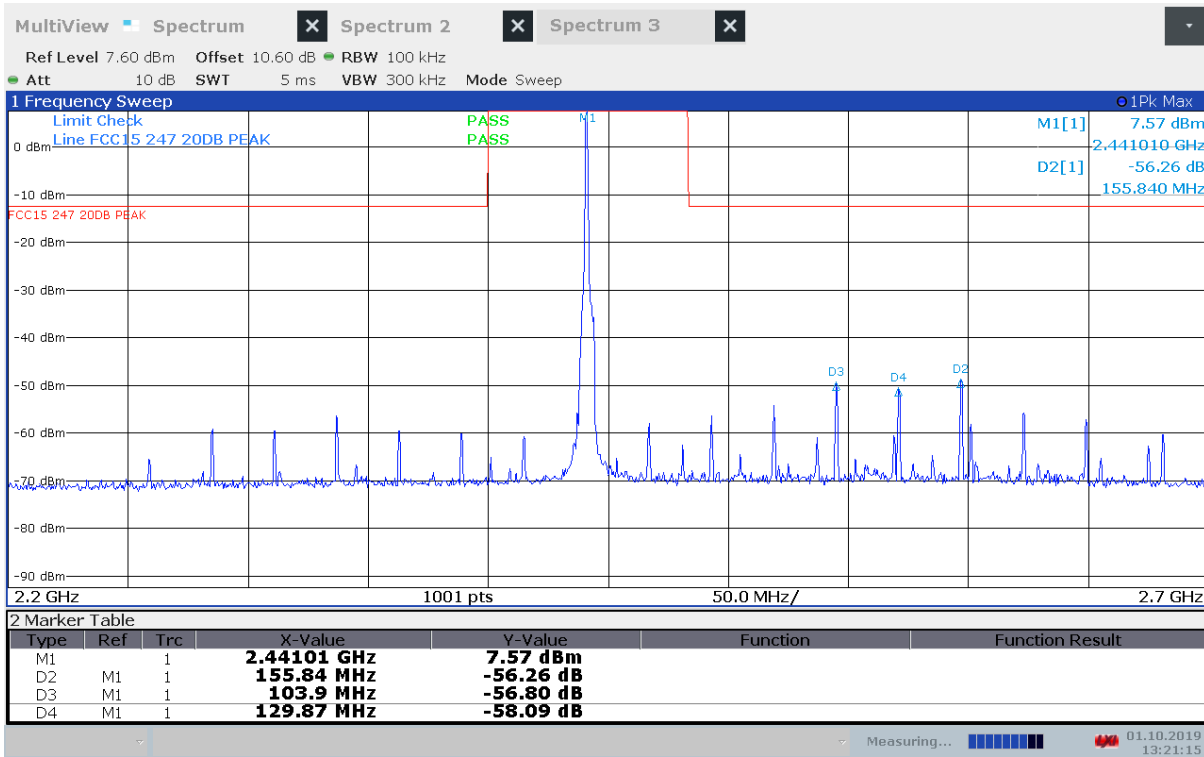


Conducted Emissions, 2200 – 2700 MHz, Carrier 2441 MHz

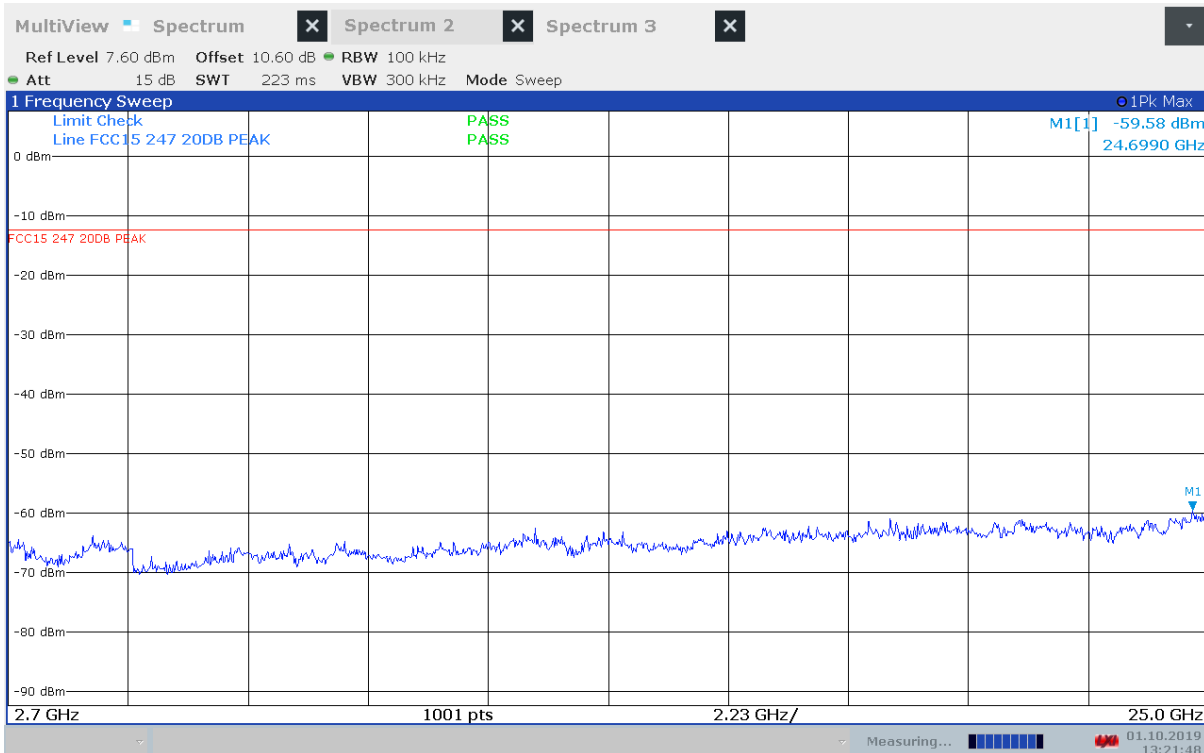


Conducted Emissions, 2700 – 25000 MHz, Carrier 2441 MHz

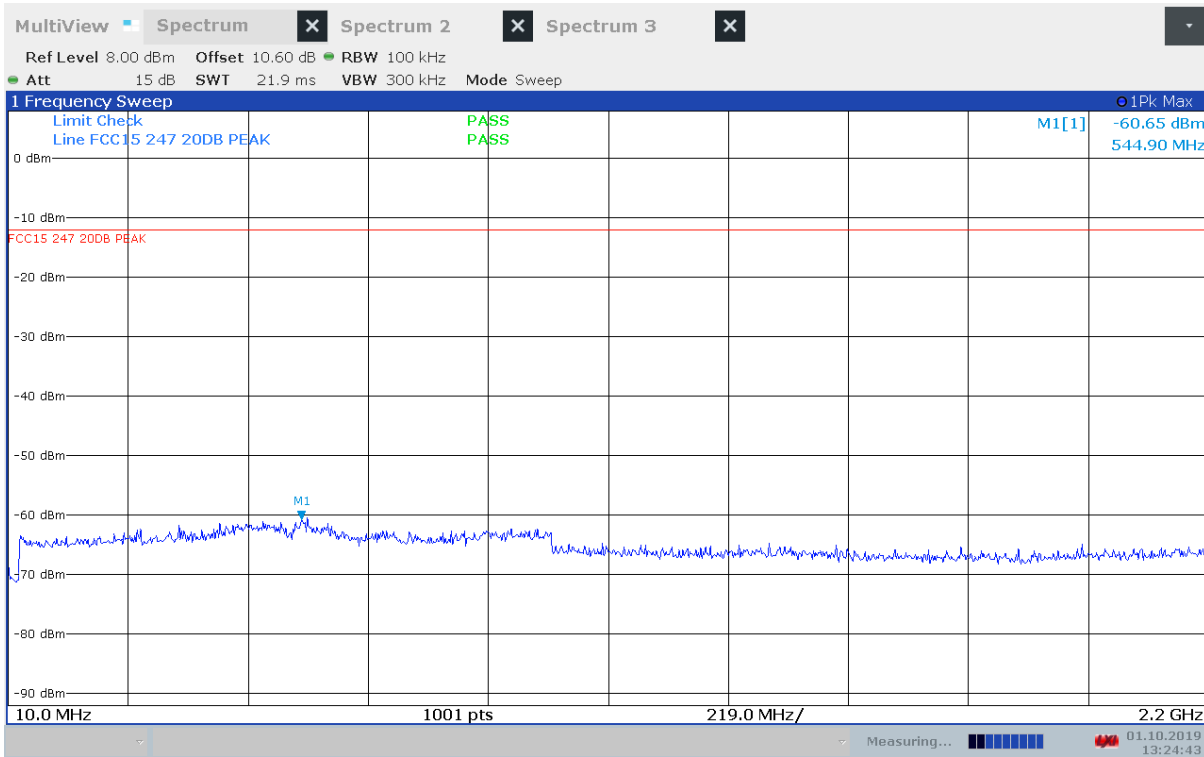


Conducted Emissions, 10 – 2200 MHz, Carrier 2480 MHz

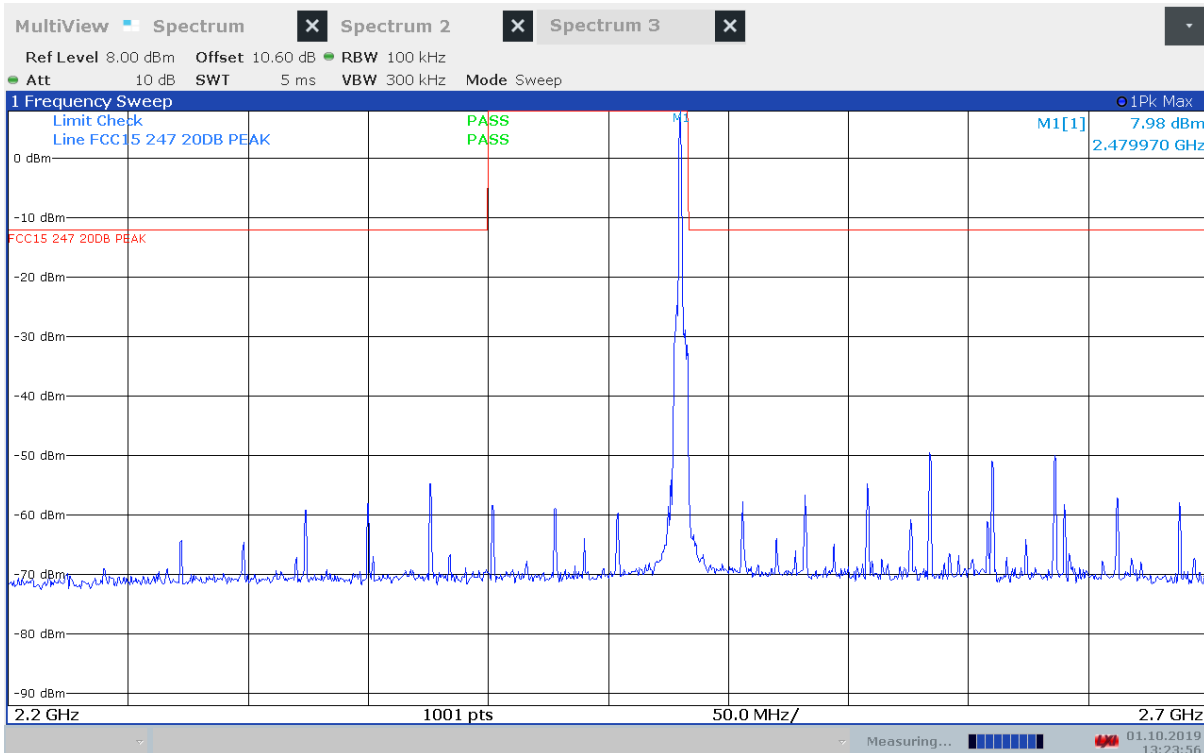

Conducted Emissions, 2200 – 2700 MHz, Carrier 2480 MHz

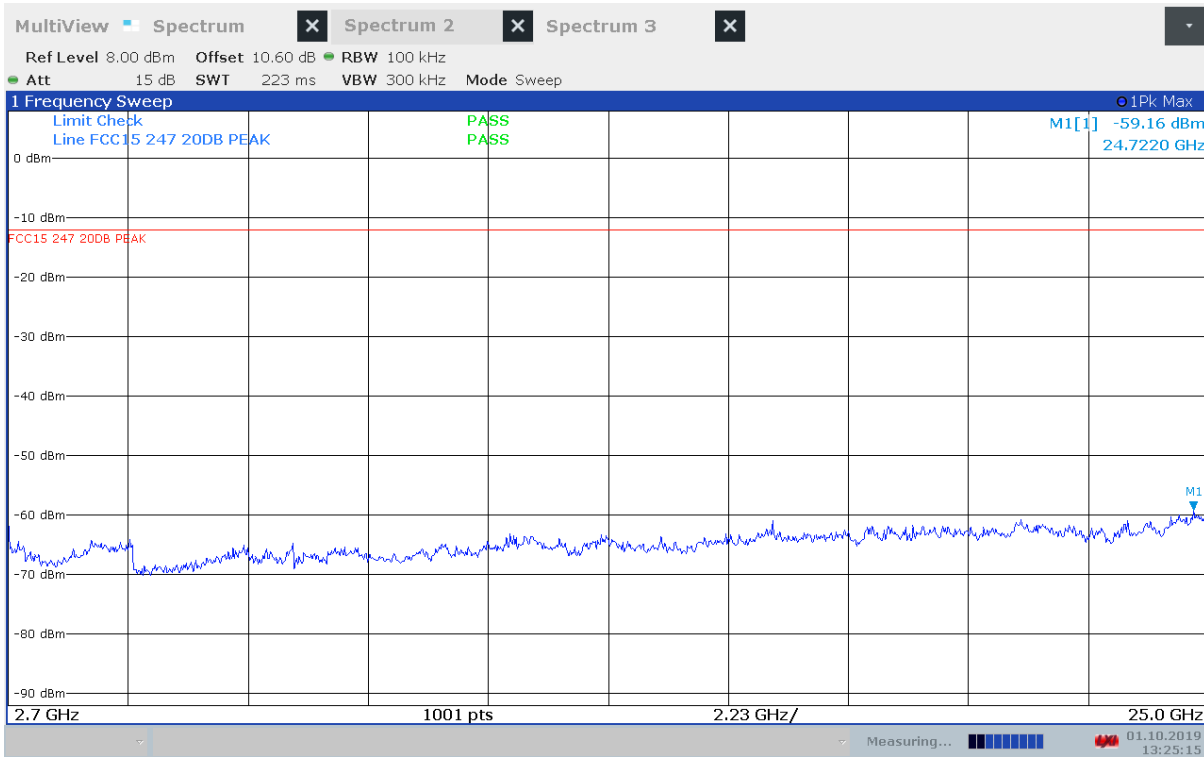

Conducted Emissions, 2700 – 25000 MHz, Carrier 2480 MHz

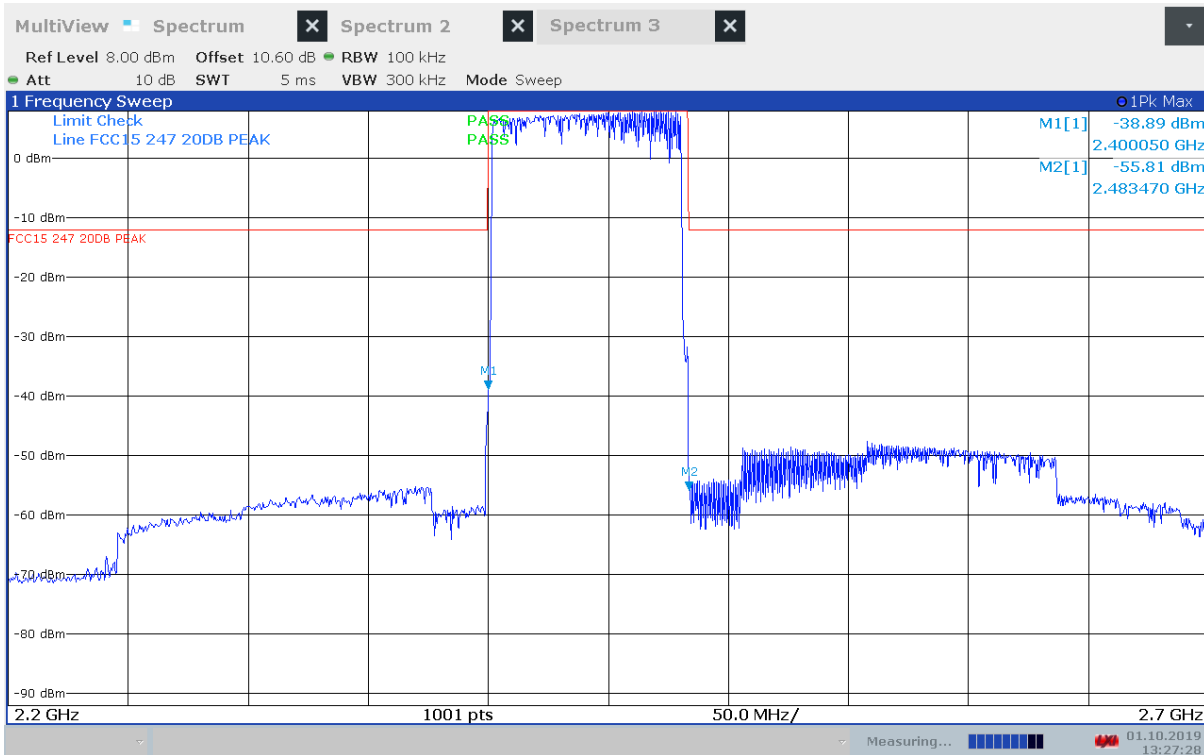

Conducted Emissions, 2200 – 2700 MHz, Hopping

3.8 Restricted Bands of Operation

Restricted Bands of operation for FCC and ISED are defined in FCC Part 15.205 and ISED RSS-GEN, Issue 5 clause 8.10.

Generally, no fundamentals are allowed in the restricted bands and all emissions must comply with the limits in FCC 15.209 or RSS-GEN, Issue 5, clause 8.9.

FCC (MHz)	ISED (MHz)	FCC (GHz)	ISED (GHz)
0.090-0.110		0.96-1.24 1.3-1.427	0.96-1.427
0.495-0.505		1.435-1.6265	
2.1735-2.1905		1.6455-1.6465	
	3.020-3.026	1.660-1.710	
4.125-4.128		1.7188-1.7222	
4.17725-4.17775		2.2-2.3	
4.20725-4.20775		2.31-2.39	
	5.677-5.683	2.4835-2.5	
6.215-6.218		2.69-2.9	2.655-2.9
6.26775-6.26825		3.26-3.267	
6.31175-6.31225		3.332-3.339	
8.291-8.294		3.3458-3.358	
8.362-8.366		3.6-4.4	3.5-4.4
8.37625-8.38675		4.5-5.15	
8.41425-8.41475		5.35-5.46	
12.29-12.293		7.25-7.75	
12.51975-12.52025		8.025-8.5	
12.57675-12.57725		9.0-9.2	
13.36-13.41		9.3-9.5	
16.42-16.423		10.6-12.7	
16.69475-16.69525		13.25-13.4	
16.80425-16.80475		14.47-14.5	
25.5-25.67		15.35-16.2	
37.5-38.25		17.7-21.4	
73-74.6		22.01-23.12	
74.8-75.2		23.6-24.0	
108-121.94 123-138	108-138	31.2-31.8	
149.9-150.05		36.43-36.5	
156.52475-156.52525		Above 38.6	
156.7-156.9			
162.0125-167.17			
167.72-173.2			
240-285			
322-335.4			
399.9-410			
608-614			

Frequencies in **Bold** text are specific for FCC or ISED, all other frequencies are common.

3.9 Radiated Emissions, Band Edge

FCC Part 15.209 (a)

ISED Canada RSS-GEN Issue 5, Clause 7.3 / 8.9

Measurement procedure: ANSI C63.10-2013 Clause 11.12

Test Results: Complies

Measurement Data:

	Measured field strength (dB μ V/m)		Limit	Margin	
	2390 MHz	2483.5 MHz	dB μ V/m	dB	
Peak Detector	41.2	59.6	74	32.8	14.4
Average Detector	21.2	39.6	54	32.8	14.4


Average Detector values are measured with Peak Detector and corrected for Duty Cycle.

See attached plots.

Duty Cycle Correction Factor Calculation:


Duty Cycle = slot length / (frame length * Minimum Number of Channels)

Maximum Duty Cycle Correction Factor according to Para 15.35 (b): 20 dB

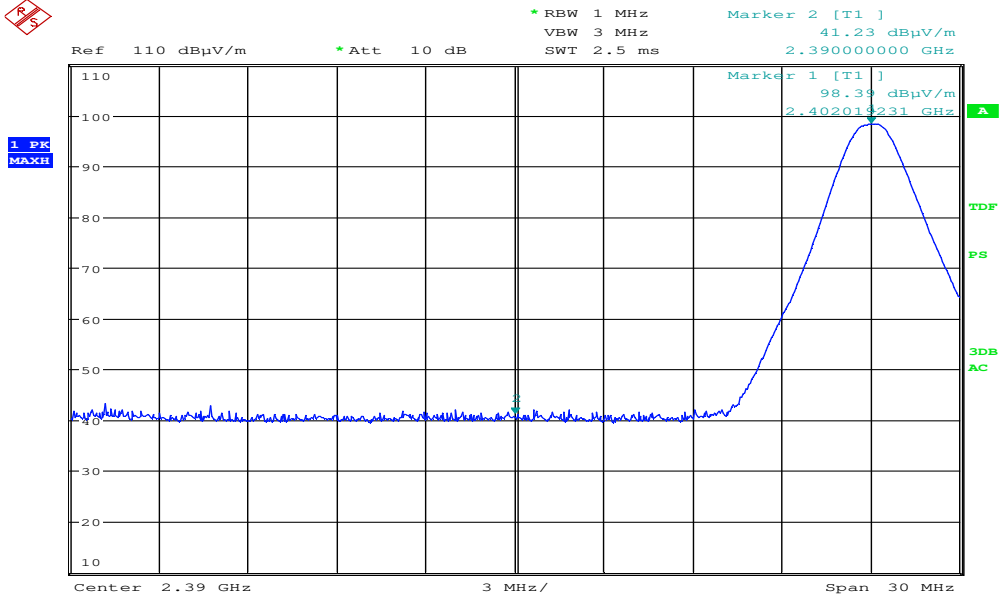

Date: 7.OCT.2019 12:22:06

Lower Band Edge, Peak, 2402MHz (Max: EUT V, VP)

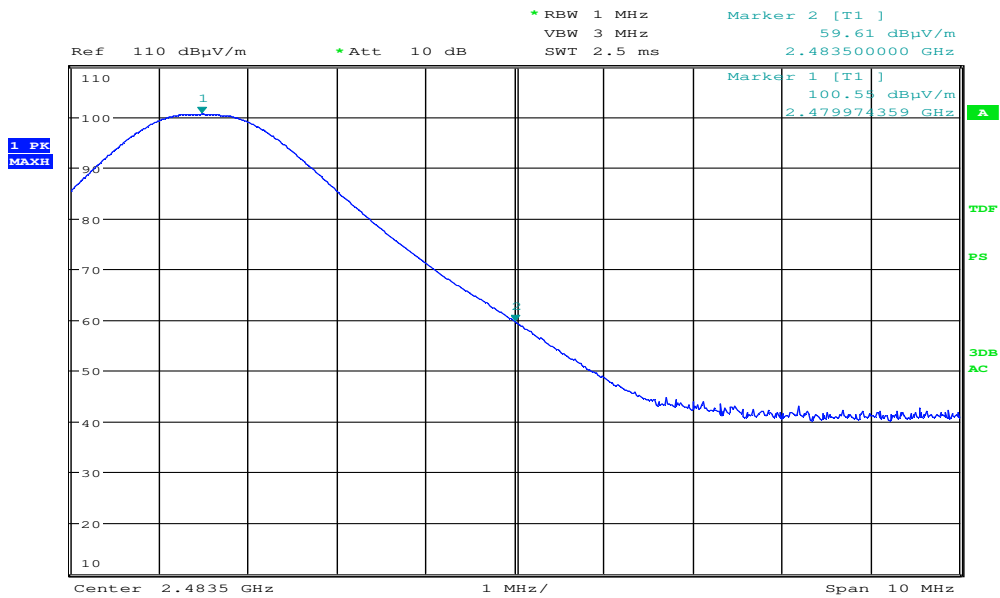

Date: 7.OCT.2019 13:16:38

Upper Band Edge, Peak, 2480MHz (Max: EUT V, VP)

3.10 Radiated Emissions, 30 – 1000 MHz.

FCC Part 15.209 (a)

ISED Canada RSS-GEN Issue 5, Clause 7.3/8.9

Measurement procedure: ANSI C63.10-2013 Clause 11.12

Test Results: Complies

Detector: Quasi-Peak

Measuring distance 3m


Tested in normal mode

Frequency (MHz)	QuasiPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Bandwidth (kHz)	Pol
622.1	27.0	46.00	19.0	120.000	V

See attached plots


Requirements/Limit

FCC	Part 15.209 @ frequencies defined in §15.205	
ISED	RSS-GEN Issue 5, Clause 8.9 @ frequencies defined in clause 8.10	
Frequency	Radiated emission limit @3 meters	
30 – 88 MHz	100 μ V/m	40.0 dB μ V/m
88 – 216 MHz	150 μ V/m	43.5 dB μ V/m
216 – 960 MHz	200 μ V/m	46.0 dB μ V/m
960 – 1000 MHz	500 μ V/m	54.0 dB μ V/m
	Limits above are with Quasi Peak Detector	

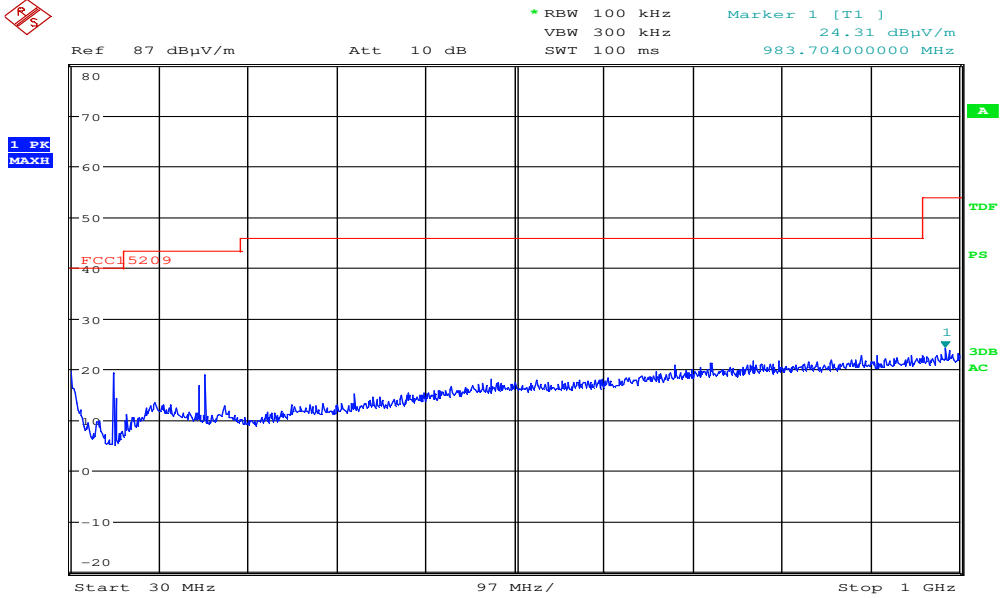


Date: 7.OCT.2019 10:46:56

Radiated Emissions, 30 – 1000 MHz, EUT V, HP

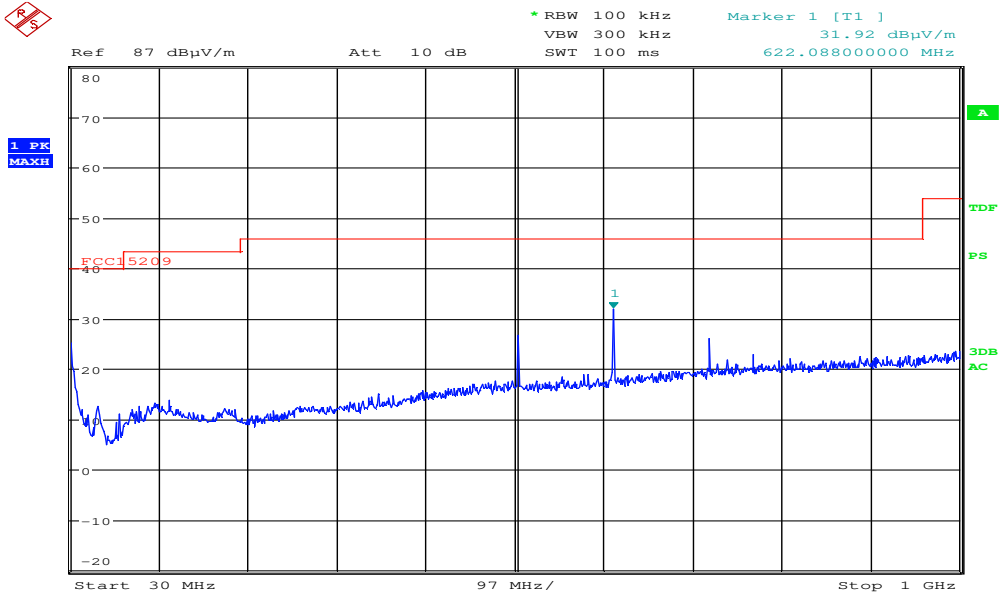


Date: 7.OCT.2019 10:44:04

Radiated Emissions, 30 – 1000 MHz, EUT V, VP

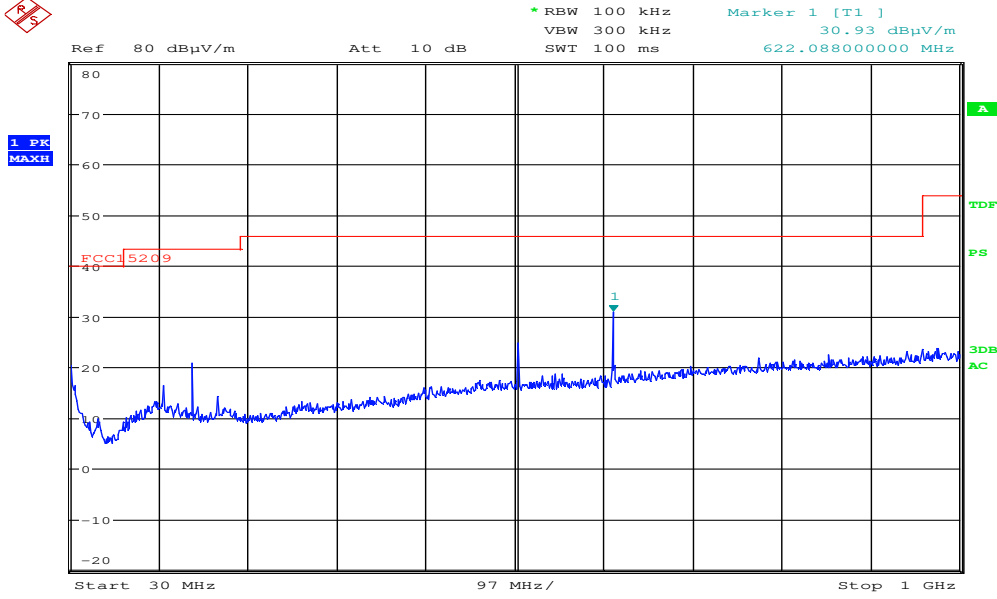



Date: 7.OCT.2019 10:38:37

Radiated Emissions, 30 – 1000 MHz, EUT H, HP

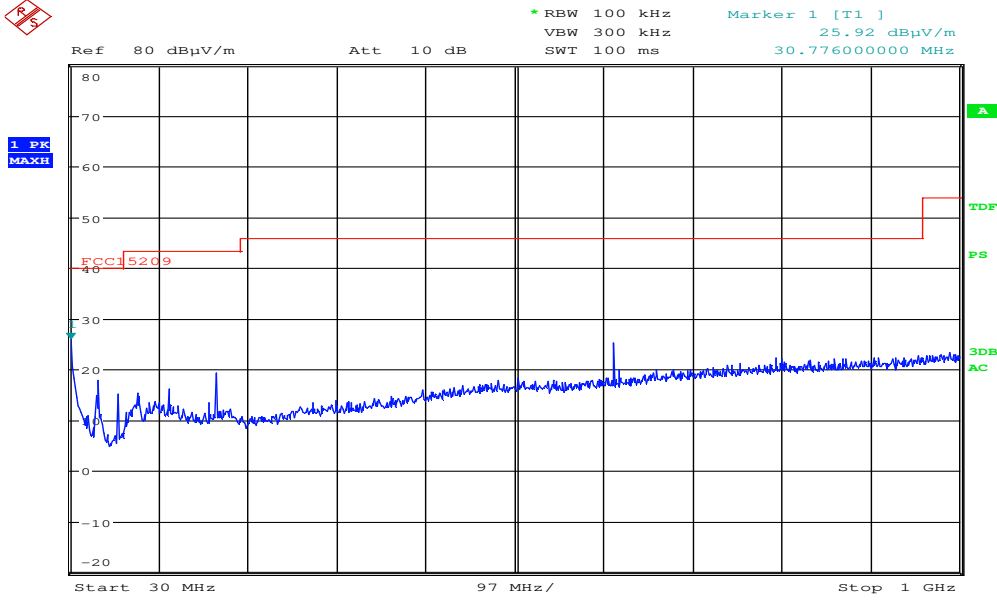

Date: 7.OCT.2019 10:35:46

Radiated Emissions, 30 – 1000 MHz, EUT H, VP

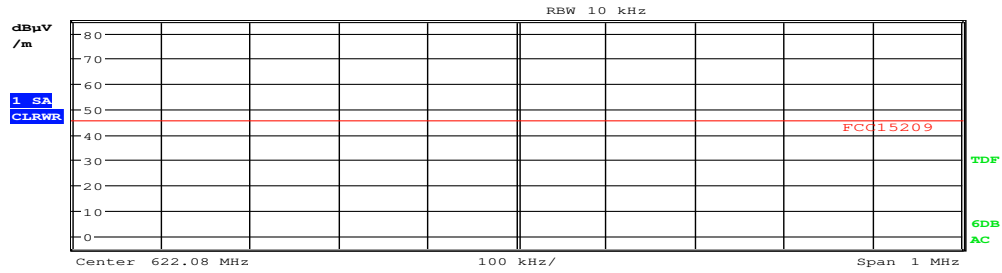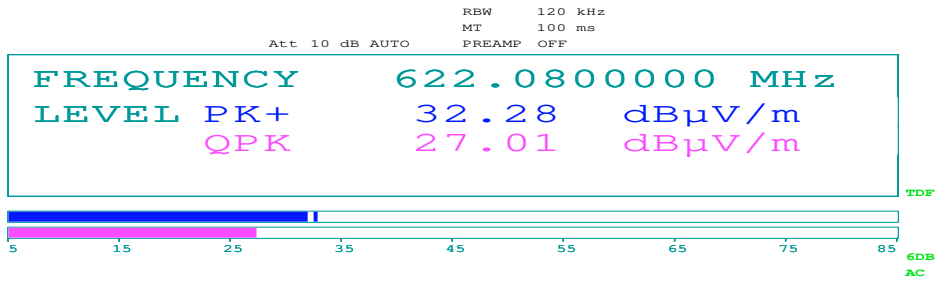

Date: 7.OCT.2019 11:03:14

Radiated Emissions, 622.1MHz, Hopping, QuasiPeak, Max: VP

3.11 Radiated Emissions, 1 - 26 GHz

FCC Part 15.209 (a)

ISED Canada RSS-GEN Issue 5, Clause 7.3/8.9

Measurement procedure: ANSI C63.10-2013 Clause 11.12

Test Results: Complies

Measuring distance: 3m (1 – 18 GHz)
 A pre-scan at approx. 10cm was performed from 18 – 26 GHz

Peak Detector:

Frequency	RF channel	Dist. corr. factor	Field strength, Peak Detector, 3m	Limit	Margin
GHz	L,M,H	dB	dB μ V/m	dB μ V/m	dB
1 – 18	L,M,H	0	None detected	74	>20
18 - 26	L,M,H	-9.5	None detected	74	>20

Average Detector:

Frequency	RF channel	Dist. corr. factor	Field strength, Peak Detector, 3m	Duty cycle corr. factor	Limit	Margin
GHz	L,M,H	dB	dB μ V/m	dB	dB μ V/m	dB
1 – 18	L,M,H	0	None detected	20	54	>20
18 - 26	L,M,H	-9.5	None detected	20	54	>20


Average Detector values are calculated from Peak values by Duty Cycle Correction Factor.

Antenna factor, amplifier gain and cable loss are included in spectrum analyzer "Transducer factor".

See plots.


Requirements/Limit

FCC	Part 15.209 @ frequencies defined in §15.205	
ISED	RSS-GEN Issue 5, clause 8.9 @ frequencies defined in clause 8.10	
Radiated emission limit @3 meters		
Frequency	Average Detector	Peak Detector
1 – 26 GHz	54.0 dB μ V/m	74.0 dB μ V/m

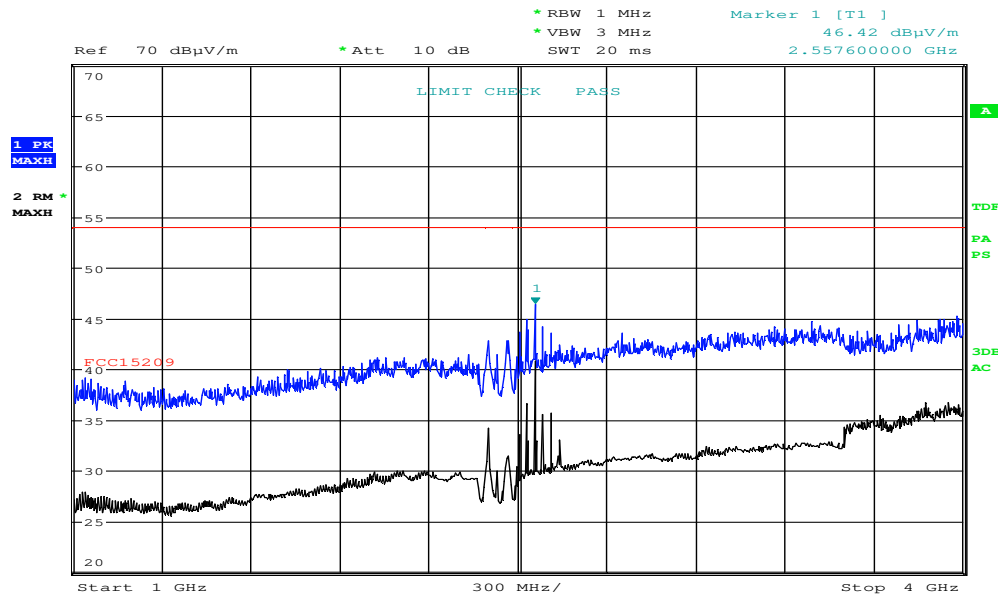


Date: 7.OCT.2019 12:30:47

Radiated Emissions, 1000 -4000 MHz, 2402MHz, HP

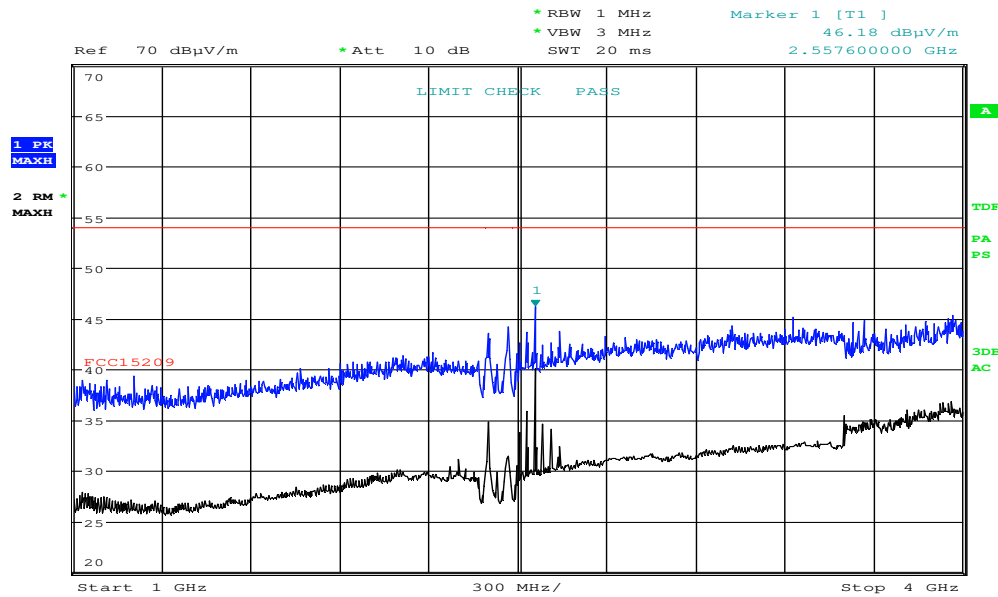


Date: 7.OCT.2019 12:28:51

Radiated Emissions, 1000 -4000 MHz, 2402MHz, VP

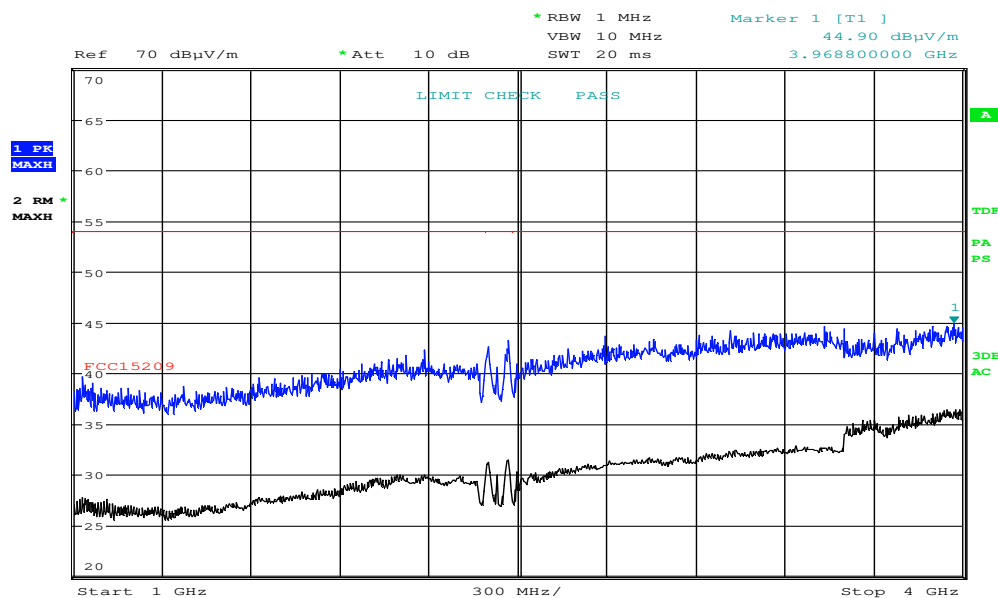


Date: 7.OCT.2019 13:27:18

Radiated Emissions, 1000 -4000 MHz, 2441MHz, HP

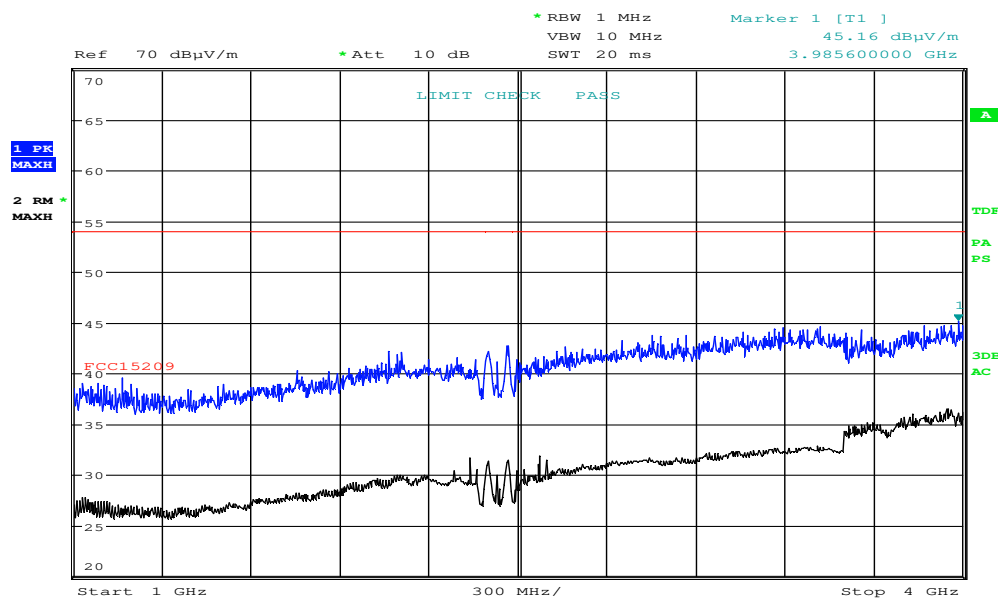


Date: 7.OCT.2019 13:25:23

Radiated Emissions, 1000 -4000 MHz, 2441MHz, VP

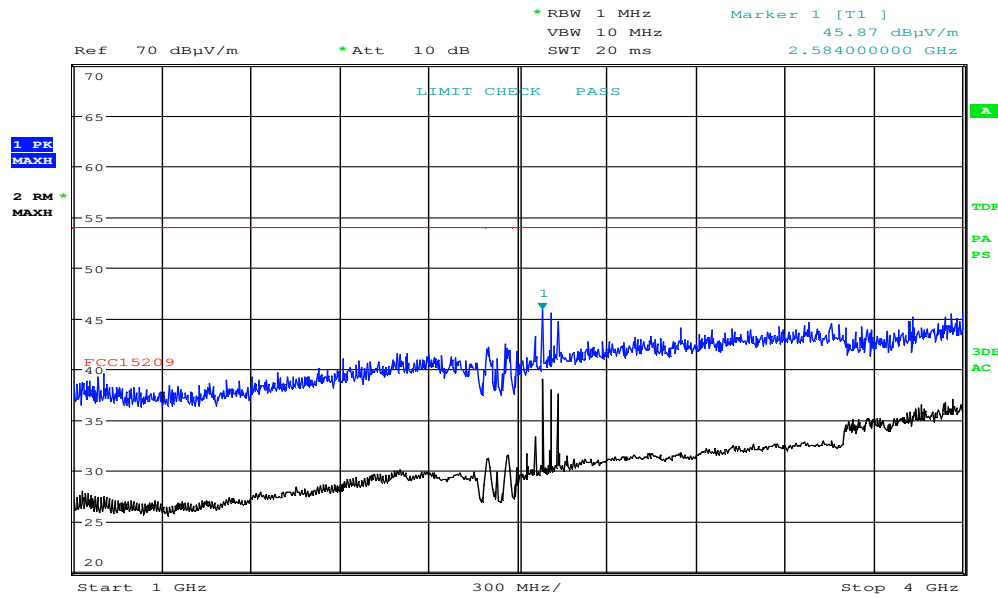


Date: 7.OCT.2019 12:40:01

Radiated Emissions, 1000 -4000 MHz, 2480MHz, HP

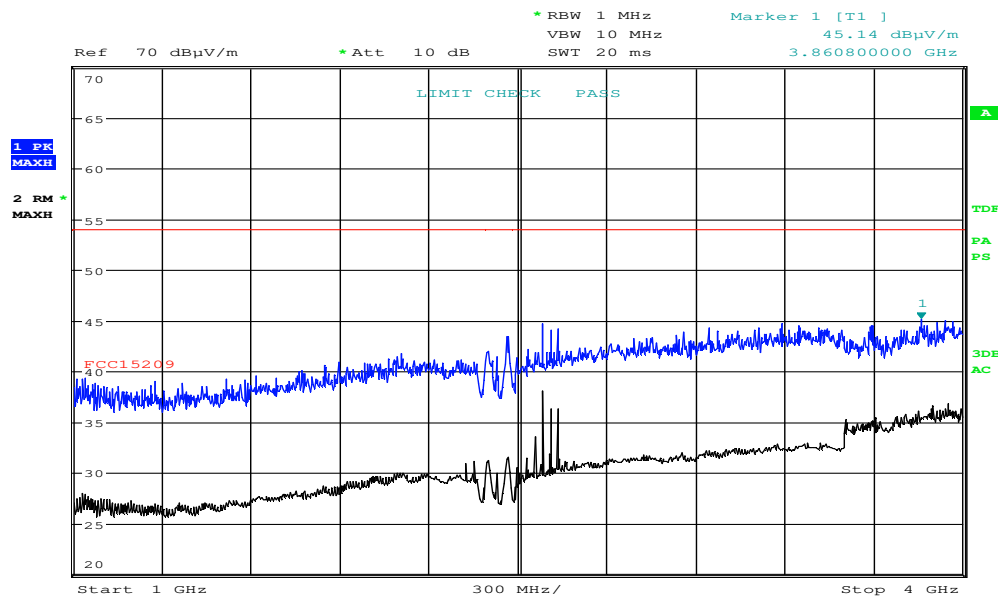


Date: 7.OCT.2019 12:38:06

Radiated Emissions, 1000 -4000 MHz, 2480MHz, VP

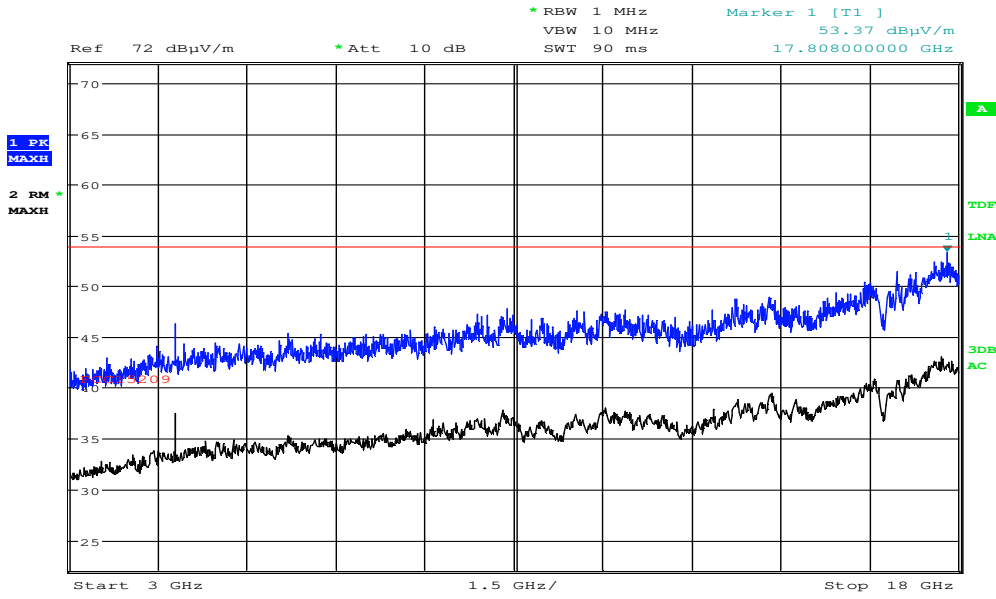


Date: 7.OCT.2019 14:10:43

Radiated Emissions, 3000 -18000 MHz, 2402MHz, HP

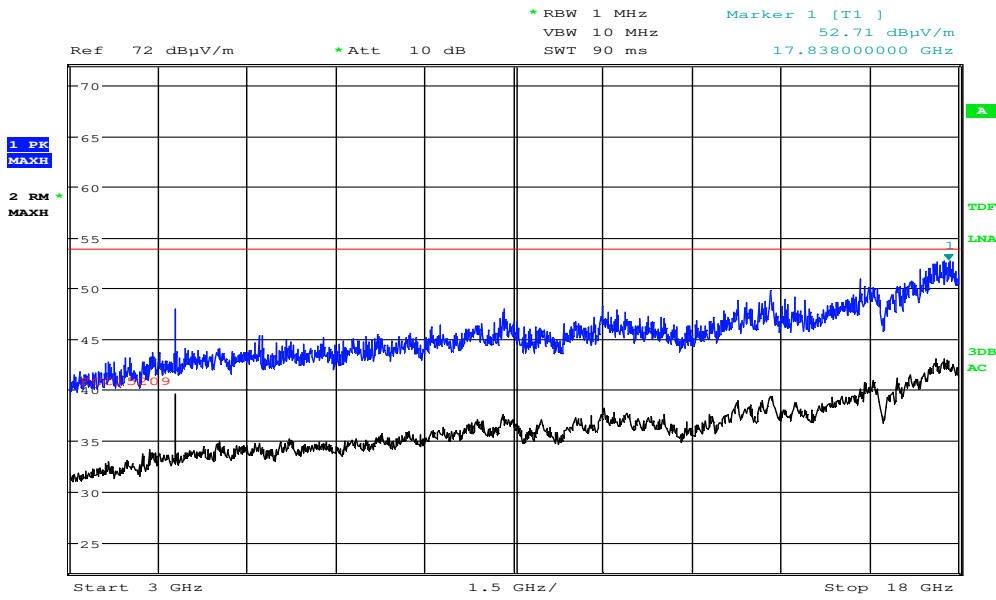


Date: 7.OCT.2019 14:08:47

Radiated Emissions, 3000 -18000 MHz, 2402MHz, VP

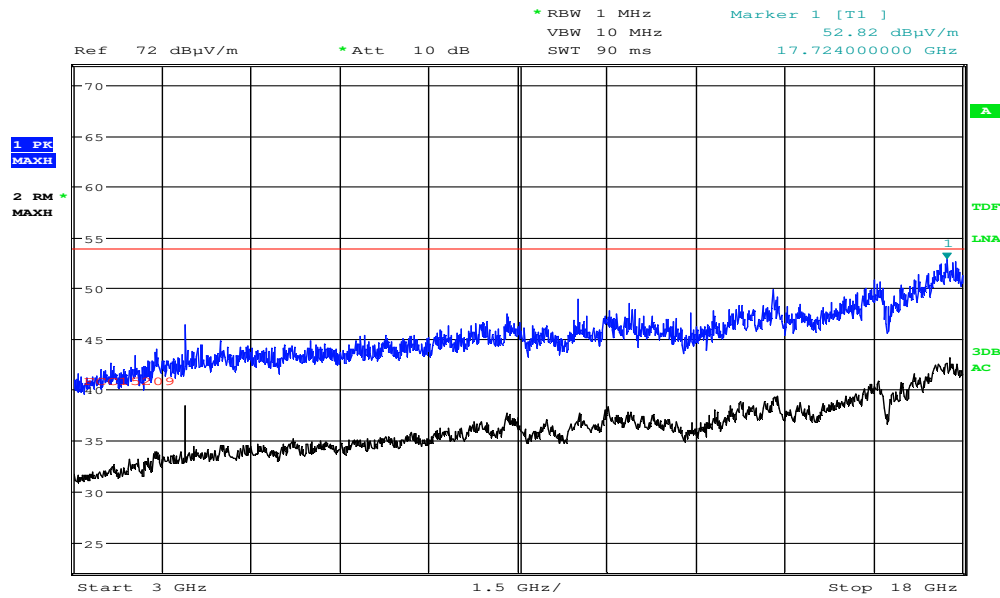


Date: 7.OCT.2019 14:54:20

Radiated Emissions, 3000 -18000 MHz, 2441MHz, HP

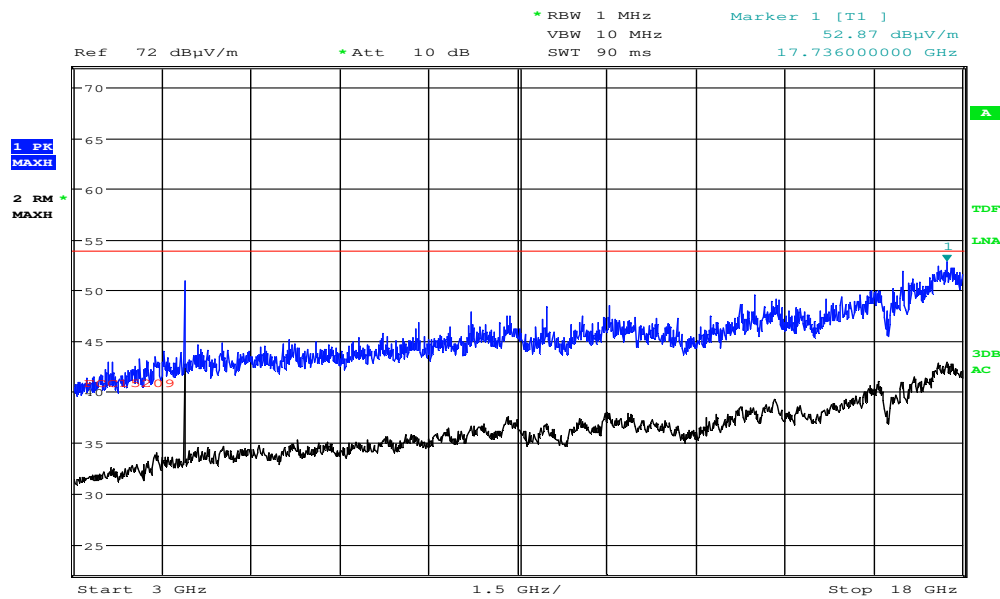


Date: 7.OCT.2019 14:52:25

Radiated Emissions, 3000 -18000 MHz, 2441MHz, VP

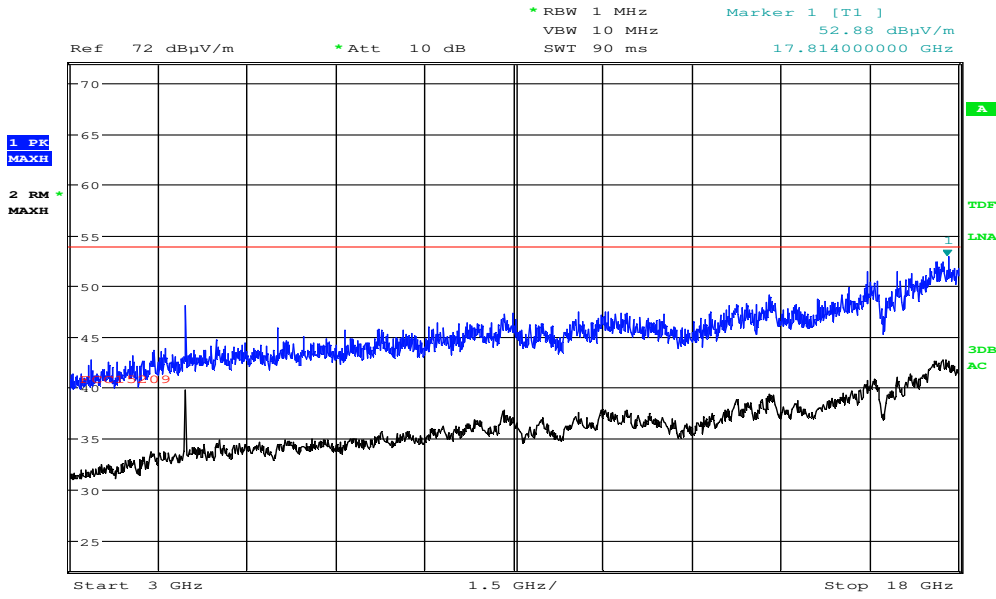


Date: 7.OCT.2019 14:39:33

Radiated Emissions, 3000 -18000 MHz, 2480MHz, HP

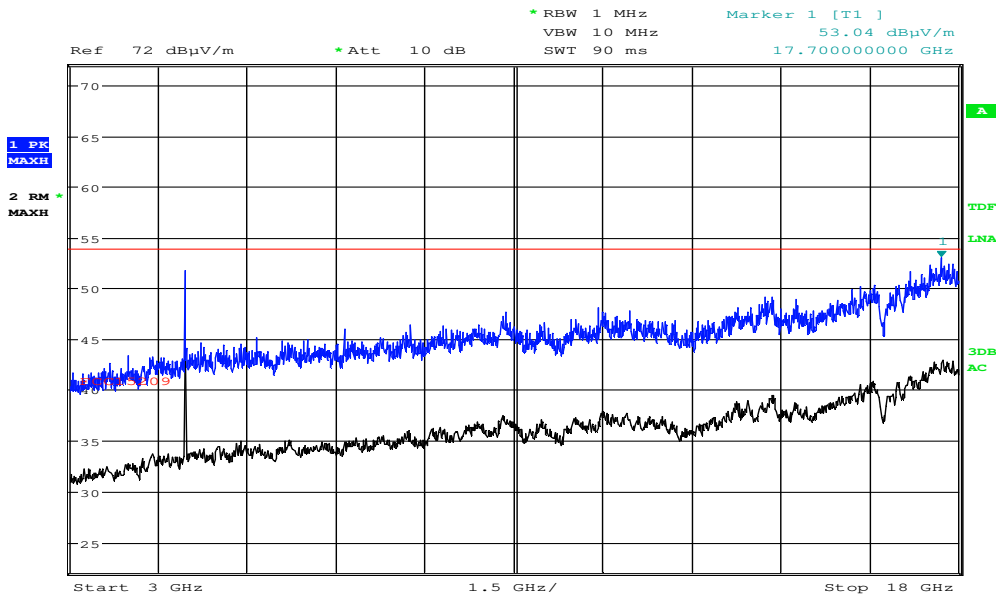


Date: 7.OCT.2019 14:37:37

Radiated Emissions, 3000 -18000 MHz, 2480MHz, VP

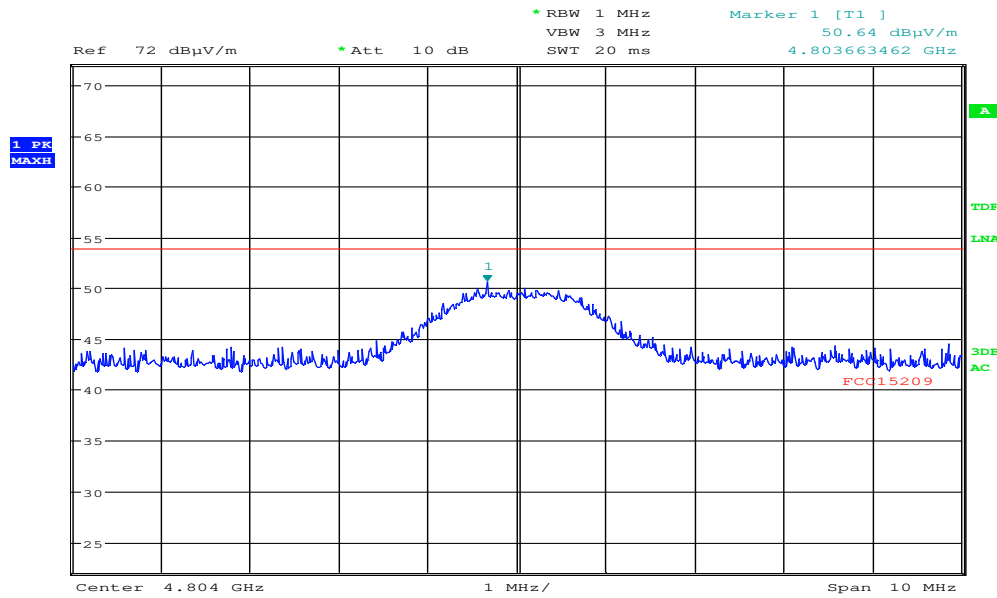


Date: 7.OCT.2019 14:33:24

Radiated Emissions, 4804MHz, 2402MHz, Peak, Max: VP

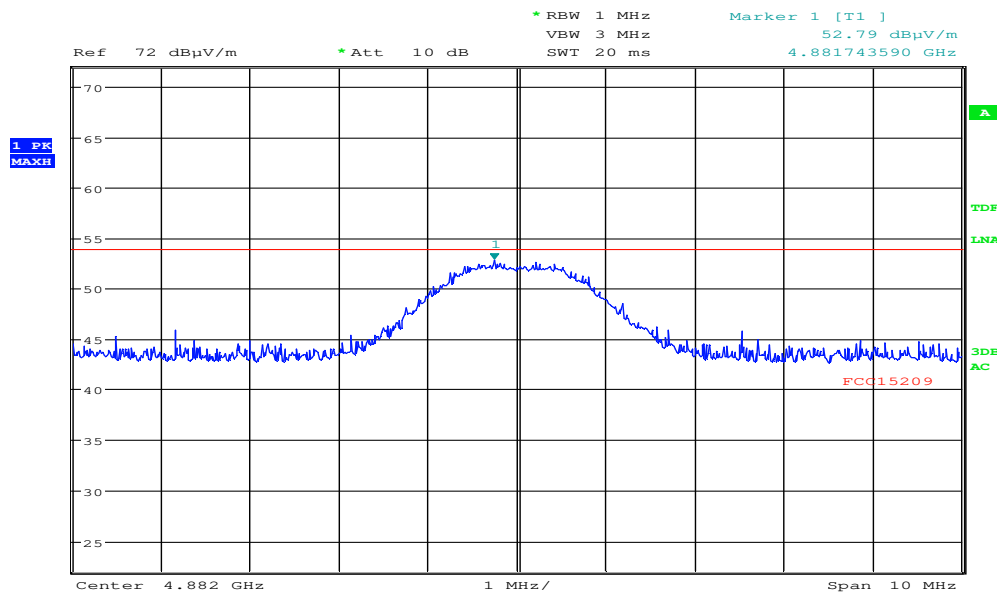


Date: 7.OCT.2019 14:44:44

Radiated Emissions, 4882MHz, 2441MHz, Peak, Max: VP

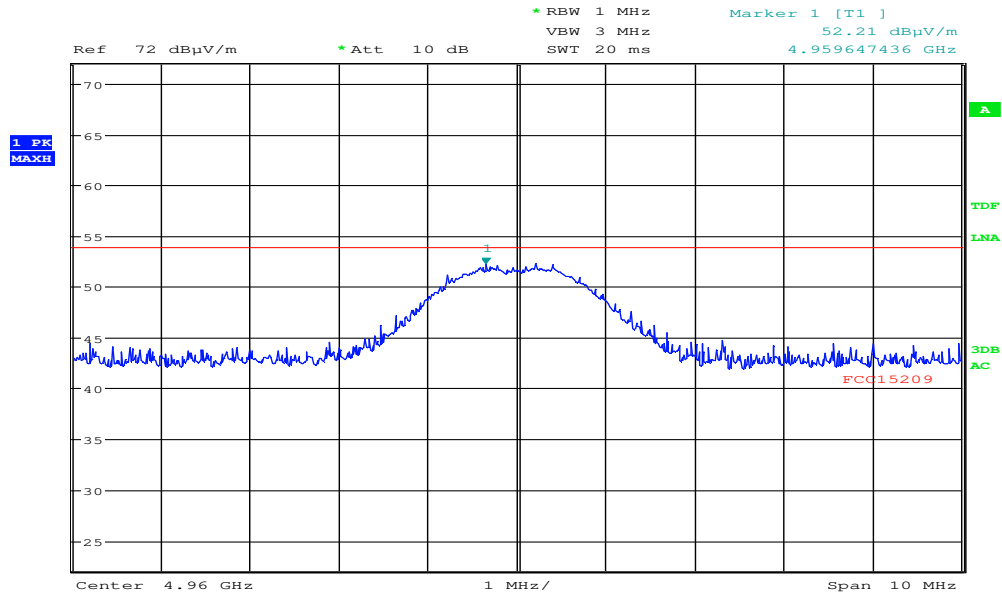


Date: 7.OCT.2019 14:42:04

Radiated Emissions, 4960MHz, 2480MHz, Peak, Max: VP

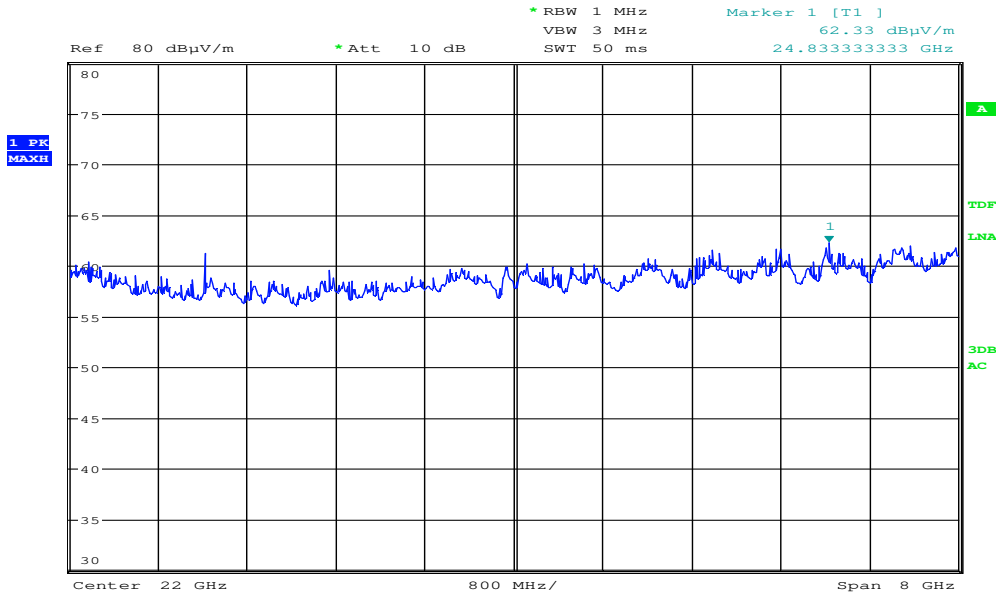


Date: 7.OCT.2019 15:20:29

Pre-scan, 18 - 26 GHz, 2402MHz, @ca 10cm

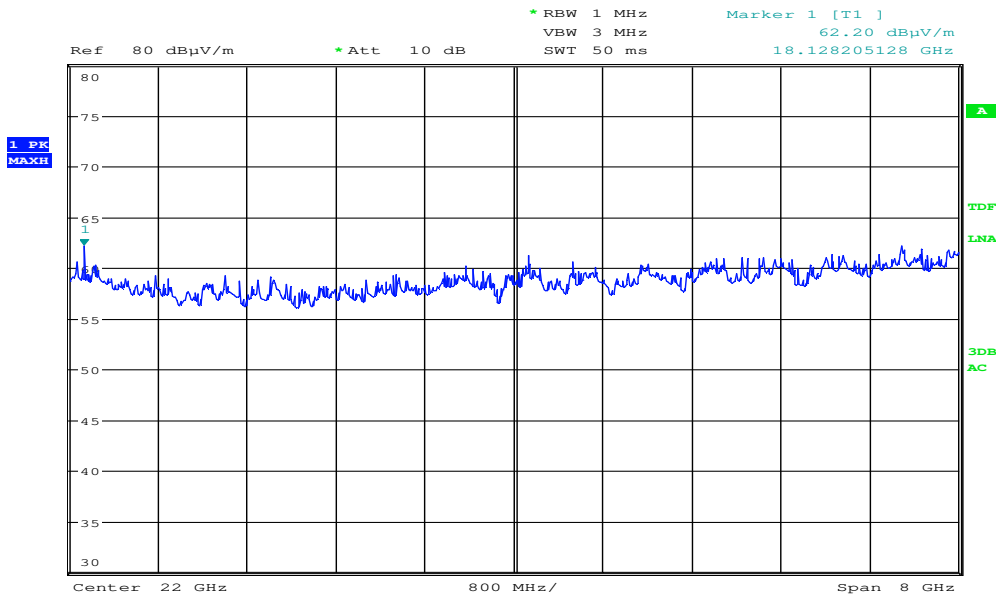

Date: 7.OCT.2019 15:23:42

Pre-scan, 18 - 26 GHz, 2441MHz, @ca 10cm

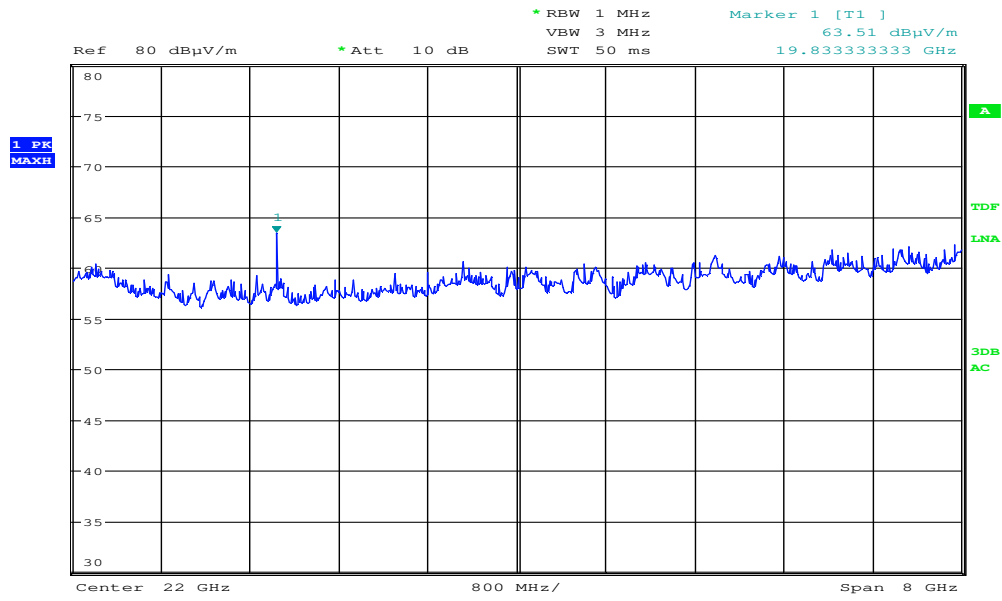

Date: 7.OCT.2019 15:22:06

Pre-scan, 18 - 26 GHz, 2480MHz, @ca 10cm

4 Measurement Uncertainty

Measurement Uncertainty Values		
Test Item		Uncertainty
Output Power		±0.5 dB
Power Spectral Density		±0.5 dB
Out of Band Emissions, Conducted	< 3.6 GHz	±0.6 dB
	> 3.6 GHz	±0.9 dB
Spurious Emissions, Radiated	< 1 GHz	±2.5 dB
	> 1 GHz	±2.2 dB
Emission Bandwidth		±4 %
Power Line Conducted Emissions		+2.9 / -4.1 dB
Spectrum Mask Measurements	Frequency	±5 %
	Amplitude	±1.0 dB
Frequency Error		±0.6 ppm
Temperature Uncertainty		±1 °C

All uncertainty values are expanded standard uncertainty to give a confidence level of 95%, based on coverage factor k=2

5 LIST OF TEST EQUIPMENT

To facilitate inclusion on each page of the test equipment used for related tests, each item of test equipment and ancillaries are identified (numbered) by the Test Laboratory.

No.	Model number	Description	Manufacturer	Ref. no.	Cal. date	Cal. Due
1	FSW43	Spectrum Analyzer	Rohde & Schwarz	LR 1690	2019.01	2020.01
2	ESU40	Measuring Receiver	Rohde & Schwarz	LR 1639	2019.01	2020.01
3	6810.17B	Attenuator	Suhner	LR 1669	COU	
4	6HC3000/18000	Highpass Filter	Trilithic	LR 1614	COU	
5	JB3	BiLog Antenna	Sunol Sciences	N-4525	2017.11	2020.11
6	317	Pre-amplifier	Sonoma Inst.	LR 1687	2019.07	2020.07
7	3115	Horn Antenna	EMCO	LR 1330	2016.10	2021.10
8	3117-PA	Horn Antenna with PreAmp	EMCO	LR 1717	2017.12	2019.12
9	8449A	Pre-amplifier	Hewlett Packard	LR 1322	2019.07	2020.07
10	638	Antenna Horn	Narda	LR 098	N/A	
11	Model 87V	Multimeter	Fluke	LR 1599	2019.03	2021.03
13	ESC13	Measuring Receiver	Rohde & Schwarz	N-4259	2019.10	2021.10
14	ESH2-Z5	Two Line V-Network	Rohde & Schwarz	N-4097	2018-03	2020-03
12	ESH3-Z2	Pulse Limiter	Rohde & Schwarz	N-3932	COU	
15	6812B	AC Power Source	Hewlett Packard	LR 1515	COU	
16	ST18/SMA/N/36	RF Cable	Suhner	LR 1627	COU	


COU = Cal on use

The software listed below has been used for one or more tests.


No.	Manufacturer	Name	Version	Comment
1	Rohde & Schwarz	EMC32	10.50.10	Power Line Conducted test software
2	Rohde & Schwarz	EMC32	10.50.10	Radiated Emission test software
3	Rohde & Schwarz	GPIShot	2.7	Screenshots from R&S Spectrum Analyzers
4	Agilent	Intuitlink Data Capture	2.1.0	Screenshots from HP 53310A

6 BLOCK DIAGRAM

6.1 Power Line Conducted Emission

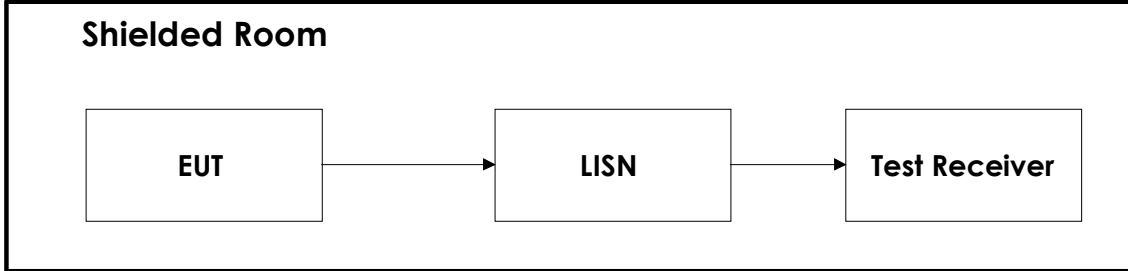

6.2 Test Site Radiated Emission

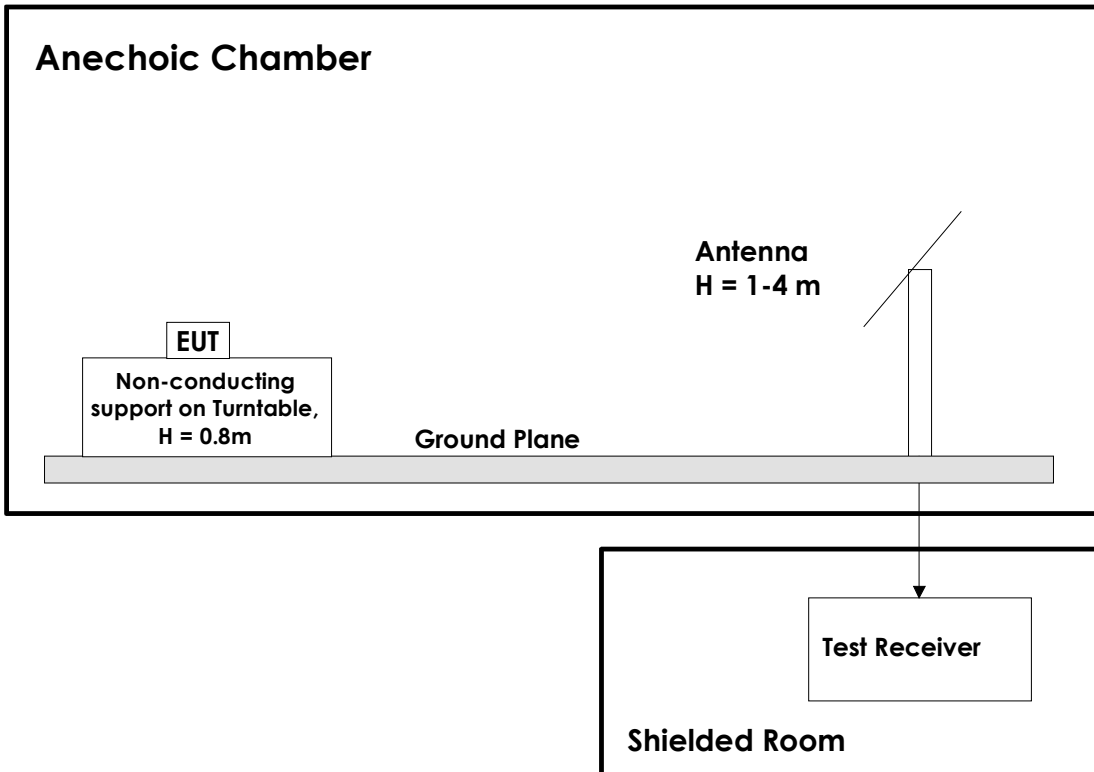

This test setup is used for all radiated emissions tests. For frequencies below 30 MHz the measuring distance is 10m, for all other frequencies it is 3m or 1m. Emissions above 1 GHz are measured with a Spectrum Analyzer and Horn Antenna. For measurements above 18 GHz the test receiver is moved inside the anechoic chamber and located next to the antenna to minimize the cable loss. All measurements at 1GHz and above were performed with turntable height 1.5m and with the ground plane covered by absorbers. A pre-amplifier is used for all measurements above 30 MHz, and High-Pass or Band-Pass filter is used for all harmonics.