



**FCC CFR47 PART 15 SUBPART C
INDUSTRY CANADA RSS-210 ISSUE 8**

CERTIFICATION TEST REPORT

FOR

BLUETOOTH MODULE (POWER CLASS II)

MODEL NUMBER: BT11B

**FCC ID: ACJ9TGBT11B
IC: 216A-CFBT11B**

REPORT NUMBER: 11J13735-1

ISSUE DATE: APRIL 21, 2011

Prepared for
**PANASONIC CORPORATION OF NORTH AMERICA
ONE PANASONIC WAY, 4B-8
SECAUCUS, NEW JERSEY 07094, U.S.A.**

Prepared by
**COMPLIANCE CERTIFICATION SERVICES (UL CCS)
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
--	04/21/11	Initial Issue	F. Ibrahim

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS.....	5
2. TEST METHODOLOGY.....	6
3. FACILITIES AND ACCREDITATION.....	6
4. CALIBRATION AND UNCERTAINTY.....	6
4.1. MEASURING INSTRUMENT CALIBRATION.....	6
4.2. SAMPLE CALCULATION.....	6
4.3. MEASUREMENT UNCERTAINTY.....	6
5. EQUIPMENT UNDER TEST.....	7
5.1. DESCRIPTION OF EUT.....	7
5.2. MAXIMUM OUTPUT POWER.....	7
5.3. DESCRIPTION OF AVAILABLE ANTENNAS.....	7
5.4. SOFTWARE AND FIRMWARE.....	7
5.5. WORST-CASE CONFIGURATION AND MODE.....	7
5.6. DESCRIPTION OF TEST SETUP.....	8
6. TEST AND MEASUREMENT EQUIPMENT.....	12
7. ANTENNA PORT TEST RESULTS.....	13
7.1. BASIC DATA RATE GFSK MODULATION.....	13
7.1.1. 20 dB AND 99% BANDWIDTH.....	13
7.1.2. HOPPING FREQUENCY SEPARATION.....	20
7.1.3. NUMBER OF HOPPING CHANNELS.....	22
7.1.4. AVERAGE TIME OF OCCUPANCY.....	27
7.1.5. OUTPUT POWER.....	30
7.1.6. AVERAGE POWER.....	34
7.1.7. CONDUCTED SPURIOUS EMISSIONS.....	35
7.2. ENHANCED DATA RATE 8PSK MODULATION.....	44
7.2.1. 20 dB AND 99% BANDWIDTH.....	44
7.2.2. HOPPING FREQUENCY SEPARATION.....	51
7.2.3. NUMBER OF HOPPING CHANNELS.....	53
7.2.4. AVERAGE TIME OF OCCUPANCY.....	58
7.2.5. OUTPUT POWER.....	61
7.2.6. AVERAGE POWER.....	65
7.2.7. CONDUCTED SPURIOUS EMISSIONS.....	66
8. RADIATED TEST RESULTS.....	75
8.1. LIMITS AND PROCEDURE.....	75
8.2. TRANSMITTER ABOVE 1 GHz.....	76
8.2.1. BASIC DATA RATE GFSK MODULATION.....	76
8.2.2. ENHANCED DATA RATE 8PSK MODULATION.....	85

8.3.	RECEIVER ABOVE 1 GHz.....	94
8.4.	WORST-CASE BELOW 1 GHz.....	95
9.	AC POWER LINE CONDUCTED EMISSIONS.....	98
10.	MAXIMUM PERMISSIBLE EXPOSURE.....	102
11.	SETUP PHOTOS	106

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: PANASONIC CORPORATION OF NORTH AMERICA
ONE PANASONIC WAY, 4B-8
SECAUCUS, NEW JERSEY 07094, U.S.A.

EUT DESCRIPTION: BLUETOOTH MODULE (POWER CLASS II)

MODEL: BT11B

SERIAL NUMBER: 01034 / 01035
(ANTENNA PORT / RADIATED AND AC LINE CONDUCTED)

DATE TESTED: MARCH 28 TO APRIL 05, 2011

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass
INDUSTRY CANADA RSS-210 Issue 7 Annex 8	Pass
INDUSTRY CANADA RSS-GEN Issue 3	Pass

Compliance Certification Services (UL CCS) tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL CCS based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL CCS and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL CCS will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For UL CCS By:

Tested By:



FRANK IBRAHIM
EMC SUPERVISOR
UL CCS

DOUG ANDERSON
EMC ENGINEER
UL CCS

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2009, FCC CFR 47 Part 2, FCC CFR 47 Part 15, RSS-GEN Issue 2, and RSS-210 Issue 7.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

UL CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamplifier Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 1000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a Bluetooth transceiver module.

The radio module is manufactured by Alps Electric Co., Ltd.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2402 - 2480	Basic GFSK	2.44	1.75
2402 - 2480	Enhanced 8PSK	0.19	1.04

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a permanently attached inverted F-type antenna, with a maximum gain of 1.34 dBi.

5.4. SOFTWARE AND FIRMWARE

The firmware installed in the EUT during testing was BC 02, rev. 23e.

The EUT driver software installed in the Laptop during testing was BlueSuite, rev. V7.10.22(P).

The test utility software used during testing was Bluetooth.exe and BCliCtrlt, rev. 1.19.

5.5. WORST-CASE CONFIGURATION AND MODE

The worst-case channel is determined as the channel with the highest output power. Radiated Emissions below 1 GHz and Power Line Conducted Emissions were performed with the EUT set to transmit at the channel with highest output power.

Three orthogonal orientations were investigated for the EUT and orientation Y was found to be worst-case orientation; therefore, final measurement was performed at Y orientation.

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

ANTENNA PORT TESTS:

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
Tablet Computer (Host PC)	Panasonic Corp.	CF-C1	1BKS4A00016	DoC
AC Adapter (Host PC)	Tamura	CF-AA6503AM3	01032	DoC

RADIATED AND AC LINE CONDUCTED TESTS:

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
Tablet Computer (Host PC)	Panasonic Corp.	CF-C1	1BKS4A00049	DoC
AC Adapter (Host PC)	Tamura	CF-AA6503AM3	01032	DoC

I/O CABLES

ANTENNA PORT TESTS:

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC Power	1	3-Prong	Un-Shielded	180 cm	
2	DC Power	1	Mini-Jack	Un-Shielded	115 cm	Ferrite at PC End

RADIATED AND AC LINE CONDUCTED TESTS:


I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC Power	1	3-Prong	Un-Shielded	180 cm	
2	DC Power	1	Mini-Jack	Un-Shielded	115 cm	Ferrite at PC End
3	USB	1	Hard-Wired	Un-Shielded	8 cm	

TEST SETUP


The EUT is installed in a host laptop computer during the tests. Test software exercised the radio card.

SETUP DIAGRAM FOR TESTS

ANTENNA PORT TESTS:

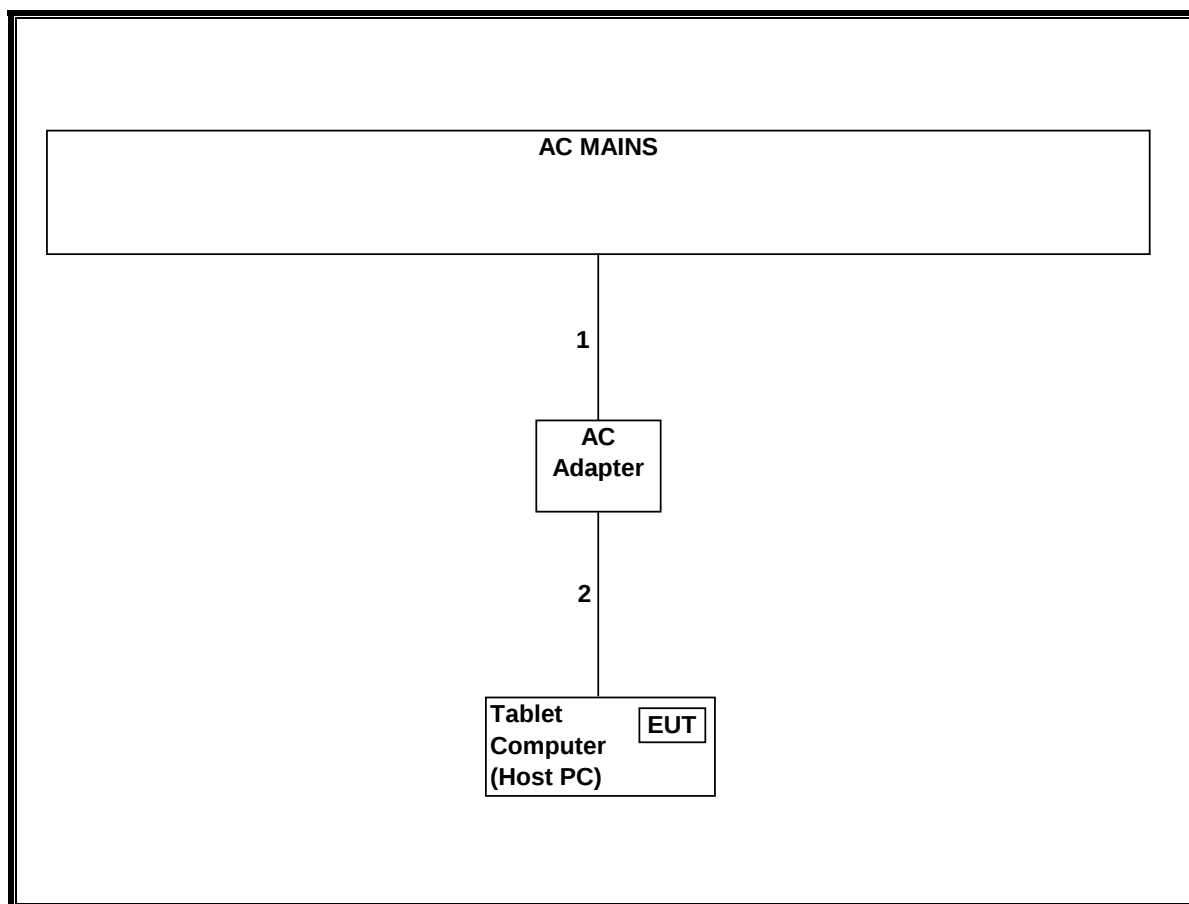

RADIATED AND AC LINE CONDUCTED TESTS:

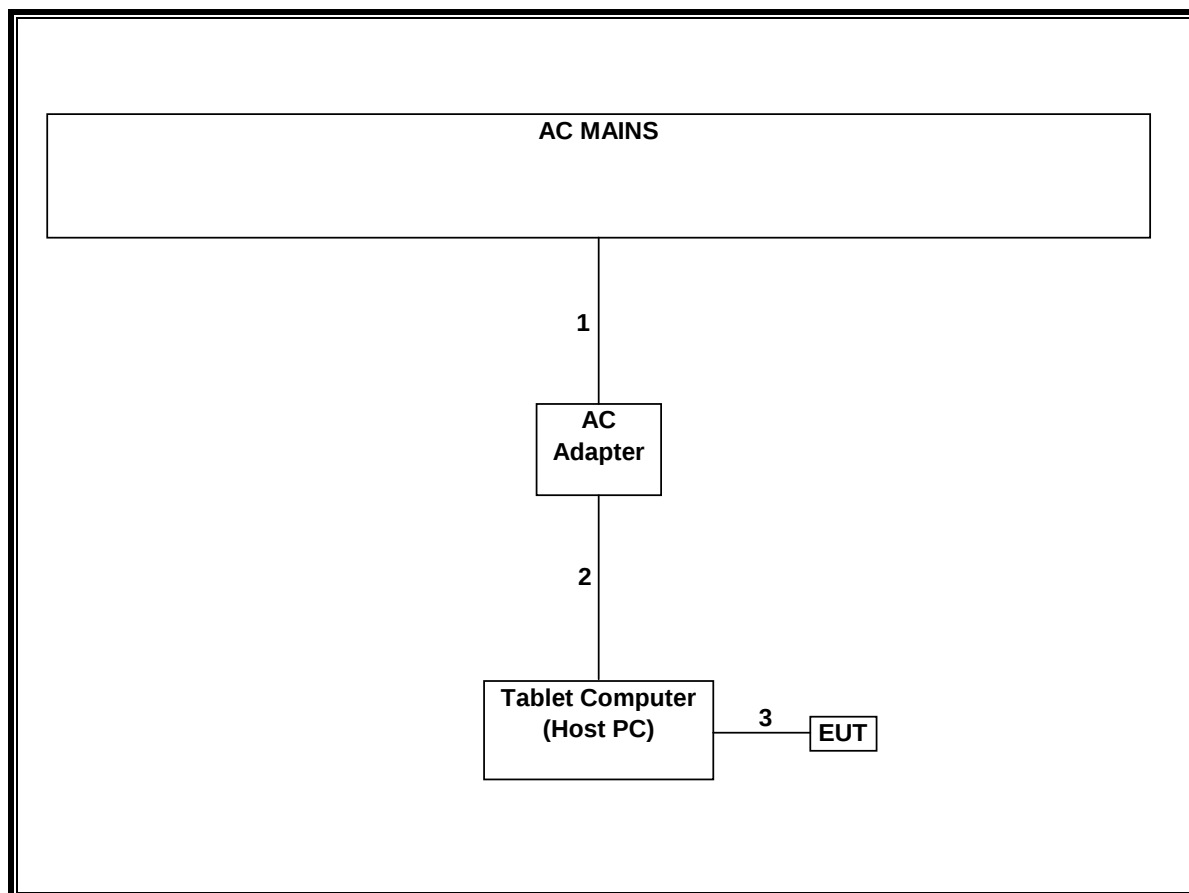

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST					
Description	Manufacturer	Model	Asset	Cal Date	Cal Due
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C00986	12/17/10	03/17/12
Spectrum Analyzer, 26.5 GHz	Agilent / HP	E4440A	C01179	01/19/11	04/19/12
Antenna, Bilog, 2 GHz	Sund Sciences	JB1	C01011	07/12/10	07/12/11
Preamplifier, 1300 MHz	Agilent / HP	8447D	C00885	01/27/11	01/27/12
Antenna, Horn, 18 GHz	EMCO	3115	C00945	06/29/10	06/29/11
Antenna, Horn, 26 GHz	ARA	MMH-1826/B	C00589	06/25/10	06/25/11
Preamplifier, 26.5 GHz	Agilent / HP	8449B	C01052	07/14/10	07/14/11
Spectrum Analyzer, 26.5 GHz	Agilent / HP	E4440A	C01178	08/30/10	08/30/11
Antenna, Bilog, 2 GHz	Sund Sciences	JB1	C01016	07/12/10	07/12/11
Preamplifier, 1300 MHz	Agilent / HP	8447D	C00580	01/27/11	01/27/12
Antenna, Horn, 18 GHz	EMCO	3115	C00783	06/29/10	06/29/11
Preamplifier, 26.5 GHz	Agilent / HP	8449B	C01063	07/14/10	07/14/11
Reject Filter, 2.0-2.9 GHz	Micro-Tronics	BRM50702	N02684	CNR	CNR
EMI Test Receiver, 30 MHz	R & S	ESHS 20	N02396	08/06/09	05/06/11
LISN, 30 MHz	FCC	LISN-50/250-25-2	N02625	11/10/10	11/10/11

7. ANTENNA PORT TEST RESULTS

7.1. BASIC DATA RATE GFSK MODULATION

7.1.1. 20 dB AND 99% BANDWIDTH

LIMIT

None; for reporting purposes only.


TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to $\geq 1\%$ of the 20 dB bandwidth. The VBW is set to $\geq$ RBW. The sweep time is coupled.


RESULTS

Channel	Frequency (MHz)	20 dB Bandwidth (kHz)	99% Bandwidth (kHz)
Low	2402	923	945.6007
Middle	2441	927	939.8024
High	2480	927	941.6984


20 dB BANDWIDTH

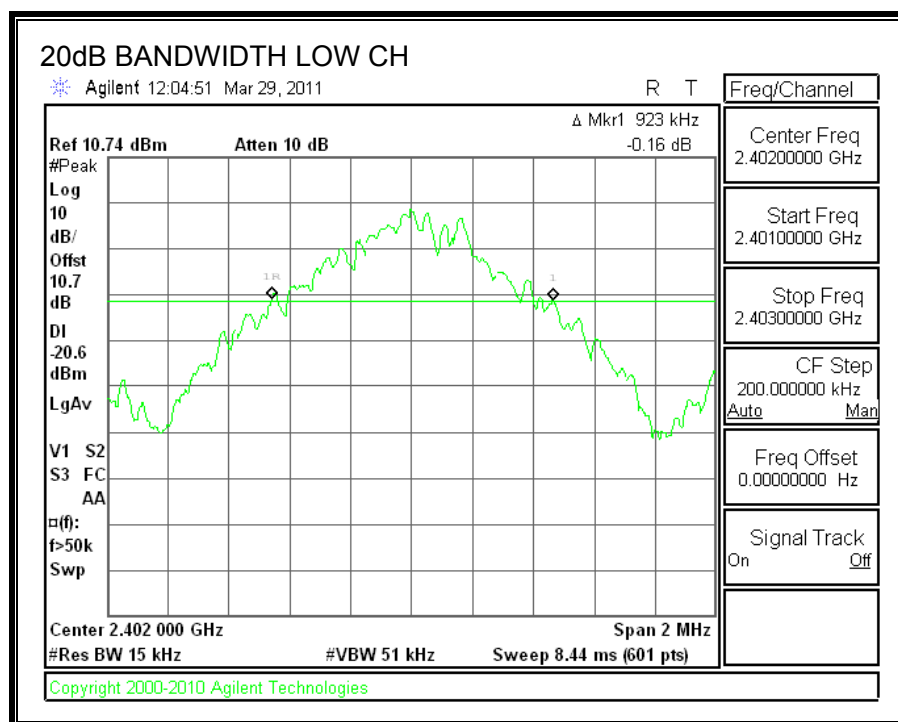


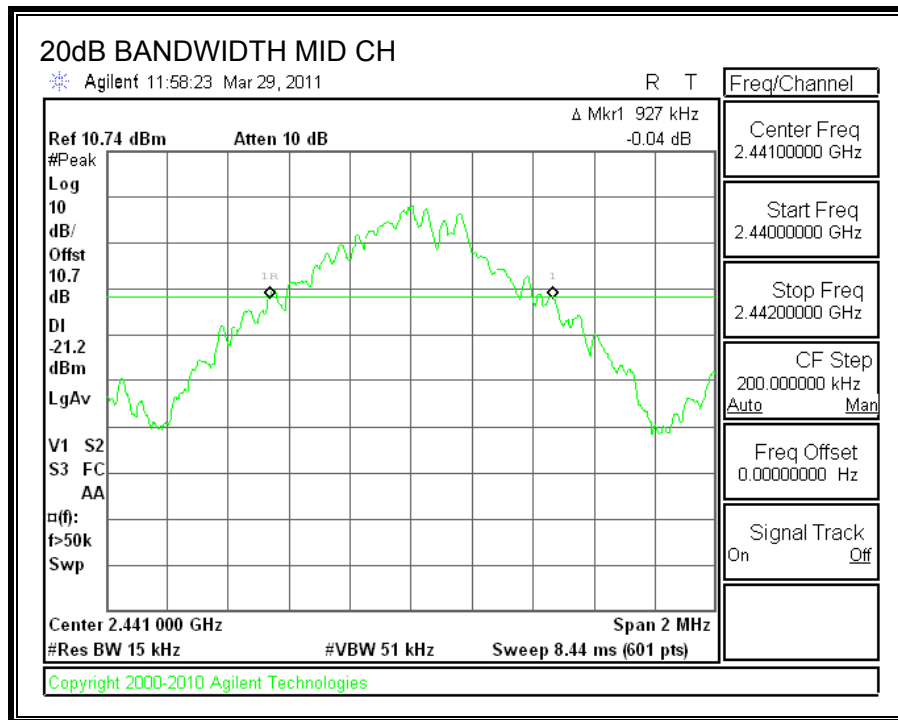


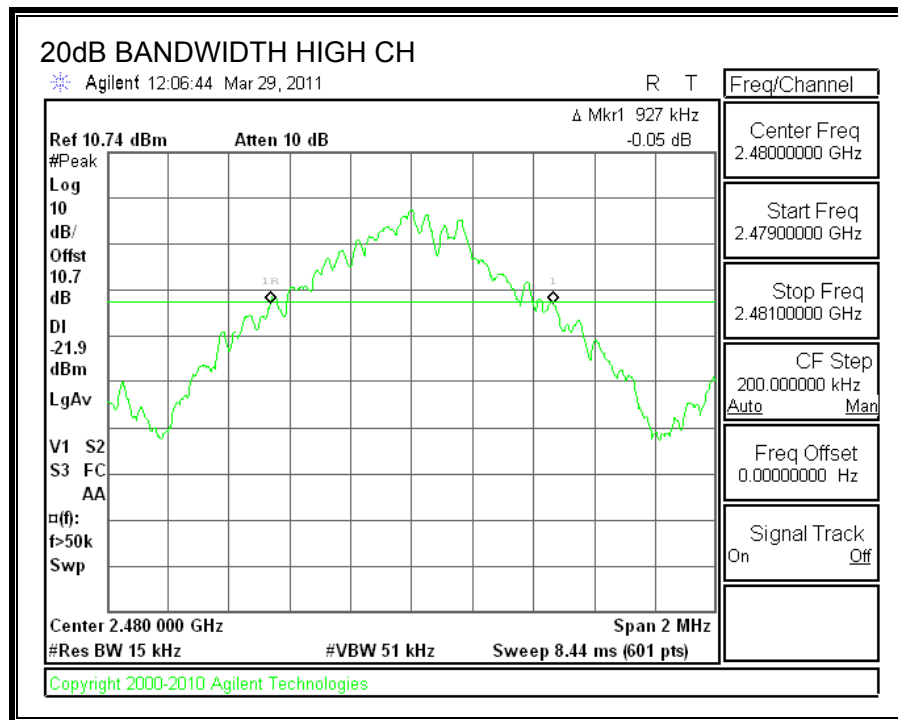

99% BANDWIDTH

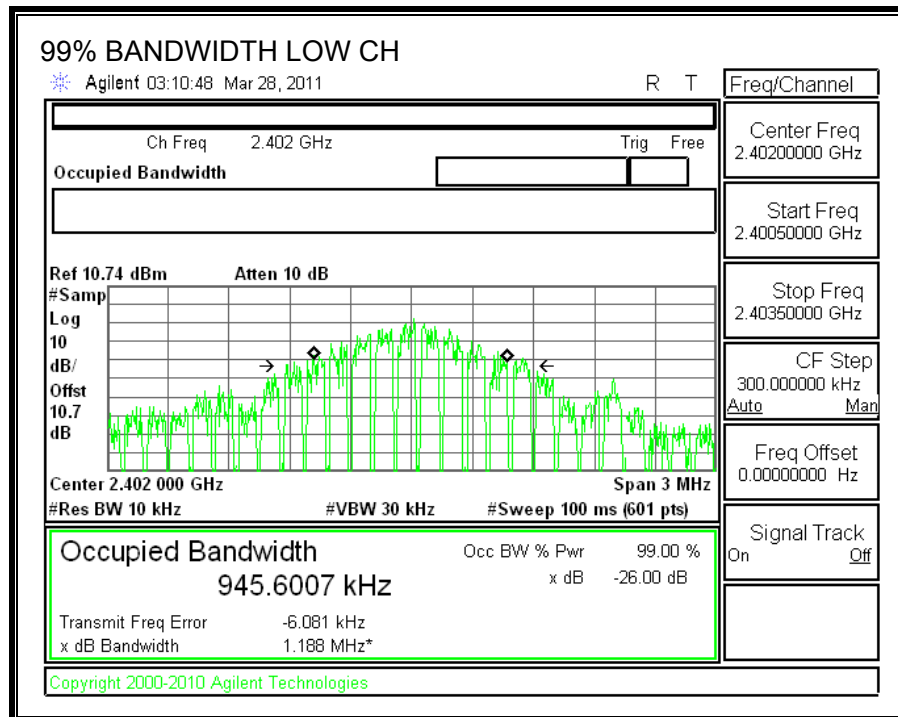

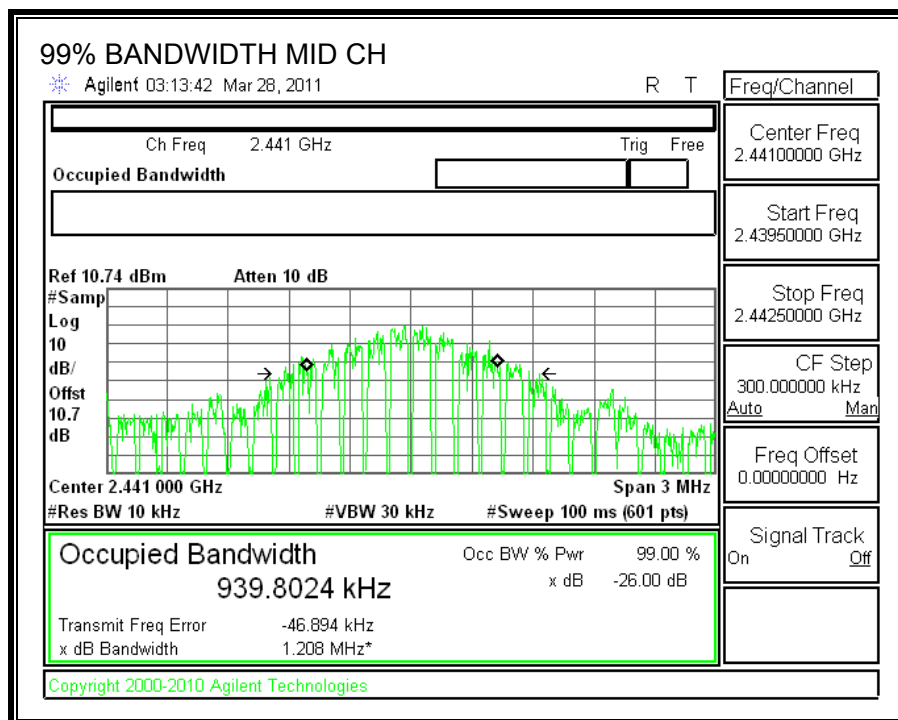

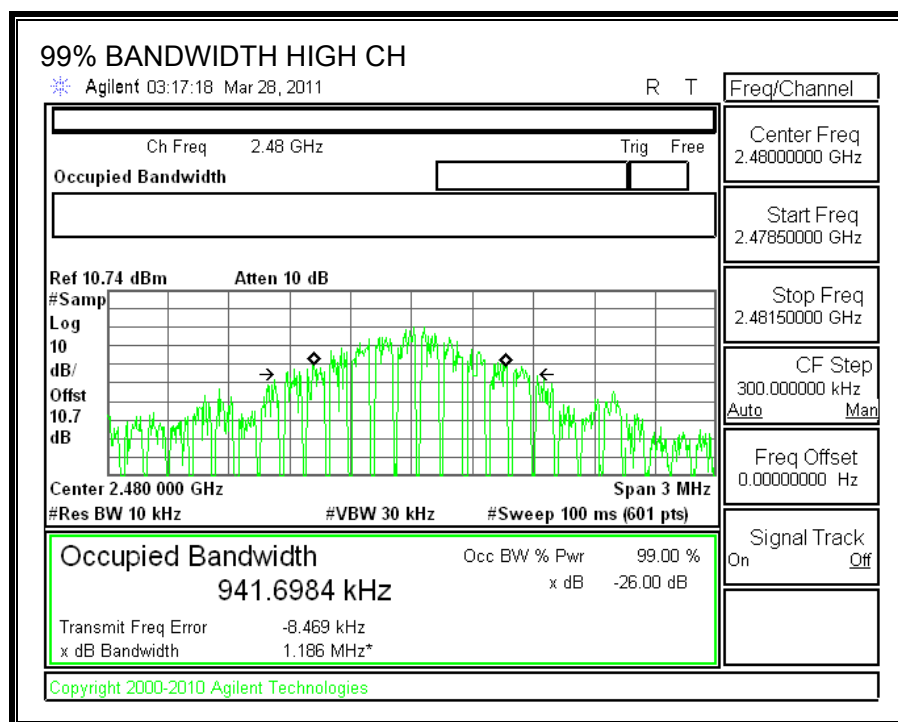

7.1.2. HOPPING FREQUENCY SEPARATION

LIMIT

FCC §15.247 (a) (1)

IC RSS-210 A8.1 (b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 100 kHz. The sweep time is coupled.

RESULTS

HOPPING FREQUENCY SEPARATION

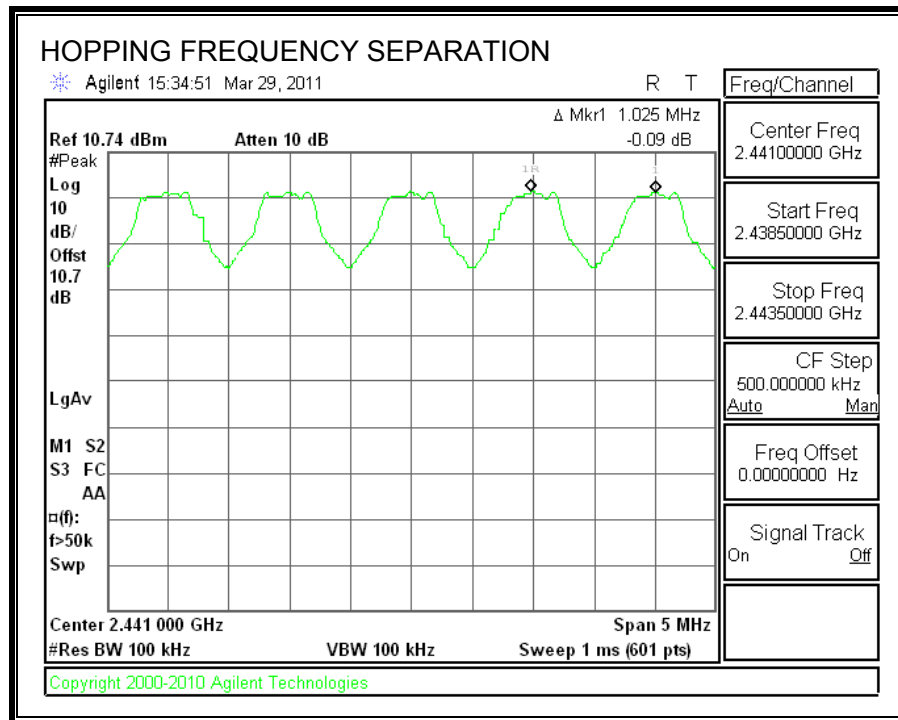

7.1.3. NUMBER OF HOPPING CHANNELS

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.


TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW and VBW are set to 1 MHz. The analyzer is set to Max Hold.


RESULTS


79 Channels observed.

NUMBER OF HOPPING CHANNELS

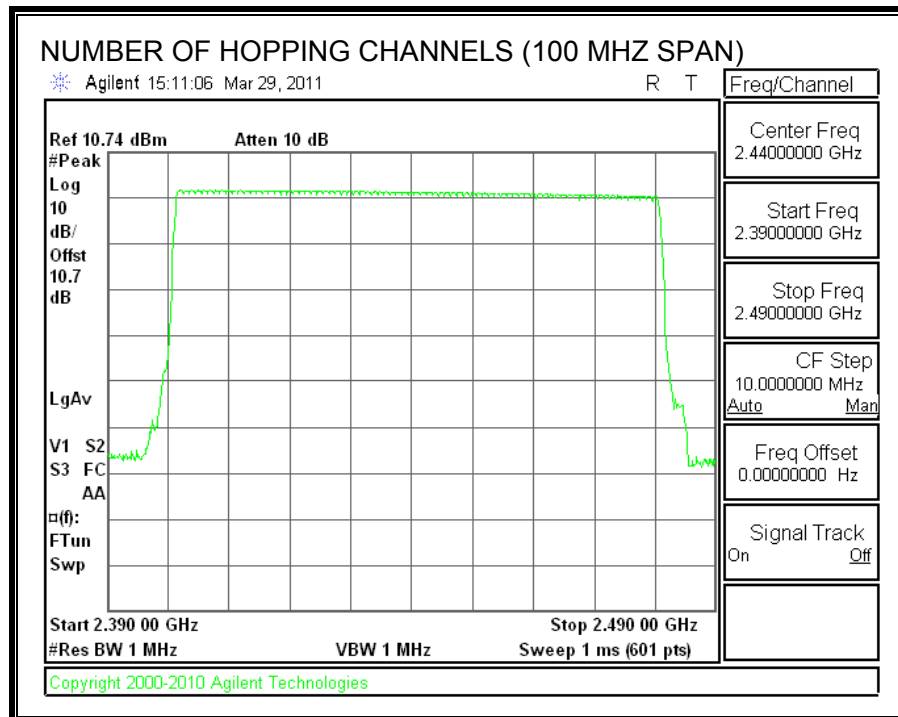

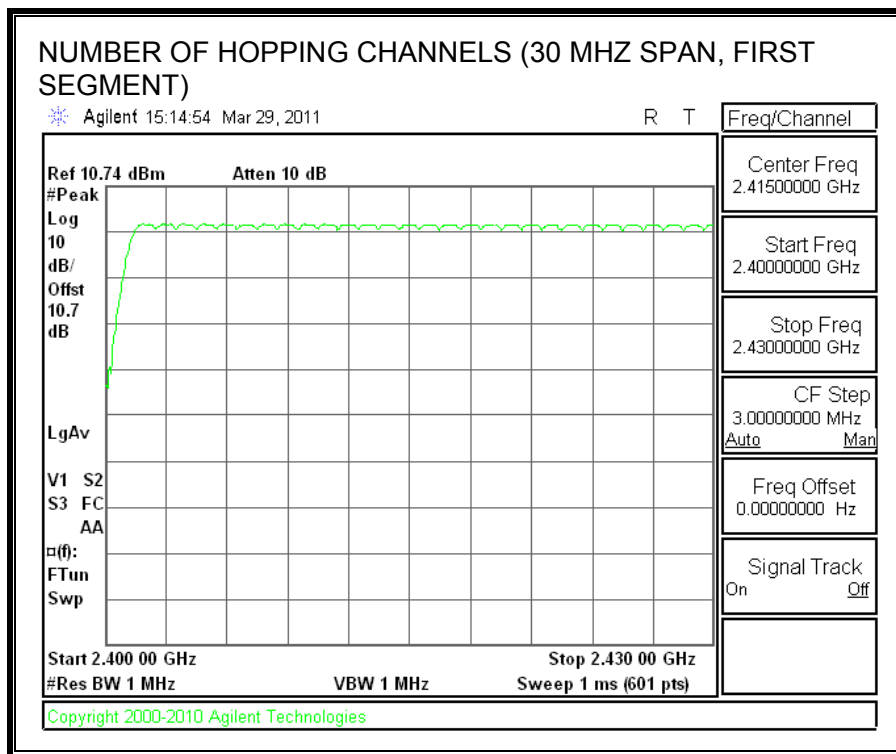

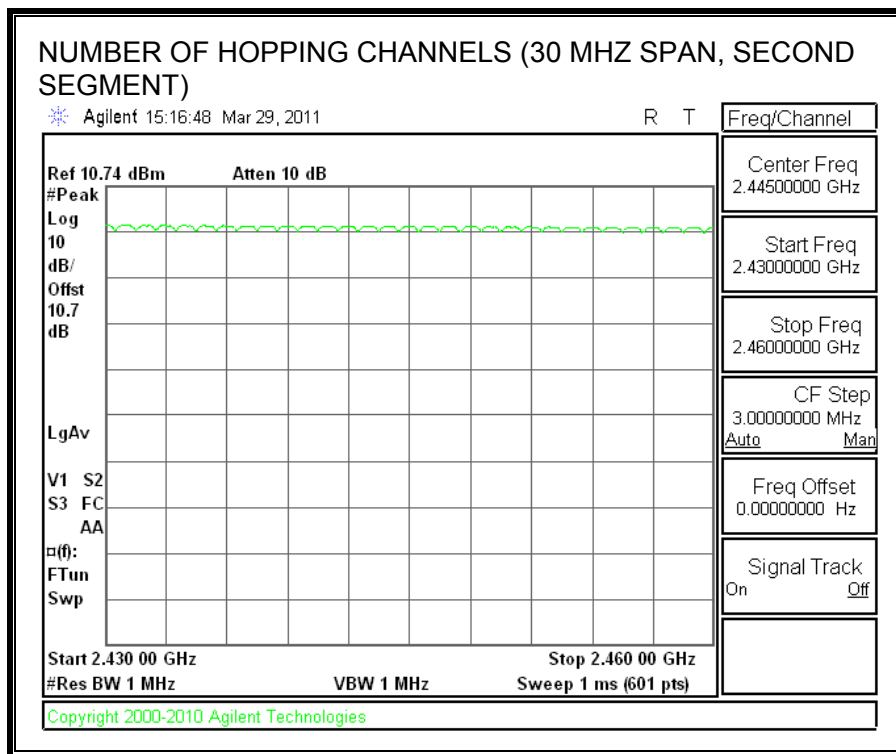

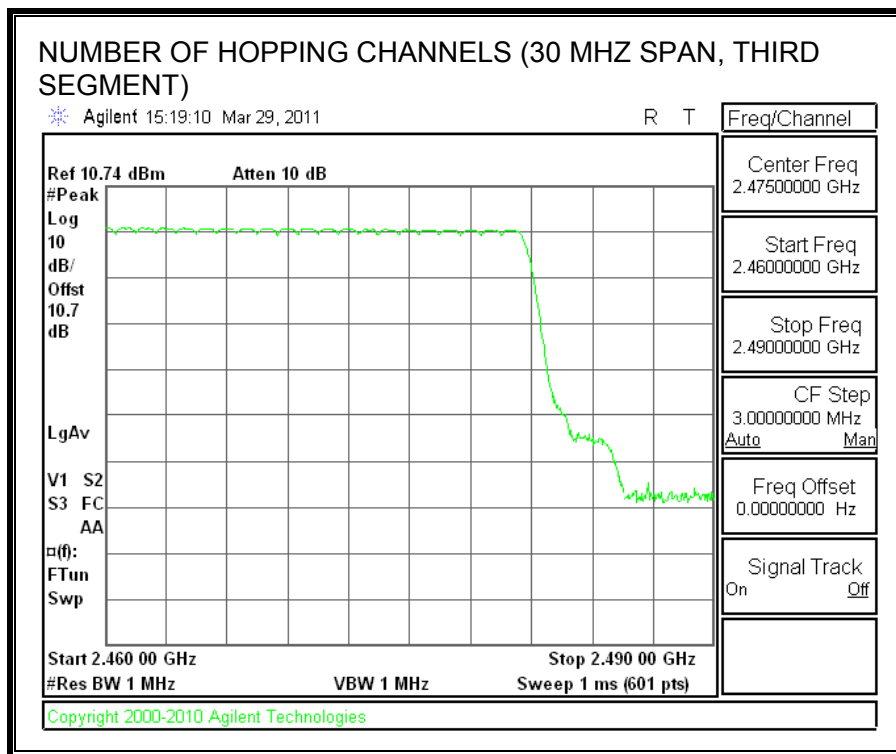

7.1.4. AVERAGE TIME OF OCCUPANCY

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.

The average time of occupancy in the specified 31.6 second period (79 channels * 0.4 s) is equal to $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{pulse width}$.


RESULTS

Time Of Occupancy = $10 * 11 \text{ pulses} * 2.875 \text{ msec} = 316 \text{ msec}$


GFSK Mode

DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of (sec)	Limit (sec)	Margin (sec)
DH5	2.875	11	0.316	0.4	-0.084

PULSE WIDTH

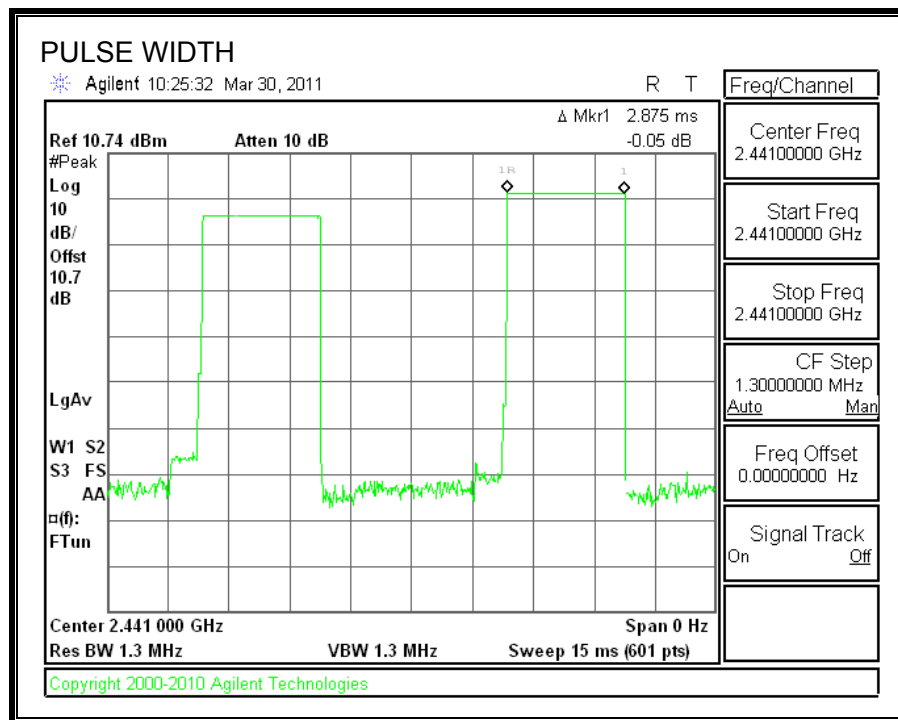

NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD

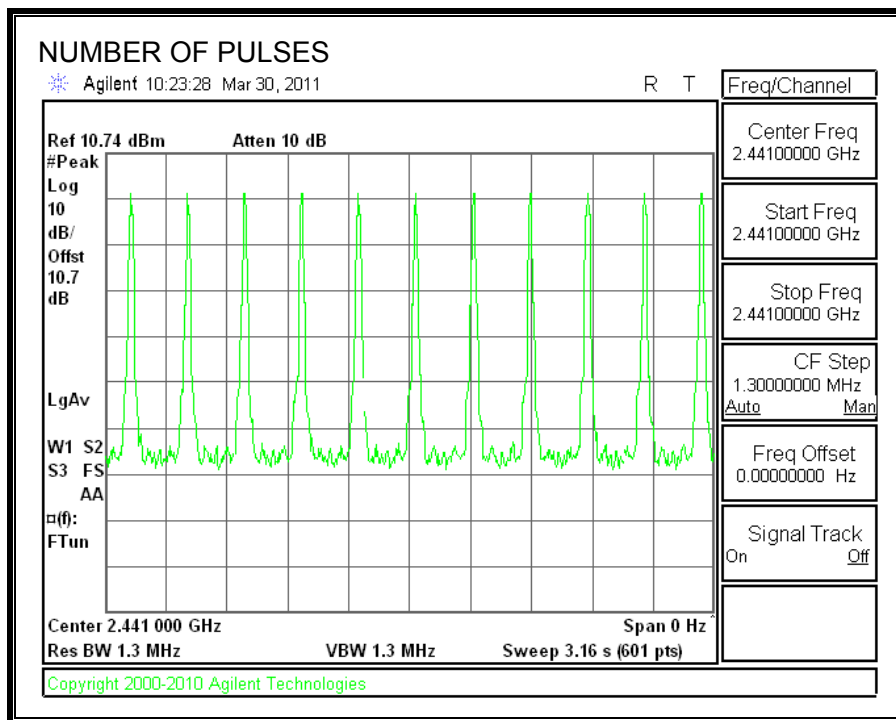

7.1.5. OUTPUT POWER

LIMIT

§15.247 (b) (1)

RSS-210 Issue 7 Clause A8.4

The maximum antenna gain is less than 6 dBi, therefore the limit is 30 dBm.


TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.


RESULTS

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	0.19	30	-29.81
Middle	2441	-0.66	30	-30.66
High	2480	-1.75	30	-31.75

OUTPUT POWER

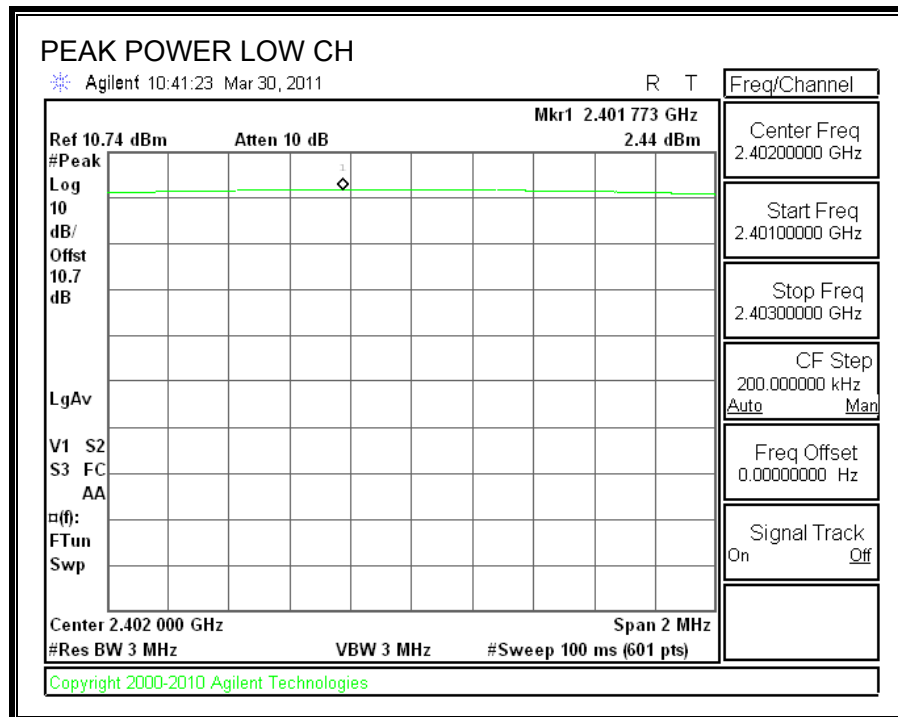

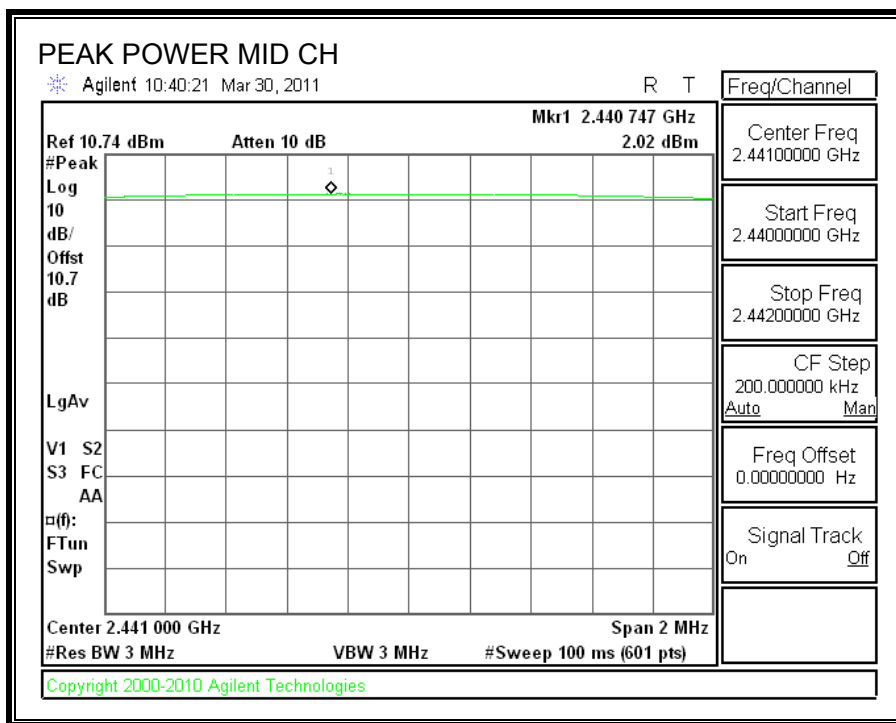

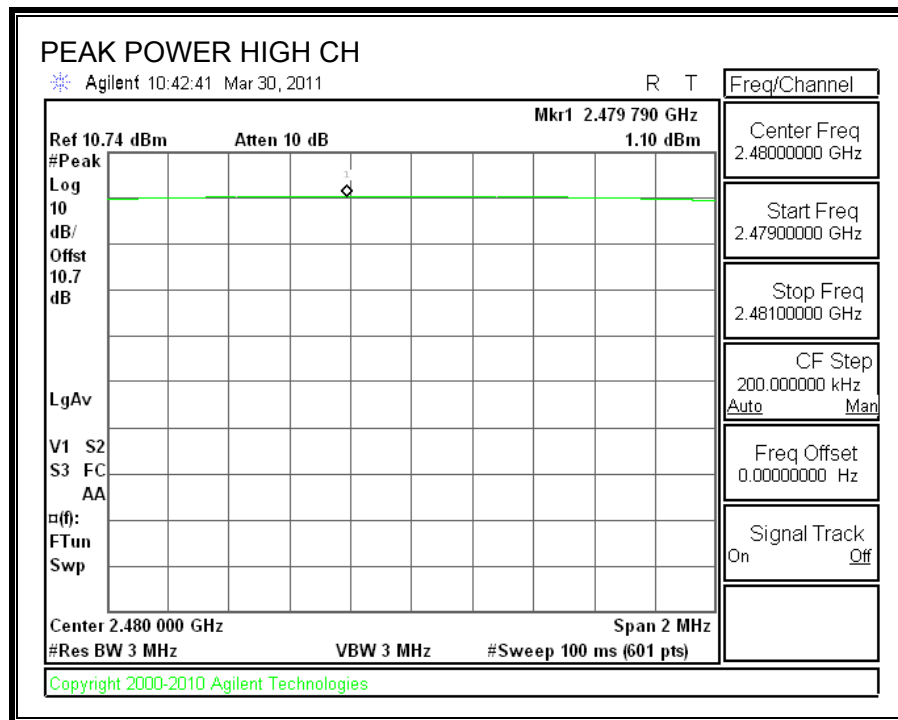

7.1.6. AVERAGE POWER

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 10.74dB (including 10 dB pad and 0.74 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	1.06
Middle	2441	0.70
High	2480	-0.24

7.1.7. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

Limit = -20 dBc

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.


RESULTS


SPURIOUS EMISSIONS, LOW CHANNEL

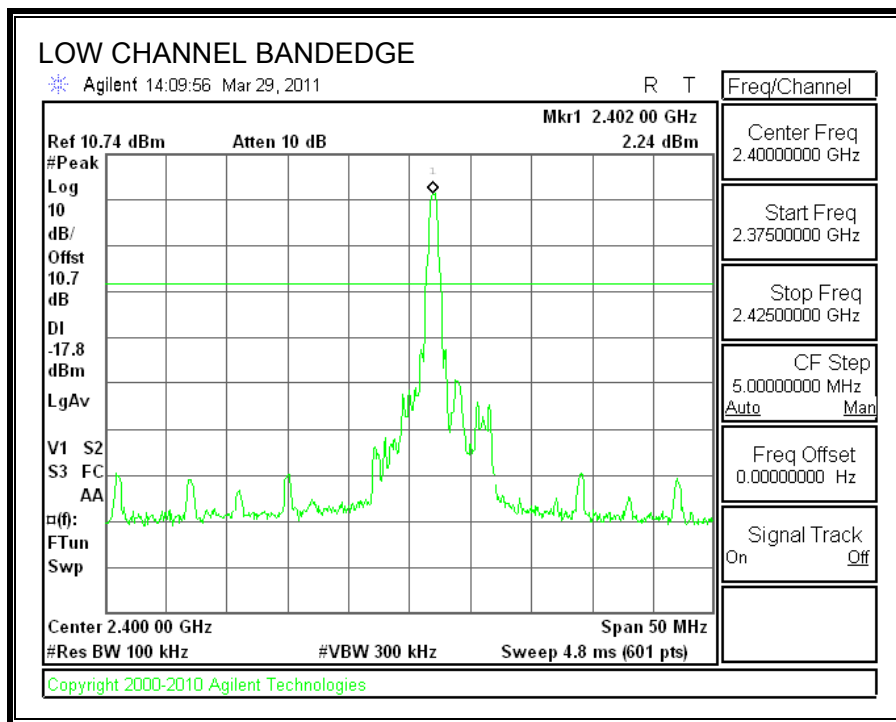

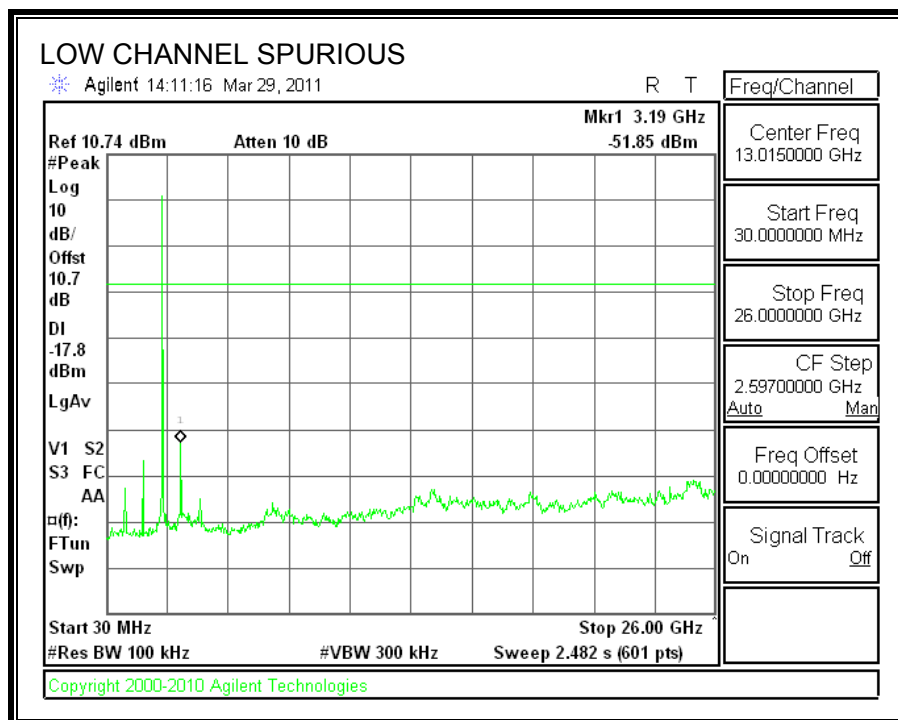



SPURIOUS EMISSIONS, MID CHANNEL

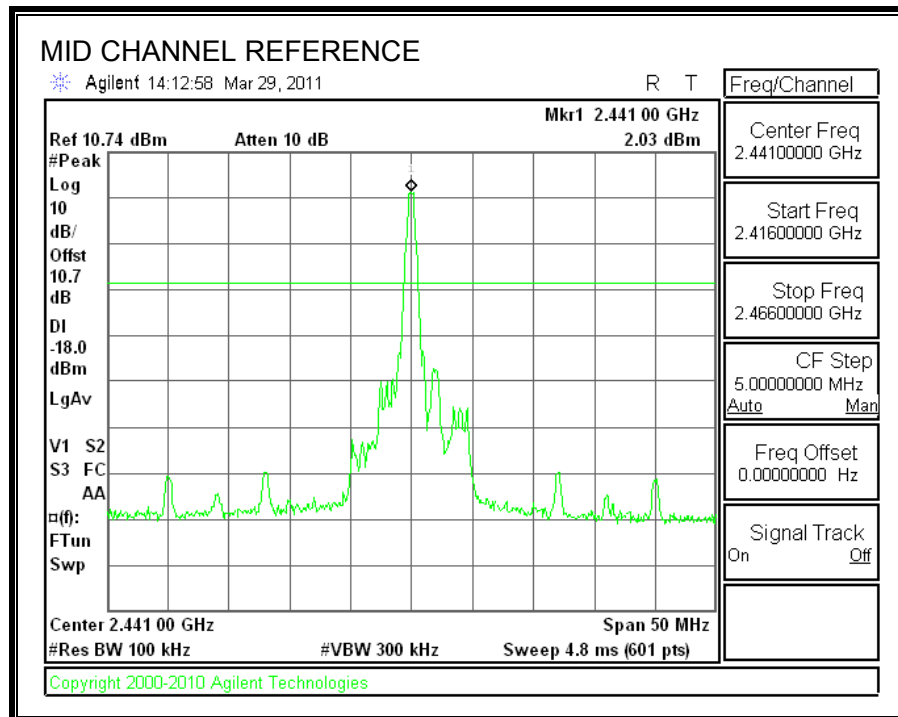

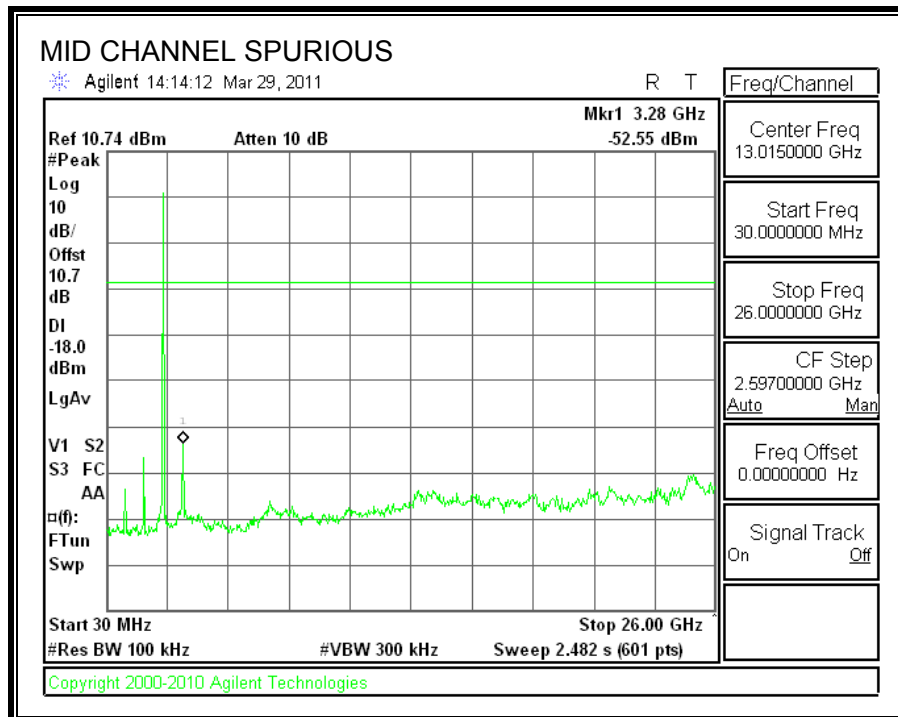



SPURIOUS EMISSIONS, HIGH CHANNEL

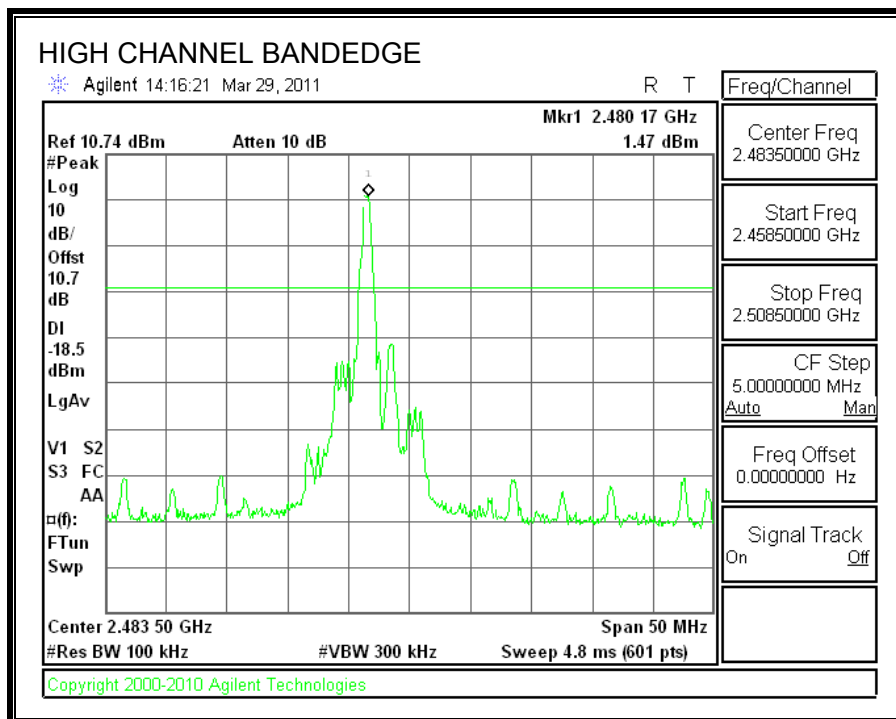

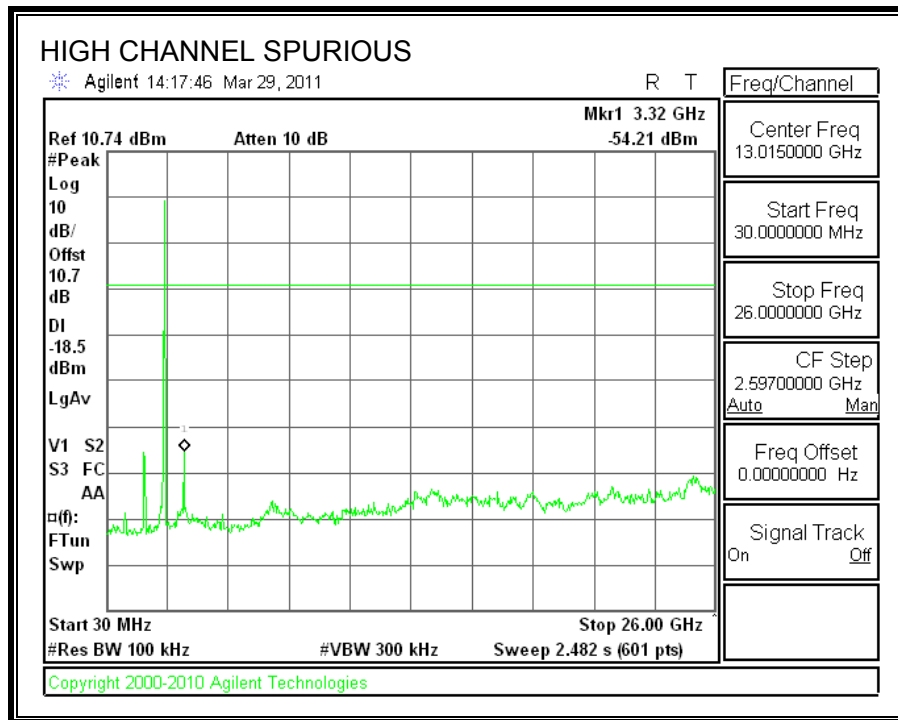

SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

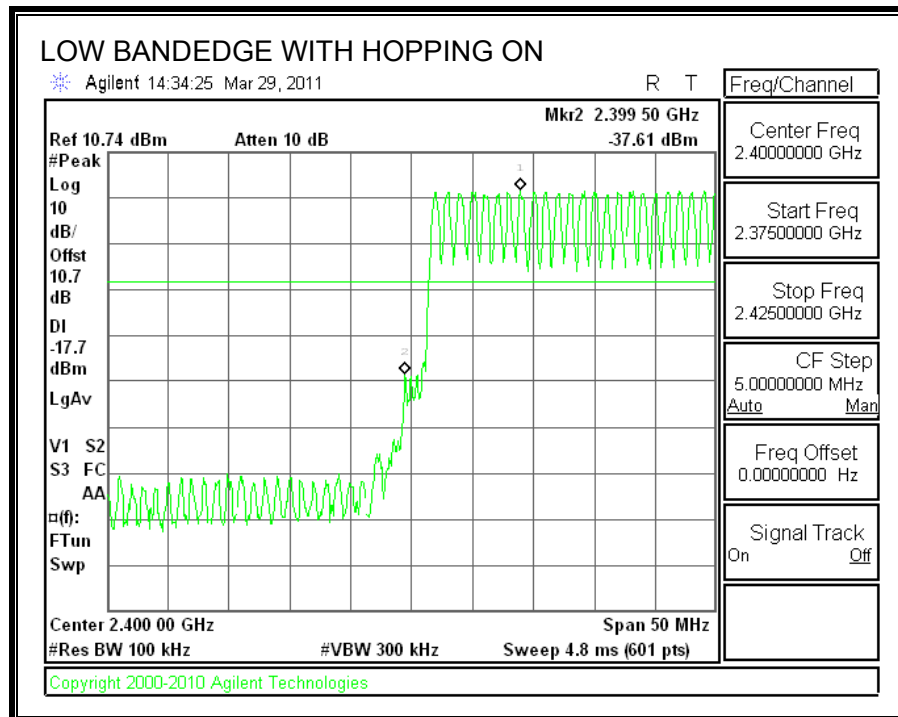

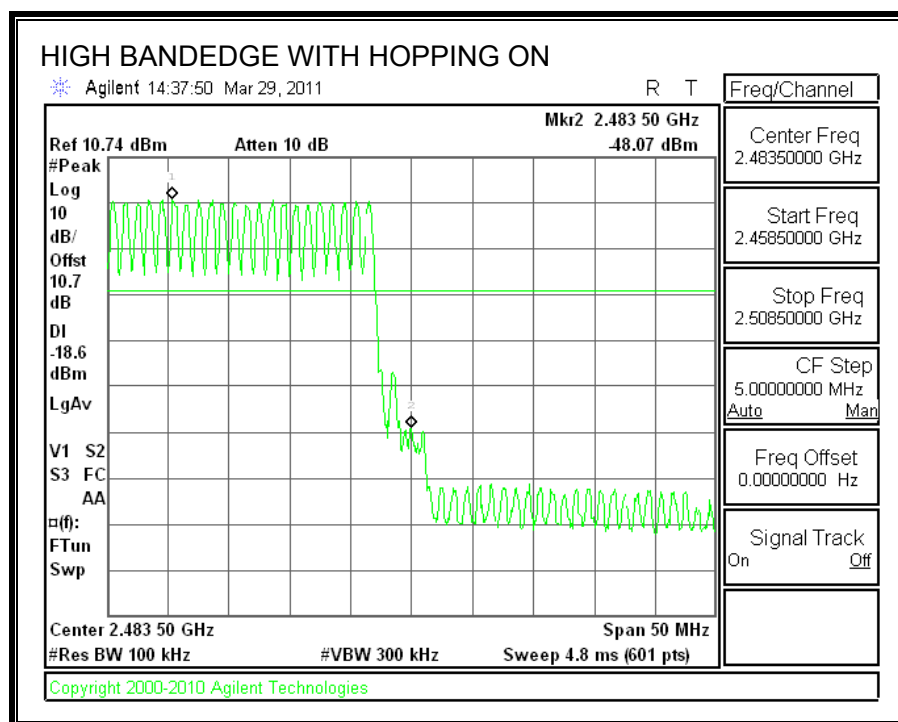

7.2. ENHANCED DATA RATE 8PSK MODULATION

7.2.1. 20 dB AND 99% BANDWIDTH

LIMIT

None; for reporting purposes only.


TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to $\geq 1\%$ of the 20 dB bandwidth. The VBW is set to $\geq$ RBW. The sweep time is coupled.

RESULTS

Channel	Frequency (MHz)	20 dB Bandwidth (kHz)	99% Bandwidth (kHz)
Low	2402	1247	1226.7
Middle	2441	1250	1241.6
High	2480	1243	1221.3


20 dB BANDWIDTH

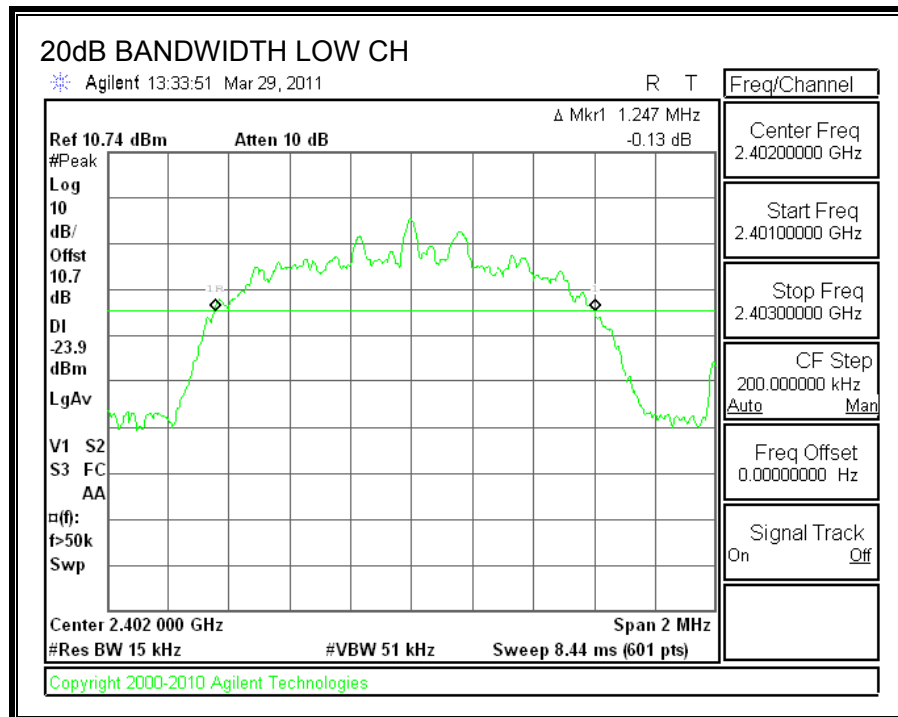


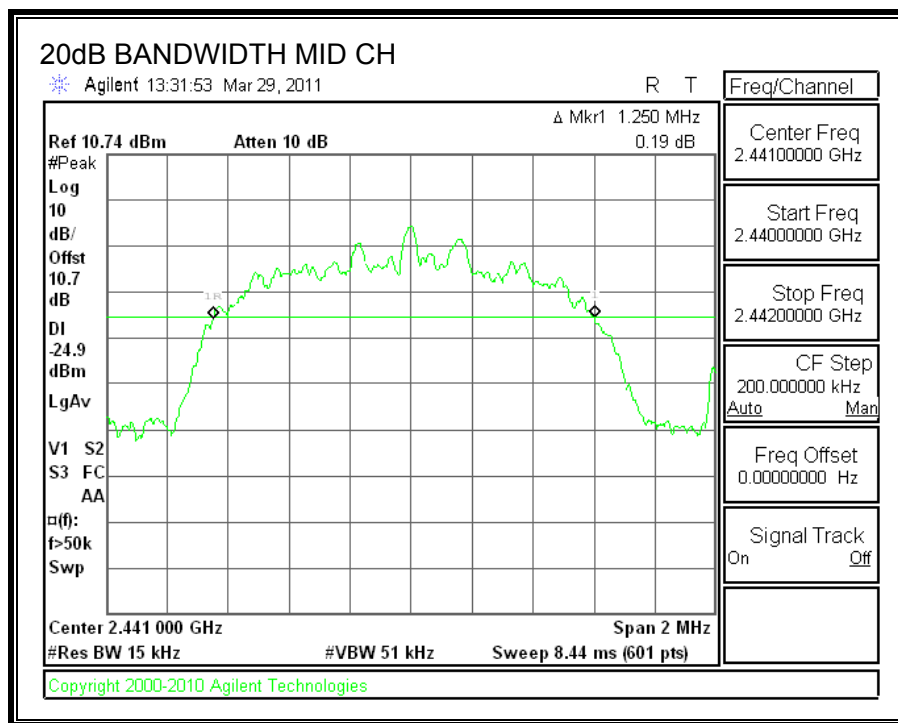




99% BANDWIDTH

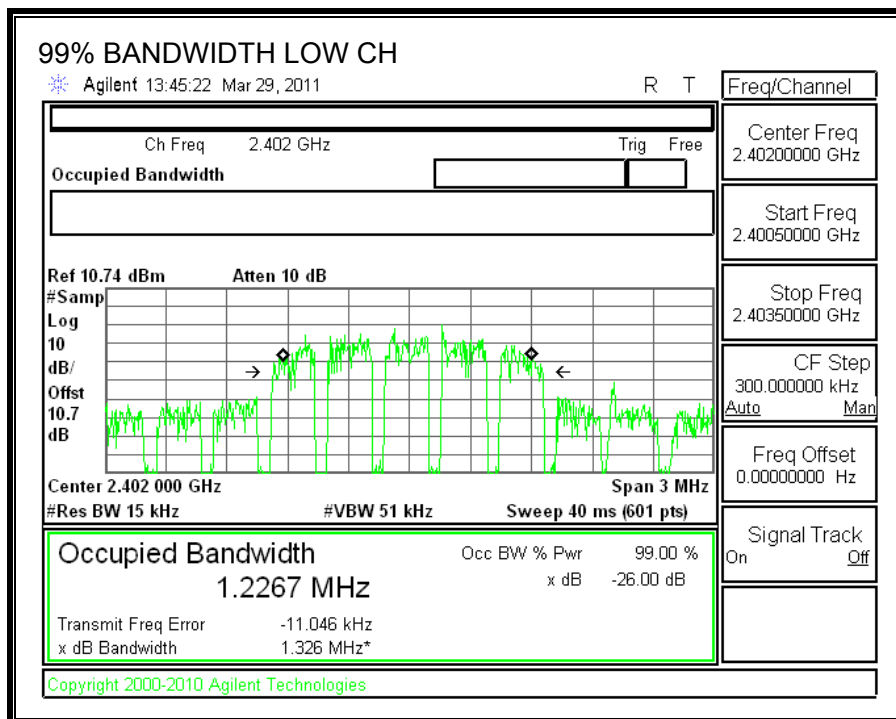

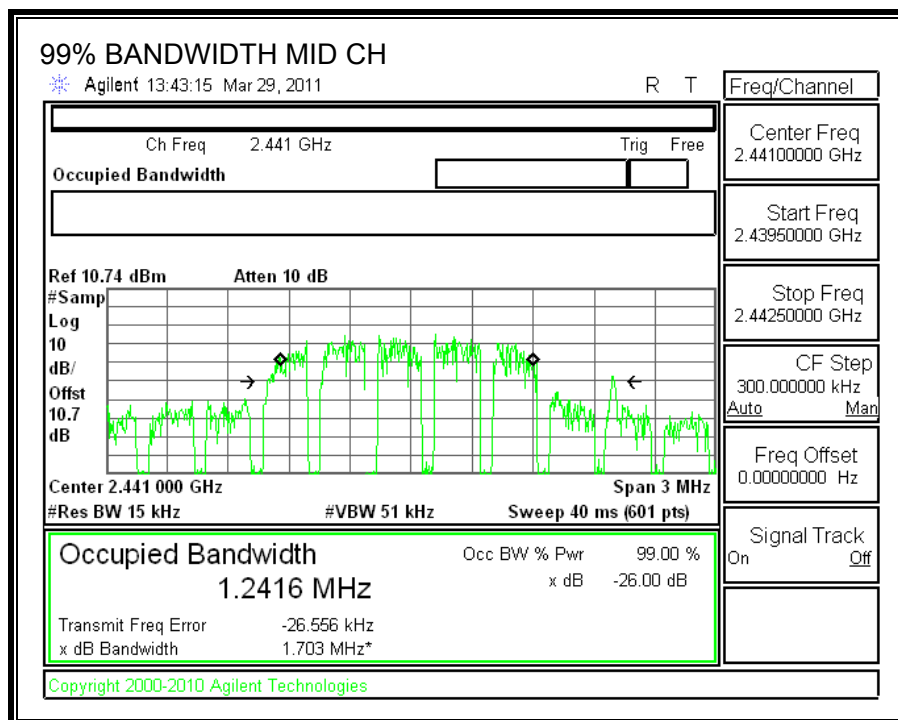

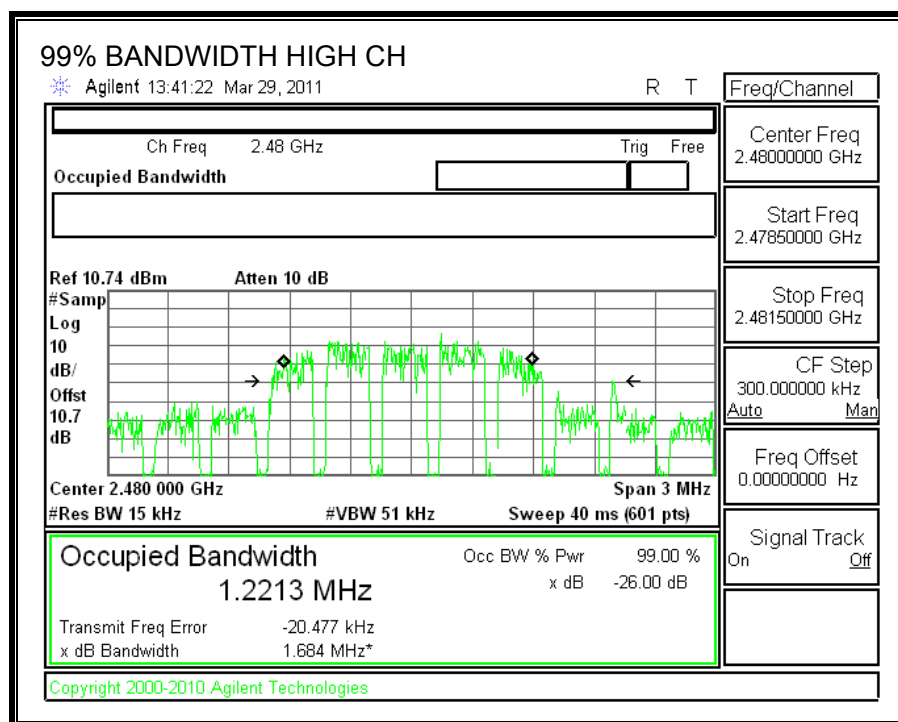

7.2.2. HOPPING FREQUENCY SEPARATION

LIMIT

FCC §15.247 (a) (1)

IC RSS-210 A8.1 (b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 100 kHz. The sweep time is coupled.

RESULTS

HOPPING FREQUENCY SEPARATION

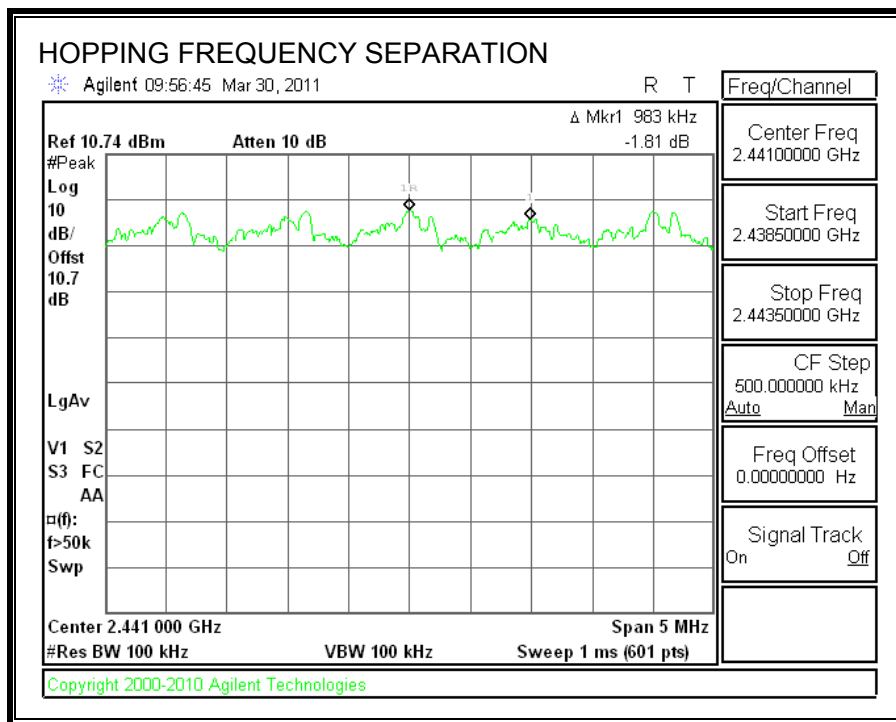

7.2.3. NUMBER OF HOPPING CHANNELS

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.


TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW and VBW are set to 1 MHz. The analyzer is set to Max Hold.


RESULTS


79 Channels observed.

NUMBER OF HOPPING CHANNELS

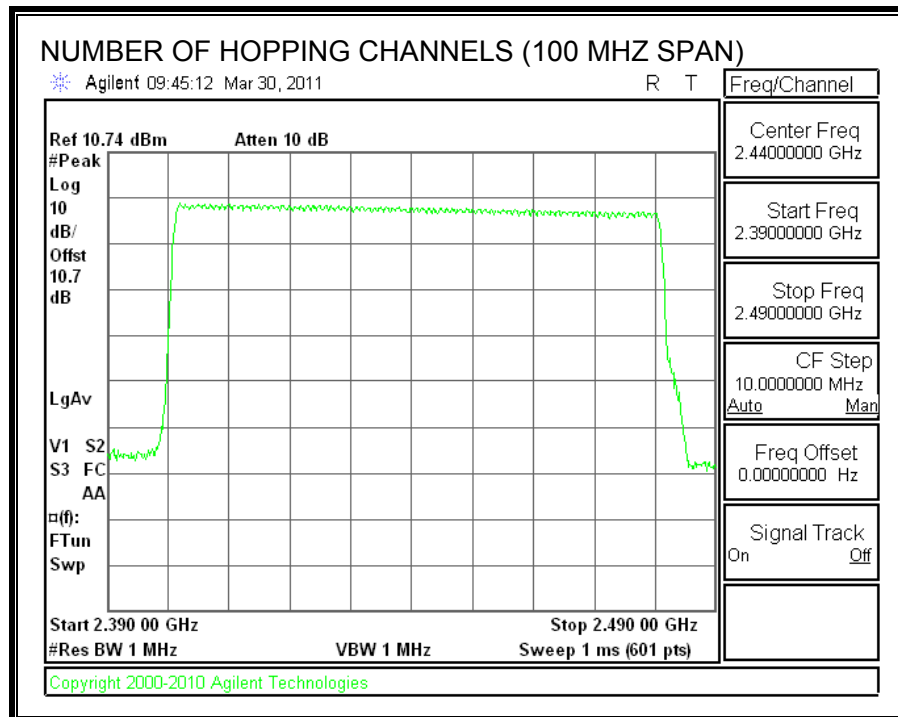

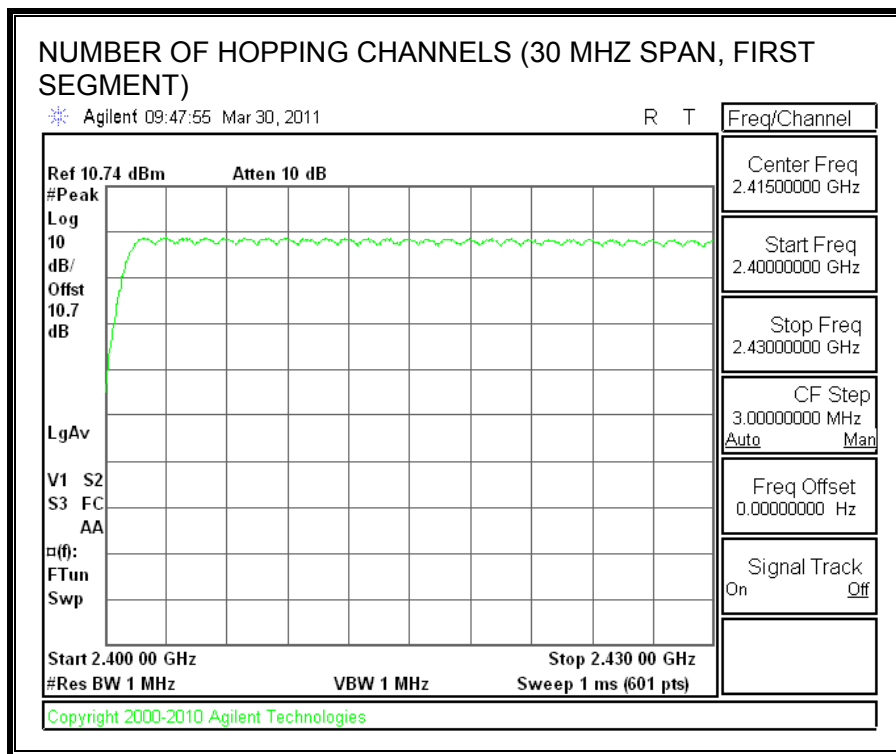

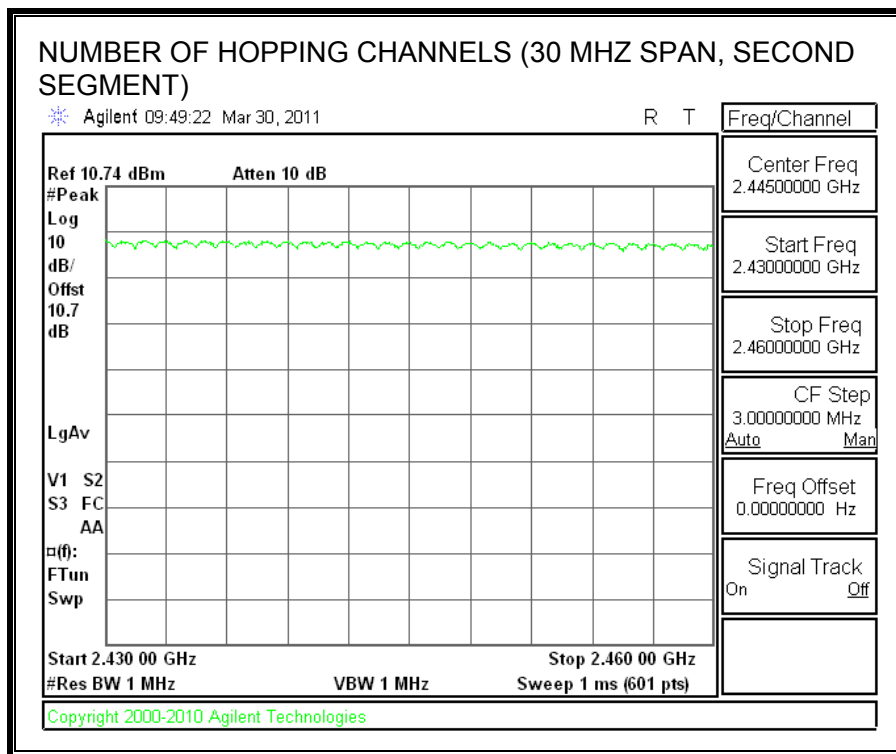

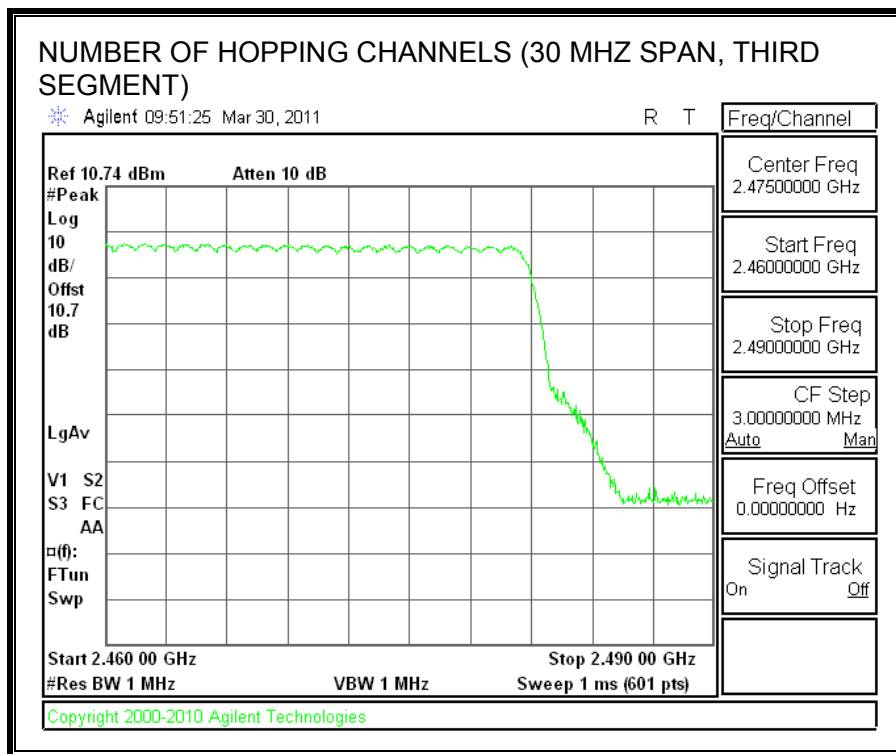

7.2.4. AVERAGE TIME OF OCCUPANCY

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.

The average time of occupancy in the specified 31.6 second period (79 channels * 0.4 s) is equal to $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{pulse width}$.


RESULTS

Time Of Occupancy = $10 * 11 \text{ pulses} * 2.875 \text{ msec} = 316 \text{ msec}$


8PSK Mode

DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of (sec)	Limit (sec)	Margin (sec)
DH5	2.875	11	0.316	0.4	-0.084

PULSE WIDTH

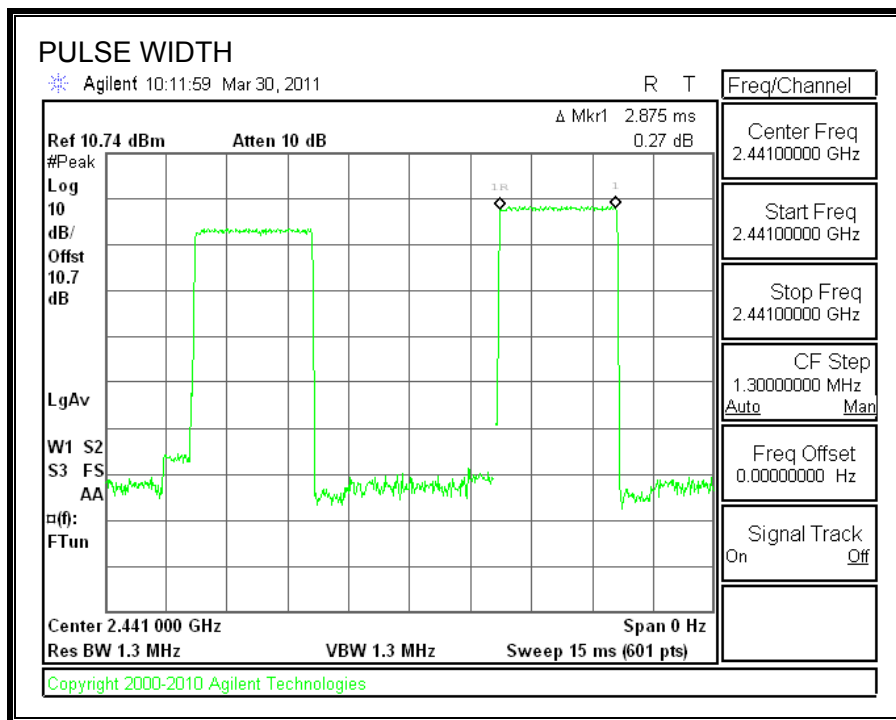

NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD

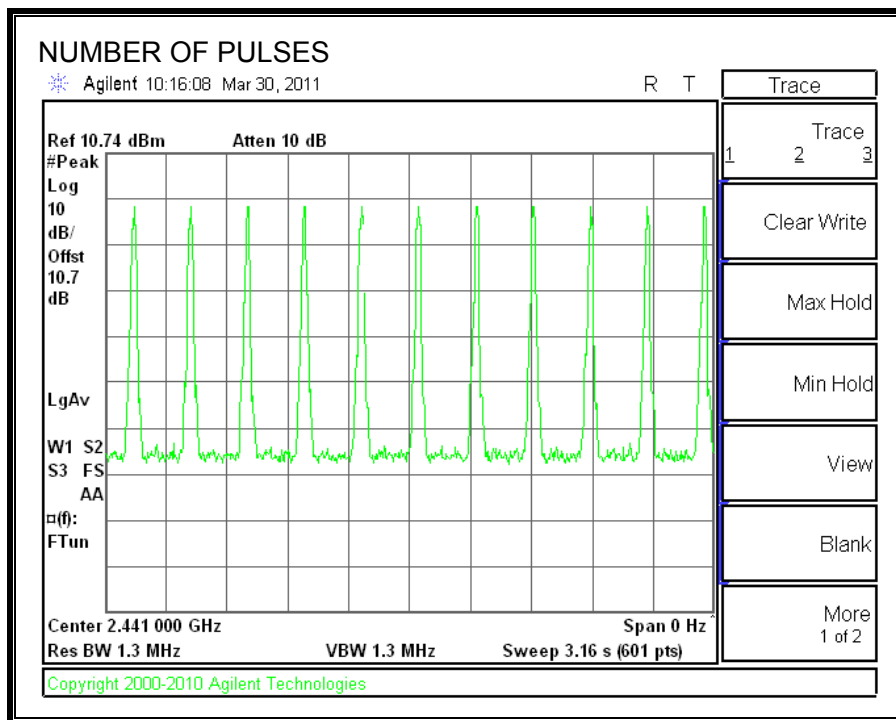

7.2.5. OUTPUT POWER

LIMIT

§15.247 (b) (1)

RSS-210 Issue 7 Clause A8.4

The maximum antenna gain is less than 6 dBi, therefore the limit is 30 dBm.


TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.


RESULTS

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	0.06	30	-29.94
Middle	2441	-0.69	30	-30.69
High	2480	-1.86	30	-31.86

OUTPUT POWER

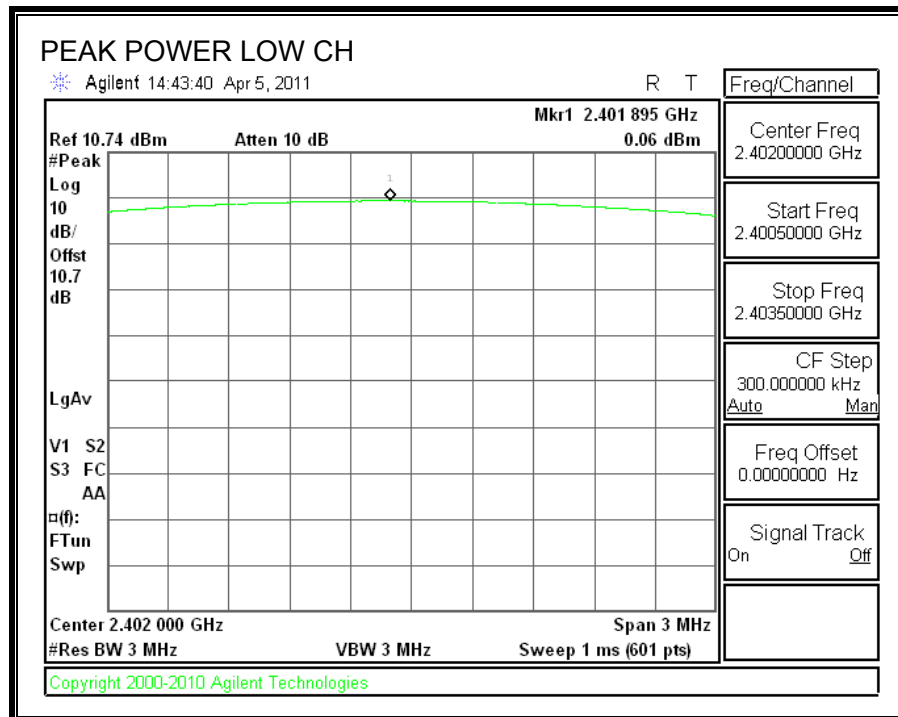

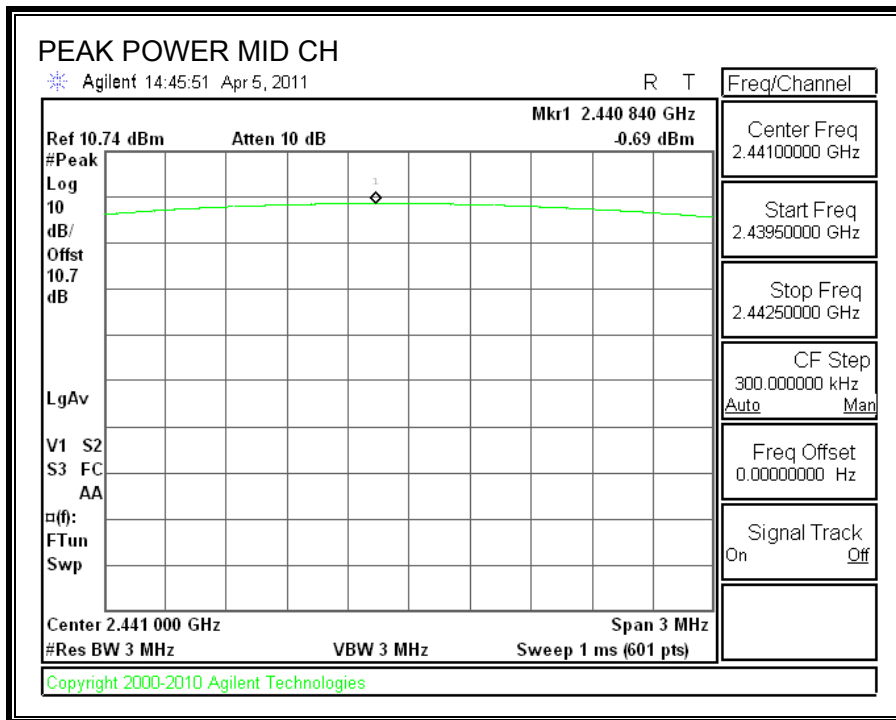

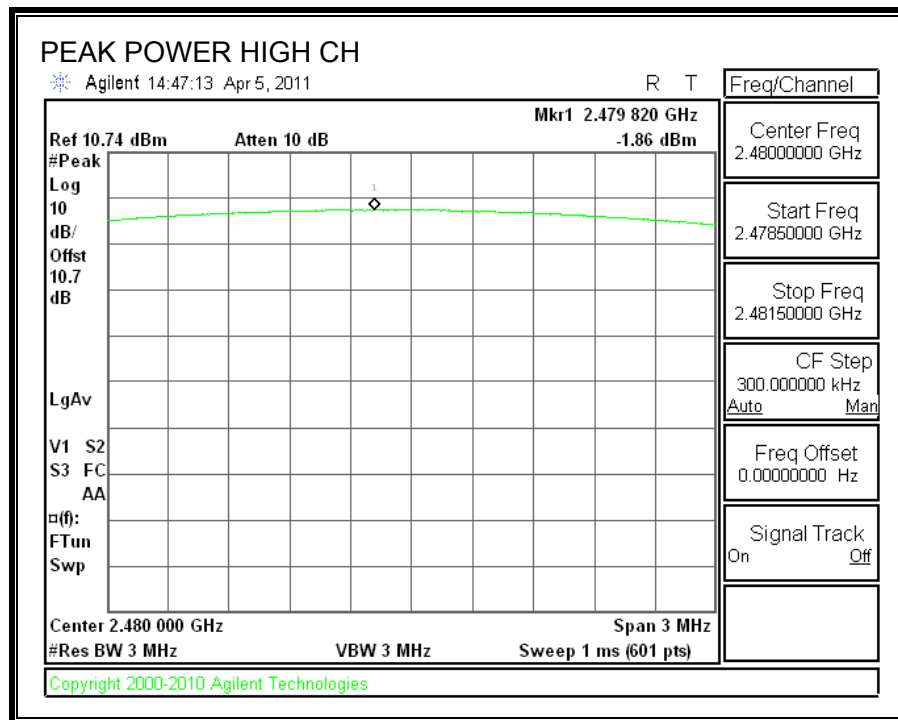

7.2.6. AVERAGE POWER

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 10.74 dB (including 10 dB pad and 0.74 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	-3.31
Middle	2441	-4.34
High	2480	-5.49

7.2.7. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

Limit = -20 dBc

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.


RESULTS


SPURIOUS EMISSIONS, LOW CHANNEL

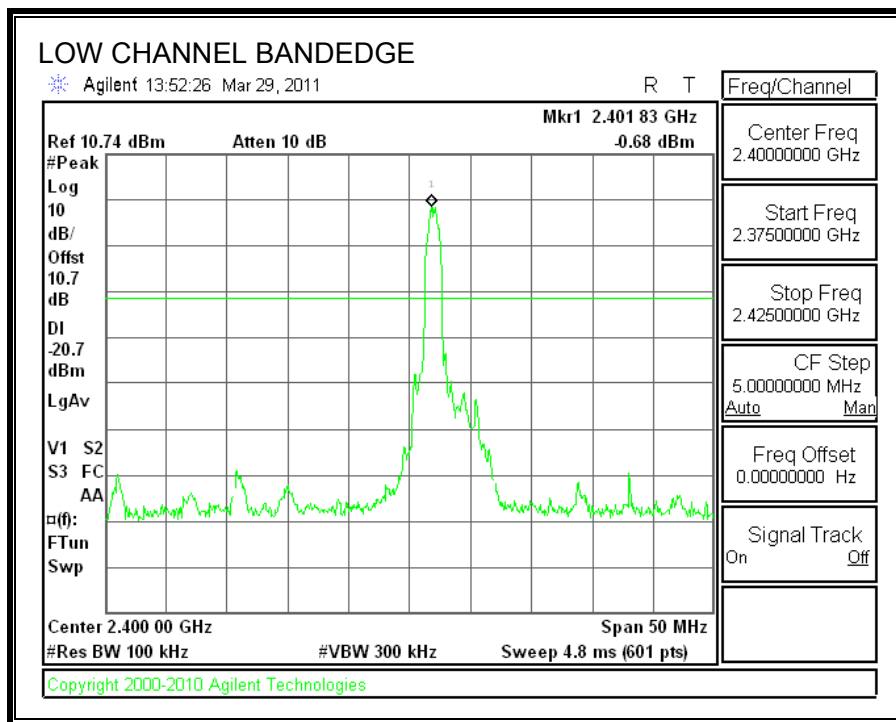

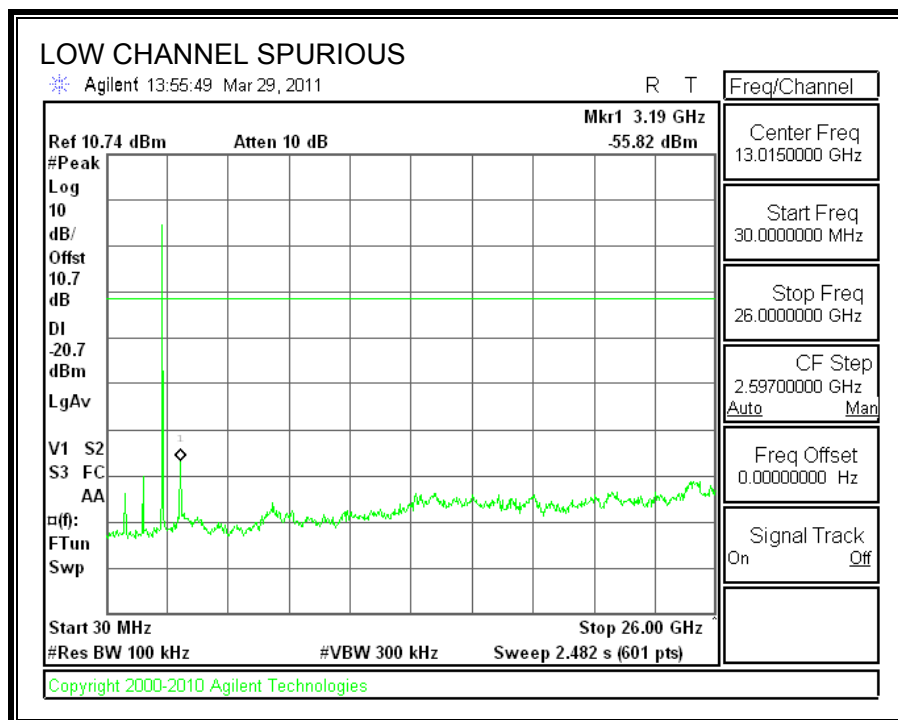



SPURIOUS EMISSIONS, MID CHANNEL

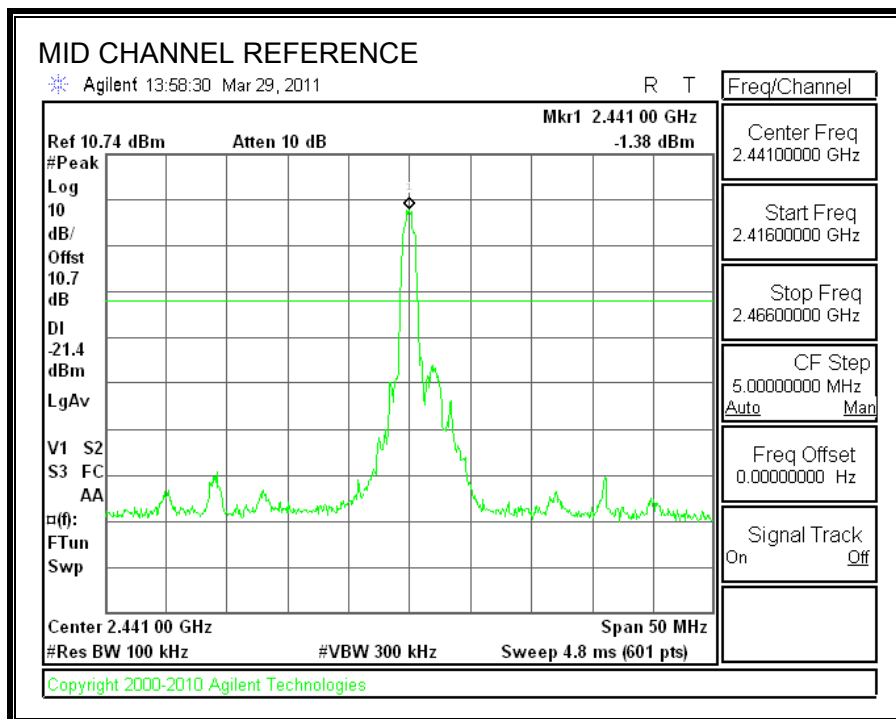

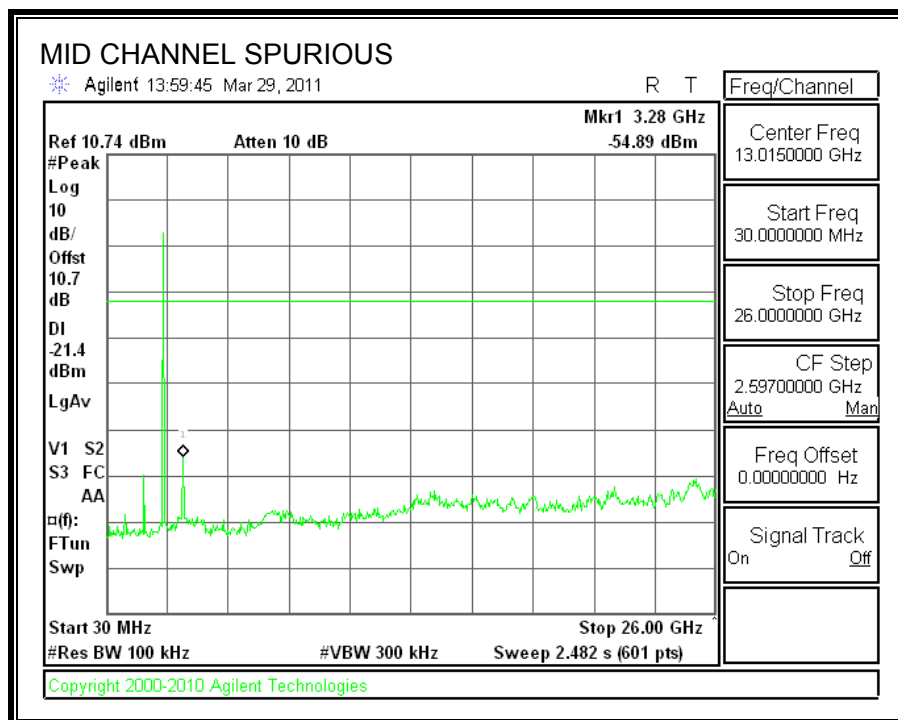



SPURIOUS EMISSIONS, HIGH CHANNEL

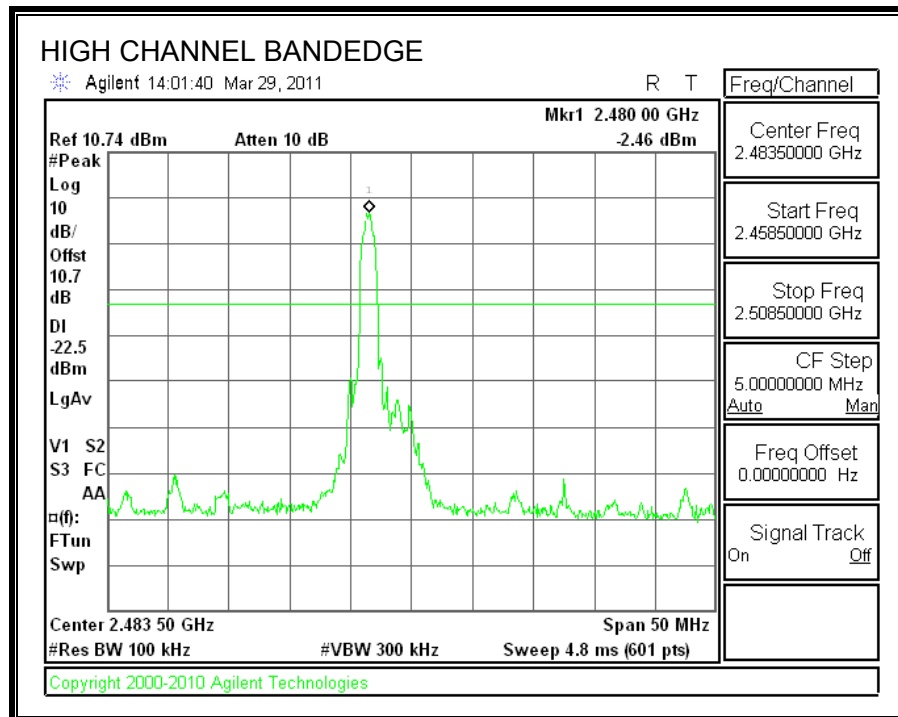

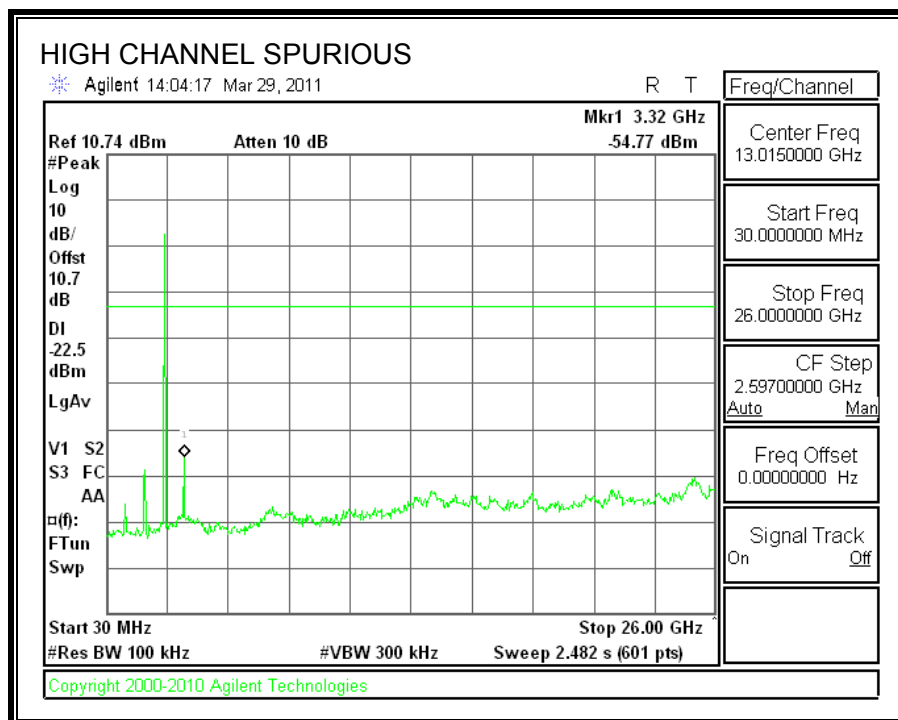

SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

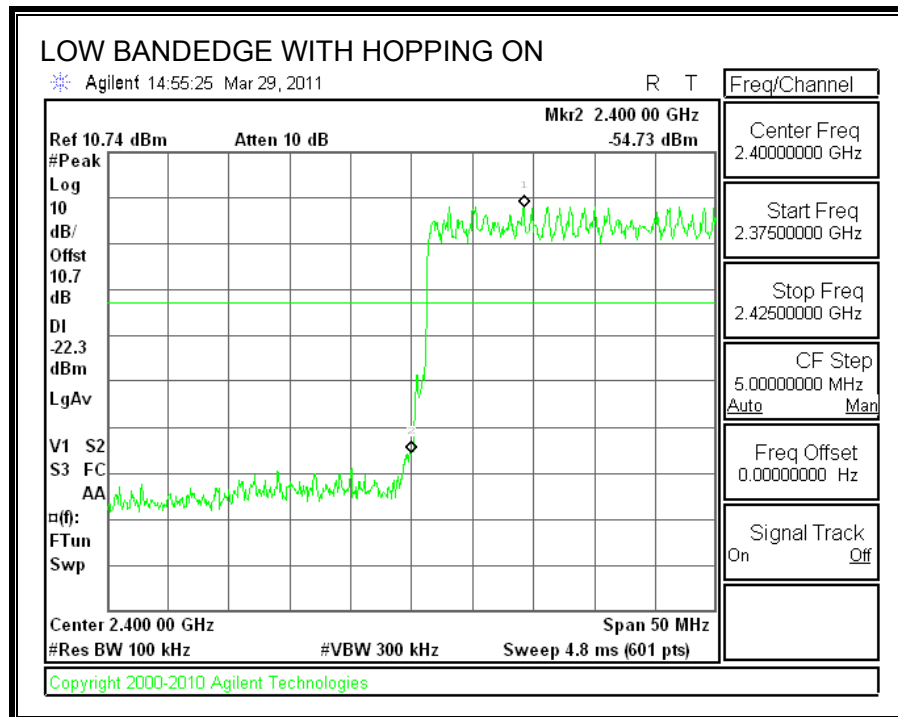

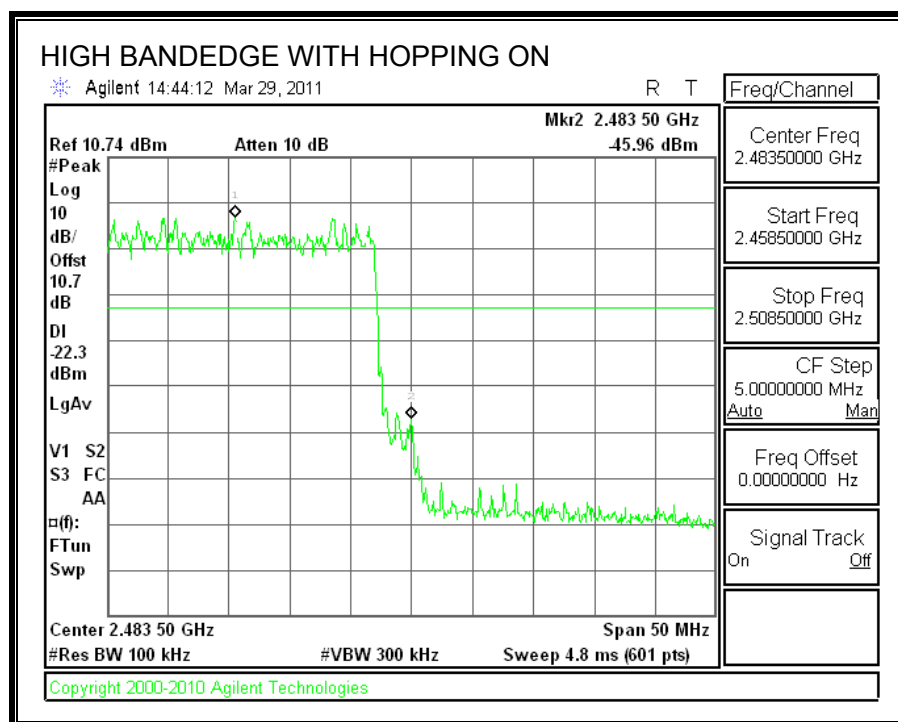

8. RADIATED TEST RESULTS

8.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

IC RSS-210 Clause 2.6 (Transmitter)

IC RSS-GEN Clause 6 (Receiver)

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.


The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

8.2. TRANSMITTER ABOVE 1 GHz


8.2.1. BASIC DATA RATE GFSK MODULATION


RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

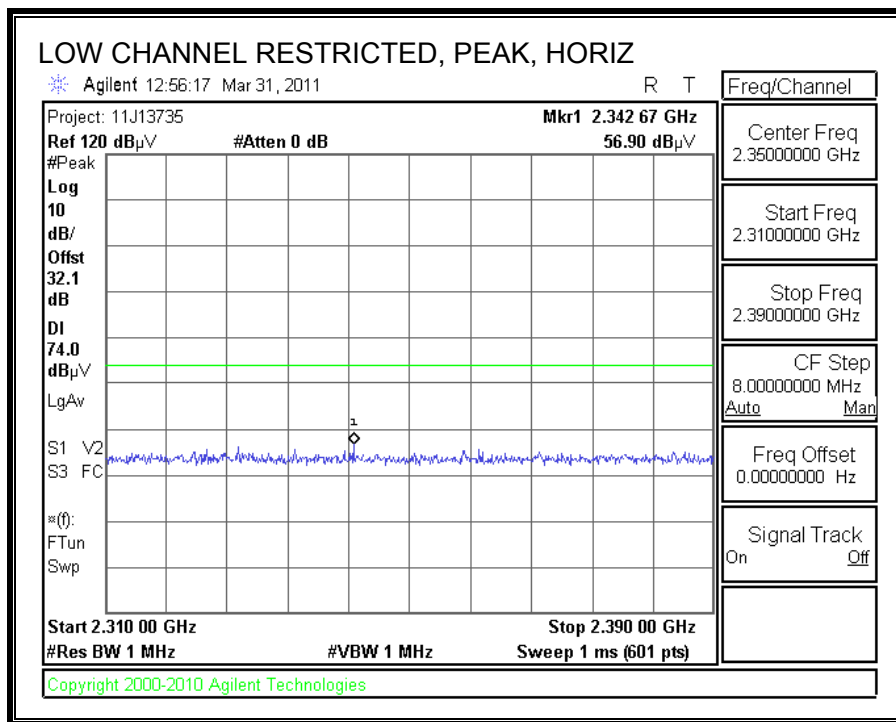

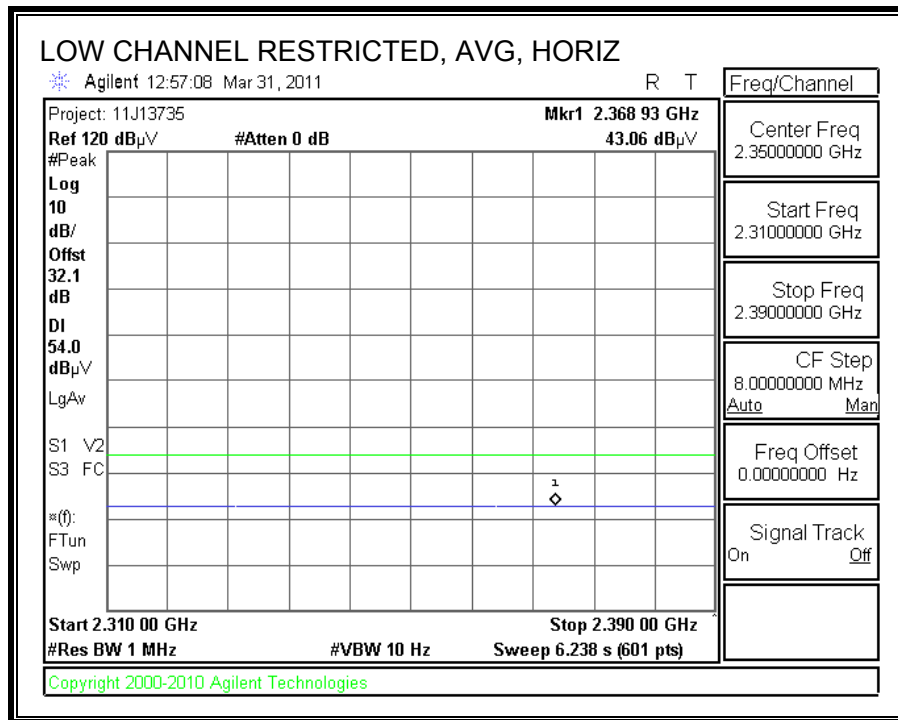



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

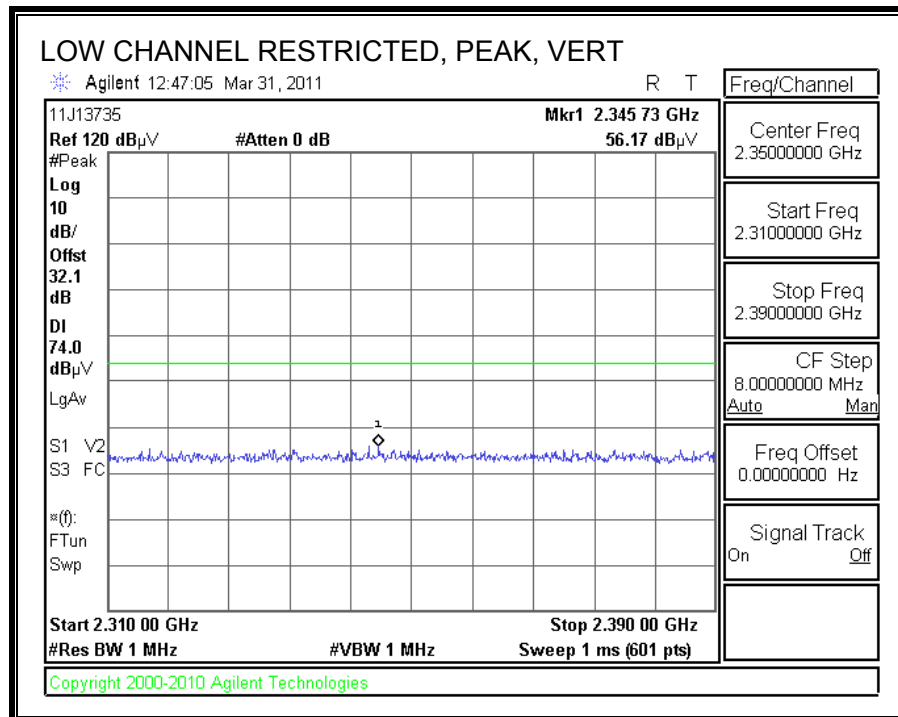

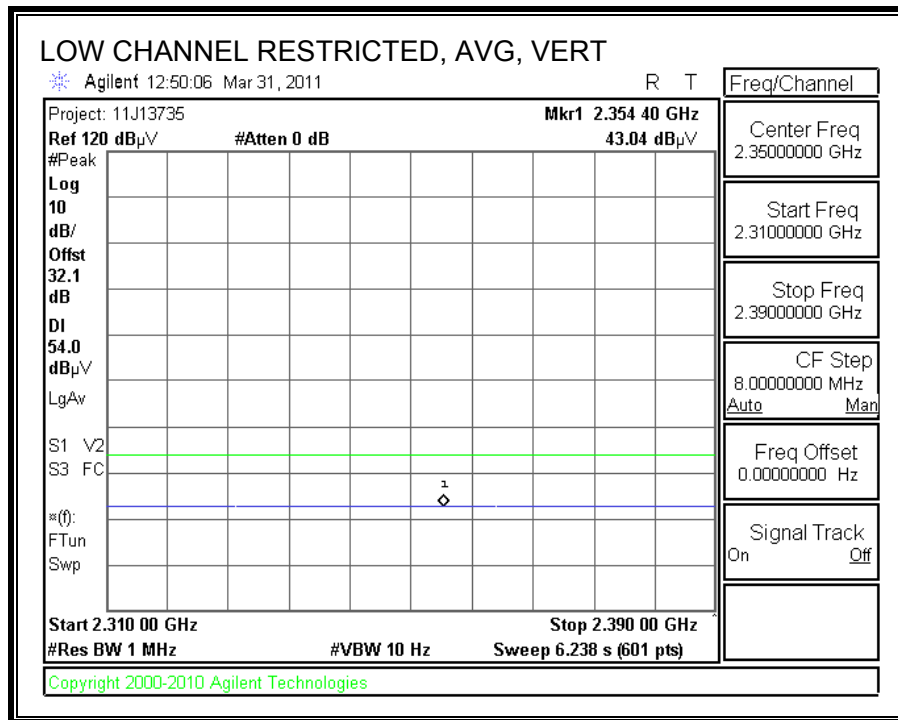



RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

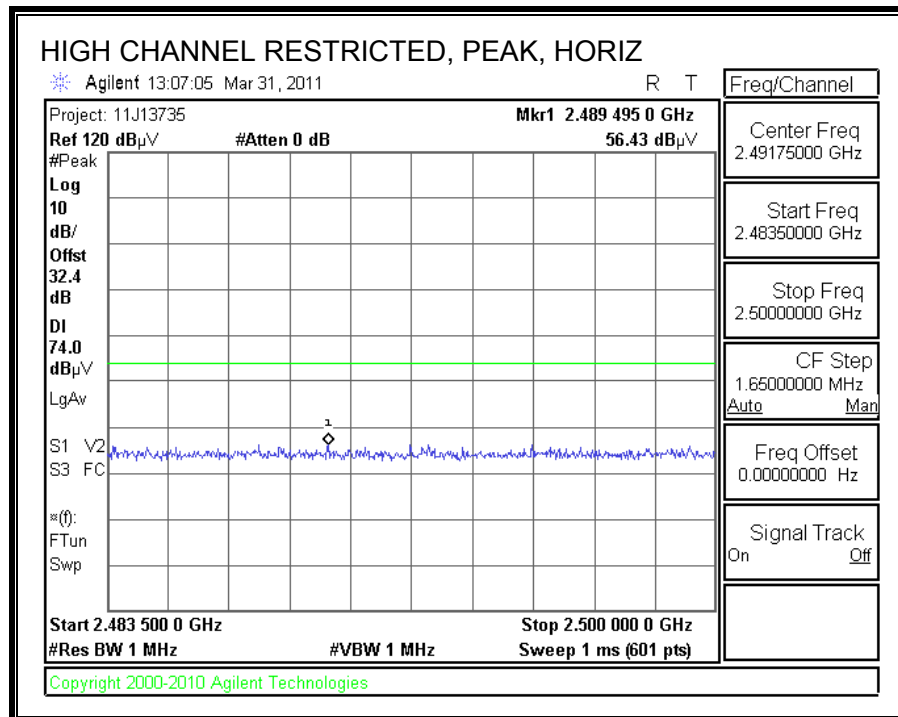

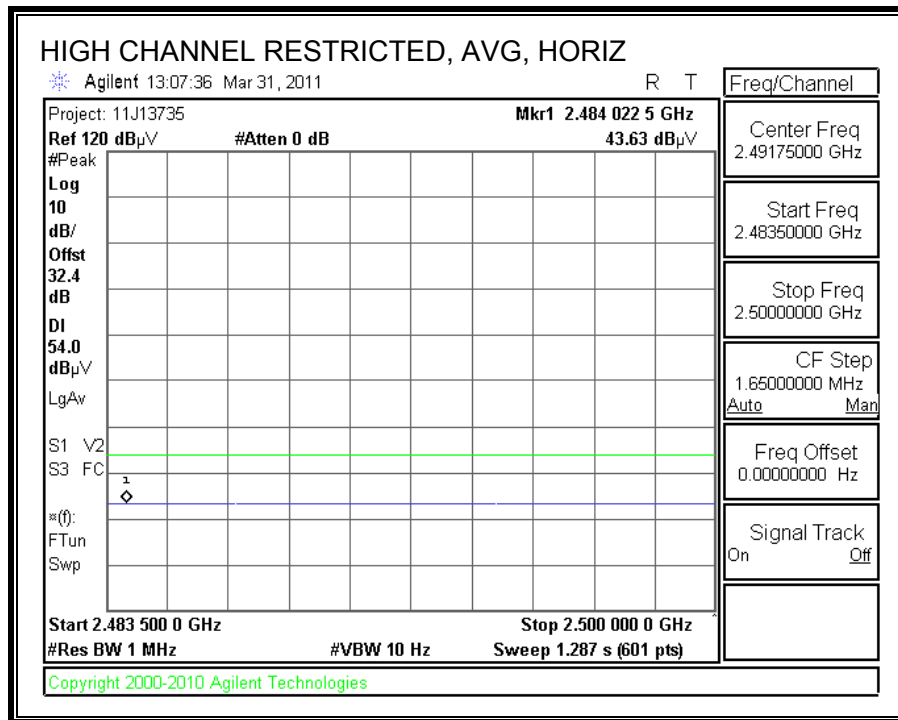

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

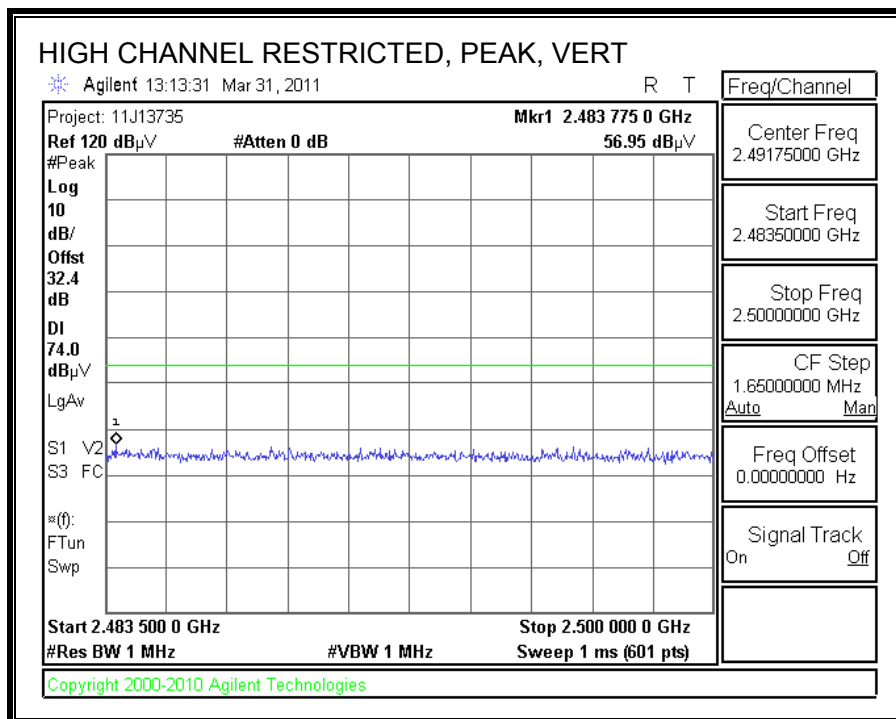

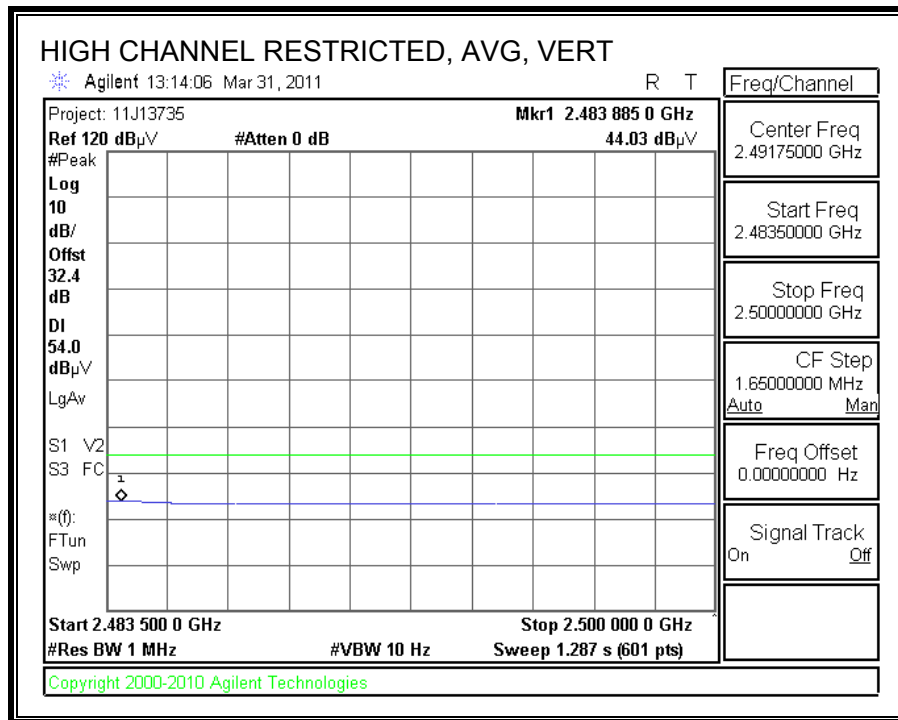

HARMONICS AND SPURIOUS EMISSIONS

High Frequency Measurement

Compliance Certification Services, Fremont 5m Chamber

Test Engr: Doug Anderson

Date: 04/01/11

Project #: 11J13735

Company: Panasonic Corporation

Test Target: FCC 15.209

Mode Oper: Normal Transmit / GFSK

f	Measurement Frequency	Amp	Preamp Gain	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter	


f GHz	Dist (m)	Read dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Ftr dB	Corr. dBuV/m	Limit dBuV/m	Margin dB	Ant. Pol. V/H	Det. P/A/QP	Ant. High cm	Table Angle Degree	Notes
GFSK: Low Channel / Horizontal															
4.804	3.0	51.1	32.8	5.8	-34.8	0.0	0.0	54.8	74.0	-19.2	H	P	132.8	244.7	
4.804	3.0	44.1	32.8	5.8	-34.8	0.0	0.0	47.8	54.0	-6.2	H	A	132.8	244.7	
GFSK: Low Channel / Vertical															
4.804	3.0	50.8	32.8	5.8	-34.8	0.0	0.0	54.5	74.0	-19.5	V	P	100.0	164.8	
4.804	3.0	43.9	32.8	5.8	-34.8	0.0	0.0	47.6	54.0	-6.4	V	A	100.0	164.8	
GFSK: Mid Channel / Horizontal															
4.882	3.0	54.3	32.8	5.8	-34.9	0.0	0.0	58.1	74.0	-15.9	H	P	164.2	175.5	
4.882	3.0	47.0	32.8	5.8	-34.9	0.0	0.0	50.8	54.0	-3.2	H	A	164.2	175.5	
GFSK: Mid Channel / Vertical															
4.882	3.0	51.3	32.8	5.8	-34.9	0.0	0.0	55.1	74.0	-18.9	V	P	112.1	164.3	
4.882	3.0	44.2	32.8	5.8	-34.9	0.0	0.0	48.0	54.0	-6.0	V	A	112.1	164.3	
GFSK: High Channel / Horizontal															
4.960	3.0	53.6	32.9	5.9	-34.9	0.0	0.0	57.5	74.0	-16.5	H	P	172.9	162.6	
4.960	3.0	46.1	32.9	5.9	-34.9	0.0	0.0	50.0	54.0	-4.0	H	A	172.9	162.6	
GFSK: High Channel / Vertical															
4.960	3.0	48.6	32.9	5.9	-34.9	0.0	0.0	52.5	74.0	-21.5	V	P	155.9	162.6	
4.960	3.0	41.5	32.9	5.9	-34.9	0.0	0.0	45.4	54.0	-8.6	V	A	155.9	162.6	


Rev. 4.1.2.7

Note: No other emissions were detected above the system noise floor.


8.2.2. ENHANCED DATA RATE 8PSK MODULATION


RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

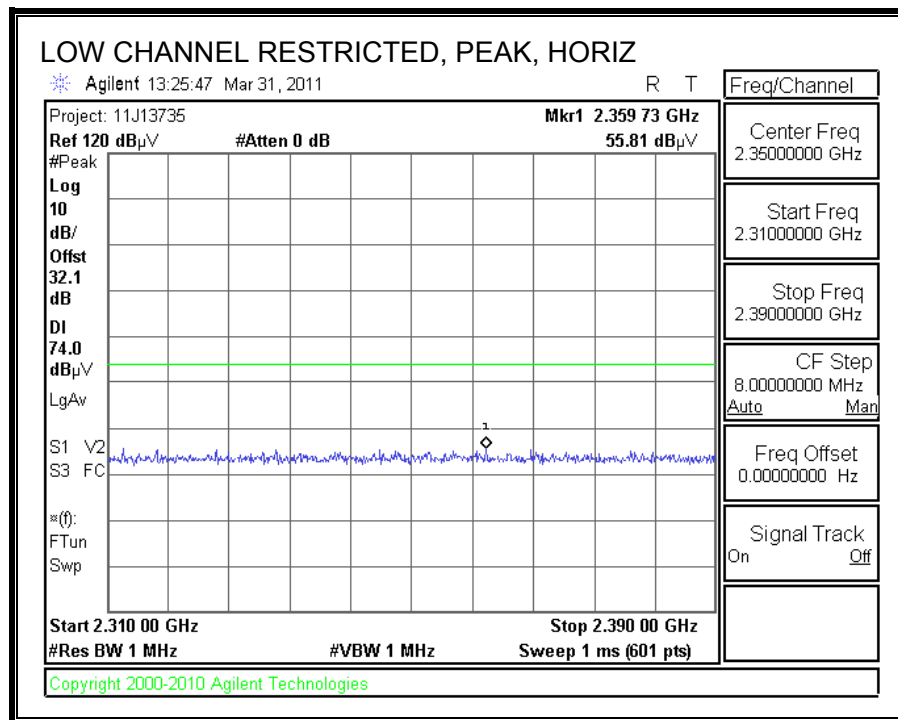

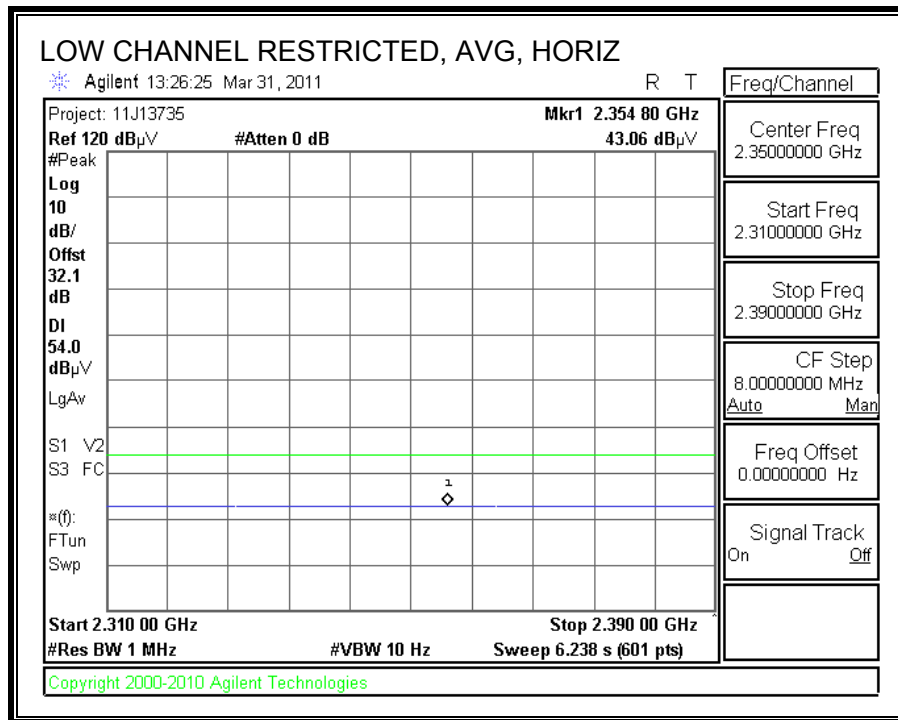



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

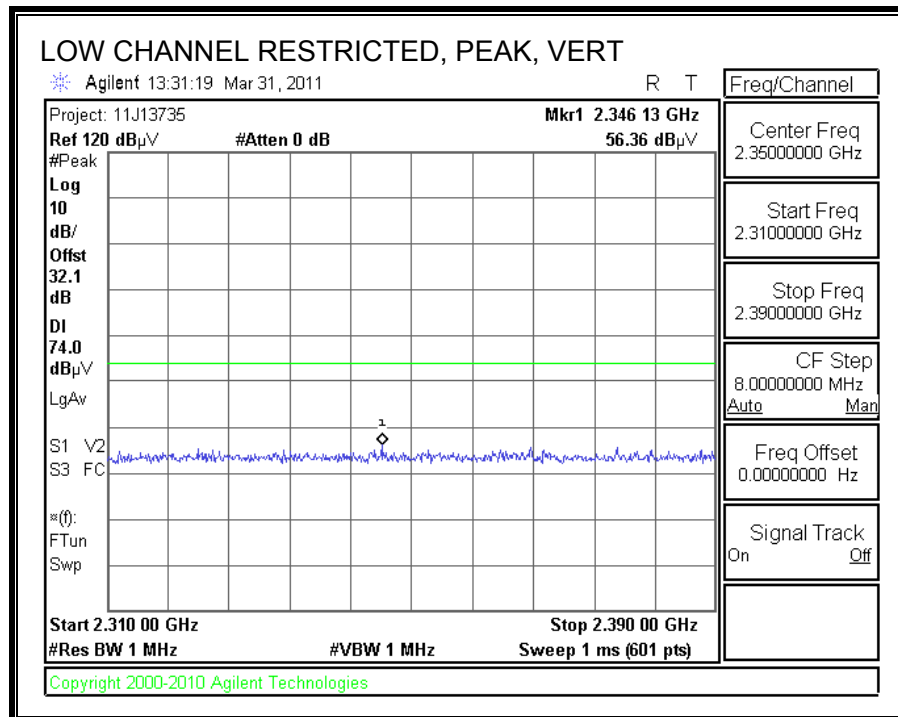

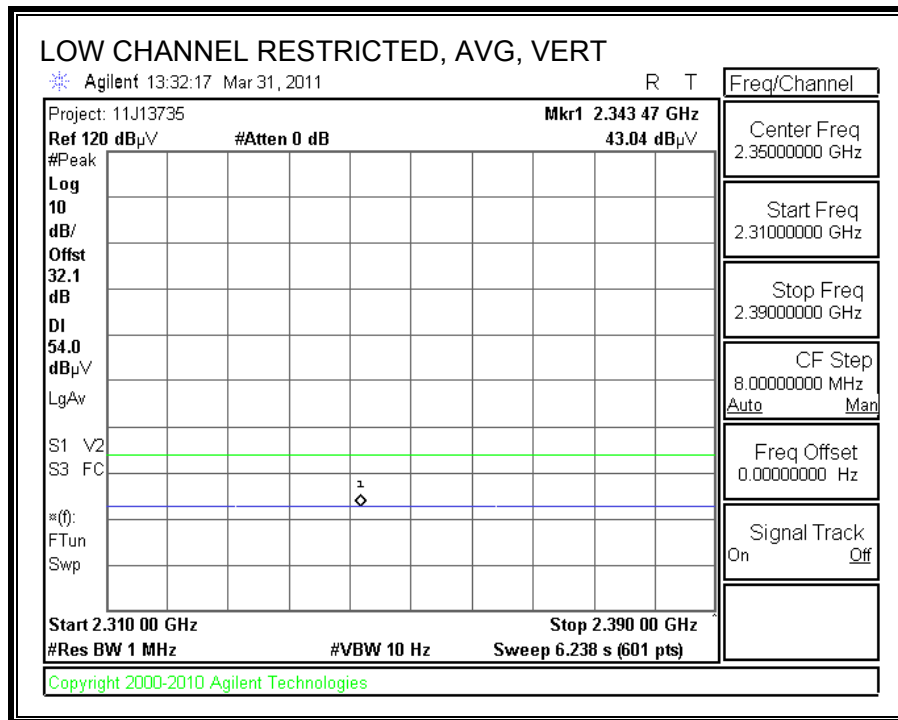



RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

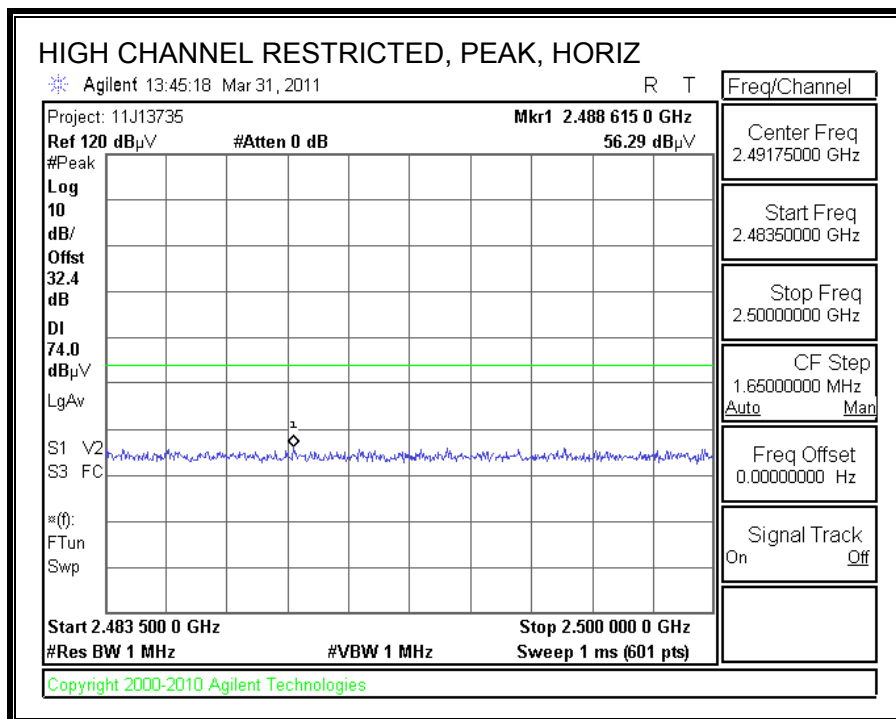

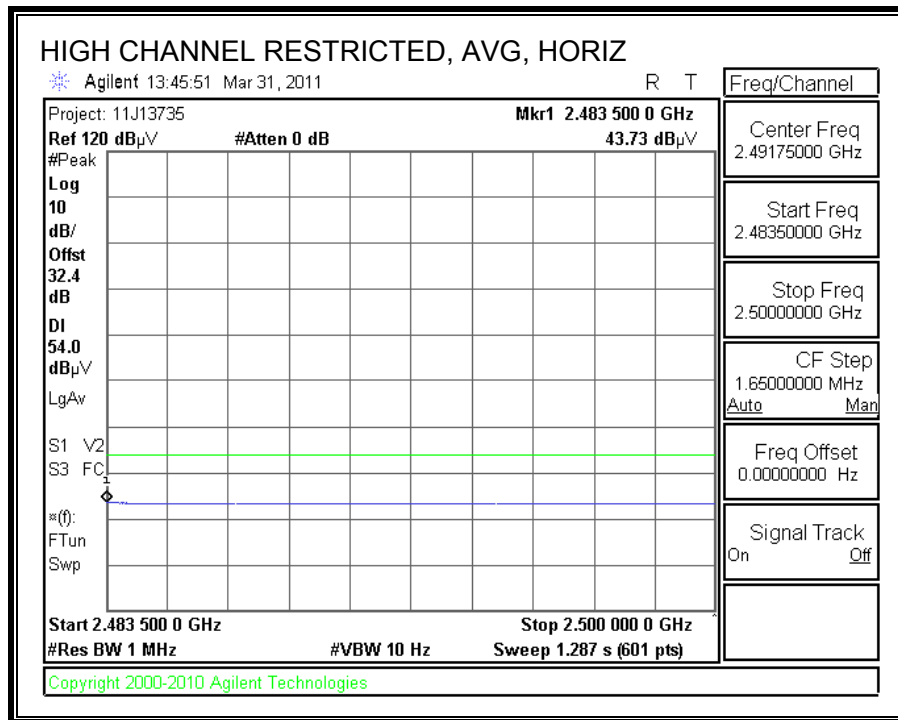

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

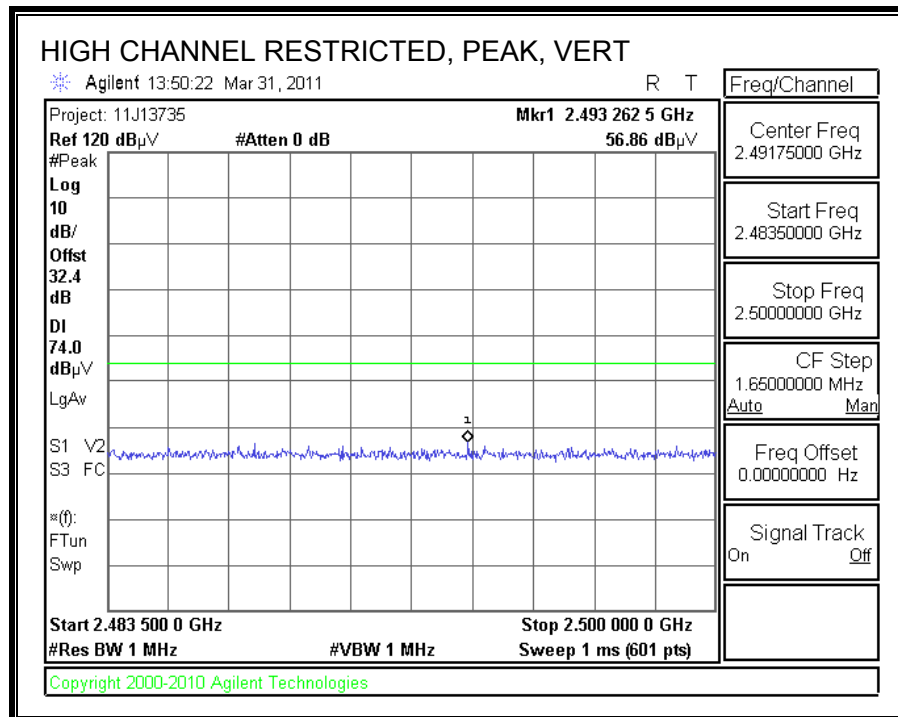

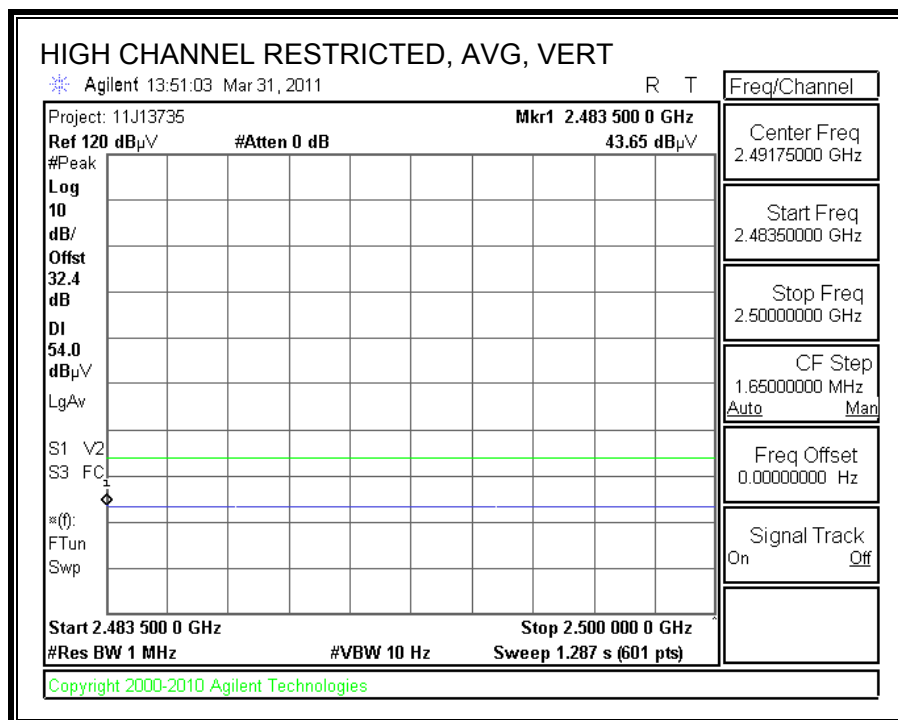

HARMONICS AND SPURIOUS EMISSIONS

High Frequency Measurement Compliance Certification Services, Fremont 5m Chamber

Test Engr: Doug Anderson
Date: 04/01/11
Project #: 11J13735
Company: Panasonic Corporation
Test Target: FCC 15.209
Mode Oper: Normal Transmit / 8PSK

f	Measurement Frequency	Amp	Preamp Gain	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter	

f GHz	Dist (m)	Read dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fitr dB	Corr. dBuV/m	Limit dBuV/m	Margin dB	Ant. Pol V/H	Det. P/A/QP	Ant. High cm	Table Angle Degree	Notes
8PSK: Low Channel / Horizontal															
4.804	3.0	41.9	32.8	5.8	-34.8	0.0	0.0	45.6	74.0	-28.4	H	P	173.1	313.2	
4.804	3.0	30.9	32.8	5.8	-34.8	0.0	0.0	34.6	54.0	-19.4	H	A	173.1	313.2	
8PSK: Low Channel / Vertical															
4.804	3.0	41.7	32.8	5.8	-34.8	0.0	0.0	45.4	74.0	-28.6	V	P	100.2	163.7	
4.804	3.0	30.9	32.8	5.8	-34.8	0.0	0.0	34.6	54.0	-19.4	V	A	100.2	163.7	
8PSK: Mid Channel / Horizontal															
4.882	3.0	43.9	32.8	5.8	-34.9	0.0	0.0	47.7	74.0	-26.3	H	P	175.2	160.9	
4.882	3.0	33.7	32.8	5.8	-34.9	0.0	0.0	37.5	54.0	-16.5	H	A	175.2	160.9	
8PSK: Mid Channel / Vertical															
4.882	3.0	39.6	32.8	5.8	-34.9	0.0	0.0	43.4	74.0	-30.6	V	P	100.0	44.9	
4.882	3.0	28.4	32.8	5.8	-34.9	0.0	0.0	32.2	54.0	-21.8	V	A	100.0	44.9	
8PSK: High Channel / Horizontal															
4.960	3.0	42.3	32.9	5.9	-34.9	0.0	0.0	46.3	74.0	-27.7	H	P	177.6	167.1	
4.960	3.0	31.8	32.9	5.9	-34.9	0.0	0.0	35.7	54.0	-18.3	H	A	177.6	167.1	
8PSK: High Channel / Vertical															
4.960	3.0	40.0	32.9	5.9	-34.9	0.0	0.0	43.9	74.0	-30.1	V	P	131.0	118.1	
4.960	3.0	29.8	32.9	5.9	-34.9	0.0	0.0	33.7	54.0	-20.3	V	A	131.0	118.1	

Rev. 4.1.2.7

Note: No other emissions were detected above the system noise floor.


8.3. RECEIVER ABOVE 1 GHz

High Frequency Measurement																
Compliance Certification Services, Fremont 5m Chamber																
Company: Panasonic Corporation																
Project #: 11J13735																
Date: 04/01/11																
Test Engineer: Doug Anderson																
Configuration: EUT with Support PC																
Mode: Receive Mode																
Test Equipment:																
Horn 1-18GHz			Pre-amplifier 1-26GHz			Pre-amplifier 26-40GHz			Horn > 18GHz			Limit				
T59; S/N: 3245 @3m			T145 Agilent 3008A005t									FCC Class B				
Hi Frequency Cables																
3' cable 22807700			12' cable 22807600			20' cable 22807500			HPF			Reject Filter			Peak Measurements RBW=VBW=1MHz	
3' cable 22807700			12' cable 22807600			20' cable 22807500						R_001			Average Measurements RBW=1MHz ; VBW=10Hz	
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fctr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)	
Horizontal:																
1.707	3.0	57.1	28.8	26.5	3.2	-35.6	0.0	0.0	51.2	22.9	74	54	-22.8	-31.1	H	
1.720	3.0	51.7	28.6	26.6	3.2	-35.6	0.0	0.0	45.9	22.8	74	54	-28.1	-31.2	H	
1.673	3.0	57.8	28.6	26.4	3.1	-35.6	0.0	0.0	51.7	22.5	74	54	-22.3	-31.5	H	
1.567	3.0	52.5	29.4	26.0	3.0	-35.7	0.0	0.0	45.9	22.7	74	54	-28.1	-31.3	H	
1.597	3.0	46.0	29.6	26.1	3.0	-35.7	0.0	0.0	39.5	23.1	74	54	-34.5	-30.9	H	
1.827	3.0	50.0	27.3	27.0	3.3	-35.5	0.0	0.0	44.7	22.1	74	54	-29.3	-31.9	H	
Vertical:																
1.673	3.0	61.4	28.8	26.4	3.1	-35.6	0.0	0.0	55.3	22.7	74	54	-18.7	-31.3	V	
1.653	3.0	61.1	29.2	26.3	3.1	-35.7	0.0	0.0	54.9	23.0	74	54	-19.1	-31.0	V	
1.593	3.0	52.4	29.4	26.1	3.0	-35.7	0.0	0.0	45.9	22.8	74	54	-28.1	-31.2	V	
1.847	3.0	48.4	28.0	27.1	3.3	-35.5	0.0	0.0	43.3	22.8	74	54	-30.7	-31.2	V	
1.513	3.0	48.1	28.7	25.8	3.0	-35.8	0.0	0.0	41.2	21.8	74	54	-32.8	-32.2	V	
1.533	3.0	44.9	29.2	25.9	3.0	-35.7	0.0	0.0	38.0	22.3	74	54	-36.0	-31.7	V	
Rev. 07.22.09																
f	Measurement Frequency			Amp	Preamp Gain			Avg Lim	Average Field Strength Limit							
Dist	Distance to Antenna			D Corr	Distance Correct to 3 meters			Pk Lim	Peak Field Strength Limit							
Read	Analyzer Reading			Avg	Average Field Strength @ 3 m			Avg Mar	Margin vs. Average Limit							
AF	Antenna Factor			Peak	Calculated Peak Field Strength			Pk Mar	Margin vs. Peak Limit							
CL	Cable Loss			HPF	High Pass Filter											


8.4. WORST-CASE BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

HORIZONTAL PLOT

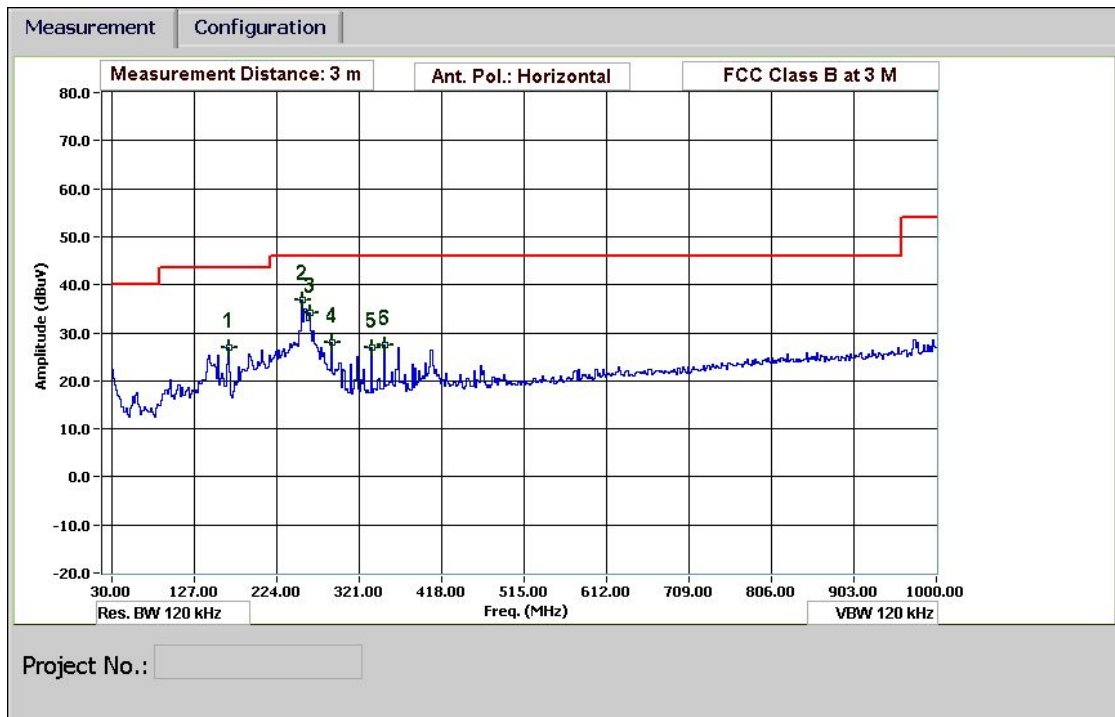

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)

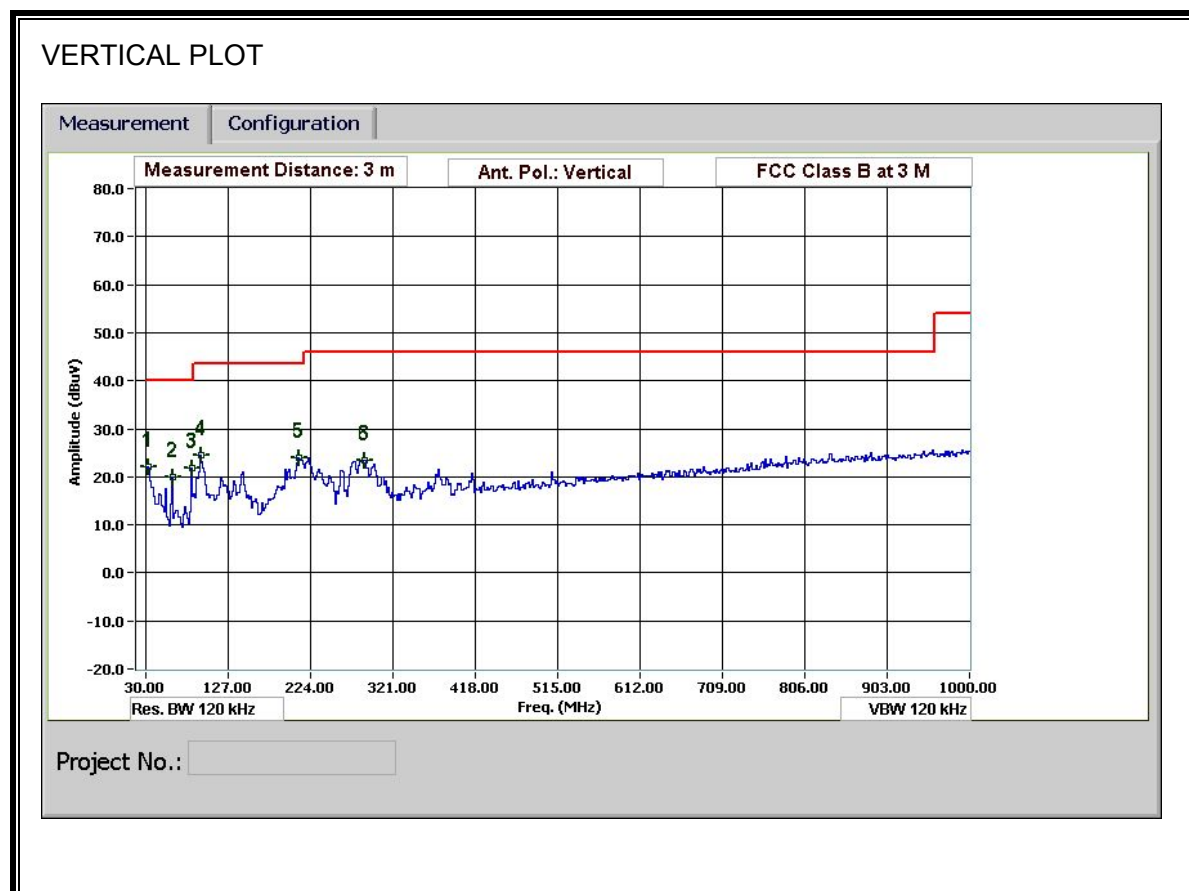

HORIZONTAL AND VERTICAL DATA

30-1000MHz Frequency Measurement
Compliance Certification Services, Fremont 5m Chamber

Test Engr: Doug Anderson
Date: 03/31/11
Project #: 11J13735
Company: Panasonic Corp.
Test Target: FCC Class B
Mode Oper: Normal Tx / Worst-Case

f	Measurement Frequency	Amp	Preamp Gain	Margin	Margin vs. Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters		
Read	Analyzer Reading	Filter	Filter Insert Loss		
AF	Antenna Factor	Corr.	Calculated Field Strength		
CL	Cable Loss	Limit	Field Strength Limit		

f MHz	Dist (m)	Read dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Pad dB	Corr. dBuV/m	Limit dBuV/m	Margin dB	Ant. Pol. V/H	Det. P/A/QP	Ant. High cm	Table Angle Degree	Notes
Horizontal: EUT in Worst-Case Orientation (Y-Position)															
167.417	3.0	44.6	10.3	1.2	29.3	0.0	0.0	26.9	43.5	-16.7	H	P			
254.717	3.0	52.3	11.9	1.4	28.8	0.0	0.0	36.9	46.0	-9.1	H	P			
262.8	3.0	49.4	12.2	1.5	28.8	0.0	0.0	34.2	46.0	-11.8	H	P			
288.667	3.0	42.3	12.9	1.6	28.8	0.0	0.0	28.0	46.0	-18.0	H	P			
335.55	3.0	40.4	13.9	1.7	29.0	0.0	0.0	27.0	46.0	-19.0	H	P			
351.717	3.0	40.7	14.2	1.8	29.1	0.0	0.0	27.5	46.0	-18.5	H	P			
Vertical: EUT in Worst-Case Orientation (Y-Position)															
33.233	3.0	32.5	18.9	0.5	29.7	0.0	0.0	22.2	40.0	-17.8	V	P			
62.333	3.0	40.9	7.9	0.7	29.6	0.0	0.0	19.9	40.0	-20.1	V	P			
84.967	3.0	43.0	7.5	0.8	29.6	0.0	0.0	21.8	40.0	-18.2	V	P			
94.667	3.0	44.4	8.7	0.9	29.5	0.0	0.0	24.4	43.5	-19.1	V	P			
211.067	3.0	39.6	12.0	1.3	28.9	0.0	0.0	24.0	43.5	-19.5	V	P			
287.05	3.0	37.7	12.9	1.5	28.8	0.0	0.0	23.3	46.0	-22.7	V	P			

Rev. 1.27.09

Note: No other emissions were detected above the system noise floor.

9. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 7.2.2

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 [*]	56 to 46 [*]
0.5-5	56	46
5-30	60	50

^{*} Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.


The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.


RESULTS

6 WORST EMISSIONS

CONDUCTED EMISSIONS DATA (115VAC 60Hz)									
Freq.	Reading			Closs	Limit		Margin		Remark
(MHz)	PK (dBuV)	QP (dBuV)	AV (dBuV)	(dB)	QP	AV	QP (dB)	AV (dB)	L1 / L2
0.61	53.77	--	35.04	0.00	56.00	46.00	-2.23	-10.96	L1
0.65	54.79	--	40.40	0.00	56.00	46.00	-1.21	-5.60	L1
0.69	54.49	--	29.03	0.00	56.00	46.00	-1.51	-16.97	L1
0.61	54.43	--	35.86	0.00	56.00	46.00	-1.57	-10.14	L2
0.66	54.50	--	34.18	0.00	56.00	46.00	-1.50	-11.82	L2
0.72	53.35	--	37.96	0.00	56.00	46.00	-2.65	-8.04	L2
6 Worst Data									

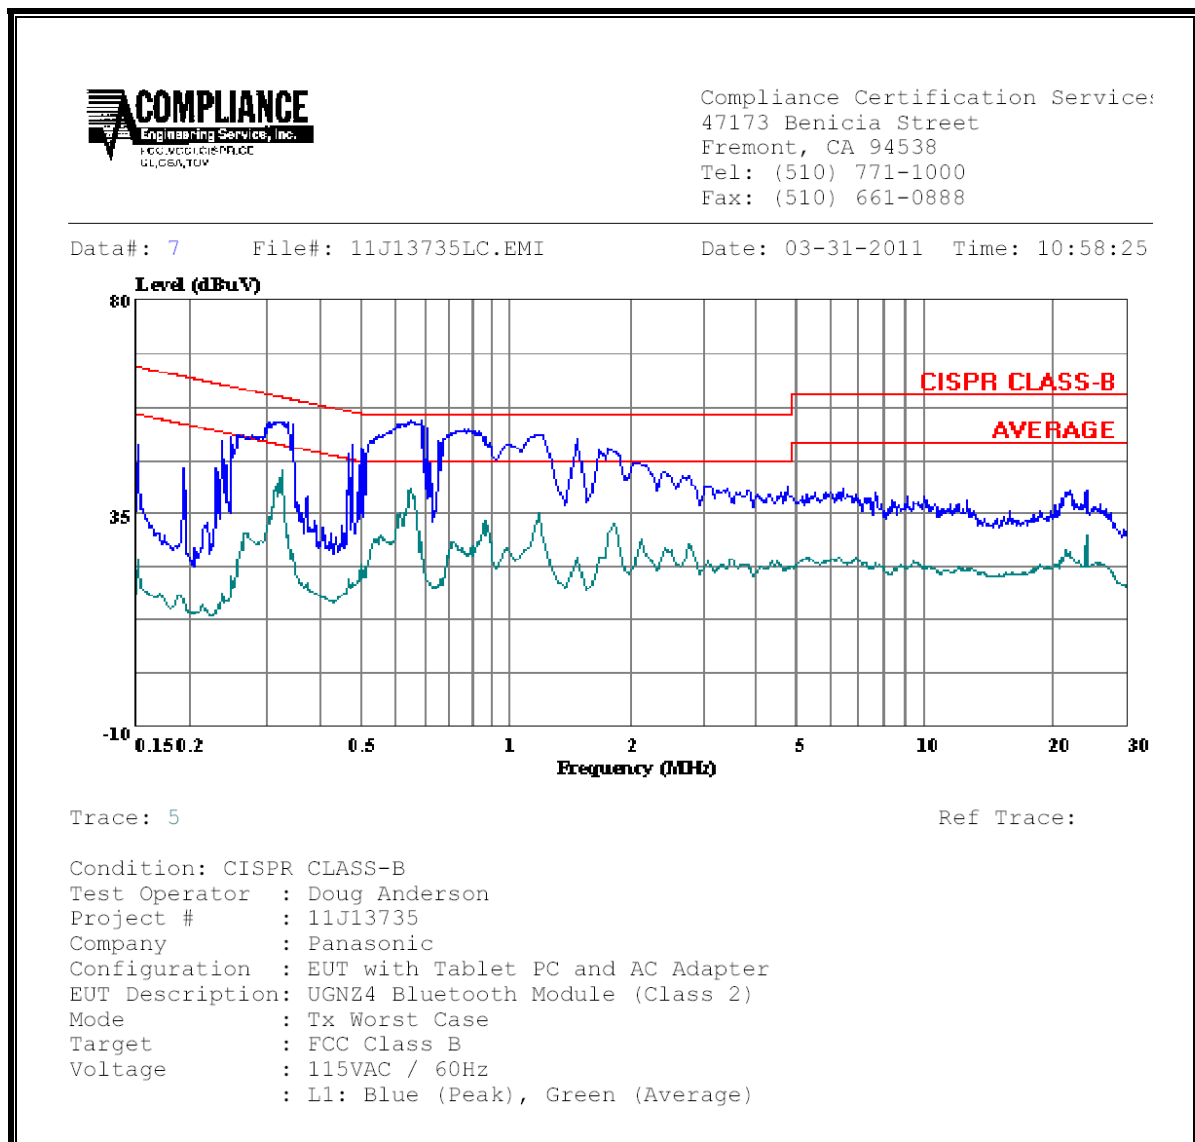

LINE 2 RESULTS

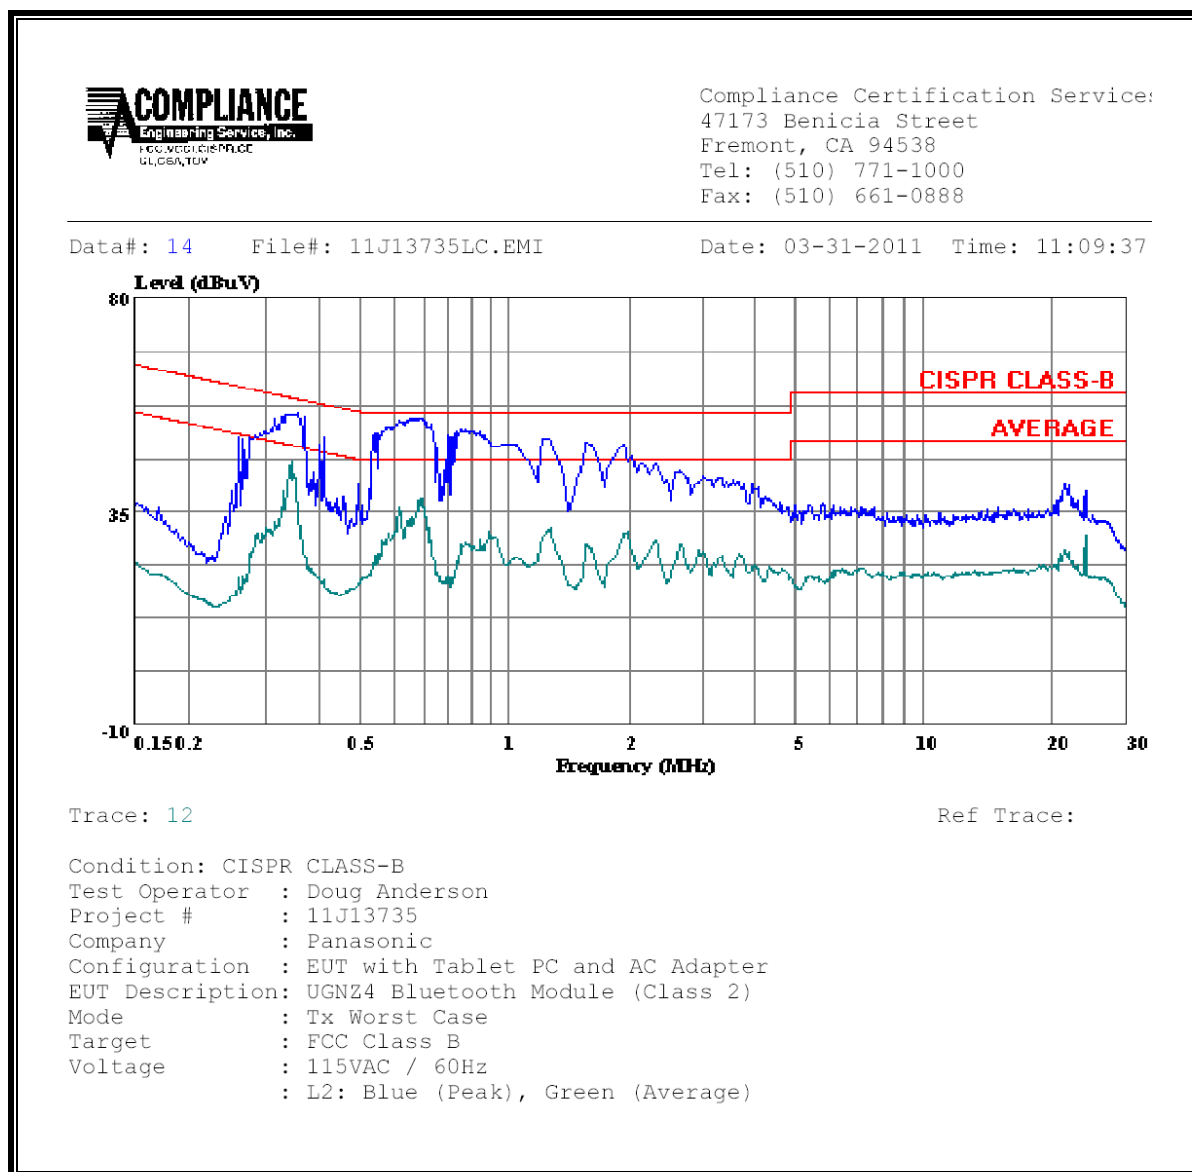

10. MAXIMUM PERMISSIBLE EXPOSURE

FCC RULES

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0	614	1.63	*(100)	6
3.0–30	1842/f	4.89/f	*(900/f ²)	6
30–300	61.4	0.163	1.0	6
300–1500			f/300	6
1500–100,000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
30–300	27.5	0.073	0.2	30
300–1500			f/1500	30
1500–100,000			1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

IC RULES

IC Safety Code 6, Section 2.2.1 (a) A person other than an RF and microwave exposed worker shall not be exposed to electromagnetic radiation in a frequency band listed in Column 1 of Table 5, if the field strength exceeds the value given in Column 2 or 3 of Table 5, when averaged spatially and over time, or if the power density exceeds the value given in Column 4 of Table 5, when averaged spatially and over time.

Table 5
Exposure Limits for Persons Not Classified As RF and Microwave Exposed Workers (Including the General Public)

1 Frequency (MHz)	2 Electric Field Strength; rms (V/m)	3 Magnetic Field Strength; rms (A/m)	4 Power Density (W/m ²)	5 Averaging Time (min)
0.003–1	280	2.19		6
1–10	$280/f$	$2.19/f$		6
10–30	28	$2.19/f$		6
30–300	28	0.073	2*	6
300–1 500	$1.585f^{0.5}$	$0.0042f^{0.5}$	$f/150$	6
1 500–15 000	61.4	0.163	10	6
15 000–150 000	61.4	0.163	10	$616\,000/f^{1.2}$
150 000–300 000	$0.158f^{0.5}$	$4.21 \times 10^{-4}f^{0.5}$	$6.67 \times 10^{-5}f$	$616\,000/f^{1.2}$

* Power density limit is applicable at frequencies greater than 100 MHz.

Notes: 1. Frequency, f , is in MHz.
2. A power density of 10 W/m^2 is equivalent to 1 mW/cm^2 .
3. A magnetic field strength of 1 A/m corresponds to $1.257\text{ microtesla } (\mu\text{T})$ or $12.57\text{ milligauss (mG)}$.

EQUATIONS

Power density is given by:

$$S = \text{EIRP} / (4 * \pi * D^2)$$

where

S = Power density in W/m²

EIRP = Equivalent Isotropic Radiated Power in W

D = Separation distance in m

Power density in units of W/m² is converted to units of mW/cm² by dividing by 10.

Distance is given by:

$$D = \text{SQRT} (\text{EIRP} / (4 * \pi * S))$$

where

D = Separation distance in m

EIRP = Equivalent Isotropic Radiated Power in W

S = Power density in W/m²

For multiple colocated transmitters operating simultaneously in frequency bands where the limit is identical, the total power density is calculated using the total EIRP obtained by summing the Power * Gain product (in linear units) of each transmitter.

$$\text{Total EIRP} = (P_1 * G_1) + (P_2 * G_2) + \dots + (P_n * G_n)$$

where

P_x = Power of transmitter x

G_x = Numeric gain of antenna x

In the table(s) below, Power and Gain are entered in units of dBm and dBi respectively and conversions to linear forms are used for the calculations.

LIMITS

From FCC §1.1310 Table 1 (B), the maximum value of S = 1.0 mW/cm²

From IC Safety Code 6, Section 2.2 Table 5 Column 4, S = 10 W/m²


RESULTS

(MPE distance equals 20 cm)


Band	Mode	Separation Distance (m)	Output AV Power (dBm)	Antenna Gain (dBi)	IC Power Density (W/m^2)	FCC Power Density (mW/cm^2)
2.4 GHz	Bluetooth	0.20	1.06	1.34	0.0035	0.0003

11. SETUP PHOTOS

ANTENNA PORT CONDUCTED RF MEASUREMENT SETUP

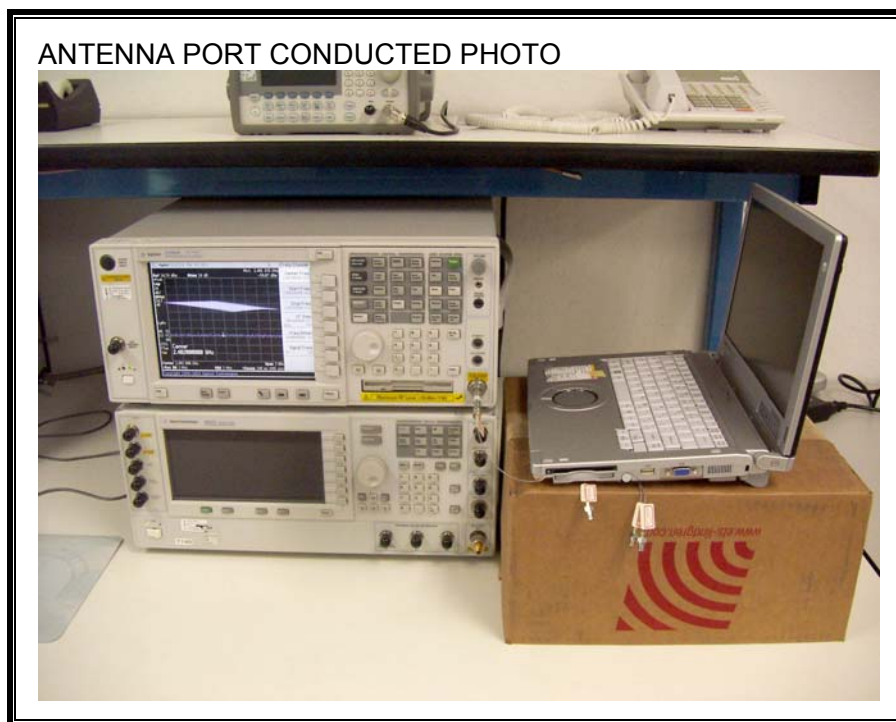


RADIATED RF MEASUREMENT SETUP FOR PORTABLE CONFIGURATION

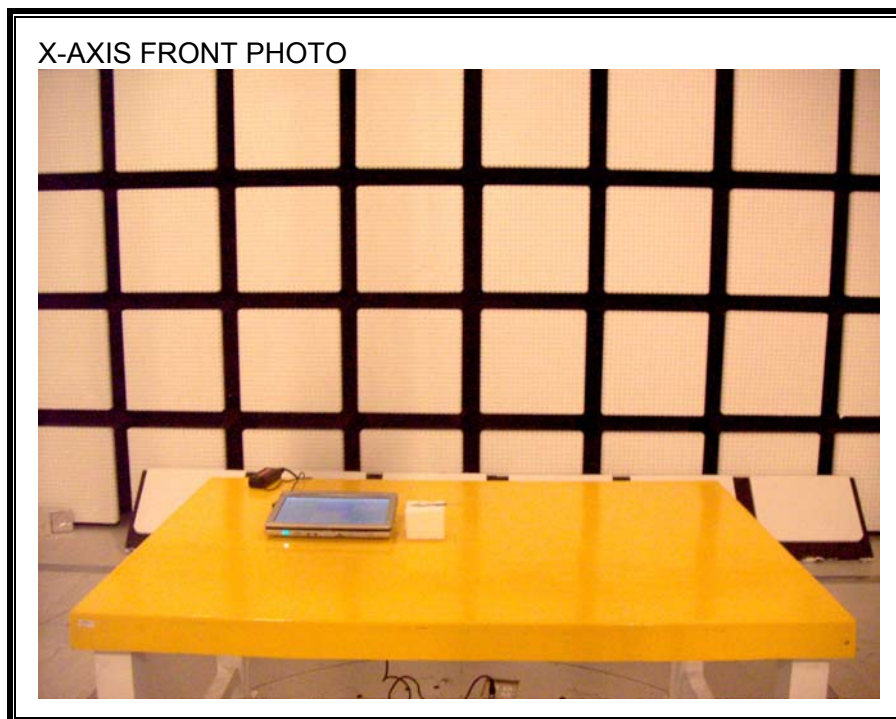


X-AXIS BACK PHOTO



Y-AXIS FRONT PHOTO

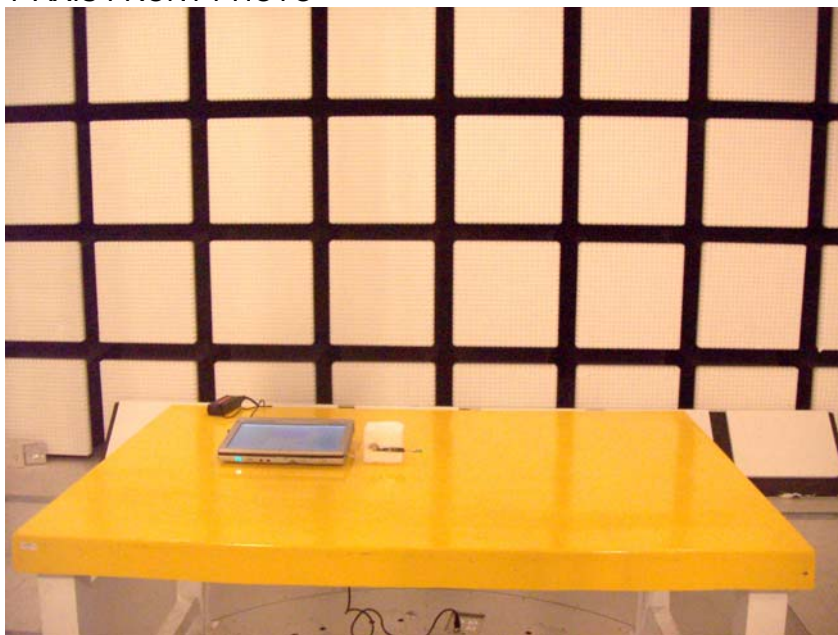


Y-AXIS BACK PHOTO

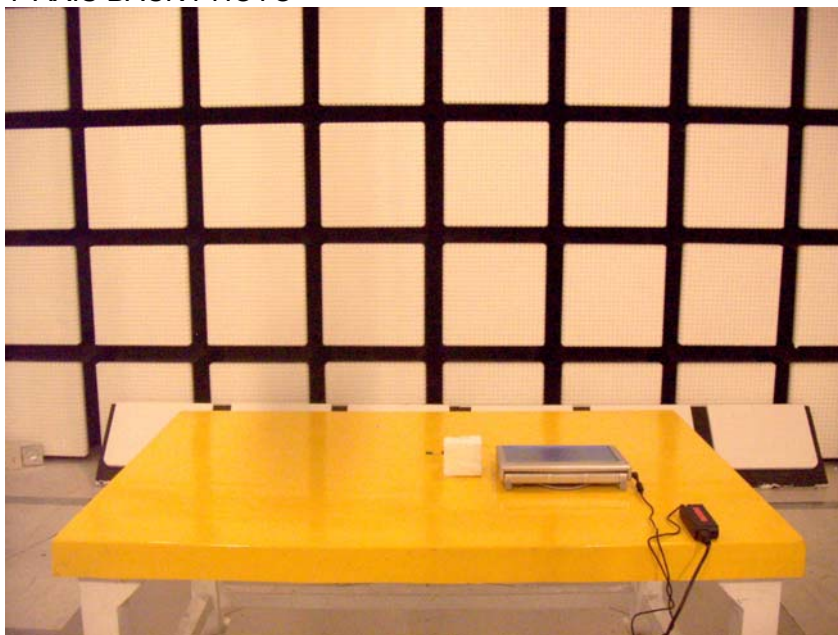


Z-AXIS FRONT PHOTO



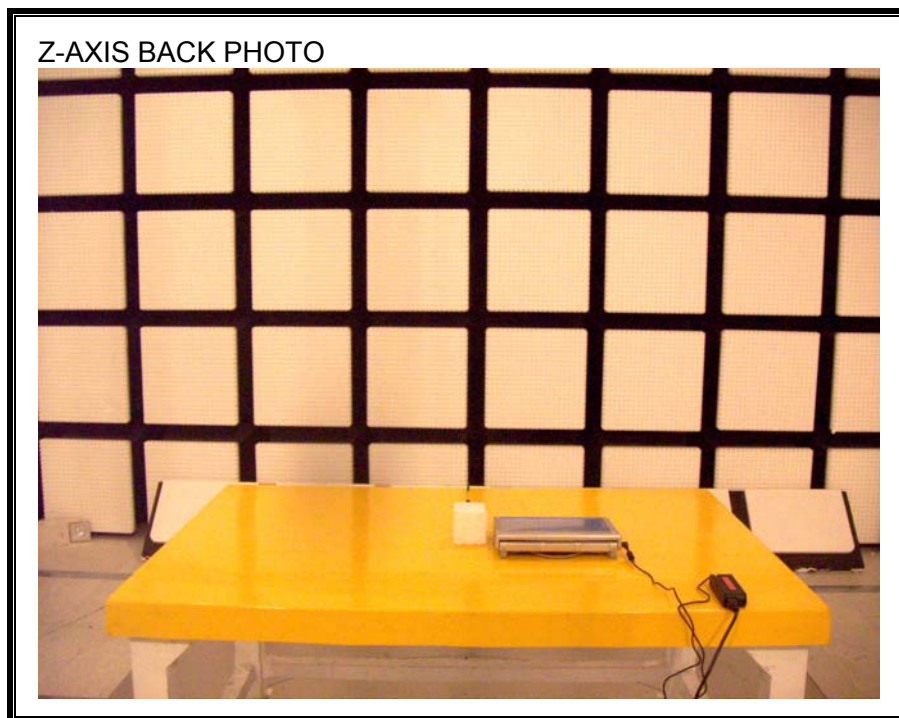

POWERLINE CONDUCTED EMISSIONS MEASUREMENT SETUP

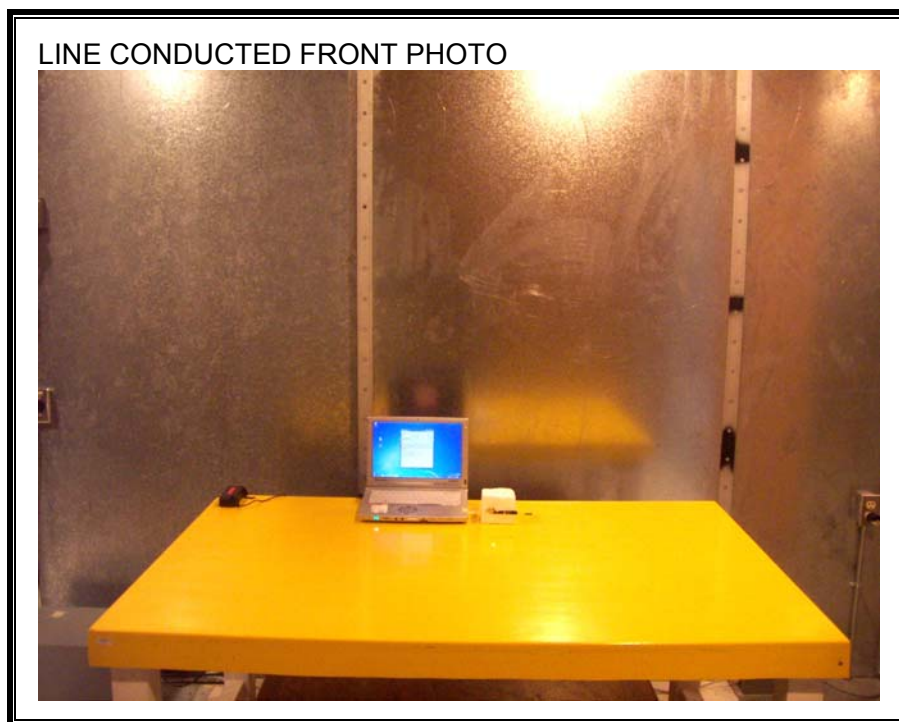

LINE CONDUCTED BACK PHOTO



END OF REPORT