



# PCTEST ENGINEERING LABORATORY, INC.

6660-B Dobbin Road, Columbia, MD 21045 USA

Tel. 410.290.6652 / Fax 410.290.6554

<http://www.pctestlab.com>



## CERTIFICATE OF COMPLIANCE (SAR EVALUATION)

**Applicant Name:**

Panasonic Corporation of North America  
One Panasonic Way, 4B-8  
Secaucus, NJ 07094  
United States

**Date of Testing:**

12/19/09 - 01/07/10

**Test Site/Location:**

PCTEST Lab, Columbia, MD, USA

**Test Report Serial No.:**

0912152262.ACJ

**FCC ID:**

ACJ9TGCF-311

**APPLICANT:**

PANASONIC CORPORATION OF NORTH AMERICA

**EUT Type:**

Notebook PC with WLAN abgn, WWAN and Bluetooth

**Application Type:**

Certification

**FCC Rule Part(s):**

CFR §2.1093; FCC/OET Bulletin 65 Supplement C [July 2001]

**FCC Classification:**

FCC Part 15 Frequency Hopping Spread Spectrum Transceiver (DSS)  
Unlicensed Transmitter National Infrastructure (UNII)  
PCS Licensed Transmitter( PCB)  
Digital Transmission System (DTS)

**Model(s):**

CF-31mk1

**Tx Frequencies Evaluated:**

2412 - 2462 MHz (WLAN)  
5180 - 5825 MHz (WLAN)  
2402 - 2480 MHz Bluetooth

**Conducted Power:**

14.22 dBm WLAN 2.4 GHz  
13.86 dBm WLAN 5.2 GHz  
13.39 dBm WLAN 5.3 GHz  
14.05 dBm WLAN 5.5 GHz  
12.92 dBm WLAN 5.8 GHz  
13.67 dBm Bluetooth

**Max. Body SAR****Measurement:**

0.047 W/kg WLAN 802.11bgn 2.4 GHz  
0.287 W/kg WLAN 802.11an 5.2 GHz  
0.222 W/kg WLAN 802.11an 5.3 GHz  
0.259 W/kg WLAN 802.11an 5.5 GHz  
0.190 W/kg WLAN 802.11an 5.8 GHz

**Test Device Serial No.:**

Pre-Production [S/N: 116]

This wireless portable device has been shown to be capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in ANSI/IEEE C95.1-1992 and has been tested in accordance with the measurement procedures specified in FCC/OET Bulletin 65 Supplement C (2001), IEEE 1528-2003 and in applicable Industry Canada Radio Standards Specifications (RSS); for North American frequency bands only.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them. Test results reported herein relate only to the item(s) tested.

PCTEST certifies that no party to this application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 862.

  
Randy Ortanez  
President



|                                    |                                                                                     |                                                                    |                                                                                       |                                        |
|------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> ACJ9TGCF-311        |  | <b>CERTIFICATION REPORT</b>                                        |  | <b>Reviewed by:</b><br>Quality Manager |
| <b>Filename:</b><br>0912152262.ACJ | <b>Test Dates:</b><br>12/19/09 - 01/07/10                                           | <b>EUT Type:</b><br>Notebook PC with WLAN abgn, WWAN and Bluetooth |                                                                                       | Page 1 of 27                           |

# T A B L E O F C O N T E N T S

---

|    |                                               |    |
|----|-----------------------------------------------|----|
| 1  | INTRODUCTION .....                            | 3  |
| 2  | TEST SITE LOCATION .....                      | 4  |
| 3  | SAR MEASUREMENT SETUP .....                   | 5  |
| 4  | DASY E-FIELD PROBE SYSTEM .....               | 7  |
| 5  | PROBE CALIBRATION PROCESS .....               | 8  |
| 6  | PHANTOM AND EQUIVALENT TISSUES.....           | 9  |
| 7  | DOSIMETRIC ASSESSMENT & PHANTOM SPECS.....    | 10 |
| 8  | MULTIPLE ANTENNA & SEPARATION DISTANCES ..... | 13 |
| 9  | ANSI/IEEE C95.1-1992 RF EXPOSURE LIMITS.....  | 15 |
| 10 | MEASUREMENT UNCERTAINTIES .....               | 16 |
| 11 | SYSTEM VERIFICATION.....                      | 17 |
| 12 | SAR DATA SUMMARY .....                        | 19 |
| 13 | EQUIPMENT LIST.....                           | 24 |
| 14 | CONCLUSION.....                               | 25 |
| 15 | REFERENCES .....                              | 26 |

|                                    |                                                                                     |                                                                    |                                                                                       |                                        |
|------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> ACJ9TGCF-311        |  | <b>CERTIFICATION REPORT</b>                                        |  | <b>Reviewed by:</b><br>Quality Manager |
| <b>Filename:</b><br>0912152262.ACJ | <b>Test Dates:</b><br>12/19/09 - 01/07/10                                           | <b>EUT Type:</b><br>Notebook PC with WLAN abgn, WWAN and Bluetooth |                                                                                       | Page 2 of 27                           |

# 1 INTRODUCTION

The FCC has adopted the guidelines for evaluating the environmental effects of radio frequency (RF) radiation in ET Docket 93-62 on Aug. 6, 1996 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices.[1]

The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in IEEE/ANSI C95.1-1992 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz[2] and Health Canada RF Exposure Guidelines Safety Code 6 [26]. The measurement procedure described in IEEE/ANSI C95.3-2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave [3] is used for guidance in measuring the Specific Absorption Rate (SAR) due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the International Committee for Non-Ionizing Radiation Protection (ICNIRP) in Biological Effects and Exposure Criteria for Radiofrequency Electromagnetic Fields," Report No. Vol 74. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

## 1.1 SAR Definition

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Fig. 1-1).

$$SAR = \frac{d}{dt} \left( \frac{dU}{dm} \right) = \frac{d}{dt} \left( \frac{dU}{\rho dV} \right)$$

Figure 1-1  
SAR Mathematical Equation

SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

where:

- σ = conductivity of the tissue-simulating material (S/m)
- ρ = mass density of the tissue-simulating material (kg/m<sup>3</sup>)
- E = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relation to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.[6]


|                             |                                                                                                                                   |                                                             |                                                                                       |                                 |
|-----------------------------|-----------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ACJ9TGCF-311        |  <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | CERTIFICATION REPORT                                        |  | Reviewed by:<br>Quality Manager |
| Filename:<br>0912152262.ACJ | Test Dates:<br>12/19/09 - 01/07/10                                                                                                | EUT Type:<br>Notebook PC with WLAN abgn, WWAN and Bluetooth |                                                                                       | Page 3 of 27                    |

## 2 TEST SITE LOCATION

### 2.1 INTRODUCTION

The map at the right shows the location of the PCTEST LABORATORY in Columbia, Maryland. It is in proximity to the FCC Laboratory, the Baltimore-Washington International (BWI) airport, the city of Baltimore and Washington, DC (See Figure 2).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility in New Concept Business Park, Guilford Industrial Park, Columbia, Maryland. The site address is 6660-B Dobbin Road, Columbia, MD 21045. The test site is one of the highest points in the Columbia area with an elevation of 390 feet above mean sea level. The site coordinates are 39° 11'15" N latitude and 76° 49' 38" W longitude. The facility is 1.5 miles north of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. There are no FM or TV transmitters within 15 miles of the site. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4 on January 27, 2006 and Industry Canada.

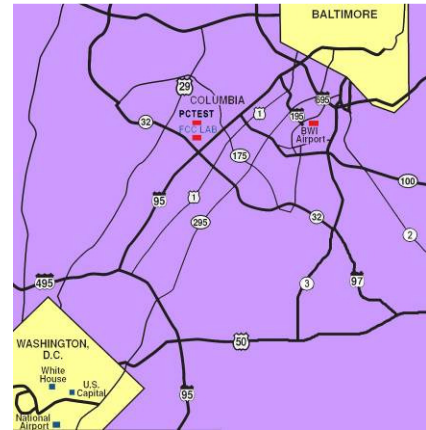

## 3 SAR MEASUREMENT SETUP


### 3.1 Robotic System

Measurements are performed using the DASY4 automated dosimetric assessment system. The DASY4 is made by Schmid & Partner Engineering AG (SPEAG) in Zurich, Switzerland and consists of high precision robotics system (Staubli), robot controller, Pentium 4 computer, near-field probe, probe alignment sensor, and the generic twin phantom containing the brain equivalent material. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF) (see Figure 3-1).

### 3.2 System Hardware

A cell controller system contains the power supply, robot controller, teach pendant (Joystick), and a remote control used to drive the robot motors. The PC consists of the Gateway Pentium 4 2.53 GHz computer with Windows XP system and SAR Measurement Software DASY4, A/D interface card, monitor, mouse, and keyboard. The Staubli Robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit that performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card.

### 3.3 System Electronics

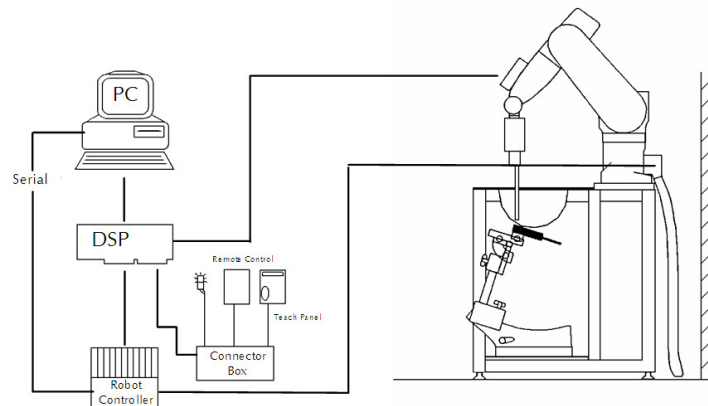

**Figure 3-1**  
**SAR Measurement System Setup**

The DAE4 consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer. The system is described in detail in [7].

|                                    |                                                                                     |                                                                    |                                                                                       |                                        |
|------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> ACJ9TGCF-311        |  | <b>CERTIFICATION REPORT</b>                                        |  | <b>Reviewed by:</b><br>Quality Manager |
| <b>Filename:</b><br>0912152262.ACJ | <b>Test Dates:</b><br>12/19/09 - 01/07/10                                           | <b>EUT Type:</b><br>Notebook PC with WLAN abgn, WWAN and Bluetooth |                                                                                       | Page 5 of 27                           |

### 3.4 Automated Test System Specifications

#### Positioner

Robot: Stäubli Unimation Corp. Robot RX60L  
Repeatability: 0.02 mm  
No. of Axes: 6

#### Data Acquisition Electronic System (DAE)

##### Cell Controller

Processor: Pentium 4  
Clock Speed: 2.53 GHz  
Operating System: Windows XP Professional

##### Data Converter

Features: Signal Amplifier, multiplexer, A/D converter & control logic  
Software: DASY4, SEMCAD software  
Connecting Lines: Optical Downlink for data and status info  
Optical upload for commands and clock

#### PC Interface Card

Function: 166MHz low power Pentium MMX 32MB chipdisk  
Link to DAE  
16-bit A/D converter for surface detection system  
Two Serial & Ethernet link to robotics  
Direct emergency stop output for robot

#### Phantom

Type: SAM Twin Phantom (V4.0)  
Shell Material: Composite  
Thickness:  $2.0 \pm 0.2$  mm



**Figure 3-2**  
**DASY4 SAR Measurement System**

|                                    |                                                                                     |                                                                    |                                                                                       |                                        |
|------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> ACJ9TGCF-311        |  | <b>CERTIFICATION REPORT</b>                                        |  | <b>Reviewed by:</b><br>Quality Manager |
| <b>Filename:</b><br>0912152262.ACJ | <b>Test Dates:</b><br>12/19/09 - 01/07/10                                           | <b>EUT Type:</b><br>Notebook PC with WLAN abgn, WWAN and Bluetooth |                                                                                       | Page 6 of 27                           |

### 4.1 Probe Measurement System



Figure 4-1  
SAR System

The SAR measurements were conducted with the dosimetric probe EX3DV4, designed in the classical triangular configuration [7] (see Figure 4-3) and optimized for dosimetric evaluation. The probe is constructed using the thick film technique; with printed resistive lines on ceramic substrates. The probe is equipped with an optical multi-fiber line ending at the front of the probe tip. It is connected to the EOC box on the robot arm and provides an automatic detection of the phantom surface. Half of the fibers are connected to a pulsed infrared transmitter, the other half to a synchronized receiver. As the probe approaches the surface, the reflection from the surface produces a coupling from the transmitting to the receiving fibers. This reflection increases first during the approach, reaches maximum and then decreases. If the probe is flatly touching the surface, the coupling is zero. The distance of the coupling maximum to the surface is independent of the surface reflectivity and largely independent of the surface to probe angle. The DASY4 software reads the reflection during a software approach and looks for the maximum using a 2nd order fitting (see Figure 5-1). The approach is stopped at reaching the maximum.

### 4.2 Probe Specifications

|                          |                                                                                                   |
|--------------------------|---------------------------------------------------------------------------------------------------|
| <b>Model:</b>            | ES3DV3, EX3DV4                                                                                    |
| <b>Frequency Range:</b>  | 10 MHz – 6.0 GHz (EX3DV4)<br>10 MHz – 4 GHz (ES3DV3)                                              |
| <b>Calibration:</b>      | In brain and muscle simulating tissue at<br>Frequencies from 835 up to 5800MHz                    |
| <b>Linearity:</b>        | $\pm 0.2$ dB (30 MHz to 6 GHz) for EX3DV4<br>$\pm 0.2$ dB (30 MHz to 4 GHz) for ES3DV3            |
| <b>Dynamic Range:</b>    | 10 mW/kg – 100 W/kg                                                                               |
| <b>Probe Length:</b>     | 330 mm                                                                                            |
| <b>Probe Tip Length:</b> | 20 mm                                                                                             |
| <b>Body Diameter:</b>    | 12 mm                                                                                             |
| <b>Tip Diameter:</b>     | 2.5 mm (3.9mm for ES3DV3)                                                                         |
| <b>Tip-Center:</b>       | 1 mm (2.0 mm for ES3DV3)                                                                          |
| <b>Application:</b>      | SAR Dosimetry Testing<br>Compliance tests of mobile phones<br>Dosimetry in strong gradient fields |



Figure 4-2  
Near-Field Probe



Figure 4-3  
Triangular Probe Configuration

|                                    |                                                                                     |                                                                    |                                                                                       |                                        |
|------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> ACJ9TGCF-311        |  | <b>CERTIFICATION REPORT</b>                                        |  | <b>Reviewed by:</b><br>Quality Manager |
| <b>Filename:</b><br>0912152262.ACJ | <b>Test Dates:</b><br>12/19/09 - 01/07/10                                           | <b>EUT Type:</b><br>Notebook PC with WLAN abgn, WWAN and Bluetooth |                                                                                       | Page 7 of 27                           |



## 5

## PROBE CALIBRATION PROCESS

### 5.1 Dosimetric Assessment Procedure

Each E-Probe/Probe amplifier combination has unique calibration parameters. A TEM cell calibration procedure is conducted to determine the proper amplifier settings to enter in the probe parameters. The amplifier settings are determined for a given frequency by subjecting the probe to a known E-field density (1 mW/cm<sup>2</sup>) using an RF Signal generator, TEM cell, and RF Power Meter.

### 5.2 Free Space Assessment

The free space E-field from amplified probe outputs is determined in a test chamber. This calibration can be performed in a TEM cell if the frequency is below 1 GHz and in a waveguide or other methodologies above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is rotated 360 degrees until the three channels show the maximum reading. The power density readings equates to 1 mW/cm<sup>2</sup>.

### 5.3 Temperature Assessment

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The E-field in the medium correlates with the temperature rise in the dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$SAR = C \frac{\Delta T}{\Delta t}$$

where:

$\Delta t$  = exposure time (30 seconds),

$C$  = heat capacity of tissue (brain or muscle),

$\Delta T$  = temperature increase due to RF exposure.

$$SAR = \frac{|E|^2 \cdot \sigma}{\rho}$$

where:

$\sigma$  = simulated tissue conductivity,

$\rho$  = Tissue density (1.25 g/cm<sup>3</sup> for brain tissue)

SAR is proportional to  $\Delta T/\Delta t$ , the initial rate of tissue heating, before thermal diffusion takes place. Now it's possible to quantify the electric field in the simulated tissue by equating the thermally derived SAR to the E-field;




Figure 5-1 E-Field and Temperature measurements at 900MHz [7]

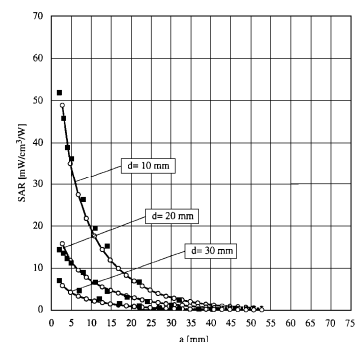


Figure 5-2 E-Field and temperature measurements at 1.9GHz [7]

|                             |                                                                                                                            |                                                             |                                                                                       |                                 |
|-----------------------------|----------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ACJ9TGCF-311        |  PCTEST<br>ENGINEERING LABORATORY, INC. | CERTIFICATION REPORT                                        |  | Reviewed by:<br>Quality Manager |
| Filename:<br>0912152262.ACJ | Test Dates:<br>12/19/09 - 01/07/10                                                                                         | EUT Type:<br>Notebook PC with WLAN abgn, WWAN and Bluetooth |                                                                                       | Page 8 of 27                    |



## 6 PHANTOM AND EQUIVALENT TISSUES


### 6.1 SAM Phantoms



**Figure 6-1**  
**SAM Phantoms**

The SAM Twin Phantom V4.0 is constructed of a fiberglass shell integrated in a wooden table. The shape of the shell is based on data from an anatomical study designed to determine the maximum exposure in at least 90% of all users [11][12]. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot. (see Fig. 5.1)

### 6.2 Brain & Muscle Simulating Mixture Characterization

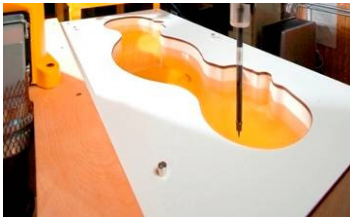

**Figure 6-2**  
**Head Simulated**

The brain and muscle mixtures consist of a viscous gel using hydroxethylcellulose (HEC) gelling agent and saline solution (see Table 6-1). Preservation with a bactericide is added and visual inspection is made to make sure air bubbles are not trapped during the mixing process. The mixture is calibrated to obtain proper dielectric constant (permittivity) and conductivity of the desired tissue. The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 have been incorporated in the following table. Other head and body tissue parameters that have not been specified in IEEE-1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations. The mixture characterizations used for the brain and muscle tissue simulating liquids are according to the data by C. Gabriel and G. Hartsgrrove [13]. (See Table 6-1)

**Table 6-1**  
**Composition of the Brain & Muscle Tissue Equivalent Matter**

| Frequency (MHz)                                                                                                                                                                                 | 300   |       |       | 450   |       |       | 835   |       |       | 900   |       |       | 1450  |       |       | 1800  |       |       | 1900  |       |       | 1950 |  |  | 2000 |  |  | 2100 |  |  | 2450 |  |  | 3000 |  |  |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|------|--|--|------|--|--|------|--|--|------|--|--|------|--|--|
| Recipe #                                                                                                                                                                                        | 1     | 1     | 3     | 1     | 1     | 2     | 3     | 1     | 1     | 2     | 2     | 3     | 1     | 2     | 4     | 1     | 1     | 2     | 2     | 3     | 2     |      |  |  |      |  |  |      |  |  |      |  |  |      |  |  |
| Ingredient: (% by weight)                                                                                                                                                                       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |      |  |  |      |  |  |      |  |  |      |  |  |      |  |  |
| 1,2-Propanediol                                                                                                                                                                                 |       |       |       |       |       |       | 64.81 |       |       |       |       |       |       |       |       |       |       |       |       |       |       |      |  |  |      |  |  |      |  |  |      |  |  |      |  |  |
| Bactericide                                                                                                                                                                                     | 0.19  | 0.19  | 0.50  | 0.10  | 0.10  |       | 0.50  |       |       |       |       |       | 0.50  |       |       |       |       |       |       |       | 0.50  |      |  |  |      |  |  |      |  |  |      |  |  |      |  |  |
| Diacetin                                                                                                                                                                                        |       |       | 45.90 |       |       |       | 49.20 |       |       |       |       |       | 49.43 |       |       |       |       |       |       |       | 46.75 |      |  |  |      |  |  |      |  |  |      |  |  |      |  |  |
| DGSE                                                                                                                                                                                            |       |       |       |       |       |       |       | 45.41 | 47.00 | 13.84 | 44.92 |       | 44.94 | 13.84 | 45.00 | 50.00 | 50.00 | 7.99  | 7.99  |       | 7.99  |      |  |  |      |  |  |      |  |  |      |  |  |      |  |  |
| HEC                                                                                                                                                                                             | 0.98  | 0.98  |       | 1.00  | 1.00  |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |      |  |  |      |  |  |      |  |  |      |  |  |      |  |  |
| NaCl                                                                                                                                                                                            | 5.95  | 3.95  | 1.70  | 1.45  | 1.48  | 0.79  | 1.10  | 0.67  | 0.36  | 0.35  | 0.18  | 0.64  | 0.18  | 0.35  |       |       |       | 0.16  | 0.16  |       | 0.16  |      |  |  |      |  |  |      |  |  |      |  |  |      |  |  |
| Sucrose                                                                                                                                                                                         | 55.32 | 56.32 |       | 57.00 | 56.50 |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |      |  |  |      |  |  |      |  |  |      |  |  |      |  |  |
| Triton X-100                                                                                                                                                                                    |       |       |       |       |       |       |       |       |       | 30.45 |       |       |       | 30.45 |       |       |       | 19.97 | 19.97 |       | 19.97 |      |  |  |      |  |  |      |  |  |      |  |  |      |  |  |
| Water                                                                                                                                                                                           | 37.56 | 38.56 | 48.90 | 40.45 | 40.92 | 34.40 | 49.20 | 53.80 | 52.64 | 55.36 | 54.90 | 49.43 | 54.90 | 55.36 | 55.00 | 50.00 | 50.00 | 71.88 | 71.88 | 49.75 | 71.88 |      |  |  |      |  |  |      |  |  |      |  |  |      |  |  |
| Measured dielectric parameters:                                                                                                                                                                 |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |      |  |  |      |  |  |      |  |  |      |  |  |      |  |  |
| $\epsilon_r'$                                                                                                                                                                                   | 46.00 | 43.4  | 44.3  | 41.6  | 41.2  | 41.8  | 42.7  | 40.9  | 39.3  | 41    | 40.4  | 39.2  | 39.9  | 41    | 40.1  | 37    | 36.8  | 41.1  | 40.3  | 39.2  | 37.9  |      |  |  |      |  |  |      |  |  |      |  |  |      |  |  |
| $\sigma$ (S/m)                                                                                                                                                                                  | 0.86  | 0.85  | 0.9   | 0.9   | 0.98  | 0.97  | 0.99  | 1.21  | 1.39  | 1.38  | 1.4   | 1.4   | 1.42  | 1.38  | 1.41  | 1.4   | 1.51  | 1.55  | 1.88  | 1.82  | 2.46  |      |  |  |      |  |  |      |  |  |      |  |  |      |  |  |
| Temp. (°C)                                                                                                                                                                                      | 22    | 22    | 20    | 22    | 22    | 22    | 20    | 22    | 22    | 21    | 22    | 20    | 21    | 21    | 20    | 22    | 22    | 20    | 20    | 20    | 20    |      |  |  |      |  |  |      |  |  |      |  |  |      |  |  |
| Target dielectric parameters: (Table 2)                                                                                                                                                         |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |      |  |  |      |  |  |      |  |  |      |  |  |      |  |  |
| $\epsilon_r'$                                                                                                                                                                                   | 45.30 | 43.50 | 41.5  |       | 41.50 |       | 40.5  |       |       |       | 40.0  |       |       |       |       | 39.80 |       | 39.2  |       | 38.1  |       |      |  |  |      |  |  |      |  |  |      |  |  |      |  |  |
| $\sigma$ (S/m)                                                                                                                                                                                  | 0.87  | 0.87  | 0.9   |       | 0.97  |       | 1.2   |       |       |       | 1.4   |       |       |       |       | 1.49  |       | 1.8   |       | 2.4   |       |      |  |  |      |  |  |      |  |  |      |  |  |      |  |  |
| NOTE—Multiple columns for any single frequency are optional recipes. Recipe R, reference: 1 (Kashi et al. [B85]), 2 (Vignola [B143]), 3 (Feynman and Gabriel [B119]), 4 (Fidanza et al. [B50]). |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |      |  |  |      |  |  |      |  |  |      |  |  |      |  |  |

NOTE—Multiple columns for any single frequency are optional recipes. Recipe # reference: 1 (Kanda et al. [B85]), 2 (Vignone [B143]), 3 (Feynman and Gabriel [B119]), 4 (Fukunaga et al. [B50]).


\*The formulas containing Triton X-100 and corresponding measured parameters are under review and verification.

|                             |                                    |                                                             |  |                                 |
|-----------------------------|------------------------------------|-------------------------------------------------------------|--|---------------------------------|
| FCC ID: ACJ9TGCF-311        |                                    | CERTIFICATION REPORT                                        |  | Reviewed by:<br>Quality Manager |
| Filename:<br>0912152262.ACJ | Test Dates:<br>12/19/09 - 01/07/10 | EUT Type:<br>Notebook PC with WLAN abgn, WWAN and Bluetooth |  | Page 9 of 27                    |

### 7.1 Measurement Procedure

The evaluation was performed using the following procedure:

1. The SAR measurement was taken at a selected spatial reference point to monitor power variations during testing. This fixed point was measured and used as a reference value.
2. The SAR distribution at the exposed side of the phantom was measured at a distance of 3.0mm from the inner surface of the shell. The horizontal grid spacing was 15mm x 15mm.
3. Based on the area scan data, the area of the maximum absorption was determined by spline interpolation. Around this point, a volume of 32mm x 32mm x 30mm (fine resolution volume scan, zoom scan) was assessed by measuring 5 x 5 x 7 points. On this basis of this data set, the spatial peak SAR value was evaluated with the following procedure (see Figure 7-1):
  - a. The data at the surface was extrapolated since the center of the dipoles is 2.7mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.2mm. The extrapolation was based on a least square algorithm [15]. A polynomial of the fourth order was calculated through the points in the z-axis. This polynomial was then used to evaluate the points between the surface and the probe tip.
  - b. The maximum interpolated value was found with a software algorithm. Around this maximum, the SAR values averaged over the spatial volumes (1g or 10g) were computed using 3D-Spline interpolation. The 3D-spline is composed of three one-dimensional splines with the "Not a knot" condition (in x, y, and z directions) [15][16]. The volume was integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the average.
  - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
4. The SAR reference value, at the same location as step 1, was re-measured to measure drift. If the value drifted by more than 5%, the evaluation was repeated.

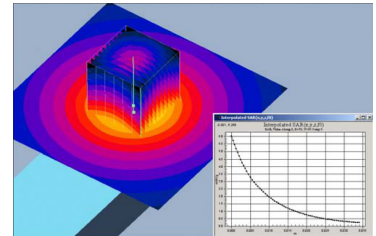

**Figure 7-1**  
**Sample SAR Area Scan**

### 7.2 Specific Anthropomorphic Mannequin (SAM) Specifications

The phantom for handset SAR assessment testing is a low-loss dielectric shell, with shape and dimensions derived from the anthropometric data of the 90th percentile adult male head dimensions as tabulated by the US Army. The SAM Twin Phantom shell is bisected along the mid-sagittal plane into right and left halves (see Figure 7-2). The perimeter sidewalls of each phantom halves are extended to allow filling with liquid to a depth that is sufficient to minimized reflections from the upper surface. The liquid depth is maintained at a minimum depth of 15cm to minimize reflections from the upper surface.



**Figure 7-2**  
**SAM Twin Phantom Shell**

|                             |                                                                                     |                                                             |                                                                                       |                                 |
|-----------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ACJ9TGCF-311        |  | CERTIFICATION REPORT                                        |  | Reviewed by:<br>Quality Manager |
| Filename:<br>0912152262.ACJ | Test Dates:<br>12/19/09 - 01/07/10                                                  | EUT Type:<br>Notebook PC with WLAN abgn, WWAN and Bluetooth |                                                                                       | Page 10 of 27                   |

### 7.3 SAR Testing with IEEE 802.11 a/b/g Transmitters

Normal network operating configurations are not suitable for measuring the SAR of 802.11 a/b/g transmitters. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable.

#### 7.3.1 General Device Setup

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. The test frequencies should correspond to actual channel frequencies defined for domestic use. SAR for devices with switched diversity should be measured with only one antenna transmitting at a time during each SAR measurement, according to a fixed modulation and data rate. The same data pattern should be used for all measurements.

#### 7.3.2 Frequency Channel Configurations [22]

802.11 a/b/g and 4.9 GHz operating modes are tested independently according to the service requirements in each frequency band. 802.11 b/g modes are tested on channels 1, 6 and 11. 802.11a is tested for UNII operations on channels 36 and 48 in the 5.15-5.25 GHz band; channels 52 and 64 in the 5.25-5.35 GHz band; channels 104, 116, 124 and 136 in the 5.470-5.725 GHz band; and channels 149 and 161 in the 5.8 GHz band. When 5.8 GHz §15.247 is also available, channels 149, 157 and 165 should be tested instead of the UNII channels. 4.9 GHz is tested on channels 1, 10 and 5 or 6, whichever has the higher output power, for 5 MHz channels; channels 11, 15 and 19 for 10 MHz channels; and channels 21 and 25 for 20 MHz channels. These are referred to as the “default test channels”. 802.11g mode was evaluated only if the output power was 0.25 dB higher than the 802.11b mode.

**Table 7-1**  
**802.11 Test Channels per FCC Requirements**

| Mode            | GHz     | Channel | Turbo Channel  | “Default Test Channels” |   |      |   |
|-----------------|---------|---------|----------------|-------------------------|---|------|---|
|                 |         |         |                | §15.247                 |   | UNII |   |
| 802.11 b/g      | 2.412   | 1       |                | √                       | ▽ |      |   |
|                 | 2.437   | 6       |                | √                       | ▽ |      |   |
|                 | 2.462   | 11      |                | √                       | ▽ |      |   |
| 802.11a         | 5.18    | 36      |                |                         |   | √    |   |
|                 | 5.20    | 40      | 42 (5.21 GHz)  |                         |   |      | * |
|                 | 5.22    | 44      |                |                         |   |      | * |
|                 | 5.24    | 48      | 50 (5.25 GHz)  |                         |   | √    |   |
|                 | 5.26    | 52      |                |                         |   | √    |   |
|                 | 5.28    | 56      | 58 (5.29 GHz)  |                         |   |      | * |
|                 | 5.30    | 60      |                |                         |   |      | * |
|                 | 5.32    | 64      |                |                         |   | √    |   |
|                 | 5.500   | 100     |                |                         |   |      | * |
|                 | 5.520   | 104     |                |                         |   | √    |   |
|                 | 5.540   | 108     |                |                         |   |      | * |
|                 | 5.560   | 112     |                |                         |   |      | * |
|                 | 5.580   | 116     |                |                         |   | √    |   |
|                 | 5.600   | 120     | Unknown        |                         |   |      | * |
|                 | 5.620   | 124     |                |                         |   | √    |   |
|                 | 5.640   | 128     |                |                         |   |      | * |
|                 | 5.660   | 132     |                |                         |   |      | * |
|                 | 5.680   | 136     |                |                         |   | √    |   |
|                 | 5.700   | 140     |                |                         |   |      | * |
|                 | 5.745   | 149     |                | √                       |   | √    |   |
|                 | 5.765   | 153     | 152 (5.76 GHz) |                         | * |      | * |
| UNII or §15.247 | 5.785   | 157     |                | √                       |   |      | * |
|                 | 5.805   | 161     | 160 (5.80 GHz) |                         | * | √    | * |
|                 | §15.247 | 5.825   | 165            | √                       |   |      |   |

|                             |                                                                                     |                                                             |                                                                                       |                                 |
|-----------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ACJ9TGCF-311        |  | CERTIFICATION REPORT                                        |  | Reviewed by:<br>Quality Manager |
| Filename:<br>0912152262.ACJ | Test Dates:<br>12/19/09 - 01/07/10                                                  | EUT Type:<br>Notebook PC with WLAN abgn, WWAN and Bluetooth |                                                                                       | Page 11 of 27                   |

## 7.4 Device Conducted Powers: WLAN 802.11abgn

| Mode     | Freq<br>[MHz] | Channel | Antenna | Conducted Power [dBm] |       |       |       |       |       |       |       |
|----------|---------------|---------|---------|-----------------------|-------|-------|-------|-------|-------|-------|-------|
|          |               |         |         | Data Rate [Mbps]      |       |       |       |       |       |       |       |
|          |               |         |         | 1                     | 2     | 5.5   | 11    |       |       |       |       |
| 802.11b  | 2412          | 1       | B       | 13.54                 | 13.00 | 13.50 | 13.05 |       |       |       |       |
| 802.11b  | 2437          | 6       | B       | 13.54                 | 13.52 | 13.55 | 13.25 |       |       |       |       |
| 802.11b  | 2462          | 11      | B       | 12.84                 | 13.25 | 13.23 | 13.10 |       |       |       |       |
| Mode     | Freq<br>[MHz] | Channel | Antenna | Conducted Power [dBm] |       |       |       |       |       |       |       |
|          |               |         |         | Data Rate [Mbps]      |       |       |       |       |       |       |       |
|          |               |         |         | 6                     | 9     | 12    | 18    | 24    | 36    | 48    | 54    |
| 802.11g  | 2412          | 1       | B       | 11.91                 | 11.78 | 11.77 | 11.78 | 11.68 | 11.00 | 11.54 | 10.30 |
| 802.11g  | 2437          | 6       | B       | 14.22                 | 14.16 | 14.03 | 14.01 | 13.84 | 13.80 | 12.50 | 10.70 |
| 802.11g  | 2462          | 11      | B       | 12.56                 | 12.50 | 12.45 | 12.44 | 12.28 | 12.20 | 12.22 | 11.15 |
| Mode     | Freq<br>[MHz] | Channel | Antenna | Conducted Power [dBm] |       |       |       |       |       |       |       |
|          |               |         |         | Data Rate [Mbps]      |       |       |       |       |       |       |       |
|          |               |         |         | HT0                   | HT1   | HT2   | HT3   | HT4   | HT5   | HT6   | HT7   |
| 802.11 n | 2422          | 3       | B       | 7.42                  | 7.43  | 7.77  | 7.15  | 7.08  | 7.00  | 7.01  | 6.90  |
| 802.11n  | 2437          | 6       | B       | 14.05                 | 14.00 | 13.93 | 13.68 | 13.61 | 12.20 | 10.49 | 8.80  |
| 802.11n  | 2452          | 9       | B       | 7.73                  | 7.78  | 8.14  | 7.50  | 7.40  | 7.84  | 7.38  | 7.31  |
| Mode     | Freq<br>[MHz] | Channel | Antenna | Conducted Power [dBm] |       |       |       |       |       |       |       |
|          |               |         |         | Data Rate [Mbps]      |       |       |       |       |       |       |       |
|          |               |         |         | 6                     | 9     | 12    | 18    | 24    | 36    | 48    | 54    |
| 802.11a  | 5180          | 36      | B       | 12.28                 | 12.20 | 12.11 | 12.12 | 12.00 | 11.94 | 11.96 | 9.80  |
| 802.11a  | 5200          | 40      | B       | 12.98                 | 12.92 | 12.80 | 12.84 | 12.72 | 12.62 | 11.85 | 10.03 |
| 802.11a  | 5220          | 44      | B       | 13.34                 | 13.34 | 13.73 | 13.76 | 13.86 | 13.80 | 12.94 | 11.15 |
| 802.11a  | 5240          | 48      | B       | 12.65                 | 13.11 | 13.04 | 13.05 | 12.92 | 12.83 | 11.63 | 10.23 |
| 802.11a  | 5260          | 52      | B       | 12.84                 | 13.24 | 12.80 | 12.83 | 12.70 | 12.66 | 11.85 | 10.04 |
| 802.11a  | 5280          | 56      | B       | 13.11                 | 13.10 | 13.10 | 13.14 | 12.97 | 12.91 | 11.71 | 10.23 |
| 802.11a  | 5300          | 60      | B       | 13.18                 | 13.30 | 13.39 | 13.19 | 13.24 | 13.24 | 12.33 | 10.60 |
| 802.11a  | 5320          | 64      | B       | 13.22                 | 13.18 | 12.94 | 12.92 | 12.73 | 13.02 | 11.78 | 9.95  |
| 802.11a  | 5500          | 100     | B       | 13.10                 | 13.32 | 13.24 | 13.31 | 12.81 | 12.80 | 12.30 | 10.64 |
| 802.11a  | 5520          | 104     | B       | 13.51                 | 13.42 | 13.70 | 13.02 | 13.12 | 13.16 | 12.22 | 10.68 |
| 802.11a  | 5540          | 108     | B       | 13.27                 | 13.26 | 14.05 | 12.84 | 12.90 | 12.97 | 12.04 | 10.37 |
| 802.11a  | 5560          | 112     | B       | 13.11                 | 13.50 | 13.89 | 13.20 | 12.86 | 12.89 | 11.75 | 10.51 |
| 802.11a  | 5580          | 116     | B       | 13.45                 | 13.39 | 13.39 | 12.71 | 12.80 | 13.05 | 11.81 | 10.09 |
| 802.11a  | 5600          | 120     | B       | 12.74                 | 12.67 | 12.62 | 12.72 | 12.56 | 12.54 | 11.74 | 9.49  |
| 802.11a  | 5620          | 124     | B       | 12.82                 | 13.07 | 13.34 | 13.86 | 12.28 | 12.33 | 11.27 | 9.16  |
| 802.11a  | 5640          | 128     | B       | 13.07                 | 12.91 | 13.34 | 12.40 | 12.22 | 12.48 | 11.63 | 9.31  |
| 802.11a  | 5660          | 132     | B       | 12.71                 | 12.88 | 13.06 | 12.53 | 12.52 | 12.54 | 11.61 | 9.27  |
| 802.11a  | 5680          | 136     | B       | 12.75                 | 12.66 | 12.93 | 12.30 | 12.97 | 12.41 | 11.64 | 9.30  |
| 802.11a  | 5700          | 140     | B       | 12.47                 | 12.43 | 12.06 | 12.12 | 12.00 | 11.93 | 11.10 | 9.28  |
| 802.11a  | 5745          | 149     | B       | 11.82                 | 12.04 | 12.00 | 12.03 | 11.84 | 11.76 | 10.85 | 8.50  |
| 802.11a  | 5785          | 157     | B       | 12.31                 | 12.35 | 12.10 | 12.20 | 12.03 | 11.95 | 11.10 | 8.78  |
| 802.11a  | 5825          | 165     | B       | 12.92                 | 12.80 | 12.40 | 12.62 | 12.10 | 12.10 | 11.25 | 8.85  |
| Mode     | Freq<br>[MHz] | Channel | Antenna | Conducted Power [dBm] |       |       |       |       |       |       |       |
|          |               |         |         | Data Rate [Mbps]      |       |       |       |       |       |       |       |
|          |               |         |         | HT0                   | HT1   | HT2   | HT3   | HT4   | HT5   | HT6   | HT7   |
| 802.11n  | 5190          | 38      | B       | 9.06                  | 9.01  | 8.97  | 8.81  | 8.67  | 8.73  | 8.68  | 8.63  |
| 802.11n  | 5230          | 46      | B       | 12.82                 | 12.41 | 12.72 | 12.40 | 12.08 | 11.56 | 9.81  | 7.97  |
| 802.11n  | 5270          | 54      | B       | 12.22                 | 12.60 | 12.52 | 12.32 | 12.22 | 11.76 | 10.01 | 8.25  |
| 802.11n  | 5310          | 62      | B       | 10.03                 | 10.01 | 9.96  | 9.78  | 9.71  | 9.69  | 9.73  | 8.35  |
| 802.11n  | 5510          | 102     | B       | 11.47                 | 11.43 | 11.36 | 11.16 | 11.10 | 10.63 | 10.27 | 8.48  |
| 802.11n  | 5550          | 110     | B       | 11.21                 | 11.09 | 11.42 | 11.05 | 11.40 | 11.04 | 9.14  | 7.68  |
| 802.11n  | 5590          | 118     | B       | 12.59                 | 12.57 | 12.45 | 11.93 | 11.81 | 11.43 | 10.00 | 8.25  |
| 802.11n  | 5630          | 126     | B       | 10.72                 | 10.89 | 10.80 | 10.44 | 10.56 | 10.47 | 8.17  | 6.72  |
| 802.11n  | 5670          | 134     | B       | 11.80                 | 11.79 | 11.69 | 11.47 | 11.42 | 11.24 | 9.17  | 5.06  |
| 802.11n  | 5755          | 151     | B       | 11.35                 | 11.66 | 11.54 | 11.35 | 11.30 | 10.72 | 8.60  | 5.60  |
| 802.11n  | 5795          | 159     | B       | 12.00                 | 11.90 | 11.76 | 11.56 | 11.40 | 11.00 | 8.81  | 6.01  |

|                             |                                                                                     |                                                             |                                                                                       |                                 |
|-----------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ACJ9TGCF-311        |  | CERTIFICATION REPORT                                        |  | Reviewed by:<br>Quality Manager |
| Filename:<br>0912152262.ACJ | Test Dates:<br>12/19/09 - 01/07/10                                                  | EUT Type:<br>Notebook PC with WLAN abgn, WWAN and Bluetooth |                                                                                       | Page 12 of 27                   |

## 8

## MULTIPLE ANTENNA &amp; SEPARATION DISTANCES

Table 10-1 Maximum Conducted Power

| Maximum Conducted Power |                |                   |                 |       |            |       |
|-------------------------|----------------|-------------------|-----------------|-------|------------|-------|
| Transmitter             | Frequency Band | Highest Frequency | Conducted Power |       | 60/f (GHz) | >60/f |
|                         | MHz            | MHz               | dBm             | mW    | mW         |       |
| Bluetooth               | 2441           | 2,480.00          | 13.67           | 23.28 | 24.19      | no    |
| 802.11b                 | 2437           | 2,462.00          | 13.54           | 22.59 | 24.37      | no    |
| 802.11g                 | 2437           | 2,462.00          | 14.22           | 26.42 | 24.37      | yes   |
| 802.11a                 | 5200           | 5,240.00          | 13.86           | 24.32 | 11.45      | yes   |
| 802.11a                 | 5300           | 5,320.00          | 13.39           | 21.83 | 11.28      | yes   |
| 802.11a                 | 5500           | 5,600.00          | 14.05           | 25.41 | 10.71      | yes   |
| 802.11a                 | 5785           | 5,825.00          | 12.92           | 19.59 | 10.30      | yes   |
| 802.11n                 | 2437           | 2,462.00          | 14.05           | 25.41 | 24.37      | yes   |
| 802.11n                 | 5200           | 5,240.00          | 12.82           | 19.14 | 11.45      | yes   |
| 802.11n                 | 5300           | 5,320.00          | 12.60           | 18.20 | 11.28      | yes   |
| 802.11n                 | 5500           | 5,600.00          | 12.59           | 18.16 | 10.71      | yes   |
| 802.11n                 | 5785           | 5,825.00          | 12.00           | 15.85 | 10.30      | yes   |

|                             |                                                                                     |                                                             |                                                                                       |                                 |
|-----------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ACJ9TGCF-311        |  | CERTIFICATION REPORT                                        |  | Reviewed by:<br>Quality Manager |
| Filename:<br>0912152262.ACJ | Test Dates:<br>12/19/09 - 01/07/10                                                  | EUT Type:<br>Notebook PC with WLAN abgn, WWAN and Bluetooth |                                                                                       | Page 13 of 27                   |

| Distance - Antenna to Body |                    |           |          |    |
|----------------------------|--------------------|-----------|----------|----|
| Position                   | Antenna (Unit: mm) |           |          |    |
|                            | WWAN Main          | WLAN Main | WLAN Aux | BT |
| Laptop                     | 300                | 300       | 37       | 37 |

Table 10-2 Distance – Antenna to Body

| Distance - Antenna to Antenna |           |           |          |     |
|-------------------------------|-----------|-----------|----------|-----|
| Antenna (Unit: mm)            | WWAN Main | WLAN Main | WLAN Aux | BT  |
| WWAN Main                     | N/A       | 120       | NA       | 263 |
| WLAN Main                     | 120       | N/A       | NA       | 310 |
| WLAN Aux                      | N/A       | N/A       | N/A      | 345 |
| BT                            | NA        | NA        | 345      | NA  |

Table 10-3 Distance – Antenna to Antenna

**NOTE:** SAR evaluation is not required for antennas located greater than 20 cm from the body  
Therefore WWAN Main and WLAN Main antenna was not evaluated.  
The Maximum antenna output power of Bluetooth is <60/f, therefore SAR evaluation is not required.

|                             |                                                                                     |                                                             |                                                                                       |                                 |
|-----------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ACJ9TGCF-311        |  | CERTIFICATION REPORT                                        |  | Reviewed by:<br>Quality Manager |
| Filename:<br>0912152262.ACJ | Test Dates:<br>12/19/09 - 01/07/10                                                  | EUT Type:<br>Notebook PC with WLAN abgn, WWAN and Bluetooth |                                                                                       | Page 14 of 27                   |

### 9.1 Uncontrolled Environment

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

### 9.2 Controlled Environment

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

**Table 9-1**  
**SAR Human Exposure Specified in ANSI/IEEE C95.1-1992**

| HUMAN EXPOSURE LIMITS                           |                                                                           |                                                                   |
|-------------------------------------------------|---------------------------------------------------------------------------|-------------------------------------------------------------------|
|                                                 | UNCONTROLLED ENVIRONMENT<br><i>General Population</i><br>(W/kg) or (mW/g) | CONTROLLED ENVIRONMENT<br><i>Occupational</i><br>(W/kg) or (mW/g) |
| SPATIAL PEAK SAR<br>Brain                       | 1.6                                                                       | 8.0                                                               |
| SPATIAL AVERAGE SAR<br>Whole Body               | 0.08                                                                      | 0.4                                                               |
| SPATIAL PEAK SAR<br>Hands, Feet, Ankles, Wrists | 4.0                                                                       | 20                                                                |

1 The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

2 The Spatial Average value of the SAR averaged over the whole body.

3 The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

|                             |                                                                                     |                                                             |                                                                                       |                                 |
|-----------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ACJ9TGCF-311        |  | CERTIFICATION REPORT                                        |  | Reviewed by:<br>Quality Manager |
| Filename:<br>0912152262.ACJ | Test Dates:<br>12/19/09 - 01/07/10                                                  | EUT Type:<br>Notebook PC with WLAN abgn, WWAN and Bluetooth |                                                                                       | Page 15 of 27                   |



## 10 MEASUREMENT UNCERTAINTIES

| a                                                                             | b                    | c             | d              | e=<br>f(d,k) | f                     | g                        | h =<br>c x f/e                 | i =<br>c x g/e                   | k              |
|-------------------------------------------------------------------------------|----------------------|---------------|----------------|--------------|-----------------------|--------------------------|--------------------------------|----------------------------------|----------------|
| Uncertainty<br>Component                                                      | IEEE<br>1528<br>Sec. | Tol.<br>(± %) | Prob.<br>Dist. | Div.         | c <sub>i</sub><br>1gm | c <sub>i</sub><br>10 gms | 1gm<br>u <sub>i</sub><br>(± %) | 10gms<br>u <sub>i</sub><br>(± %) | v <sub>i</sub> |
| <b>Measurement System</b>                                                     |                      |               |                |              |                       |                          |                                |                                  |                |
| Probe Calibration                                                             | E.2.1                | 6.6           | N              | 1            | 1.0                   | 1.0                      | 6.6                            | 6.6                              | ∞              |
| Axial Isotropy                                                                | E.2.2                | 0.25          | N              | 1            | 0.7                   | 0.7                      | 0.2                            | 0.2                              | ∞              |
| Hemishperical Isotropy                                                        | E.2.2                | 1.3           | N              | 1            | 1.0                   | 1.0                      | 1.3                            | 1.3                              | ∞              |
| Boundary Effect                                                               | E.2.3                | 0.4           | N              | 1            | 1.0                   | 1.0                      | 0.4                            | 0.4                              | ∞              |
| Linearity                                                                     | E.2.4                | 0.3           | N              | 1            | 1.0                   | 1.0                      | 0.3                            | 0.3                              | ∞              |
| System Detection Limits                                                       | E.2.5                | 5.1           | N              | 1            | 1.0                   | 1.0                      | 5.1                            | 5.1                              | ∞              |
| Readout Electronics                                                           | E.2.6                | 1.0           | N              | 1            | 1.0                   | 1.0                      | 1.0                            | 1.0                              | ∞              |
| Response Time                                                                 | E.2.7                | 0.8           | R              | 1.73         | 1.0                   | 1.0                      | 0.5                            | 0.5                              | ∞              |
| Integration Time                                                              | E.2.8                | 2.6           | R              | 1.73         | 1.0                   | 1.0                      | 1.5                            | 1.5                              | ∞              |
| RF Ambient Conditions                                                         | E.6.1                | 3.0           | R              | 1.73         | 1.0                   | 1.0                      | 1.7                            | 1.7                              | ∞              |
| Probe Positioner Mechanical Tolerance                                         | E.6.2                | 0.4           | R              | 1.73         | 1.0                   | 1.0                      | 0.2                            | 0.2                              | ∞              |
| Probe Positioning w/ respect to Phantom                                       | E.6.3                | 2.9           | R              | 1.73         | 1.0                   | 1.0                      | 1.7                            | 1.7                              | ∞              |
| Extrapolation, Interpolation & Integration algorithms for Max. SAR Evaluation | E.5                  | 1.0           | R              | 1.73         | 1.0                   | 1.0                      | 0.6                            | 0.6                              | ∞              |
| <b>Test Sample Related</b>                                                    |                      |               |                |              |                       |                          |                                |                                  |                |
| Test Sample Positioning                                                       | E.4.2                | 6.0           | N              | 1            | 1.0                   | 1.0                      | 6.0                            | 6.0                              | 287            |
| Device Holder Uncertainty                                                     | E.4.1                | 3.32          | R              | 1.73         | 1.0                   | 1.0                      | 1.9                            | 1.9                              | ∞              |
| Output Power Variation - SAR drift measurement                                | 6.6.2                | 5.0           | R              | 1.73         | 1.0                   | 1.0                      | 2.9                            | 2.9                              | ∞              |
| <b>Phantom &amp; Tissue Parameters</b>                                        |                      |               |                |              |                       |                          |                                |                                  |                |
| Phantom Uncertainty (Shape & Thickness tolerances)                            | E.3.1                | 4.0           | R              | 1.73         | 1.0                   | 1.0                      | 2.3                            | 2.3                              | ∞              |
| Liquid Conductivity - deviation from target values                            | E.3.2                | 5.0           | R              | 1.73         | 0.64                  | 0.43                     | 1.8                            | 1.2                              | ∞              |
| Liquid Conductivity - measurement uncertainty                                 | E.3.3                | 3.8           | N              | 1            | 0.64                  | 0.43                     | 2.4                            | 1.6                              | 6              |
| Liquid Permittivity - deviation from target values                            | E.3.2                | 5.0           | R              | 1.73         | 0.60                  | 0.49                     | 1.7                            | 1.4                              | ∞              |
| Liquid Permittivity - measurement uncertainty                                 | E.3.3                | 4.5           | N              | 1            | 0.60                  | 0.49                     | 2.7                            | 2.2                              | 6              |
| <b>Combined Standard Uncertainty (k=1)</b>                                    |                      |               |                |              |                       |                          | RSS                            | 12.4                             | 12.0           |
| <b>Expanded Uncertainty</b><br>(95% CONFIDENCE LEVEL)                         |                      |               |                |              |                       |                          | k=2                            | 24.7                             | 24.0           |

The above measurement uncertainties are according to IEEE Std. 1528-2003

|                             |                                                                                     |                                                             |                                                                                       |                                 |
|-----------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ACJ9TGCF-311        |  | CERTIFICATION REPORT                                        |  | Reviewed by:<br>Quality Manager |
| Filename:<br>0912152262.ACJ | Test Dates:<br>12/19/09 - 01/07/10                                                  | EUT Type:<br>Notebook PC with WLAN abgn, WWAN and Bluetooth |                                                                                       | Page 16 of 27                   |

# 11 SYSTEM VERIFICATION

## 11.1 Tissue Verification

Table 11-1  
Measured Tissue Properties

| Calibrated Date: | Tissue Type | Measured Frequency (MHz) | Measured Conductivity, $\sigma$ (S/m) | Measured Dielectric Constant, $\epsilon$ | TARGET Conductivity, $\sigma$ (S/m) | TARGET Dielectric Constant, $\epsilon$ | % dev $\sigma$ | % dev $\epsilon$ |
|------------------|-------------|--------------------------|---------------------------------------|------------------------------------------|-------------------------------------|----------------------------------------|----------------|------------------|
| 12/14/2009       | 2450M       | 2401                     | 1.897                                 | 51.50                                    | 1.95                                | 52.70                                  | -2.72%         | -2.28%           |
|                  |             | 2450                     | 1.978                                 | 51.31                                    | 1.95                                | 52.70                                  | 1.44%          | -2.64%           |
|                  |             | 2499                     | 2.046                                 | 51.15                                    | 1.95                                | 52.70                                  | 4.92%          | -2.94%           |
| 01/04/2010       | 5200M       | 5170                     | 5.296                                 | 48.71                                    | 5.26                                | 49.15                                  | 0.61%          | -0.90%           |
|                  |             | 5210                     | 5.352                                 | 48.60                                    | 5.31                                | 48.95                                  | 0.75%          | -0.72%           |
|                  |             | 5250                     | 5.425                                 | 48.70                                    | 5.36                                | 48.75                                  | 1.21%          | -0.10%           |
| 01/04/2010       | 5300M       | 5270                     | 5.452                                 | 48.51                                    | 5.38                                | 48.65                                  | 1.26%          | -0.29%           |
|                  |             | 5310                     | 5.490                                 | 48.34                                    | 5.43                                | 48.45                                  | 1.07%          | -0.23%           |
|                  |             | 5350                     | 5.570                                 | 48.42                                    | 5.48                                | 48.25                                  | 1.64%          | 0.35%            |
| 01/04/2010       | 5500M       | 5470                     | 5.716                                 | 48.01                                    | 5.61                                | 48.63                                  | 1.82%          | -1.27%           |
|                  |             | 5510                     | 5.709                                 | 47.95                                    | 5.66                                | 48.59                                  | 0.83%          | -1.32%           |
|                  |             | 5550                     | 5.831                                 | 47.92                                    | 5.71                                | 48.55                                  | 2.12%          | -1.30%           |
| 01/04/2010       | 5600M       | 5570                     | 5.828                                 | 47.87                                    | 5.73                                | 48.53                                  | 1.64%          | -1.36%           |
|                  |             | 5610                     | 5.847                                 | 47.69                                    | 5.78                                | 48.49                                  | 1.12%          | -1.65%           |
|                  |             | 5650                     | 5.924                                 | 47.62                                    | 5.83                                | 48.45                                  | 1.61%          | -1.71%           |
| 01/04/2010       | 5700M       | 5670                     | 5.976                                 | 47.66                                    | 5.85                                | 48.40                                  | 2.08%          | -1.52%           |
|                  |             | 5710                     | 5.999                                 | 47.46                                    | 5.90                                | 48.34                                  | 1.64%          | -1.81%           |
|                  |             | 5750                     | 6.047                                 | 47.44                                    | 5.95                                | 48.28                                  | 1.63%          | -1.73%           |
| 01/04/2010       | 5800M       | 5770                     | 6.155                                 | 47.41                                    | 5.97                                | 48.25                                  | 3.03%          | -1.73%           |
|                  |             | 5800                     | 6.172                                 | 47.24                                    | 6.01                                | 48.20                                  | 2.70%          | -1.99%           |
|                  |             | 5850                     | 6.195                                 | 47.26                                    | 6.07                                | 48.13                                  | 2.06%          | -1.80%           |


|                             |                                                                                                                            |                                                             |                                                                                       |                                 |
|-----------------------------|----------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ACJ9TGCF-311        |  PCTEST<br>ENGINEERING LABORATORY, INC. | CERTIFICATION REPORT                                        |  | Reviewed by:<br>Quality Manager |
| Filename:<br>0912152262.ACJ | Test Dates:<br>12/19/09 - 01/07/10                                                                                         | EUT Type:<br>Notebook PC with WLAN abgn, WWAN and Bluetooth |                                                                                       | Page 17 of 27                   |

## 11.2 Test System Verification

Prior to assessment, the system is verified to  $\pm 10\%$  of the specifications by using the system validation kit(s). (Graphic Plots Attached)

**Table 11-2**  
**System Verification Results**

| System Verification<br>TARGET & MEASURED |                |                  |                 |                        |           |             |                                 |                                 |               |
|------------------------------------------|----------------|------------------|-----------------|------------------------|-----------|-------------|---------------------------------|---------------------------------|---------------|
| Date:                                    | Amb. Temp (°C) | Liquid Temp (°C) | Input Power (W) | Tissue Frequency (MHz) | Dipole SN | Tissue Type | Targeted SAR <sub>1g</sub> (mW) | Measured SAR <sub>1g</sub> (mW) | Deviation (%) |
| 12/19/2009                               | 24.5           | 22.8             | 0.100           | 2450                   | 797       | Muscle      | 5.30                            | 5.06                            | -4.53%        |
| 01/06/2010                               | 23.4           | 21.7             | 0.025           | 5200                   | 1057      | Muscle      | 1.98                            | 1.89                            | -4.42%        |
| 01/07/2010                               | 23.6           | 21.9             | 0.025           | 5500                   | 1057      | Muscle      | 2.04                            | 1.97                            | -3.43%        |
| 01/07/2010                               | 23.8           | 22.1             | 0.025           | 5800                   | 1057      | Muscle      | 1.79                            | 1.80                            | 0.56%         |

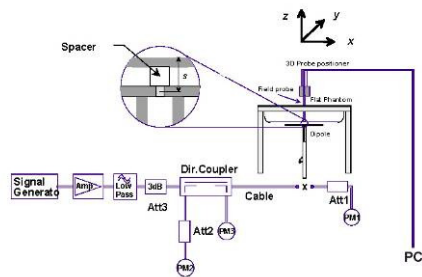

**Figure 11-1**  
**System Verification Setup Diagram**



**Figure 11-2**  
**System Verification Setup Photo**

|                             |                                                                                     |                                                             |                                                                                       |                                 |
|-----------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ACJ9TGCF-311        |  | CERTIFICATION REPORT                                        |  | Reviewed by:<br>Quality Manager |
| Filename:<br>0912152262.ACJ | Test Dates:<br>12/19/09 - 01/07/10                                                  | EUT Type:<br>Notebook PC with WLAN abgn, WWAN and Bluetooth |                                                                                       | Page 18 of 27                   |

## 12 SAR DATA SUMMARY

### 14.1 WLAN 802.11bgn 2.4GHz Body SAR Results

| MEASUREMENT RESULTS                                                                               |     |         |                       |       |                                                 |            |                  |              |         |              |
|---------------------------------------------------------------------------------------------------|-----|---------|-----------------------|-------|-------------------------------------------------|------------|------------------|--------------|---------|--------------|
| FREQUENCY                                                                                         |     | Mode    | Conducted Power [dBm] |       | Test Position                                   | Modulation | Data Rate (Mbps) | Spacing (cm) | Antenna | SAR          |
| MHz                                                                                               | Ch. |         | Start                 | End   |                                                 |            |                  |              |         | (W/kg)       |
| 2412                                                                                              | 1   | 802.11b | 13.54                 | 13.37 | Lap                                             | DSSS       | 1                | 0.0          | B       | 0.030        |
| 2437                                                                                              | 6   | 802.11b | 13.54                 | 13.34 | Lap                                             | DSSS       | 1                | 0.0          | B       | 0.037        |
| 2462                                                                                              | 11  | 802.11b | 12.84                 | 12.66 | Lap                                             | DSSS       | 1                | 0.0          | B       | <b>0.047</b> |
| 2412                                                                                              | 1   | 802.11g | 11.91                 | 11.79 | Lap                                             | OFDM       | 6                | 0.0          | B       | 0.032        |
| 2437                                                                                              | 6   | 802.11g | 14.22                 | 14.03 | Lap                                             | OFDM       | 6                | 0.0          | B       | <b>0.033</b> |
| 2462                                                                                              | 11  | 802.11g | 12.56                 | 14.23 | Lap                                             | OFDM       | 6                | 0.0          | B       | 0.026        |
| 2422                                                                                              | 3   | 802.11n | 7.42                  | 7.55  | Lap                                             | OFDM       | 13.5             | 0.0          | B       | 0.017        |
| 2437                                                                                              | 6   | 802.11n | 14.05                 | 13.87 | Lap                                             | OFDM       | 13.5             | 0.0          | B       | <b>0.036</b> |
| 2452                                                                                              | 9   | 802.11n | 7.73                  | 8.30  | Lap                                             | OFDM       | 13.5             | 0.0          | B       | 0.036        |
| ANSI / IEEE C95.1 1992 - SAFETY LIMIT<br>Spatial Peak<br>Uncontrolled Exposure/General Population |     |         |                       |       | Body<br>1.6 W/kg (mW/g)<br>averaged over 1 gram |            |                  |              |         |              |

#### Notes:

1. The test data reported are the worst-case SAR value with the position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supplement C [July 2001].
2. All modes of operation were investigated, and worst-case results are reported.
3. Batteries are fully charged for all readings. Standard batteries were investigated.
4. Tissue parameters and temperatures are listed on the SAR plots.
5. Liquid tissue depth is 15.1 cm.  $\pm$  0.1.
6. WLAN Main antenna (A) located greater than 20 cm from the body of the user and thus was not evaluated for SAR.

|                             |                                                                                                                            |                                                             |                                                                                       |                                 |
|-----------------------------|----------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ACJ9TGCF-311        |  PCTEST<br>ENGINEERING LABORATORY, INC. | CERTIFICATION REPORT                                        |  | Reviewed by:<br>Quality Manager |
| Filename:<br>0912152262.ACJ | Test Dates:<br>12/19/09 - 01/07/10                                                                                         | EUT Type:<br>Notebook PC with WLAN abgn, WWAN and Bluetooth |                                                                                       | Page 19 of 27                   |

## 14.2 WLAN 802.11an 5.2GHz Body SAR Results

| MEASUREMENT RESULTS                                                                               |     |         |                       |       |                                                 |            |                  |              |         |              |
|---------------------------------------------------------------------------------------------------|-----|---------|-----------------------|-------|-------------------------------------------------|------------|------------------|--------------|---------|--------------|
| FREQUENCY                                                                                         |     | Mode    | Conducted Power [dBm] |       | Test Position                                   | Modulation | Data Rate (Mbps) | Spacing (cm) | Antenna | SAR (W/kg)   |
| MHz                                                                                               | Ch. |         | Start                 | End   |                                                 |            |                  |              |         |              |
| 5200                                                                                              | 40  | 802.11a | 12.98                 | 12.93 | Top                                             | OFDM       | 6                | *            | B       | <b>0.287</b> |
| 5220                                                                                              | 44  | 802.11a | 13.34                 | 13.44 | Top                                             | OFDM       | 6                | *            | B       | 0.221        |
| 5220                                                                                              | 44  | 802.11a | 13.86                 | 13.68 | Top                                             | OFDM       | 24               | *            | B       | 0.199        |
| 5190                                                                                              | 38  | 802.11n | 9.06                  | 9.03  | Top                                             | OFDM       | 13.5             | *            | B       | 0.134        |
| 5230                                                                                              | 46  | 802.11n | 12.82                 | 12.98 | Top                                             | OFDM       | 13.5             | *            | B       | 0.259        |
| 5200                                                                                              | 40  | 802.11a | 12.98                 | 12.87 | Lap                                             | OFDM       | 6                | 0.0          | B       | < 0.01       |
| ANSI / IEEE C95.1 1992 - SAFETY LIMIT<br>Spatial Peak<br>Uncontrolled Exposure/General Population |     |         |                       |       | Body<br>1.6 W/kg (mW/g)<br>averaged over 1 gram |            |                  |              |         |              |

### Notes:

1. The test data reported are the worst-case SAR value with the position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supplement C [July 2001].
2. All modes of operation were investigated, and worst-case results are reported.
3. Batteries are fully charged for all readings. Standard batteries were investigated.
4. Tissue parameters and temperatures are listed on the SAR plots.
5. Liquid tissue depth is 15.1 cm.  $\pm$  0.1.
6. Due to the antenna placement and thickness of the DUT no discernable hotspot was found in the Lap position so the device was tested with the antenna (keyboard), 1.0 cm from the SAM phantom.
7. WLAN Main antenna (A) located greater than 20 cm from the body of the user and thus was not evaluated for SAR.

|                             |                                                                                                                                   |                                                             |                                                                                       |                                 |
|-----------------------------|-----------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ACJ9TGCF-311        |  <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | CERTIFICATION REPORT                                        |  | Reviewed by:<br>Quality Manager |
| Filename:<br>0912152262.ACJ | Test Dates:<br>12/19/09 - 01/07/10                                                                                                | EUT Type:<br>Notebook PC with WLAN abgn, WWAN and Bluetooth |                                                                                       | Page 20 of 27                   |

### 14.3 WLAN 802.11an 5.3GHz Band Body SAR Results

| MEASUREMENT RESULTS                                                                               |     |         |                       |       |                                                 |            |                  |              |         |              |
|---------------------------------------------------------------------------------------------------|-----|---------|-----------------------|-------|-------------------------------------------------|------------|------------------|--------------|---------|--------------|
| FREQUENCY                                                                                         |     | Mode    | Conducted Power [dBm] |       | Test Position                                   | Modulation | Data Rate (Mbps) | Spacing (cm) | Antenna | SAR          |
| MHz                                                                                               | Ch. |         | Start                 | End   |                                                 |            |                  |              |         | (W/kg)       |
| 5260                                                                                              | 52  | 802.11a | 12.84                 | 12.70 | Top                                             | OFDM       | 6                | *            | B       | 0.185        |
| 5260                                                                                              | 52  | 802.11a | 13.24                 | 13.06 | Top                                             | OFDM       | 9                | *            | B       | 0.180        |
| 5300                                                                                              | 60  | 802.11a | 13.18                 | 13.27 | Top                                             | OFDM       | 6                | *            | B       | <b>0.222</b> |
| 5300                                                                                              | 60  | 802.11a | 13.39                 | 13.23 | Top                                             | OFDM       | 12               | *            | B       | 0.208        |
| 5270                                                                                              | 54  | 802.11n | 12.22                 | 12.27 | Top                                             | OFDM       | 13.5             | *            | B       | 0.205        |
| 5310                                                                                              | 62  | 802.11n | 10.03                 | 10.22 | Top                                             | OFDM       | 13.5             | *            | B       | 0.125        |
| 5260                                                                                              | 52  | 802.11a | 12.84                 | 12.70 | Lap                                             | OFDM       | 6                | 0.0          | B       | < 0.01       |
| ANSI / IEEE C95.1 1992 - SAFETY LIMIT<br>Spatial Peak<br>Uncontrolled Exposure/General Population |     |         |                       |       | Body<br>1.6 W/kg (mW/g)<br>averaged over 1 gram |            |                  |              |         |              |

#### Notes:

1. The test data reported are the worst-case SAR value with the position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supplement C [July 2001].
2. All modes of operation were investigated, and worst-case results are reported.
3. Batteries are fully charged for all readings. Standard batteries were investigated.
4. Tissue parameters and temperatures are listed on the SAR plots.
5. Liquid tissue depth is 15.1 cm.  $\pm$  0.1.
6. Due to the antenna placement and thickness of the DUT no discernable hotspot was found in the Lap position so the device was tested with the antenna (keyboard), 1.0 cm from the SAM phantom.
7. WLAN Main antenna (A) located greater than 20 cm from the body of the user and thus was not evaluated for SAR.

|                             |                                                                                                                                   |                                                             |                                                                                       |                                 |
|-----------------------------|-----------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ACJ9TGCF-311        |  <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | CERTIFICATION REPORT                                        |  | Reviewed by:<br>Quality Manager |
| Filename:<br>0912152262.ACJ | Test Dates:<br>12/19/09 - 01/07/10                                                                                                | EUT Type:<br>Notebook PC with WLAN abgn, WWAN and Bluetooth |                                                                                       | Page 21 of 27                   |

## 14.4 WLAN 802.11an 5.5GHz Body SAR Results

| MEASUREMENT RESULTS                                                                               |     |         |                       |       |                                                 |            |                  |              |         |              |
|---------------------------------------------------------------------------------------------------|-----|---------|-----------------------|-------|-------------------------------------------------|------------|------------------|--------------|---------|--------------|
| FREQUENCY                                                                                         |     | Mode    | Conducted Power [dBm] |       | Test Position                                   | Modulation | Data Rate (Mbps) | Spacing (cm) | Antenna | SAR          |
| MHz                                                                                               | Ch. |         | Start                 | End   |                                                 |            |                  |              |         | (W/kg)       |
| 5540                                                                                              | 108 | 802.11a | 13.27                 | 13.10 | Top                                             | OFDM       | 6                | *            | B       | 0.228        |
| 5540                                                                                              | 108 | 802.11a | 14.05                 | 13.98 | Top                                             | OFDM       | 12               | *            | B       | <b>0.259</b> |
| 5560                                                                                              | 112 | 802.11a | 13.11                 | 12.97 | Top                                             | OFDM       | 6                | *            | B       | 0.227        |
| 5560                                                                                              | 112 | 802.11a | 13.89                 | 13.81 | Top                                             | OFDM       | 12               | *            | B       | 0.118        |
| 5620                                                                                              | 124 | 802.11a | 12.82                 | 12.96 | Top                                             | OFDM       | 6                | *            | B       | 0.196        |
| 5620                                                                                              | 124 | 802.11a | 13.86                 | 14.00 | Top                                             | OFDM       | 18               | *            | B       | 0.174        |
| 5510                                                                                              | 102 | 802.11n | 11.47                 | 11.34 | Top                                             | OFDM       | 13.5             | *            | B       | 0.132        |
| 5590                                                                                              | 118 | 802.11n | 12.59                 | 12.45 | Top                                             | OFDM       | 13.5             | *            | B       | 0.231        |
| 5670                                                                                              | 134 | 802.11n | 11.80                 | 11.97 | Top                                             | OFDM       | 13.5             | *            | B       | 0.120        |
| 5540                                                                                              | 108 | 802.11a | 13.27                 | 13.10 | Lap                                             | OFDM       | 6                | 0.0          | B       | < 0.01       |
| ANSI / IEEE C95.1 1992 - SAFETY LIMIT<br>Spatial Peak<br>Uncontrolled Exposure/General Population |     |         |                       |       | Body<br>1.6 W/kg (mW/g)<br>averaged over 1 gram |            |                  |              |         |              |

### Notes:

1. The test data reported are the worst-case SAR value with the position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supplement C [July 2001].
2. All modes of operation were investigated, and worst-case results are reported.
3. Batteries are fully charged for all readings. Standard batteries were investigated.
4. Tissue parameters and temperatures are listed on the SAR plots.
5. Liquid tissue depth is 15.1 cm.  $\pm$  0.1.
6. Due to the antenna placement and thickness of the DUT no discernable hotspot was found in the Lap position so the device was tested with the antenna (keyboard), 1.0 cm from the SAM phantom.
7. WLAN Main antenna (A) located greater than 20 cm from the body of the user and thus was not evaluated for SAR.

|                             |                                                                                                                                   |                                                             |                                                                                       |                                 |
|-----------------------------|-----------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ACJ9TGCF-311        |  <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | CERTIFICATION REPORT                                        |  | Reviewed by:<br>Quality Manager |
| Filename:<br>0912152262.ACJ | Test Dates:<br>12/19/09 - 01/07/10                                                                                                | EUT Type:<br>Notebook PC with WLAN abgn, WWAN and Bluetooth |                                                                                       | Page 22 of 27                   |



## 14.5 WLAN 802.11an 5.8GHz Body SAR Results

| MEASUREMENT RESULTS                                                                    |     |         |                       |       |                                                 |            |                  |              |         |              |
|----------------------------------------------------------------------------------------|-----|---------|-----------------------|-------|-------------------------------------------------|------------|------------------|--------------|---------|--------------|
| FREQUENCY                                                                              |     | Mode    | Conducted Power [dBm] |       | Test Position                                   | Modulation | Data Rate (Mbps) | Spacing (cm) | Antenna | SAR          |
| MHz                                                                                    | Ch. |         | Start                 | End   |                                                 |            |                  |              |         | (W/kg)       |
| 5745                                                                                   | 149 | 802.11a | 11.82                 | 11.64 | Top                                             | OFDM       | 6                | *            | B       | 0.181        |
| 5785                                                                                   | 157 | 802.11a | 12.31                 | 12.21 | Top                                             | OFDM       | 6                | *            | B       | 0.168        |
| 5825                                                                                   | 165 | 802.11a | 12.92                 | 12.73 | Top                                             | OFDM       | 6                | *            | B       | 0.097        |
| 5755                                                                                   | 151 | 802.11n | 11.35                 | 11.37 | Top                                             | OFDM       | 13.5             | *            | B       | <b>0.190</b> |
| 5795                                                                                   | 159 | 802.11n | 12.00                 | 11.83 | Top                                             | OFDM       | 13.5             | *            | B       | 0.137        |
| 5745                                                                                   | 149 | 802.11a | 11.82                 | 11.64 | Lap                                             | OFDM       | 6                | 0.0          | B       | < 0.01       |
| ANSI / IEEE C95.1 1992 - SAFETY LIMIT<br>Spatial Peak<br>Uncontrolled Exposure/General |     |         |                       |       | Body<br>1.6 W/kg (mW/g)<br>averaged over 1 gram |            |                  |              |         |              |

### Notes:

1. The test data reported are the worst-case SAR value with the position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supplement C [July 2001].
2. All modes of operation were investigated, and worst-case results are reported.
3. Batteries are fully charged for all readings. Standard batteries were investigated.
4. Tissue parameters and temperatures are listed on the SAR plots
5. Liquid tissue depth is 15.1 cm.  $\pm$  0.1.
6. Due to the antenna placement and thickness of the DUT no discernable hotspot was found in the Lap position so the device was tested with the antenna (keyboard), 1.0 cm from the SAM phantom.
7. WLAN Main antenna (A) located greater than 20 cm from the body of the user and thus was not evaluated for SAR.

|                             |                                                                                                                                   |                                                             |                                                                                       |                                 |
|-----------------------------|-----------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ACJ9TGCF-311        |  <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | CERTIFICATION REPORT                                        |  | Reviewed by:<br>Quality Manager |
| Filename:<br>0912152262.ACJ | Test Dates:<br>12/19/09 - 01/07/10                                                                                                | EUT Type:<br>Notebook PC with WLAN abgn, WWAN and Bluetooth |                                                                                       | Page 23 of 27                   |

# 13 EQUIPMENT LIST

| Manufacturer    | Model   | Description                       | Cal Date  | Cal Interval | Cal Due   | Serial Number |
|-----------------|---------|-----------------------------------|-----------|--------------|-----------|---------------|
| Agilent         | 8648D   | (9kHz-4GHz) Signal Generator      | 9/19/2009 | Biennial     | 9/19/2011 | 3613A00315    |
| Agilent         | 8753E   | (30kHz-6GHz) Network Analyzer     | 3/25/2009 | Annual       | 3/25/2010 | JP38020182    |
| Agilent         | E5515C  | Wireless Communications Test Set  | 9/10/2009 | Annual       | 9/10/2010 | GB46110872    |
| Agilent         | E5515C  | Wireless Communications Test Set  | 9/11/2009 | Annual       | 9/11/2010 | GB46310798    |
| Agilent         | E5515C  | Wireless Communications Test Set  | 8/25/2009 | Annual       | 8/25/2010 | GB41450275    |
| Agilent         | E8257D  | (250kHz-20GHz) Signal Generator   | 3/25/2009 | Biennial     | 3/25/2011 | MY45470194    |
| Gigatronics     | 80701A  | (0.05-18GHz) Power Sensor         | 9/9/2009  | Annual       | 9/9/2010  | 1833460       |
| Gigatronics     | 8651A   | Universal Power Meter             | 9/9/2009  | Annual       | 9/9/2010  | 8650319       |
| Rohde & Schwarz | CMU200  | Base Station Simulator            | 9/11/2009 | Annual       | 9/11/2010 | 836371/0079   |
| Rohde & Schwarz | CMU200  | Base Station Simulator            | 4/6/2009  | Annual       | 4/6/2010  | 833855/0010   |
| Rohde & Schwarz | CMU200  | Base Station Simulator            | 9/4/2009  | Annual       | 9/4/2010  | 109892        |
| Rohde & Schwarz | NRVD    | Dual Channel Power Meter          | 8/20/2008 | Biennial     | 8/20/2010 | 101695        |
| Rohde & Schwarz | NRV-Z32 | Peak Power Sensor (100uW-2W)      | 12/5/2008 | Biennial     | 12/5/2010 | 100155        |
| Rohde & Schwarz | NRV-Z33 | Peak Power Sensor (1mW-20W)       | 12/5/2008 | Biennial     | 12/5/2010 | 100004        |
| SPEAG           | D1450V2 | 1450 MHz SAR Dipole               | 5/20/2009 | Biennial     | 5/20/2011 | 1025          |
| SPEAG           | D1765V2 | 1765 MHz SAR Dipole               | 5/19/2009 | Biennial     | 5/19/2011 | 1008          |
| SPEAG           | D1900V2 | 1900 MHz SAR Dipole               | 1/20/2009 | Biennial     | 1/20/2011 | 502           |
| SPEAG           | D1900V2 | 1900 MHz SAR Dipole               | 8/18/2009 | Biennial     | 8/18/2011 | 5d080         |
| SPEAG           | D2300V2 | 2300 MHz SAR Dipole               | 3/6/2008  | Biennial     | 3/6/2010  | 1008          |
| SPEAG           | D2450V2 | 2450 MHz SAR Dipole               | 8/27/2009 | Biennial     | 8/27/2011 | 719           |
| SPEAG           | D2450V2 | 2450 MHz SAR Dipole               | 1/8/2009  | Biennial     | 1/8/2011  | 797           |
| SPEAG           | D2600V2 | 2600 MHz SAR Dipole               | 8/12/2009 | Biennial     | 8/12/2011 | 1004          |
| SPEAG           | D5GHzV2 | 5 GHz SAR Dipole                  | 8/19/2009 | Biennial     | 8/19/2011 | 1007          |
| SPEAG           | D5GHzV2 | 5 GHz SAR Dipole                  | 1/15/2009 | Biennial     | 1/15/2011 | 1057          |
| SPEAG           | D835V2  | 835 MHz SAR Dipole                | 1/19/2009 | Biennial     | 1/19/2011 | 4d047         |
| SPEAG           | D835V2  | 835 MHz SAR Dipole                | 8/24/2009 | Biennial     | 8/24/2011 | 4d026         |
| SPEAG           | DAE3    | Dasy Data Acquisition Electronics | 9/17/2009 | Annual       | 9/17/2010 | 455           |
| SPEAG           | DAE4    | Dasy Data Acquisition Electronics | 5/14/2009 | Annual       | 5/14/2010 | 704           |
| SPEAG           | DAE4    | Dasy Data Acquisition Electronics | 5/25/2009 | Annual       | 5/25/2010 | 665           |
| SPEAG           | ES3DV2  | SAR Probe                         | 9/18/2009 | Annual       | 9/18/2010 | 3022          |
| SPEAG           | DAE4    | Dasy Data Acquisition Electronics | 7/21/2009 | Annual       | 7/21/2010 | 859           |
| SPEAG           | D750V3  | 750 MHz Dipole                    | 2/19/2009 | Biennial     | 2/19/2011 | 1003          |
| Rohde & Schwarz | CMU200  | Base Station Simulator            | 6/12/2009 | Annual       | 6/12/2010 | 836536/0005   |
| Speag           | ES3DV3  | SAR Probe                         | 4/15/2009 | Annual       | 4/15/2010 | 3213          |
| Speag           | ES3DV3  | SAR Probe                         | 4/15/2009 | Annual       | 4/15/2010 | 3209          |
| Rohde & Schwarz | SMIQ03B | Signal Generator                  | 5/21/2009 | Annual       | 5/21/2010 | 832810/021    |
| Speag           | D1640V2 | 1640 MHz Dipole                   | 8/21/2008 | Biennial     | 8/21/2010 | 321           |
| Rohde & Schwarz | CMW500  | LTE Base Station Simulator        | 8/25/2009 | Annual       | 8/25/2010 | 100976        |
| Anritsu         | MA2481A | Power Sensor                      | 12/2/2009 | Annual       | 12/2/2010 | 5318          |
| Anritsu         | MA2481A | Power Sensor                      | 12/3/2009 | Annual       | 12/3/2010 | 5442          |
| Anritsu         | ML2438A | Power Meter                       | 12/3/2009 | Annual       | 12/3/2010 | 1190013       |
| Anritsu         | ML2438A | Power Meter                       | 12/3/2009 | Annual       | 12/3/2010 | 98150041      |
| Anritsu         | ML2438A | Power Meter                       | 12/3/2009 | Annual       | 12/3/2010 | 1070030       |
| Anritsu         | MA2481A | Power Sensor                      | 12/2/2009 | Annual       | 12/2/2010 | 5821          |
| Anritsu         | MA2481A | Power Sensor                      | 12/3/2009 | Annual       | 12/3/2010 | 8013          |
| Anritsu         | MA2481A | Power Sensor                      | 12/3/2009 | Annual       | 12/3/2010 | 2400          |

## Notes:

The E-field probe was calibrated by SPEAG, by the waveguide technique procedure. Dipole Validation measurement is performed by PCTEST prior to SAR evaluation. The brain simulating material is calibrated by PCTEST using the dielectric probe system and network analyzer to determine the conductivity and permittivity (dielectric constant) of the brain-equivalent material.

|                                    |                                                                                                                                   |                                                                    |                                                                                       |                                        |
|------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| FCC ID: ACJ9TGCF-311               |  <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | <b>CERTIFICATION REPORT</b>                                        |  | <b>Reviewed by:</b><br>Quality Manager |
| <b>Filename:</b><br>0912152262.ACJ | <b>Test Dates:</b><br>12/19/09 - 01/07/10                                                                                         | <b>EUT Type:</b><br>Notebook PC with WLAN abgn, WWAN and Bluetooth |                                                                                       | Page 24 of 27                          |

## 14 CONCLUSION

### 14.1 Measurement Conclusion

The SAR evaluation indicates that the EUT complies with the RF radiation exposure limits of the FCC and Industry Canada, with respect to all parameters subject to this test. These measurements were taken to simulate the RF effects of RF exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are very complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because various factors may interact with one another to vary the specific biological outcome of an exposure to electromagnetic fields, any protection guide should consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables. [3]

|                                    |                                                                                     |                                                                    |                                                                                       |                                        |
|------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> ACJ9TGCF-311        |  | <b>CERTIFICATION REPORT</b>                                        |  | <b>Reviewed by:</b><br>Quality Manager |
| <b>Filename:</b><br>0912152262.ACJ | <b>Test Dates:</b><br>12/19/09 - 01/07/10                                           | <b>EUT Type:</b><br>Notebook PC with WLAN abgn, WWAN and Bluetooth |                                                                                       | Page 25 of 27                          |

## 15 REFERENCES

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 300kHz to 100GHz, New York: IEEE, 2006.
- [3] ANSI/IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, December 2002.
- [4] Federal Communications Commission, OET Bulletin 65 (Edition 97-01), Supplement C (Edition 01-01), Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields, July 2001.
- [5] IEEE Standards Coordinating Committee 34 – IEEE Std. 1528-2003, Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices.
- [6] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for RadioFrequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [7] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [8] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. 120-124.
- [9] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [10] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [11] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Head Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [12] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [13] G. Hartsgrrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bioelectromagnetics, Canada: 1987, pp. 29-36.
- [14] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [15] W. Gander, Computermathematick, Birkhaeuser, Basel, 1992.
- [16] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recepies in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.

|                                    |                                                                                     |                                                                    |                                                                                       |                                        |
|------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> ACJ9TGCF-311        |  | <b>CERTIFICATION REPORT</b>                                        |  | <b>Reviewed by:</b><br>Quality Manager |
| <b>Filename:</b><br>0912152262.ACJ | <b>Test Dates:</b><br>12/19/09 - 01/07/10                                           | <b>EUT Type:</b><br>Notebook PC with WLAN abgn, WWAN and Bluetooth |                                                                                       | Page 26 of 27                          |

- [17] Federal Communications Commission, OET Bulletin 65, Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields. Supplement C, Dec. 1997.
- [18] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.
- [19] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.
- [20] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.
- [21] FCC SAR Measurement Procedures for 3G Devices v2.0, October 2007
- [22] SAR Measurement procedures for IEEE 802.11a/b/g rev 1.2, May 2007
- [23] IEC 62209-1, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 1: Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz), Feb. 2005.
- [24] FCC Public Notice DA-02-1438. Office of Engineering and Technology Announces a Transition Period for the Phantom Requirements of Supplement C to OET Bulletin 65, June 19, 2002
- [25] Industry Canada RSS-102 Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands) Issue 2, November 2005
- [26] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 1999
- [27] FCC SAR Considerations for Handsets with Multiple Transmitters and Antennas v01r05 #648474, September 2008
- [28] FCC Application Note for SAR Probe Calibration and System Verification Consideration for Measurements at 150 MHz – 3 GHz, Rev 1.1, January 2007
- [29] FCC SAR Evaluation Considerations for Laptop Computers with Antennas Built-in on Display Screens, #616217, v01r01, April 2008
- [30] FCC SAR Measurement Requirements for 3 – 6 GHz Rev1.1, October 2006
- [31] FCC Mobile Portable RF Exposure Procedure D01 v03r03, KDB 447498, Jan. 2009
- [32] FCC SAR Procedures for Dongle Transmitters D02 v01, KDB 447498, Dec. 2008
- [33] ANSI/IEEE C95.1-1992, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 300kHz to 100GHz, New York: IEEE, Sept. 1992.

|                                    |                                                                                     |                                                                    |                                                                                       |                                        |
|------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> ACJ9TGCF-311        |  | <b>CERTIFICATION REPORT</b>                                        |  | <b>Reviewed by:</b><br>Quality Manager |
| <b>Filename:</b><br>0912152262.ACJ | <b>Test Dates:</b><br>12/19/09 - 01/07/10                                           | <b>EUT Type:</b><br>Notebook PC with WLAN abgn, WWAN and Bluetooth |                                                                                       | Page 27 of 27                          |