



PCTEST ENGINEERING LABORATORY, INC.

6660-B Dobbin Road, Columbia, MD 21045 USA

Tel. 410.290.6652 / Fax 410.290.6554

<http://www.pctestlab.com>



CERTIFICATE OF COMPLIANCE FCC Part 22 & 24 Certification

Applicant Name:

Panasonic Corporation of North America
One Panasonic Way, 4B-8
Secaucus, NJ 07094
United States

Date of Testing:

December 28, 2009 - January 29, 2010

Test Site/Location:

PCTEST Lab., Columbia, MD, USA

Test Report Serial No.:

0912152256.ACJ

FCC ID:

ACJ9TGCF-527

APPLICANT:

PANASONIC CORPORATION OF NORTH AMERICA

Application Type:

Certification

FCC Classification:

PCS Licensed Transmitter (PCB)

FCC Rule Part(s):

§2; §22(H), §24(E)

EUT Type:

Toughbook Model: CF-52mk3

Model(s):

CF-52mk3

Tx Frequency Range:

824.20 - 848.80MHz (Cell. GSM) / 1850.20 - 1909.80MHz (PCS GSM)

826.40 - 846.60MHz (Cell. WCDMA) / 1852.4 - 1907.6MHz (PCS WCDMA)

824.70 - 848.31MHz (Cell. CDMA) / 1851.25 - 1908.75MHz (PCS CDMA)

Max. RF Output Power:

1.084 W ERP Cell. GSM (30.35 dBm) / 1.148 W EIRP PCS GSM (30.6 dBm)

0.356 W ERP Cell. WCDMA (25.52 dBm) / 0.873 W EIRP PCS WCDMA (29.41 dBm)

0.401 W ERP Cell. CDMA (26.03 dBm) / 0.752 W EIRP PCS CDMA (28.76 dBm)

0.513 W ERP EDGE850 (27.1 dBm) 0.711 W EIRP EDGE1900 (28.52 dBm)

Emission

246KGXW (Cellular GSM), 242KGXW (PCS GSM)

Designator(s):

245KG7W (EDGE850), 242KG7W (EDGE1900)

4M16F9W (Cellular WCDMA), 4M17F9W (PCS WCDMA)

1M27F9W (Cellular CDMA), 1M27F9W (PCS CDMA)

Test Device Serial No.: *identical prototype* [S/N: 9KTSA00072]

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Grant Conditions: Power output listed is ERP for Part 22 and EIRP for Part 24.

PCTEST certifies that no party to this application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 862.

Randy Ortanez
President




FCC ID: ACJ9TGCF-527		FCC Pt. 22/24 GSM/EDGE/CDMA/WCDMA TEST REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0912152256.ACJ	Test Dates: December 28, 2009 - January 29, 2010	EUT Type: Toughbook Model: CF-52mk3		Page 1 of 81

TABLE OF CONTENTS

FCC PART 22 & 24 MEASUREMENT REPORT.....	3
1.0 INTRODUCTION	4
1.1 SCOPE	4
1.2 TESTING FACILITY.....	4
2.0 PRODUCT INFORMATION.....	5
2.1 EQUIPMENT DESCRIPTION	5
2.2 EMI SUPPRESSION DEVICE(S)/MODIFICATIONS	5
2.3 LABELING REQUIREMENTS.....	5
3.0 DESCRIPTION OF TESTS	6
3.1 MEASUREMENT PROCEDURE	6
3.2 OCCUPIED BANDWIDTH EMISSION LIMITS	6
3.3 CELLULAR - BASE FREQUENCY BLOCKS.....	6
3.4 CELLULAR - MOBILE FREQUENCY BLOCKS.....	7
3.5 PCS - BASE FREQUENCY BLOCKS.....	7
3.6 PCS - MOBILE FREQUENCY BLOCKS.....	7
3.7 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.....	7
3.8 RADIATED SPURIOUS AND HARMONIC EMISSIONS	8
3.9 PEAK-AVERAGE RATIO	8
3.10 FREQUENCY STABILITY / TEMPERATURE VARIATION	9
4.0 TEST EQUIPMENT CALIBRATION DATA	10
5.0 SAMPLE CALCULATIONS	11
6.0 TEST RESULTS.....	12
6.1 SUMMARY.....	12
6.2 CONDUCTED OUTPUT POWER.....	13
6.3 EFFECTIVE RADIATED POWER OUTPUT DATA	15
6.4 EQUIVALENT ISOTROPIC RADIATED POWER OUTPUT DATA.....	16
6.5 CELLULAR GSM RADIATED MEASUREMENTS	17
6.6 CELLULAR WCDMA RADIATED MEASUREMENTS	20
6.7 CELLULAR CDMA RADIATED MEASUREMENTS.....	23
6.8 PCS GSM RADIATED MEASUREMENTS	26
6.9 PCS WCDMA RADIATED MEASUREMENTS	29
6.10 PCS CDMA RADIATED MEASUREMENTS.....	32
6.11 CELLULAR GSM FREQUENCY STABILITY MEASUREMENTS.....	35
6.12 CELLULAR WCDMA FREQUENCY STABILITY MEASUREMENTS	37
6.13 CELLULAR CDMA FREQUENCY STABILITY MEASUREMENTS	39
6.14 PCS GSM FREQUENCY STABILITY MEASUREMENTS	41
6.15 PCS WCDMA FREQUENCY STABILITY MEASUREMENTS	43
6.16 PCS CDMA FREQUENCY STABILITY MEASUREMENTS.....	45
7.0 PLOTS OF EMISSIONS.....	47
8.0 CONCLUSION.....	81

FCC ID: ACJ9TGCF-527		FCC Pt. 22/24 GSM/EDGE/CDMA/WCDMA TEST REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0912152256.ACJ	Test Dates: December 28, 2009 - January 29, 2010	EUT Type: Toughbook Model: CF-52mk3		Page 2 of 81



MEASUREMENT REPORT

FCC Part 22 & 24




§2.1033 General Information

APPLICANT: Panasonic Corporation of North America
APPLICANT ADDRESS: One Panasonic Way, 4B-8
 Secaucus, NJ 07094
TEST SITE: PCTEST ENGINEERING LABORATORY, INC.
TEST SITE ADDRESS: 6660-B Dobbin Road, Columbia, MD 21045 USA
FCC RULE PART(S): §2; §22(H), §24(E)
BASE MODEL: CF-52mk3
FCC ID: ACJ9TGCF-527
FCC CLASSIFICATION: PCS Licensed Transmitter (PCB)
EMISSION DESIGNATOR(S): 246KGXW (Cellular GSM), 242KGXW (PCS GSM)
 245KG7W (EDGE850), 242KG7W (EDGE1900)
 4M16F9W (Cellular WCDMA), 4M17F9W (PCS WCDMA)
 1M27F9W (Cellular CDMA), 1M27F9W (PCS CDMA)
MODE: GSM/EDGE/CDMA/WCDMA
FREQUENCY TOLERANCE: $\pm 0.00025\%$ (2.5 ppm)
Test Device Serial No.: 9KTSA00072 ☐ Production ☒ Pre-Production ☐ Engineering
DATE(S) OF TEST: December 28, 2009 - January 29, 2010
TEST REPORT S/N: 0912152256.ACJ

Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21045, U.S.A.



- PCTEST facility is an FCC registered (PCTEST Reg. No. 90864) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (2451A-1).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (2451A-1) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.

FCC ID: ACJ9TGCF-527		FCC Pt. 22/24 GSM/EDGE/CDMA/WCDMA TEST REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0912152256.ACJ	Test Dates: December 28, 2009 - January 29, 2010	EUT Type: Toughbook Model: CF-52mk3		Page 3 of 81

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission.

1.2 Testing Facility

The map below shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity are, the Baltimore-Washington Internt'l (BWI) airport, the city of Baltimore and the Washington, DC area. (see *Figure 1-1*).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility in New Concept Business Park, Guilford Industrial Park, Columbia, Maryland. The site address is 6660-B Dobbin Road, Columbia, MD 21045. The test site is one of the highest points in the Columbia area with an elevation of 390 feet above mean sea level. The site coordinates are 39° 11'15" N latitude and 76° 49'38" W longitude. The facility is 1.5 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. There are no FM or TV transmitters within 15 miles of the site. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2003 on January 27, 2006.

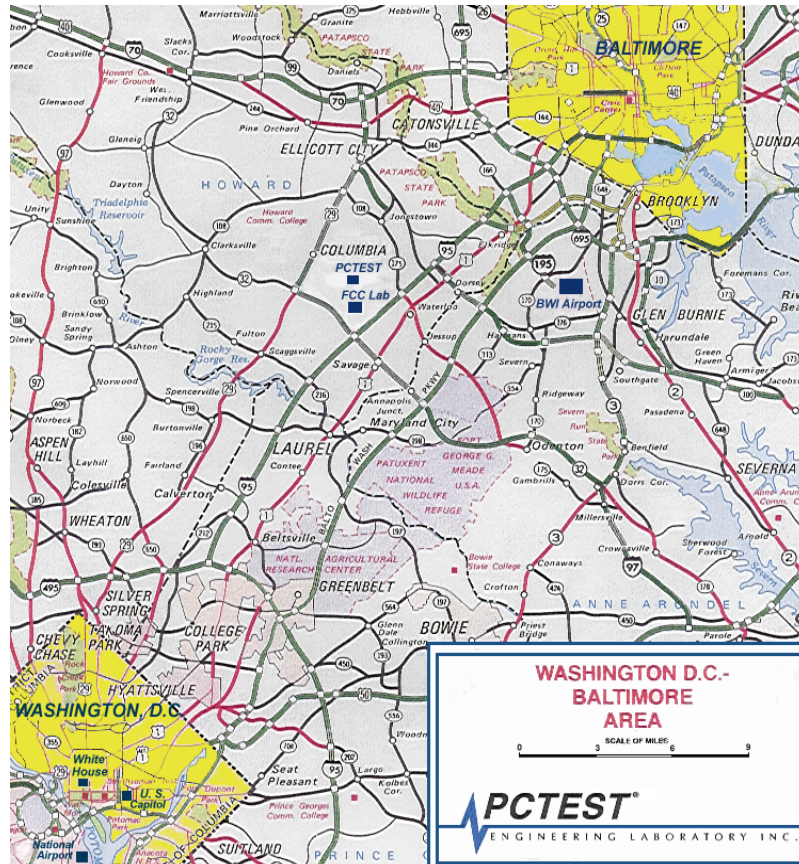


Figure 1-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area

FCC ID: ACJ9TGCF-527	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 GSM/EDGE/CDMA/WCDMA TEST REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0912152256.ACJ	Test Dates: December 28, 2009 - January 29, 2010	EUT Type: Toughbook Model: CF-52mk3		Page 4 of 81

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Panasonic Toughbook Model: CF-52mk3** **FCC ID: ACJ9TGCF-527**. The EUT consisted of the following component(s):

Manufacturer / Model	FCC ID	Description
Panasonic / Model: CF-52mk3	ACJ9TGCF-527	Toughbook Model: CF-52mk3
Alps / Model: UGNZA	N/A	Bluetooth Module
Sierra / Model: Gobi2000	N7NGOB12	WWAN Module
Intel / Model: 622ANHMW	PD9622ANH, PD9622BGH	802.11a/b/g/n Wireless LAN Module

Table 2-1. EUT Equipment Description

2.2 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

2.3 Labeling Requirements

Per 2.925

The FCC identifier shall be permanently affixed to the equipment and shall be readily visible to the purchaser at the time of purchase.

Per 15.19; Docket 95-19

In addition to this requirement, a device subject to certification shall be labeled as follows:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the trade name and FCC ID must be displayed on the device per Section 15.19(b)(2).

Please see attachment for FCC ID label and label location.

FCC ID: ACJ9TGCF-527		FCC Pt. 22/24 GSM/EDGE/CDMA/WCDMA TEST REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0912152256.ACJ	Test Dates: December 28, 2009 - January 29, 2010	EUT Type: Toughbook Model: CF-52mk3		Page 5 of 81

3.0 DESCRIPTION OF TESTS

3.1 Measurement Procedure

The radiated spurious measurements were made outdoors at a 3-meter test range (see Figure 3-1). The equipment under test is placed on a wooden turntable 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer. This power level was recorded using a broadband average power meter. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This level is recorded with the power meter. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.

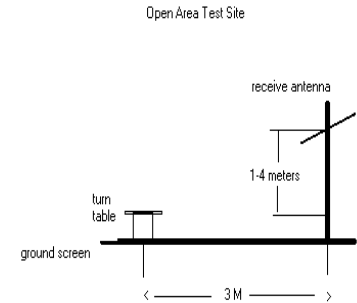


Figure 3-1. Diagram of 3-meter outdoor test range


Deviation from Measurement Procedure.....None

3.2 Occupied Bandwidth Emission Limits

\$2.1049, 22.917(a), 24.238(a)


- On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB.
- Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.
- When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges, both upper and lower, as the design permits.
- The measurement of emission power can be expressed in peak or average values, provided they are expressed in the same parameters as the transmitter power.

3.3 Cellular - Base Frequency Blocks

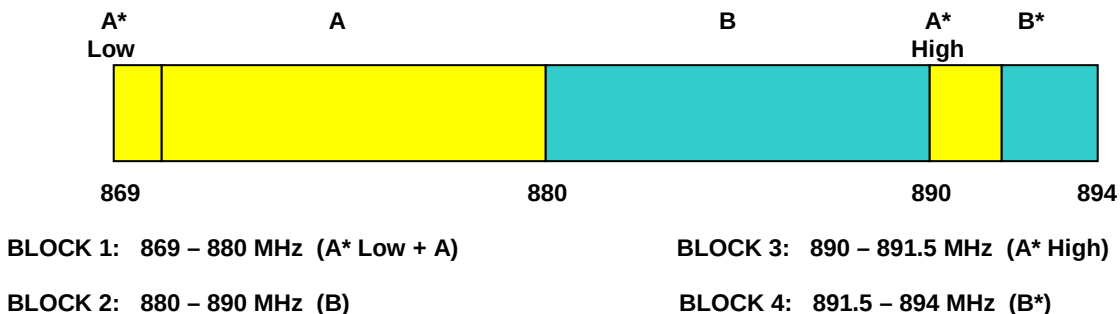

FCC ID: ACJ9TGCF-527	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 GSM/EDGE/CDMA/WCDMA TEST REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0912152256.ACJ	Test Dates: December 28, 2009 - January 29, 2010	EUT Type: Toughbook Model: CF-52mk3		Page 6 of 81

3.4 Cellular - Mobile Frequency Blocks

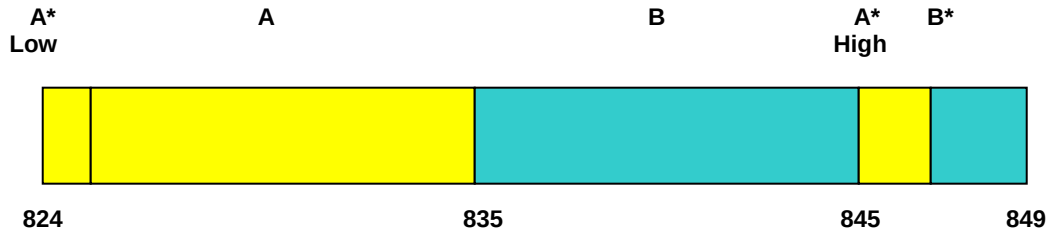


BLOCK 1: 824 – 835 MHz (A* Low + A)

BLOCK 3: 845 – 846.5 MHz (A* High)

BLOCK 2: 835 – 845 MHz (B)

BLOCK 4: 846.5 – 849 MHz (B*)

3.5 PCS - Base Frequency Blocks

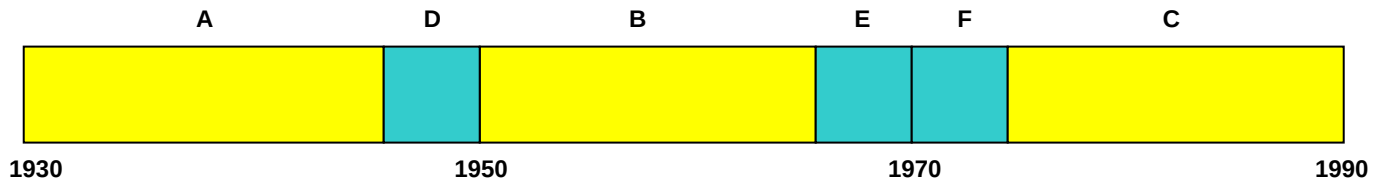

BLOCK 1: 1930 – 1945 MHz (A)

BLOCK 4: 1965 – 1970 MHz (E)


BLOCK 2: 1945 – 1950 MHz (D)

BLOCK 5: 1970 – 1975 MHz (F)

BLOCK 3: 1950 – 1965 MHz (B)

BLOCK 6: 1975 – 1990 MHz (C)

3.6 PCS - Mobile Frequency Blocks

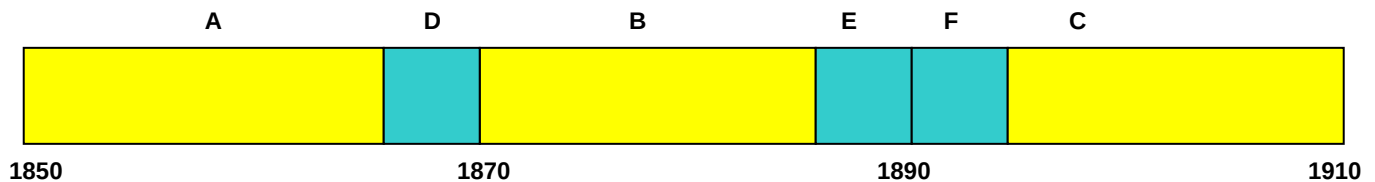

BLOCK 1: 1850 – 1865 MHz (A)

BLOCK 4: 1885 – 1890 MHz (E)

BLOCK 2: 1865 – 1870 MHz (D)

BLOCK 5: 1890 – 1895 MHz (F)

BLOCK 3: 1870 – 1885 MHz (B)

BLOCK 6: 1895 – 1910 MHz (C)

3.7 Spurious and Harmonic Emissions at Antenna Terminal

§2.1051, 22.917(a), 24.238(a)

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic.

FCC ID: ACJ9TGCF-527	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 GSM/EDGE/CDMA/WCDMA TEST REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0912152256.ACJ	Test Dates: December 28, 2009 - January 29, 2010	EUT Type: Toughbook Model: CF-52mk3		Page 7 of 81

3.8 Radiated Spurious and Harmonic Emissions

§2.1053, 22.917(a), 24.238(a)

Effective Radiated Power Output Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. The conducted power at the terminals of the dipole is measured. The ERP is recorded.

Equivalent Isotropic Radiated Power Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

A Horn antenna was substituted in place of the EUT. This Horn antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. The conducted power at the terminals of the Horn antenna is measured. The difference between the gain of the horn and an isotropic antenna is taken into consideration and the EIRP is recorded.

Spurious and harmonic radiated emissions are measured outdoors at our 3-meter test range. The equipment under test is placed on a wooden turntable 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer reading. This level is recorded. For readings above 1 GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration. This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. In CDMA mode, this device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits.

3.9 Peak-Average Ratio

§24.232(d)

A peak to average ratio measurement is performed at the conducted port of the EUT. For CDMA and WCDMA signals, the spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level. For GSM signals, an average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a bandwidth greater than the emission bandwidth.

FCC ID: ACJ9TGCF-527		FCC Pt. 22/24 GSM/EDGE/CDMA/WCDMA TEST REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0912152256.ACJ	Test Dates: December 28, 2009 - January 29, 2010	EUT Type: Toughbook Model: CF-52mk3		Page 8 of 81

3.10 Frequency Stability / Temperature Variation

§2.1055, 22.355, 24.235

The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Specification – The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency.

Time Period and Procedure:

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

FCC ID: ACJ9TGCF-527		FCC Pt. 22/24 GSM/EDGE/CDMA/WCDMA TEST REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0912152256.ACJ	Test Dates: December 28, 2009 - January 29, 2010	EUT Type: Toughbook Model: CF-52mk3		Page 9 of 81

4.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	263-10dB	(DC-18GHz) 10 dB Attenuator	N/A		N/A	N/A
-	No.166	(1000-26500MHz) Microwave RF Cable	N/A		N/A	N/A
-	No.167	(100kHz - 100MHz) RG58 Coax Cable	N/A		N/A	N/A
Agilent	11713A	Attenuation/Switch Driver	12/2/2009	Annual	12/2/2010	3439A02645
Agilent	8449B	(1-26.5GHz) Pre-Amplifier	12/2/2009	Annual	12/2/2010	3008A00985
Agilent	8495A	(0-70dB) DC-4GHz Attenuator	N/A		N/A	N/A
Agilent	85650A	Quasi-Peak Adapter	12/2/2009	Annual	12/2/2010	3303A01872
Agilent	85650A	Quasi-Peak Adapter	3/24/2009	Annual	3/24/2010	2043A00301
Agilent	8566B	(100Hz-22GHz) Spectrum Analyzer	12/2/2009	Annual	12/2/2010	3638A08713
Agilent	8648D	(9kHz-4GHz) Signal Generator	9/19/2009	Biennial	9/19/2011	3613A00315
Agilent	E4407B	ESA Spectrum Analyzer	9/28/2009	Annual	9/28/2010	US39210313
Agilent	E4432B	ESG-D Series Signal Generator	9/10/2009	Annual	9/10/2010	US40053896
Agilent	E4448A	PSA (3Hz-50GHz) Spectrum Analyzer	10/1/2009	Annual	10/1/2010	US42510244
Agilent	E5515C	Wireless Communications Test Set	9/10/2009	Annual	9/10/2010	GB46110872
Agilent	E5515C	Wireless Communications Test Set	9/11/2009	Annual	9/11/2010	GB46310798
Agilent	E5515C	Wireless Communications Test Set	8/25/2009	Annual	8/25/2010	GB41450275
Agilent	E8257D	(250kHz-20GHz) Signal Generator	3/25/2009	Biennial	3/25/2011	MY45470194
Agilent	E8267C	Vector Signal Generator	9/29/2009	Biennial	9/29/2011	US42340152
Agilent	N9020A	MXA Signal Analyzer	10/22/2009	Annual	10/22/2010	US46470561
Emco	3115	Horn Antenna (1-18GHz)	10/14/2009	Biennial	10/14/2011	9704-5182
Espec	ESX-2CA	Environmental Chamber	3/30/2009	Annual	3/30/2010	17620
Gigatronics	80701A	(0.05-18GHz) Power Sensor	9/9/2009	Annual	9/9/2010	1833460
Gigatronics	8651A	Universal Power Meter	9/9/2009	Annual	9/9/2010	8650319
K & L	11SH10	Band Pass Filter	N/A	Annual	N/A	1300/4000
K & L	11SH10	Band Pass Filter	N/A	Annual	N/A	4000/12000
MiniCircuits	VHF-1300+	High Pass Filter	N/A		N/A	30716
MiniCircuits	VHF-3100+	High Pass Filter	N/A		N/A	30721
Pasternack	PE2208-6	Bidirectional Coupler	N/A		N/A	N/A
Rohde & Schwarz	CMU200	Base Station Simulator	9/11/2009	Annual	9/11/2010	836371/0079
Rohde & Schwarz	CMU200	Base Station Simulator	9/4/2009	Annual	9/4/2010	109892
Schwarzbeck	UHA9105	Dipole Antenna (400 - 1GHz) Rx	7/17/2009	Biennial	7/17/2011	9105-2404
Schwarzbeck	UHA9105	Dipole Antenna (400 - 1GHz) Tx	7/17/2009	Biennial	7/17/2011	9105-2403
Sunol	DRH-118	Horn Antenna (1 - 18GHz)	5/14/2009	Biennial	5/14/2011	A050307
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	7/17/2009	Biennial	7/17/2011	A051107
Rohde & Schwarz	CMU200	Base Station Simulator	6/12/2009	Annual	6/12/2010	836536/0005
Rohde & Schwarz	FSQ 26	Spectrum Analyzer	9/19/2009	Annual	9/19/2010	200452
Rohde & Schwarz	CMW500	LTE Base Station Simulator	8/25/2009	Annual	8/25/2010	100976
Anritsu	ML2495A	Power Meter	10/12/2009	Annual	10/12/2010	941001

Table 4-1. Test Equipment

FCC ID: ACJ9TGCF-527		FCC Pt. 22/24 GSM/EDGE/CDMA/WCDMA TEST REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0912152256.ACJ	Test Dates: December 28, 2009 - January 29, 2010	EUT Type: Toughbook Model: CF-52mk3		Page 10 of 81

5.0 SAMPLE CALCULATIONS

GSM Emission Designator

Emission Designator = 250KGXW

GSM BW = 250 kHz
 G = Phase Modulation
 X = Cases not otherwise covered
 W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M16F9W

WCDMA BW = 4.16 MHz
 F = Frequency Modulation
 9 = Composite Digital Info
 W = Combination (Audio/Data) (Measured at the 99.75% power bandwidth)

CDMA Emission Designator

Emission Designator = 1M27F9W

CDMA BW = 1.27 MHz
 F = Frequency Modulation
 9 = Composite Digital Info
 W = Combination (Audio/Data) (Measured at the 99.75% power bandwidth)

Spurious Radiated Emission - PCS Band

Example: GSM Channel 512 PCS Mode 2nd Harmonic (3700.40 MHz)

The receive analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the power meter. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 3700.40 MHz. So 6.1 dB is added to the power meter reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.501 dBm so this harmonic was 25.501 dBm - (-24.80) = 50.3 dBc.

FCC ID: ACJ9TGCF-527		FCC Pt. 22/24 GSM/EDGE/CDMA/WCDMA TEST REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0912152256.ACJ	Test Dates: December 28, 2009 - January 29, 2010	EUT Type: Toughbook Model: CF-52mk3		Page 11 of 81

6.0 TEST RESULTS

6.1 Summary

Company Name: Panasonic Corporation of North America
 FCC ID: ACJ9TGCF-527
 FCC Classification: PCS Licensed Transmitter (PCB)
 Mode(s): GSM/EDGE/CDMA/WCDMA

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
TRANSMITTER MODE (TX)					
2.1049, 22.917(a), 24.238(a)	Occupied Bandwidth	N/A	CONDUCTED	PASS	Section 7.0
2.1051, 22.917(a), 24.238(a)	Band Edge / Conducted Spurious Emissions	$< 43 + \log_{10}(P[\text{Watts}])$ at Band Edge and for all out-of-band emissions		PASS	Section 7.0
24.232(d)	Peak-Average Ratio	$< 13 \text{ dB}$		PASS	Section 7.0
2.1046	GSM/WCDMA/CDMA Conducted Output Powers	N/A		PASS	Section 6.2
22.913(a)(2)	Effective Radiated Power	$< 7 \text{ Watts max. ERP}$ ($< 6.3 \text{ Watts max. ERP (IC)}$)	RADIATED	PASS	Section 6.3
24.232(c)	Equivalent Isotropic Radiated Power	$< 2 \text{ Watts max. EIRP}$		PASS	Section 6.4
2.1053, 22.917(a), 24.238(a)	Undesirable Emissions	$< 43 + \log_{10}(P[\text{Watts}])$ for all out-of-band emissions		PASS	Sections 6.5, 6.6, 6.7, 6.8, 6.9, 6.10
2.1055, 22.355, 24.235	Frequency Stability	$< 2.5 \text{ ppm}$		PASS	Sections 6.11, 6.12, 6.13, 6.14, 6.15, 6.16

Table 6-1. Summary of Test Results

FCC ID: ACJ9TGCF-527		FCC Pt. 22/24 GSM/EDGE/CDMA/WCDMA TEST REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0912152256.ACJ	Test Dates: December 28, 2009 - January 29, 2010	EUT Type: Toughbook Model: CF-52mk3		Page 12 of 81

6.2 Conducted Output Power

§2.1046

A base station simulator (Rhode and Schwartz Model: CMU200) was used to establish communication with the **Panasonic Toughbook Model: CF-52 FCC ID: ACJ9TGCF-527**. The base station simulator parameters were set to produce the maximum power from the EUT. This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode and using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. In CDMA mode, this device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits. The GSM, WCDMA, and CDMA conducted powers are reported below, respectively.

		RF Conducted Power Table			
		GPRS Data		EDGE Data	
Band	Channel	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot
Cellular	128	32.90	32.84	27.82	27.79
	190	32.58	32.55	27.57	27.54
	251	32.09	32.05	27.19	27.16
PCS	512	29.79	29.74	20.80	20.81
	661	30.18	30.12	21.20	21.16
	810	30.11	30.05	21.21	21.16

Table 6-2. GSM Conducted Output Powers

Mode	3GPP 34.121 Subtest	Cellular Band [dBm]			PCS Band [dBm]		
		4132	4183	4233	9262	9400	9538
WCDMA	12.2 kbps RMC	24.67	24.51	24.46	24.32	24.38	24.02
HSDPA	Subtest 1	24.65	24.48	24.42	24.27	24.36	24.01
	Subtest 2	24.69	24.50	24.41	24.15	24.42	24.00
	Subtest 3	24.15	23.95	23.84	23.78	23.95	23.48
	Subtest 4	24.17	23.98	23.86	23.82	23.98	23.48
HSUPA	Subtest 1	24.63	24.43	24.42	24.35	24.45	23.87
	Subtest 2	22.62	22.40	22.38	22.32	22.43	21.89
	Subtest 3	23.65	23.36	23.37	23.31	23.40	22.81
	Subtest 4	22.57	22.33	22.32	22.24	22.47	21.90
	Subtest 5	24.59	24.34	24.31	24.27	24.41	23.81

Table 6-3. WCDMA Conducted Output Powers

FCC ID: ACJ9TGCF-527		FCC Pt. 22/24 GSM/EDGE/CDMA/WCDMA TEST REPORT (CERTIFICATION)				Reviewed by: Quality Manager
Test Report S/N: 0912152256.ACJ	Test Dates: December 28, 2009 - January 29, 2010	EUT Type: Toughbook Model: CF-52mk3				Page 13 of 81

Band	Channel	TDSO SO32 [dBm]	1x EvDO Rev. 0 [dBm]	1x EvDO Rev. 0 [dBm]	1x EvDO Rev. A [dBm]	1x EvDO Rev. A [dBm]
	F-RC	RC3	(FTAP)	(RTAP)	(FETAP)	(RETAP)
	Vocoder Rate	N/A	N/A	N/A	N/A	N/A
Cellular	1013	24.68	24.76	24.15	24.97	23.86
	384	24.58	24.38	23.67	24.61	23.72
	777	24.57	24.36	23.67	24.57	23.67
PCS	25	25.04	24.98	24.76	25.17	24.24
	600	25.08	24.90	25.00	25.07	24.28
	1175	25.11	24.87	24.63	24.94	24.01

Table 6-4. CDMA Conducted Output Powers

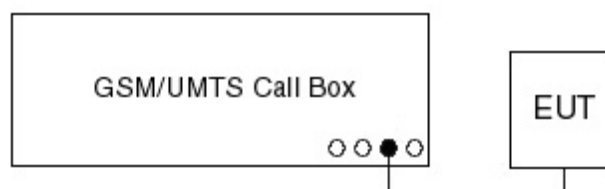


Figure 6-1. GSM/WCDMA/CDMA Conducted Power Test Setup Diagram

FCC ID: ACJ9TGCF-527	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 GSM/EDGE/CDMA/WCDMA TEST REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0912152256.ACJ	Test Dates: December 28, 2009 - January 29, 2010	EUT Type: Toughbook Model: CF-52mk3		Page 14 of 81

6.3 Effective Radiated Power Output Data

§22.913(a)(2)

POWER: PCL "5" (Cellular GSM Mode)

Frequency [MHz]	Mode	Measured Level [dBm]	Substitute Level [dBm]	Antenna Gain [dBd]	Pol [H/V]	ERP [dBm]	ERP [Watts]	Battery Type
824.20	GSM850	-11.520	28.03	0.00	H	28.03	0.635	Standard
836.60	GSM850	-9.680	29.87	0.00	H	29.87	0.971	Standard
848.80	GSM850	-9.200	30.35	0.00	H	30.35	1.084	Standard
848.80	EDGE850	-12.450	27.10	0.00	H	27.10	0.513	Standard

Table 6-5. Effective Radiated Power Output Data (GSM)

POWER: All "1" bits (Cellular WCDMA Mode)

Frequency [MHz]	Mode	Measured Level [dBm]	Substitute Level [dBm]	Antenna Gain [dBd]	Pol [H/V]	ERP [dBm]	ERP [Watts]	Battery Type
826.40	WCDMA850	-13.430	25.52	0.00	V	25.52	0.356	Standard
836.60	WCDMA850	-13.440	25.51	0.00	V	25.51	0.356	Standard
846.60	WCDMA850	-13.740	25.21	0.00	V	25.21	0.332	Standard

Table 6-6. Effective Radiated Power Output Data (WCDMA)

POWER: All "1" bits (Cellular CDMA Mode)

Frequency [MHz]	Mode	Measured Level [dBm]	Substitute Level [dBm]	Antenna Gain [dBd]	Pol [H/V]	ERP [dBm]	ERP [Watts]	Battery Type
824.70	CDMA850	-14.140	24.81	0.00	V	24.81	0.303	Standard
836.52	CDMA850	-13.640	25.31	0.00	V	25.31	0.340	Standard
848.31	CDMA850	-12.920	26.03	0.00	V	26.03	0.401	Standard

Table 6-7. Effective Radiated Power Output Data (CDMA)

FCC ID: ACJ9TGCF-527		FCC Pt. 22/24 GSM/EDGE/CDMA/WCDMA TEST REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0912152256.ACJ	Test Dates: December 28, 2009 - January 29, 2010	EUT Type: Toughbook Model: CF-52mk3		Page 15 of 81

6.4 Equivalent Isotropic Radiated Power Output Data

§24.232(c)

POWER: PCL "0" (PCS GSM Mode)

Frequency [MHz]	Mode	Measured Level [dBm]	Substitute Level [dBm]	Antenna Gain [dBi]	Pol [H/V]	EIRP [dBm]	EIRP [Watts]	Battery Type
1850.20	GSM1900	-11.330	22.60	8.00	V	30.60	1.148	Standard
1880.00	GSM1900	-12.470	21.46	8.00	V	29.46	0.883	Standard
1909.80	GSM1900	-13.360	20.57	8.00	V	28.57	0.719	Standard
1850.20	EDGE1900	-13.410	20.52	8.00	V	28.52	0.711	Standard

Table 6-8. Equivalent Isotropic Radiated Power Output Data (GSM)

POWER: All "1" bits (PCS WCDMA Mode)

Frequency [MHz]	Mode	Measured Level [dBm]	Substitute Level [dBm]	Antenna Gain [dBi]	Pol [H/V]	EIRP [dBm]	EIRP [Watts]	Battery Type
1852.40	WCDMA1900	-12.850	21.41	8.00	V	29.41	0.873	Standard
1880.00	WCDMA1900	-13.500	20.76	8.00	V	28.76	0.752	Standard
1907.60	WCDMA1900	-13.370	20.89	8.00	V	28.89	0.774	Standard

Table 6-9. Equivalent Isotropic Radiated Power Output Data (WCDMA)

POWER: All "1" bits (PCS CDMA Mode)

Frequency [MHz]	Mode	Measured Level [dBm]	Substitute Level [dBm]	Antenna Gain [dBi]	Pol [H/V]	EIRP [dBm]	EIRP [Watts]	Battery Type
1851.25	CDMA1900	-13.500	20.76	8.00	V	28.76	0.752	Standard
1880.00	CDMA1900	-14.680	19.58	8.00	V	27.58	0.573	Standard
1908.75	CDMA1900	-14.060	20.20	8.00	V	28.20	0.661	Standard

Table 6-10. Equivalent Isotropic Radiated Power Output Data (CDMA)

FCC ID: ACJ9TGCF-527		FCC Pt. 22/24 GSM/EDGE/CDMA/WCDMA TEST REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0912152256.ACJ	Test Dates: December 28, 2009 - January 29, 2010	EUT Type: Toughbook Model: CF-52mk3		Page 16 of 81

6.5 Cellular GSM Radiated Measurements

§2.1053, 22.917(a)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 824.20 MHz
 CHANNEL: 128
 MEASURED OUTPUT POWER: 30.350 dBm = 1.084 W
 MODULATION SIGNAL: GSM (Internal)
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 43.35 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1648.40	-56.93	6.08	-50.85	H	81.2
2472.60	-47.46	6.53	-40.93	H	71.3
3296.80	-58.48	6.87	-51.61	H	82.0
4121.00	-91.04	7.21	-83.83	H	114.2
4945.20	-89.75	8.37	-81.38	H	111.7

Table 6-11. Radiated Spurious Data (Cellular GSM Mode – Ch. 128)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. Final power measurements are made with a broadband average power meter. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. This spurious level is recorded using the power meter. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. In CDMA mode, this device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits. This unit was tested with its standard battery.

FCC ID: ACJ9TGCF-527		FCC Pt. 22/24 GSM/EDGE/CDMA/WCDMA TEST REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0912152256.ACJ	Test Dates: December 28, 2009 - January 29, 2010	EUT Type: Toughbook Model: CF-52mk3		Page 17 of 81

Cellular GSM Radiated Measurements (Cont'd)

§2.1053, 22.917(a)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 836.60 MHz
 CHANNEL: 190
 MEASURED OUTPUT POWER: 30.350 dBm = 1.084 W
 MODULATION SIGNAL: GSM (Internal)
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 43.35 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1673.20	-57.09	6.09	-51.00	H	81.4
2509.80	-46.11	6.55	-39.56	H	69.9
3346.40	-57.69	6.89	-50.80	H	81.1
4183.00	-91.23	7.43	-83.80	H	114.1
5019.60	-89.39	8.35	-81.04	H	111.4

Table 6-12. Radiated Spurious Data (Cellular GSM Mode – Ch. 190)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. Final power measurements are made with a broadband average power meter. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. This spurious level is recorded using the power meter. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. In CDMA mode, this device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits. This unit was tested with its standard battery.

FCC ID: ACJ9TGCF-527		FCC Pt. 22/24 GSM/EDGE/CDMA/WCDMA TEST REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0912152256.ACJ	Test Dates: December 28, 2009 - January 29, 2010	EUT Type: Toughbook Model: CF-52mk3		Page 18 of 81

Cellular GSM Radiated Measurements (Cont'd)

§2.1053, 22.917(a)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 848.80 MHz
 CHANNEL: 251
 MEASURED OUTPUT POWER: 30.350 dBm = 1.084 W
 MODULATION SIGNAL: GSM (Internal)
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 43.35 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1697.60	-56.75	6.09	-50.66	H	81.0
2546.40	-50.09	6.57	-43.52	H	73.9
3395.20	-57.61	6.91	-50.70	H	81.0
4244.00	-91.42	7.65	-83.77	H	114.1
5092.80	-89.10	8.33	-80.76	H	111.1

Table 6-13. Radiated Spurious Data (Cellular GSM Mode – Ch. 251)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. Final power measurements are made with a broadband average power meter. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. This spurious level is recorded using the power meter. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. In CDMA mode, this device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits. This unit was tested with its standard battery.

FCC ID: ACJ9TGCF-527		FCC Pt. 22/24 GSM/EDGE/CDMA/WCDMA TEST REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0912152256.ACJ	Test Dates: December 28, 2009 - January 29, 2010	EUT Type: Toughbook Model: CF-52mk3		Page 19 of 81

6.6 Cellular WCDMA Radiated Measurements

§2.1053, 22.917(a)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 826.40 MHz
 CHANNEL: 4132
 MEASURED OUTPUT POWER: 25.520 dBm = 0.356 W
 MODULATION SIGNAL: WCDMA (Internal)
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 38.52 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1652.80	-63.80	6.08	-57.72	H	83.2
2479.20	-52.39	6.54	-45.85	H	71.4
3305.60	-57.75	6.88	-50.87	H	76.4
4132.00	-54.54	7.25	-47.30	H	72.8
4958.40	-53.22	8.37	-44.85	H	70.4

Table 6-14. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4132)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. Final power measurements are made with a broadband average power meter. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. This spurious level is recorded using the power meter. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. In CDMA mode, this device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits. This unit was tested with its standard battery.

FCC ID: ACJ9TGCF-527		FCC Pt. 22/24 GSM/EDGE/CDMA/WCDMA TEST REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0912152256.ACJ	Test Dates: December 28, 2009 - January 29, 2010	EUT Type: Toughbook Model: CF-52mk3		Page 20 of 81

Cellular WCDMA Radiated Measurements (Cont'd)

§2.1053, 22.917(a)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 836.60 MHz
 CHANNEL: 4183
 MEASURED OUTPUT POWER: 25.520 dBm = 0.356 W
 MODULATION SIGNAL: WCDMA (Internal)
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 38.52 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1673.20	-62.81	6.09	-56.72	H	82.2
2509.80	-56.24	6.55	-49.69	H	75.2
3346.40	-93.21	6.89	-86.32	H	111.8
4183.00	-53.67	7.40	-46.27	H	71.8
5019.60	-52.87	8.35	-44.52	H	70.0

Table 6-15. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4183)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. Final power measurements are made with a broadband average power meter. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. This spurious level is recorded using the power meter. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. In CDMA mode, this device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits. This unit was tested with its standard battery.

FCC ID: ACJ9TGCF-527		FCC Pt. 22/24 GSM/EDGE/CDMA/WCDMA TEST REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0912152256.ACJ	Test Dates: December 28, 2009 - January 29, 2010	EUT Type: Toughbook Model: CF-52mk3		Page 21 of 81

Cellular WCDMA Radiated Measurements (Cont'd)

§2.1053, 22.917(a)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 846.60 MHz
 CHANNEL: 4233
 MEASURED OUTPUT POWER: 25.520 dBm = 0.356 W
 MODULATION SIGNAL: WCDMA (Internal)
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 38.52 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1693.20	-58.68	6.09	-52.59	H	78.1
2539.80	-56.73	6.57	-50.16	H	75.7
3386.40	-55.44	6.91	-48.53	H	74.1
4233.00	-55.54	7.62	-47.92	H	73.4
5079.60	-51.75	8.33	-43.41	H	68.9

Table 6-16. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4233)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. Final power measurements are made with a broadband average power meter. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. This spurious level is recorded using the power meter. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. In CDMA mode, this device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits. This unit was tested with its standard battery.

FCC ID: ACJ9TGCF-527		FCC Pt. 22/24 GSM/EDGE/CDMA/WCDMA TEST REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0912152256.ACJ	Test Dates: December 28, 2009 - January 29, 2010	EUT Type: Toughbook Model: CF-52mk3		Page 22 of 81

6.7 Cellular CDMA Radiated Measurements

§2.1053, 22.917(a)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 824.70 MHz
 CHANNEL: 1013
 MEASURED OUTPUT POWER: 26.030 dBm = 0.401 W
 MODULATION SIGNAL: CDMA (Internal)
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 39.03 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1649.40	-52.12	6.08	-46.04	V	72.1
2474.10	-54.36	6.53	-47.83	V	73.9
3298.80	-57.47	6.87	-50.60	V	76.6
4123.50	-91.05	7.21	-83.83	V	109.9
4948.20	-52.97	8.37	-44.60	V	70.6

Table 6-17. Radiated Spurious Data (Cellular CDMA Mode – Ch. 1013)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method
 according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. Final power measurements are made with a broadband average power meter. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. This spurious level is recorded using the power meter. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. In CDMA mode, this device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits. This unit was tested with its standard battery.

FCC ID: ACJ9TGCF-527		FCC Pt. 22/24 GSM/EDGE/CDMA/WCDMA TEST REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0912152256.ACJ	Test Dates: December 28, 2009 - January 29, 2010	EUT Type: Toughbook Model: CF-52mk3		Page 23 of 81

Cellular CDMA Radiated Measurements (Cont'd)

§2.1053, 22.917(a)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 836.52 MHz
 CHANNEL: 384
 MEASURED OUTPUT POWER: 26.030 dBm = 0.401 W
 MODULATION SIGNAL: CDMA (Internal)
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 39.03 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1673.04	-60.29	6.09	-54.20	V	80.2
2509.56	-53.71	6.55	-47.16	V	73.2
3346.08	-58.39	6.89	-51.50	V	77.5
4182.60	-53.59	7.43	-46.16	V	72.2
5019.12	-52.83	8.35	-44.48	V	70.5

Table 6-18. Radiated Spurious Data (Cellular CDMA Mode – Ch. 384)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method
 according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. Final power measurements are made with a broadband average power meter. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. This spurious level is recorded using the power meter. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. In CDMA mode, this device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits. This unit was tested with its standard battery.

FCC ID: ACJ9TGCF-527		FCC Pt. 22/24 GSM/EDGE/CDMA/WCDMA TEST REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0912152256.ACJ	Test Dates: December 28, 2009 - January 29, 2010	EUT Type: Toughbook Model: CF-52mk3		Page 24 of 81

Cellular CDMA Radiated Measurements (Cont'd)

§2.1053, 22.917(a)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 848.31 MHz
 CHANNEL: 777
 MEASURED OUTPUT POWER: 26.030 dBm = 0.401 W
 MODULATION SIGNAL: CDMA (Internal)
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 39.03 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1696.62	-58.06	6.09	-51.97	V	78.0
2544.93	-58.90	6.57	-52.33	V	78.4
3393.24	-58.41	6.91	-51.50	V	77.5
4241.55	-55.26	7.65	-47.62	V	73.6
5089.86	-46.70	8.33	-38.37	V	64.4

Table 6-19. Radiated Spurious Data (Cellular CDMA Mode – Ch. 777)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method
 according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. Final power measurements are made with a broadband average power meter. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. This spurious level is recorded using the power meter. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. In CDMA mode, this device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits. This unit was tested with its standard battery.

FCC ID: ACJ9TGCF-527		FCC Pt. 22/24 GSM/EDGE/CDMA/WCDMA TEST REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0912152256.ACJ	Test Dates: December 28, 2009 - January 29, 2010	EUT Type: Toughbook Model: CF-52mk3		Page 25 of 81

6.8 PCS GSM Radiated Measurements

§2.1053, 24.238(a)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1850.20 MHz
 CHANNEL: 512
 MEASURED OUTPUT POWER: 30.600 dBm = 1.148 W
 MODULATION SIGNAL: GSM (Internal)
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 43.60 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3700.40	-57.41	9.02	-48.39	H	79.0
5550.60	-55.13	10.40	-44.73	H	75.3
7400.80	-85.65	10.50	-75.14	H	105.7
9251.00	-48.05	11.85	-36.20	H	66.8
11101.20	-82.59	12.76	-69.83	H	100.4

Table 6-20. Radiated Spurious Data (PCS GSM Mode – Ch. 512)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method
 according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. Final power measurements are made with a broadband average power meter. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. This spurious level is recorded using the power meter. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. In CDMA mode, this device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits. This unit was tested with its standard battery.

FCC ID: ACJ9TGCF-527		FCC Pt. 22/24 GSM/EDGE/CDMA/WCDMA TEST REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0912152256.ACJ	Test Dates: December 28, 2009 - January 29, 2010	EUT Type: Toughbook Model: CF-52mk3		Page 26 of 81

PCS GSM Radiated Measurements (Cont'd)

§2.1053, 24.238(a)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1880.00 MHz
 CHANNEL: 661
 MEASURED OUTPUT POWER: 30.600 dBm = 1.148 W
 MODULATION SIGNAL: GSM (Internal)
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 43.60 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3760.00	-57.07	8.99	-48.08	H	78.7
5640.00	-52.73	10.40	-42.33	H	72.9
7520.00	-85.71	10.62	-75.09	H	105.7
9400.00	-49.00	11.70	-37.30	H	67.9
11280.00	-81.79	12.69	-69.10	H	99.7

Table 6-21. Radiated Spurious Data (PCS GSM Mode – Ch. 661)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. Final power measurements are made with a broadband average power meter. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. This spurious level is recorded using the power meter. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. In CDMA mode, this device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits. This unit was tested with its standard battery.

FCC ID: ACJ9TGCF-527		FCC Pt. 22/24 GSM/EDGE/CDMA/WCDMA TEST REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0912152256.ACJ	Test Dates: December 28, 2009 - January 29, 2010	EUT Type: Toughbook Model: CF-52mk3		Page 27 of 81

PCS GSM Radiated Measurements (Cont'd)

§2.1053, 24.238(a)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1909.80 MHz
 CHANNEL: 810
 MEASURED OUTPUT POWER: 30.600 dBm = 1.148 W
 MODULATION SIGNAL: GSM (Internal)
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 43.60 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3819.60	-54.14	8.97	-45.17	H	75.8
5729.40	-55.32	10.40	-44.92	H	75.5
7639.20	-85.67	10.71	-74.96	H	105.6
9549.00	-49.69	11.64	-38.05	H	68.7
11458.80	-80.99	12.62	-68.38	H	99.0

Table 6-22. Radiated Spurious Data (PCS GSM Mode – Ch. 810)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. Final power measurements are made with a broadband average power meter. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. This spurious level is recorded using the power meter. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. In CDMA mode, this device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits. This unit was tested with its standard battery.

FCC ID: ACJ9TGCF-527		FCC Pt. 22/24 GSM/EDGE/CDMA/WCDMA TEST REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0912152256.ACJ	Test Dates: December 28, 2009 - January 29, 2010	EUT Type: Toughbook Model: CF-52mk3		Page 28 of 81

6.9 PCS WCDMA Radiated Measurements

§2.1053, 24.238(a)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1852.40 MHz
 CHANNEL: 9262
 MEASURED OUTPUT POWER: 29.410 dBm = 0.873 W
 MODULATION SIGNAL: WCDMA (Internal)
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 42.41 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3704.80	-32.58	9.01	-23.57	H	53.0
5557.20	-44.43	10.40	-34.03	H	63.4
7409.60	-85.65	10.51	-75.14	H	104.6
9262.00	-85.03	11.83	-73.20	H	102.6
11114.40	-82.53	12.75	-69.78	H	99.2

Table 6-23. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9262)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. Final power measurements are made with a broadband average power meter. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. This spurious level is recorded using the power meter. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. In CDMA mode, this device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits. This unit was tested with its standard battery.

FCC ID: ACJ9TGCF-527		FCC Pt. 22/24 GSM/EDGE/CDMA/WCDMA TEST REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0912152256.ACJ	Test Dates: December 28, 2009 - January 29, 2010	EUT Type: Toughbook Model: CF-52mk3		Page 29 of 81

PCS WCDMA Radiated Measurements (Cont'd)

§2.1053, 24.238(a)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1880.00 MHz
CHANNEL: 9400
MEASURED OUTPUT POWER: 29.410 dBm = 0.873 W
MODULATION SIGNAL: WCDMA (Internal)
DISTANCE: 3 meters
LIMIT: $43 + 10 \log_{10} (W) =$ 42.41 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3760.00	-40.37	8.99	-31.38	H	60.8
5640.00	-50.53	10.40	-40.13	H	69.5
7520.00	-85.71	10.62	-75.09	H	104.5
9400.00	-84.87	11.70	-73.17	H	102.6
11280.00	-81.79	12.69	-69.10	H	98.5

Table 6-24. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9400)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. Final power measurements are made with a broadband average power meter. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. This spurious level is recorded using the power meter. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. In CDMA mode, this device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits. This unit was tested with its standard battery.

FCC ID: ACJ9TGCF-527		FCC Pt. 22/24 GSM/EDGE/CDMA/WCDMA TEST REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0912152256.ACJ	Test Dates: December 28, 2009 - January 29, 2010	EUT Type: Toughbook Model: CF-52mk3		Page 30 of 81

PCS WCDMA Radiated Measurements (Cont'd)

§2.1053, 24.238(a)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1907.60 MHz
CHANNEL: 9538
MEASURED OUTPUT POWER: 29.410 dBm = 0.873 W
MODULATION SIGNAL: WCDMA (Internal)
DISTANCE: 3 meters
LIMIT: $43 + 10 \log_{10} (W) =$ 42.41 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3815.20	-40.67	8.97	-31.70	H	61.1
5722.80	-52.02	10.40	-41.62	H	71.0
7630.40	-85.68	10.71	-74.97	H	104.4
9538.00	-84.72	11.63	-73.08	H	102.5
11445.60	-81.05	12.62	-68.43	H	97.8

Table 6-25. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9538)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. Final power measurements are made with a broadband average power meter. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. This spurious level is recorded using the power meter. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. In CDMA mode, this device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits. This unit was tested with its standard battery.

FCC ID: ACJ9TGCF-527		FCC Pt. 22/24 GSM/EDGE/CDMA/WCDMA TEST REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0912152256.ACJ	Test Dates: December 28, 2009 - January 29, 2010	EUT Type: Toughbook Model: CF-52mk3		Page 31 of 81

6.10 PCS CDMA Radiated Measurements

§2.1053, 24.238(a)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1851.25 MHz
 CHANNEL: 25
 MEASURED OUTPUT POWER: 28.760 dBm = 0.752 W
 MODULATION SIGNAL: CDMA (Internal)
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 41.76 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3702.50	-31.50	9.02	-22.48	H	51.2
5553.75	-44.03	10.40	-33.63	H	62.4
7405.00	-85.65	10.51	-75.14	H	103.9
9256.25	-85.04	11.84	-73.20	H	102.0
11107.50	-82.56	12.76	-69.81	H	98.6

Table 6-26. Radiated Spurious Data (PCS CDMA Mode – Ch. 25)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. Final power measurements are made with a broadband average power meter. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. This spurious level is recorded using the power meter. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. In CDMA mode, this device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits. This unit was tested with its standard battery.

FCC ID: ACJ9TGCF-527		FCC Pt. 22/24 GSM/EDGE/CDMA/WCDMA TEST REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0912152256.ACJ	Test Dates: December 28, 2009 - January 29, 2010	EUT Type: Toughbook Model: CF-52mk3		Page 32 of 81

PCS CDMA Radiated Measurements (Cont'd)

§2.1053, 24.238(a)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1880.00 MHz
 CHANNEL: 600
 MEASURED OUTPUT POWER: 28.760 dBm = 0.752 W
 MODULATION SIGNAL: CDMA (Internal)
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 41.76 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3760.00	-40.57	8.99	-31.58	H	60.3
5640.00	-48.13	10.40	-37.73	H	66.5
7520.00	-47.63	10.62	-37.01	H	65.8
9400.00	-84.87	11.70	-73.17	H	101.9
11280.00	-81.79	12.69	-69.10	H	97.9

Table 6-27. Radiated Spurious Data (PCS CDMA Mode – Ch. 600)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. Final power measurements are made with a broadband average power meter. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. This spurious level is recorded using the power meter. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. In CDMA mode, this device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits. This unit was tested with its standard battery.

FCC ID: ACJ9TGCF-527		FCC Pt. 22/24 GSM/EDGE/CDMA/WCDMA TEST REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0912152256.ACJ	Test Dates: December 28, 2009 - January 29, 2010	EUT Type: Toughbook Model: CF-52mk3		Page 33 of 81

PCS CDMA Radiated Measurements (Cont'd)

§2.1053, 24.238(a)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1908.75 MHz
 CHANNEL: 1175
 MEASURED OUTPUT POWER: 28.760 dBm = 0.752 W
 MODULATION SIGNAL: CDMA (Internal)
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 41.76 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3817.50	-38.05	8.97	-29.08	H	57.8
5726.25	-50.02	10.40	-39.62	H	68.4
7635.00	-85.68	10.71	-74.97	H	103.7
9543.75	-84.71	11.64	-73.08	H	101.8
11452.50	-81.02	12.62	-68.40	H	97.2

Table 6-28. Radiated Spurious Data (PCS CDMA Mode – Ch. 1175)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. Final power measurements are made with a broadband average power meter. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. This spurious level is recorded using the power meter. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. In CDMA mode, this device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits. This unit was tested with its standard battery.

FCC ID: ACJ9TGCF-527		FCC Pt. 22/24 GSM/EDGE/CDMA/WCDMA TEST REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0912152256.ACJ	Test Dates: December 28, 2009 - January 29, 2010	EUT Type: Toughbook Model: CF-52mk3		Page 34 of 81

6.11 Cellular GSM Frequency Stability Measurements

§2.1055, 22.355

OPERATING FREQUENCY: 836,600,000 Hz
 CHANNEL: 190
 REFERENCE VOLTAGE: 11.1 VDC
 DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm


VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	11.10	+ 20 (Ref)	836,600,021	21	0.000003
100 %		- 30	836,599,982	-18	-0.000002
100 %		- 20	836,600,016	16	0.000002
100 %		- 10	836,599,978	-22	-0.000003
100 %		0	836,599,984	-16	-0.000002
100 %		+ 10	836,600,015	15	0.000002
100 %		+ 20	836,600,017	17	0.000002
100 %		+ 30	836,599,981	-19	-0.000002
100 %		+ 40	836,600,021	21	0.000003
100 %		+ 50	836,600,020	20	0.000002
115 %	12.77	+ 20	836,599,982	-18	-0.000002
BATT. ENDPOINT	9.41	+ 20	836,600,022	22	0.000003

Table 6-29. Frequency Stability Data (Cellular GSM Mode – Ch. 190)

FCC ID: ACJ9TGCF-527		FCC Pt. 22/24 GSM/EDGE/CDMA/WCDMA TEST REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0912152256.ACJ	Test Dates: December 28, 2009 - January 29, 2010	EUT Type: Toughbook Model: CF-52mk3		Page 35 of 81

Cellular GSM Frequency Stability Measurements (Cont'd)

§2.1055, 22.355

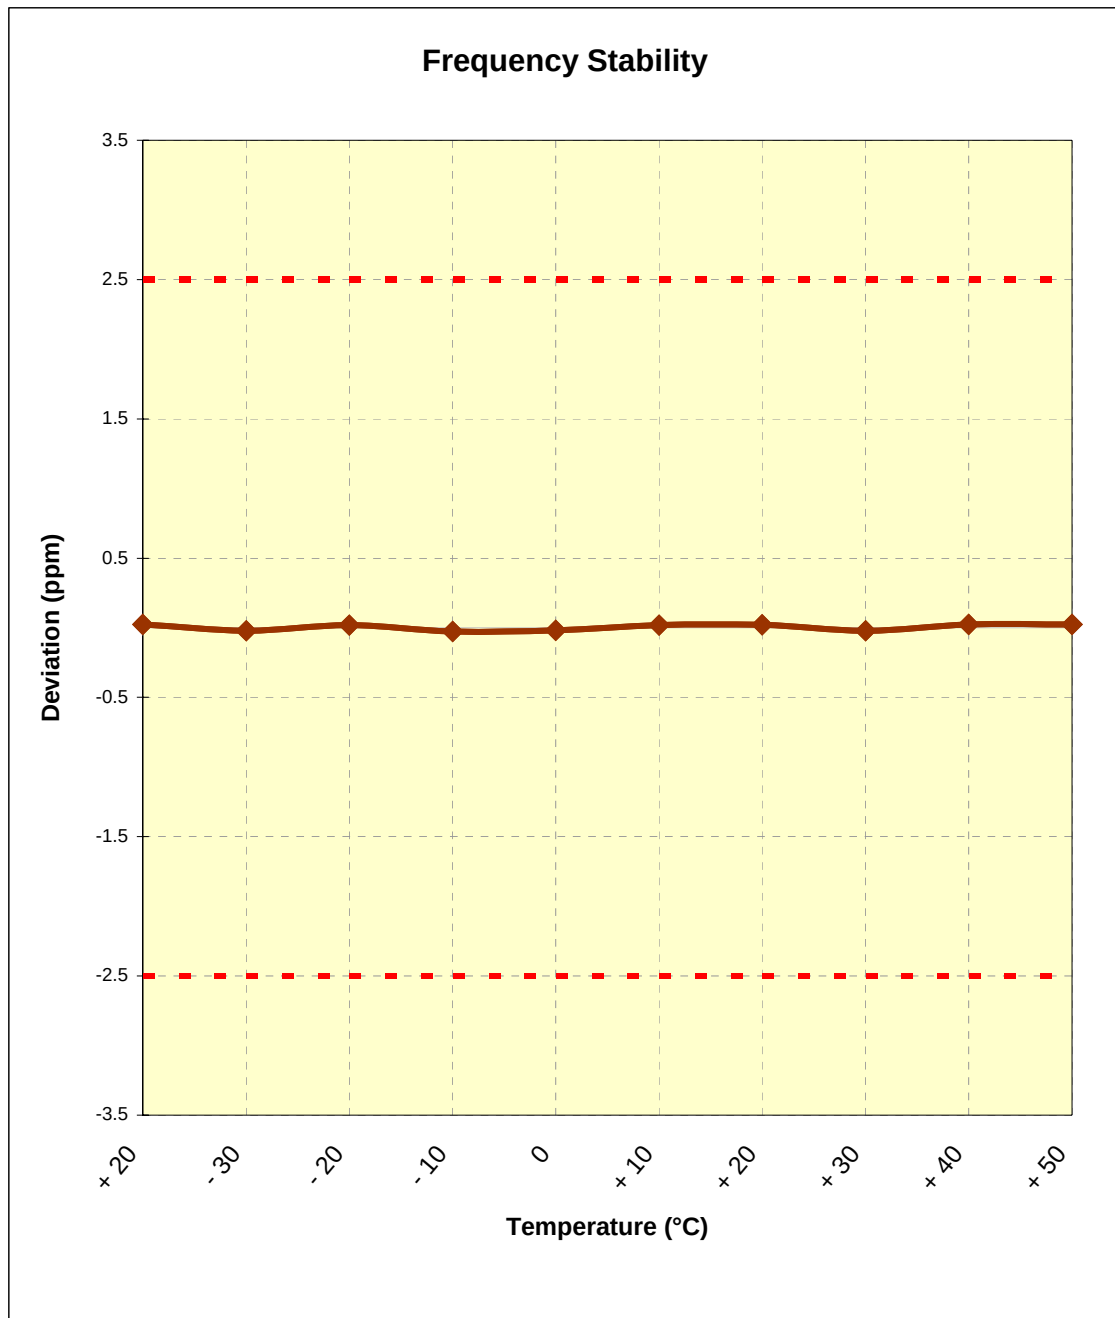

Plot 6-1. Frequency Stability Graph (Cellular GSM Mode – Ch. 190)

FCC ID: ACJ9TGCF-527		FCC Pt. 22/24 GSM/EDGE/CDMA/WCDMA TEST REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0912152256.ACJ	Test Dates: December 28, 2009 - January 29, 2010	EUT Type: Toughbook Model: CF-52mk3	Page 36 of 81	

6.12 Cellular WCDMA Frequency Stability Measurements

§2.1055, 22.355

OPERATING FREQUENCY: 836,600,000 Hz

CHANNEL: 4183

REFERENCE VOLTAGE: 11.1 VDC


DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	11.10	+ 20 (Ref)	836,599,984	-16	-0.000002
100 %		- 30	836,599,992	-8	-0.000001
100 %		- 20	836,599,983	-17	-0.000002
100 %		- 10	836,600,020	20	0.000002
100 %		0	836,600,018	18	0.000002
100 %		+ 10	836,600,019	19	0.000002
100 %		+ 20	836,600,022	22	0.000003
100 %		+ 30	836,599,979	-21	-0.000003
100 %		+ 40	836,599,980	-20	-0.000002
100 %		+ 50	836,599,981	-19	-0.000002
115 %	12.77	+ 20	836,600,020	20	0.000002
BATT. ENDPOINT	9.41	+ 20	836,600,018	18	0.000002

Table 6-30. Frequency Stability Data (Cellular WCDMA Mode – Ch. 4183)

FCC ID: ACJ9TGCF-527		FCC Pt. 22/24 GSM/EDGE/CDMA/WCDMA TEST REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0912152256.ACJ	Test Dates: December 28, 2009 - January 29, 2010	EUT Type: Toughbook Model: CF-52mk3		Page 37 of 81

Cellular WCDMA Frequency Stability Measurements (Cont'd)
§2.1055, 22.355

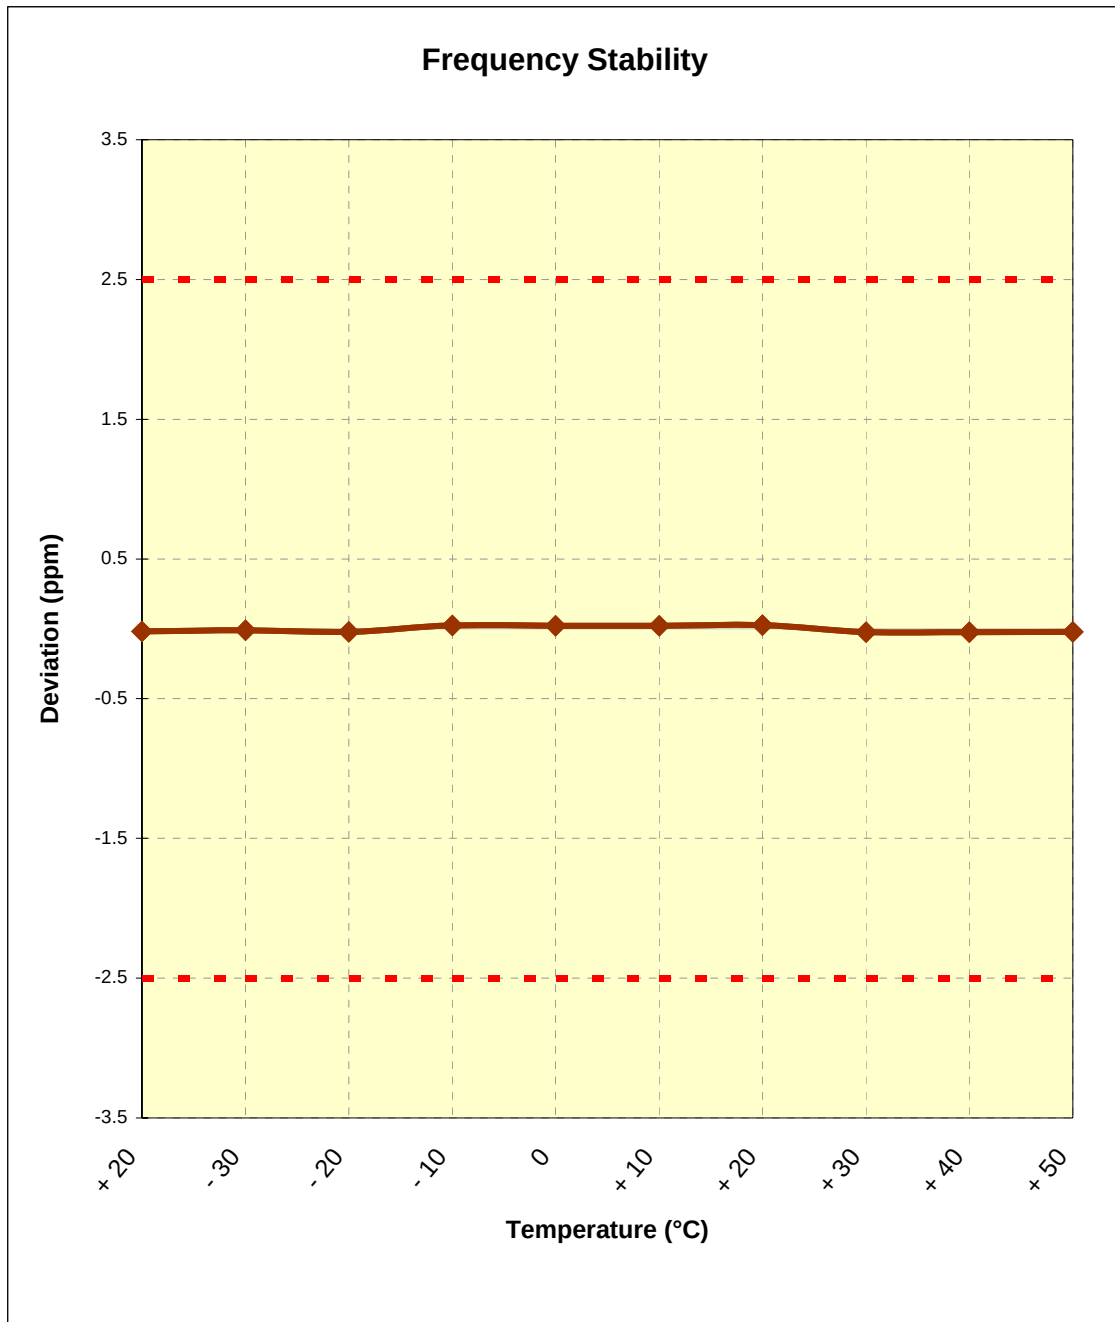

Plot 6-2. Frequency Stability Graph (Cellular WCDMA Mode – Ch. 4183)

FCC ID: ACJ9TGCF-527		FCC Pt. 22/24 GSM/EDGE/CDMA/WCDMA TEST REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0912152256.ACJ	Test Dates: December 28, 2009 - January 29, 2010	EUT Type: Toughbook Model: CF-52mk3	Page 38 of 81	

6.13 Cellular CDMA Frequency Stability Measurements

§2.1055, 22.355

OPERATING FREQUENCY: 836,520,000 Hz

CHANNEL: 384

REFERENCE VOLTAGE: 11.1 VDC

DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm


VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	11.10	+ 20 (Ref)	836,519,983	-17	-0.000002
100 %		- 30	836,519,982	-18	-0.000002
100 %		- 20	836,520,020	20	0.000002
100 %		- 10	836,520,016	16	0.000002
100 %		0	836,519,982	-18	-0.000002
100 %		+ 10	836,520,019	19	0.000002
100 %		+ 20	836,519,982	-18	-0.000002
100 %		+ 30	836,519,983	-17	-0.000002
100 %		+ 40	836,520,020	20	0.000002
100 %		+ 50	836,519,979	-21	-0.000003
115 %	12.77	+ 20	836,519,978	-22	-0.000003
BATT. ENDPOINT	9.41	+ 20	836,520,018	18	0.000002

Table 6-31. Frequency Stability Data (Cellular CDMA Mode – Ch. 384)

FCC ID: ACJ9TGCF-527		FCC Pt. 22/24 GSM/EDGE/CDMA/WCDMA TEST REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0912152256.ACJ	Test Dates: December 28, 2009 - January 29, 2010	EUT Type: Toughbook Model: CF-52mk3		Page 39 of 81

Cellular CDMA Frequency Stability Measurements (Cont'd)

§2.1055, 22.355

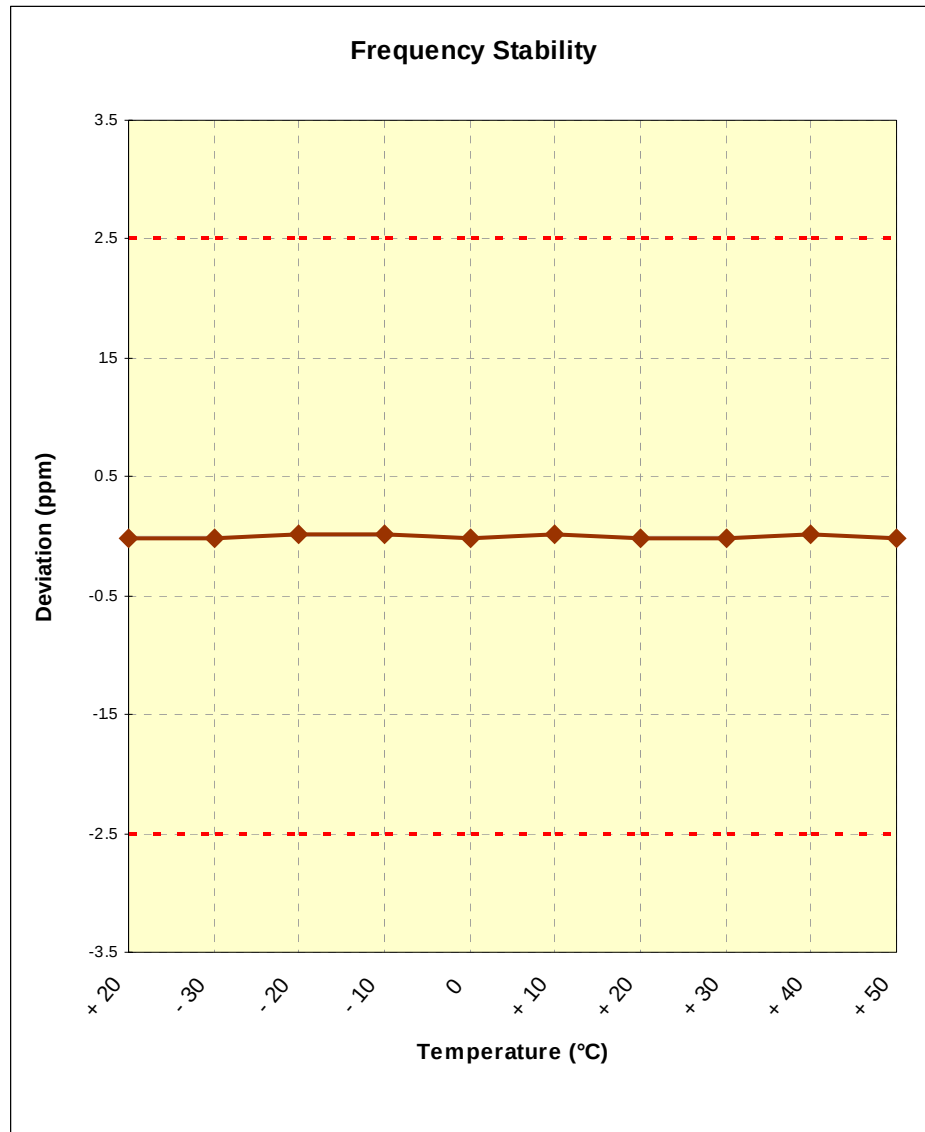

Plot 6-3. Frequency Stability Graph (Cellular CDMA Mode – Ch. 384)

FCC ID: ACJ9TGCF-527	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 GSM/EDGE/CDMA/WCDMA TEST REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0912152256.ACJ	Test Dates: December 28, 2009 - January 29, 2010	EUT Type: Toughbook Model: CF-52mk3		Page 40 of 81

6.14 PCS GSM Frequency Stability Measurements

§2.1055, 24.235

f REQUENCY: 1,880,000,000 Hz

 CHANNEL: 661

REFERENCE VOLTAGE: 11.1 VDC


DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	11.10	+ 20 (Ref)	1,879,999,980	-20	-0.000001
100 %		- 30	1,879,999,978	-22	-0.000001
100 %		- 20	1,879,999,982	-18	-0.000001
100 %		- 10	1,880,000,019	19	0.000001
100 %		0	1,879,999,983	-17	-0.000001
100 %		+ 10	1,880,000,018	18	0.000001
100 %		+ 20	1,880,000,019	19	0.000001
100 %		+ 30	1,879,999,979	-21	-0.000001
100 %		+ 40	1,879,999,980	-20	-0.000001
100 %		+ 50	1,880,000,019	19	0.000001
115 %	12.77	+ 20	1,880,000,018	18	0.000001
BATT. ENDPOINT	9.41	+ 20	1,880,000,018	18	0.000001

Table 6-32. Frequency Stability Data (PCS GSM Mode – Ch. 661)

FCC ID: ACJ9TGCF-527		FCC Pt. 22/24 GSM/EDGE/CDMA/WCDMA TEST REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0912152256.ACJ	Test Dates: December 28, 2009 - January 29, 2010	EUT Type: Toughbook Model: CF-52mk3		Page 41 of 81

PCS GSM Frequency Stability Measurements (Cont'd)
§2.1055, 24.235

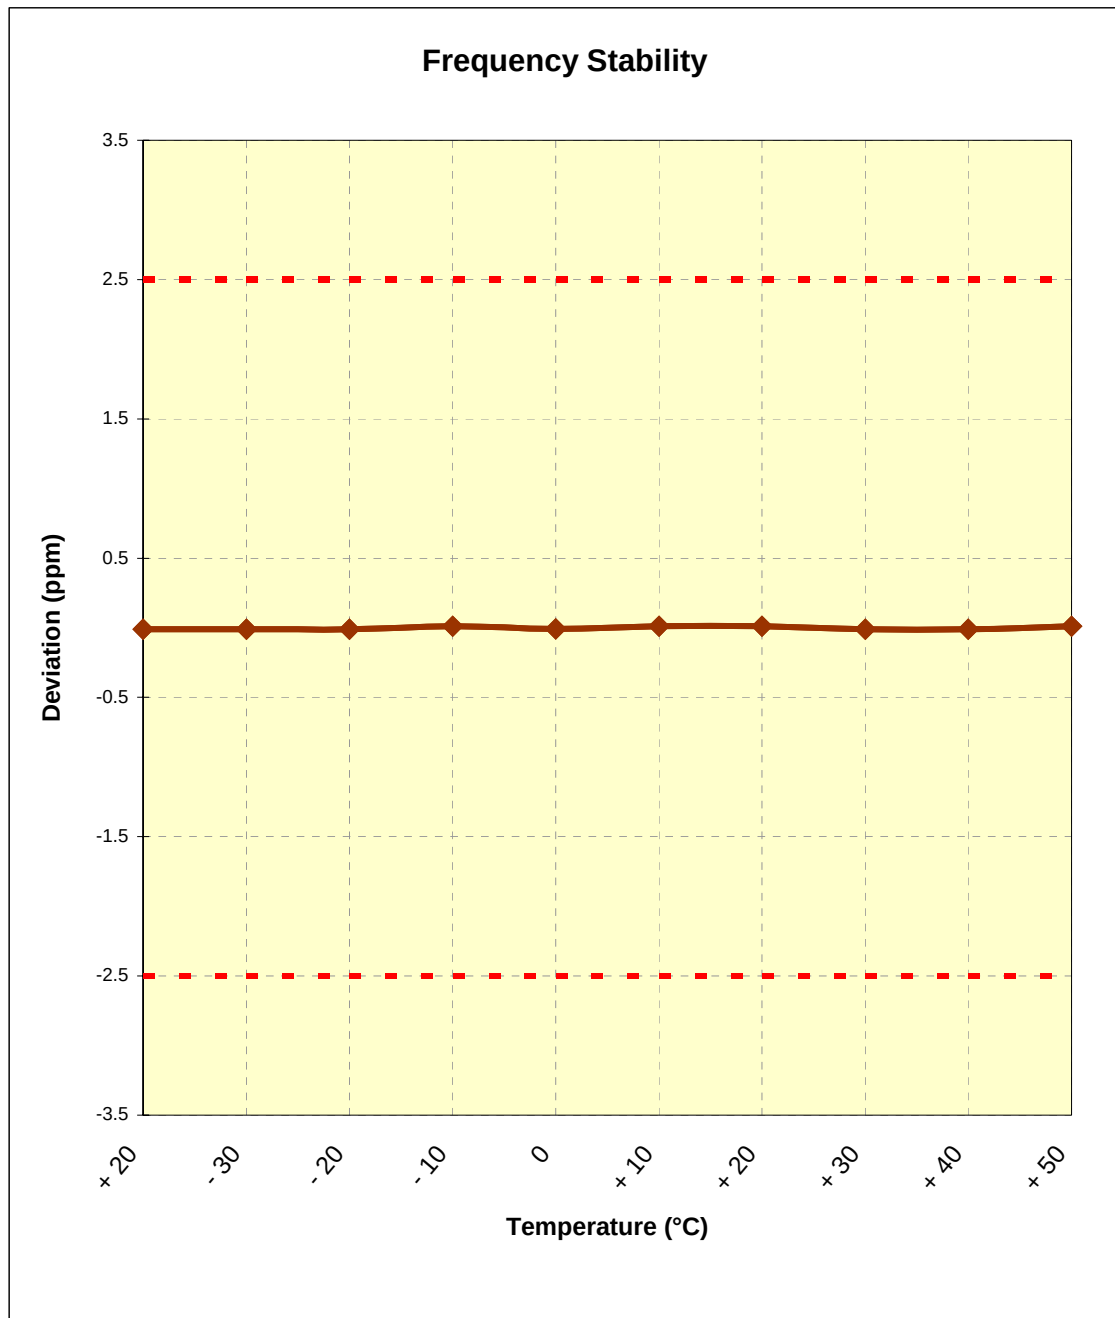

Plot 6-4. Frequency Stability Graph (PCS GSM Mode – Ch. 661)

FCC ID: ACJ9TGCF-527	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 GSM/EDGE/CDMA/WCDMA TEST REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0912152256.ACJ	Test Dates: December 28, 2009 - January 29, 2010	EUT Type: Toughbook Model: CF-52mk3	Page 42 of 81	

6.15 PCS WCDMA Frequency Stability Measurements

§2.1055, 24.235

OPERATING FREQUENCY: 1,880,000,000 Hz

CHANNEL: 9400

REFERENCE VOLTAGE: 11.1 VDC


DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	11.10	+ 20 (Ref)	1,880,000,020	20	0.000001
100 %		- 30	1,879,999,982	-18	-0.000001
100 %		- 20	1,880,000,016	16	0.000001
100 %		- 10	1,879,999,983	-17	-0.000001
100 %		0	1,880,000,018	18	0.000001
100 %		+ 10	1,880,000,018	18	0.000001
100 %		+ 20	1,880,000,016	16	0.000001
100 %		+ 30	1,880,000,018	18	0.000001
100 %		+ 40	1,879,999,981	-19	-0.000001
100 %		+ 50	1,880,000,018	18	0.000001
115 %	12.77	+ 20	1,880,000,022	22	0.000001
BATT. ENDPOINT	9.41	+ 20	1,880,000,020	20	0.000001

Table 6-33. Frequency Stability Data (PCS WCDMA Mode – Ch. 9400)

FCC ID: ACJ9TGCF-527		FCC Pt. 22/24 GSM/EDGE/CDMA/WCDMA TEST REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0912152256.ACJ	Test Dates: December 28, 2009 - January 29, 2010	EUT Type: Toughbook Model: CF-52mk3		Page 43 of 81

PCS WCDMA Frequency Stability Measurements (Cont'd)
§2.1055, 24.235

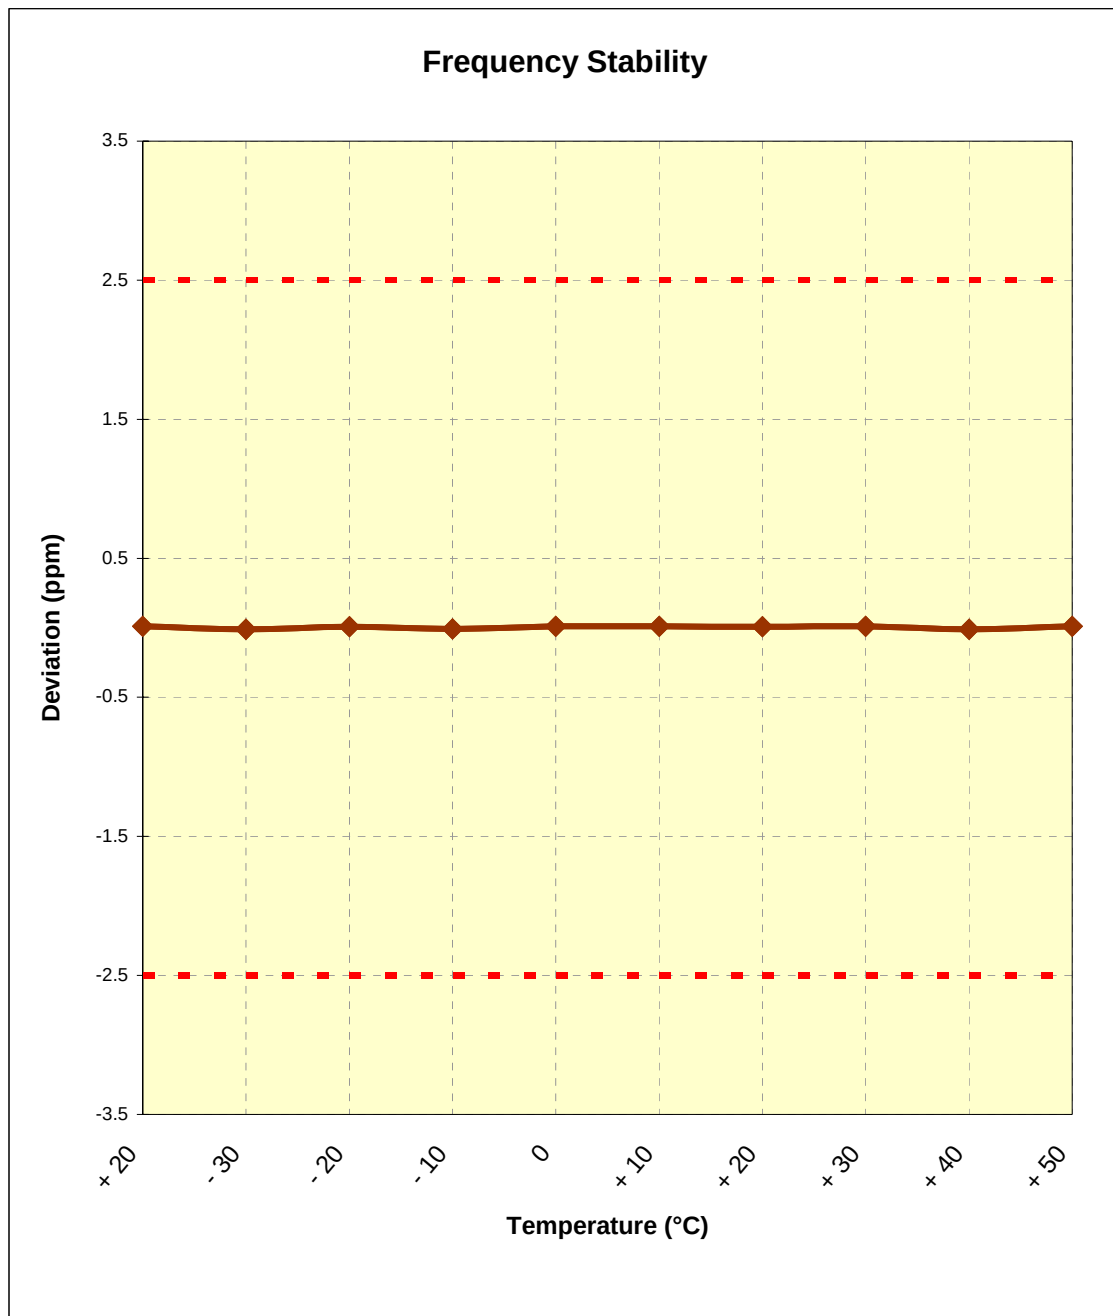

Plot 6-5. Frequency Stability Graph (PCS WCDMA Mode – Ch. 9400)

FCC ID: ACJ9TGCF-527		FCC Pt. 22/24 GSM/EDGE/CDMA/WCDMA TEST REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0912152256.ACJ	Test Dates: December 28, 2009 - January 29, 2010	EUT Type: Toughbook Model: CF-52mk3	Page 44 of 81	

6.16 PCS CDMA Frequency Stability Measurements

§2.1055, 24.235

OPERATING FREQUENCY: 1,880,000,000 Hz

CHANNEL: 600

REFERENCE VOLTAGE: 11.1 VDC


DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	11.10	+ 20 (Ref)	1,879,999,979	-21	-0.000001
100 %		- 30	1,879,999,980	-20	-0.000001
100 %		- 20	1,880,000,018	18	0.000001
100 %		- 10	1,880,000,019	19	0.000001
100 %		0	1,879,999,979	-21	-0.000001
100 %		+ 10	1,879,999,978	-22	-0.000001
100 %		+ 20	1,880,000,020	20	0.000001
100 %		+ 30	1,880,000,018	18	0.000001
100 %		+ 40	1,880,000,019	19	0.000001
100 %		+ 50	1,879,999,979	-21	-0.000001
115 %	12.77	+ 20	1,879,999,977	-23	-0.000001
BATT. ENDPOINT	9.41	+ 20	1,880,000,018	18	0.000001

Table 6-34. Frequency Stability Data (PCS CDMA Mode – Ch. 600)

FCC ID: ACJ9TGCF-527		FCC Pt. 22/24 GSM/EDGE/CDMA/WCDMA TEST REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0912152256.ACJ	Test Dates: December 28, 2009 - January 29, 2010	EUT Type: Toughbook Model: CF-52mk3		Page 45 of 81


PCS CDMA Frequency Stability Measurements (Cont'd)
§2.1055, 24.235

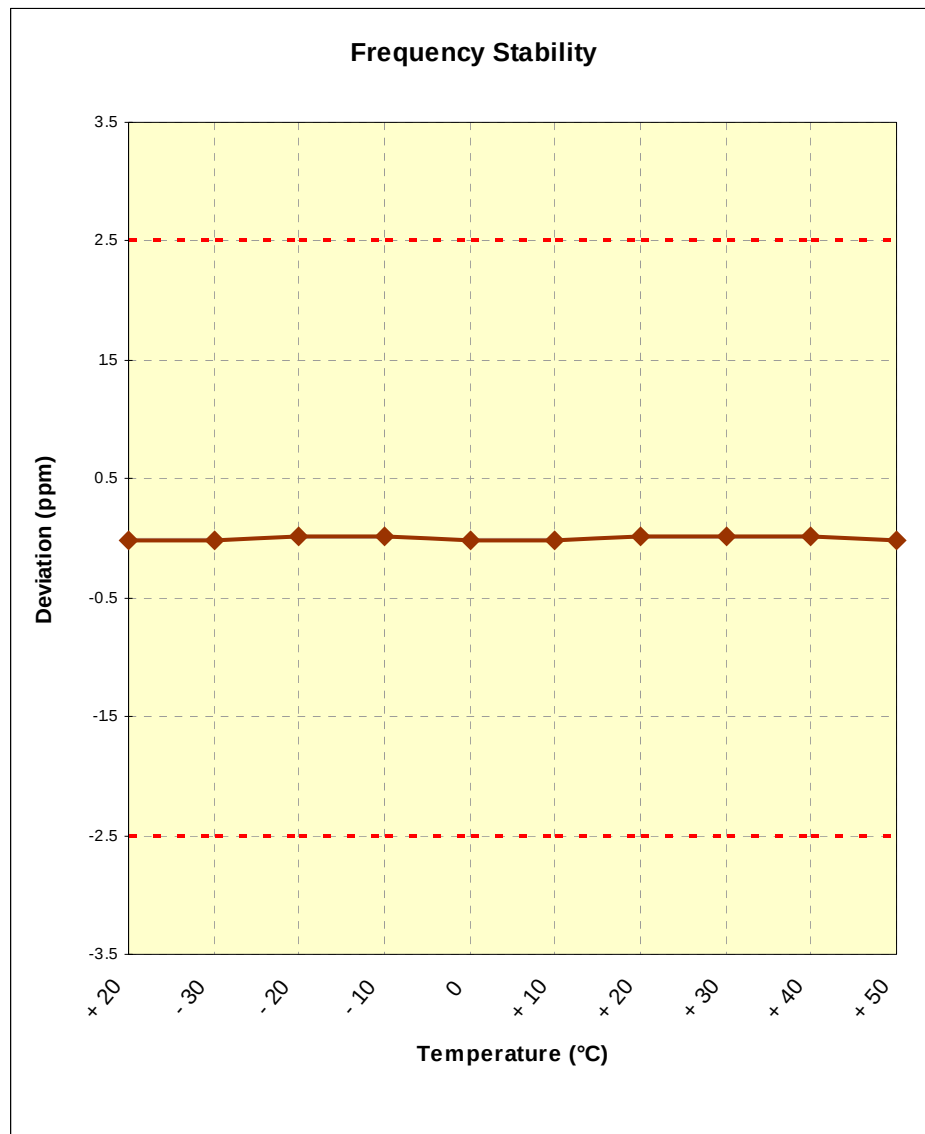


Plot 6-6. Frequency Stability Graph (PCS CDMA Mode – Ch. 600)

FCC ID: ACJ9TGCF-527		FCC Pt. 22/24 GSM/EDGE/CDMA/WCDMA TEST REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0912152256.ACJ	Test Dates: December 28, 2009 - January 29, 2010	EUT Type: Toughbook Model: CF-52mk3	Page 46 of 81	

7.0 PLOTS OF EMISSIONS

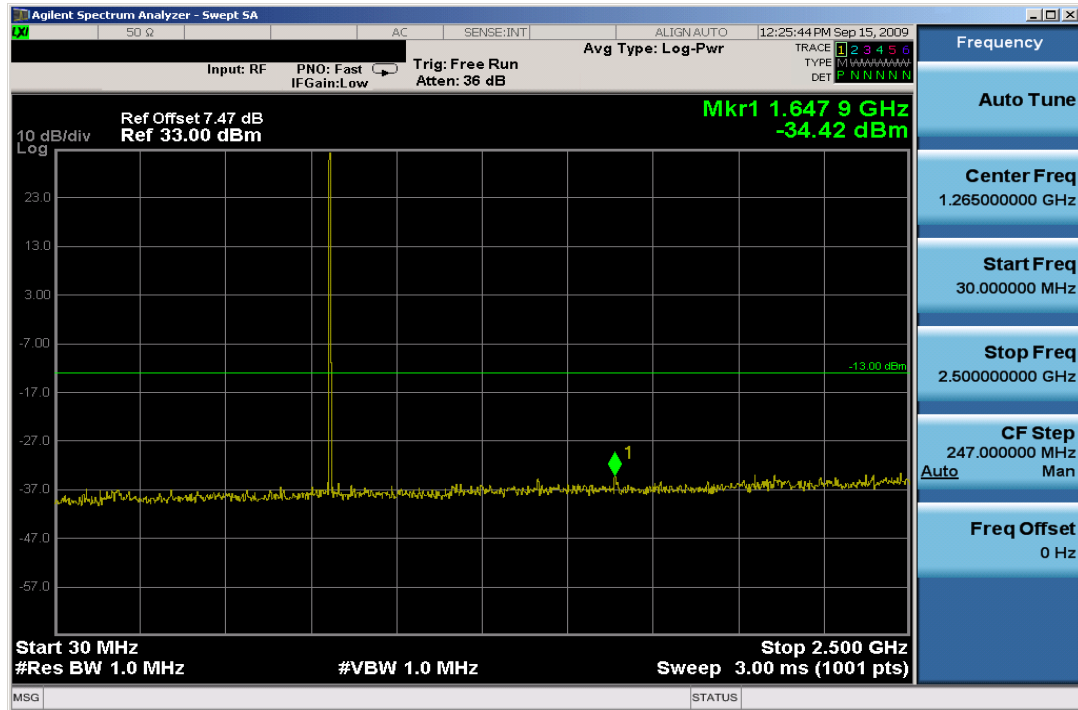


Plot 7-1. Conducted Spurious Plot (Cellular GSM Mode – Ch. 128)

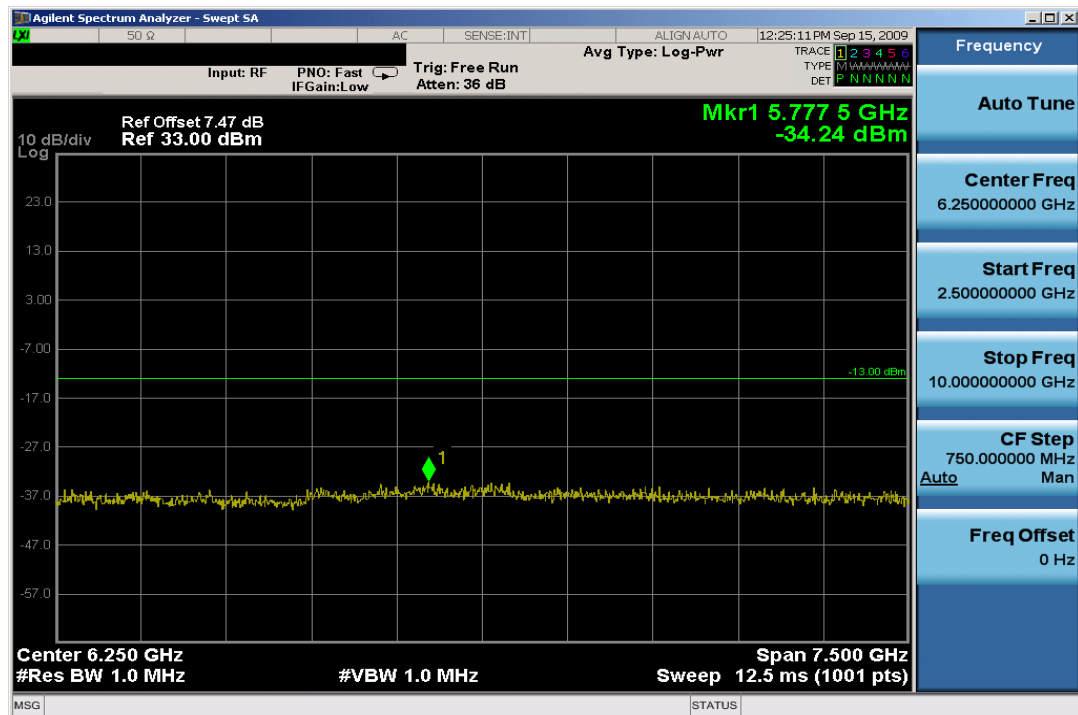


Plot 7-2. Conducted Spurious Plot (Cellular GSM Mode – Ch. 128)

FCC ID: ACJ9TGCF-527	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 GSM/EDGE/CDMA/WCDMA TEST REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0912152256.ACJ	Test Dates: December 28, 2009 - January 29, 2010	EUT Type: Toughbook Model: CF-52mk3		Page 47 of 81

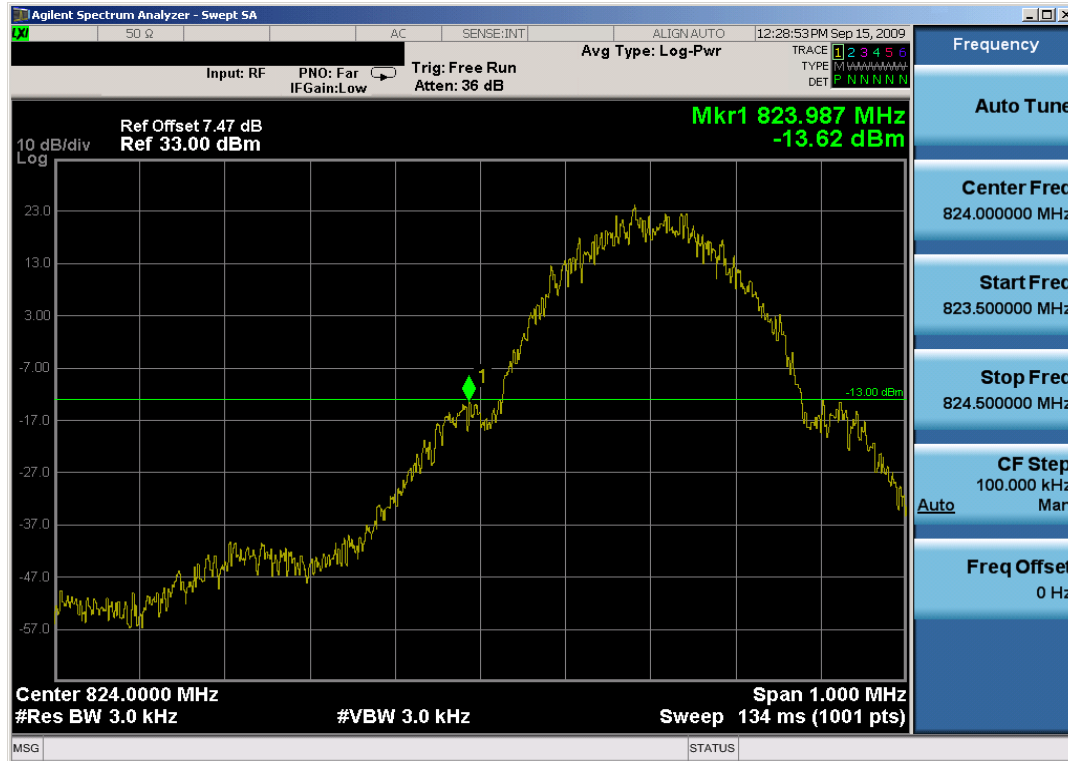


Plot 7-3. Band Edge Plot (Cellular GSM Mode – Ch. 128)

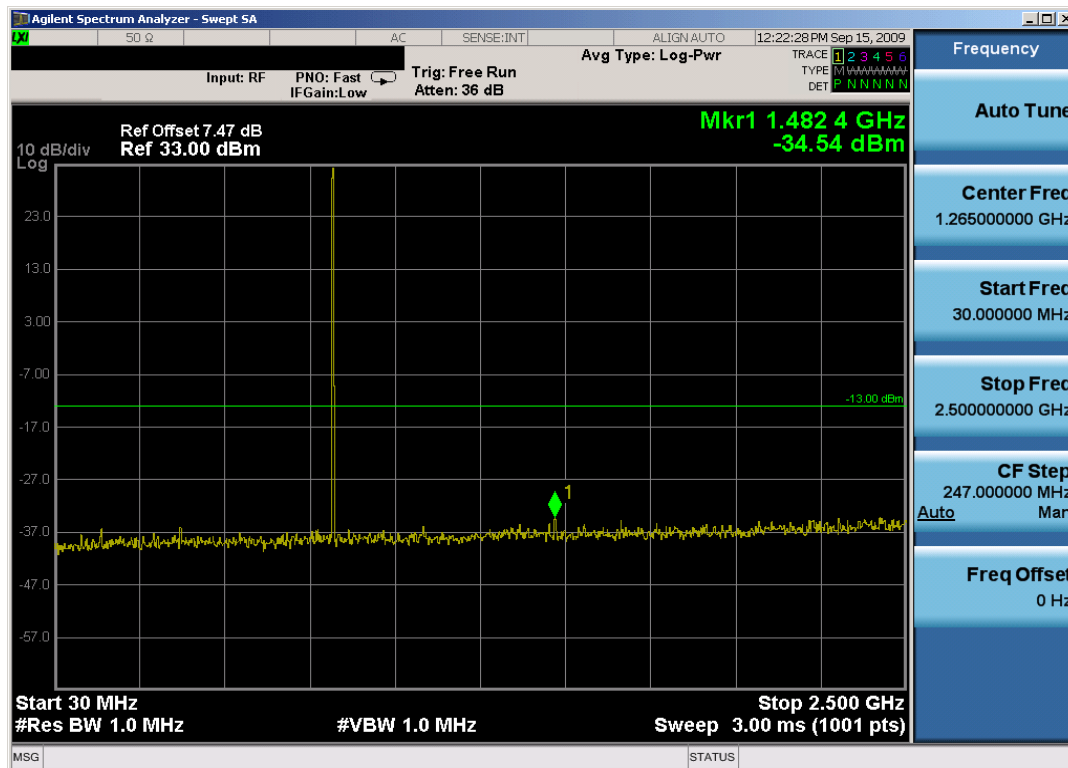


Plot 7-4. Conducted Spurious (Cellular GSM Mode – Ch. 190)

FCC ID: ACJ9TGCF-527	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 GSM/EDGE/CDMA/WCDMA TEST REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0912152256.ACJ	Test Dates: December 28, 2009 - January 29, 2010	EUT Type: Toughbook Model: CF-52mk3		Page 48 of 81

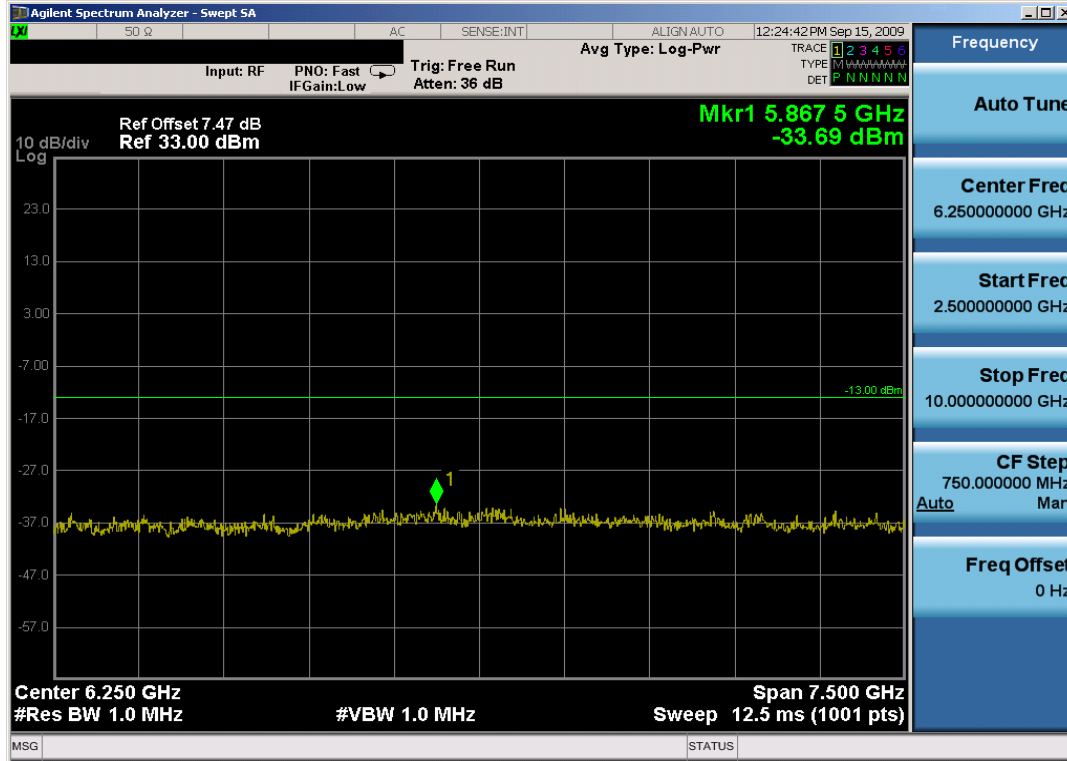


Plot 7-5. Conducted Spurious Plot (Cellular GSM Mode – Ch. 190)

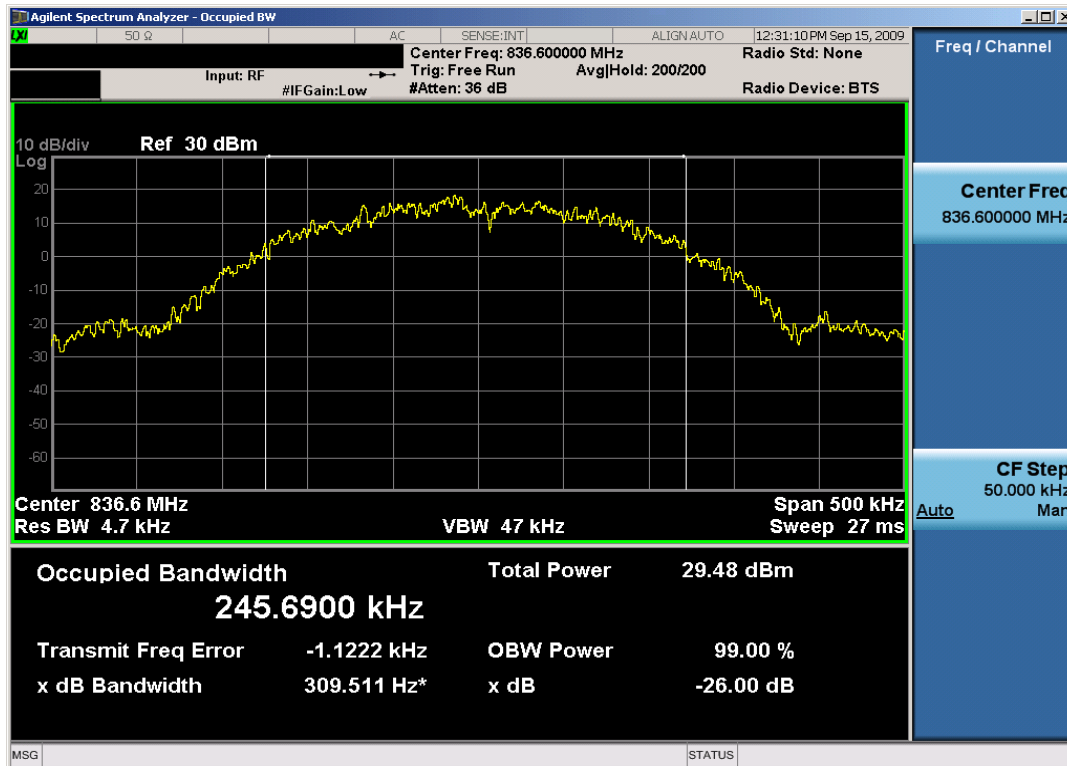


Plot 7-6. Occupied Bandwidth Plot (Cellular GSM Mode – Ch. 190)

FCC ID: ACJ9TGCF-527	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 GSM/EDGE/CDMA/WCDMA TEST REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0912152256.ACJ	Test Dates: December 28, 2009 - January 29, 2010	EUT Type: Toughbook Model: CF-52mk3		Page 49 of 81

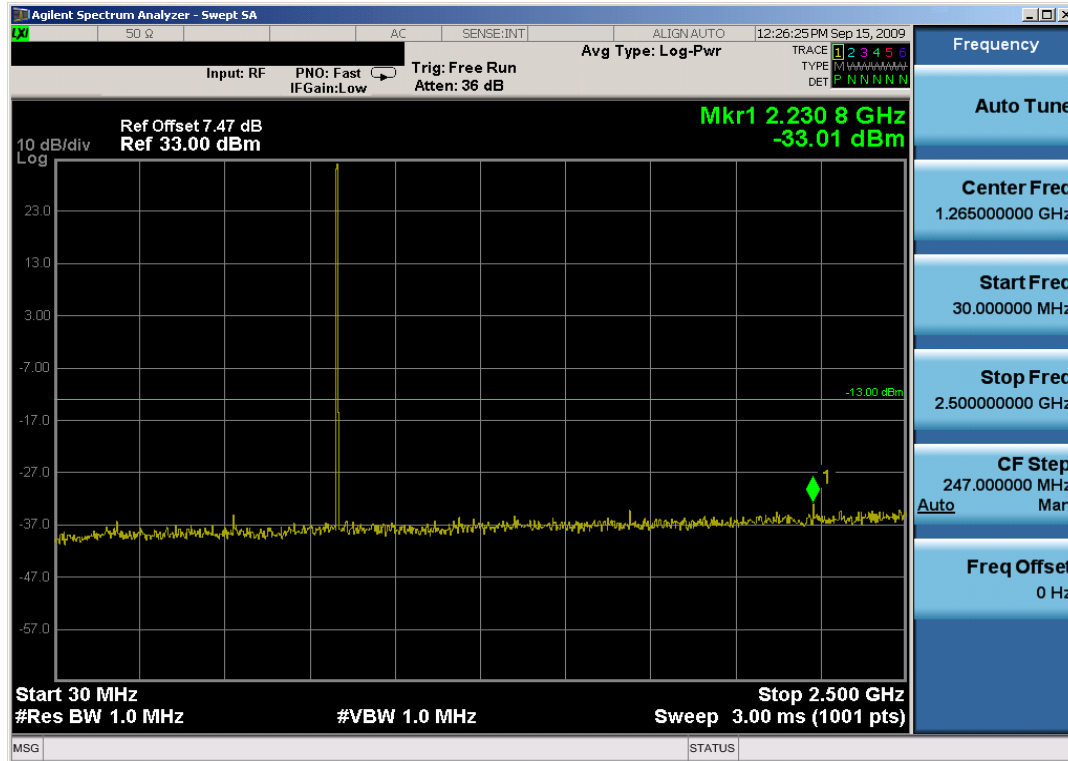


Plot 7-7. Conducted Spurious Plot (Cellular GSM Mode – Ch. 251)

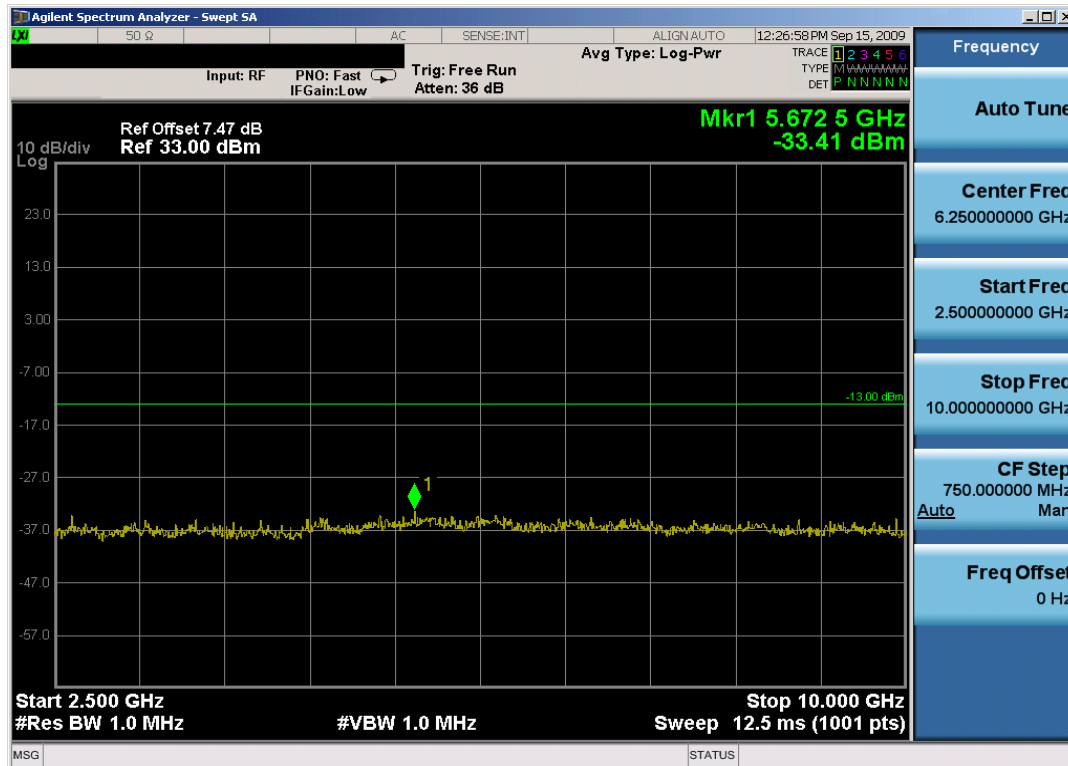


Plot 7-8. Conducted Spurious Plot (Cellular GSM Mode – Ch. 251)

FCC ID: ACJ9TGCF-527	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 GSM/EDGE/CDMA/WCDMA TEST REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0912152256.ACJ	Test Dates: December 28, 2009 - January 29, 2010	EUT Type: Toughbook Model: CF-52mk3		Page 50 of 81

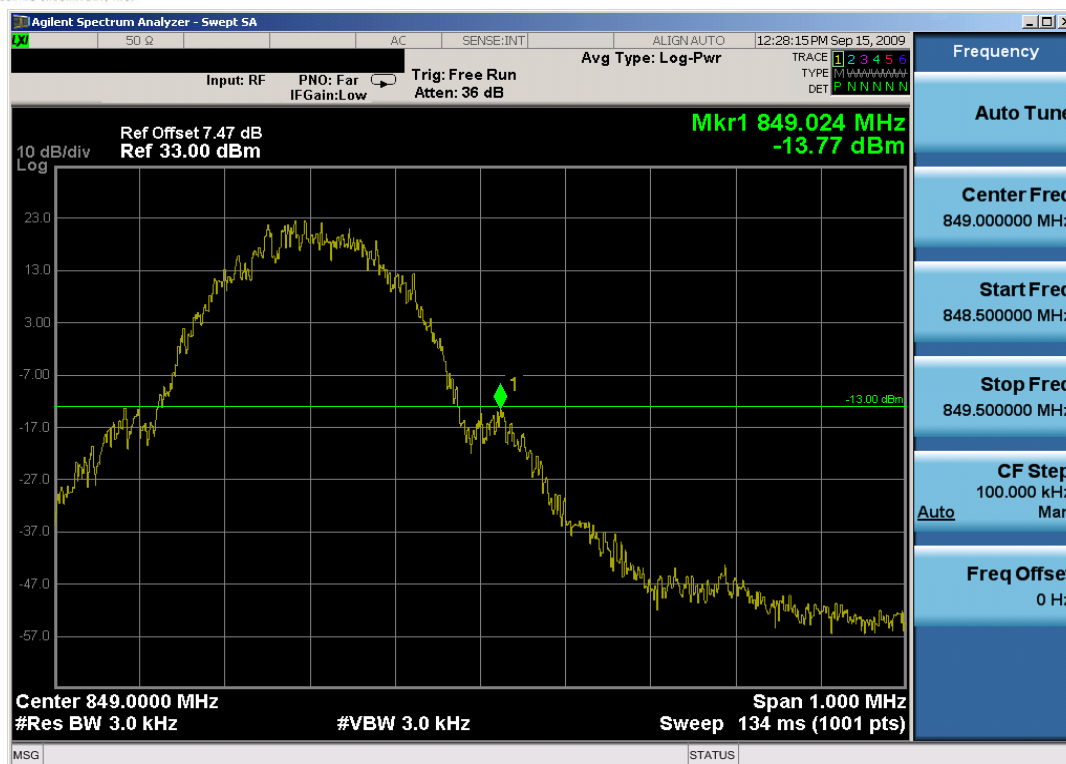


Plot 7-9. Band Edge Plot (Cellular GSM Mode – Ch. 251)

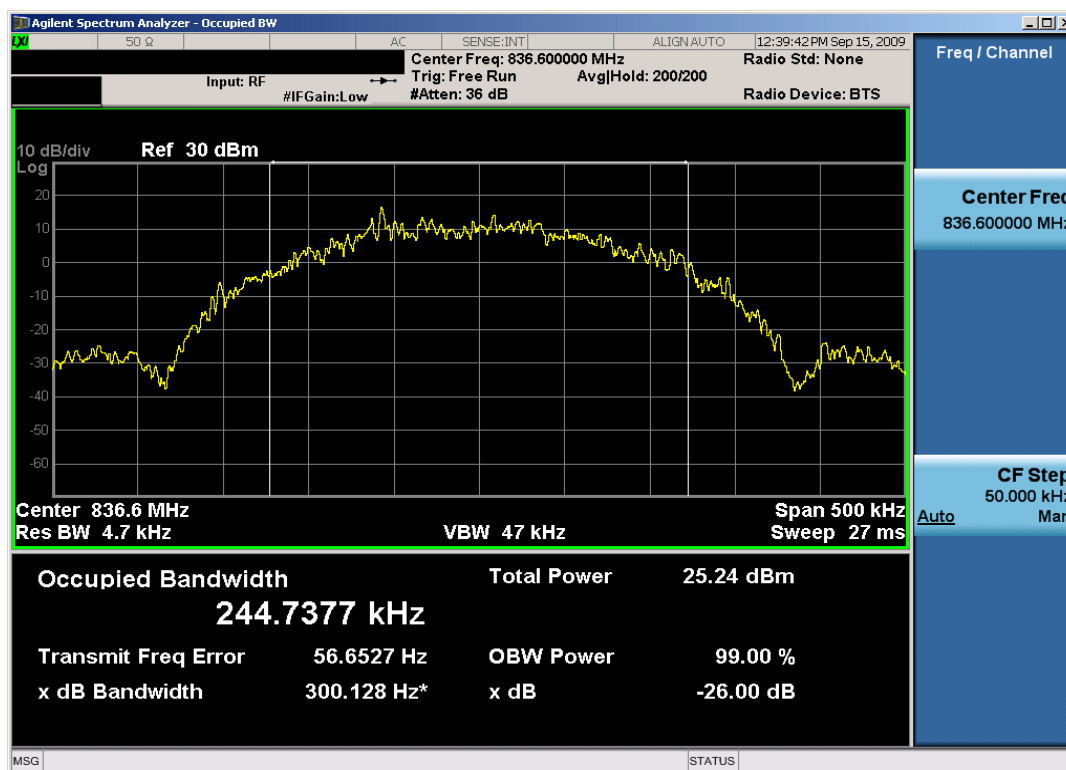


Plot 7-10. Occupied Bandwidth Plot (EDGE850 Mode – Ch. 190)

FCC ID: ACJ9TGCF-527	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 GSM/EDGE/CDMA/WCDMA TEST REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0912152256.ACJ	Test Dates: December 28, 2009 - January 29, 2010	EUT Type: Toughbook Model: CF-52mk3		Page 51 of 81

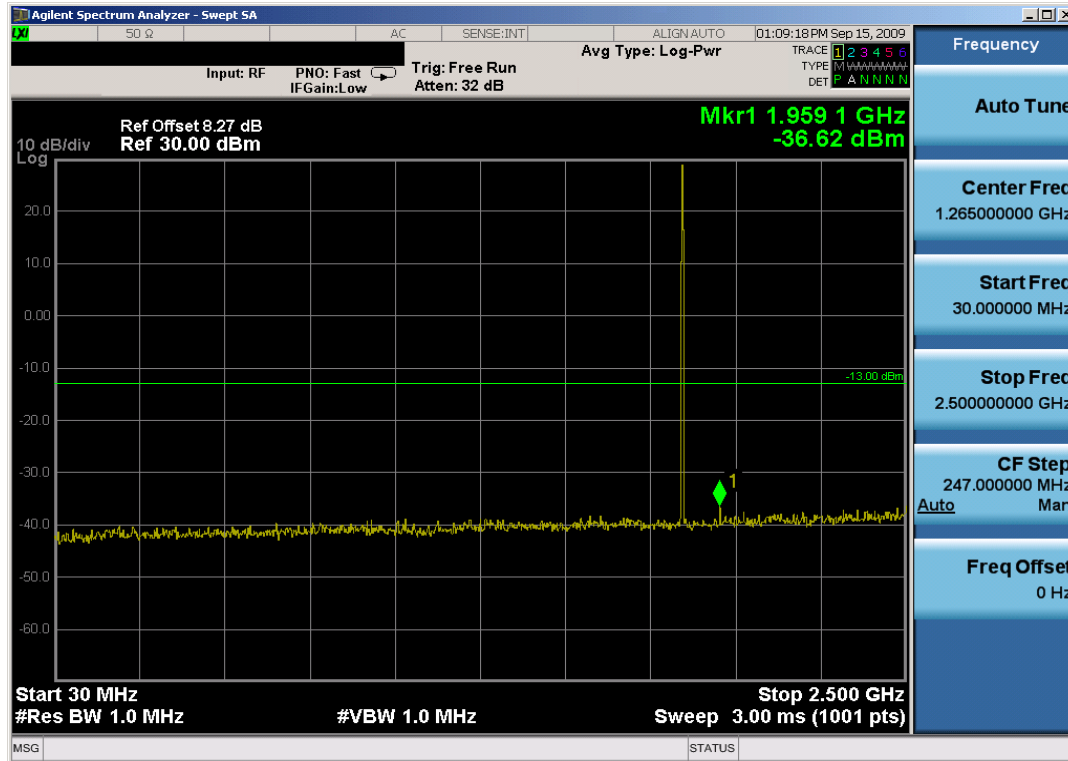


Plot 7-11. Conducted Spurious Plot (PCS GSM Mode – Ch. 512)

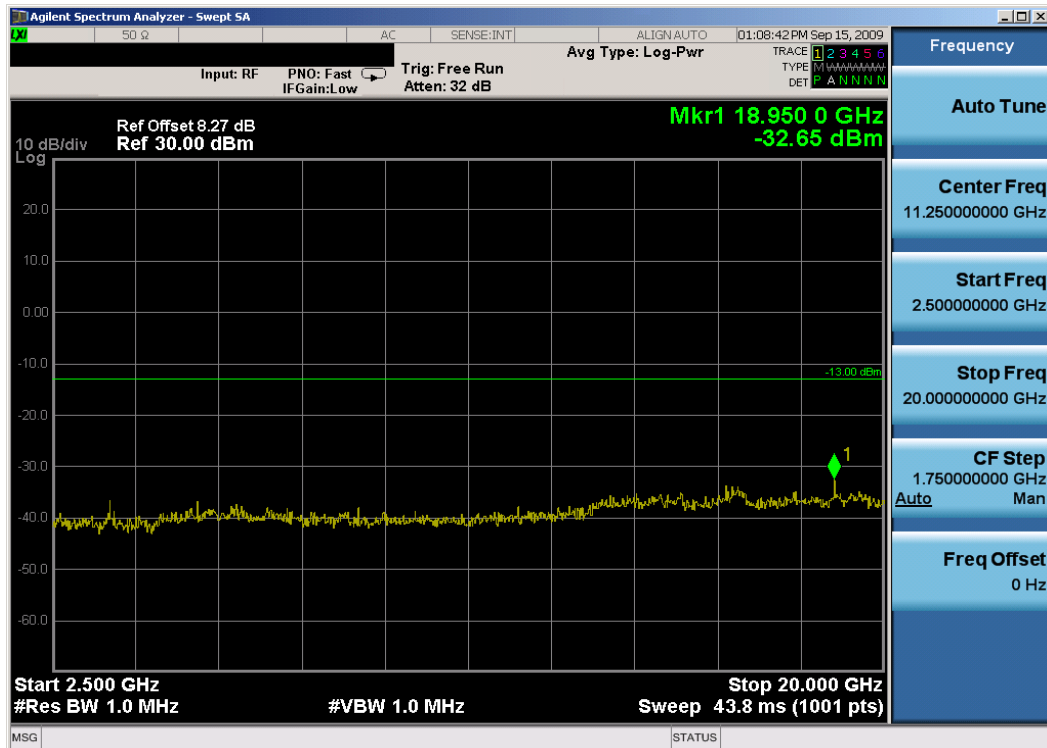


Plot 7-12. Conducted Spurious Plot (PCS GSM Mode – Ch. 512)

FCC ID: ACJ9TGCF-527	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 GSM/EDGE/CDMA/WCDMA TEST REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0912152256.ACJ	Test Dates: December 28, 2009 - January 29, 2010	EUT Type: Toughbook Model: CF-52mk3		Page 52 of 81

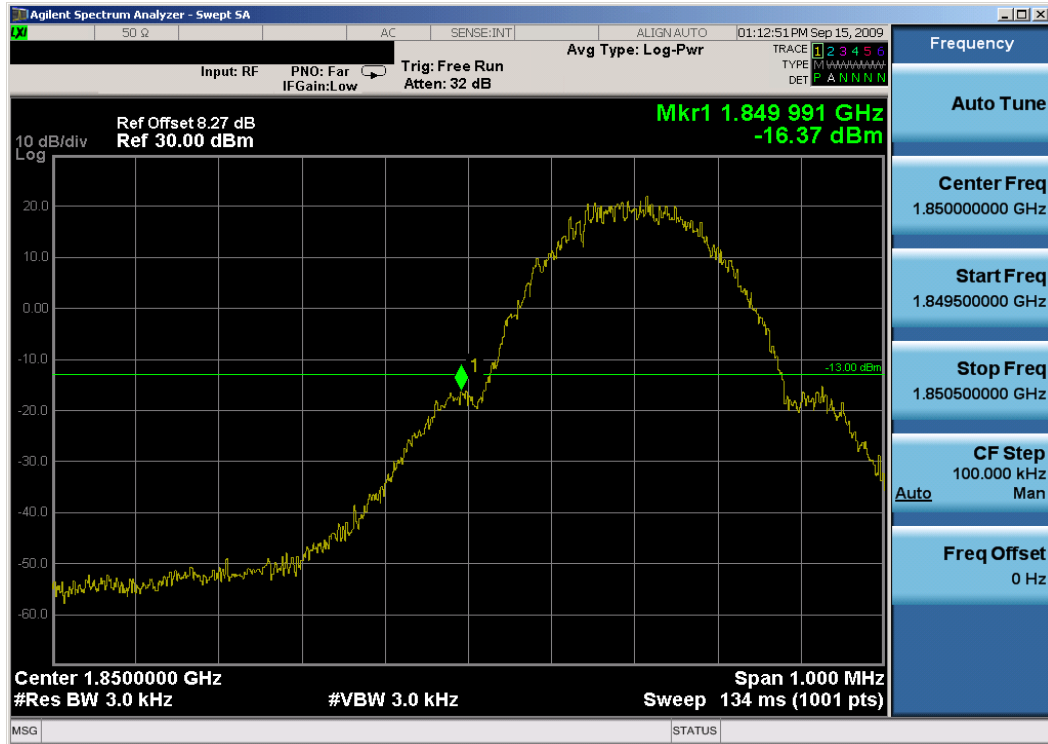


Plot 7-13. Band Edge Plot (PCS GSM Mode – Ch. 512)

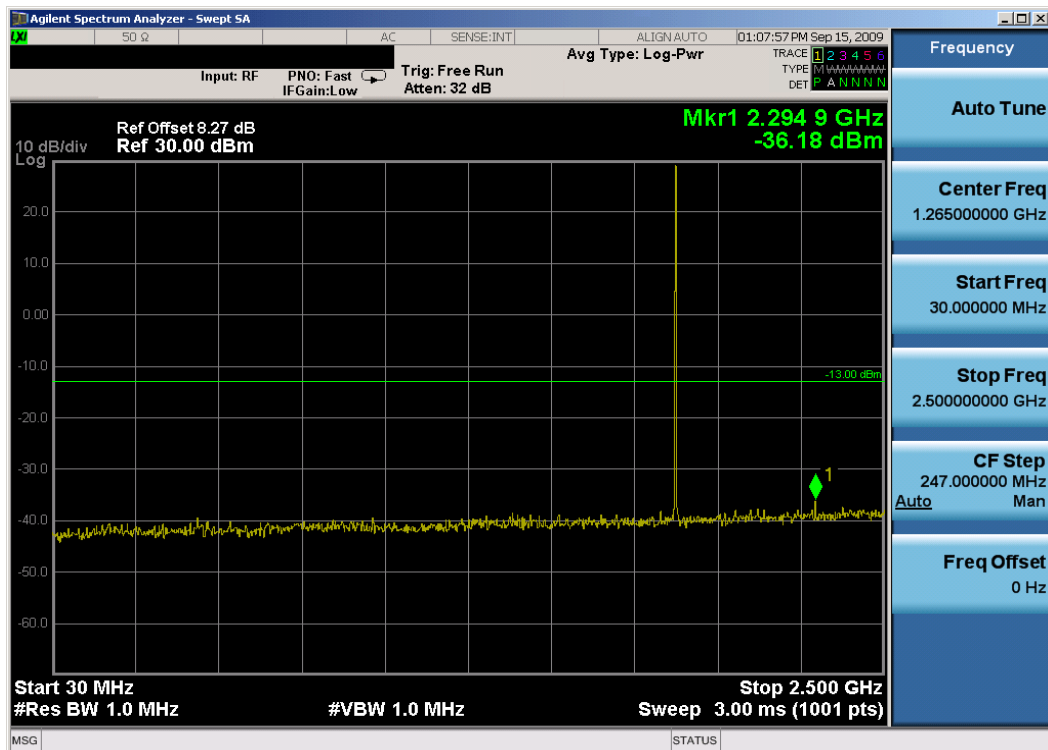


Plot 7-14. Conducted Spurious Plot (PCS GSM Mode – Ch. 661)

FCC ID: ACJ9TGCF-527	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 GSM/EDGE/CDMA/WCDMA TEST REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0912152256.ACJ	Test Dates: December 28, 2009 - January 29, 2010	EUT Type: Toughbook Model: CF-52mk3		Page 53 of 81

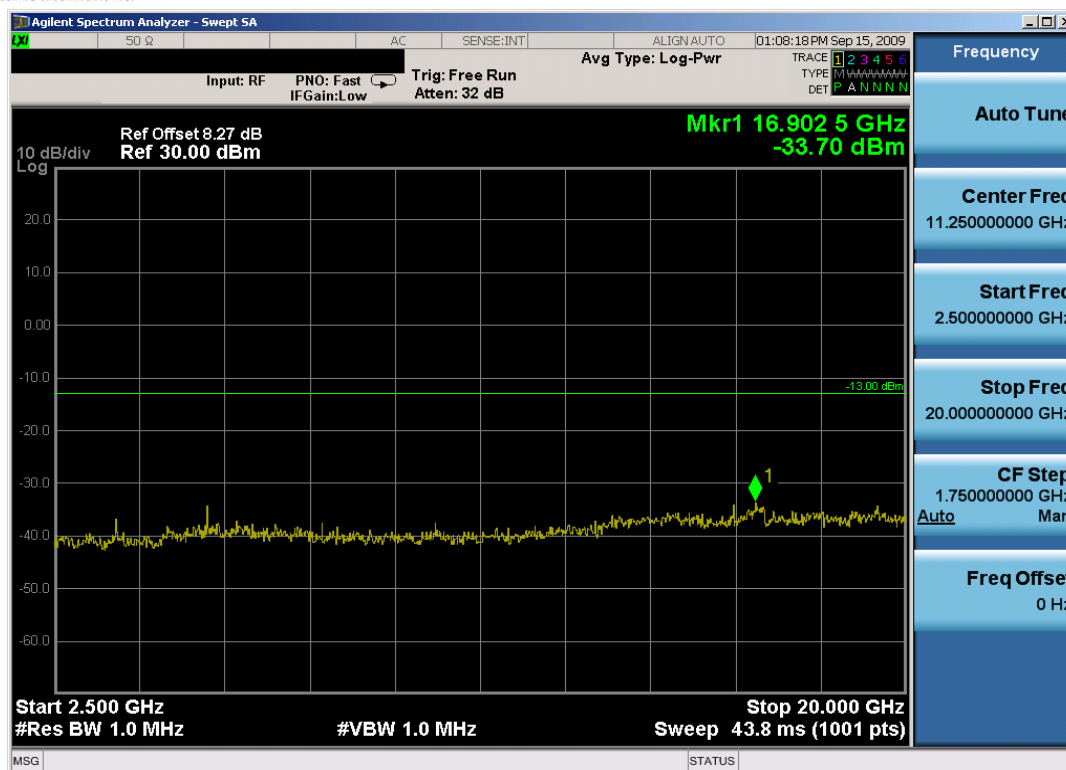


Plot 7-15. Conducted Spurious Plot (PCS GSM Mode – Ch. 661)

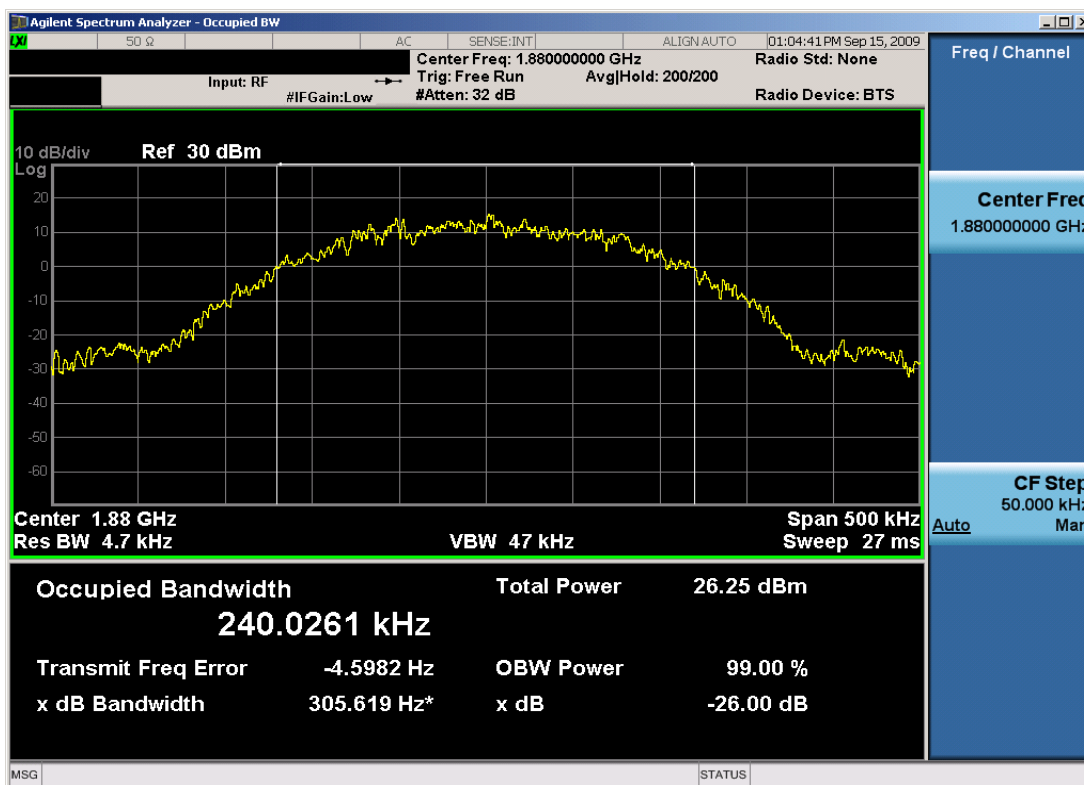


Plot 7-16. Occupied Bandwidth Plot (PCS GSM Mode – Ch. 661)

FCC ID: ACJ9TGCF-527	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 GSM/EDGE/CDMA/WCDMA TEST REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0912152256.ACJ	Test Dates: December 28, 2009 - January 29, 2010	EUT Type: Toughbook Model: CF-52mk3		Page 54 of 81

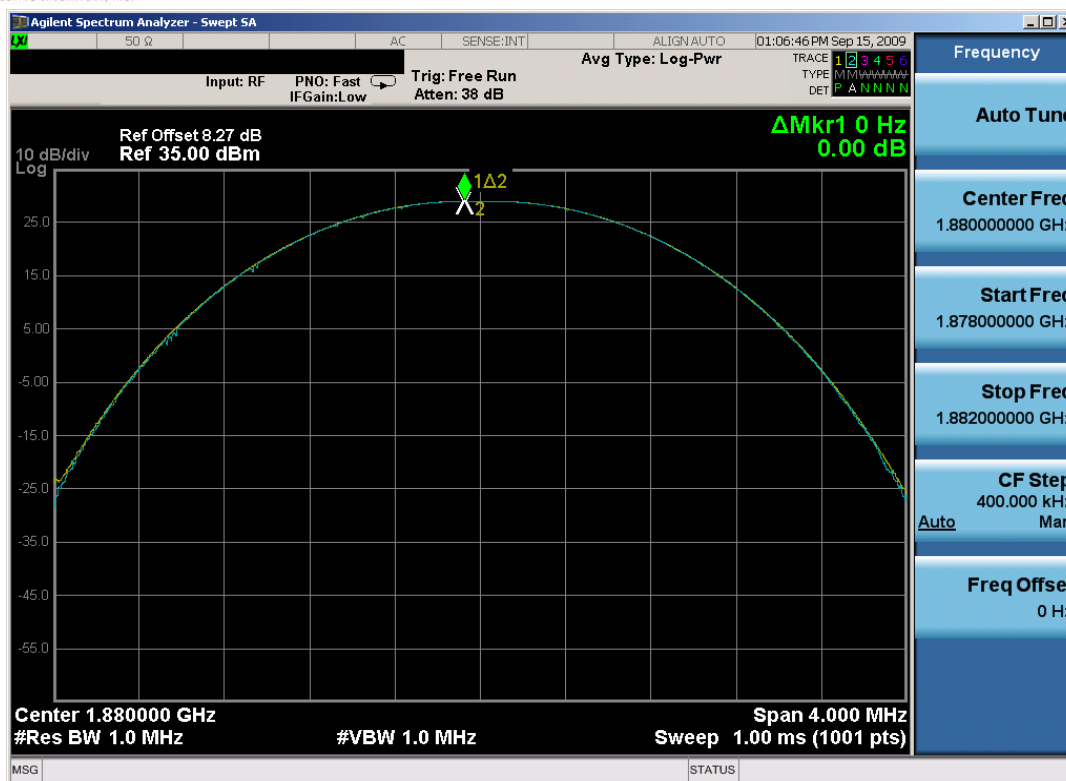


Plot 7-17. Peak-Average Ratio Plot (PCS GSM Mode – Ch. 661)

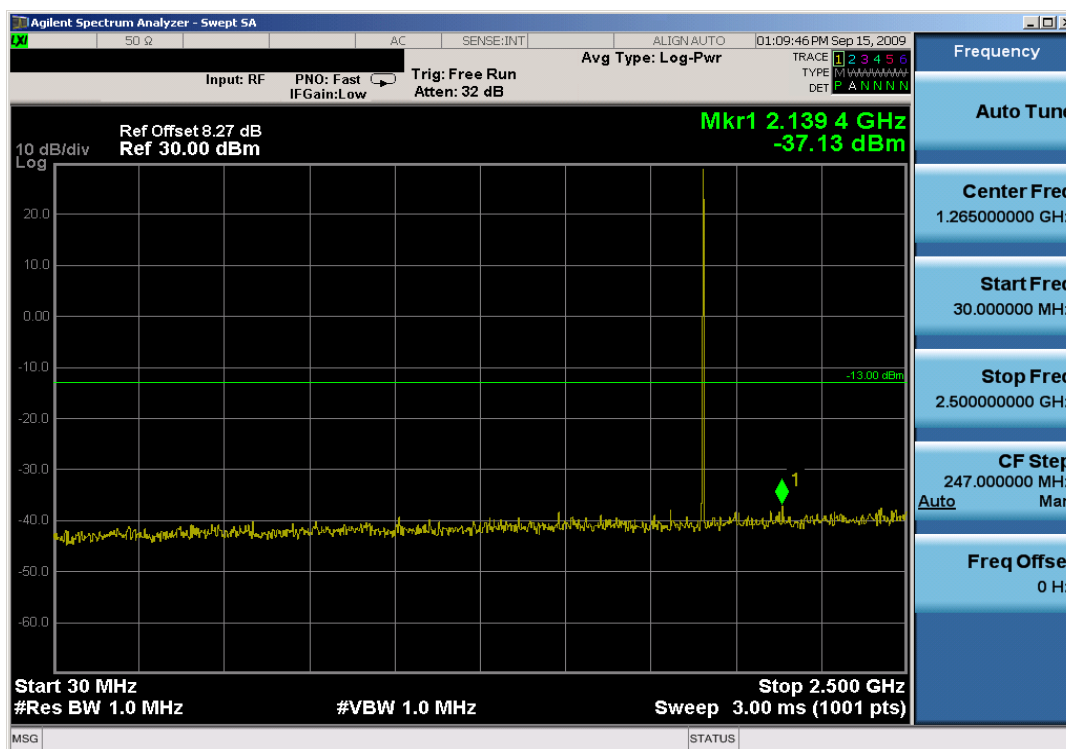


Plot 7-18. Conducted Spurious Plot (PCS GSM Mode – Ch. 810)

FCC ID: ACJ9TGCF-527	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 GSM/EDGE/CDMA/WCDMA TEST REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0912152256.ACJ	Test Dates: December 28, 2009 - January 29, 2010	EUT Type: Toughbook Model: CF-52mk3		Page 55 of 81

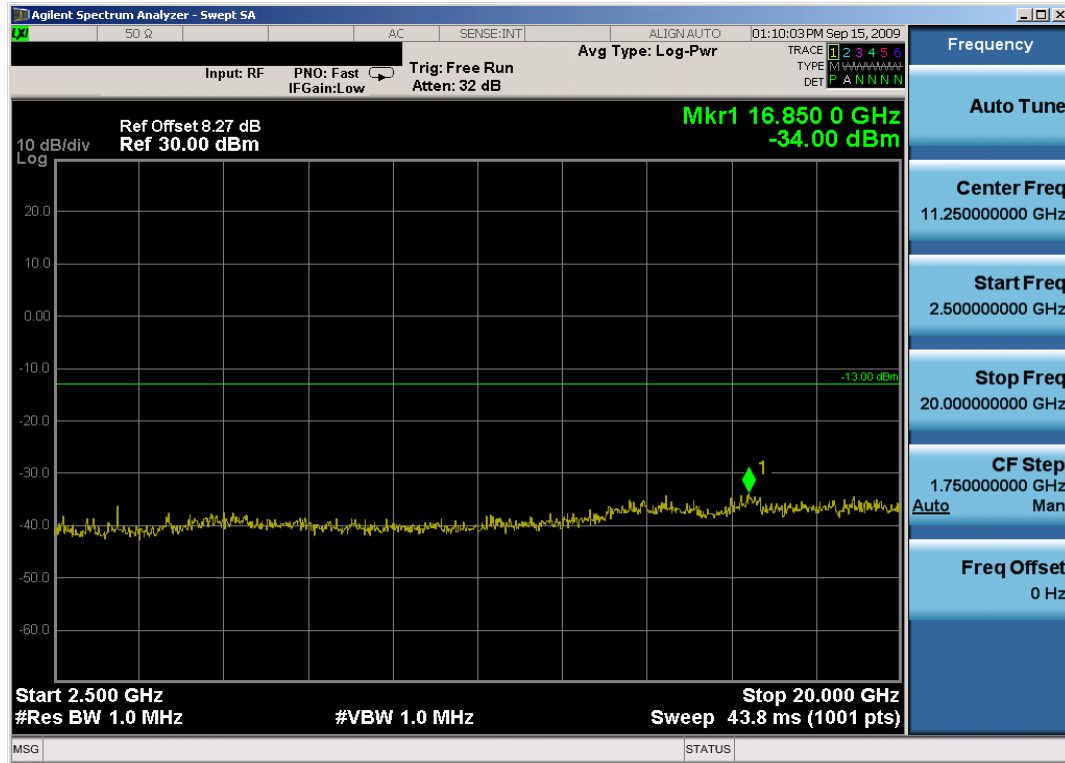


Plot 7-19. Conducted Spurious Plot (PCS GSM Mode – Ch. 810)

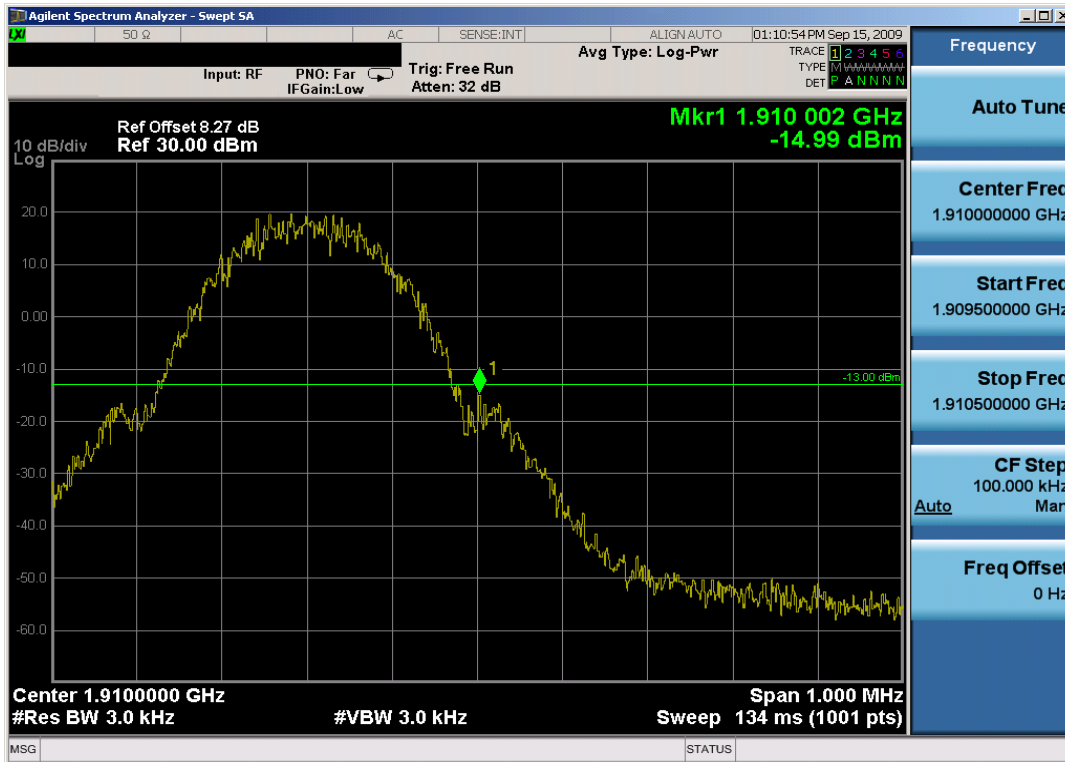


Plot 7-20. Band Edge Plot (PCS GSM Mode – Ch. 810)

FCC ID: ACJ9TGCF-527	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 GSM/EDGE/CDMA/WCDMA TEST REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0912152256.ACJ	Test Dates: December 28, 2009 - January 29, 2010	EUT Type: Toughbook Model: CF-52mk3		Page 56 of 81

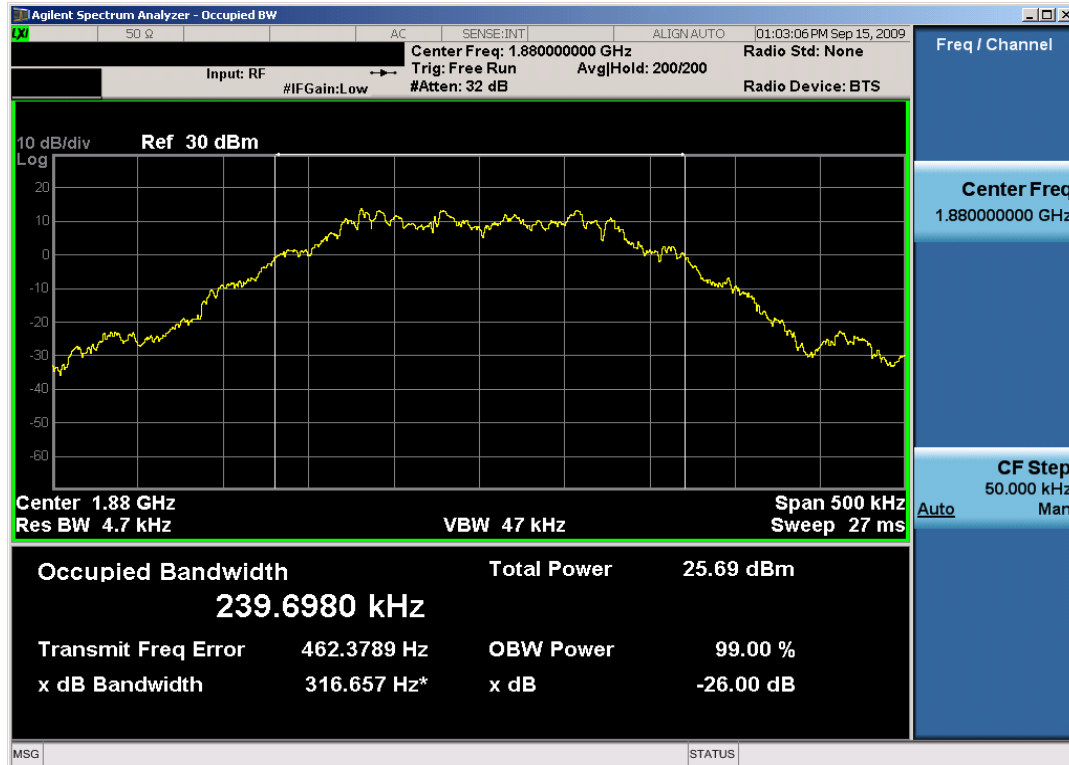


Plot 7-21. Occupied Bandwidth Plot (EDGE1900 Mode – Ch. 661)

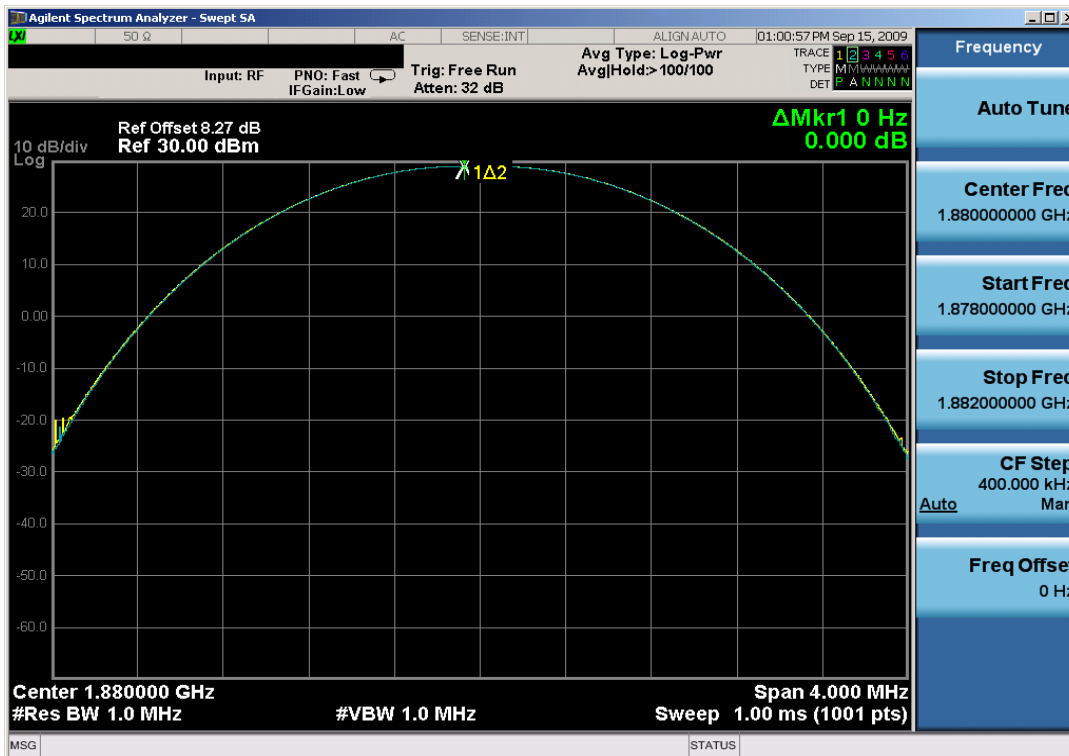


Plot 7-22. Peak-Average Ratio Plot (EDGE1900 Mode – Ch. 661)

FCC ID: ACJ9TGCF-527	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 GSM/EDGE/CDMA/WCDMA TEST REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0912152256.ACJ	Test Dates: December 28, 2009 - January 29, 2010	EUT Type: Toughbook Model: CF-52mk3		Page 57 of 81

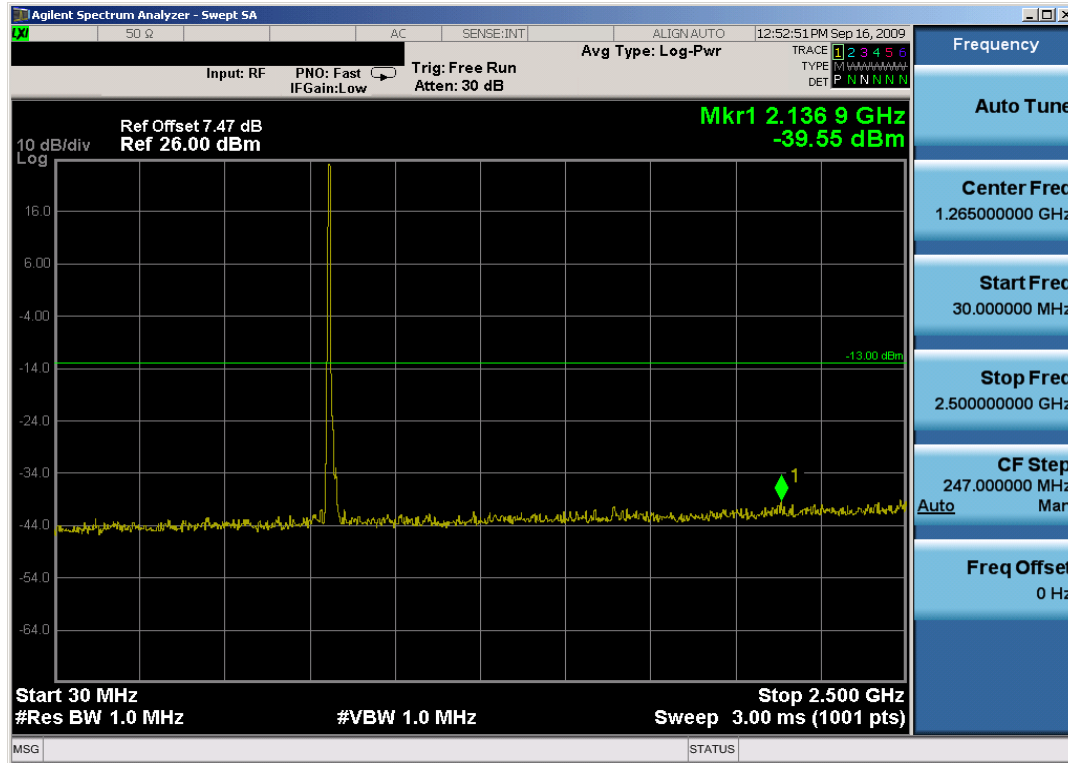


Plot 7-23. Conducted Spurious Plot (Cellular WCDMA Mode – Ch. 4132)

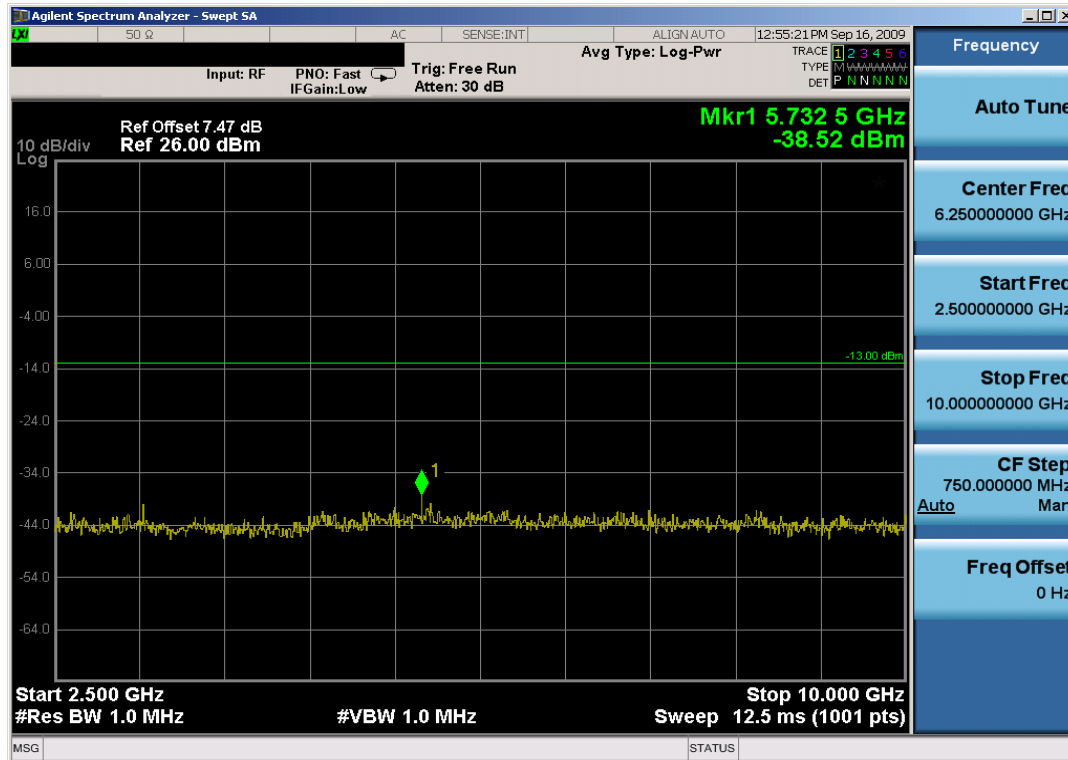


Plot 7-24. Conducted Spurious Plot (Cellular WCDMA Mode – Ch. 4132)

FCC ID: ACJ9TGCF-527	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 GSM/EDGE/CDMA/WCDMA TEST REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0912152256.ACJ	Test Dates: December 28, 2009 - January 29, 2010	EUT Type: Toughbook Model: CF-52mk3		Page 58 of 81

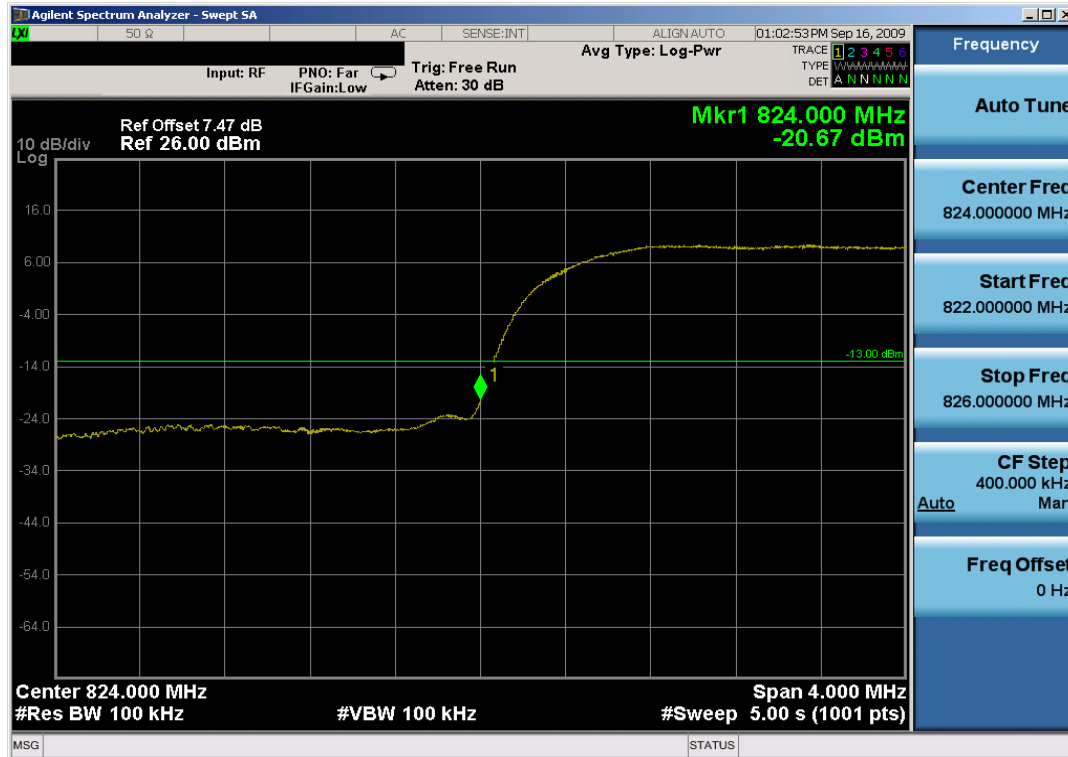


Plot 7-25. Band Edge Plot (Cellular WCDMA Mode – Ch. 4132)

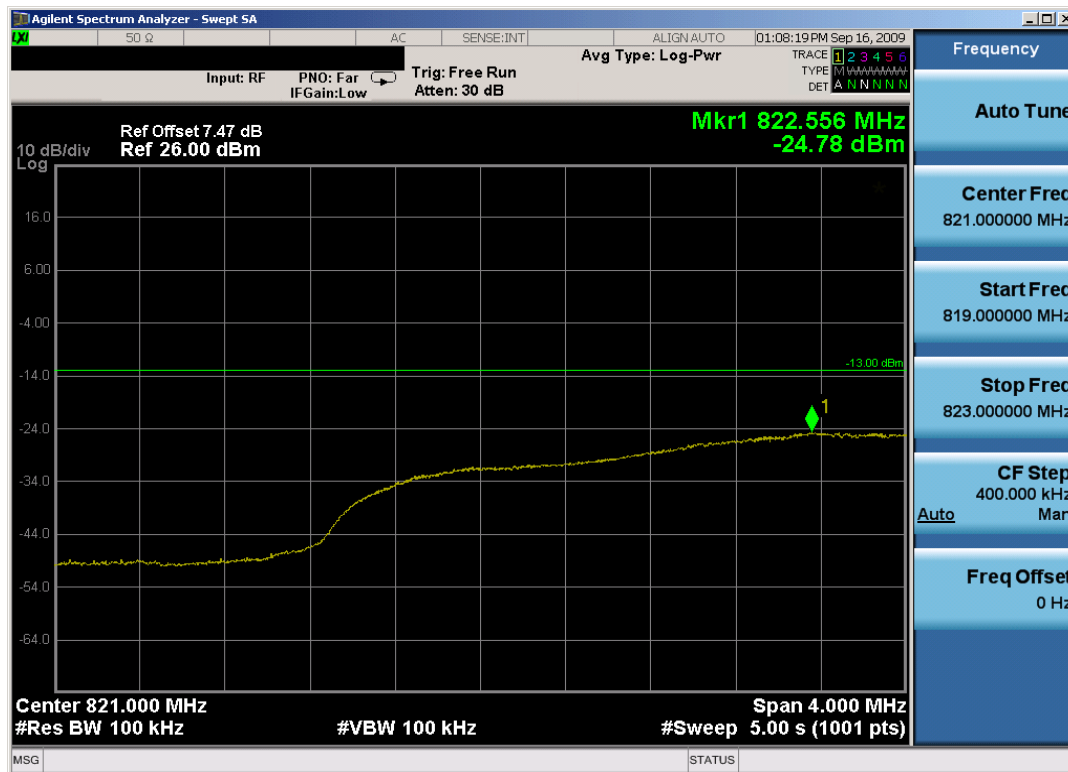


Plot 7-26. 4MHz Span Plot (Cellular WCDMA Mode – Ch. 4132)

FCC ID: ACJ9TGCF-527	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 GSM/EDGE/CDMA/WCDMA TEST REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0912152256.ACJ	Test Dates: December 28, 2009 - January 29, 2010	EUT Type: Toughbook Model: CF-52mk3		Page 59 of 81

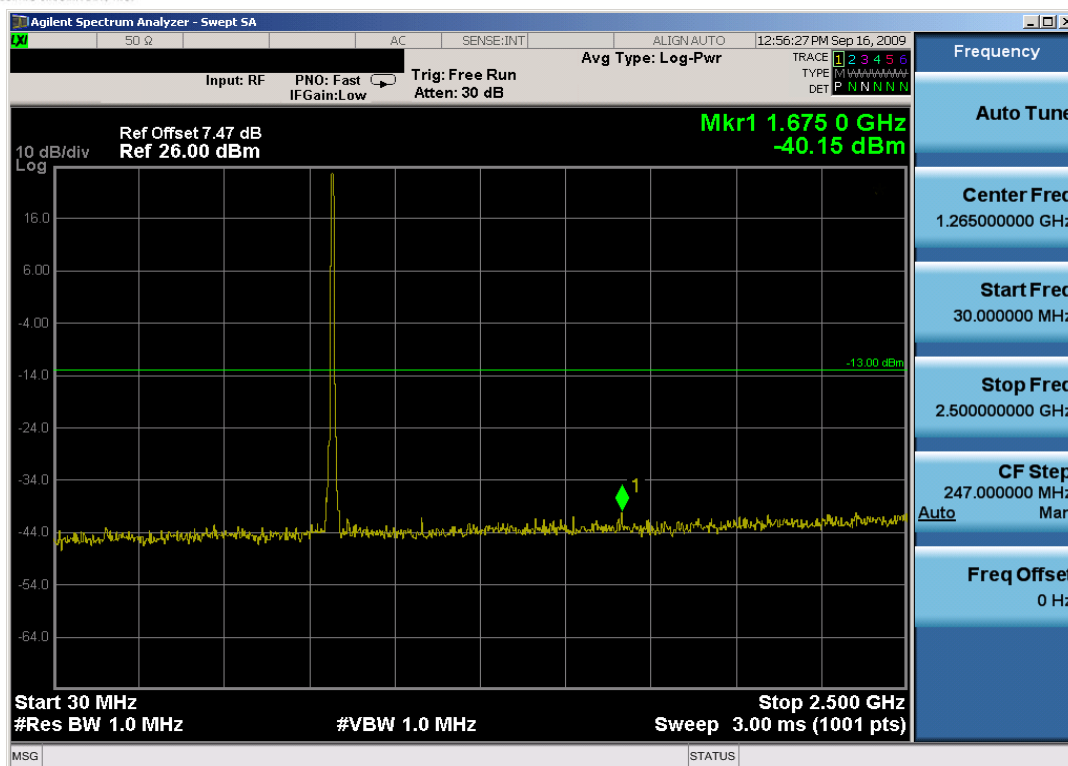


Plot 7-27. Conducted Spurious Plot (Cellular WCDMA Mode – Ch. 4183)

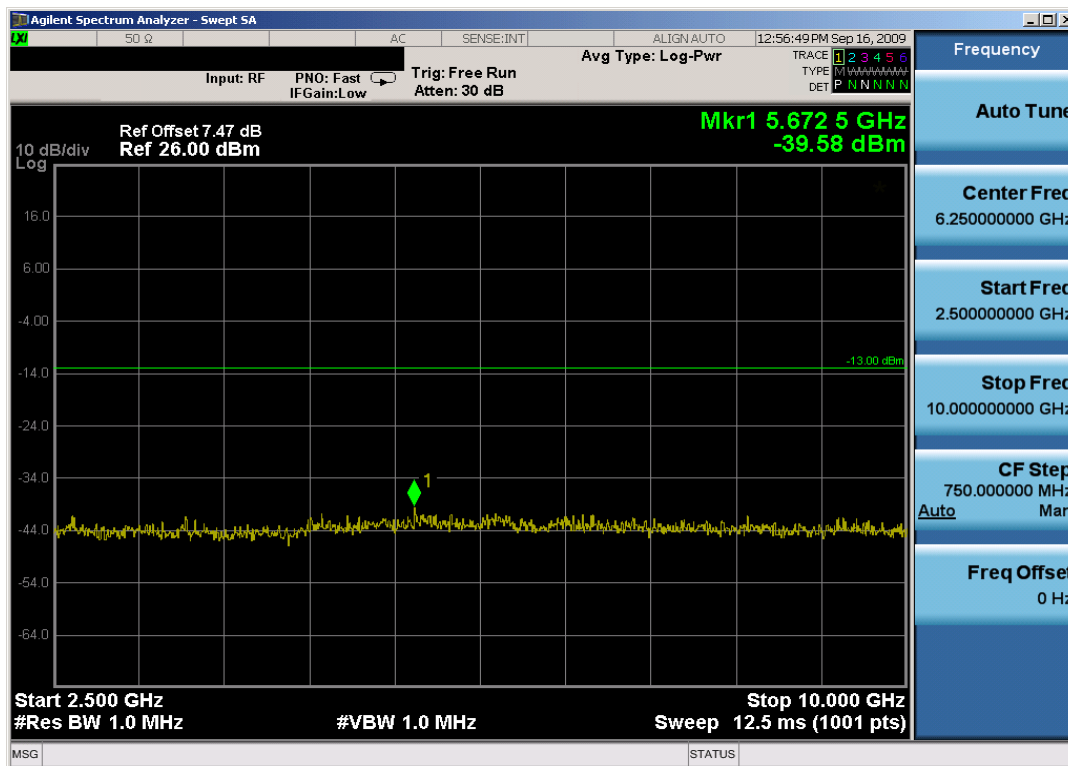


Plot 7-28. Conducted Spurious Plot (Cellular WCDMA Mode – Ch. 4183)

FCC ID: ACJ9TGCF-527	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 GSM/EDGE/CDMA/WCDMA TEST REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0912152256.ACJ	Test Dates: December 28, 2009 - January 29, 2010	EUT Type: Toughbook Model: CF-52mk3		Page 60 of 81

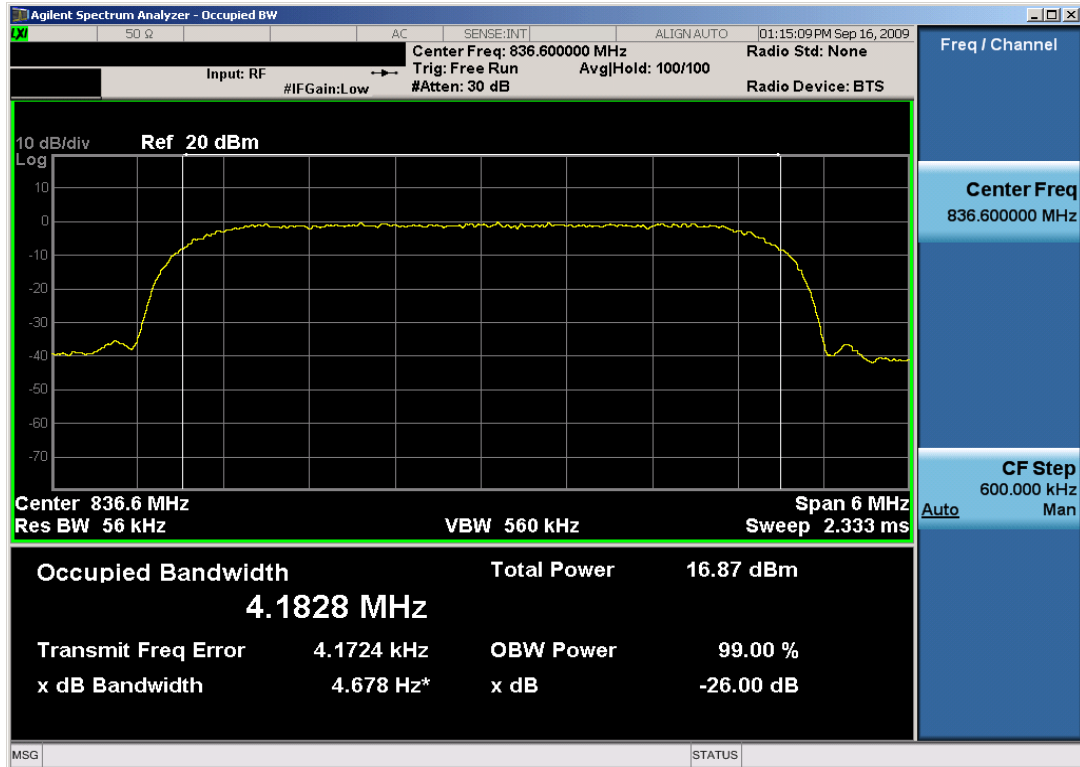


Plot 7-29. Occupied Bandwidth Plot (Cellular WCDMA Mode – Ch. 4183)

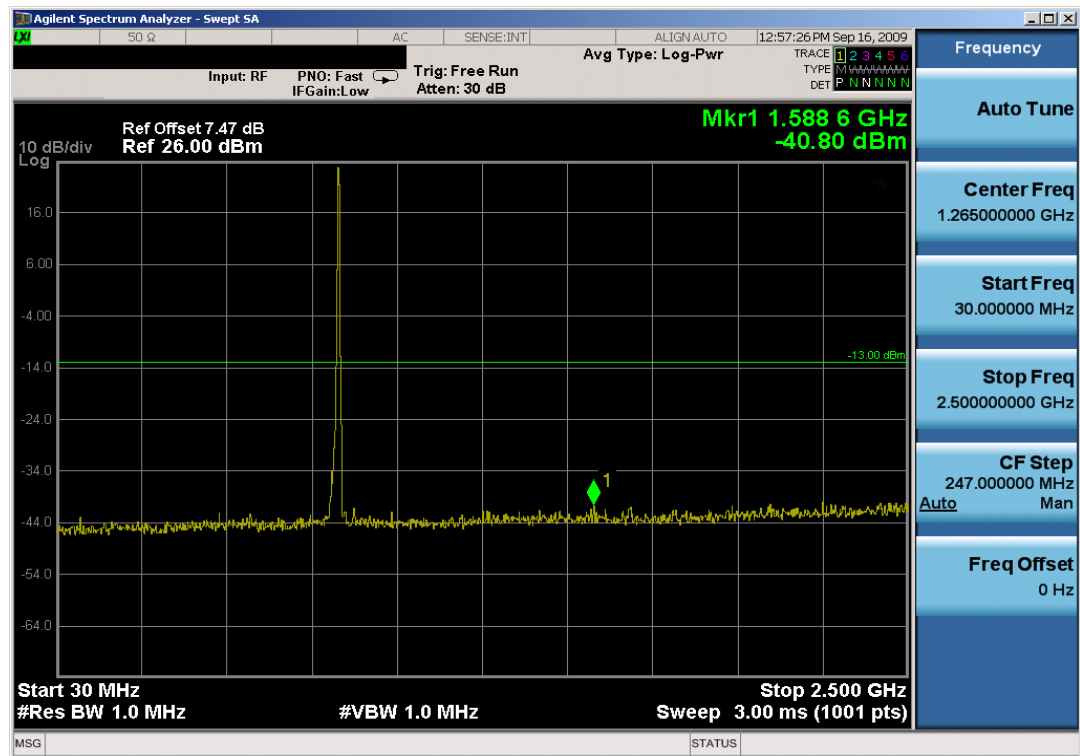


Plot 7-30. Conducted Spurious Plot (Cellular WCDMA Mode – Ch. 4233)

FCC ID: ACJ9TGCF-527	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 GSM/EDGE/CDMA/WCDMA TEST REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0912152256.ACJ	Test Dates: December 28, 2009 - January 29, 2010	EUT Type: Toughbook Model: CF-52mk3		Page 61 of 81

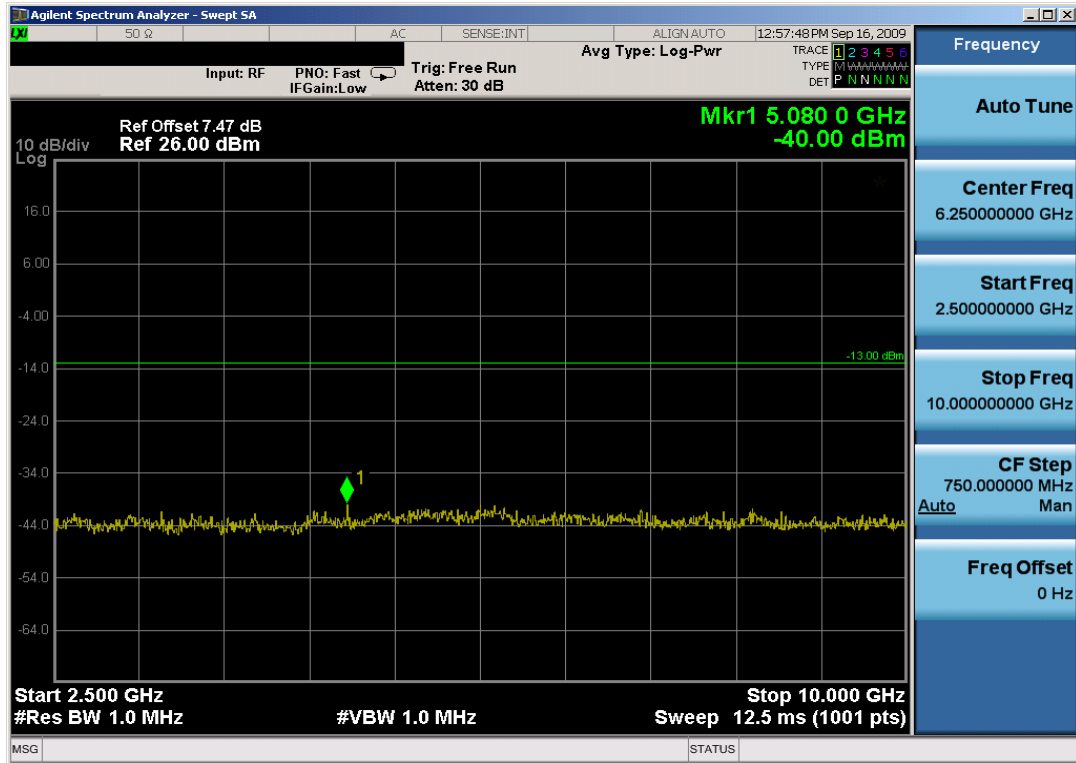


Plot 7-31. Conducted Spurious Plot (Cellular WCDMA Mode – Ch. 4233)

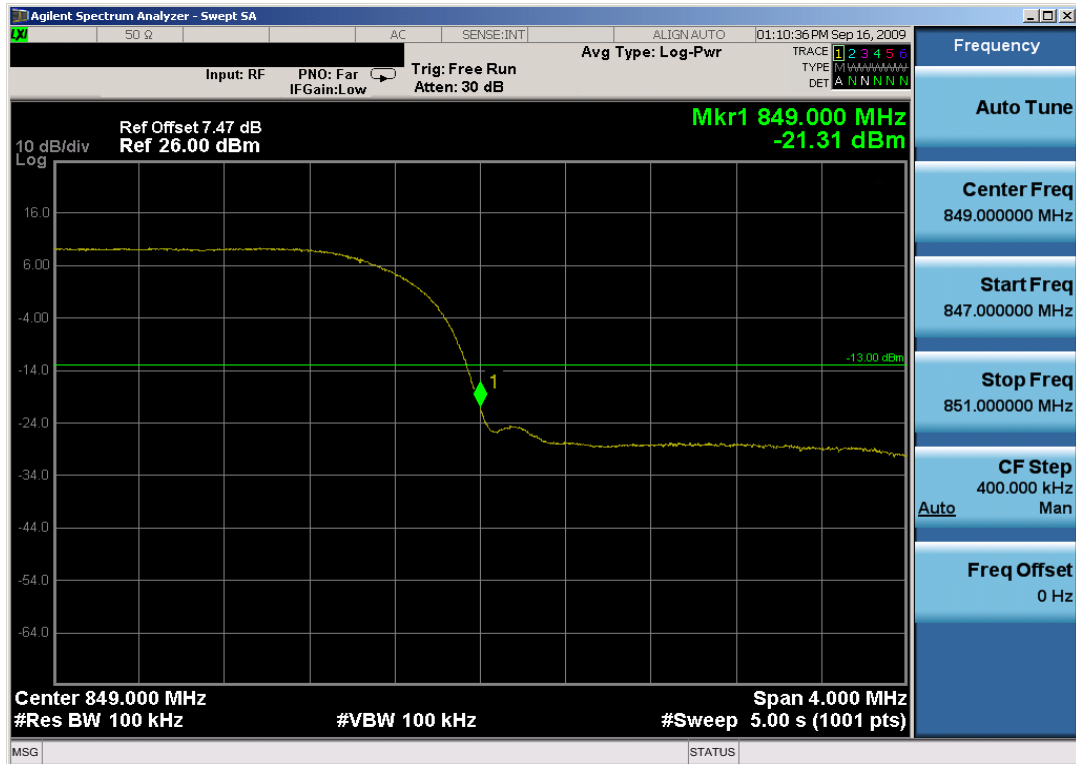


Plot 7-32. Band Edge Plot (Cellular WCDMA Mode – Ch. 4233)

FCC ID: ACJ9TGCF-527	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 GSM/EDGE/CDMA/WCDMA TEST REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0912152256.ACJ	Test Dates: December 28, 2009 - January 29, 2010	EUT Type: Toughbook Model: CF-52mk3		Page 62 of 81

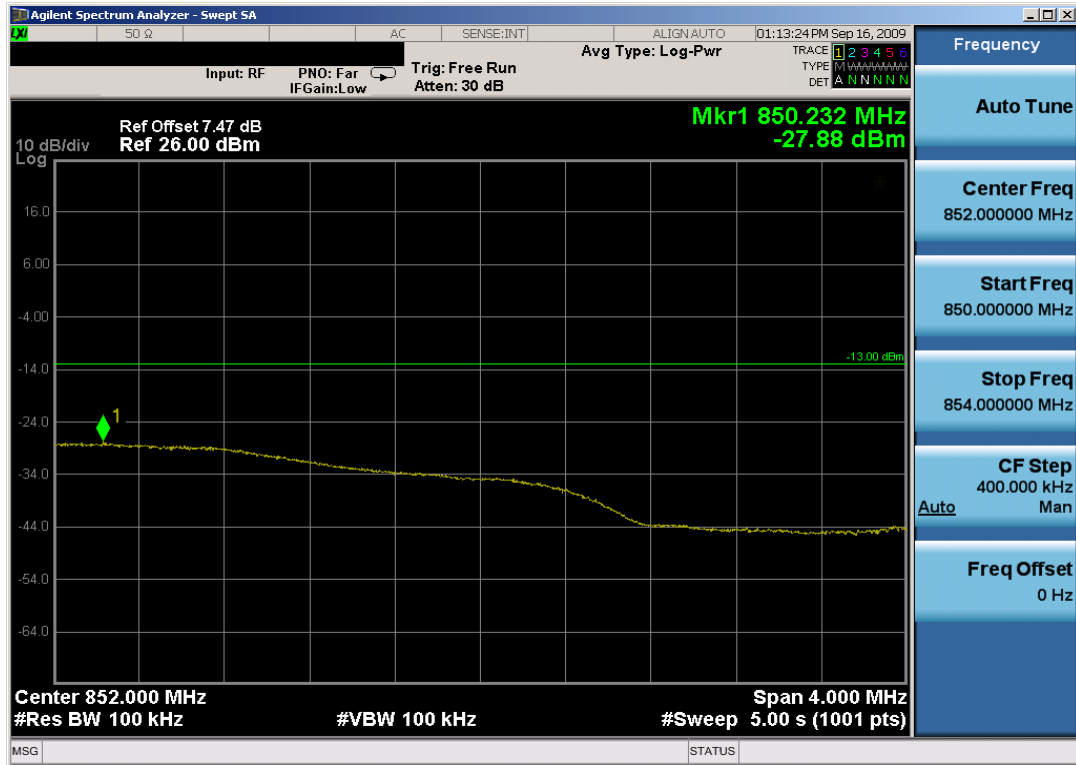


Plot 7-33. 4MHz Span Plot (Cellular WCDMA Mode – Ch. 4233)

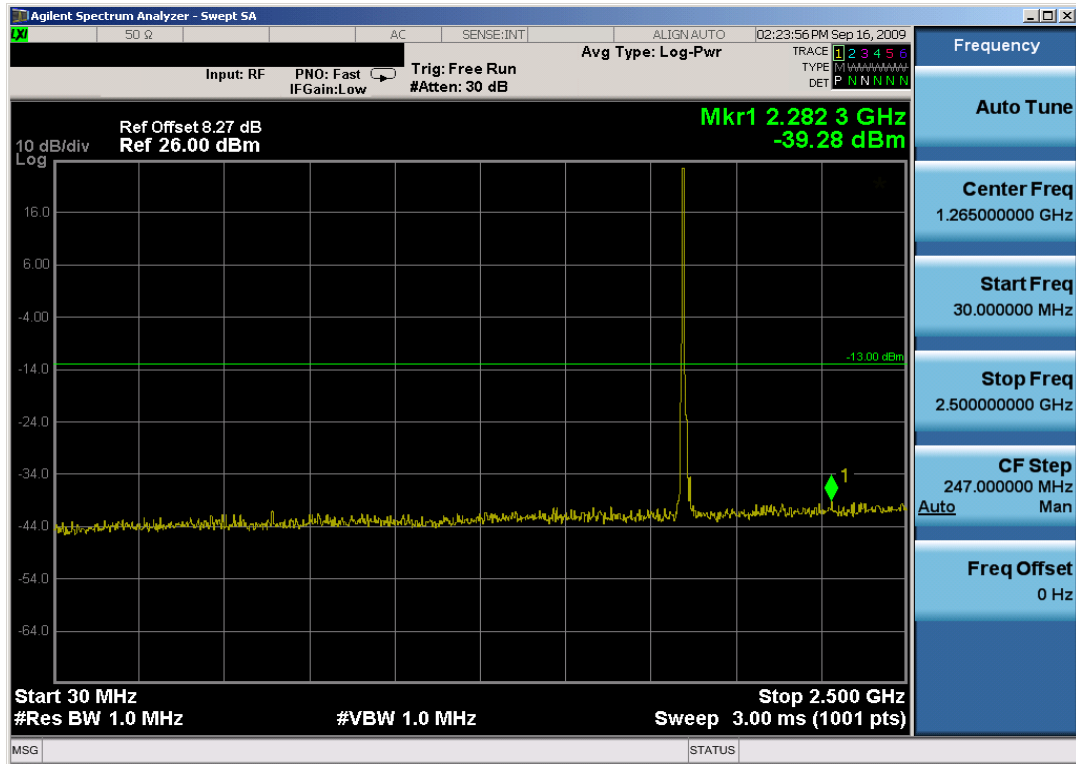


Plot 7-34. Conducted Spurious Plot (PCS WCDMA Mode – Ch. 9262)

FCC ID: ACJ9TGCF-527	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 GSM/EDGE/CDMA/WCDMA TEST REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0912152256.ACJ	Test Dates: December 28, 2009 - January 29, 2010	EUT Type: Toughbook Model: CF-52mk3		Page 63 of 81

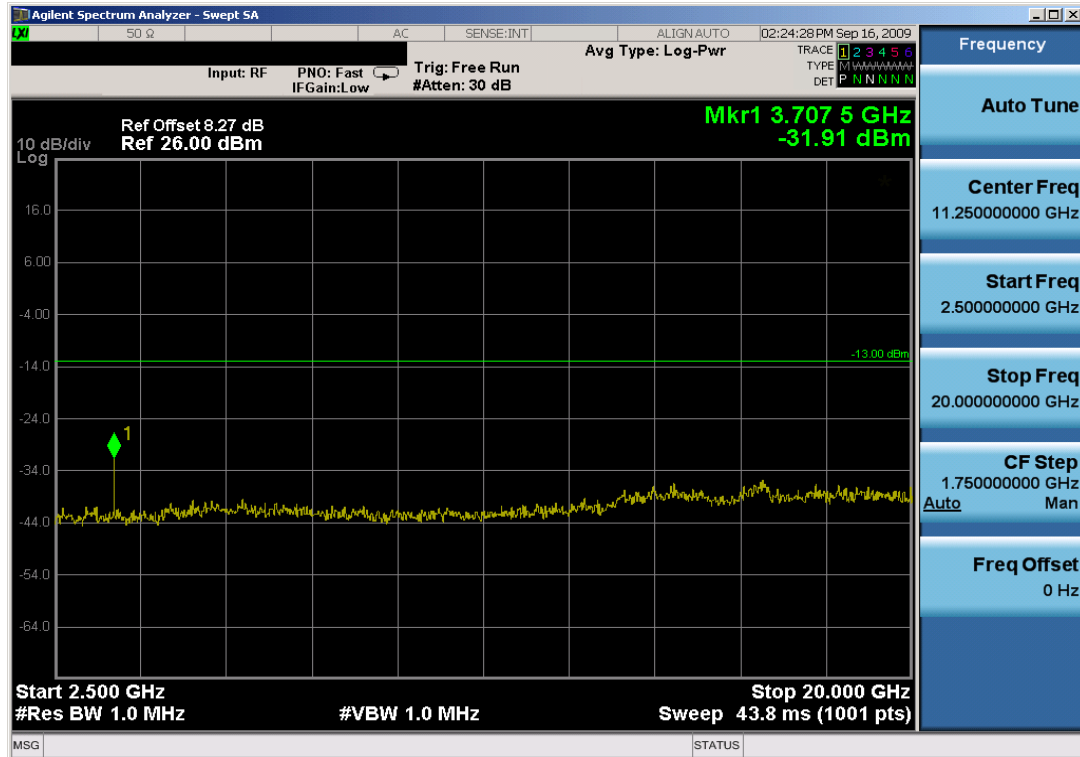


Plot 7-35. Conducted Spurious Plot (PCS WCDMA Mode – Ch. 9262)

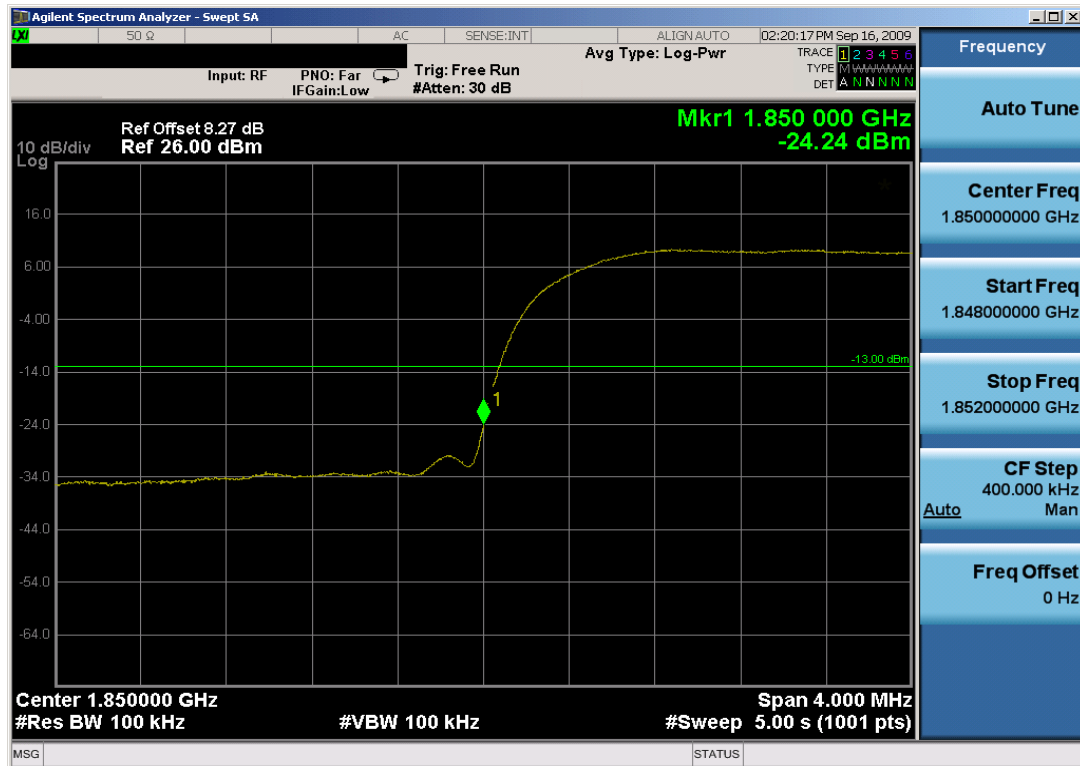


Plot 7-36. Band Edge Plot (PCS WCDMA Mode – Ch. 9262)

FCC ID: ACJ9TGCF-527	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 GSM/EDGE/CDMA/WCDMA TEST REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0912152256.ACJ	Test Dates: December 28, 2009 - January 29, 2010	EUT Type: Toughbook Model: CF-52mk3		Page 64 of 81

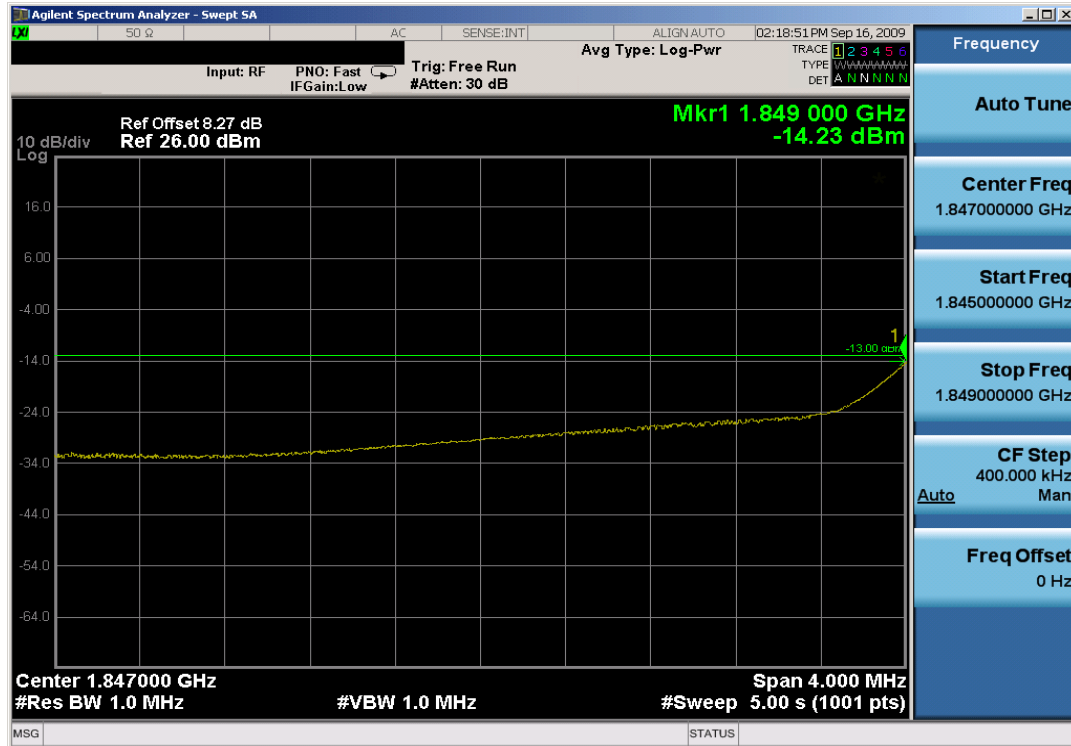


Plot 7-37. 4MHz Span Plot (PCS WCDMA Mode – Ch. 9262)

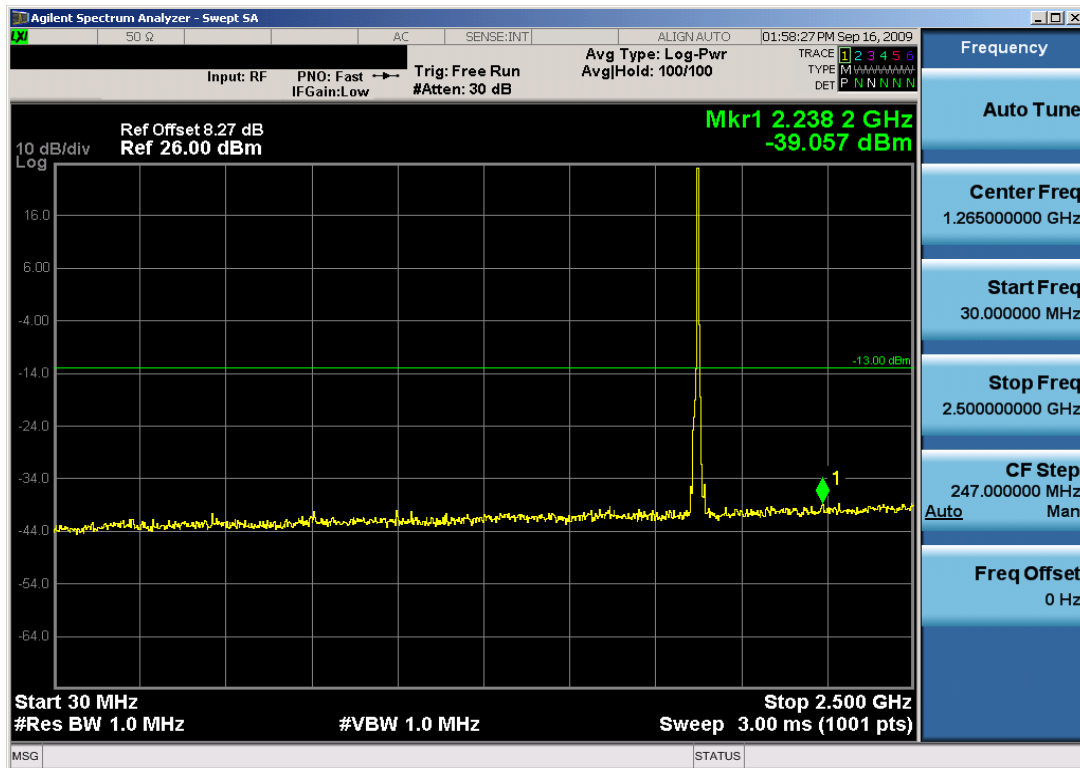


Plot 7-38. Conducted Spurious Plot (PCS WCDMA Mode – Ch. 9400)

FCC ID: ACJ9TGCF-527	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 GSM/EDGE/CDMA/WCDMA TEST REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0912152256.ACJ	Test Dates: December 28, 2009 - January 29, 2010	EUT Type: Toughbook Model: CF-52mk3		Page 65 of 81

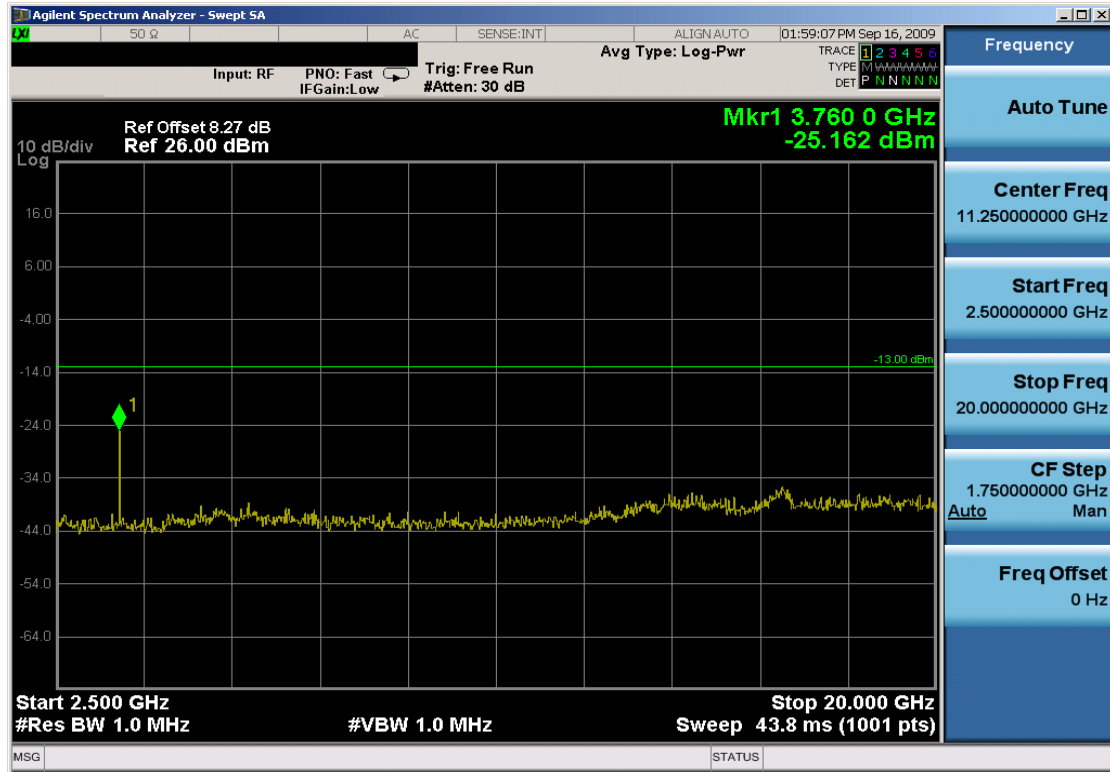


Plot 7-39. Conducted Spurious Plot (PCS WCDMA Mode – Ch. 9400)

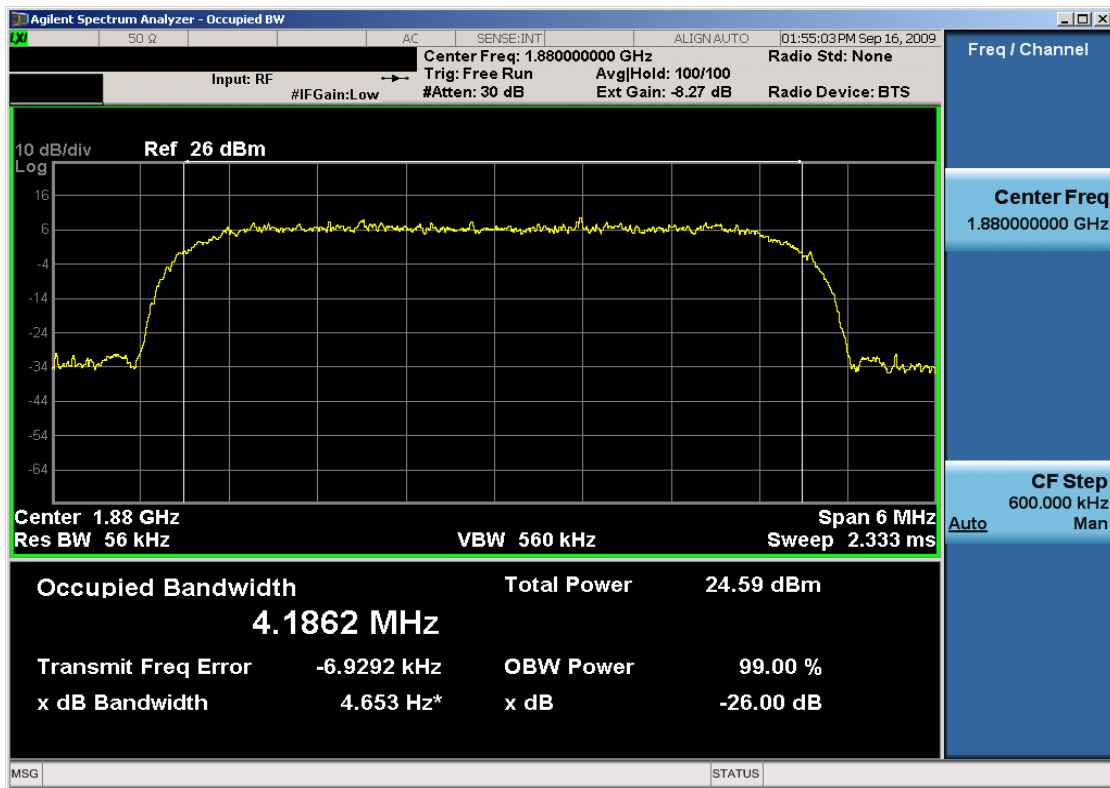


Plot 7-40. Occupied Bandwidth Plot (PCS WCDMA Mode – Ch. 9400)

FCC ID: ACJ9TGCF-527	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 GSM/EDGE/CDMA/WCDMA TEST REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0912152256.ACJ	Test Dates: December 28, 2009 - January 29, 2010	EUT Type: Toughbook Model: CF-52mk3		Page 66 of 81

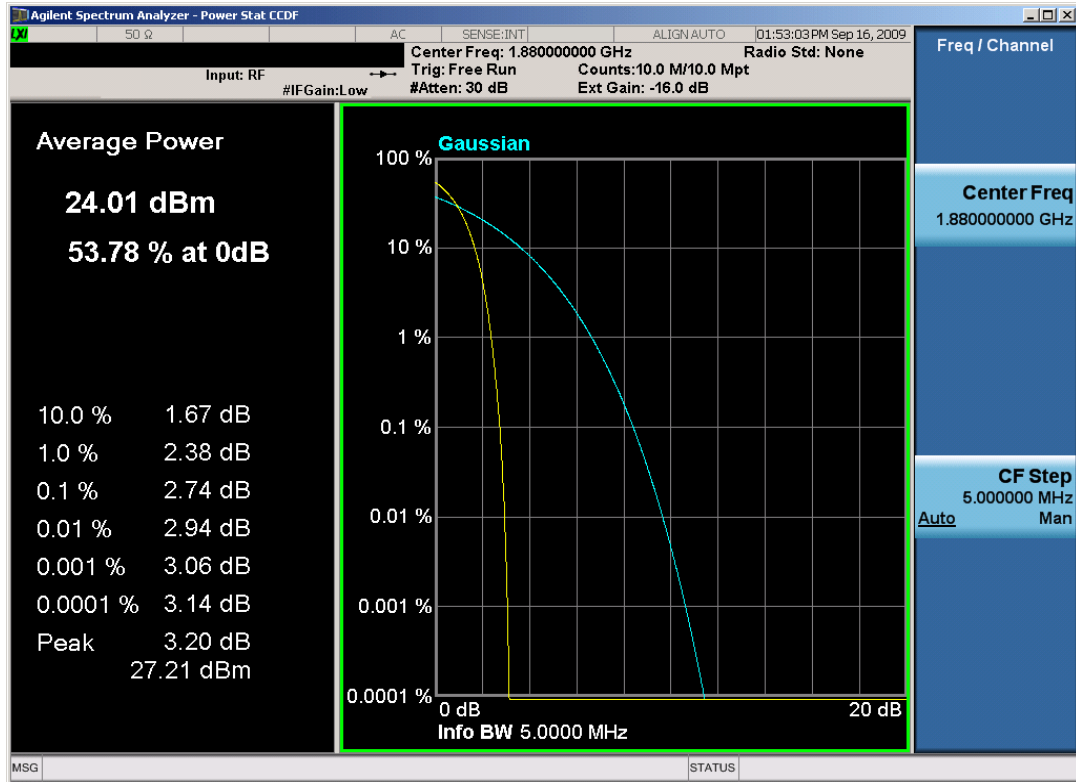


Plot 7-41. Peak-Average Ratio Plot (PCS WCDMA Mode – Ch. 9400)

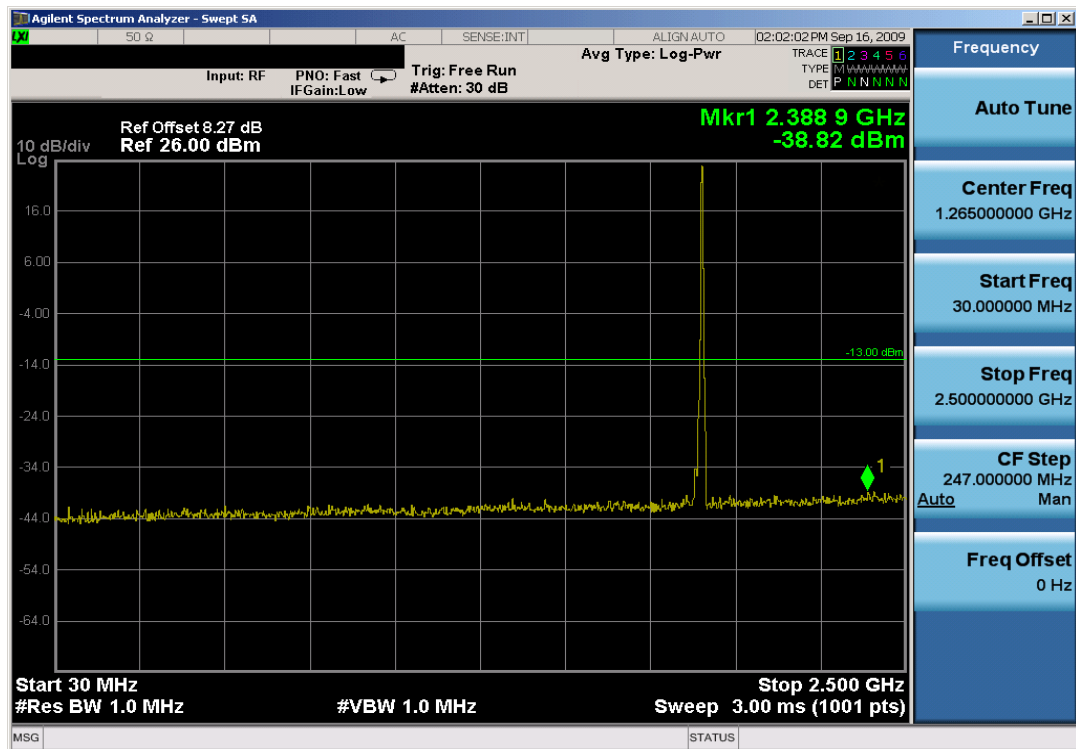


Plot 7-42. Conducted Spurious Plot (PCS WCDMA Mode – Ch. 9538)

FCC ID: ACJ9TGCF-527	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 GSM/EDGE/CDMA/WCDMA TEST REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0912152256.ACJ	Test Dates: December 28, 2009 - January 29, 2010	EUT Type: Toughbook Model: CF-52mk3		Page 67 of 81

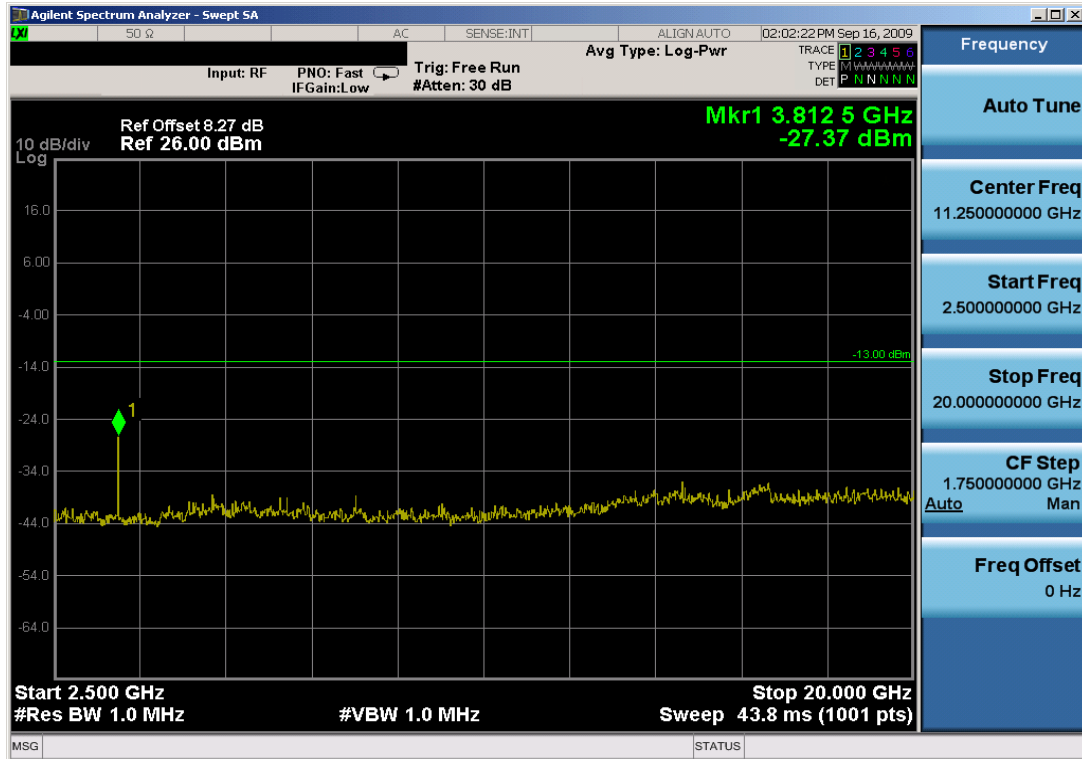


Plot 7-43. Conducted Spurious Plot (PCS WCDMA Mode – Ch. 9538)

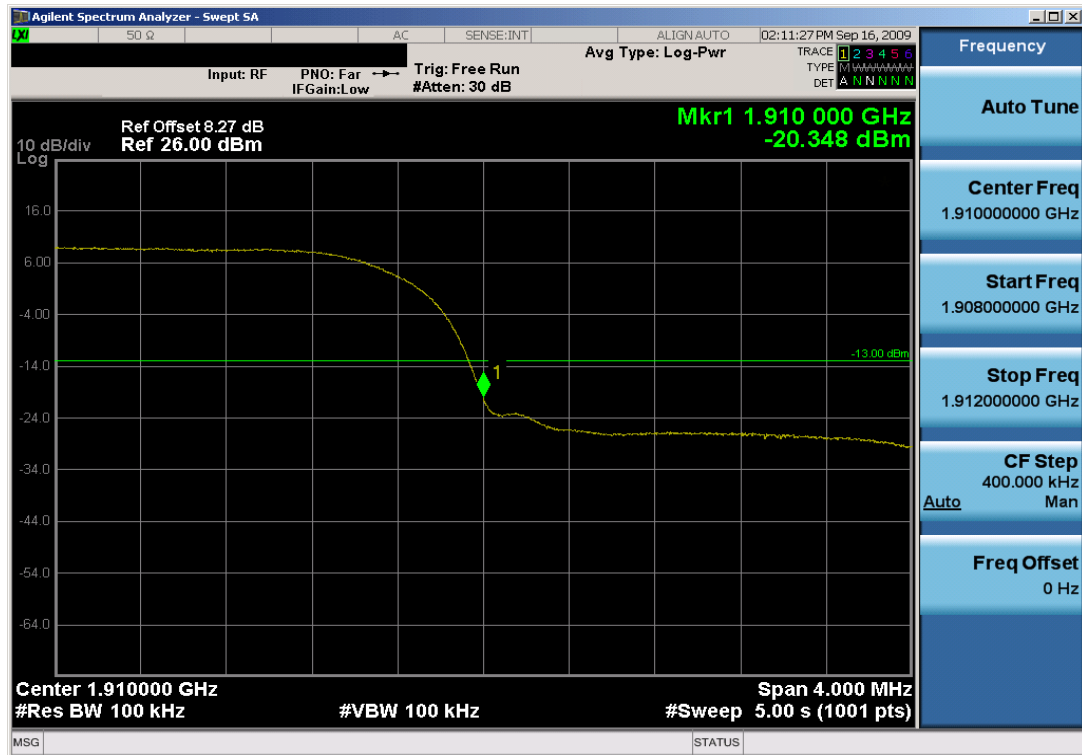


Plot 7-44. Band Edge Plot (PCS WCDMA Mode – Ch. 9538)

FCC ID: ACJ9TGCF-527	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 GSM/EDGE/CDMA/WCDMA TEST REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0912152256.ACJ	Test Dates: December 28, 2009 - January 29, 2010	EUT Type: Toughbook Model: CF-52mk3		Page 68 of 81

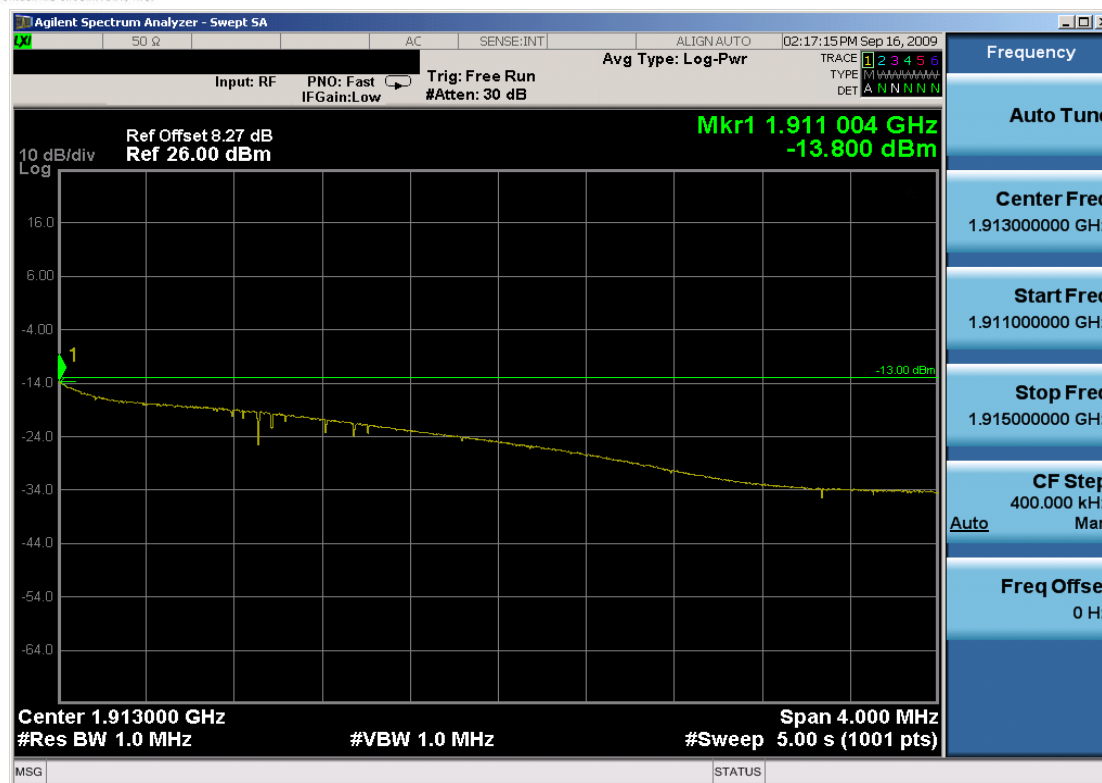


Plot 7-45. 4MHz Span Plot (PCS WCDMA Mode – Ch. 9538)

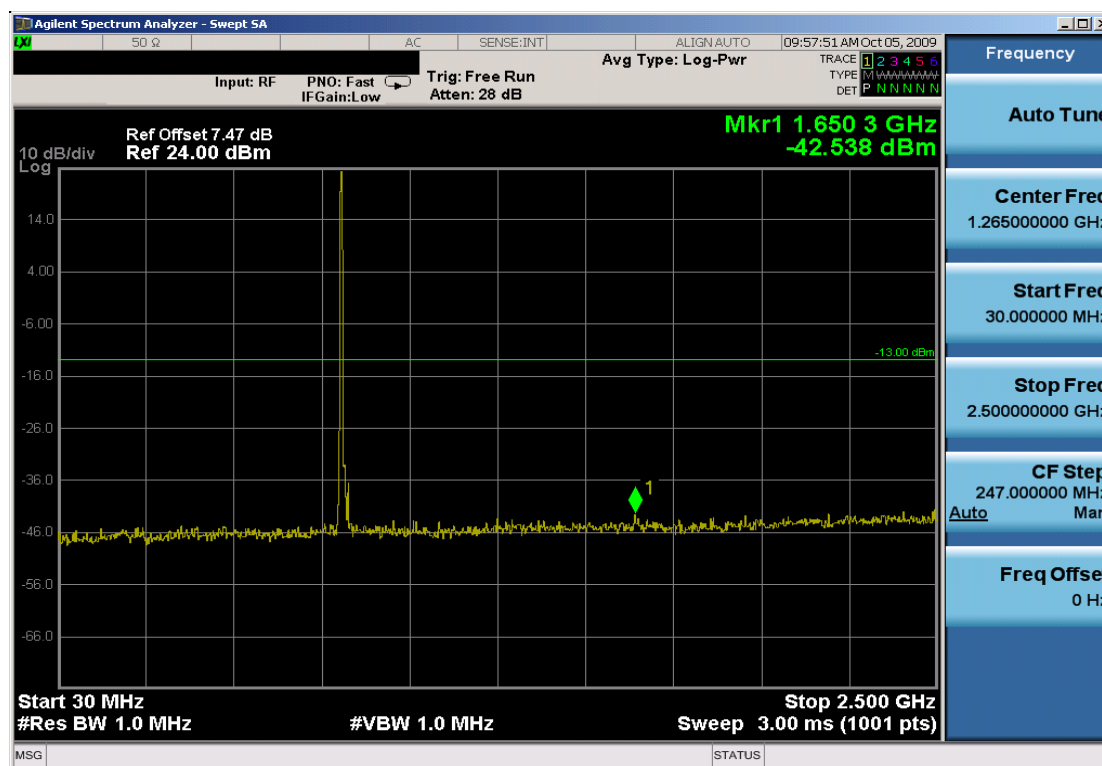


Plot 7-46. Conducted Spurious Plot (Cellular CDMA Mode – Ch. 1013)

FCC ID: ACJ9TGCF-527	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 GSM/EDGE/CDMA/WCDMA TEST REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0912152256.ACJ	Test Dates: December 28, 2009 - January 29, 2010	EUT Type: Toughbook Model: CF-52mk3		Page 69 of 81

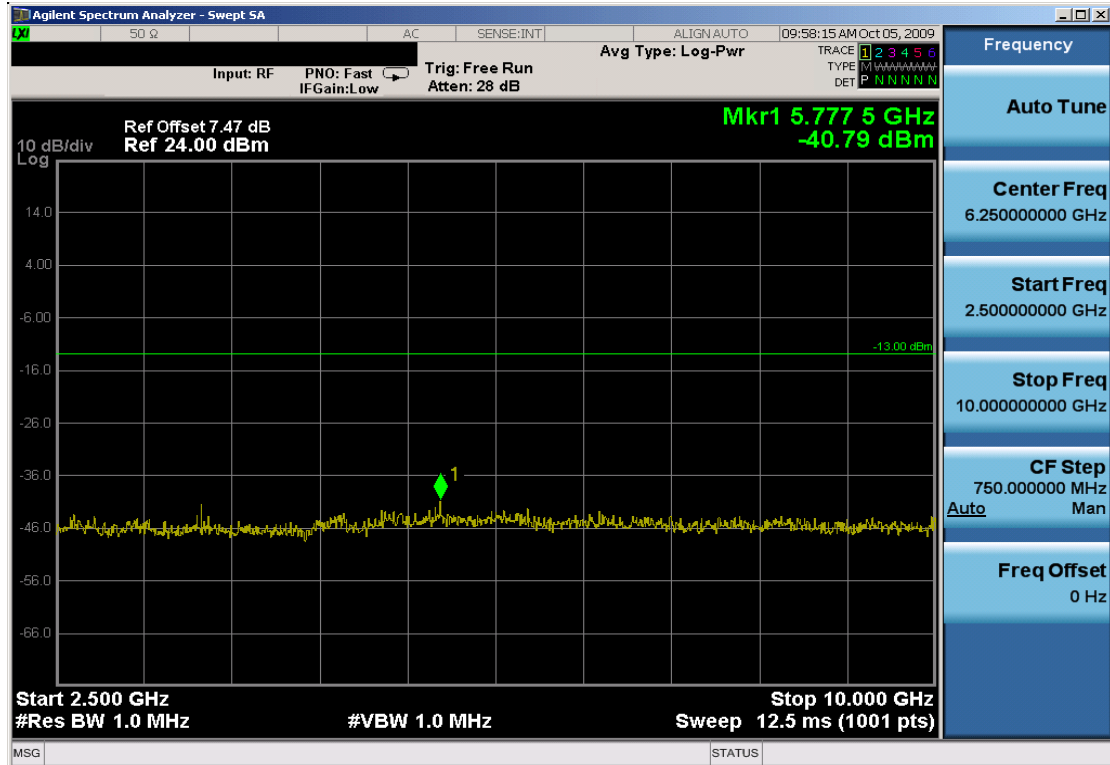


Plot 7-47. Conducted Spurious Plot (Cellular CDMA Mode – Ch. 1013)

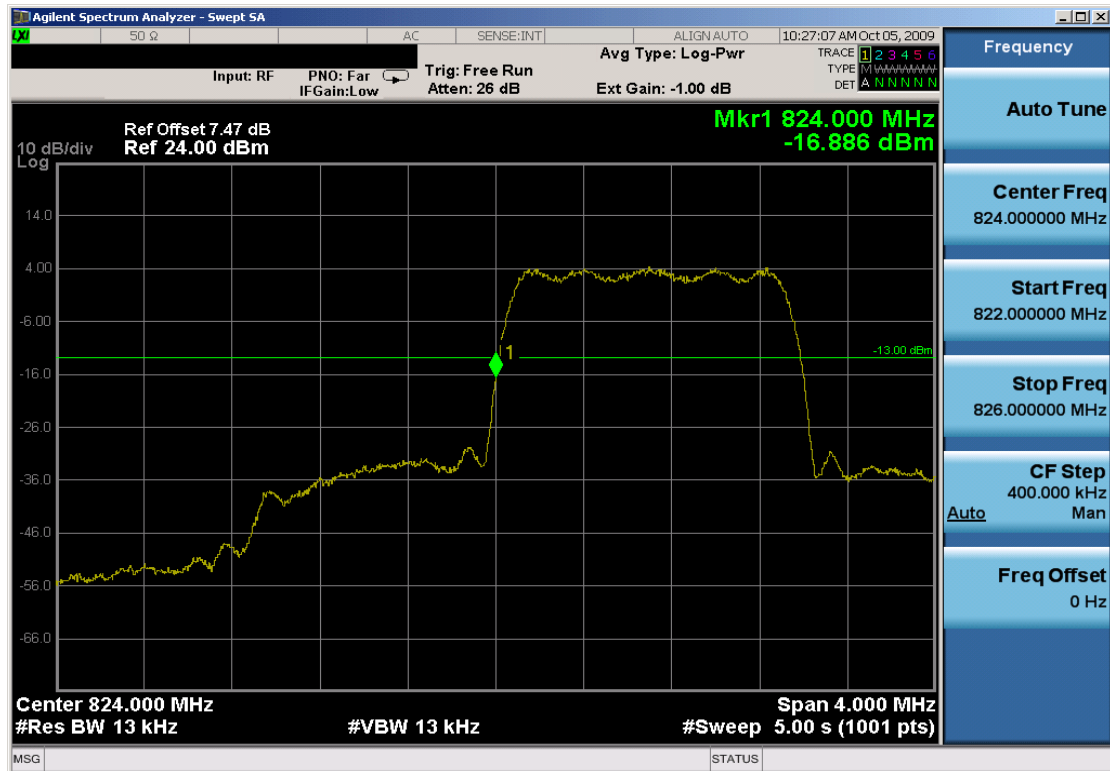


Plot 7-48. Band Edge Plot (Cellular CDMA Mode – Ch. 1013)

FCC ID: ACJ9TGCF-527	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 GSM/EDGE/CDMA/WCDMA TEST REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0912152256.ACJ	Test Dates: December 28, 2009 - January 29, 2010	EUT Type: Toughbook Model: CF-52mk3		Page 70 of 81

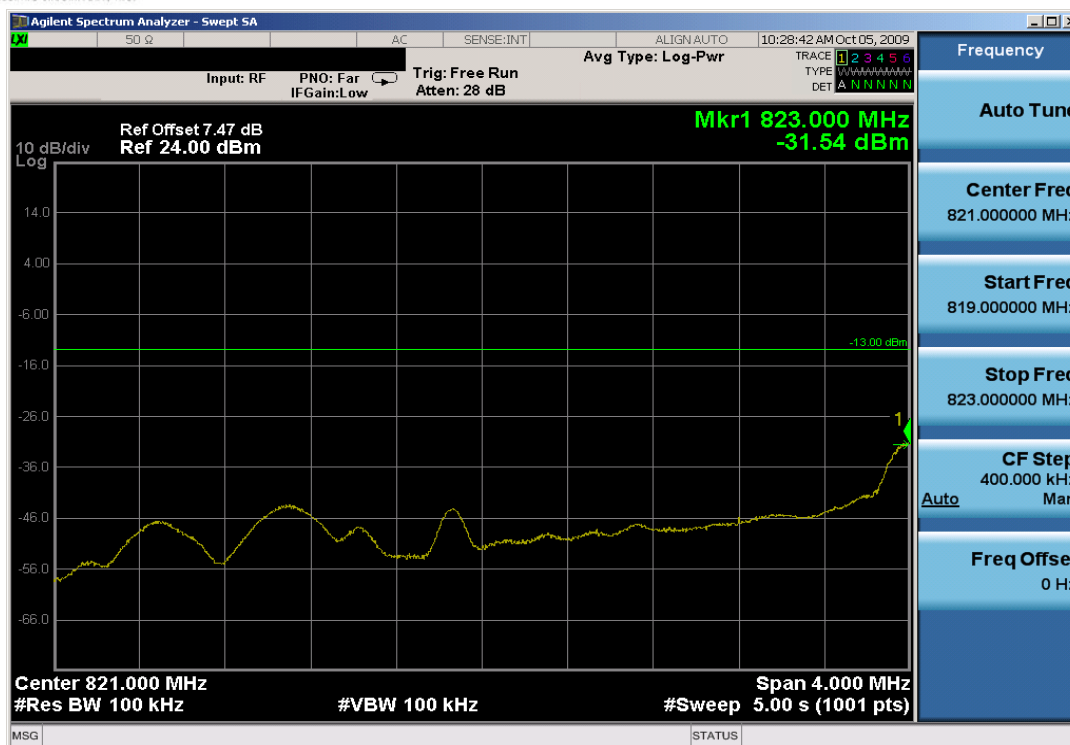


Plot 7-49. 4MHz Span Plot (Cellular CDMA Mode – Ch. 1013)

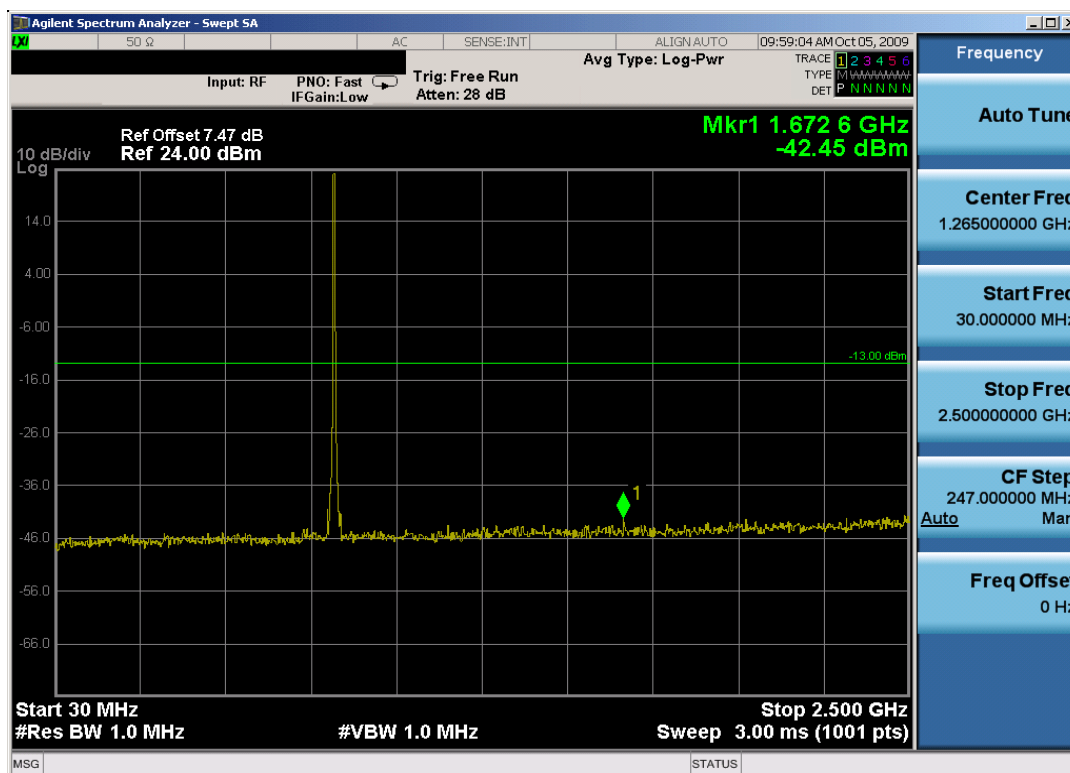


Plot 7-50. Conducted Spurious Plot (Cellular CDMA Mode – Ch. 384)

FCC ID: ACJ9TGCF-527	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 GSM/EDGE/CDMA/WCDMA TEST REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0912152256.ACJ	Test Dates: December 28, 2009 - January 29, 2010	EUT Type: Toughbook Model: CF-52mk3		Page 71 of 81

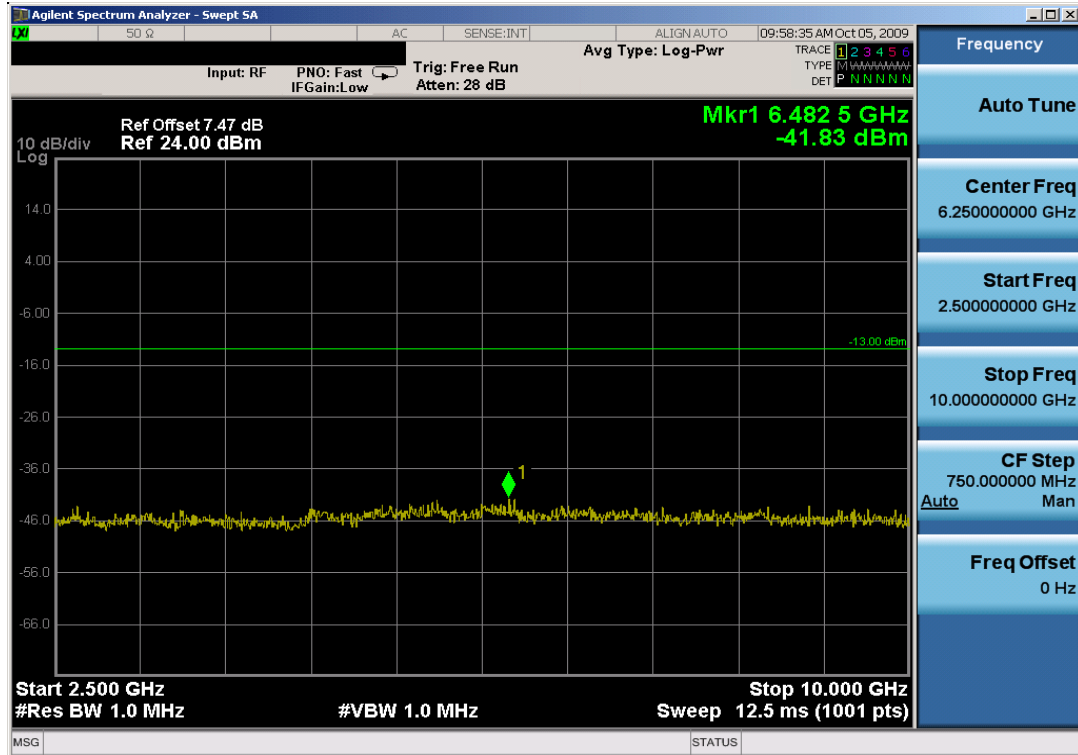


Plot 7-51. Conducted Spurious Plot (Cellular CDMA Mode – Ch. 384)

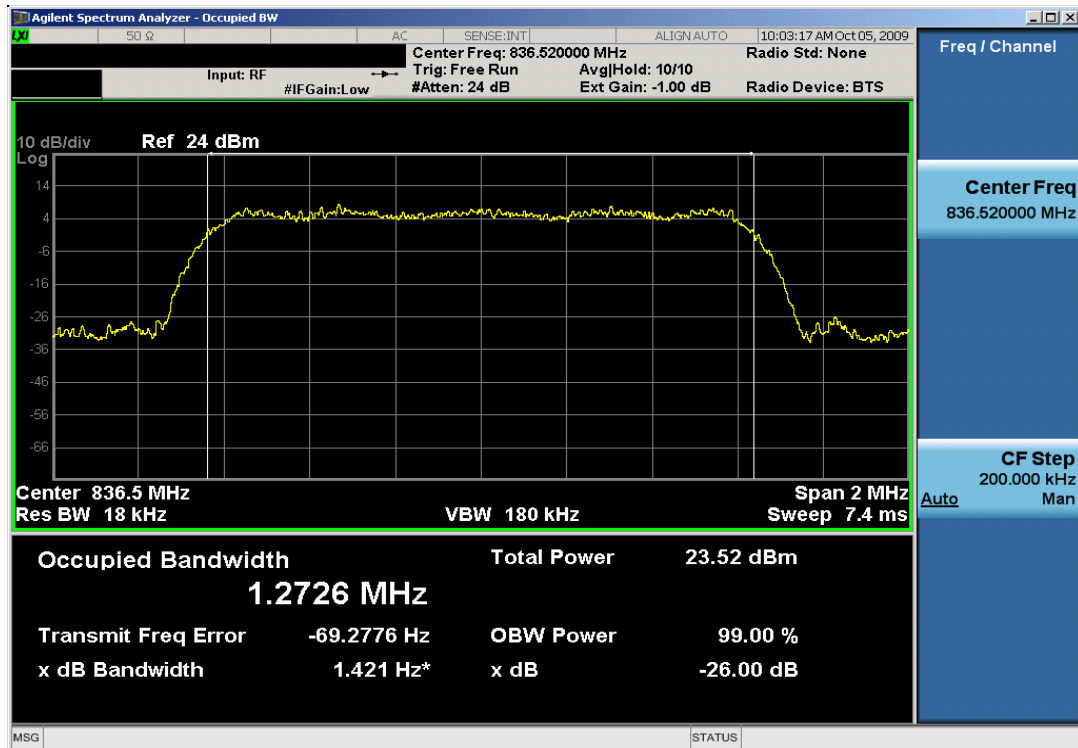


Plot 7-52. Occupied Bandwidth Plot (Cellular CDMA Mode – Ch. 1013)

FCC ID: ACJ9TGCF-527	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 GSM/EDGE/CDMA/WCDMA TEST REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0912152256.ACJ	Test Dates: December 28, 2009 - January 29, 2010	EUT Type: Toughbook Model: CF-52mk3		Page 72 of 81

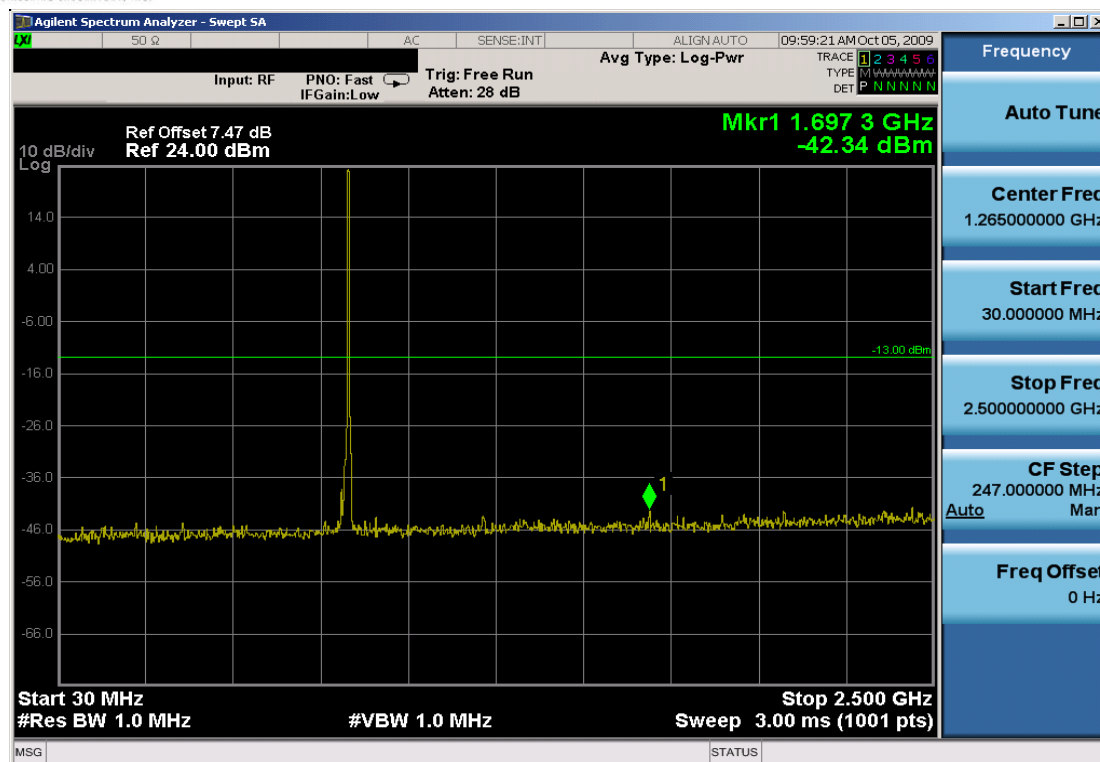


Plot 7-53. Conducted Spurious Plot (Cellular CDMA Mode – Ch. 777)

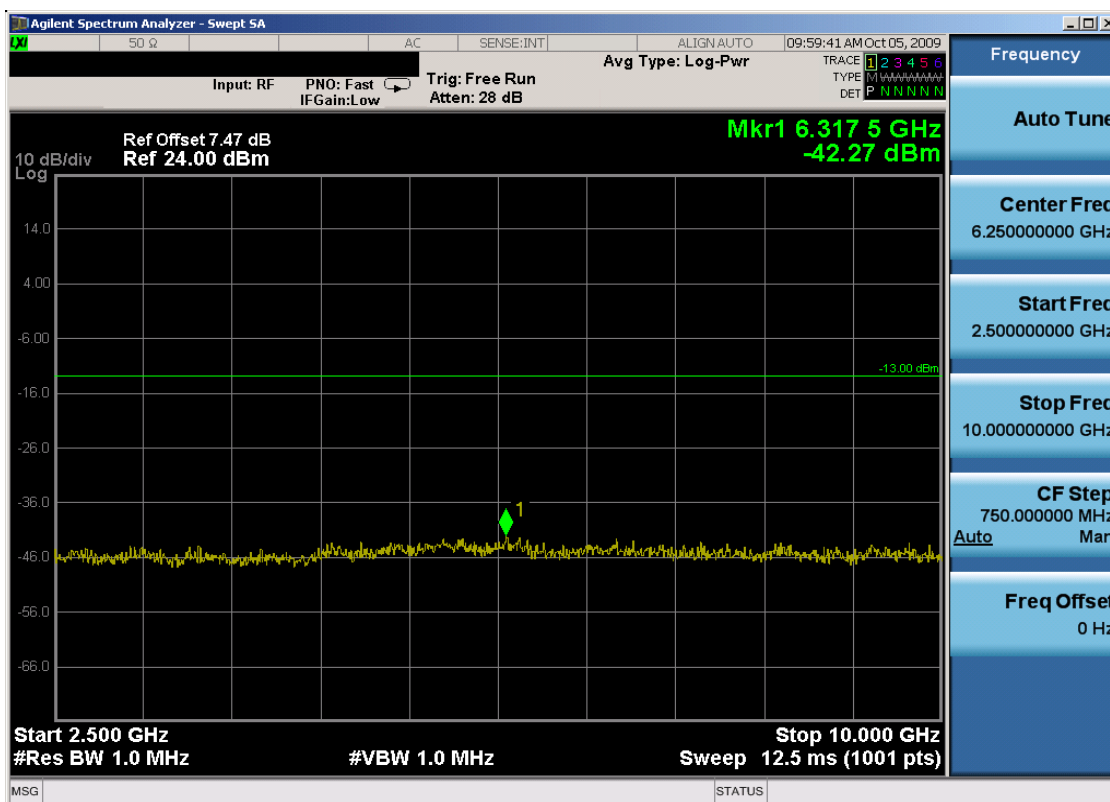


Plot 7-54. Conducted Spurious Plot (Cellular CDMA Mode – Ch. 777)

FCC ID: ACJ9TGCF-527	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 GSM/EDGE/CDMA/WCDMA TEST REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0912152256.ACJ	Test Dates: December 28, 2009 - January 29, 2010	EUT Type: Toughbook Model: CF-52mk3		Page 73 of 81

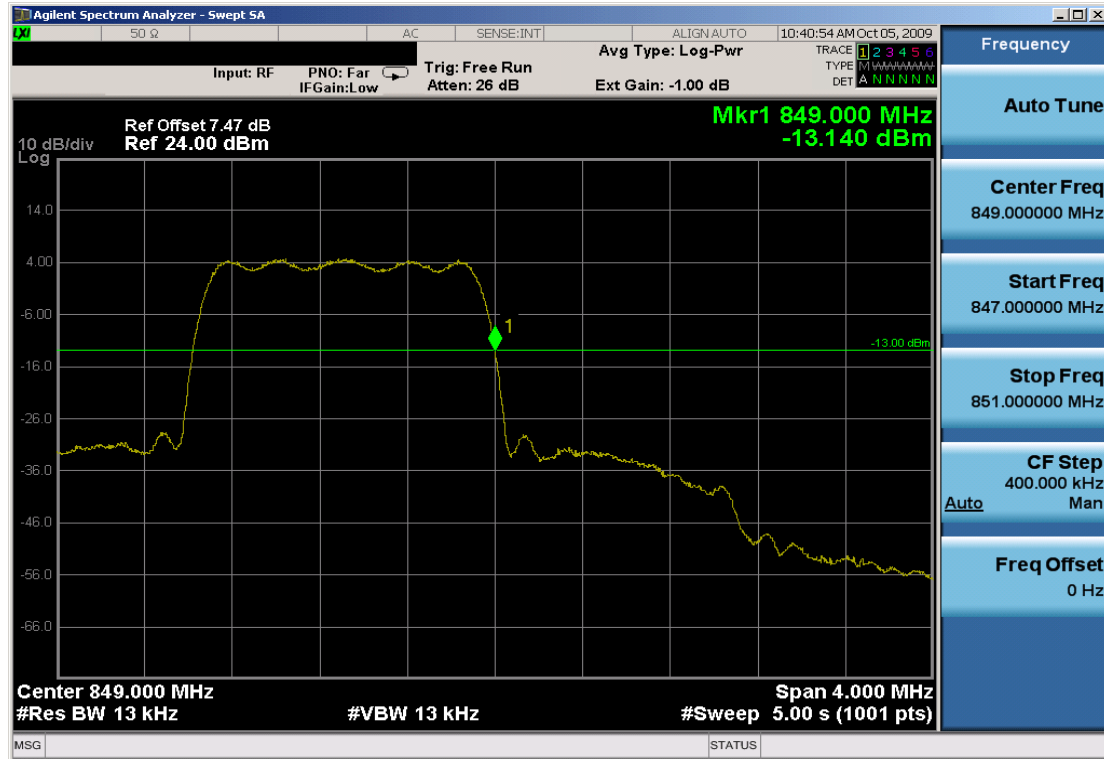


Plot 7-55. Band Edge Plot (Cellular CDMA Mode – Ch. 777)

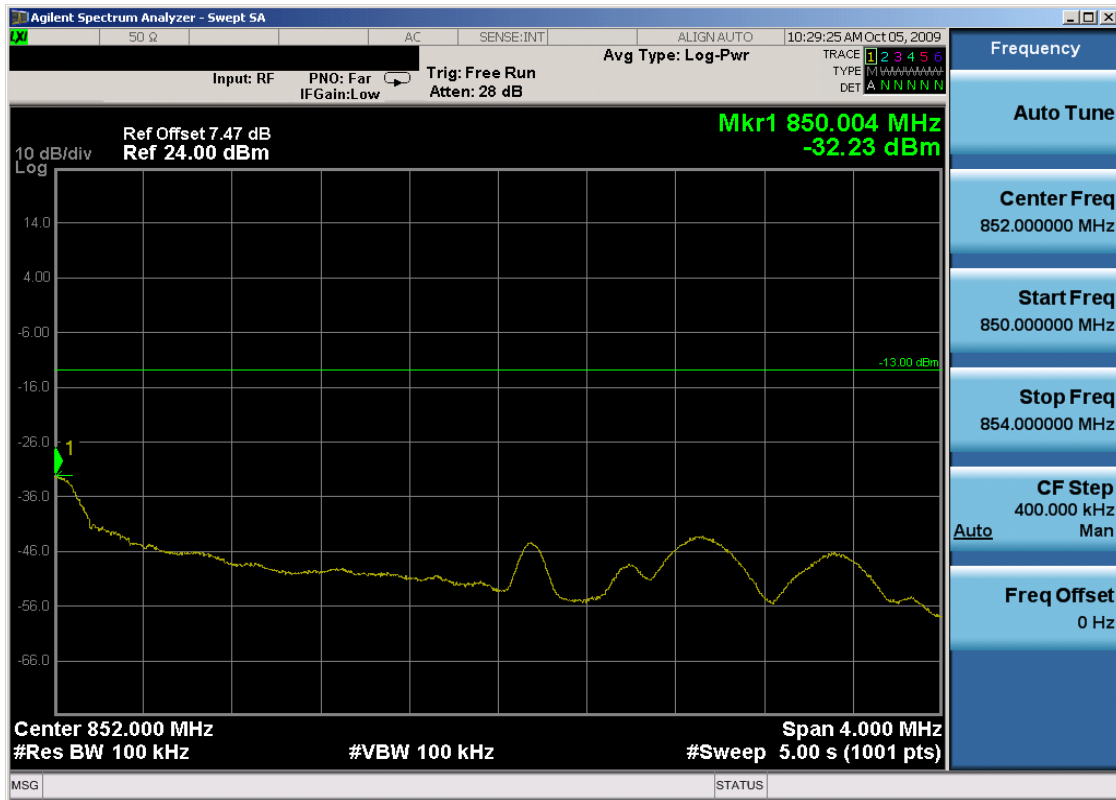


Plot 7-56. 4MHz Span Plot (Cellular CDMA Mode – Ch. 777)

FCC ID: ACJ9TGCF-527	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 GSM/EDGE/CDMA/WCDMA TEST REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0912152256.ACJ	Test Dates: December 28, 2009 - January 29, 2010	EUT Type: Toughbook Model: CF-52mk3		Page 74 of 81

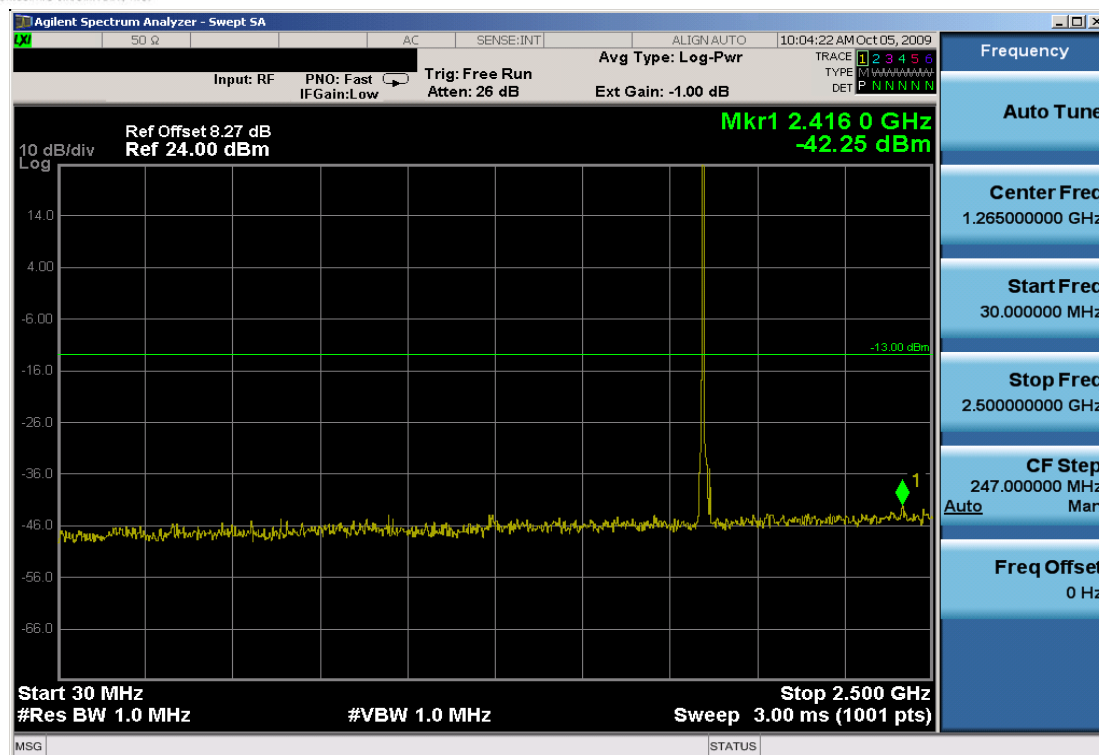


Plot 7-57. Conducted Spurious Plot (PCS CDMA Mode – Ch. 25)

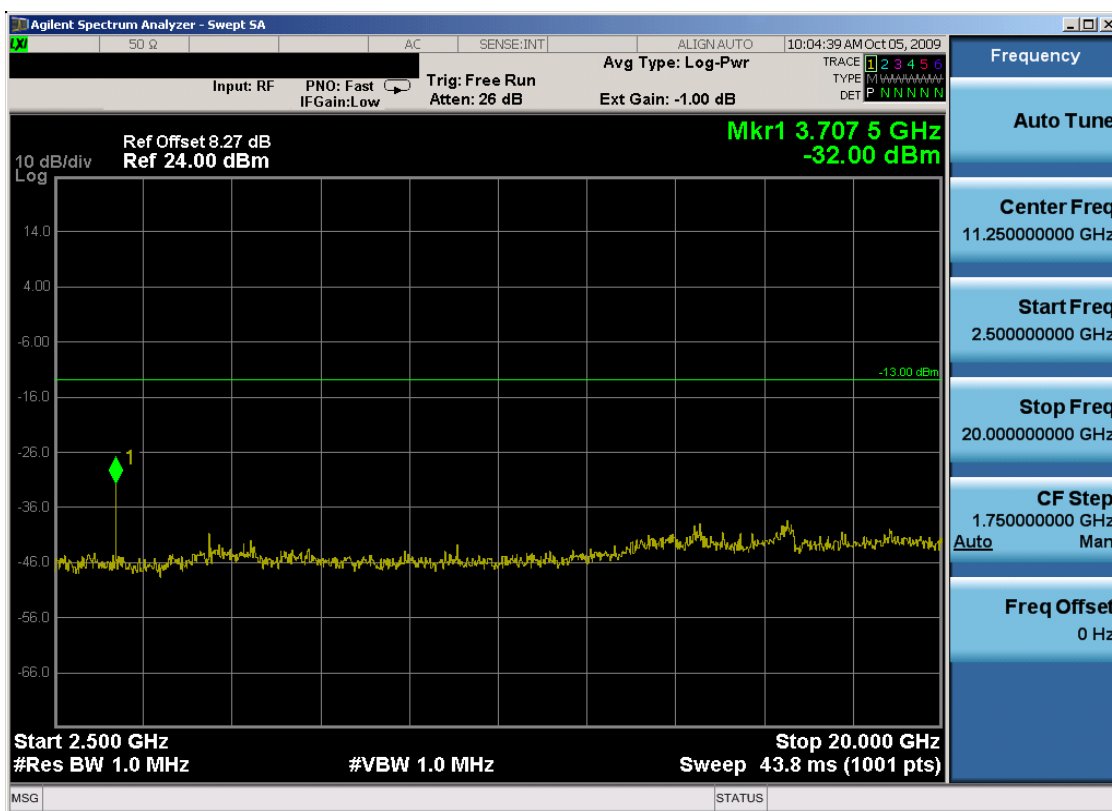


Plot 7-58. Conducted Spurious Plot (PCS CDMA Mode – Ch. 25)

FCC ID: ACJ9TGCF-527	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 GSM/EDGE/CDMA/WCDMA TEST REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0912152256.ACJ	Test Dates: December 28, 2009 - January 29, 2010	EUT Type: Toughbook Model: CF-52mk3		Page 75 of 81

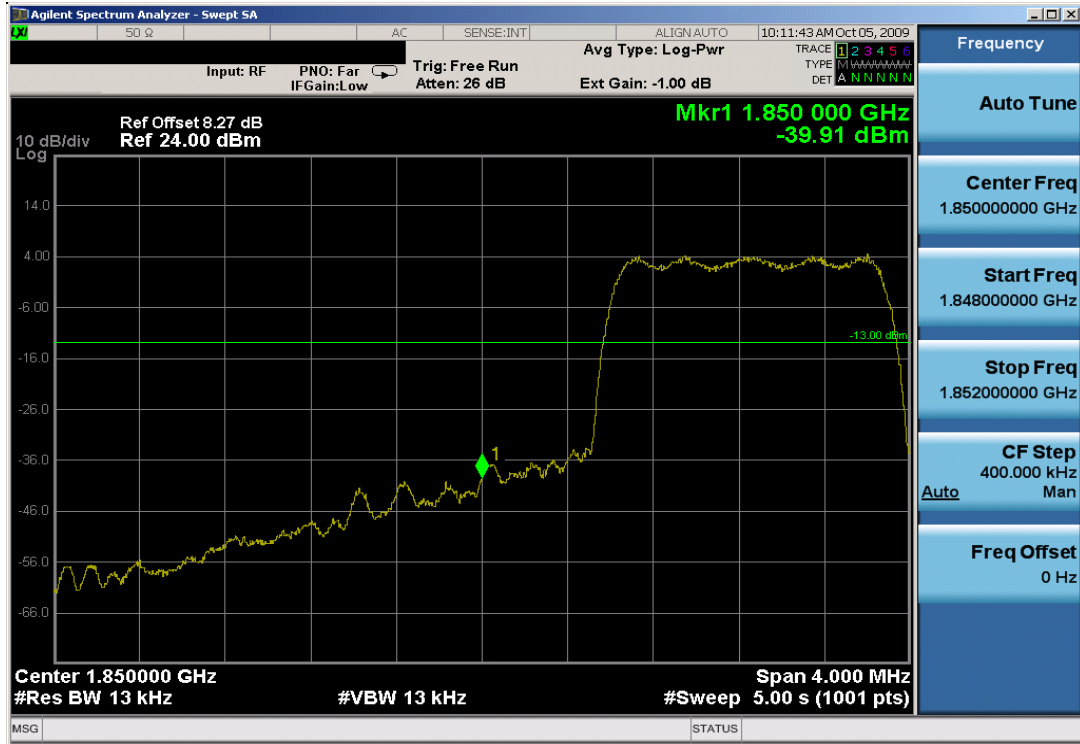


Plot 7-59. Band Edge Plot (PCS CDMA Mode – Ch. 25)

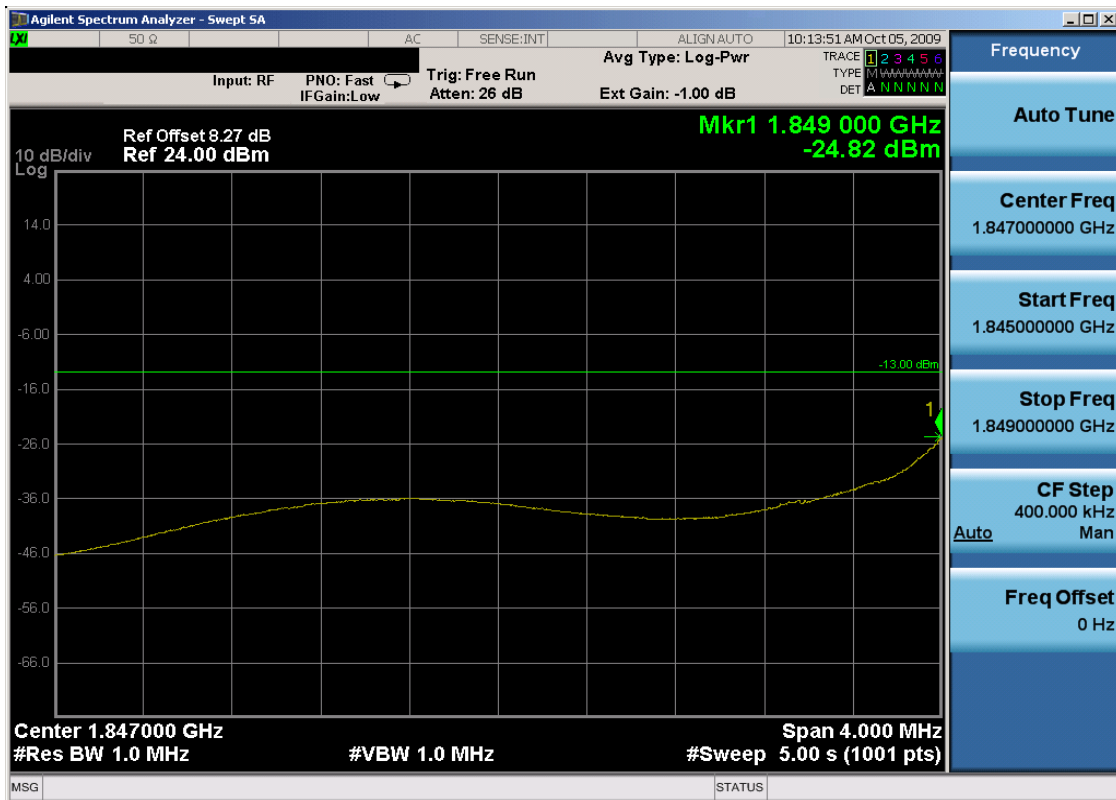


Plot 7-60. 4MHz Span Plot (PCS CDMA Mode – Ch. 25)

FCC ID: ACJ9TGCF-527	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 GSM/EDGE/CDMA/WCDMA TEST REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0912152256.ACJ	Test Dates: December 28, 2009 - January 29, 2010	EUT Type: Toughbook Model: CF-52mk3		Page 76 of 81

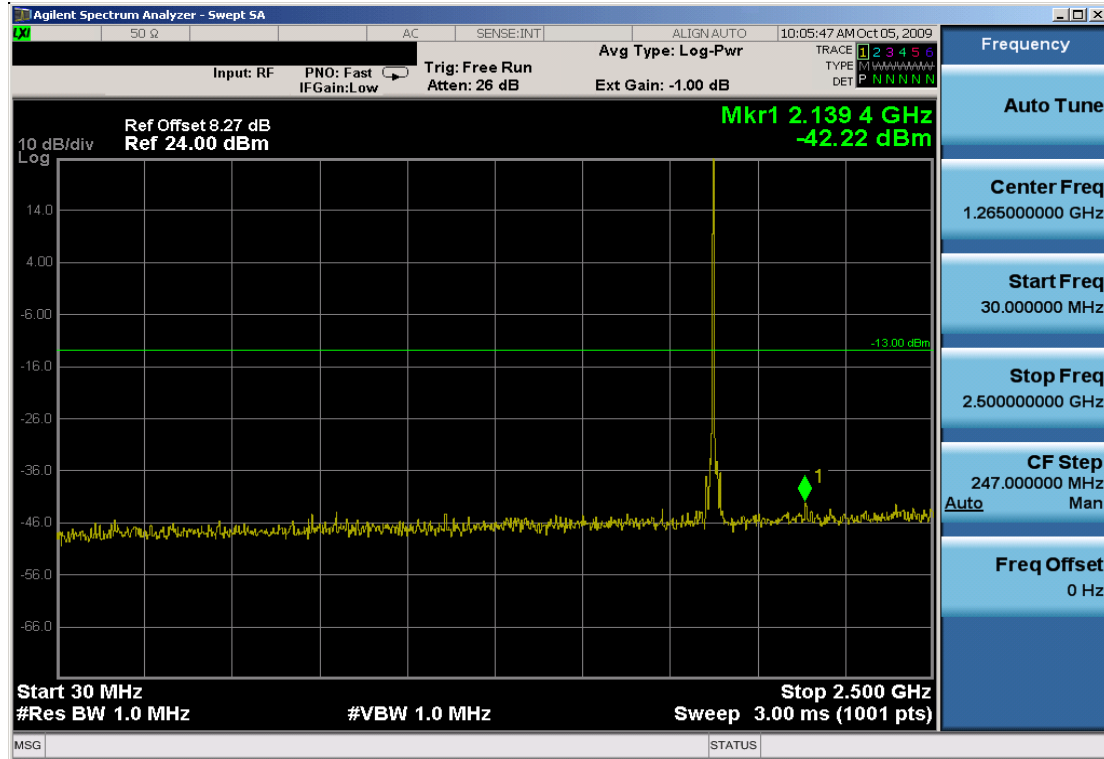


Plot 7-61. Conducted Spurious Plot (PCS CDMA Mode – Ch. 600)

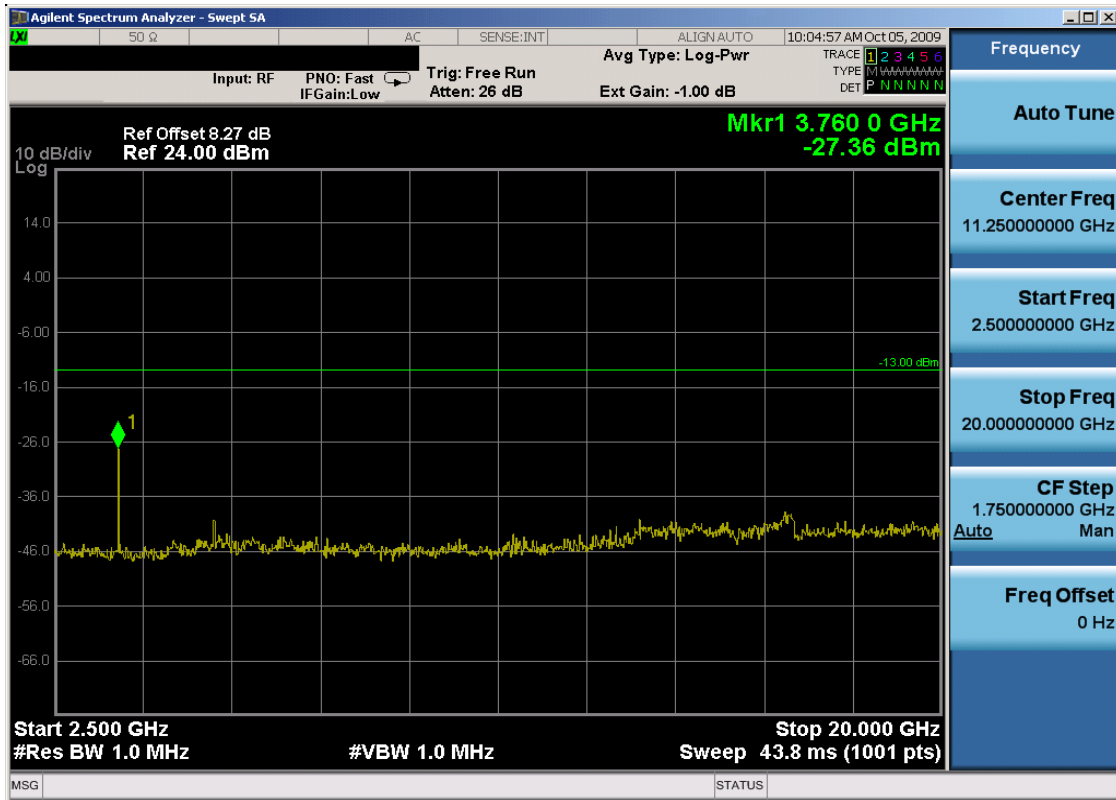


Plot 7-62. Conducted Spurious Plot (PCS CDMA Mode – Ch. 600)

FCC ID: ACJ9TGCF-527	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 GSM/EDGE/CDMA/WCDMA TEST REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0912152256.ACJ	Test Dates: December 28, 2009 - January 29, 2010	EUT Type: Toughbook Model: CF-52mk3		Page 77 of 81

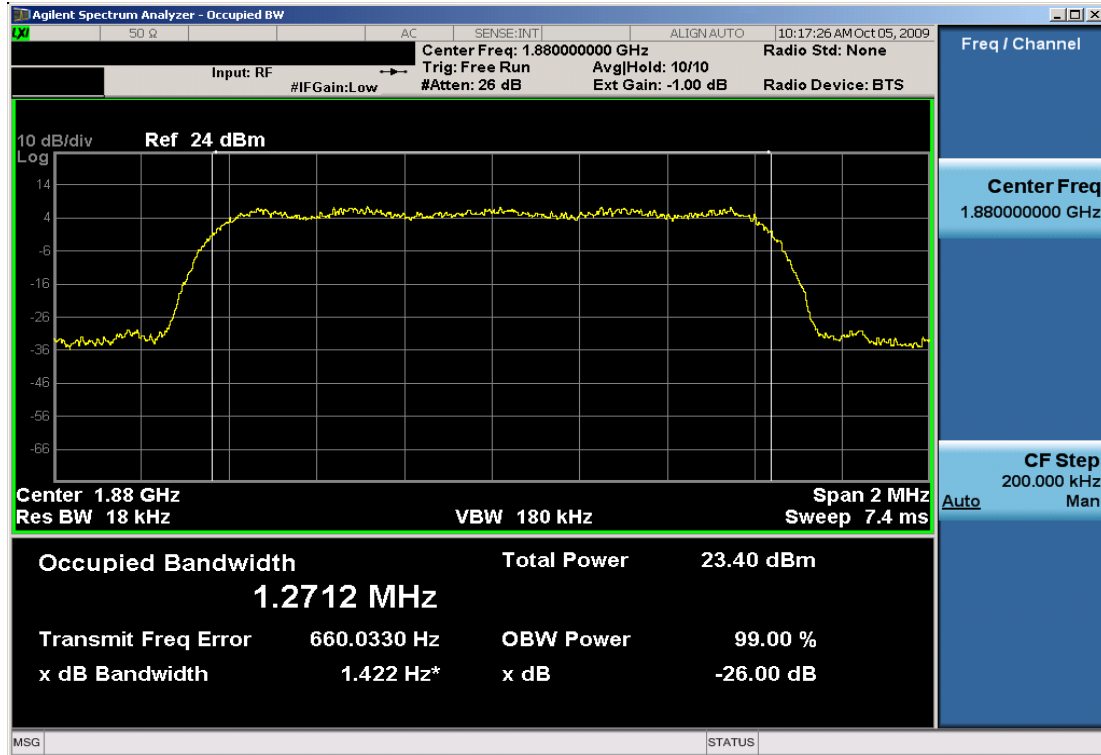


Plot 7-63. Occupied Bandwidth Plot (PCS CDMA Mode – Ch. 600)

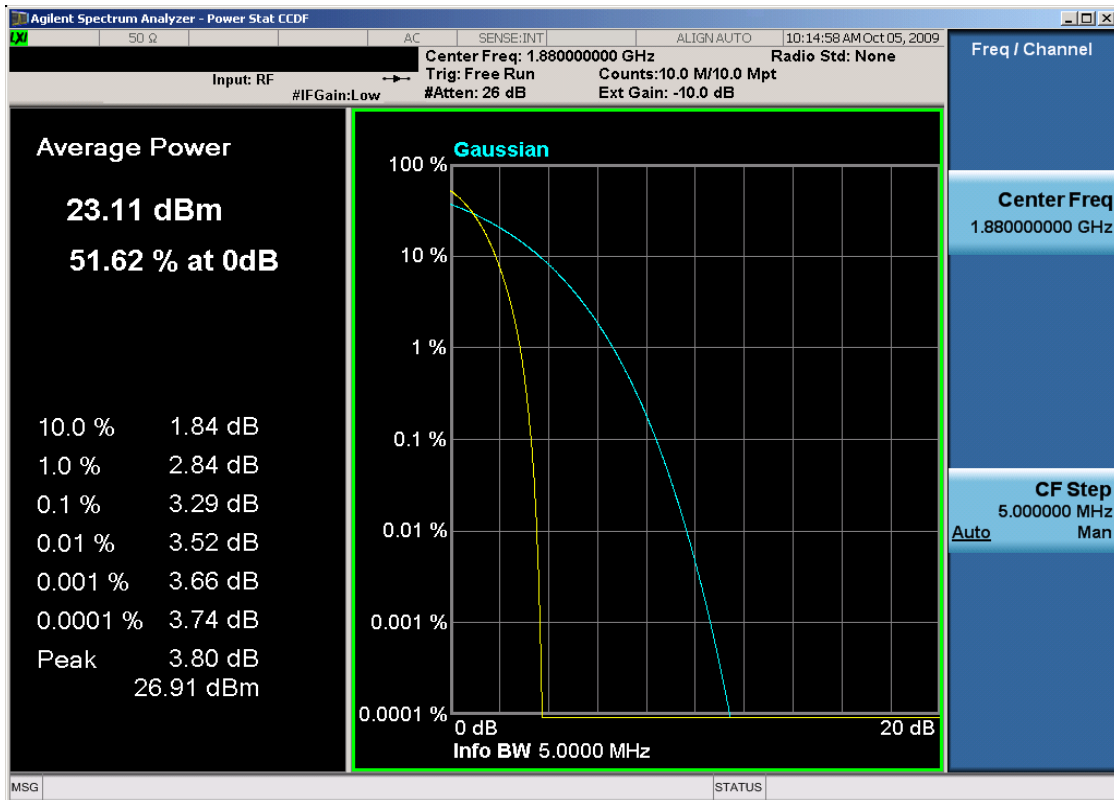


Plot 7-64. Peak-Average Ratio Plot (PCS CDMA Mode – Ch. 600)

FCC ID: ACJ9TGCF-527	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 GSM/EDGE/CDMA/WCDMA TEST REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0912152256.ACJ	Test Dates: December 28, 2009 - January 29, 2010	EUT Type: Toughbook Model: CF-52mk3		Page 78 of 81

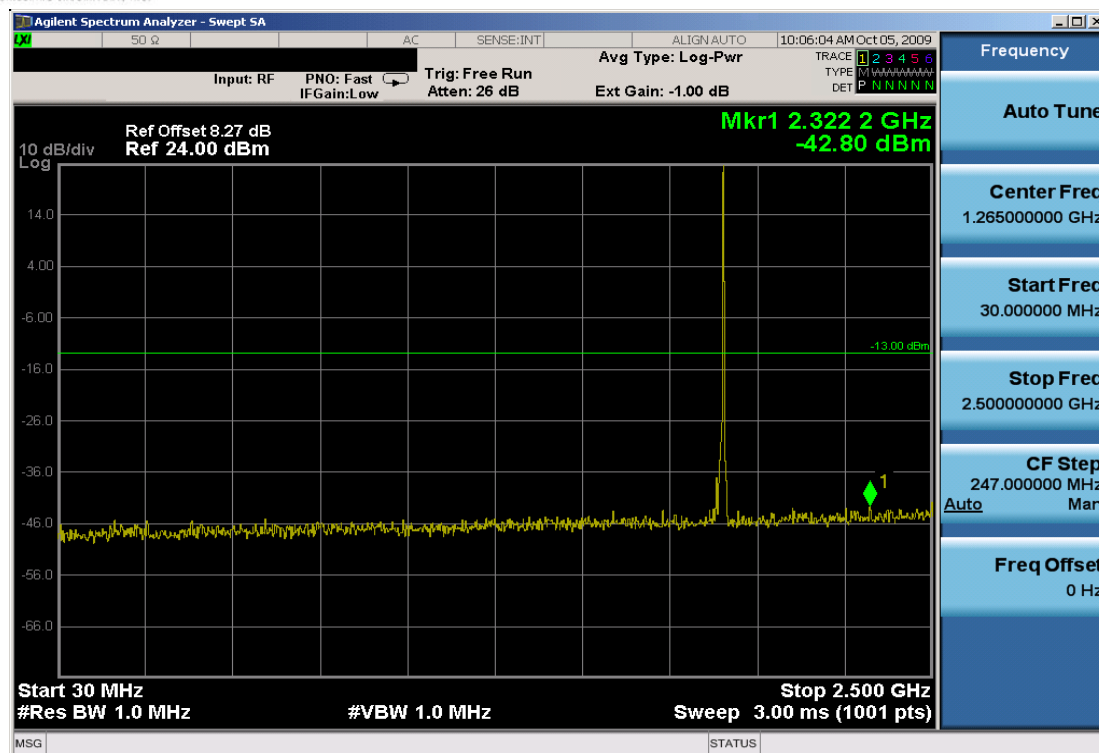

Plot 7-65. Conducted Spurious Plot (PCS CDMA Mode – Ch. 1175)

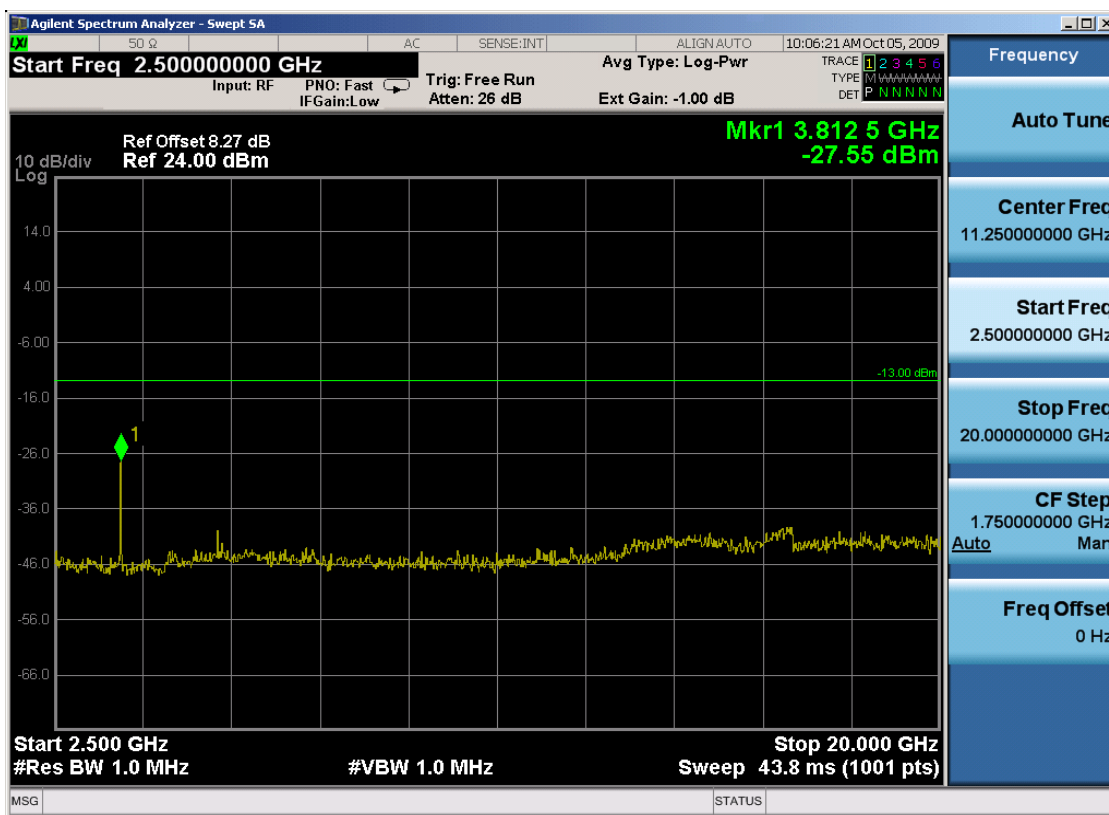

Plot 7-66. Conducted Spurious Plot (PCS CDMA Mode – Ch. 1175)

FCC ID: ACJ9TGCF-527	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 GSM/EDGE/CDMA/WCDMA TEST REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0912152256.ACJ	Test Dates: December 28, 2009 - January 29, 2010	EUT Type: Toughbook Model: CF-52mk3		Page 79 of 81



Plot 7-67. Band Edge Plot (PCS CDMA Mode - Ch. 1175)



Plot 7-68. 4MHz Span Plot (PCS CDMA Mode - Ch. 1175)

FCC ID: ACJ9TGCF-527	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 GSM/EDGE/CDMA/WCDMA TEST REPORT (CERTIFICATION)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0912152256.ACJ	Test Dates: December 28, 2009 - January 29, 2010	EUT Type: Toughbook Model: CF-52mk3		Page 80 of 81

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Panasonic Toughbook Model: CF-52mk3 FCC ID: ACJ9TGCF-527** complies with all the requirements of Parts 2, 22, and 24 of the FCC rules.

FCC ID: ACJ9TGCF-527		FCC Pt. 22/24 GSM/EDGE/CDMA/WCDMA TEST REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0912152256.ACJ	Test Dates: December 28, 2009 - January 29, 2010	EUT Type: Toughbook Model: CF-52mk3		Page 81 of 81