



# PCTEST ENGINEERING LABORATORY, INC.

6660-B Dobbin Road, Columbia, MD 21045 USA  
Tel. 410.290.6652 / Fax 410.290.6554  
<http://www.pctestlab.com>



## CERTIFICATE OF COMPLIANCE FCC PART 15.407 Certification

**Applicant Name:**  
Panasonic Corporation of North America  
One Panasonic Way, 4B-8  
Secaucus, NJ 07094  
United States

**Date of Testing:**  
July 6 - July 7, 2006  
**Test Site/Location:**  
PCTEST Lab, Columbia, MD, USA  
**Test Report Serial No.:**  
0606160517

<b>FCC ID:</b>	<b>ACJ9TGCF-742</b>
<b>APPLICANT:</b>	<b>Panasonic Corporation of North America</b>

**Model(s):** CF-74  
**EUT Type:** Panasonic Toughbook Model: CF-74  
**Max. RF Output Power:** 16.08 dBm Conducted (Low Band)  
 19.68 dBm Conducted (High Band)  
**Frequency Range:** 5180MHz – 5240MHz (Low Band)  
 5260MHz – 5320MHz (High Band)  
**FCC Classification:** Unlicensed National Information Infrastructure (UNII)  
**FCC Rule Part(s):** Part 15.407  
**Test Device Serial No.:** 6BKSA00246R

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C-63.4-2003. If the EUT contains any additional embedded transmitters, then those transmitters were active during all tests. The JBC portion of this EUT is covered in the DOC report. Radiated data was taken with the highest gain antenna.



I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

*Grant Conditions: Listed output power is conducted.*

*PCTEST certifies that no party to this application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 862.*



  
Randy Ortanez  
President




<b>PCTEST™ PT. 15.407 UNII TEST REPORT</b>		<b>FCC CERTIFICATION REPORT (802.11a UNII BAND)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0606160517	<b>Test Dates:</b> July 6 - July 7, 2006	<b>EUT Type:</b> Panasonic Toughbook Model: CF-74	<b>FCC ID:</b> ACJ9TGCF-742	Page 1 of 38

# TABLE OF CONTENTS

1.0	INTRODUCTION .....	4
1.1	EVALUATION PROCEDURE .....	4
1.2	SCOPE .....	4
1.3	PCTEST TEST LOCATION .....	4
2.0	PRODUCT INFORMATION .....	5
2.1	EQUIPMENT DESCRIPTION .....	5
2.2	EMI SUPPRESSION DEVICE(S)/MODIFICATIONS.....	5
3.0	DESCRIPTION OF TEST .....	6
3.1	CONDUCTED EMISSIONS .....	6
3.2	RADIATED EMISSIONS.....	7
4.0	ANTENNA REQUIREMENTS.....	8
5.0	TEST EQUIPMENT CALIBRATION DATA.....	9
6.0	CONCLUSION.....	10
EXHIBIT A - TEST RESULTS .....		11
	SUMMARY .....	11
	26DB BANDWIDTH MEASUREMENT .....	12
	OUTPUT POWER MEASUREMENT – UNII (LOW BAND).....	15
	OUTPUT POWER MEASUREMENT – UNII (HIGH BAND).....	16
	PEAK POWER SPECTRAL DENSITY .....	17
	PEAK EXCURSION RATIO .....	21
	RADIATED MEASUREMENTS .....	24
	RADIATED RESTRICTED BAND MEASUREMENTS .....	28
	LINE-CONDUCTED TEST DATA.....	30
EXHIBIT B – LABELING REQUIREMENTS .....		31
	SAMPLE LABEL & LOCATION .....	31
EXHIBIT C – BLOCK DIAGRAM/SCHEMATICS .....		33
EXHIBIT D – OPERATIONAL DESCRIPTION.....		34
EXHIBIT E – TEST SETUP PHOTOGRAPHS.....		35
EXHIBIT F – EUT EXTERNAL/INTERNAL PHOTOGRAPHS .....		36
EXHIBIT G – USER’S MANUAL .....		37
EXHIBIT H – SAR MEASUREMENT REPORT.....		38

<b>PCTEST™ PT. 15.407 UNII TEST REPORT</b>		<b>FCC CERTIFICATION REPORT (802.11a UNII BAND)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0606160517	<b>Test Dates:</b> July 6 - July 7, 2006	<b>EUT Type:</b> Panasonic Toughbook Model: CF-74	<b>FCC ID:</b> ACJ9TGCF-742	Page 2 of 38



# MEASUREMENT REPORT

## FCC Part 15.407

### A. General Information

**APPLICANT:** Panasonic Corporation of North America

**APPLICANT ADDRESS:** One Panasonic Way, 4B-8  
Secaucus, NJ 07094

**TEST SITE:** PCTEST ENGINEERING LABORATORY, INC.

**TEST SITE ADDRESS:** 6660-B Dobbin Road, Columbia, MD 21045 USA

**FCC RULE PART(S):** Part 15.407

**MODEL NAME:** CF-74

**FCC ID:** ACJ9TGCF-742

**Test Device Serial No.:** 6BKSA00246R  Production  Pre-Production  Engineering

**FCC CLASSIFICATION:** Unlicensed National Information Infrastructure (UNII)

**DATE(S) OF TEST:** July 6 - July 7, 2006

**TEST REPORT S/N:** 0606160517

## A.1 Test Facility / NVLAP Accreditation

Measurements were performed at PCTEST Engineering Lab in Columbia, MD 21045, U.S.A.

- PCTEST facility is an FCC registered (PCTEST Reg. No. 90864) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (IC 2451).
- PCTEST Lab is accredited by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP) in EMC, Telecommunication, and FCC for satisfactory compliance with criteria established in Title 15, Part 285 Code of Federal Regulations. (NVLAP Lab code: 100431-0).
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules.
- PCTEST facility is an IC registered (IC-2451) test laboratory with the site description on file at Industry Canada.

PCTEST™ PT. 15.407 UNII TEST REPORT		FCC CERTIFICATION REPORT (802.11a UNII BAND)		Reviewed by: Quality Manager
Test Report S/N: 0606160517	Test Dates: July 6 - July 7, 2006	EUT Type: Panasonic Toughbook Model: CF-74	FCC ID: ACJ9TGCF-742	Page 3 of 38

# 1.0 INTRODUCTION

## 1.1 Evaluation Procedure

The measurement procedure described in the American National Standard for Methods of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz (ANSI C63.4-2003) and FCC Public Notice dated July 12, 1995 entitled "Guidance on Measurement for Direct Sequence Spread Spectrum System" were used in the measurement of **Panasonic Toughbook Model: CF-74 FCC ID: ACJ9TGCF-742**.

Deviation from measurement procedure.....**NONE**


## 1.2 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission.

## 1.3 PCTEST Test Location

The map at the right shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity area, the Baltimore-Washington Intern'l (BWI) airport, the city of Baltimore and the Washington, DC area. (see Figure 1.3-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility in New Concept Business Park, Guilford Industrial Park, Columbia, Maryland. The site address is 6660-B Dobbin Road, Columbia, MD 21045. The test site is one of the highest points in the Columbia area with an elevation of 390 feet above mean sea level. The site coordinates are 39 11'15" N latitude and 76 49'38" W longitude. The facility is 1.5 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. There are no FM or TV transmitters within 15 miles of the site. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4 on October 19, 2002.

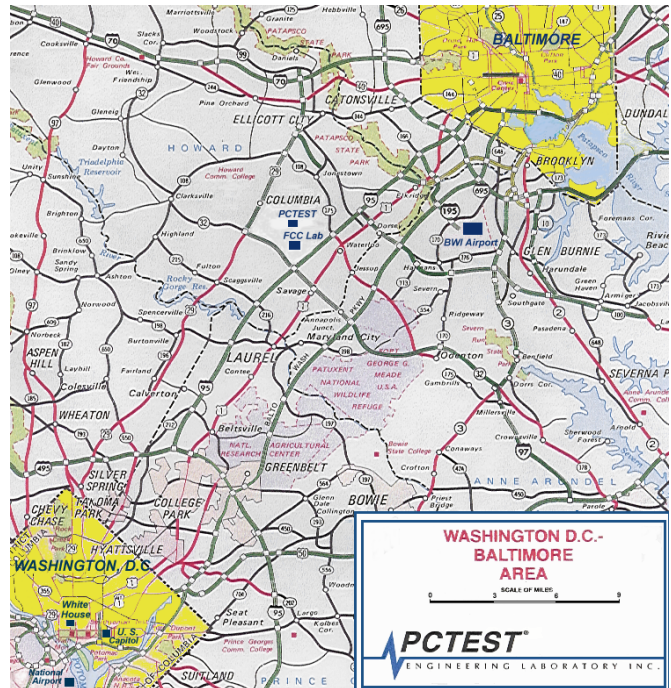

**Figure 1.3-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area**

PCTEST™ PT. 15.407 UNII TEST REPORT		FCC CERTIFICATION REPORT (802.11a UNII BAND)		Reviewed by: Quality Manager
Test Report S/N: 0606160517	Test Dates: July 6 - July 7, 2006	EUT Type: Panasonic Toughbook Model: CF-74	FCC ID: ACJ9TGCF-742	Page 4 of 38

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **Panasonic Toughbook Model: CF-74 FCC ID: ACJ9TGCF-742**.

The EUT consisted of the following components(s):



Manufacturer / Description	FCC ID	Serial Number
Panasonic Notebook PC	ACJ9TGCF-742	6BKSA00246R
Intel PRO/Wireless Network Module	PD9WM3945ABG	00C857355CVD26965004
Novatel HSDPA Module	NBZNRM-EU730	010854-00-001069-2
Taiyo Yuden Bluetooth Module	N/A	N/A

Table 2-1. EUT Equipment Description

### 2.2 EMI Suppression Device(s)/Modifications

EMI suppression device(s) added and/or modifications made during testing.

- None

PCTEST™ PT. 15.407 UNII TEST REPORT		FCC CERTIFICATION REPORT (802.11a UNII BAND)		Reviewed by: Quality Manager
Test Report S/N: 0606160517	Test Dates: July 6 - July 7, 2006	EUT Type: Panasonic Toughbook Model: CF-74	FCC ID: ACJ9TGCF-742	Page 5 of 38

## 3.0 DESCRIPTION OF TEST

### 3.1 Conducted Emissions




**Figure 3.1-1. Shielded Enclosure Line-Conducted Test Facility**



**Figure 3.1-2. Line Conducted Emission Test Set-Up**



**Figure 3.1-3. Wooden Table & Bonded LISNs**

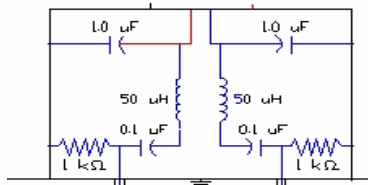


**Figure 3.1-4. LISN Schematic Diagram**

The line-conducted facility is located inside a 16'x20'x10' shielded enclosure, manufactured by Ray Proof Series 81 (see Figure 3.1-1). The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 1.5m away from the sidewall of the shielded room (see Figure 3.1-2). Solar Electronics and EMCO Model 3725/2 (10kHz-30MHz) 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room (See Figure 3.1-3). The EUT is powered from the Solar LISN and the support equipment is powered from the EMCO LISN. Power to the LISNs are filtered by a high-current high-insertion loss Ray Proof power line filter (100dB 14Hz-10GHz). The purpose of the filter is to attenuate ambient signal interference and this filter is also bonded to the shielded enclosure. All electrical cables are shielded by braided tinned copper zipper tubing with an inner diameter of ½". If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the Solar LISN. The LISN schematic diagram is shown (See Figure 3.1-4). All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion). Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer to determine the frequency producing the maximum EME from the EUT.


The spectrum was scanned from 150kHz to 30Mhz with a 20msec. sweep time. The frequencies producing the maximum level were re-examined using an EMI/Field Intensity Meter and Quasi-Peak adapter. The detector function was set to CISPR quasi-peak and average mode. The bandwidth of the receiver was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each EME emission. Each emission was maximized by: switching power lines; varying the mode of operation or resolution; clock or data exchange speed; scrolling H patter to the EUT and/or support equipment, and powering the monitor from the floor mounted outlet box and the computer aux AC outlet, if applicable; whichever determined the worst-case emission. Photographs of the worst-case emission can be seen in Exhibit M. Each EME reported was calibrated using the HP8640D signal generator.

PCTEST™ PT. 15.407 UNII TEST REPORT		FCC CERTIFICATION REPORT (802.11a UNII BAND)		Reviewed by: Quality Manager
Test Report S/N: 0606160517	Test Dates: July 6 - July 7, 2006	EUT Type: Panasonic Toughbook Model: CF-74	FCC ID: ACJ9TGCF-742	Page 6 of 38

## 3.2 Radiated Emissions

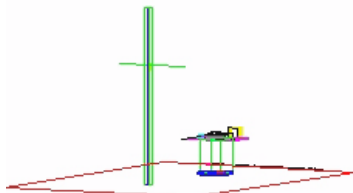


**Figure 3.2-1. Meter Test Site**



**Figure 3.2-2. Dimensions of Outdoor Test Site**



**Figure 3.2-3. Turntable and System Setup**

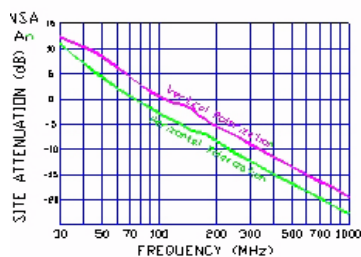

**Figure 3.2-4. Normalized Site Attenuation Curves (H&V)**

Preliminary measurements were made indoors at 1-meter using broadband antennas, broadband amplifier, and spectrum analyzer to determine the frequency producing the maximum EME. Appropriate precaution was taken to ensure that all EME from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, and turntable azimuth with respect to the antenna was noted for each frequency found. The spectrum was scanned from 30 to 200 MHz using a bi-conical antenna and from 200 to 1000 MHz using a log-spiral antenna. Above 1 GHz, linearly polarized double ridge horn antennas were used.

Final measurements were made outdoors at 3-meter test range using Roberts™ Dipole antennas or horn antennas (see Figure 3.2-1). The test equipment was placed on a wooden and plastic bench situated on a 1.5m x 2m area adjacent to the measurement area (see Figure 3.2-2). Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. Each frequency found during pre-scan measurements was re-examined and investigated using EMI/Field Intensity Meter and Quasi-Peak Adapter. The detector function was set to CISPR quasi-peak mode and the bandwidth of the receiver was set to 100kHz or 1MHz depending on the frequency or type of signal. Above 1GHz the detector function was set to CISPR average mode (RBW = 1MHz, VBW = 10Hz).

The half-wave dipole antenna was tuned to the frequency found during preliminary radiated measurements. The EUT, support equipment and interconnecting cables were re-configured to the set-up producing the maximum emission for the frequency and were placed on top of a 0.8-meter high non-metallic 1 x 1.5 meter table (see Figure 3.2-3). The EUT, support equipment, and interconnecting cables were re-arranged and manipulated to maximize each EME emission. The turntable containing the system was rotated; the antenna height was varied 1 to 4 meters and stopped at the azimuth or height producing the maximum emission. Each emission was maximized by: varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and/or support equipment, and powering the monitor from the floor mounted outlet box and the computer aux AC outlet, if applicable; and changing the polarity of the antenna, whichever determined the worst-case emission. Photographs of the worst-case emission can be seen in Exhibit E-G. Each EME reported was calibrated using the HP8640D signal generator. The Theoretical Normalized Site Attenuation Curves for both horizontal and vertical polarization are shown in Figure 3.2-4.

PCTEST™ PT. 15.407 UNII TEST REPORT		FCC CERTIFICATION REPORT (802.11a UNII BAND)		Reviewed by: Quality Manager
Test Report S/N: 0606160517	Test Dates: July 6 - July 7, 2006	EUT Type: Panasonic Toughbook Model: CF-74	FCC ID: ACJ9TGCF-742	Page 7 of 38

## 4.0 ANTENNA REQUIREMENTS

### Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the Panasonic Toughbook Model: CF-74 are **permanently attached antennae**.
- There are provisions for connection to an external antenna. Please refer to Panasonic's application cover letter for details.

### Conclusion:

The **Panasonic Toughbook Model: CF-74 FCC ID: ACJ9TGCF-742** unit complies with the requirement of §15.203.



#### Low Band

Ch.	Frequency (MHz)
36	5180
:	:
42	5210
:	:
48	5240

#### High Band

Ch.	Frequency (MHz)
52	5260
:	:
56	5280
:	:
64	5320

Table 4.1 Frequency/ Channel Operations



PCTEST™ PT. 15.407 UNII TEST REPORT		FCC CERTIFICATION REPORT (802.11a UNII BAND)		Reviewed by: Quality Manager
Test Report S/N: 0606160517	Test Dates: July 6 - July 7, 2006	EUT Type: Panasonic Toughbook Model: CF-74	FCC ID: ACJ9TGCF-742	Page 8 of 38

## 5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).



TYPE	MODEL	CAL. DUE DATE	CAL. INTERVAL	SERIAL No.
Microwave Spectrum Analyzer	Agilent E4448A (3Hz-50GHz)	09/19/06	Annual	US42510244
Spectrum Analyzer	HP 8566B (100Hz-2.5GHz/2-22GHz)	12/22/06	Annual	3638A08713
ESA-E Series Spectrum Analyzer	HP E4407B (9kHz-26.5GHz)	04/20/07	Annual	US39210313
Signal Generator	HP 8640D (500Hz-1GHz)	12/07/07	Annual	3613A00315
Series Signal Generator	Agilent E4432B (250kHz-3GHz)	04/15/07	Annual	US40053896
Power Meter	Rohde & Schwarz NRVS	06/02/07	Annual	835360/079
Power Sensor	Rohde & Schwarz NRV-Z53 (100μW – 10W)	06/02/07	Annual	846076/007
Quasi-Peak Adapter	HP 85650A	08/09/06	Annual	2043A00301
Preamplifier	HP 8449B (1-26.5GHz)	12/22/06	Annual	3008A00985
Attenuation/Switch Driver	HP 11713A	12/22/06	Annual	N/A
Preselector	HP 85685A (20Hz-2GHz)	12/22/06	Annual	N/A
6dB Resolution Bandwidth Spectrum Analyzer Display	OPT 462	12/22/06	Annual	3701A22204
Ailtech/Eaton Adapter	CCA-7 CISPR/ANSI QP Adapter	12/19/06	Annual	0194-04082
Ailtech/Eaton Receiver	NM 37/57A (30MHz – 1GHz)	06/07/07	Annual	0805-03334
Broadband Amplifier (2)	HP 8447D (0.1 – 1300MHz)	N/A	N/A	2443A01900, 1937A03348
Horn Antenna	EMCO Model 3115 (1-18GHz)	08/25/07	Annual	9704-5182
Horn Antenna	EMCO Model 3116 (18-40GHz)	08/25/07	Annual	9203-2178
Roberts Dipoles	Compliance Design (1 set) A100	08/31/06	Annual	5118
EMCO Dipoles (2)	N/A	05/08/08	Annual	00023951
EMCO LISN (3)	3816/2, 3816/2, 3725/2	10/26/06	Annual	1077, 1079, 2099
50-ohm Terminator	N/A	N/A	Annual	N/A
10dB Attenuator	HP 8493B	N/A	N/A	N/A
Microwave Cables	MicroCoax (1.0-26.5GHz)	02/26/07	Annual	N/A
Shielded Screen Room	RF Lindgren Model 26-2/2-0	N/A	N/A	6710 (PCT270)
Shielded Semi-Anechoic Chamber	Ray Proof Model S81	N/A	N/A	R2437 (PCT278)
Environmental Chamber	Associated Systems 1025	08/08/06	Annual	PCT285
OATS	N/A	12/31/2006	Tri-annual	N/A

**Table 5-1. Annual Test Equipment Calibration Schedule**

<b>PCTEST™ PT. 15.407 UNII TEST REPORT</b>		<b>FCC CERTIFICATION REPORT (802.11a UNII BAND)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0606160517	<b>Test Dates:</b> July 6 - July 7, 2006	<b>EUT Type:</b> Panasonic Toughbook Model: CF-74	<b>FCC ID:</b> ACJ9TGCF-742	Page 9 of 38

## 6.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Panasonic Toughbook Model: CF-74** **FCC ID: ACJ9TGCF-742** is in compliance with Part 15E of the FCC Rules.

<b>PCTEST™ PT. 15.407 UNII TEST REPORT</b>		<b>FCC CERTIFICATION REPORT (802.11a UNII BAND)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0606160517	<b>Test Dates:</b> July 6 - July 7, 2006	<b>EUT Type:</b> Panasonic Toughbook Model: CF-74	<b>FCC ID:</b> ACJ9TGCF-742	Page 10 of 38

## EXHIBIT A - TEST RESULTS

### Summary

The intentional radiator has been tested in a simulated typical installation to demonstrate compliance with the relevant FCC performance and procedural standards.

The radio was transmitting at full power on the specified channels and at a data rate(s) specified above. The channels tested are high, middle and low of the allocated bands.



Final system data was gathered in a mode that tended to maximize emissions by varying the orientation of the EUT, orientation of power and I/O cabling, antenna search height, and antenna polarization.

Method/System: Unlicensed National Information Infrastructure (UNII)

Data Rate(s) Tested: 6, 9, 12, 18, 24, 36, 48, 54Mbps

FCC Part Section(s)	RSS 210 Section	Test Description	Test Limit	Test Condition	Test Result
<b>TRANSMITTER MODE (TX)</b>					
15.403 (c)	6.2.2(q)(iv)(b)	26 dB Bandwidth	> 500kHz	CONDUCTED	PASS
15.407 (a)(1), (2), (3)	6.2.2(q1)(i)(ii)	Transmitter Output Power Conducted	<50 mW 5150-5250 MHz , <250 mW 5250-5350 <1 W 5725-5825 MHz		PASS
15.407 (a)(1), (2), (3), (5)	6.2.2(q1)(i)(ii)	Transmitter Power Spectral Density	<4 dBm 5150-5250 MHz IC: <10 dBm <11dBm 5250-5350 MHz		PASS
15.407(a)(6)	N/A	Peak Excursion	<13 dB across 1 MHz Bandwidth		PASS
15.407(b)(1), (2)(5)(6)		Undesirable Emissions	-27 dBm/MHz EIRP	RADIATED	PASS
15.205 15.209	6.2.1 6.3	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	< FCC 15.209 limits or < RSS-210 table 3 limits Emissions in restricted bands must meet the radiated limits detailed in 15.209	RADIATED (30MHz-1GHz) (1-25 GHz)	PASS
15.207	6.6	AC Conducted Emissions 150kHz – 30MHz	EN55022	Line Conducted	PASS
<b>RECEIVER MODE (RX)</b>					
15.107	7.4	AC Conducted Emissions 150kHz – 30MHz	EN55022	Line Conducted	PASS
15.109	7.3	General Field Strength Limits (Restricted Bands and Radiated Emissions Limits)	< FCC 15.209 limits or < RSS-210 table 3 limits	RADIATED (30MHz-1GHz) (1-25 GHz)	PASS
<b>RF EXPOSURE (SAR OR MPE)</b>					
2.1093/2.1091	RSS-102	SAR Test or MPE	1.6 W/kg (SAR Limit) 1 mW/cm <sup>2</sup> (MPE Limit)	3 Channels	PASS

**Table A-1. Summary of Test Results**

PCTEST™ PT. 15.407 UNII TEST REPORT		FCC CERTIFICATION REPORT (802.11a UNII BAND)		Reviewed by: Quality Manager
Test Report S/N: 0606160517	Test Dates: July 6 - July 7, 2006	EUT Type: Panasonic Toughbook Model: CF-74	FCC ID: ACJ9TGCF-742	Page 11 of 38

## 26dB Bandwidth Measurement

### §15.403(c)

The bandwidth at 26dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies. **The 26dB bandwidth must be at least 500 kHz.**

The spectrum analyzer is set to:

RBW = 30 kHz (10 dB/div)  
 VBW = 300 kHz  
 Span = 30 MHz  
 Ref. Level = 18.3 dBm (Low) / 19.3 dBm (Mid) / 19.7 dBm (High)  
 Sweep = 97.32 ms

Frequency [MHz]	Channel No.	26dB Bandwidth Test Results	
		Level [MHz]	Pass/Fail
5180	36	16.54	Pass
5260	52	16.50	Pass
5320	64	16.44	Pass

Table A-2. Conducted Bandwidth Measurements






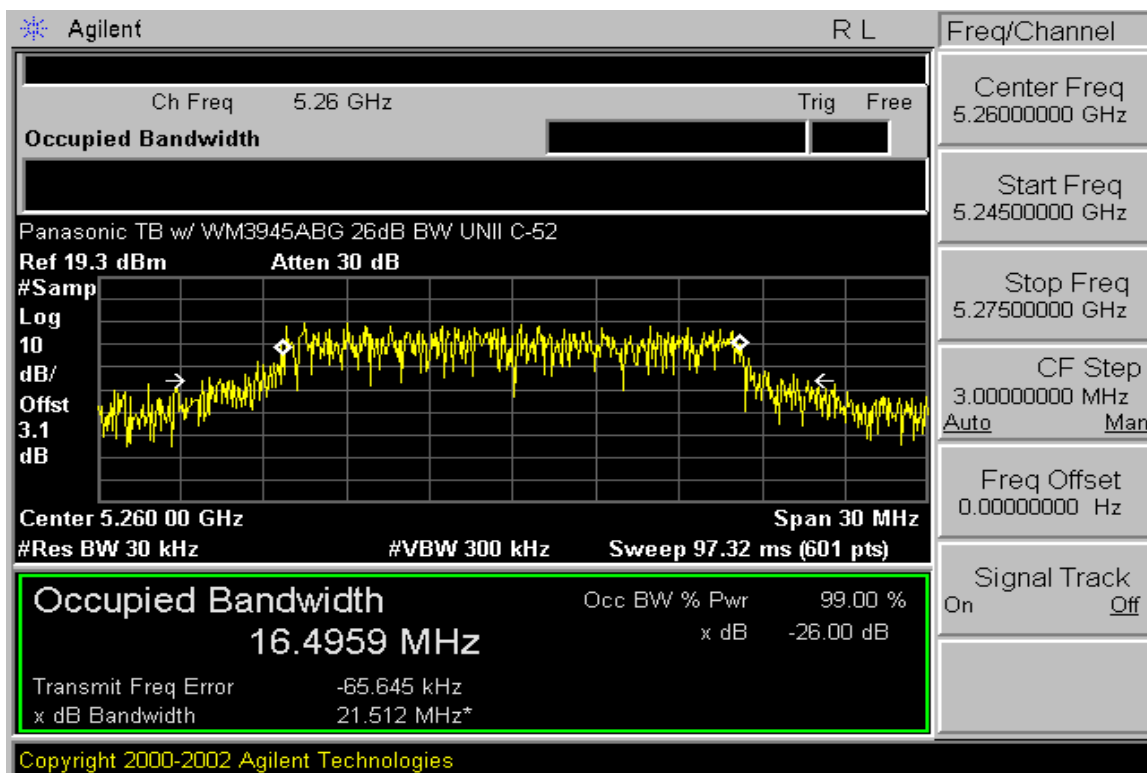


Figure A-1. Test Instrument & Measurement Setup

PCTEST™ PT. 15.407 UNII TEST REPORT		FCC CERTIFICATION REPORT (802.11a UNII BAND)		Reviewed by: Quality Manager
Test Report S/N: 0606160517	Test Dates: July 6 - July 7, 2006	EUT Type: Panasonic Toughbook Model: CF-74	FCC ID: ACJ9TGCF-742	Page 12 of 38

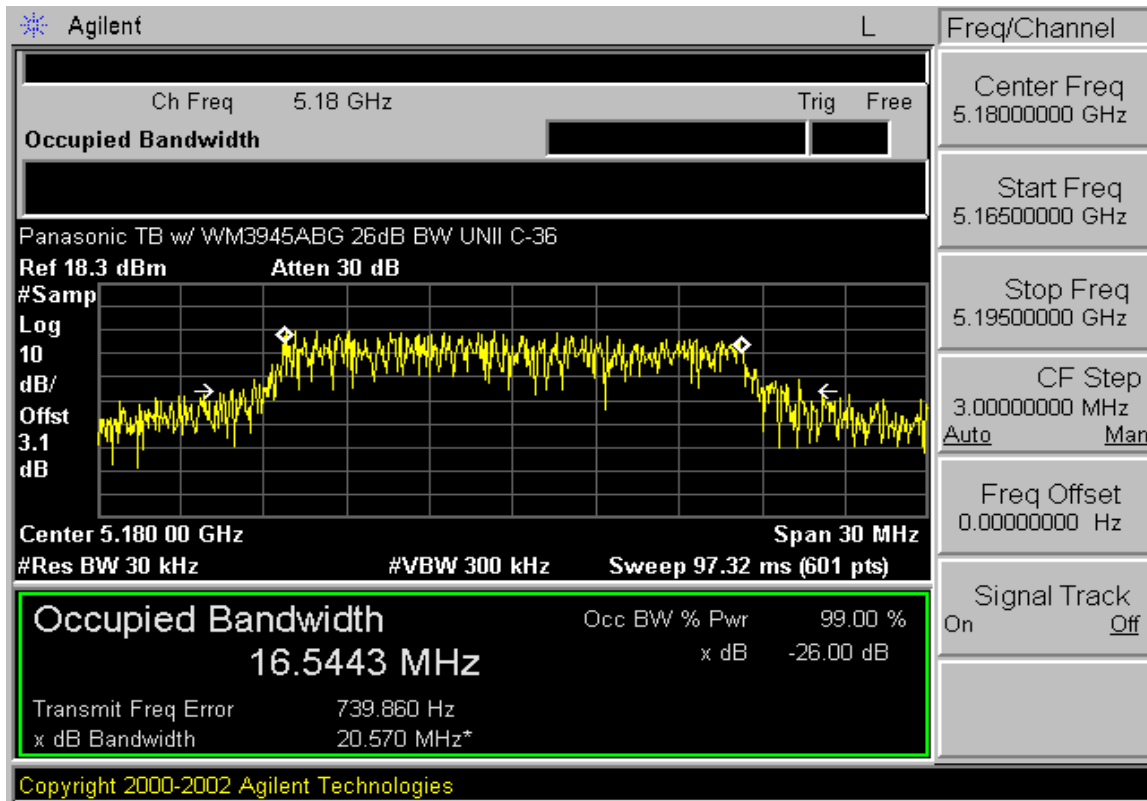

PCTEST™ PT. 15.407 UNII TEST REPORT		FCC CERTIFICATION REPORT (802.11a UNII BAND)		Reviewed by: Quality Manager
Test Report S/N: 0606160517	Test Dates: July 6 - July 7, 2006	EUT Type: Panasonic Toughbook Model: CF-74	FCC ID: ACJ9TGCF-742	Page 13 of 38

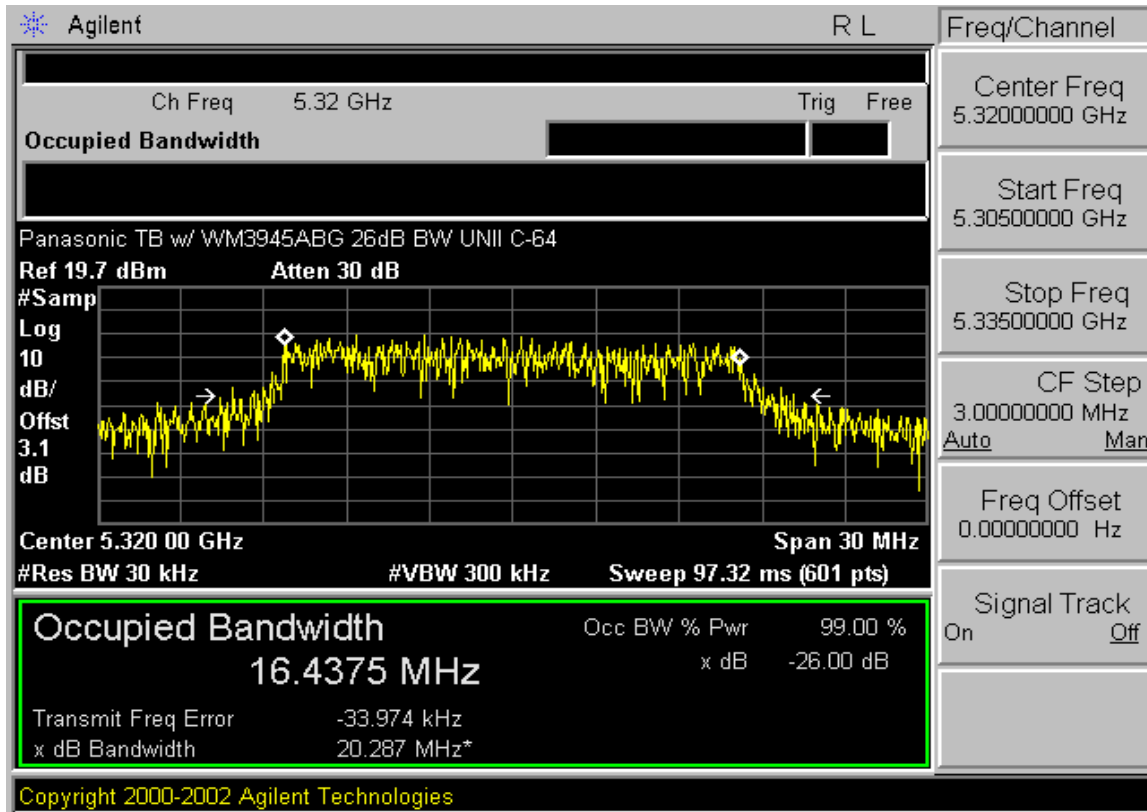

PCTEST™ PT. 15.407 UNII TEST REPORT		FCC CERTIFICATION REPORT (802.11a UNII BAND)		Reviewed by: Quality Manager
Test Report S/N: 0606160517	Test Dates: July 6 - July 7, 2006	EUT Type: Panasonic Toughbook Model: CF-74	FCC ID: ACJ9TGCF-742	Page 14 of 38

## Output Power Measurement – UNII (Low Band)

### §15.407(a) (1), (2), (3)

A transmitter antenna terminal of EUT is connected to the input of a RF power sensor. Measurement is made while the EUT is operating in transmission mode at the appropriate frequencies. **The maximum permissible conducted output power is  $4 \text{ dBm} + 10\log_{10}(26\text{dB BW}) = 16.186 \text{ dBm}$ .**

Freq [MHz]	Channel	Data Rate [Mbps]	Main Ant. Measured Power [dBm]	Aux Ant. Measured Power [dBm]
5180	36	6	14.50	15.40
		9	15.15	15.24
		12	14.94	15.26
		18	14.36	15.24
		24	15.32	15.80
		36	15.15	14.88
		48	15.16	14.84
		54	15.09	15.67
		5220	44	6
9	15.44			15.30
12	15.42			15.22
18	15.40			15.26
24	15.10			15.92
36	15.01			15.74
48	15.02			15.72
54	14.93			14.86
5240	48			6
		9	15.48	15.63
		12	15.49	15.55
		18	15.48	15.62
		24	15.96	16.00
		36	15.92	<b>16.08</b>
		48	15.70	15.70
		54	15.21	15.93

Table A-3. Output Power Measurements

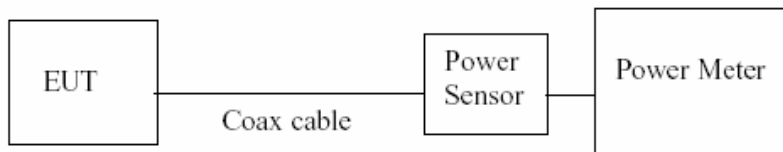




Figure A-2. Test Instrument & Measurement Setup

PCTEST™ PT. 15.407 UNII TEST REPORT		FCC CERTIFICATION REPORT (802.11a UNII BAND)		Reviewed by: Quality Manager
Test Report S/N: 0606160517	Test Dates: July 6 - July 7, 2006	EUT Type: Panasonic Toughbook Model: CF-74	FCC ID: ACJ9TGCF-742	Page 15 of 38

## Output Power Measurement – UNII (High Band)

### §15.407(a) (1), (2), (3)

A transmitter antenna terminal of EUT is connected to the input of a RF power sensor. Measurement is made while the EUT is operating in transmission mode at the appropriate frequencies. **The maximum permissible conducted output power is  $11 \text{ dBm} + 10\log_{10}(26\text{dB BW}) = 23.174 \text{ dBm}$ .**

Freq [MHz]	Channel	Data Rate [Mbps]	Main Ant. Measured Power [dBm]	Aux Ant. Measured Power [dBm]
5260	52	6	18.88	19.58
		9	18.75	19.05
		12	18.70	19.08
		18	18.65	18.50
		24	19.28	18.92
		36	18.44	18.56
		48	18.46	18.51
		54	18.33	18.53
5300	60	6	19.28	18.66
		9	19.16	19.35
		12	19.25	19.20
		18	19.40	19.25
		24	19.03	19.06
		36	18.92	19.06
		48	18.95	18.97
		54	18.83	18.91
5320	64	6	<b>19.68</b>	18.85
		9	19.56	18.67
		12	19.68	19.36
		18	19.56	18.70
		24	19.28	19.17
		36	19.26	19.21
		48	19.40	19.05
		54	19.32	18.97

Table A-4. Output Power Measurements

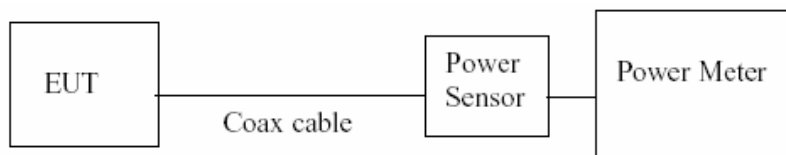




Figure A-3. Test Instrument & Measurement Setup

PCTEST™ PT. 15.407 UNII TEST REPORT		FCC CERTIFICATION REPORT (802.11a UNII BAND)		Reviewed by: Quality Manager
Test Report S/N: 0606160517	Test Dates: July 6 - July 7, 2006	EUT Type: Panasonic Toughbook Model: CF-74	FCC ID: ACJ9TGCF-742	Page 16 of 38

## Peak Power Spectral Density

### §15.407(a)(1) and (a)(2)

The spectrum analyzer was connected to the antenna terminal while the EUT was operating in a continuous transmission mode at the appropriate center frequencies. **The maximum permissible peak power spectral density is 4 dBm/MHz in the 5.15GHz – 5.25GHz band (10dBm/MHz for Industry Canada) and 11 dBm/MHz in the 5.25GHz – 5.35 GHz band (11dBm/MHz for Industry Canada).**

The spectrum analyzer was set to : RBW=1 MHz, VBW=3MHz, mode=Sample “on” for FCC (Measurement Method 2 from FCC Public Notice DA 02-2138).

The spectrum analyzer is set to:

RBW	1 MHz (10dB/div)
VBW	3 MHz
Span	20 MHz
Ref. Level	26 dBm (Low) / 30 dBm (Mid,High)
Sweep	1 ms
Detector	Sampling with power averaging (100 sweeps)

Frequency [MHz]	Channel No.	Power Density Test Results	
		Level [dBm]	Pass/Fail
5180	36	3.354	Pass
5260	52	7.540	Pass
5320	64	7.576	Pass

Table A-5. Test Instrument & Measurement Setup






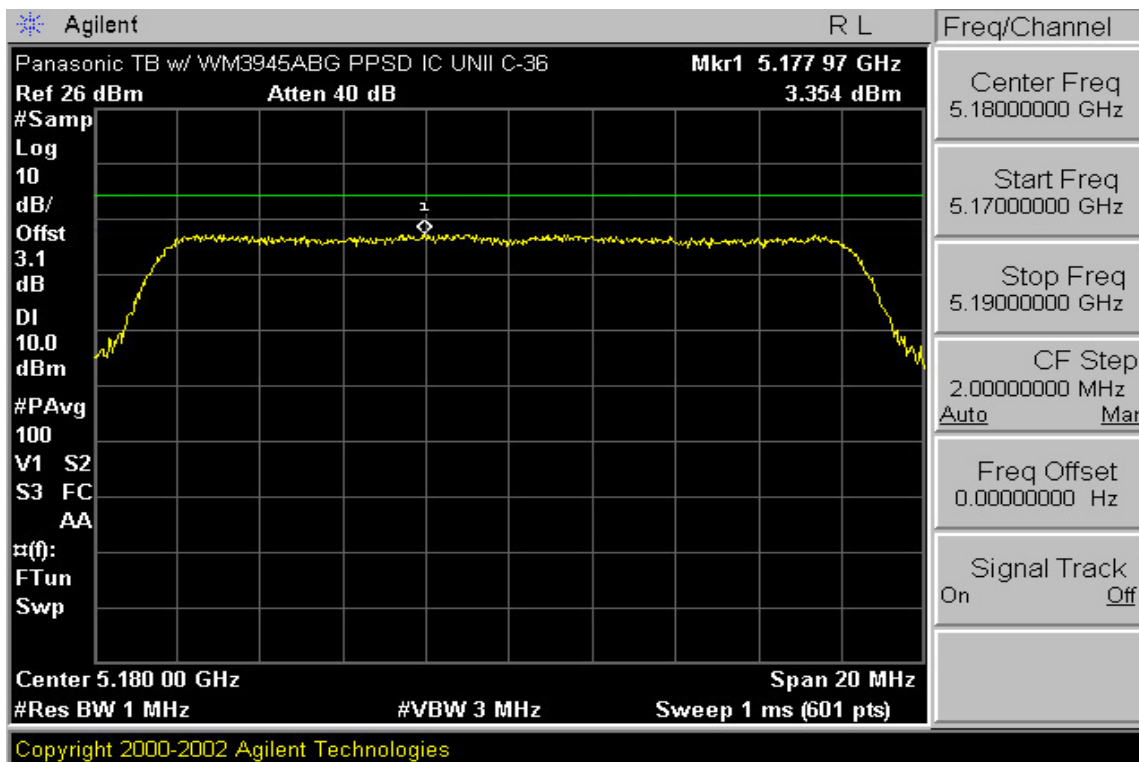
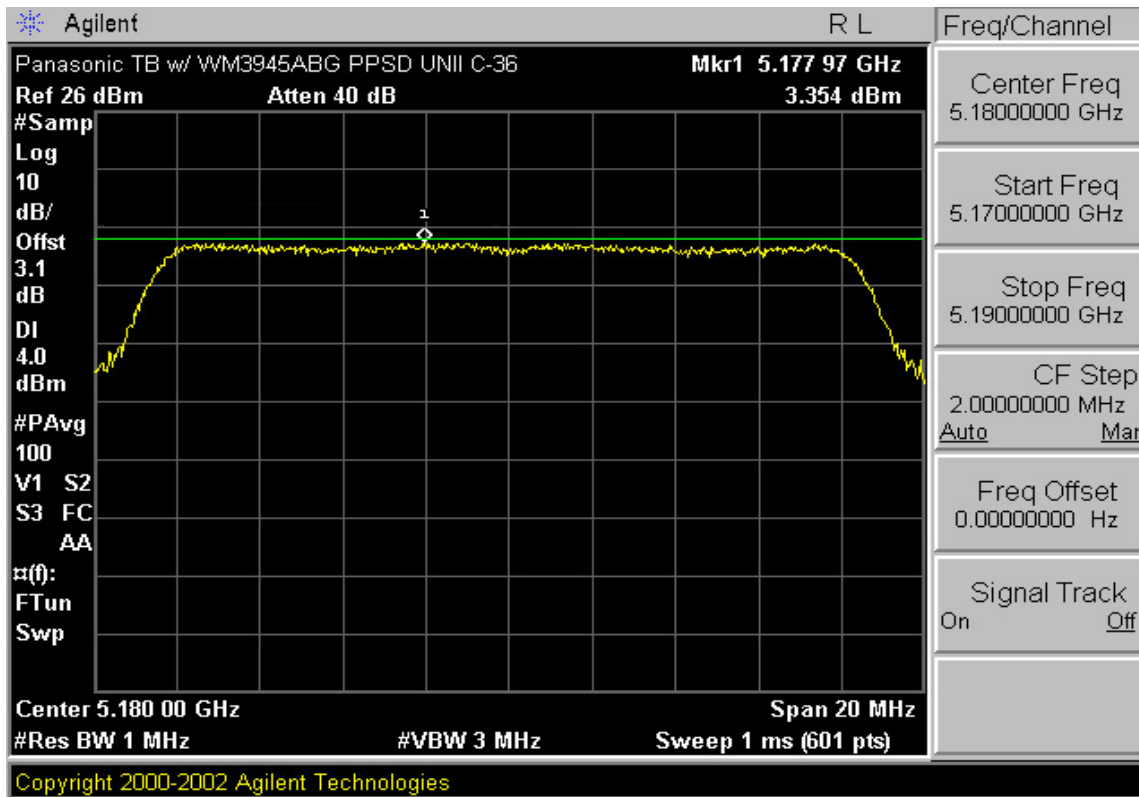


Figure A-4. Test Instrument & Measurement Setup



PCTEST™ PT. 15.407 UNII TEST REPORT		FCC CERTIFICATION REPORT (802.11a UNII BAND)		Reviewed by: Quality Manager
Test Report S/N: 0606160517	Test Dates: July 6 - July 7, 2006	EUT Type: Panasonic Toughbook Model: CF-74	FCC ID: ACJ9TGCF-742	Page 17 of 38

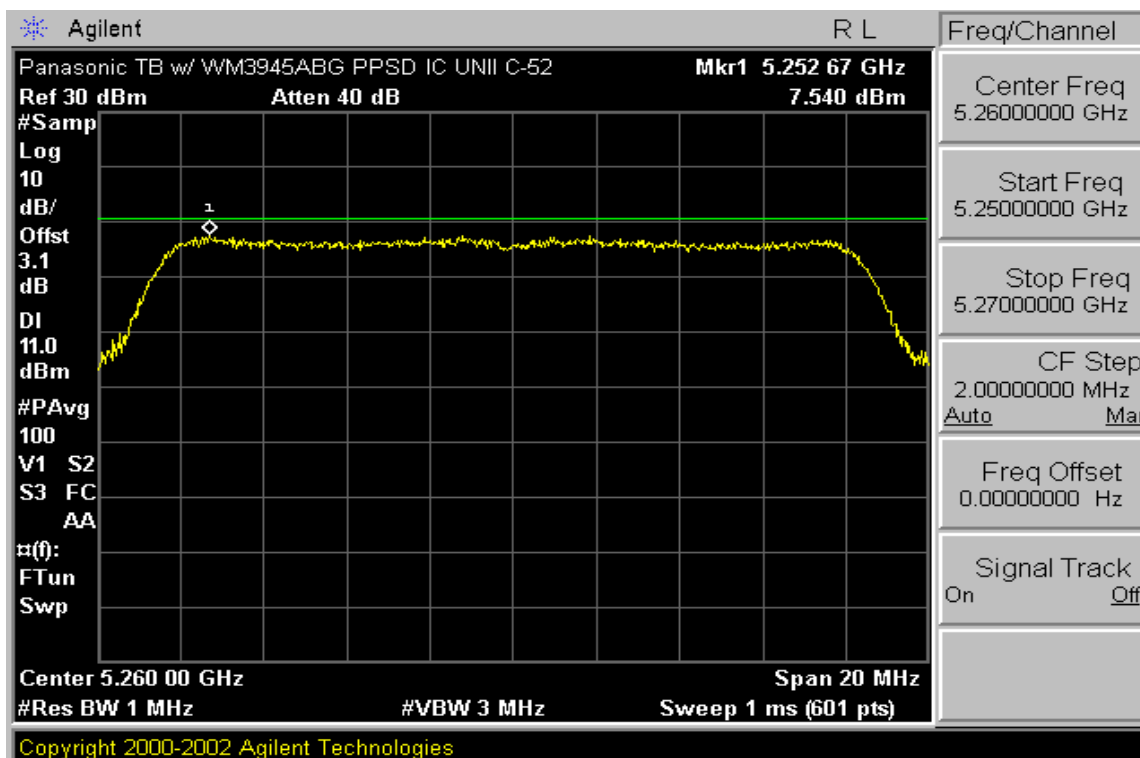

PCTEST™ PT. 15.407 UNII TEST REPORT		FCC CERTIFICATION REPORT (802.11a UNII BAND)		Reviewed by: Quality Manager
Test Report S/N: 0606160517	Test Dates: July 6 - July 7, 2006	EUT Type: Panasonic Toughbook Model: CF-74	FCC ID: ACJ9TGCF-742	Page 18 of 38

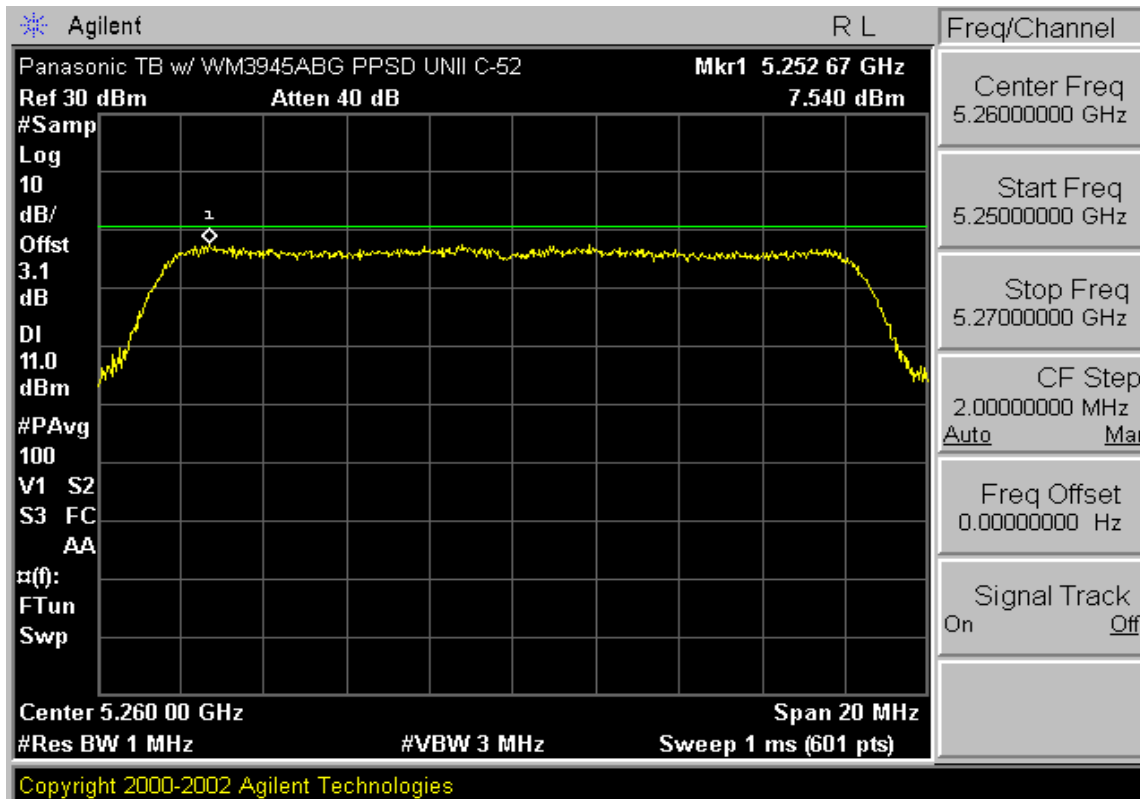

PCTEST™ PT. 15.407 UNII TEST REPORT		FCC CERTIFICATION REPORT (802.11a UNII BAND)		Reviewed by: Quality Manager
Test Report S/N: 0606160517	Test Dates: July 6 - July 7, 2006	EUT Type: Panasonic Toughbook Model: CF-74	FCC ID: ACJ9TGCF-742	Page 19 of 38

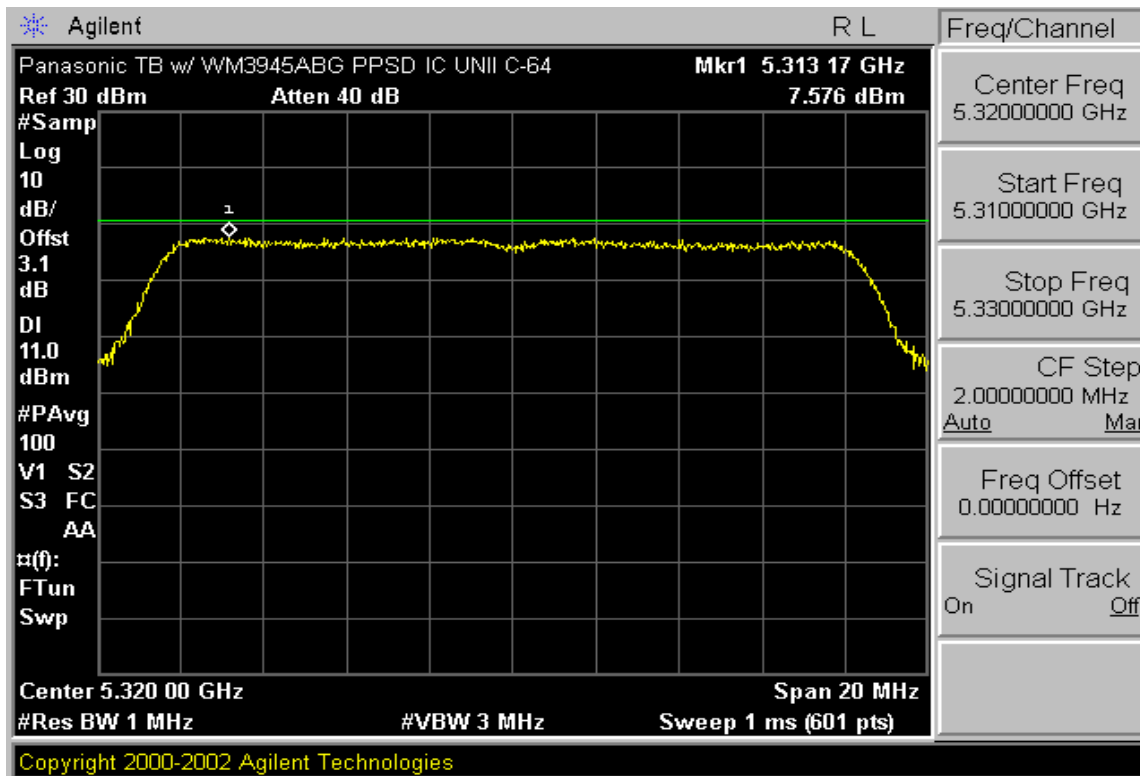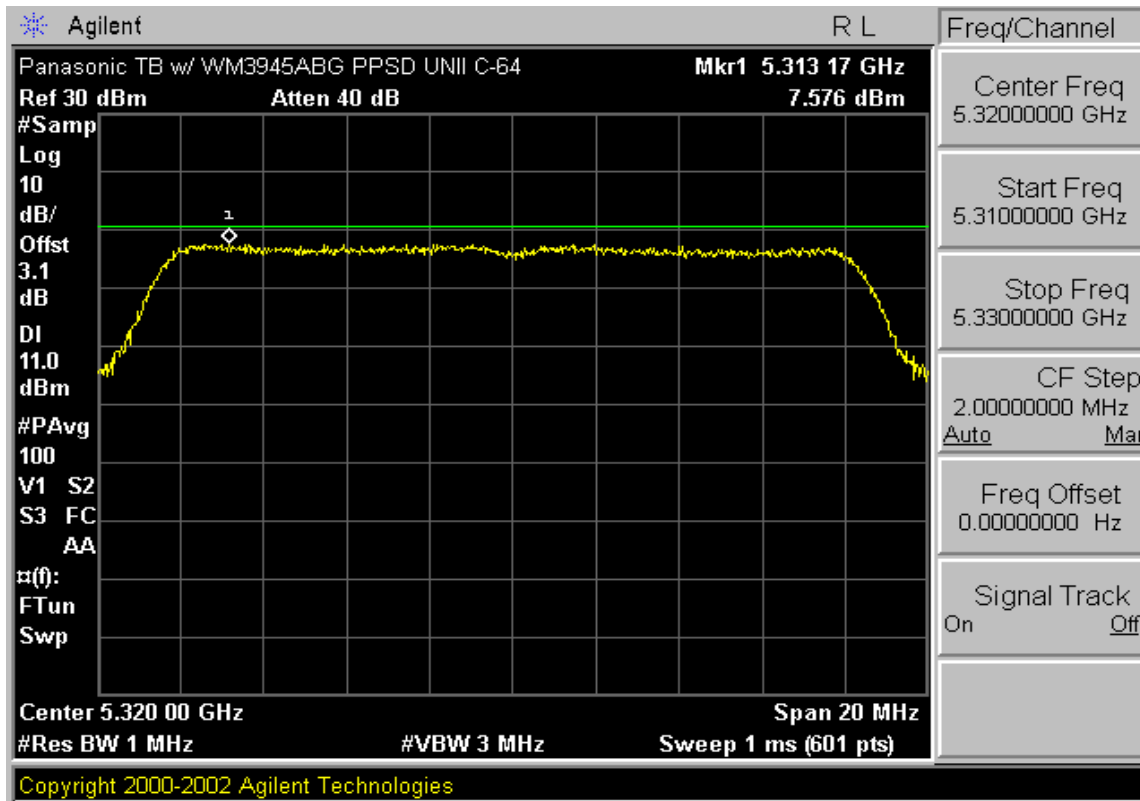

PCTEST™ PT. 15.407 UNII TEST REPORT		FCC CERTIFICATION REPORT (802.11a UNII BAND)		Reviewed by: Quality Manager
Test Report S/N: 0606160517	Test Dates: July 6 - July 7, 2006	EUT Type: Panasonic Toughbook Model: CF-74	FCC ID: ACJ9TGCF-742	Page 20 of 38

## Peak Excursion Ratio

### §15.407(a)(6)

The spectrum analyzer was connected to the antenna terminal while the EUT was operating in the continuous transmission mode at the appropriate center frequencies. **The largest permissible difference (Peak Excursion) between the following two specified traces is 13 dBm/MHz.**

The spectrum analyzer is set to:

#### 1st Trace:

The spectrum analyzer was set to: RBW = 1 MHz, VBW = 3 MHz, mode = peak detector and max hold.

#### 2nd Trace:

The spectrum analyzer was set to: RBW = 1 MHz, VBW = 1 MHz, trigger=free run, mode=sample detector "on" using 100 sweeps of power averaging (settings tend to present similar results compared to the power meter).

Frequency [MHz]	Channel No.	Peak Excursion Ratio Test Results	
		Ratio [dBm]	Pass/Fail
5180	36	11.39	Pass
5260	52	11.49	Pass
5320	64	10.99	Pass

Table A-6. Test Instrument & Measurement Setup






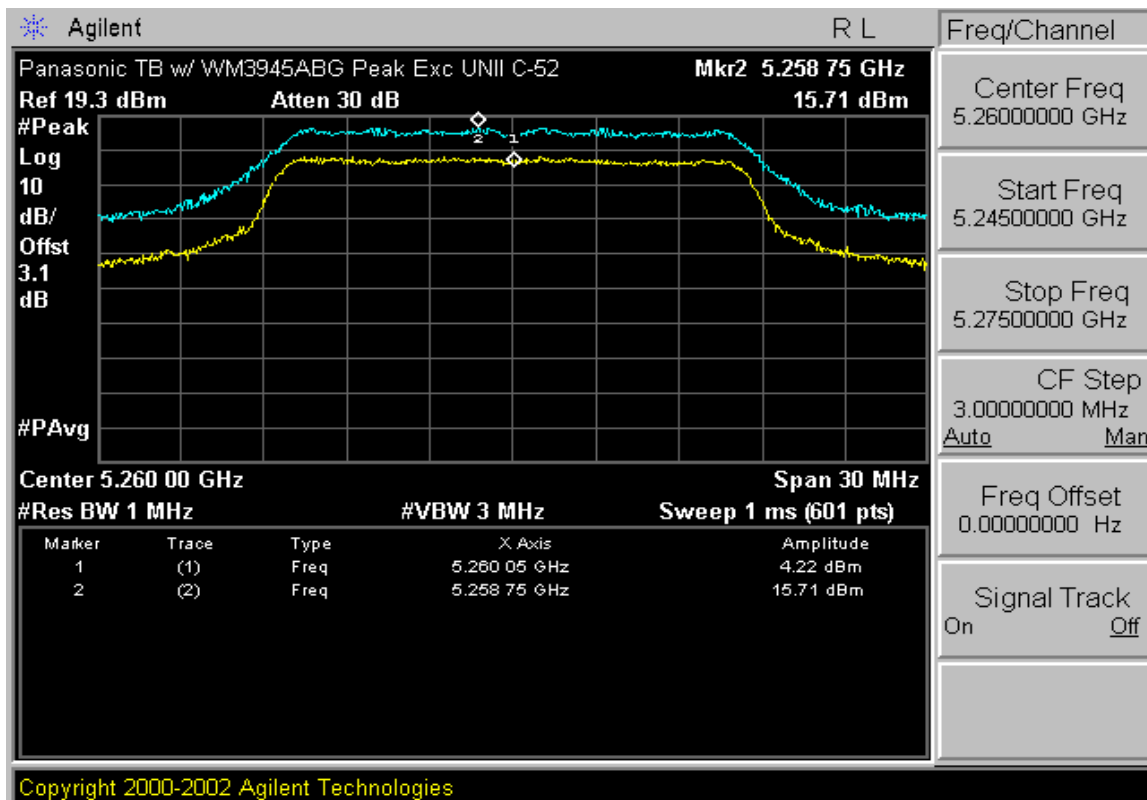


Figure A-5. Test Instrument & Measurement Setup

PCTEST™ PT. 15.407 UNII TEST REPORT		FCC CERTIFICATION REPORT (802.11a UNII BAND)		Reviewed by: Quality Manager
Test Report S/N: 0606160517	Test Dates: July 6 - July 7, 2006	EUT Type: Panasonic Toughbook Model: CF-74	FCC ID: ACJ9TGCF-742	Page 21 of 38

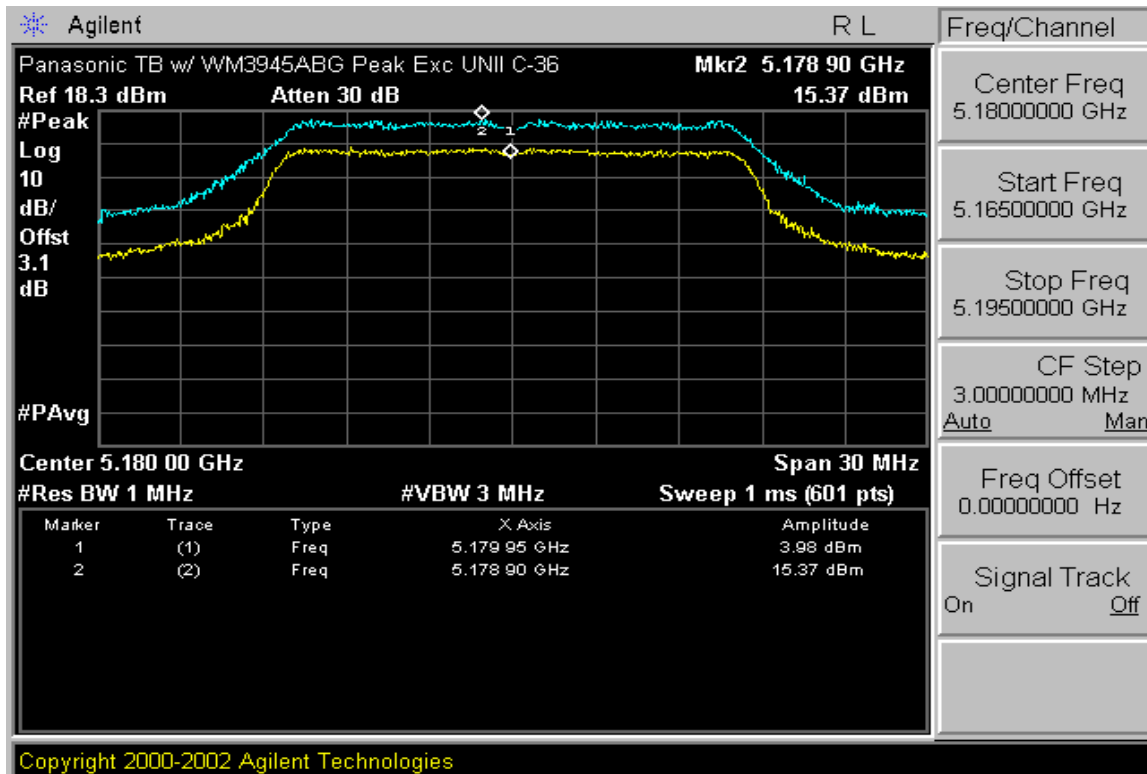

PCTEST™ PT. 15.407 UNII TEST REPORT		FCC CERTIFICATION REPORT (802.11a UNII BAND)		Reviewed by: Quality Manager
Test Report S/N: 0606160517	Test Dates: July 6 - July 7, 2006	EUT Type: Panasonic Toughbook Model: CF-74	FCC ID: ACJ9TGCF-742	Page 22 of 38

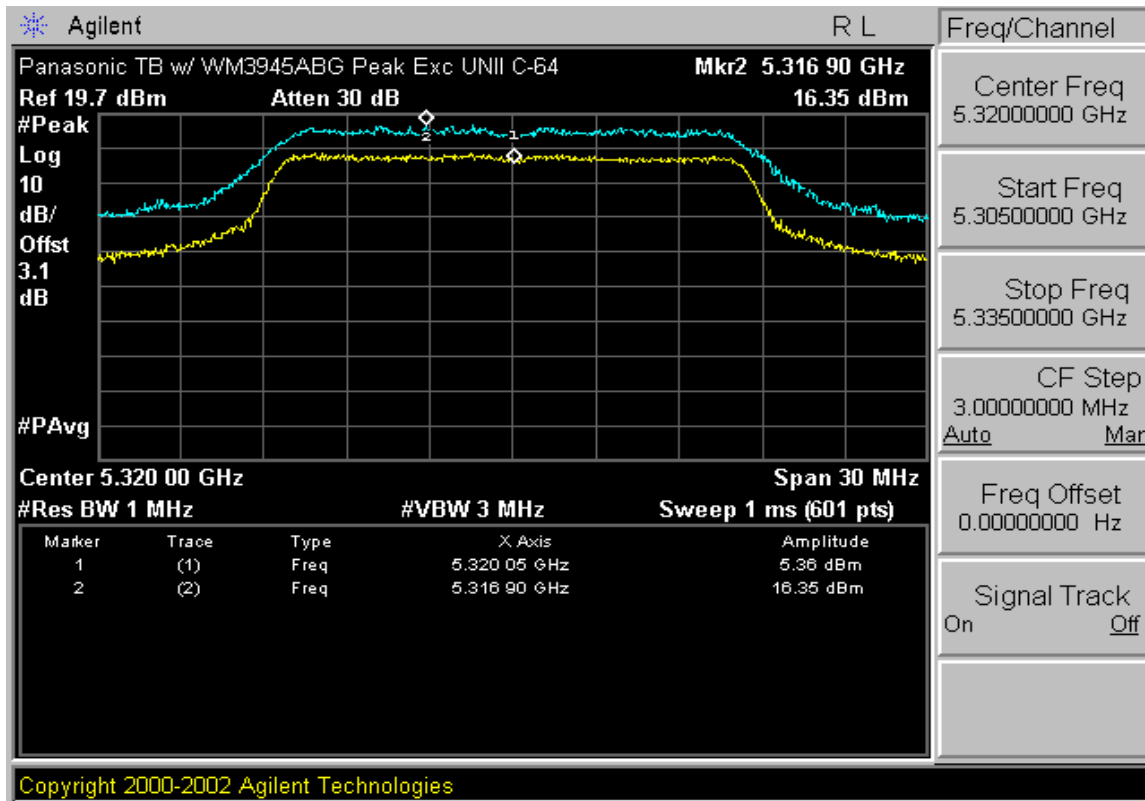

PCTEST™ PT. 15.407 UNII TEST REPORT		FCC CERTIFICATION REPORT (802.11a UNII BAND)		Reviewed by: Quality Manager
Test Report S/N: 0606160517	Test Dates: July 6 - July 7, 2006	EUT Type: Panasonic Toughbook Model: CF-74	FCC ID: ACJ9TGCF-742	Page 23 of 38

## Radiated Measurements

### §15.407(b)(1) and (2), §15.205 & §15.209



The EUT was tested from 9kHz to the tenth harmonic of the fundamental frequency of the transmitter. Below 1GHz a CISPR quasi peak detector was used. Above 1 GHz average measurements were taken, using RBW= 1MHz, VBW= 10Hz, and linearly polarized horn antennas. In addition, peak measurements (RBW= 1MHz, VBW= 1MHz) were taken to ensure that the peak levels are not more than 20dB above the average limit. No harmonics/spurs peak emissions are more than 20dB above the average limit. Special attention is taken for the EUT's harmonic and spurious radiated emissions in the restricted bands of operations, as defined in Section 15.205.

Frequency	F/S [ $\mu$ V/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

**Table A-7. Radiated Limits**

## TEST MEASUREMENT EQUIPMENT

Agilent E4448A	PSA Spectrum Analyzer 3Hz - 50GHz
HP 8566B	Spectrum Analyzer 100 Hz - 22GHz
HP 83017A	Microwave Preamplifier 40dB Gain (0.5 - 26.5GHz)
EMCO 3115	Horn Antenna (1 - 18GHz)
EMCO 3116	Horn Antenna (18GHz - 40GHz)
HP 8493B	10dB Attenuator
MicroCoax Cables	Low Loss Microwave Cables (1 - 26.5GHz)

PCTEST™ PT. 15.407 UNII TEST REPORT		FCC CERTIFICATION REPORT (802.11a UNII BAND)		Reviewed by: Quality Manager
Test Report S/N: 0606160517	Test Dates: July 6 - July 7, 2006	EUT Type: Panasonic Toughbook Model: CF-74	FCC ID: ACJ9TGCF-742	Page 24 of 38

## Radiated Measurements (Cont.)

§15.407(b)(1) and (2), §15.205 & §15.209

Mode: 802.11a  
 Transfer Rate: 6 Mbps  
 Distance of Measurements: 3 Meters  
 Channel: 36

Frequency [MHz]	Level [dBm]	AFCL [dB]	Pol. [H/V]	Field Strength [dB $\mu$ V/m]	Field Strength [ $\mu$ V/m]	Margin [dB]
10360.00	-107.30	40.6	V	44.6	169.4	-23.65
* 15540.00	-112.10	45.8	V	51.9	394.5	-2.06
* 20720.00	-135.00	49.6	H	37.2	72.6	-16.76
25900.00	-135.00	52.1	H	45.6	190.5	-22.63

Table A-8. Peak Radiated Measurements @ 3 meters

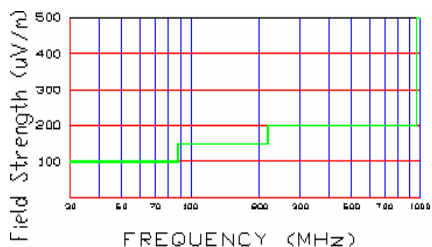


Figure A-6. Radiated limits at 3 meters.

### NOTES:

- The limit listed in Section 15.407(b) is  $-27$  dBm/MHz EIRP. This is equivalent to a field strength of 68.24 dB $\mu$ V/m @ 3m.
- All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
- Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
- The peak emissions above 1 GHz are not more than 20 dB above the average limit.
- The antenna is manipulated through typical positions, polarity and length during the tests.
- The EUT is supplied with nominal AC voltage or/and a new/fully-recharged battery.
- The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
- < - 135 dBm are below the analyzer floor level.
- Above 1 GHz, the limit is 500  $\mu$ V/m (54dB $\mu$ V/m) at 3 meters radiated.

PCTEST™ PT. 15.407 UNII TEST REPORT		FCC CERTIFICATION REPORT (802.11a UNII BAND)		Reviewed by: Quality Manager
Test Report S/N: 0606160517	Test Dates: July 6 - July 7, 2006	EUT Type: Panasonic Toughbook Model: CF-74	FCC ID: ACJ9TGCF-742	Page 25 of 38

## Radiated Measurements (Cont.)

§15.407(b)(1) and (2), §15.205 & §15.209

Mode: 802.11a

Transfer Rate: 6 Mbps

Distance of Measurements: 3 Meters

Channel: 52

Frequency [MHz]	Level [dBm]	AFCL [dB]	Pol. [H/V]	Field Strength [dB $\mu$ V/m]	Field Strength [ $\mu$ V/m]	Margin [dB]
10520.00	-105.60	40.50	V	46.76	217.8	-21.47
* 15780.00	-113.30	47.30	V	52.47	420.2	-1.51
* 21040.00	-135.00	50.05	H	37.88	78.3	-16.10
26300.00	-135.00	52.50	H	46.60	213.8	-21.63

Table A-9. Peak Radiated Measurements @ 3 meters

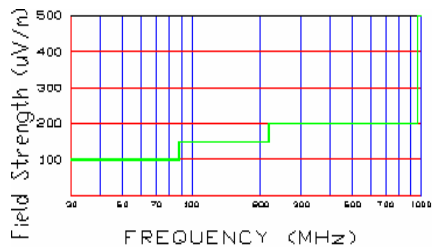


Figure A-7. Radiated limits at 3 meters.

### NOTES:

- The limit listed in Section 15.407(b) is  $-27$  dBm/MHz EIRP. This is equivalent to a field strength of  $68.24$  dB $\mu$ V/m @ 3m.
- All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
- Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
- The peak emissions above 1 GHz are not more than 20 dB above the average limit.
- The antenna is manipulated through typical positions, polarity and length during the tests.
- The EUT is supplied with nominal AC voltage or/and a new/fully-recharged battery.
- The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
- < - 135 dBm are below the analyzer floor level.
- Above 1 GHz, the limit is  $500$   $\mu$ V/m (54dB $\mu$ V/m) at 3 meters radiated.

PCTEST™ PT. 15.407 UNII TEST REPORT		FCC CERTIFICATION REPORT (802.11a UNII BAND)		Reviewed by: Quality Manager
Test Report S/N: 0606160517	Test Dates: July 6 - July 7, 2006	EUT Type: Panasonic Toughbook Model: CF-74	FCC ID: ACJ9TGCF-742	Page 26 of 38

## Radiated Measurements (Cont.)

§15.407(b)(1) and (2), §15.205 & §15.209

Mode: 802.11a  
 Transfer Rate: 6 Mbps  
 Distance of Measurements: 3 Meters  
 Channel: 64

	Frequency [MHz]	Level [dBm]	AFCL [dB]	Pol. [H/V]	Field Strength [dB $\mu$ V/m]	Field Strength [ $\mu$ V/m]	Margin [dB]
*	10640.00	-109.10	40.60	H	43.55	150.5	-10.43
*	15960.00	-112.80	45.90	H	51.81	389.5	-2.17
*	21280.00	-135.00	49.39	V	37.41	74.2	-16.57
	26600.00	-135.00	53.35	H	47.66	241.5	-20.57

Table A-10. Peak Radiated Measurements @ 3 meters

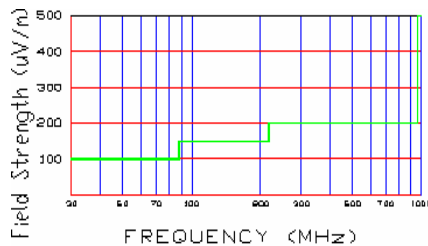


Figure A-8. Radiated limits at 3 meters.

NOTES:

1. The limit listed in Section 15.407(b) is  $-27$  dBm/MHz EIRP. This is equivalent to a field strength of 68.24 dB $\mu$ V/m @ 3m.
2. All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
3. Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
4. The peak emissions above 1 GHz are not more than 20 dB above the average limit.
5. The antenna is manipulated through typical positions, polarity and length during the tests.
6. The EUT is supplied with nominal AC voltage or/and a new/fully-recharged battery.
7. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
8.  $< -135$  dBm are below the analyzer floor level.
9. Above 1 GHz, the limit is 500  $\mu$ V/m (54dB $\mu$ V/m) at 3 meters radiated.

PCTEST™ PT. 15.407 UNII TEST REPORT		FCC CERTIFICATION REPORT (802.11a UNII BAND)		Reviewed by: Quality Manager
Test Report S/N: 0606160517	Test Dates: July 6 - July 7, 2006	EUT Type: Panasonic Toughbook Model: CF-74	FCC ID: ACJ9TGCF-742	Page 27 of 38



## Radiated Restricted Band Measurements

§15.407(b)(1) and (2), §15.205 & §15.209

### **Note:**

Special attention is made for the EUT's harmonic and spurious radiated emission in the restricted bands of operations.

Operating Frequency: 5180 MHz

Channel: 36

Transfer Rate: 6 Mbps

Measurement Distance: 3 Meters

Frequency [MHz]	Level [dBm]	AFCL [dB]	Pol. [H/V]	Field Strength [dB $\mu$ V/m]	Field Strength [ $\mu$ V/m]	Margin [dB]
5138.2	-112.9	40.11	H	34.20	51.29	-19.78
5142.9	-113.5	40.13	V	33.68	48.28	-20.30
5145.8	-113.0	40.14	V	34.16	51.05	-19.82
5147.5	-113.7	40.16	V	33.44	46.96	-20.54
5148.6	-112.8	40.18	H	34.37	52.30	-19.61
5149.6	-112.2	40.19	V	35.02	56.33	-18.96

**Table A-11. Radiated Restricted Band Measurements at 3-meters**

### **NOTES:**

1. The antenna is manipulated through typical positions, polarity and length during the testing.
2. The EUT is supplied with the minimal AC voltage or/and a new/fully re-charged battery.
3. The spectrum is measured from 9 kHz up to the 10<sup>th</sup> harmonic and the worst-case emissions are reported.
4. Above 1 GHz the radiated limit is 500 $\mu$ V/m.
5. < -135 dBm is below the analyzer measurement floor level.
6. The data in the table are Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
7. The peak emissions above 1 GHz are not more than 20 dB above the average limit.

PCTEST™ PT. 15.407 UNII TEST REPORT		FCC CERTIFICATION REPORT (802.11a UNII BAND)		Reviewed by: Quality Manager
Test Report S/N: 0606160517	Test Dates: July 6 - July 7, 2006	EUT Type: Panasonic Toughbook Model: CF-74	FCC ID: ACJ9TGCF-742	Page 28 of 38



## Radiated Restricted Band Measurements (Cont.)

§15.407(b)(1) and (2), §15.205 & §15.209

**Note:**

Special attention is made for the EUT's harmonic and spurious radiated emission in the restricted bands of operations.

Operating Frequency: 5320 MHz

Channel: 64

Transfer Rate: 6 Mbps

Measurement Distance: 3 Meters

Frequency [MHz]	Level [dBm]	AFCL [dB]	Pol. [H/V]	Field Strength [dB $\mu$ V/m]	Field Strength [ $\mu$ V/m]	Margin [dB]
5350.5	-110.9	40.61	V	36.71	68.47	-17.27
5351.7	-111.6	40.63	H	36.02	63.24	-17.96
5353.1	-112.6	40.64	H	35.06	56.62	-18.92
5357.9	-113.4	40.66	V	34.31	51.94	-19.67
5358.2	-113.4	40.67	H	34.26	51.64	-19.72
5361.5	-113.1	40.69	V	34.61	53.77	-19.37

**Table A-12. Radiated Restricted Band Measurements at 3-meters**

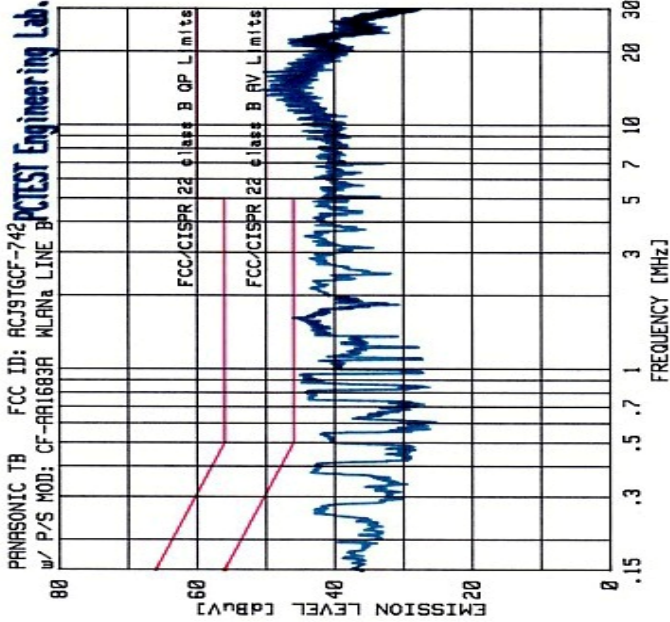
**NOTES:**

1. The antenna is manipulated through typical positions, polarity and length during the testing.
2. The EUT is supplied with the minimal AC voltage or/and a new/fully re-charged battery.
3. The spectrum is measured from 9 kHz up to the 10<sup>th</sup> harmonic and the worst-case emissions are reported.
4. Above 1 GHz the radiated limit is 500 $\mu$ V/m.
5. < -135 dBm is below the analyzer measurement floor level.
6. The data in the table are Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
7. The peak emissions above 1 GHz are not more than 20 dB above the average limit.


PCTEST™ PT. 15.407 UNII TEST REPORT		FCC CERTIFICATION REPORT (802.11a UNII BAND)		Reviewed by: Quality Manager
Test Report S/N: 0606160517	Test Dates: July 6 - July 7, 2006	EUT Type: Panasonic Toughbook Model: CF-74	FCC ID: ACJ9TGCF-742	Page 29 of 38

# Line-Conducted Test Data

§15.207



No.	Freq. [MHz]	Quasi-Pk [dBuV]	Limit [dBuV]	Margin [dB]	Average [dBuV]	Limit [dBuV]	Margin [dB]
1	13.957	47.08	60.00	-12.92	31.38	50.00	-18.62
2	16.532	45.16	60.00	-14.84	31.80	50.00	-18.20
3	1.623	44.65	55.00	-11.35	27.68	46.00	-18.32
4	15.854	45.93	60.00	-14.07	30.77	50.00	-19.23
5	13.275	46.58	60.00	-13.42	30.89	50.00	-19.11
6	15.174	46.27	60.00	-13.73	31.62	50.00	-18.38
7	.946	44.23	55.00	-11.77	29.10	46.00	-16.90
8	14.762	45.53	60.00	-14.47	31.47	50.00	-18.53
9	.885	42.09	55.00	-13.91	29.78	46.00	-16.22
10	.943	43.63	55.00	-12.37	25.23	46.00	-20.77

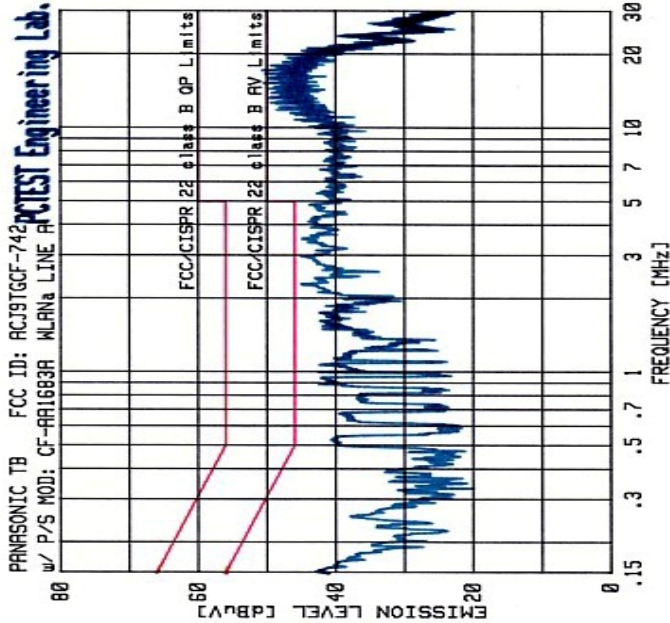

No.	Freq. [MHz]	Quasi-Pk [dBuV]	Limit [dBuV]	Margin [dB]	Average [dBuV]	Limit [dBuV]	Margin [dB]
1	17.331	46.52	60.00	-13.48	32.01	50.00	-17.99
2	15.294	47.93	60.00	-12.07	33.10	50.00	-16.90
3	16.789	45.51	60.00	-14.49	32.04	50.00	-17.96
4	13.267	48.02	60.00	-11.98	32.43	50.00	-17.57
5	14.620	48.47	60.00	-11.53	32.29	50.00	-17.71
6	15.969	47.26	60.00	-12.74	32.06	50.00	-17.94
7	12.721	46.96	60.00	-13.04	30.78	50.00	-19.22
8	16.103	46.24	60.00	-13.76	32.57	50.00	-17.43
9	13.402	47.54	60.00	-12.46	32.19	50.00	-17.81
10	17.999	45.90	60.00	-14.10	32.02	50.00	-17.98

**Notes:**

1. All Modes of operation were investigated and the worst-case emissions are reported.
2. The limit for Class B device(s) from 150kHz to 30MHz are Specified in EN55022.
3. Line A = Phase; Line B = Neutral
4. Deviations to the Specifications: None.

PCTEST™ PT. 15.407 UNII TEST REPORT		FCC CERTIFICATION REPORT (802.11a UNII BAND)		Reviewed by: Quality Manager
Test Report S/N: 0606160517	Test Dates: July 6 - July 7, 2006	EUT Type: Panasonic Toughbook Model: CF-74	FCC ID: ACJ9TGCF-742	Page 30 of 38

## EXHIBIT B – LABELING REQUIREMENTS

### Sample Label & Location



New Labeling Requirements:

Per 2.1074 & 15.19; Docket 95-19



The sample label shown below shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the trade name, FCC ID, and the FCC logo must be displayed on the device per Section 15.19(b)(2).

FCC ID: ACJ9TGCF-742

This device complies with Part 15 of the FCC Rules.  
 Operation is subject to the following two conditions.  
 (1) this device may not cause harmful interference, and  
 (2) this device must accept any interference received,  
 including interference that may cause undesired operation.

PCTEST™ PT. 15.407 UNII TEST REPORT		FCC CERTIFICATION REPORT (802.11a UNII BAND)		Reviewed by: Quality Manager
Test Report S/N: 0606160517	Test Dates: July 6 - July 7, 2006	EUT Type: Panasonic Toughbook Model: CF-74	FCC ID: ACJ9TGCF-742	Page 31 of 38

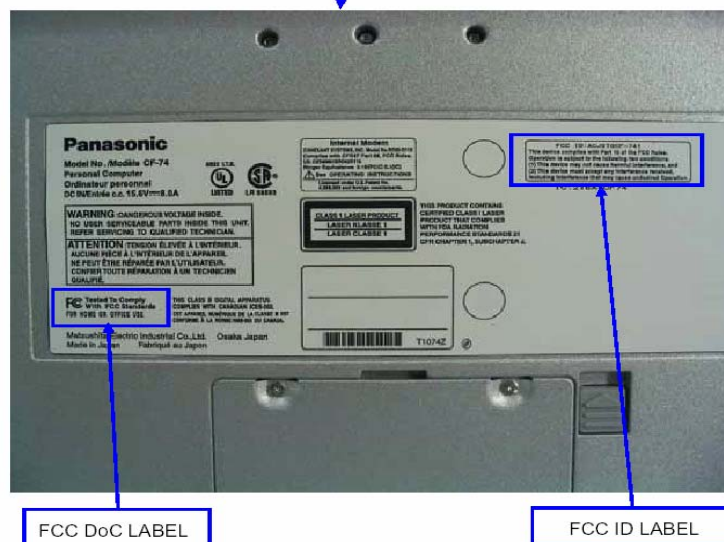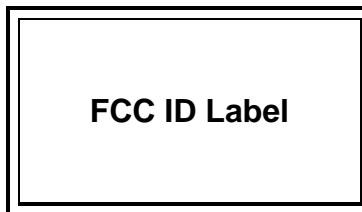
## Sample Label & Location (Cont'd)



<b>PCTEST™ PT. 15.407 UNII TEST REPORT</b>		<b>FCC CERTIFICATION REPORT (802.11a UNII BAND)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0606160517	<b>Test Dates:</b> July 6 - July 7, 2006	<b>EUT Type:</b> Panasonic Toughbook Model: CF-74	<b>FCC ID:</b> ACJ9TGCF-742	Page 32 of 38




# EXHIBIT C – BLOCK DIAGRAM/SCHEMATICS

<b>PCTEST™ PT. 15.407 UNII TEST REPORT</b>		<b>FCC CERTIFICATION REPORT (802.11a UNII BAND)</b>	<b>Panasonic</b>	<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0606160517	<b>Test Dates:</b> July 6 - July 7, 2006	<b>EUT Type:</b> Panasonic Toughbook Model: CF-74	<b>FCC ID:</b> ACJ9TGCF-742	Page 33 of 38




# EXHIBIT D – OPERATIONAL DESCRIPTION

<b>PCTEST™ PT. 15.407 UNII TEST REPORT</b>		<b>FCC CERTIFICATION REPORT (802.11a UNII BAND)</b>	<b>Panasonic</b>	<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0606160517	<b>Test Dates:</b> July 6 - July 7, 2006	<b>EUT Type:</b> Panasonic Toughbook Model: CF-74	<b>FCC ID:</b> ACJ9TGCF-742	Page 34 of 38



## EXHIBIT E – TEST SETUP PHOTOGRAPHS

The Line-Conducted and Radiated Test Pictures show the worst-case configuration and cable placement with a minimum margin to the specifications.

<b>PCTEST™ PT. 15.407 UNII TEST REPORT</b>		<b>FCC CERTIFICATION REPORT (802.11a UNII BAND)</b>	<b>Panasonic</b>	<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0606160517	<b>Test Dates:</b> July 6 - July 7, 2006	<b>EUT Type:</b> Panasonic Toughbook Model: CF-74	<b>FCC ID:</b> ACJ9TGCF-742	Page 35 of 38




# EXHIBIT F – EUT EXTERNAL/INTERNAL PHOTOGRAPHS

<b>PCTEST™ PT. 15.407 UNII TEST REPORT</b>		<b>FCC CERTIFICATION REPORT (802.11a UNII BAND)</b>	<b>Panasonic</b>	<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0606160517	<b>Test Dates:</b> July 6 - July 7, 2006	<b>EUT Type:</b> Panasonic Toughbook Model: CF-74	<b>FCC ID:</b> ACJ9TGCF-742	Page 36 of 38




# EXHIBIT G – USER’S MANUAL

<b>PCTEST™ PT. 15.407 UNII TEST REPORT</b>		<b>FCC CERTIFICATION REPORT (802.11a UNII BAND)</b>	<b>Panasonic</b>	<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0606160517	<b>Test Dates:</b> July 6 - July 7, 2006	<b>EUT Type:</b> Panasonic Toughbook Model: CF-74	<b>FCC ID:</b> ACJ9TGCF-742	Page 37 of 38



# EXHIBIT H – SAR MEASUREMENT REPORT

<b>PCTEST™ PT. 15.407 UNII TEST REPORT</b>		<b>FCC CERTIFICATION REPORT (802.11a UNII BAND)</b>	<b>Panasonic</b>	<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0606160517	<b>Test Dates:</b> July 6 - July 7, 2006	<b>EUT Type:</b> Panasonic Toughbook Model: CF-74	<b>FCC ID:</b> ACJ9TGCF-742	Page 38 of 38