

Table of Contents	Page
1 GENERAL INFORMATION	3
1.1 Tested Methodology	4
1.2 Test Facility	4
2 PRODUCT DESCRIPTION	5
2.1 Test system Details	5
3 SYSTEM TEST CONFIGURATION	6
3.1 Justification	6
3.2. Configuration of Tested System	6
4 MEASUREMENT UNCERTAINTY	7
5 TEST INSTRUMENTS	8
6 SUMMARY OF TEST	9
6.1 §15.207 Conducted Emissions	9
6.2 §15.247(a)(2)6dB Bandwidth	9
6.3 §15.247(b) Maximum Peak Out Put Power(Conducted)	10
6.4 §15.247(c) Out of Band Emissions(Radiated)	12
6.5 §15.247(c) Out of Band Emissions(Conducted)	13
6.6 §15.247(d) Power Density(Conducted)	13
Photographs of test setup	14-16
APPENDIX	17
Test data	A1toA31

1 GENERAL INFORMATION

APPLICANT : Matsushita Electric Industrial Co.,Ltd.
AVC Company Personal Computer Division.

ADDRESS : 1-10-12 Yakumohigashi-machi, Moriguchi City
Osaka 570-0021 Japan
Tel: +81-6-6907-4050
Fax: +81-6-6907-4041

REGULATION(S) : FCC Part15 Subpart C, Section 15.247
*Except §15.247(e) Processing Gain

MODEL NUMBER : CF-P1

SERIAL NUMBER : 1LKSA00006

KIND OF EQUIPMENT : Wireless LAN built in personal computer
(SYMBOL LAN Card)

TESTED DATE : January 28, 30 and 31, 2002

RECEIPT DATE OF SAMPLE : January 28, 2002

REPORT FILE NUMBER : 22FE0029-YW

TEST SITE : A-PEX Yokowa No.3 Open Test Sites

A-pex International Co., Ltd.
YOKOWA LAB.

108 Yokowa-cho, Ise-shi, Mie-ken 516-1106 JAPAN

Telephone: int +81 596 39 1485

Facsimile: int +81 596 39 0232

Test report
FCC ID : ACJ9TGCF-P11
Our reference : 22FE0029-YW
Page : 4 of 17
Issued date : February 18, 2002

1.1 Tested Methodology

The measurement was performed according to the procedures in ANSI C63.4(1992).

1.2 Test Facility

The open area site measurement facilities used to collect the radiated data are located at 108, Yokowa-cho, Ise-shi, Mie-ken, 516-1106 Japan.

These sites have been fully described in reports submitted to the FCC office.

No.3 test site has filed to the FCC on September 12, 2000 as number: 90412 and is accepted by Industry Canada on May 01,2001 as number IC2973-3.

A-pex International Co., Ltd.

YOKOWA LAB.

108 Yokowa-cho, Ise-shi, Mie-ken 516-1106 JAPAN

Telephone: int +81 596 39 1485

Facsimile: int +81 596 39 0232

2 PRODUCT DESCRIPTION

Matsushita Electric Industrial Co.,Ltd, Model CF-P1 (referred to as the EUT in this report) is a Wireless LAN built in Personal Computer(SYMBOL LAN Card).

The specification is as following :

Wireless LAN : Direct sequence spread spectrum.(IEEE 802.11b)
2412 through 2462MHz (11channels / each 5MHz wide)
Antenna Type: /4 Monopole Antenna
Antenna Gain: 2.14dBi

*Fcc Part 15.31(e)

The host device CF-P1 provide the LAN Module with stable power supply(DC3.3V), and the LAN module complies power supply regulation.

*Fcc Part 15.203 Antenna requirement

The wireless LAN card is installed in the host device and cannot be removed by the user.

Due to the above reasons, the wireless LAN card meets the antenna requirements of FCC 15. 203.

2.1 Test System Details

Model	FCC ID	Description
(1) Matsushita Electric Industrial Co.,Ltd. M/N: CF-P1 S/N: 1LKSA00006 *FccPart15 Subpart B Class B Digital Device	ACJ9TGCF-P11 DOC	Wireless LAN built in PC (SYMBOL LAN Card)
(2)Matsushita Electric Industrial Co.,Ltd. M/N: CF-AA1527 C4 S/N: C011000523A	DOC	AC Adapter
(3)PIONEER M/N:SE-5130 S/N:-	-	Headphone

A-pex International Co., Ltd.
YOKOWA LAB.

108 Yokowa-cho, Ise-shi, Mie-ken 516-1106 JAPAN

Telephone: int +81 596 39 1485

Facsimile: int +81 596 39 0232


3 SYSTEM TEST CONFIGURATION

3.1 Justification

The system was configured in typical fashion (as a customer would normally use it) for testing.

Test mode : Data Transmitting mode(bit rate : 11Mbps)
 Performed the test about channels 1(low), 6(mid) and 11(high) among 11 channels of all Carrier frequencies.

3.2 Configuration of Tested System

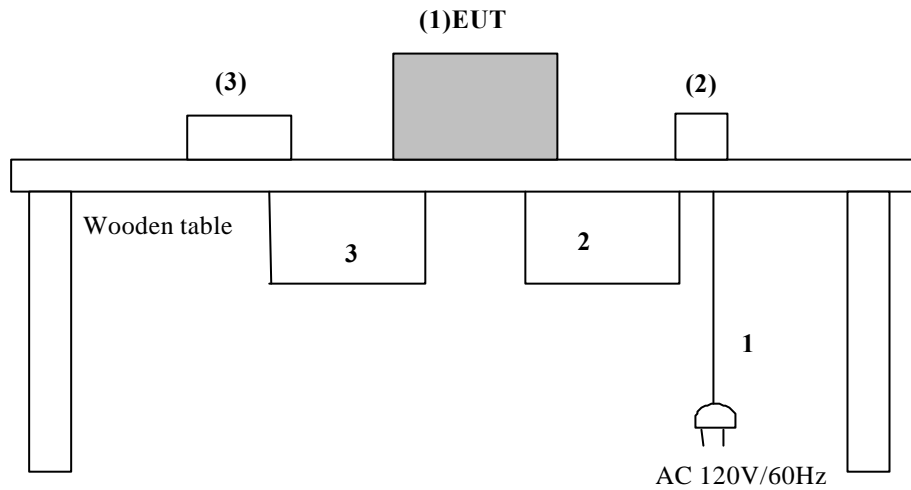

* Cabling was taken into consideration and test data was taken under worst case conditions.

List of cables used

No.	Name	Length (m)	Shield	Remark
1	AC Power Cable	1.8	N	Polyvinyl chloride
2	DC Power Cable	1.9	N	Polyvinyl chloride
3	Headphone	2.6	N	Polyvinyl chloride

A-pex International Co., Ltd.
YOKOWA LAB.

108 Yokowa-cho, Ise-shi, Mie-ken 516-1106 JAPAN

Telephone: int +81 596 39 1485

Facsimile: int +81 596 39 0232

4 Measurement Uncertainty

Conducted Emission Test

The measurement uncertainty (with a 95% confidence level) for this test was ± 2.0 dB.

The data listed in this test report has enough margin, more than site margin.

Radiated Emission Test

The measurement uncertainty (with a 95% confidence level) for this test using Biconical antenna is ± 4.4 dB.

The measurement uncertainty (with a 95% confidence level) for this test using Logperiodic antenna is ± 3.2 dB.

The measurement uncertainty (with a 95% confidence level) for this test using Horn antenna is ± 5.8 dB.

The data listed in this test report may exceed the test limit because it does not have enough margin.

A-pex International Co., Ltd.

YOKOWA LAB.

108 Yokowa-cho, Ise-shi, Mie-ken 516-1106 JAPAN

Telephone: int +81 596 39 1485

Facsimile: int +81 596 39 0232

Test report
FCC ID : ACJ9TGCF-P11
Our reference : 22FE0029-YW
Page : 8 of 17
Issued date : February 18, 2002

5 TEST EQUIPMENT USED

Name	Manufacturer	Model	Control No.	Calibrated Until
Pre Amplifier	Hewlett Packard	8447D	AF-01	March 30, 2002
Pre Amplifier	Hewlett Packard	HP8449B	AF-06	December 20, 2002
Attenuator(6dB)	Anritsu	MP721B	AT-06	March 30, 2002
Attenuator(6dB)	Hirose Electric	ATT-106	AT-20	December 3, 2002
Biconical Antenna	Schwarzbeck	BBA9106	BA-03	April 30, 2002
Logperiodic Antenna	Schwarzbeck	UHAL9108	LA-06	April 30, 2002
LISN	Rohde & Schwarz	ESH3-Z5	LS-04	November 5, 2002
Horn Antenna	AH System, Inc	SAS-200/571	HA-02	May 19, 2002
Horn Antenna	Schwarzbeck	BBHA9170	EST-10	October 16, 2004
High Pass Filter	Tokimec	TF323DCA	HF-04	October 14, 2002
Spectrum Analyzer	Hewlett packard	8567A	SA-04	March 30, 2002
Spectrum Analyzer	Advantest	R3273	SA-06	November 19, 2002
Test Receiver	Rohde & Schwarz	ESHS10	TR-05	August 23, 2002
Test Receiver	Rohde & Schwarz	ESVS10	TR-06	November 21, 2002
Power Sensor	Hewlett packard	ECP-E18A	PS-01	May 28, 2002
Power Meter	Hewlett packard	EPM-442A	PM-01	May 28, 2002
Microwave Cable	Suhner	SUCOFLEX	CC-C13	January 12, 2003
Microwave Cable	Suhner	SUCOFLEX	CC-C14	January 12, 2003
Yokowa No.3 open Coaxial(0.01-1000MHz)	A-PEX	CC-31~CC-37, CC-3ORC SW-31, SW-32		March 30, 2002
Yokowa No.3 shield Coaxial(0.01-30MHz)	A-PEX	CC-35~CC-37, CC-3SC CCB3, SW-31, SW-32		March 30, 2002
No.3 Open Test Site	JSE	10m	YOATS-03	April 30, 2002

All measurement equipment is traceable to national standards.

A-pex International Co., Ltd.

YOKOWA LAB.

108 Yokowa-cho, Ise-shi, Mie-ken 516-1106 JAPAN

Telephone: int +81 596 39 1485

Facsimile: int +81 596 39 0232

6 SUMMARY OF TESTS

6.1 §15.207 Conducted Emissions

Test Procedure

EUT was placed on a platform of nominal size, 1m by 1.5m, raised 80cm above the conducting ground plane. The rear of tabletop was located 40cm to the vertical conducting plane. The rear of EUT, including peripherals aligned and flushes with rear of tabletop. All other surfaces of tabletop were at least 80cm from any other grounded conducting surface. I/O cables and AC cables that were connected to the peripherals were bundled in center. They were folded back and forth forming a bundle 30cm to 40cm long and were hanged at a 40cm height to the ground plane. Each EUT current-carrying power lead, except the ground (safety) lead, was individually connected through a LISN to the input power source. All unused 50ohm connectors of the LISN were resistively terminated in 50ohm when not connected to the measuring equipment.

The AC Mains Terminal Continuous disturbance Voltage has been measured with the EUT on a shielded room. The EUT was connected to a Line Impedance Stabilization Network (LISN).

An overview sweep with peak detection has been performed.

The measurements have been performed with a CISPR quasi-peak detector(IF BW 10kHz) .
(Measurement range : 450kHz to 30MHz)

Test data : APPENDIX A1 to A5
Photographs of test setup : Page 14(1)
Test result : Pass
Test instruments : LS-04, SA-04, TR-05, CC-3SC

6.2 § 15.247(a)(2) 6dB Bandwidth

Test Procedure

The minimum 6dB bandwidth was measured with a spectrum analyzer connected to the antenna port.

1. 2412MHz(Low) : 9.64MHz > 500kHz
2. 2437MHz(Mid) : 9.26MHz > 500kHz
3. 2462MHz(High) : 10.1MHz > 500kHz

Test data : APPENDIX A6
Test result : Pass
Test instruments : SA-06

A-pex International Co., Ltd.

YOKOWA LAB.

108 Yokowa-cho, Ise-shi, Mie-ken 516-1106 JAPAN

Telephone: int +81 596 39 1485

Facsimile: int +81 596 39 0232

Test report
FCC ID : ACJ9TGCF-P11
Our reference : 22FE0029-YW
Page : 10 of 17
Issued date : February 18, 2002

6.3 § 15.247(b) Maximum Peak Out Put Power(Conducted)

Test Procedure

The Maximum Peak Output power was measured with a power meter connected to the antenna port.

* Antenna Gain dose not exceed 6dBi.

Test data : APPENDIX A7
Test result : Pass
Test instruments : PS-01, PM-01, SA-06


A-pex International Co., Ltd.
YOKOWA LAB.

108 Yokowa-cho, Ise-shi, Mie-ken 516-1106 JAPAN

Telephone: int +81 596 39 1485

Facsimile: int +81 596 39 0232

Pre check of worse-case position

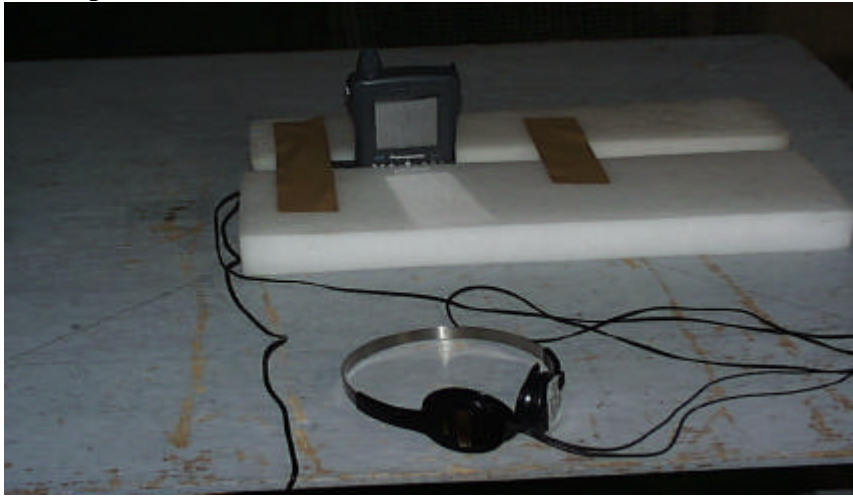

X axis



Y axis



Z axis

A-pex International Co., Ltd.
YOKOWA LAB.

108 Yokowa-cho, Ise-shi, Mie-ken 516-1106 JAPAN

Telephone: int +81 596 39 1485

Facsimile: int +81 596 39 0232

6.4 § 15.247(c) Out of Band Emissions(Radiated)

Test Procedure

EUT was placed on a platform of nominal size, 1m by 1m, raised 80cm above the conducting ground plane.

I/O cables that were connected to the peripherals were bundled in center. They were folded back and forth forming a bundle 30cm to 40cm long and were hanged 40cm height to the ground plane. Test was made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna was varied in height above the conducting ground plane to obtain the maximum signal strength.

The Radiated Electric Field Strength intensity has been measured on an open test site with a ground plane and at a distance of 3m.

The measuring antenna height was varied between 1 to 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.

The measurements were performed for both vertical and horizontal antenna polarization.

EUT emission levels were compared when the EUT antenna position was vertical polarization and horizontal polarization.

The equipment was also previously checked at each position of three axis X,Y and Z to find that X axis was worst in

These positions under the vertical antenna polarization and that Z axis was worst in these positions under the horizontal Antenna position. The position in which the maximum noise occurred was chosen to put into measurement. See the photographs in the preceding page.

It was opened under transmitting mode.

Radiated Spurious emissions

In any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator confirmed 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on a radiated measurement. The result was also satisfied the general limits specified in Sec.15.209(a).

Measurement range : 30MHz to 1000MHz CISPR QP Detector, IF BW 120kHz

: 1GHz to 26GHz PK and AV Detector

Test data : APPENDIX A8 to A10(30 - 1000MHz)
: APPENDIX A11 to A13(1 - 26GHz)
: APEENDIX A14 to A18(Band Edges: 2.39GHz and 2.4835GHz)

Photographs of test setup : Page15(2)

Test result : Pass

Test instruments : AF-01, AF-06, AT-06, BA-03, LA-06, HA-02, EST-10, HF-04, SA-04,
SA-06, TR-06, CC-3ORC, CC-12, CC-14, YOATS-03,

A-pex International Co., Ltd.

YOKOWA LAB.

108 Yokowa-cho, Ise-shi, Mie-ken 516-1106 JAPAN

Telephone: int +81 596 39 1485

Facsimile: int +81 596 39 0232

Test report
FCC ID : ACJ9TGCF-P11
Our reference : 22FE0029-YW
Page : 13 of 17
Issued date : February 18, 2002

6.5 § 15.247(c) Out of Band Emissions(Conducted)

Test Procedure

The Out of Band Emissions(Conducted) was measured with a spectrum analyzer connected to the antenna port.

Test data : APPENDIX A19 to A29
Test result : Pass
Test instruments : SA-06

6.6 § 15.247(d) Power Density(Conducted)

Test Procedure

The Power Density was measured with a spectrum analyzer connected to the antenna port.

Test data : APPENDIX A30 to A31
Test result : Pass
Test instruments : SA-06

A-pex International Co., Ltd.
YOKOWA LAB.

108 Yokowa-cho, Ise-shi, Mie-ken 516-1106 JAPAN

Telephone: int +81 596 39 1485

Facsimile: int +81 596 39 0232

Photographs of test setup(1)





A-pex International Co., Ltd.
YOKOWA LAB.

108 Yokowa-cho, Ise-shi, Mie-ken 516-1106 JAPAN

Telephone: int +81 596 39 1485

Facsimile: int +81 596 39 0232

Photographs of test setup(2)(VERTICAL)

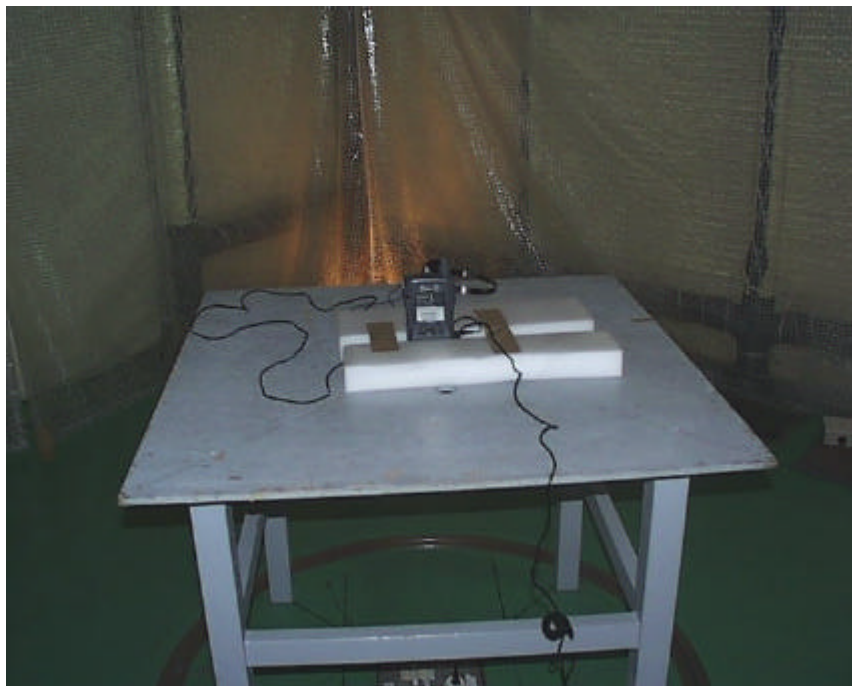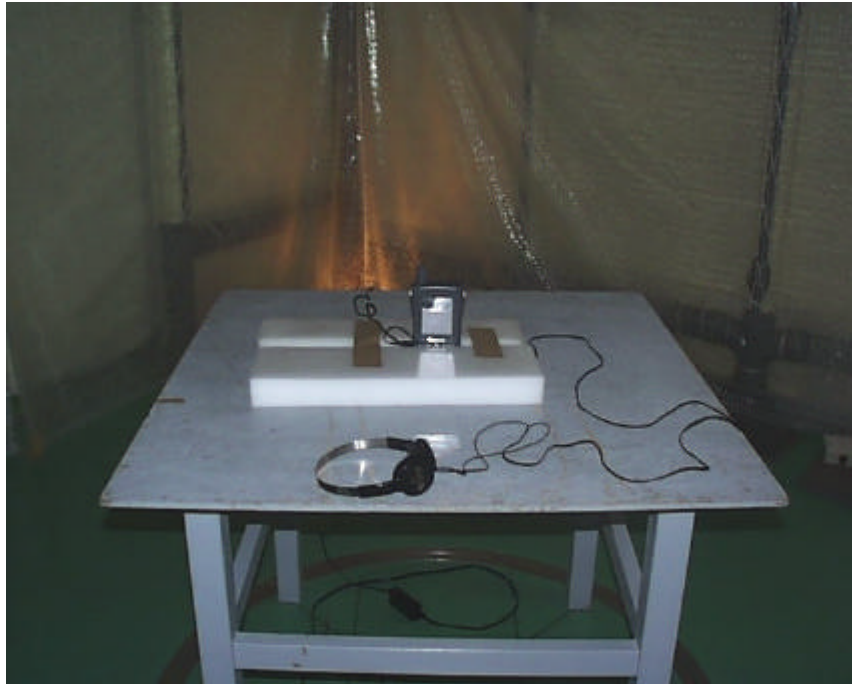

A-pex International Co., Ltd.
YOKOWA LAB.

108 Yokowa-cho, Ise-shi, Mie-ken 516-1106 JAPAN

Telephone: int +81 596 39 1485

Facsimile: int +81 596 39 0232

Photographs of test setup(2)(Horizontal)



A-pex International Co., Ltd.
YOKOWA LAB.

108 Yokowa-cho, Ise-shi, Mie-ken 516-1106 JAPAN

Telephone: int +81 596 39 1485

Facsimile: int +81 596 39 0232

APPENDIX

Test Data

1. Conducted Emission (6.1)	<u>A1 to A5</u>
2. 6dB Bandwidth (6.2)	<u>A6</u>
3. Maximum peak output power(Conducted) (6.3)	<u>A7</u>
4. Out of band emissions(Radiated) (6.4)	<u>A8 to A18</u>
5. Out of band emissions(Conducted) (6.5)	<u>A19 to A29</u>
6. Power density (6.6)	<u>A30 to A31</u>