



**FCC CFR47 PART 15 SUBPART E  
INDUSTRY CANADA RSS-210 ISSUE 8**

**CLASS II PERMISSIVE CHANGE  
TEST REPORT**

**FOR**

**802.11abgn 2x2 , 2.4GHz, 5GHz, add Panasonic Tablet PC CF-U1**

**MODEL NUMBER: WL11F**

**FCC ID: ACJ9TGWL11F  
IC: 216A-CFWL11F**

**REPORT NUMBER: 11J13900-6**

**ISSUE DATE: JULY 05, 2011**

*Prepared for*  
**PANASONIC CORPORATION OF NORTH AMERICA  
ONE PANASONIC WAY, 4B-8  
SECAUCUS, NEW JERSEY 07094, U.S.A.**

*Prepared by*  
**COMPLIANCE CERTIFICATION SERVICES (UL CCS)  
47173 BENICIA STREET  
FREMONT, CA 94538, U.S.A.  
TEL: (510) 771-1000  
FAX: (510) 661-0888**



**NVLAP LAB CODE 200065-0**

---

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	07/5/11	Initial Issue	F. Ibrahim



## 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** PANASONIC CORPORATION OF NORTH AMERICA  
ONE PANASONIC WAY, 4B-8  
SECAUCUS, NEW JERSEY 07094, U.S.A.

**EUT DESCRIPTION:** 802.11abgn 2x2 , 2.4GHz, 5GHz inside Panasonic Tablet PC CF-U1

**MODEL:** WL11F

**SERIAL NUMBER:** BKSA00810

**DATE TESTED:** JYLY 01-05, 2011

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart E	Pass
INDUSTRY CANADA RSS-210 Issue 8 Annex 9	Pass
INDUSTRY CANADA RSS-GEN Issue 3	Pass

Compliance Certification Services (UL CCS) tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL CCS based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL CCS and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL CCS will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For UL CCS By:

Tested By:



FRANK IBRAHIM  
EMC SUPERVISOR  
UL CCS

CHIN PANG  
EMC ENGINEER  
UL CCS

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2009, FCC CFR 47 Part 2, FCC CFR 47 Part 15, FCC 06-96, RSS-GEN Issue 3, and RSS-210 Issue 8.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

UL CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

### 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 1000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

The EUT is an 802.11a/b/g/n operates in both the 2.4GHz and 5 GHz bands.

The radio module is manufactured by Atheros Communications.

### 5.2. DESCRIPTION OF CLASS II PERMISSIVE CHANGE

The major change filed under this application is adding Portable Panasonic Host (Representative model; CF-U1).

### 5.3. MAXIMUM OUTPUT POWER

The test measurement passed within  $\pm 0.5$ dBm of the original output power.

### 5.4. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a PIFA antenna, Main and Aux antenna with a maximum gain as:

**Atheros XB92**  
**Original**

2.4GHz	5150-5350	5470-5725	5725-5850
3.6	5.6	5.3	4.8

**CF-U1**

<b>Main</b>	1.75	3.41	2.98	1.06
<b>Aux</b>	-0.78	3.26	3.16	2.57

### 5.5. SOFTWARE AND FIRMWARE

The test utility software used during testing was ART Revision 0.9 Built #34 Art\_11n

### 5.6. WORST-CASE CONFIGURATION AND MODE

The worst-case channel is determined as the channel with the highest output power. Radiated Emissions below 1 GHz was performed with EUT set to transmit at the channel with highest output power.

Worst-case data rates used per input from the client are as follows:

For 5.2GHz and 5.3GHz Band:

11a: 6Mbps for bandedge

11n HT20: MCS0 for harmonic spurious.

For 5.6GHz Band:

11n HT20 for bandedge and harmonic spurious.

The EUT was investigated in X,Y,Z position and Y-axis orientation was determined to be the worst-case; therefore, all testing in this report was conducted with EUT in worst case orientation.

Worst-case modes were selected for BE and Harmonics based on an investigation of the original reports, as shown in the summary table below:

Worst-case Modes to test					
5.2 GHz			5.3 GHz		
Low BE	High BE	Harmonics	Low BE	High BE	Harmonics
11a 20M	No need to test	11n 20M	No need to test	11a 20M	11n 20M
5.6 GHz					
Low BE	High BE	Harmonics			
11n 20M	11n 20M	11n 20M			

## 5.7. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
Lapop	PANASONIC	CF-U1	BKSA00810	DoC
AC Adapter	PANASONIC	CF-AA1633A	1633AM709701960A	DoC


### I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC	1	AC	Un-Sheilded	180 cm	N/A
2	DC	1	DC	Un-Sheilded	180 cm	N/A

### TEST SETUP

The EUT is installed in a host laptop computer during the tests. Test software exercised the radio card. A laptop computer was used to configure the EUT to continuously transmit at a specified output power or continuously receive on the channel specified in the test data. For transmit modes the worst case was evaluated.

**SETUP DIAGRAM FOR TESTS**

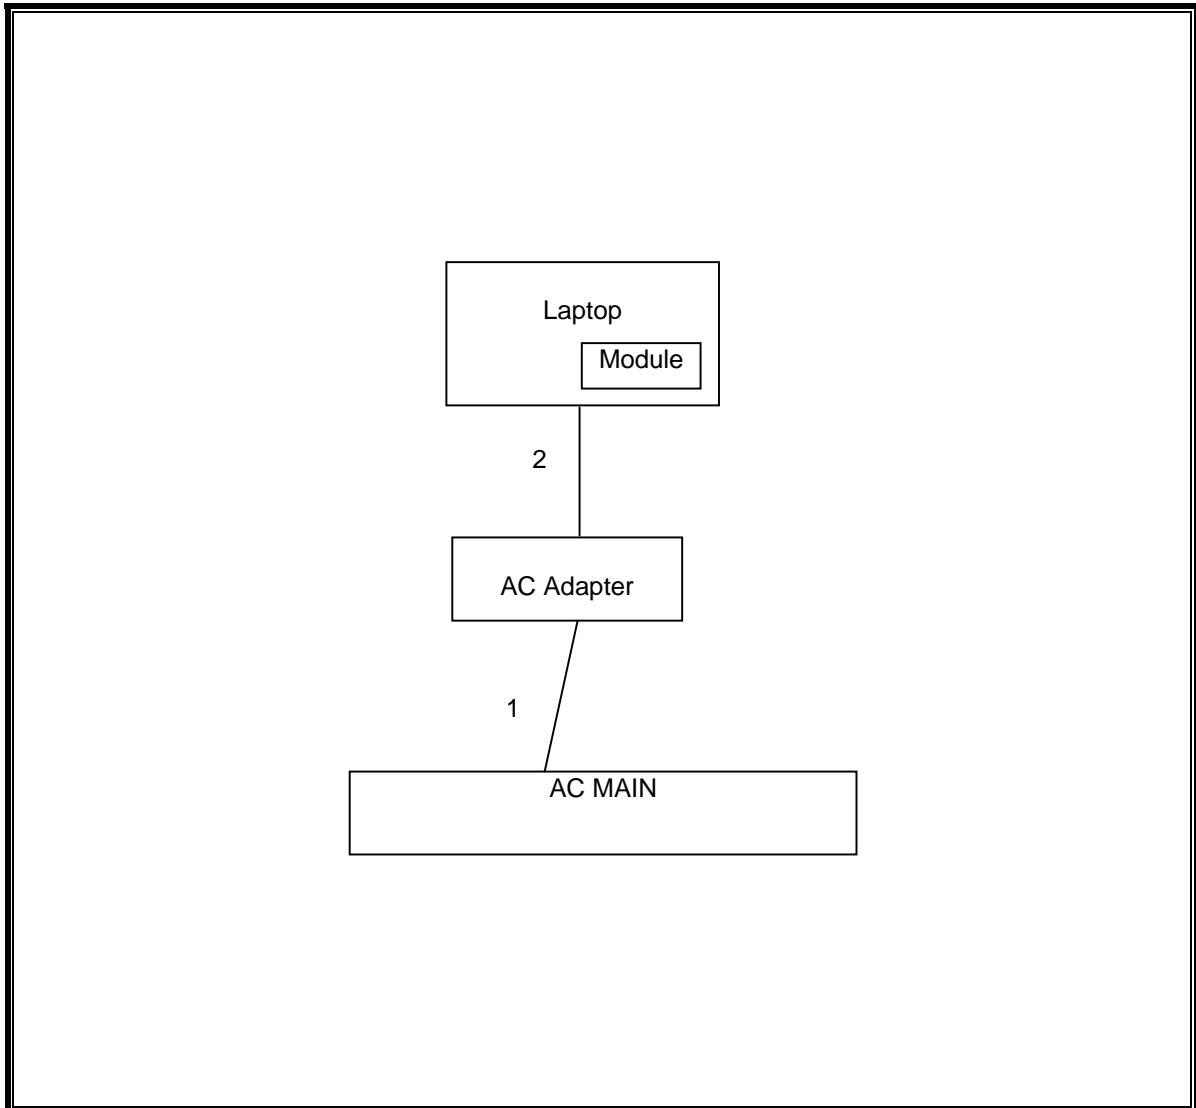

## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST					
Description	Manufacturer	Model	Asset	Cal Date	Cal Due
Antenna, Bilog, 2 GHz	Sunol Sciences	JB1	C01011	07-12-10	07-12-11
Preamplifier, 1300 MHz	Agilent / HP	8447D	C00580	01-27-11	01-27-12
Antenna, Horn, 18 GHz	EMCO	3115	C00783	06-29-10	06-30-12
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01069	04-07-11	04-07-12
Peak / Average Power Sensor	Agilent / HP	E9327A	C00964	01-07-10	04-11-12
Peak Power Meter	Agilent / HP	E4416A	C00963	12-04-09	04-11-12
Preamplifier, 40 GHz	Miteq	NSP4000-SP2	C00990	07-15-10	07-15-11
Antenna, Horn, 40 GHz	ARA	MWH-2640/B	C00981	06-14-11	06-14-12
Reject Filter, 5.47-5.725 GHz	Micro-Tronics	BRC13191	N02678	CNR	CNR
Reject Filter, 5.15-5.35 GHz	Micro-Tronics	BRC13190	N02679	CNR	CNR

## 7. RADIATED TEST RESULTS

### 7.1. LIMITS AND PROCEDURE

#### LIMITS

FCC §15.205 and §15.209

IC RSS-210 Clause 2.6 (Transmitter)

IC RSS-GEN Clause 6 (Receiver)

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

#### TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.



The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each applicable band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.



## 7.1. TRANSMITTER ABOVE 1 GHz (worst-case modes)

### 7.1.1. 5.2 GHz BAND

#### RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

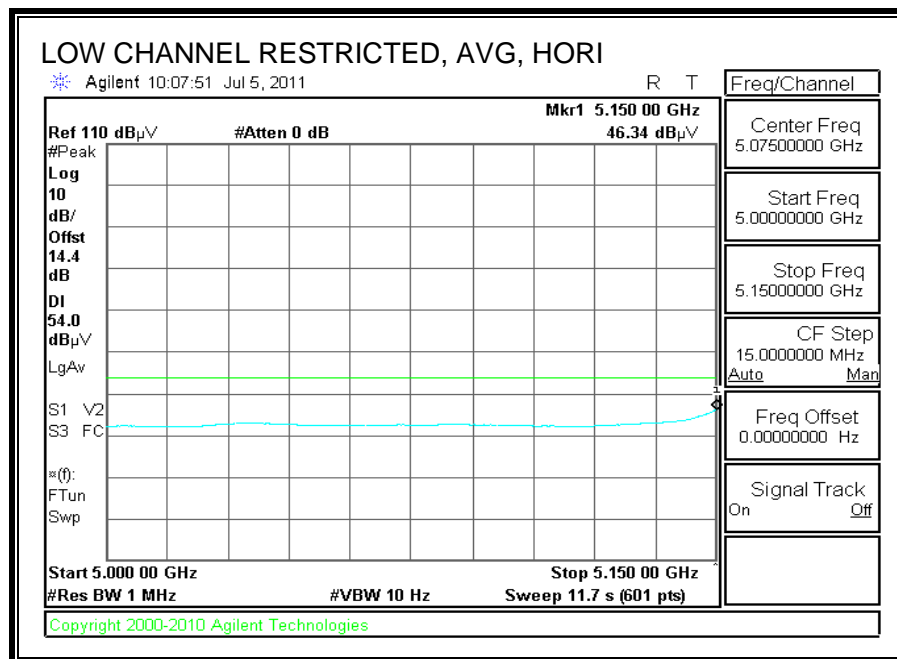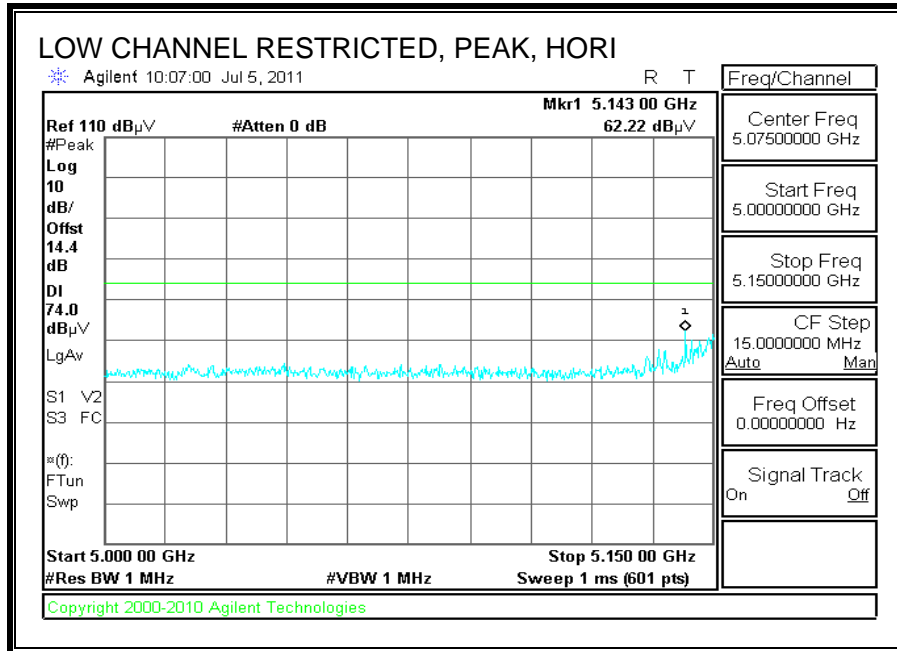

**RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)**

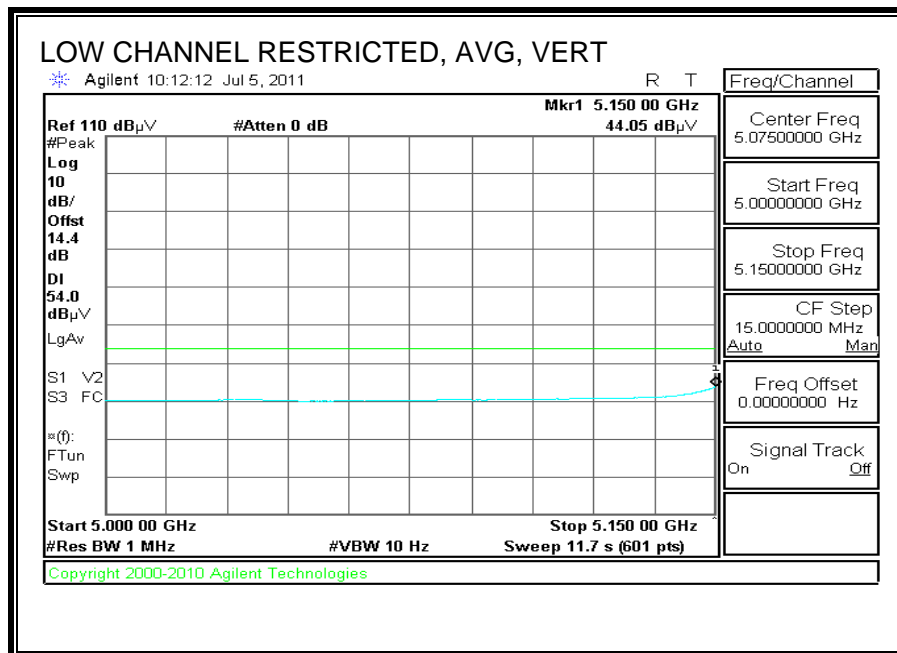
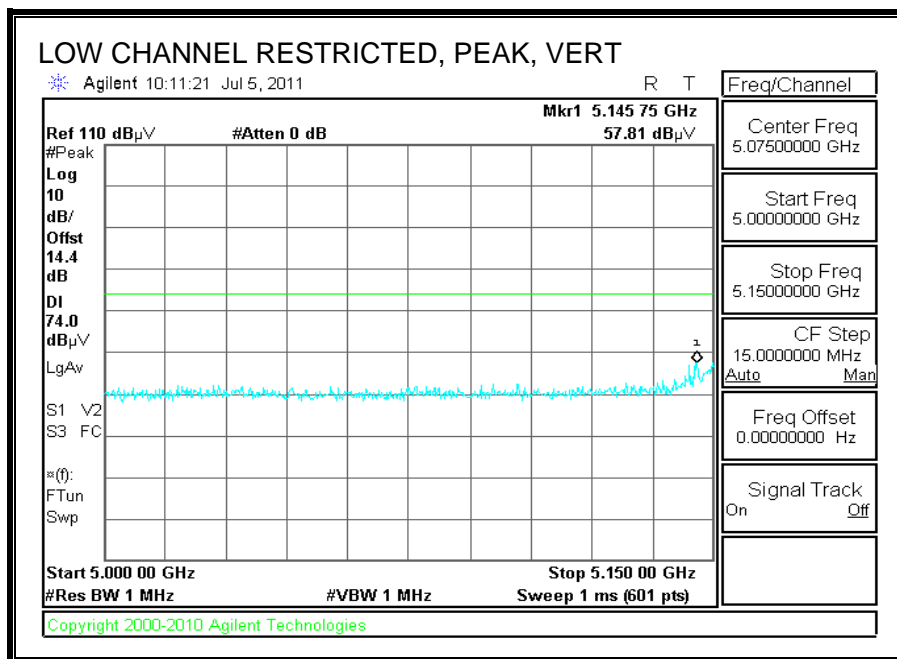


**HARMONICS AND SPURIOUS EMISSIONS**



High Frequency Measurement													
Compliance Certification Services, Fremont 5m Chamber													
Test Engr:		David Garcia											
Date:		07-01-11											
Project #:		Panasonic CF-U1											
Company:		Panasonic											
Test Target:		FCC 15.407											
Mode Oper:		Tx mode, HT20, 5.2GHz Band											
f	Measurement Frequency	Amp	Preamp Gain	Average Field Strength Limit									
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Peak Field Strength Limit									
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Margin vs. Average Limit									
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Margin vs. Peak Limit									
CL	Cable Loss	HPF	High Pass Filter										
f GHz	Dist (m)	Read dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Corr. dBuV/m	Limit dBuV/m	Margin dB	Ant. Pol V/H	Det P/A/QP	Notes
<b>Low Channel, 5180 MHz</b>													
15.540	3.0	38.0	38.7	11.3	-34.8	0.0	0.0	53.1	74.0	-20.9	H	P	
15.540	3.0	23.8	38.7	11.3	-34.8	0.0	0.0	39.0	54.0	-15.0	H	A	
15.540	3.0	38.2	38.7	11.3	-34.8	0.0	0.0	53.4	74.0	-20.6	V	P	
15.540	3.0	24.4	38.7	11.3	-34.8	0.0	0.0	39.5	54.0	-14.5	V	A	
<b>Mid Channel, 5220 MHz</b>													
15.660	3.0	34.2	38.4	11.4	-34.7	0.0	0.0	49.2	74.0	-24.8	H	P	
15.660	3.0	22.0	38.4	11.4	-34.7	0.0	0.0	37.0	54.0	-17.0	H	A	
15.660	3.0	33.8	38.4	11.4	-34.7	0.0	0.0	48.8	74.0	-25.2	V	P	
15.660	3.0	21.9	38.4	11.4	-34.7	0.0	0.0	37.0	54.0	-17.1	V	A	
<b>High Channel, 5240 MHz</b>													
15.720	3.0	34.5	38.2	11.4	-34.7	0.0	0.0	49.4	74.0	-24.6	H	P	
15.720	3.0	22.1	38.2	11.4	-34.7	0.0	0.0	37.0	54.0	-17.0	H	A	
15.720	3.0	34.8	38.2	11.4	-34.7	0.0	0.0	49.7	74.0	-24.3	V	P	
15.720	3.0	22.1	38.2	11.4	-34.7	0.0	0.0	37.0	54.0	-17.0	V	A	
Rev. 4.1.2.7													
Note: No other emissions were detected above the system noise floor.													

### 7.1.2. 5.3 GHz BAND

#### RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

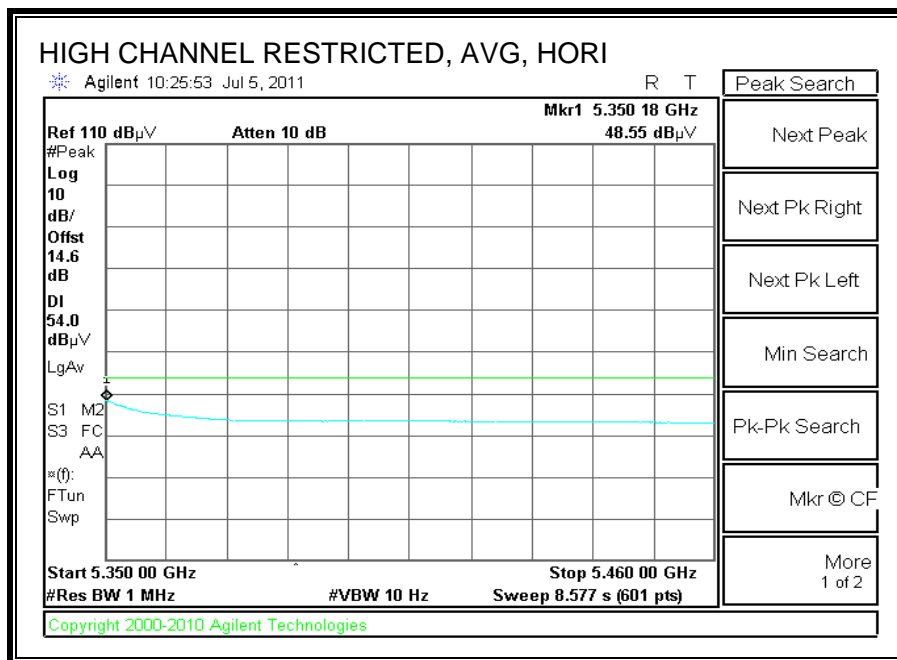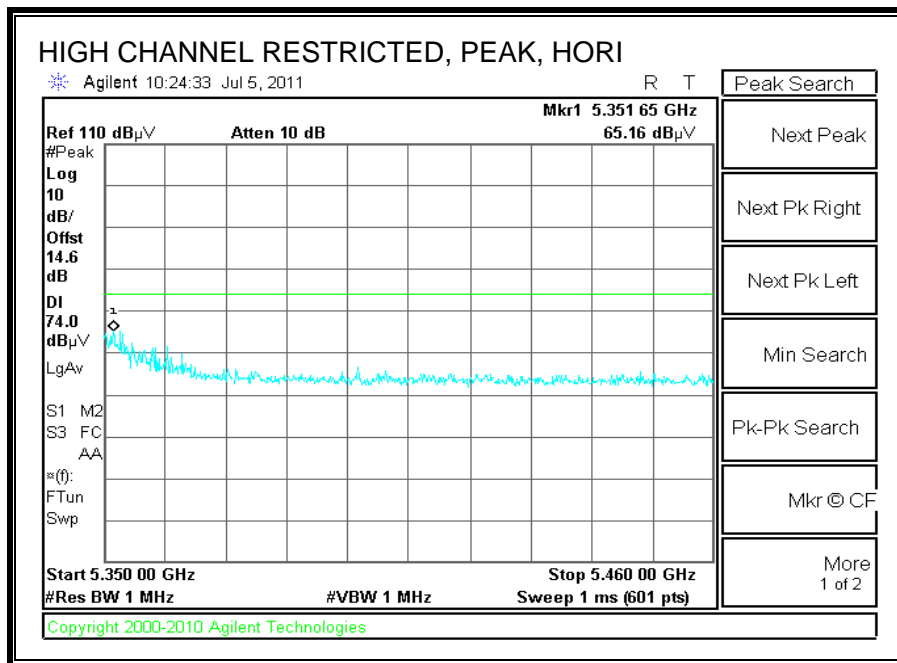



**RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)**

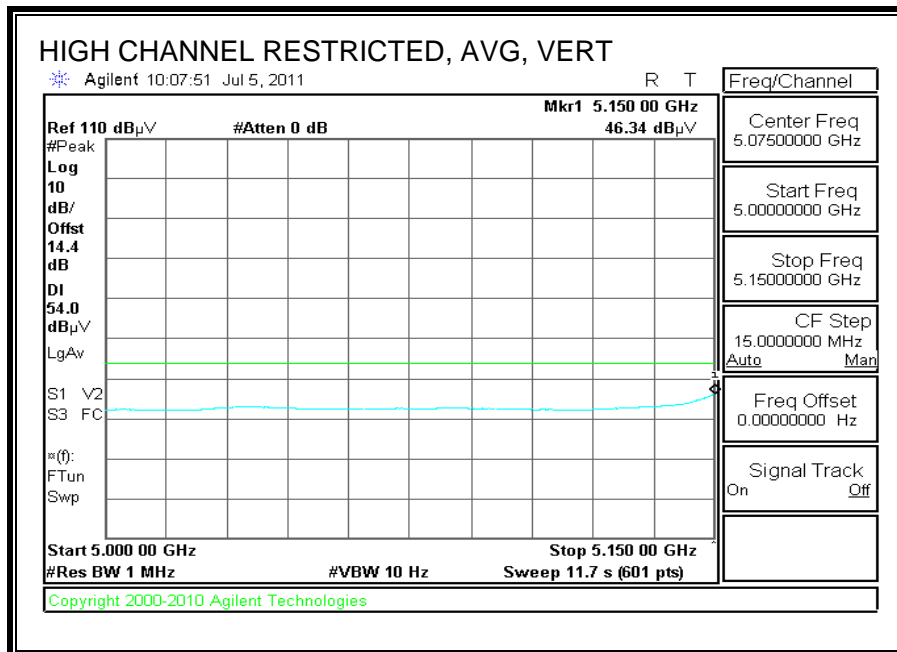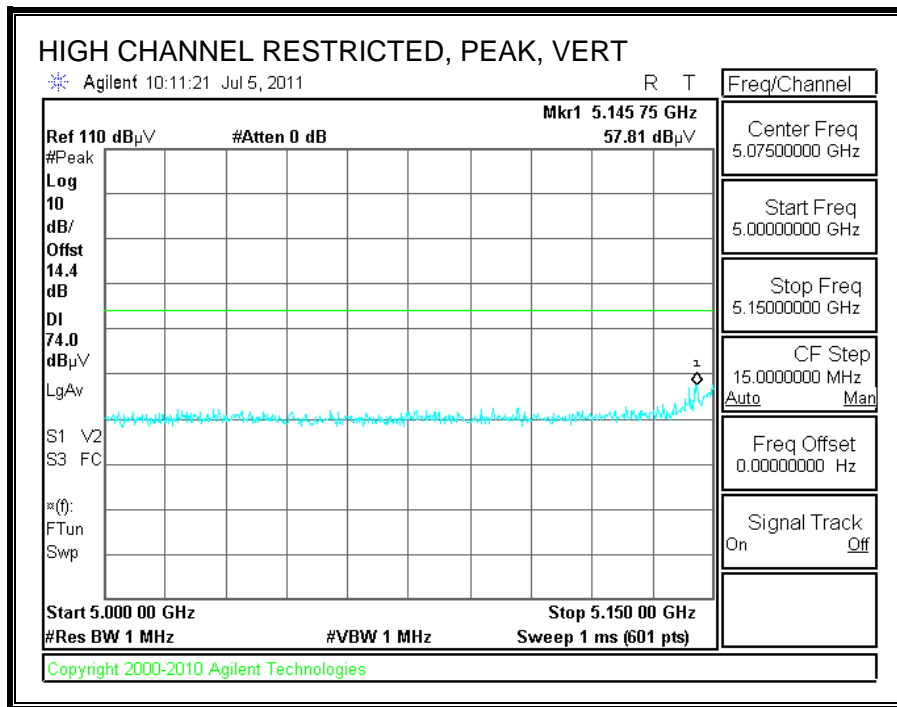



**HARMONICS AND SPURIOUS EMISSIONS**

High Frequency Measurement													
Compliance Certification Services, Fremont 5m Chamber													
Test Engr:		David Garcia											
Date:		07-01-11											
Project #:		Panasonic CF-UI											
Company:		Panasonic											
Test Target:		FCC 15.407											
Mode Oper:		Tx mode, HT20, 5.3GHz Band											
f	Measurement Frequency	Amp	Preamp Gain	Average Field Strength Limit									
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Peak Field Strength Limit									
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Margin vs. Average Limit									
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Margin vs. Peak Limit									
CL	Cable Loss	HPF	High Pass Filter										
f GHz	Dist (m)	Read dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fitr dB	Corr dBuV/m	Limit dBuV/m	Margin dB	Ant. Pol V/H	Det P/A/QP	Notes
<b>Low Channel, 5260 MHz</b>													
15.780	3.0	34.5	38.0	11.5	-34.6	0.0	0.0	49.3	74.0	-24.7	H	P	
15.780	3.0	22.6	38.0	11.5	-34.6	0.0	0.0	37.4	54.0	-16.6	H	A	
15.780	3.0	35.4	38.0	11.5	-34.6	0.0	0.0	50.2	74.0	-23.8	V	P	
15.780	3.0	24.0	38.0	11.5	-34.6	0.0	0.0	38.9	54.0	-15.1	V	A	
<b>Mid Channel, 5300 MHz</b>													
10.600	3.0	36.5	37.7	9.0	-36.6	0.0	0.0	46.6	74.0	-27.4	H	P	
10.600	3.0	24.3	37.7	9.0	-36.6	0.0	0.0	34.4	54.0	-19.6	H	A	
15.900	3.0	37.1	37.7	11.5	-34.6	0.0	0.0	51.8	74.0	-22.2	H	P	
15.900	3.0	23.8	37.7	11.5	-34.6	0.0	0.0	38.5	54.0	-15.5	H	A	
10.600	3.0	40.4	37.7	9.0	-36.6	0.0	0.0	50.5	74.0	-23.5	V	P	
10.600	3.0	26.0	37.7	9.0	-36.6	0.0	0.0	36.2	54.0	-17.8	V	A	
15.900	3.0	39.1	37.7	11.5	-34.6	0.0	0.0	53.8	74.0	-20.2	V	P	
15.900	3.0	25.0	37.7	11.5	-34.6	0.0	0.0	39.6	54.0	-14.4	V	A	
15.900	3.0	38.8	37.7	11.5	-34.6	0.0	0.0	53.5	74.0	-20.5	V	P	
15.900	3.0	24.9	37.7	11.5	-34.6	0.0	0.0	39.6	54.0	-14.4	V	A	
<b>High Channel, 5320 MHz</b>													
10.640	3.0	36.9	37.7	9.1	-36.6	0.0	0.0	47.1	74.0	-26.9	H	P	
10.640	3.0	24.7	37.7	9.1	-36.6	0.0	0.0	35.0	54.0	-19.0	H	A	
15.960	3.0	39.3	37.5	11.5	-34.5	0.0	0.0	53.8	74.0	-20.2	H	P	
15.960	3.0	24.0	37.5	11.5	-34.5	0.0	0.0	38.6	54.0	-15.4	H	A	
10.640	3.0	34.8	37.7	9.1	-36.6	0.0	0.0	45.0	74.0	-29.0	V	P	
10.640	3.0	23.1	37.7	9.1	-36.6	0.0	0.0	33.3	54.0	-20.7	V	A	
15.960	3.0	39.6	37.5	11.5	-34.5	0.0	0.0	54.2	74.0	-19.8	V	P	
15.960	3.0	25.2	37.5	11.5	-34.5	0.0	0.0	39.8	54.0	-14.2	V	A	
Rev. 4.1.2.7													
Note: No other emissions were detected above the system noise floor.													


### 7.1.3. 5.6 GHz BAND

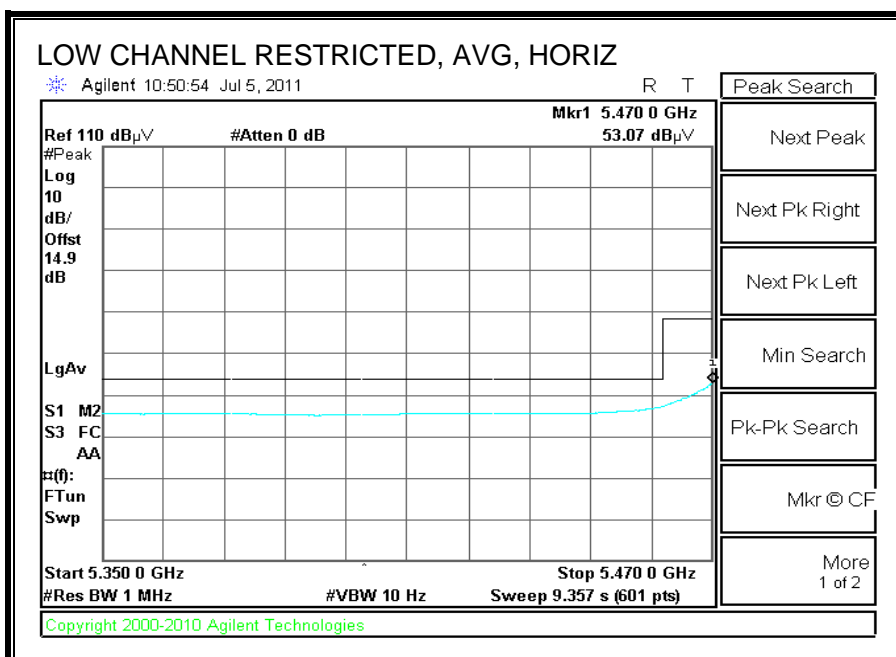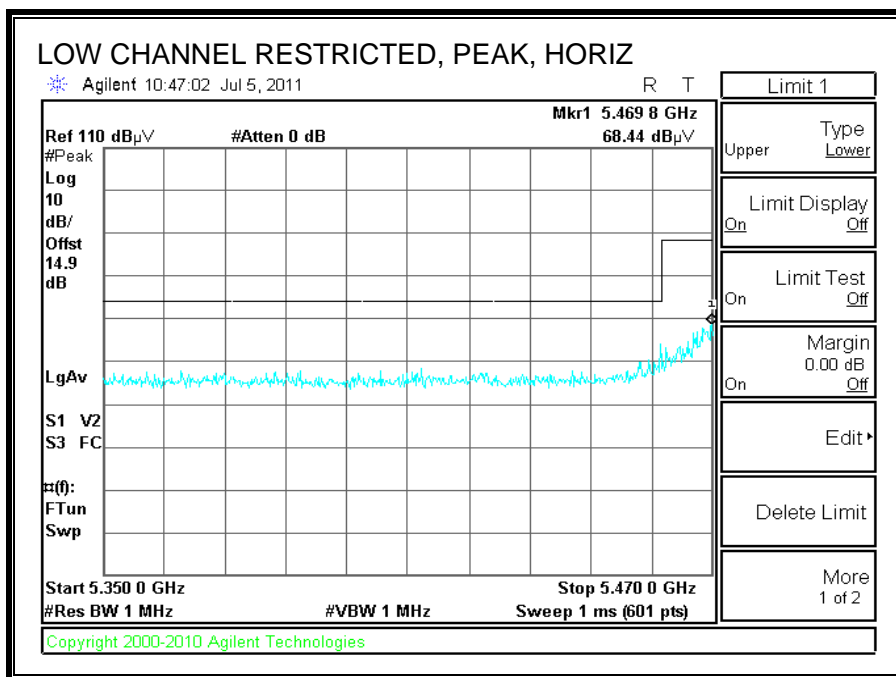


**RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)**

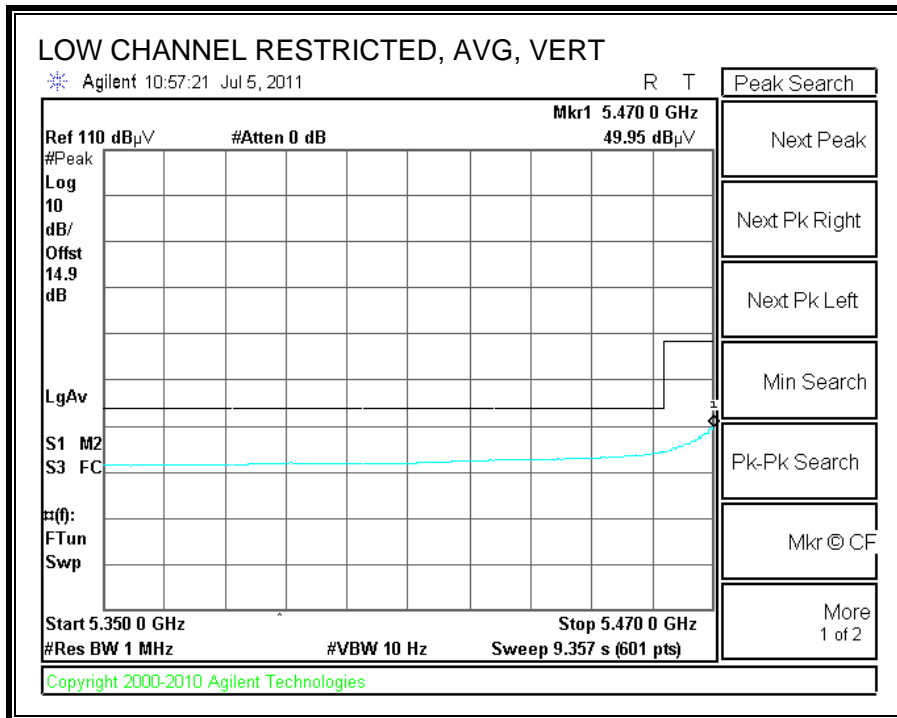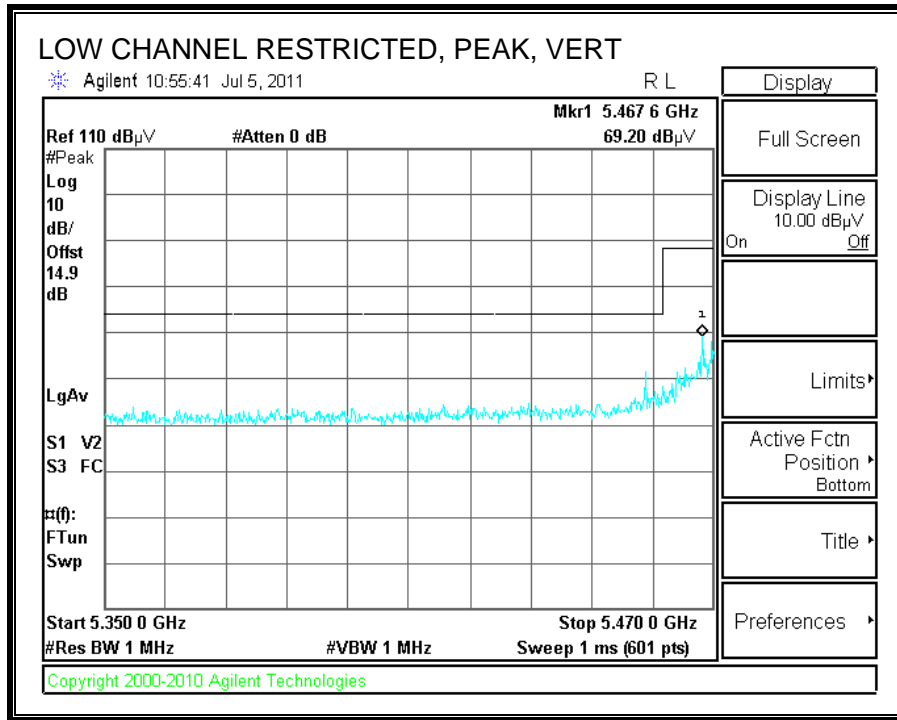

**AUTHORIZED BANDEDGE (HIGH CHANNEL, HORIZONTAL)**

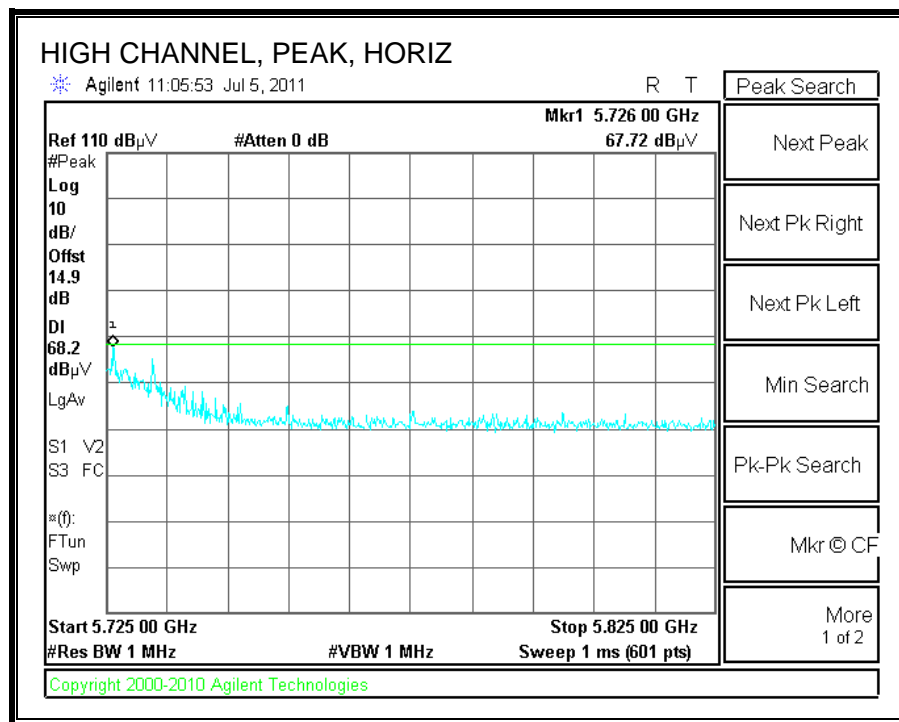

**AUTHORIZED BANDEDGE (HIGH CHANNEL, VERTICAL)**

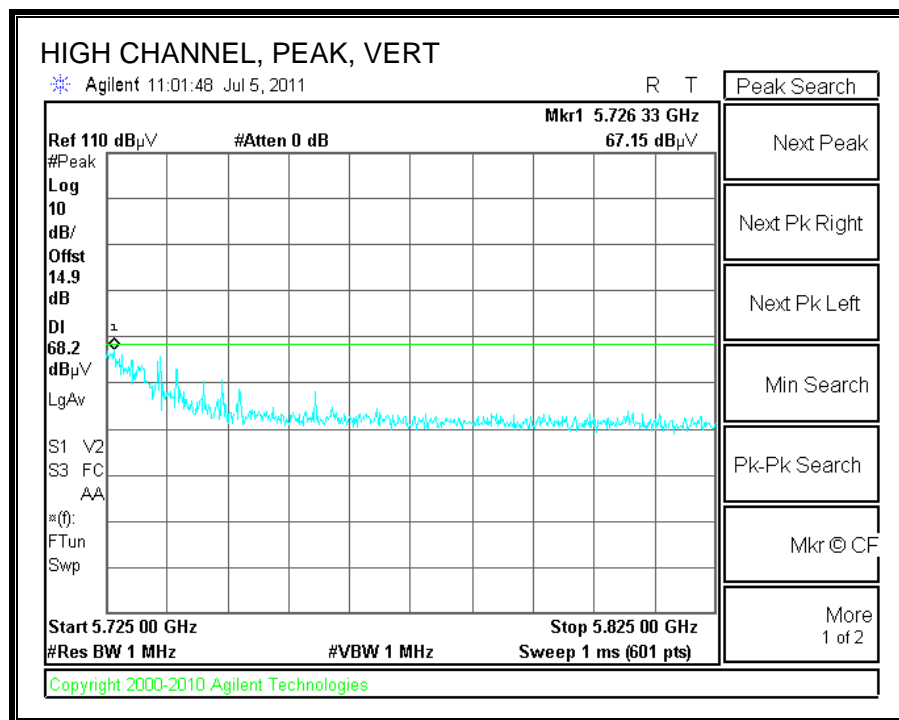


**HARMONICS AND SPURIOUS EMISSIONS**


High Frequency Measurement													
Compliance Certification Services, Fremont 5m Chamber													
Test Engr:		David Garcia											
Date:		07-01-11											
Project #:		11J13900											
Company:		Panasonic											
Test Target:		FCC 15.407											
Mode Oper:		Tx mode, HT20, 5.6GHz Band CF-U1											
f	Measurement Frequency	Amp	Preamp Gain		Average Field Strength Limit								
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters		Peak Field Strength Limit								
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m		Margin vs. Average Limit								
AF	Antenna Factor	Peak	Calculated Peak Field Strength		Margin vs. Peak Limit								
CL	Cable Loss	HPF	High Pass Filter										
f GHz	Dist (m)	Read dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Corr. dBuV/m	Limit dBuV/m	Margin dB	Ant. Pol. V/H	Det. P/A/QP	Notes
<b>Low Channel, 5500 MHz</b>													
11.000	3.0	35.3	37.9	9.2	-36.3	0.0	0.0	46.1	74.0	-27.9	H	P	
11.000	3.0	22.5	37.9	9.2	-36.3	0.0	0.0	33.3	54.0	-20.7	H	A	
11.000	3.0	37.6	37.9	9.2	-36.3	0.0	0.0	48.5	74.0	-25.5	V	P	
11.000	3.0	24.9	37.9	9.2	-36.3	0.0	0.0	35.8	54.0	-18.2	V	A	
<b>Mid Channel, 5600 MHz</b>													
11.200	3.0	36.3	38.1	9.3	-36.1	0.0	0.0	47.6	74.0	-26.4	H	P	
11.200	3.0	24.7	38.1	9.3	-36.1	0.0	0.0	36.1	54.0	-17.9	H	A	
11.200	3.0	37.8	38.1	9.3	-36.1	0.0	0.0	49.1	74.0	-24.9	V	P	
11.200	3.0	25.3	38.1	9.3	-36.1	0.0	0.0	36.6	54.0	-17.4	V	A	
<b>High Channel, 5700 MHz</b>													
11.400	3.0	39.0	38.3	9.4	-35.9	0.0	0.0	50.8	74.0	-23.2	H	P	
11.400	3.0	26.8	38.3	9.4	-35.9	0.0	0.0	38.6	54.0	-15.4	H	A	
11.400	3.0	37.8	38.3	9.4	-35.9	0.0	0.0	49.7	74.0	-24.3	V	P	
11.400	3.0	24.6	38.3	9.4	-35.9	0.0	0.0	36.4	54.0	-17.6	V	A	
Rev. 4.1.2.7													
Note: No other emissions were detected above the system noise floor.													

## 7.2. TRANSMITTER BELOW 1 GHz (worst-case modes)

### SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

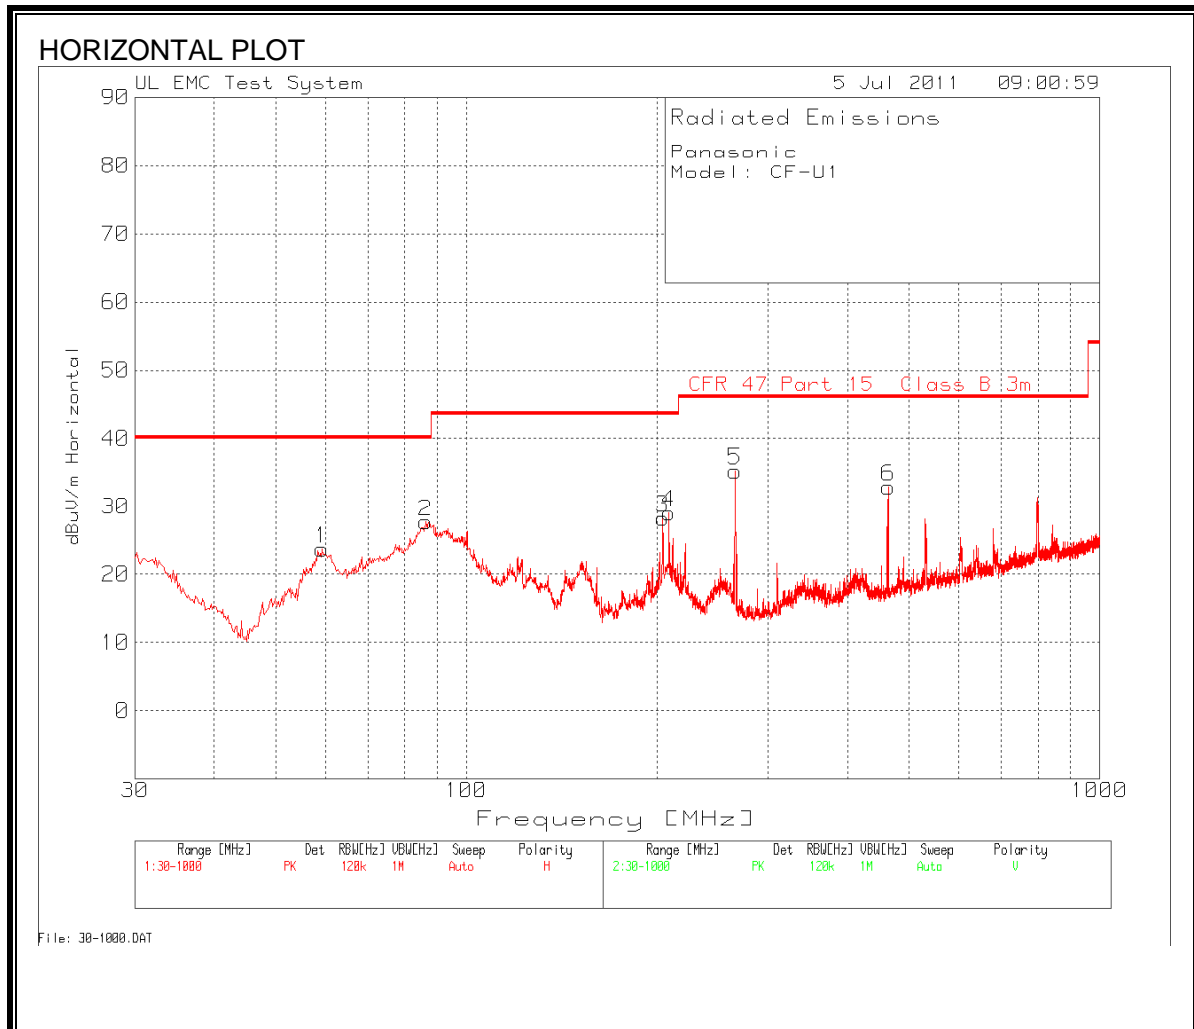

**SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)**

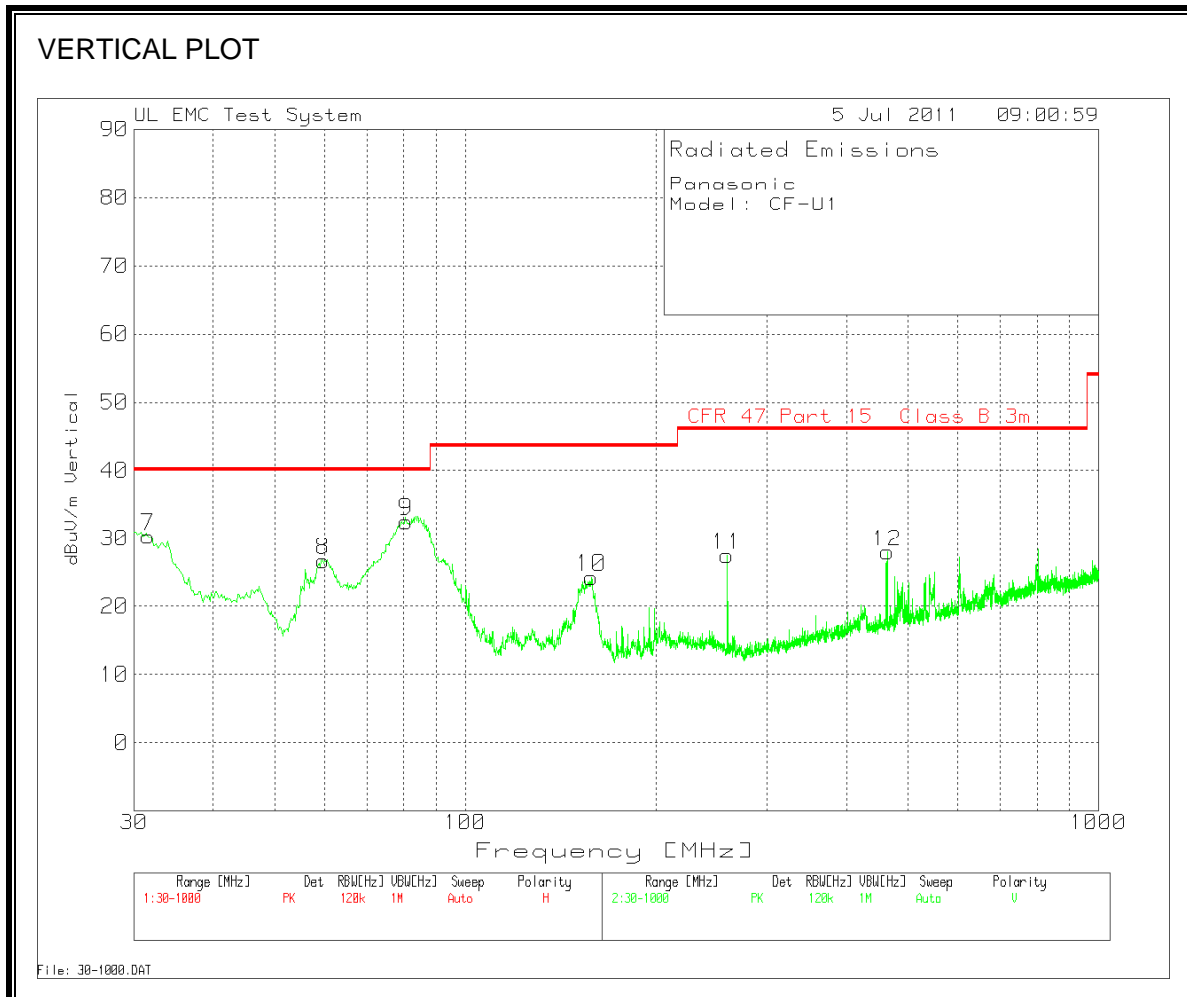

DATA

Panasonic												
Model: CF-U1												
Range 1 30 - 1000MHz												
Test Freq	Meter Res	Detector	Chamber	ET10	Below	T130	Bilcd	dBuV/m	CFR 47 Pa	Margin	Height [c	Polarity
59.2706	44.04	PK	1.1	-29.4	7.9	23.64	40	-16.36	300	Horz		
86.4089	48.16	PK	1.3	-29.3	7.5	27.66	40	-12.34	200	Horz		
204.4604	43.17	PK	2	-28.9	12	28.27	43.5	-15.23	91	Horz		
209.1127	43.93	PK	2	-28.9	12	29.03	43.5	-14.47	91	Horz		
265.7154	49.33	PK	2.3	-28.7	12.3	35.23	46	-10.77	91	Horz		
463.8249	42.97	PK	3	-29.3	16.2	32.87	46	-13.13	91	Horz		
Range 2 30 - 1000MHz												
Test Freq	Meter Res	Detector	Chamber	ET10	Below	T130	Bilcd	dBuV/m	CFR 47 Pa	Margin	Height [c	Polarity
31.5508	39.29	PK	0.9	-29.5	19.6	30.29	40	-9.71	100	Vert		
59.6583	47.02	PK	1.2	-29.4	7.9	26.72	40	-13.28	100	Vert		
80.5935	53.01	PK	1.3	-29.4	7.6	32.51	40	-7.49	100	Vert		
158.1315	40.55	PK	1.7	-29.1	11.1	24.25	43.5	-19.25	100	Vert		
259.3185	41.91	PK	2.2	-28.7	12.1	27.51	46	-18.49	200	Vert		
463.8249	38.02	PK	3	-29.3	16.2	27.92	46	-18.08	200	Vert		