



**FCC 47 CFR Parts 1 & 2
Published RF Exposure KDB Procedures
IEEE Std 1528-2003 and IEEE Std 1528a-2005**

(Class II Permissive Change)

SAR EVALUATION REPORT

For
**Intel Centrino Advanced-N 6235
(Tested inside of Panasonic PC UT-MB5000)**

**Model: WL12A
FCC ID: ACJ9TGWL12A**

**Report Number: 33LE0005-HO-A
Issue Date: August 8, 2013**

Prepared for
**PANASONIC CORPORATION OF NORTH AMERICA
ONE PANASONIC WAY, 4B-8
SECAUCUS, NJ 07094**

Prepared by
**UL Japan, Inc.
Head Office EMC Lab.
4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN
TEL: +81 596 24 8999
FAX: +81 596 24 8124**



NVLAP LAB CODE: 200572-0

This laboratory is accredited by the NVLAP LAB CODE 200572-0, U.S.A. The tests reported herein have been performed in accordance with its terms of accreditation.

*As for the range of Accreditation in NVLAP, you may refer to the WEB address,
<http://www.ul.com/japan/jpn/pages/services/emc/about/mark1/index.jsp#nvlap>

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	8/8/2013	Initial Issue	T. Hatakeda

Table of Contents

1. Attestation of Test Results	5
1.1. Summary of Highest 1-g SAR Results.....	6
2. Test Methodology	7
3. Facilities and Accreditation	7
4. Calibration and Uncertainty	8
4.1. Measuring Instrument Calibration.....	8
4.2. Measurement Uncertainty	9
5. Measurement System Description and Setup.....	10
6. SAR Measurement Procedure	11
6.1. Normal SAR Measurement Procedure	11
6.2. Volume Scan Procedures.....	13
7. Device Under Test	14
7.1. Band and Air Interfaces	14
7.2. Simultaneous Transmission	15
8. Exposure Conditions.....	16
8.1. Test Configurations for the Main Antenna, SISO and MIMO Modes.....	16
8.2. Test Configurations for the Auxiliary Antenna, SISO and MIMO Modes	16
8.3. Additional Test Scenarios.....	16
9. Summary of Required Test Modes.....	17
9.1. Wi-Fi 2.4 GHz Band.....	17
9.2. Wi-Fi 5.2 GHz Band.....	18
9.3. Wi-Fi 5.3 GHz Band.....	19
9.4. Wi-Fi 5.5 GHz Band.....	20
9.5. Wi-Fi 5.8 GHz Band.....	21
10. RF Output Power Measurement.....	22
10.1. Output Power	23
11. Tissue Dielectric Properties.....	28
11.1. Composition of Ingredients for the Tissue Material Used in the SAR Tests	29
11.2. Tissue Dielectric Parameter Check Results.....	30
12. System Performance Check.....	31
12.1. System Performance Check Measurement Conditions	31
12.2. Reference SAR Values for System Performance Check	31
12.3. System Performance Check Results	32

13. SAR Test Results	33
13.1. Standalone SAR Test Exclusion Considerations	33
13.1.1. SAR exclusion calculations for Wi-Fi SISO (1 Tx) and Bluetooth for antenna <50mm from the user.....	33
13.1.2. SAR exclusion calculations for Wi-Fi SISO (1 Tx) and Bluetooth for antenna >50mm from the user.....	34
13.2. Estimated SAR for Simultaneous Transmission SAR Analysis.....	35
13.2.1. Estimated SAR for Wi-Fi 1 Tx (SISO).....	35
13.3. Wi-Fi 2.4 GHz Band	36
13.4. Wi-Fi 5.2 GHz Band	37
13.5. Wi-Fi 5.3 GHz Band	38
13.6. Wi-Fi 5.5 GHz Band	39
13.7. Wi-Fi 5.8 GHz Band	40
13.8. Summary of Highest SAR Values	41
13.9. SAR Measurement Variability and Uncertainty.....	42
13.10. SAR Plots (from Summary of Highest Measured SAR Values)	43
14. Simultaneous Transmission SAR Analysis.....	48
14.1. Sum of the SAR for Wi-Fi 2.4 GHz Band & Bluetooth.....	48
14.2. Sum of the SAR for Wi-Fi 5.2 GHz Band & Bluetooth.....	49
14.3. Sum of the SAR for Wi-Fi 5.3 GHz Band & Bluetooth.....	50
14.4. Sum of the SAR for Wi-Fi 5.5 GHz Bands & Bluetooth.....	51
14.5. Sum of the SAR for Wi-Fi 5.8 GHz Band & Bluetooth.....	52
14.6. Separation Distance Calculations and Figures	53
15. Appendixes.....	56
15.1. System Performance Check Plots	56
15.2. SAR Test Plots for Wi-Fi 2.4 GHz Band.....	56
15.3. SAR Test Plots for Wi-Fi 5 GHz Bands.....	56
15.4. SAR Test Plots for Repeated Test.....	56
15.5. Calibration Certificate for E-Field Probe EX3DV4 - SN 3825.....	56
15.6. Calibration Certificate for D2450V2 - SN 713	56
15.7. Calibration Certificate for D5GHzV2 - SN 1020	56
16. External Photos.....	57
17. Antenna Locations & Separation Distances.....	58
18. Setup Photos	62

1. Attestation of Test Results

Applicant	Panasonic Corporation of North America	
DUT description	Intel Centrino Advanced-N 6235 (Tested inside of Panasonic PC UT-MB5000)	
Model	WL12A	
Test device is	An identical prototype	
Device category	Portable	
Exposure category	General Population/Uncontrolled Exposure	
Date tested	July 9 to 18, 2013	
Applicable Standards		Test Results
FCC 47 CFR Parts 1& 2 Published RF exposure KDB procedures, and TCB workshop updates IEEE Std 1528-2003 and IEEE Std 1528a-2005		Pass
1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc. 2. The results in this report apply only to the sample tested. 3. This sample tested is in compliance with the limits of the above regulation. 4. The test results in this report are traceable to the national or international standards. 5. This test report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.		

Approved & Released For UL Japan, Inc By:

Tested By:



Takahiro Hatakeda
Leader of WiSE Japan,
UL Verification Service



Hisayoshi Sato
Engineer of WiSE Japan,
UL Verification Service

1.1. Summary of Highest 1-g SAR Results

Worst Case SAR data for each Frequency Band

RF Exposure Rule	Freq. Range	Highest Reported SAR	Limit
15.247 (Wi-Fi)	2412-2462 MHz	Body: 0.644 W/kg (Edge 1 tilt)	1.6 W/kg
15.407	5150-5250 MHz	Body: 0.893 W/kg (Edge 1)	
	5250-5350 MHz	Body: 1.14 W/kg (Edge 1)	
	5500-5700 MHz	Body: 1.269 W/kg (Edge 1)	
15.247	5725-5850 MHz	Body: 1.033 W/kg (Edge 1)	
Simultaneous Transmission Condition		1.557 W/kg (refer to Section 14.2.) (The highest across exposure conditions)	

LEGEND:

- Bottom side = Rear
- Edge 1 = Top Edge
- Edge 2 = Right Edge
- Edge 3 = Bottom Edge
- Edge 4 = Left Edge

2. Test Methodology

The tests documented in this report were performed in accordance with FCC 47 CFR Parts 1 & 2, IEEE STD 1528-2003, IEEE Std 1528a-2005, the following published RF exposure KDB procedures, and TCB workshop updates:

- o 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r01
- o 865664 D02 SAR Reporting v01r01
- o 447498 D01 General RF Exposure Guidance v05r01
- o 248227 D01 SAR Meas for 802 11abg v01r02
- o 616217 D04 SAR for laptop and tablets v02

3. Facilities and Accreditation

*Shielded room for SAR testings

The test sites and measurement facilities used to collect data are located at 4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN.

UL Japan, Inc. is accredited by NVLAP, Laboratory Code 200572-0

The full scope of accreditation can be viewed at

<http://www.ul.com/japan/jpn/pages/services/emc/about/mark1/index.jsp#nvlap>

4. Calibration and Uncertainty

4.1. Measuring Instrument Calibration

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations, and is traceable to recognized national standards.


Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due date		
				MM	DD	Year
Thermo-Hygrometer	Custom	CTH-201	4	12	31	2013
Power Meter	Anritsu	ML2495A	6K00003348	10	31	2013
Power sensor	Anritsu	MA2411B	11598	10	31	2013
Power Meter	Agilent	E4417A	GB41290639	4	30	2014
Power Sensor	Agilent	E9300B	US40010300	3	31	2014
Power sensor	Agilent	E9327A	US40440576	4	30	2014
Attenuator(30dB)	Agilent	8498A	US40010300	4	30	2014
Signal Generator	Agilent	N5181A	MY47421098	10	31	2013
Pre Amplifier	TSJ	TCBP0206	-	3	31	2014
Dual Directional Coupler	Hewlett Packard	772D	2839A0016	Pre Check		
Network Analyzer	Agilent/HP	E8358A	US41080381	9	30	2013
Dielectric probe kit	Agilent	85070D	702	8	31	2013
Type N Calibration Kit	Agilent	85032F	MY41495257	9	30	2013
Dosimetric E-Field Probe	Schmid&Partner Engineering AG	EX3DV4	3825	12	31	2013
Data Acquisition Electronics	Schmid&Partner Engineering AG	DAE4	1369	5	31	2014
Thermo-Hygrometer	CUSTOM	CTH-201	A08Q29	5	31	2014
Digital thermometer	HANNA	Checktemp-2	MOS-10	8	31	2013
Barometer	Sunoh	SBR121	837	3	31	2014

4.2. Measurement Uncertainty

Per KDB 865664, when no measured SAR values exceed 1.5 W/kg, measurement uncertainty analysis does not need to be provided in the test report.

5. Measurement System Description and Setup

The DASY5 system used for performing compliance tests consists of the following items:

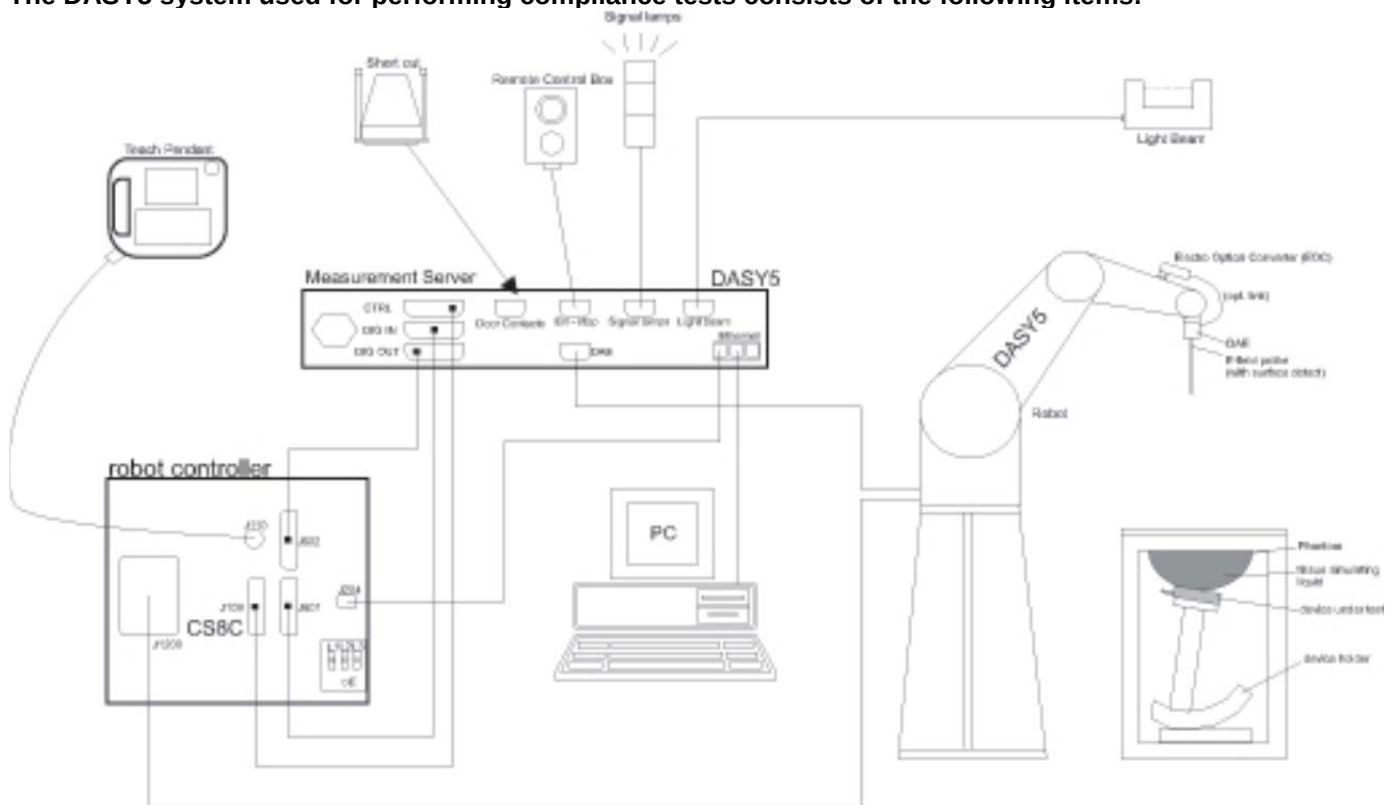

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

6. SAR Measurement Procedure

6.1. Normal SAR Measurement Procedure

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE Standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

Step 3: Zoom Scan

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01 (Draft)

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the area scan based <i>1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

Step 4: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

6.2. Volume Scan Procedures

Step 1: Repeat Step 1-4 in Section 6.1

Step 2: Volume Scan

Volume Scans are used to assess peak SAR and averaged SAR measurements in largely extended 3-dimensional volumes within any phantom. This measurement does not need any previous area scan. The grid can be anchored to a user specific point or to the current probe location.

Step 3: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

7. Device Under Test

Intel Centrino Advanced-N 6235 (Tested inside of Panasonic PC UT-MB5000) Model: WL12A	
Operating Configuration(s)	Tablet Mode
Exposure Condition(s)	The device is used in close proximity to the body. Specific details of the required test positions are provided in Section 8 "Exposure Conditions"
Accessory	None

7.1. Band and Air Interfaces

Tx Frequency Bands	802.11a/b/g/n: 2412 - 2462 MHz, b / g / HT20 / HT40 5150 - 5250 MHz, a / HT20 / HT40 5250 - 5350 MHz, a / HT20 / HT40 5500 - 5700 MHz, a / HT20 / HT40 5725 - 5850 MHz, a / HT20 / HT40 - Bluetooth: 2402 - 2480 MHz
Modulation	802.11a/b/g/n : BPSK, QPSK, CCK, 16-QAM and 64-QAM - Bluetooth 4.0+LE: GFSK, DQPSK, 8-DPSK
Duty Cycle	802.11b: 98.9% 802.11g: 97.7% 802.11a: 98.3% 802.11n: Not assessed Note: Given the close proximity of the measured duty factors to 100%, scaling to compensate for duty factor was found to have no impact on the measured SAR results and therefore not performed.

7.2. Simultaneous Transmission

Usage Scenario	Modes	Mode of Operation	BAND	802.11b/g/n WLAN Main	802.11b/g/n WLAN Aux	802.11a/n WLAN Main	802.11a/n WLAN Aux	BT 2.4 GHz
Body SAR	2.4GHz WLAN SISO + BT (WLAN 1 Tx)	802.11b/g/n WLAN Main	2.4 GHz	YES	No	No	No	YES
		802.11b/g/n WLAN Aux	2.4 GHz	No	YES	No	No	No
	5 GHz Bands WLAN SISO + BT (WLAN 1 Tx)	802.11a/n WLAN Main	5 GHz Bands	No	No	YES	No	YES
		802.11a/n WLAN Aux	5 GHz Bands	No	No	No	YES	No
	2.4GHz WLAN MIMO (WLAN 2 Tx)	802.11n WLAN Main	2.4 GHz	YES	YES	No	No	No
		802.11n WLAN Aux	2.4 GHz	YES	YES	No	No	No
	5 GHz Bands WLAN MIMO (WLAN 2 Tx)	802.11n WLAN Main	5 GHz Bands	No	No	YES	YES	No
		802.11n WLAN Aux	5 GHz Bands	No	No	YES	YES	No

Notes:

1. Bluetooth transmits using the WLAN Aux Antenna
2. Bluetooth can transmit simultaneously with the WLAN Main Antenna, in either of the WLAN bands.
3. Bluetooth cannot transmit simultaneously with the WLAN Aux Antenna, in either of the WLAN bands; this also precludes the transmission of Bluetooth when WLAN is in MIMO mode.
4. With a maximum output power of **5.6 mW** (7.5 dBm), Bluetooth qualifies for Standalone SAR test exclusion based on the formula for Standalone SAR test exclusion considerations outlined in KDB 447498 D01 . For the exact value that this formula yields, please refer to **Section 14 "Simultaneous Transmission SAR Analysis"** of this report.

8. Exposure Conditions

Refer to Section 18 “Antenna Dimensions and Separation Distances” for the specific details of the antenna-to-antenna and antenna-to-edge(s) distances.

8.1. Test Configurations for the Main Antenna, SISO and MIMO Modes

Test Configurations	Antenna-to-edge/surface	SAR Required	Note
Bottom side	6.50mm	Yes	
Front	-	No	SAR is not required as this is not a typical use scenario
Edge 1	7.50mm	Yes	
Edge 2	107.55mm	No	Refer to section 13 for SAR exclusion justification
Edge 3	334.00mm	No	Refer to section 13 for SAR exclusion justification
Edge 4	360.45mm	No	Refer to section 13 for SAR exclusion justification

8.2. Test Configurations for the Auxiliary Antenna, SISO and MIMO Modes


Test Configurations	Antenna-to-edge/surface	SAR Required	Note
Bottom side	6.50mm	Yes	
Front	-	No	SAR is not required as this is not a typical use scenario
Edge 1	7.50mm	Yes	
Edge 2	342.05mm	No	Refer to section 13 for SAR exclusion justification
Edge 3	334.00mm	No	Refer to section 13 for SAR exclusion justification
Edge 4	125.70mm	No	Refer to section 13 for SAR exclusion justification

LEGEND:

- Bottom side = Rear
- Edge 1 = Top Edge
- Edge 2 = Right Edge
- Edge 3 = Bottom Edge
- Edge 4 = Left Edge

8.3. Additional Test Scenarios

Due to the antenna location, a KDB enquiry was made to discuss additional test scenarios. Additional testing was performed with the DUT tilted against the flat phantom.

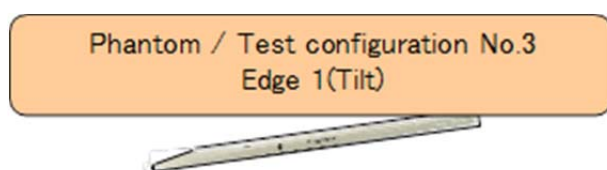

9. Summary of Required Test Modes

9.1. Wi-Fi 2.4 GHz Band

Mode	Number of Transmitters	Ch. #	Freq. (MHz)	Maximum Target Power from Original Approval (dBm)		Maximum Target Power for Host Approval (dBm)		SAR Test (Yes/No)	Surfaces/Edges requiring SAR evaluation
				Main	Aux	Main	Aux		
802.11b	1 Tx	1	2412	16.8		12.0		Yes	Edge 1, Bottom side, Edge 1 tilt
		6	2437	16.8		14.5			
		11	2462	16.8		11.5			
		1	2412		16.6		12.0	Yes	Edge 1, Bottom side, Edge 1 tilt
		6	2437		15.0		15.0		
		11	2462		16.0		11.5		
802.11g	1 Tx	1	2412	14.1		12.0		Yes	Edge 1, Bottom side, Edge 1 tilt
		6	2437	16.6		14.5			
		11	2462	14.0		11.5			
		1	2412		13.9		12.0	Yes	Edge 1, Bottom side, Edge 1 tilt
		6	2437		16.7		15.5		
		11	2462		13.5		11.5		
802.11n HT20	1 Tx	1	2412	13.1		12.0		No	N/A
		6	2437	16.5		14.5			
		11	2462	12.5		11.5			
		1	2412		12.5		11.5	No	N/A
		6	2437		16.6		15.0		
		11	2462		12.4		11.5		
802.11n HT20	2 Tx	1	2412	11.6	11.6	11.5	11.5	Yes	Covered by testing in 802.11b/g
		6	2437	13.3	13.0	12.5	12.5		
		11	2462	11.1	10.4	10.5	10.4		
802.11n HT40	1 Tx	3	2422	10.6		10.6		No	N/A
		6	2437	13.6		13.6			
		9	2450	10.1		10.1			
		3	2422		9.2		9.2	No	N/A
		6	2437		12.7		12.7		
		9	2450		10.1		10.1		
802.11n HT40	2 Tx	3	2422	7.3	7.0	7.3	7.0	No	N/A
		6	2437	12.3	12.3	12.3	12.3		
		9	2450	6.5	6.7	6.5	6.7		

Note(s):

- Per KDB 248227, SAR is not required for 802.HT20/HT40 channels when the maximum average output power is less than 1/4 dB higher than that measured on the corresponding 802.11a/b channels.

9.2. Wi-Fi 5.2 GHz Band

Mode	Number of Transmitters	Ch. #	Freq. (MHz)	Maximum Target Power from Original Approval (dBm)		Maximum Target Power for Host Approval (dBm)		SAR Test (Yes/No)	Surfaces/Edges requiring SAR evaluation
				Main	Aux	Main	Aux		
802.11a	1 Tx	36	5180	16.2		13.0		Yes	Edge 1, Bottom side, Edge 1 tilt
		40	5200	16.2		15.0			
		44	5220			15.0			
		48	5240	15.9		15.0			
		36	5180		15.9		13.0	Yes	Edge 1, Bottom side, Edge 1 tilt
		40	5200		15.8		15.0		
		44	5220				15.0		
		48	5240		15.7		15.0		
802.11n HT20	1 Tx	36	5180	15.9		13.0		No	N/A
		40	5200	16.5		15.0			
		44	5220			15.0			
		48	5240	16.4		15.0			
		36	5180		16.0		14.0	No	N/A
		40	5200		16.0		15.0		
		44	5220				15.0		
		48	5240		15.9		15.0		
802.11n HT20	2 Tx	36	5180	13.3	13.3	12.0	12.0	Yes	Coverd by testing in 802.11a
		40	5200	12.2	13.2	12.0	12.0		
		48	5240	13.0	12.9	12.0	12.0		
802.11n HT40	1 Tx	38	5190	12.8		12.8		No	N/A
		46	5230	16.4		14.5		No	N/A
		38	5190		12.7		12.7		
		46	5230		15.8		14.5		
802.11n HT40	2 Tx	38	5190	10.0	10.8	10.0	10.8	No	N/A
		46	5230	13.4	13.3	12.0	12.0		

Note(s):

- Per KDB 248227, SAR is not required for 802.HT20/HT40 channels when the maximum average output power is less than 1/4 dB higher than that measured on the corresponding 802.11a/b channels.

9.3. Wi-Fi 5.3 GHz Band

Mode	Number of Transmitters	Ch. #	Freq. (MHz)	Maximum Target Power from Original Approval (dBm)		Maximum Target Power for Host Approval (dBm)		SAR Test (Yes/No)	Surfaces/Edges requiring SAR evaluation
				Main	Aux	Main	Aux		
802.11a	1 Tx	52	5260	15.9		15.0		Yes	Edge 1, Bottom side, Edge 1 tilt
		56	5280			15.0			
		60	5300	16.3		15.0			
		64	5320	16.4		14.5			
		52	5260		15.3		15.0	Yes	Edge 1, Bottom side, Edge 1 tilt
		56	5280				15.0		
		60	5300		15.4		15.0		
		64	5320		15.9		14.5		
802.11n HT20	1 Tx	52	5260	16.1		15.0		No	N/A
		60	5300	16.6		15.0			
		64	5320	16.6		14.5			
		52	5260		15.4		15.0	No	N/A
		60	5300		15.3		15.0		
		64	5320		15.7		14.5		
802.11n HT20	2 Tx	52	5260	12.7	12.5	12.0	12.0	Yes	Covered by testing in 802.11a
		60	5300	13.2	12.6	12.0	12.0		
		64	5320	12.9	13.1	12.0	12.0		
802.11n HT40	1 Tx	54	5270	16.0		15.0		No	N/A
		62	5310	11.5		11.5		No	N/A
		54	5270		15.2		15.0		
		62	5310		12.4		12.4		
802.11n HT40	2 Tx	54	5270	12.6	12.5	12.0	12.0	No	N/A
		62	5310	12.4	12.3	12.4	12.3		

Note(s):

- Per KDB 248227, SAR is not required for 802.HT20/HT40 channels when the maximum average output power is less than 1/4 dB higher than that measured on the corresponding 802.11a/b channels.

9.4. Wi-Fi 5.5 GHz Band

Mode	Number of Transmitters	Ch. #	Freq. (MHz)	Maximum Target Power from Original Approval (dBm)		Maximum Target Power for Host Approval (dBm)		SAR Test (Yes/No)	Surfaces/Edges requiring SAR evaluation
				Main	Aux	Main	Aux		
802.11a	1 Tx	100	5500	16.4		15.0		Yes	Edge 1, Bottom side, Edge 1 tilt
		104	5520			15.0			
		108	5540			15.0			
		112	5560			15.0			
		116	5580	16.5		15.0			
		120	5600			15.0			
		124	5620			15.0			
		128	5640			15.0			
		132	5660			15.0			
		136	5680			15.0			
		140	5700	16.5		15.0			
		100	5500		15.6		15.0	Yes	Edge 1, Bottom side, Edge 1 tilt
		104	5520				15.0		
		108	5540				15.0		
		112	5560				15.0		
		116	5580		15.7		15.0		
		120	5600				15.0		
		124	5620				15.0		
		128	5640				15.0		
		132	5660				15.0		
		136	5680				15.0		
		140	5700		15.5		15.0		
802.11n HT20	1 Tx	100	5500	16.4		15.0		No	N/A
		116	5580	16.4		15.0			
		140	5700	16.3		15.0			
		100	5500		15.6		15.0	No	N/A
		116	5580		15.7		15.0		
802.11n HT20	2 Tx	140	5700		15.5		15.0	Yes	Covered by testing in 802.11a
		100	5500	12.7	13.2	12.5	12.5		
		120	5600	12.7	13.2	12.5	12.5		
802.11n HT40	1 Tx	140	5700	12.4	12.4	12.4	12.4	No	N/A
		102	5510	15.5		13.5			
		110	5550	16.5		15.0			
		134	5670	16.4		15.0		No	N/A
		102	5510		14.8		13.5		
802.11n HT40	2 Tx	110	5550		15.8		15.0	No	N/A
		134	5670		15.6		15.0		
		102	5510	13.1	13.0	11.5	11.5		
802.11n HT40	2 Tx	110	5550	13.1	13.2	12.5	12.5	No	N/A
		134	5670	12.6	12.8	12.5	12.5		

Note(s):

- Per KDB 248227, SAR is not required for 802.HT20/HT40 channels when the maximum average output power is less than 1/4 dB higher than that measured on the corresponding 802.11a/b channels.

9.5. Wi-Fi 5.8 GHz Band

Mode	Number of Transmitters	Ch. #	Freq. (MHz)	Maximum Target Power from Original Approval (dBm)		Maximum Target Power for Host Approval (dBm)		SAR Test (Yes/No)	Surfaces/Edges requiring SAR evaluation
				Main	Aux	Main	Aux		
802.11a	1 Tx	149	5745	16.5		15.0		Yes	Edge 1, Bottom side, Edge 1 tilt
		153	5765			15.0			
		157	5785	16.5		15.0			
		161	5805			15.0			
		165	5825	16.5		15.0			
		149	5745		16.7		15.0	Yes	Edge 1, Bottom side, Edge 1 tilt
		153	5765				15.0		
		157	5785		16.7		15.0		
		161	5805				15.0		
		165	5825		16.6		14.5		
802.11n HT20	1 Tx	149	5745	16.6		15.0		No	N/A
		157	5785	16.6		15.0			
		165	5825	16.5		15.0			
		149	5745		16.7		15.0	No	N/A
		157	5785		16.6		15.0		
		165	5825		16.6		15.0		
802.11n HT20	2 Tx	149	5745	13.6	13.5	12.0	12.0	Yes	Covered by testing in 802.11a
		157	5785	13.5	13.4	12.0	12.0		
		165	5825	13.3	13.7	12.0	12.0		
802.11n HT40	1 Tx	151	5755	16.5		15.0		No	N/A
		159	5795	16.5		15.0			
		151	5755		16.6		15.0	No	N/A
		159	5795		16.6		15.0		
802.11n HT40	2 Tx	151	5755	13.5	13.5	12.0	12.0	No	N/A
		159	5795	13.5	13.5	12.0	12.0		

Note(s):

- Per KDB 248227, SAR is not required for 802.HT20/HT40 channels when the maximum average output power is less than 1/4 dB higher than that measured on the corresponding 802.11a/b channels.

10. RF Output Power Measurement

Required Test Channels per KDB 248227 D01

Mode		Band	GHz	Channel	"Default Test Channels"	
					802.11b	802.11g
802.11b/g		2.4 GHz	2.412	1 [#]	√	▽
			2.437	6	√	▽
			2.462	11 [#]	√	▽
Mode		Band	GHz	Channel	"Default Test Channels"	
					802.11a	
802.11a	UNII (15.407)	5.2 GHz	5.180	36	√	
			5.200	40		*
			2.220	44		*
			5.240	48	√	
		5.3 GHz	5.260	52	√	
			5.280	56		*
			5.300	60		*
			5.320	64	√	
		5.5 GHz	5.500	100		*
			5.520	104	√	
			5.540	108		*
			5.560	112		*
			5.580	116	√	
			5.600	120		*
			5.620	124	√	
			5.640	128		*
			5.660	132		*
			5.680	136	√	
			5.700	140		*
	DTS (15.247)	5.8 GHz	5.745	149	√	
			5.765	153		*
			5.785	157	√	
			5.805	161		*
			5.825	165	√	

√ = "default test channels"

* = possible 802.11a channels with maximum average output > the "default test channels"

▽ = possible 802.11g channels with maximum average output 1/4 dB ≥ the "default test channels"

[#] = when output power is reduced for channel 1 and /or 11 to meet restricted band requirements the highest output channels closest to each of these channels should be tested.

10.1. Output Power

The target power is the absolute maximum.

Mode	Antenna	BAND	Channel	Frequency (MHz)	Target Power (dBm)	Measured Power (dBm)
802.11b	Main	2400MHz	1	2412	12.0	11.88
			2	2417	14.5	14.47
			3	2422	14.5	14.49
			4	2427	14.5	14.48
			5	2432	14.5	14.49
			6	2437	14.5	14.40
			7	2442	14.5	14.45
			8	2447	14.5	14.43
			9	2452	14.5	14.40
			10	2457	14.5	14.36
			11	2462	11.5	11.28
802.11g		2400MHz	1	2412	12.0	11.84
			2	2417	14.5	14.33
			3	2422	14.5	14.32
			4	2427	14.5	14.34
			5	2432	14.5	14.35
			6	2437	14.5	14.24
			7	2442	14.5	14.29
			8	2447	14.5	14.28
			9	2452	14.5	14.25
			10	2457	14.5	14.22
			11	2462	11.5	11.26
802.11a		5200MHz	36	5180	13.0	12.80
			40	5200	15.0	14.93
			44	5220	15.0	14.86
			48	5240	15.0	15.00
		5300MHz	52	5260	15.0	14.87
			56	5280	15.0	14.63
			60	5300	15.0	14.95
			64	5320	14.5	14.41
		5500MHz	100	5500	15.0	14.97
			104	5520	15.0	14.84
			108	5540	15.0	14.79
			112	5560	15.0	14.75
			116	5580	15.0	14.74
			120	5600	15.0	14.68
			124	5620	15.0	14.67
			128	5640	15.0	14.64
			132	5660	15.0	14.96
			136	5680	15.0	14.95
		140	5700	15.0	14.91	
		5800MHz	149	5745	15.0	14.98
			153	5765	15.0	14.90
			157	5785	15.0	14.83
			161	5805	15.0	15.00
			165	5825	15.0	14.98

Output Power (continued)

Mode	Antenna	Band	Channel	Frequency (MHz)	Target Power (dBm)	Measured Power (dBm)
802.11b	Aux	2400MHz	1	2412	12.0	11.83
			2	2417	15.0	14.57
			3	2422	15.0	14.57
			4	2427	15.0	14.56
			5	2432	15.0	14.53
			6	2437	15.0	14.64
			7	2442	15.0	14.90
			8	2447	15.0	14.88
			9	2452	15.0	14.87
			10	2457	15.0	14.82
			11	2462	11.5	11.03
802.11g		2400MHz	1	2412	12.0	11.74
			2	2417	15.5	15.45
			3	2422	15.5	15.42
			4	2427	15.5	15.43
			5	2432	15.5	15.41
			6	2437	15.5	15.49
			7	2442	15.5	15.35
			8	2447	15.5	15.33
			9	2452	15.5	15.33
			10	2457	15.5	15.3
			11	2462	11.5	11.43
802.11a		5200MHz	36	5180	13.0	12.68
			40	5200	15.0	15.00
			44	5220	15.0	14.93
			48	5240	15.0	14.86
		5300MHz	52	5260	15.0	14.96
			56	5280	15.0	14.88
			60	5300	15.0	14.93
			64	5320	14.5	14.23
		5500MHz	100	5500	15.0	14.75
			104	5520	15.0	14.97
			108	5540	15.0	14.94
			112	5560	15.0	14.74
			116	5580	15.0	14.92
			120	5600	15.0	14.92
			124	5620	15.0	14.95
			128	5640	15.0	14.97
			132	5660	15.0	14.96
			136	5680	15.0	14.96
		140	5700	15.0	14.95	
		5800MHz	149	5745	15.0	14.79
			153	5765	15.0	14.69
			157	5785	15.0	14.66
			161	5805	14.5	14.31
			165	5825	14.5	14.31

Output Power (continued)

Mode	Antenna	Band	Channel	Frequency (MHz)	Target Power (dBm)	Measured Power (dBm)
802.11n 20MHz 1Tx	Main	2400MHz	1	2412	12.0	11.77
			6	2437	14.5	14.12
			11	1462	11.5	11.14
	Aux		1	2412	11.5	11.35
			6	2437	15.0	14.89
			11	1462	11.5	11.2
802.11n 20MHz 2Tx	Main	2400MHz	1	2412	11.5	11.42
			6	2437	12.5	12.14
			11	1462	10.5	10.31
	Aux		1	2412	11.5	11.14
			6	2437	12.5	12.38
			11	1462	10.4	10.20
802.11n 40MHz 1Tx	Main	2400MHz	3	2422	10.6	10.38
			6	2437	13.6	13.51
			9	2450	10.1	9.88
	Aux		3	2422	9.2	8.93
			6	2437	12.7	12.39
			9	2450	10.1	9.73
802.11n 40MHz 2Tx	Main	2400MHz	3	2422	7.3	6.93
			6	2437	12.3	11.97
			9	2450	6.5	6.44
	Aux		3	2422	7.0	6.88
			6	2437	12.3	12.02
			9	2450	6.7	6.27
802.11n 20MHz 1Tx	Main	5200MHz	36	5180	13.0	12.65
			40	5200	15.0	14.63
			48	5240	15.0	14.95
		5300MHz	52	5260	15.0	14.86
			60	5300	15.0	14.69
			64	5320	14.5	14.12
		5500MHz	100	5500	15.0	14.83
			116	5580	15.0	14.98
			140	5700	15.0	14.77
		5800MHz	149	5745	15.0	14.67
			157	5785	15.0	14.92
			165	5825	15.0	14.78
	Aux	5200MHz	36	5180	14.0	13.98
			40	5200	15.0	14.97
			48	5240	15.0	14.85
		5300MHz	52	5260	15.0	14.76
			60	5300	15.0	14.88
			64	5320	14.5	14.11
		5500MHz	100	5500	15.0	14.7
			116	5580	15.0	14.91
			140	5700	15.0	14.67
		5800MHz	149	5745	15.0	14.95
			157	5785	15.0	14.85
			165	5825	15.0	14.73

Output Power (continued)

Mode	Antenna	Band	Channel	Frequency (MHz)	Target Power (dBm)	Measured Power (dBm)
802.11n 20MHz 2Tx	Main	5200MHz	36	5180	12.0	11.70
			40	5200	12.0	11.58
			48	5240	12.0	11.94
		5300MHz	52	5260	12.0	11.77
			60	5300	12.0	11.99
			64	5320	12.0	11.87
		5500MHz	100	5500	12.5	12.15
			116	5580	12.5	12.07
			140	5700	12.4	12.18
		5800MHz	149	5745	12.0	11.82
			157	5785	12.0	12.00
			165	5825	12.0	11.85
	Aux	5200MHz	36	5180	12.0	11.81
			40	5200	12.0	11.71
			48	5240	12.0	11.87
		5300MHz	52	5260	12.0	11.79
			60	5300	12.0	12.00
			64	5320	12.0	11.87
		5500MHz	100	5500	12.5	12.47
			116	5580	12.5	12.41
			140	5700	12.4	12.35
		5800MHz	149	5745	12.0	11.77
			157	5785	12.0	11.67
			165	5825	12.0	11.55

Output Power (continued)

Mode	Antenna	Band	Channel	Frequency (MHz)	Target Power (dBm)	Measured Power (dBm)
802.11n 40MHz 1Tx	Main	5200MHz	38	5180	12.8	12.52
			46	5230	14.5	14.22
		5300MHz	54	5270	15.0	14.83
			62	5310	11.5	11.23
		5500MHz	102	5510	13.5	13.23
			110	5550	15.0	14.93
			134	5670	15.0	14.70
		5800MHz	151	5755	15.0	14.94
			159	5795	15.0	14.78
	Aux	5200MHz	38	5180	12.7	12.57
			46	5230	14.5	14.42
		5300MHz	54	5270	15.0	14.75
			62	5310	12.4	12.09
		5500MHz	102	5510	13.5	13.12
			110	5550	15.0	14.92
			134	5670	15.0	14.63
		5800MHz	151	5755	15.0	14.90
			159	5795	15.0	14.75
802.11n 40MHz 2Tx	Main	5200MHz	38	5180	10.0	9.75
			46	5230	12.0	11.87
		5300MHz	54	5270	12.0	11.70
			62	5310	12.4	12.00
		5500MHz	102	5510	11.5	11.11
			110	5550	12.5	12.28
			134	5670	12.5	12.17
		5800MHz	151	5755	12.0	11.96
			159	5795	12.0	11.89
	Aux	5200MHz	38	5180	10.8	10.56
			46	5230	12.0	11.90
		5300MHz	54	5270	12.0	11.73
			62	5310	12.3	11.94
		5500MHz	102	5510	11.5	11.33
			110	5550	12.5	12.15
			134	5670	12.5	12.22
		5800MHz	151	5755	12.0	11.67
			159	5795	12.0	11.60

11. Tissue Dielectric Properties

IEEE Std 1528-2003 Table 2

Target Frequency (MHz)	Head	
	ϵ_r	σ (S/m)
300	45.3	0.87
450	43.5	0.87
835	41.5	0.90
900	41.5	0.97
1450	40.5	1.20
1800 – 2000	40.0	1.40
2450	39.2	1.80
2600	39.0	1.96
3000	38.5	2.40

KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r01

Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5000	36.2	4.45	49.3	5.07
5100	36.1	4.55	49.1	5.18
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5400	35.8	4.86	48.7	5.53
5500	35.6	4.96	48.6	5.65
5600	35.5	5.07	48.5	5.77
5700	35.4	5.17	48.3	5.88
5800	35.3	5.27	48.2	6.00

11.1. Composition of Ingredients for the Tissue Material Used in the SAR Tests

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Ingredients (% by weight)	Frequency (MHz)									
	450		835		915		1900		2450	
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body
Water	38.56	51.16	41.45	52.4	41.05	56.0	54.9	40.4	62.7	73.2
Salt (NaCl)	3.95	1.49	1.45	1.4	1.35	0.76	0.18	0.5	0.5	0.04
Sugar	56.32	46.78	56.0	45.0	56.5	41.76	0.0	58.0	0.0	0.0
HEC	0.98	0.52	1.0	1.0	1.0	1.21	0.0	1.0	0.0	0.0
Bactericide	0.19	0.05	0.1	0.1	0.1	0.27	0.0	0.1	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	36.8	0.0
DGBE	0.0	0.0	0.0	0.0	0.0	0.0	44.92	0.0	0.0	26.7
Dielectric Constant	43.42	58.0	42.54	56.1	42.0	56.8	39.9	54.0	39.8	52.5
Conductivity (S/m)	0.85	0.83	0.91	0.95	1.0	1.07	1.42	1.45	1.88	1.78

Salt: 99+% Pure Sodium Chloride

Sugar: 98+% Pure Sucrose

Water: De-ionized, 16 MΩ+ resistivity

HEC: Hydroxyethyl Cellulose

DGBE: 99+% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]

Triton X-100 (ultra pure): Polyethylene glycol mono [4-(1,1, 3, 3-tetramethylbutyl)phenyl]ether

Simulating Liquids for 5 GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	78
Mineral oil	11
Emulsifiers	9
Additives and Salt	2

11.2. Tissue Dielectric Parameter Check Results

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

Date	Freq. (MHz)	Liquid Parameters			Measured	Target	Delta (%)	Limit $\pm$ (%)
2013/7/9	Body 5500	e'	48.3308	Relative Permittivity (ϵ_r):	48.33	48.60	-0.55	10
		e"	18.7616	Conductivity (σ):	5.74	5.65	1.55	5
	Body 5600	e'	48.1721	Relative Permittivity (ϵ_r):	48.17	48.50	-0.68	10
		e"	18.8799	Conductivity (σ):	5.88	5.77	1.89	5
	Body 5700	e'	48.0244	Relative Permittivity (ϵ_r):	48.02	48.30	-0.57	10
		e"	18.9917	Conductivity (σ):	6.02	5.88	2.37	5
2013/7/10	Body 5200	e'	48.8264	Relative Permittivity (ϵ_r):	48.83	49.00	-0.35	10
		e"	18.4847	Conductivity (σ):	5.34	5.30	0.84	5
	Body 5300	e'	48.6518	Relative Permittivity (ϵ_r):	48.65	48.90	-0.51	10
		e"	18.5761	Conductivity (σ):	5.47	5.42	1.00	5
	Body 5700	e'	48.0544	Relative Permittivity (ϵ_r):	48.05	48.30	-0.51	10
		e"	18.9917	Conductivity (σ):	6.02	5.88	2.37	5
	Body 5800	e'	47.8732	Relative Permittivity (ϵ_r):	47.87	48.20	-0.68	10
		e"	19.0977	Conductivity (σ):	6.16	6.00	2.65	5
2013/7/14	Body 5200	e'	47.2687	Relative Permittivity (ϵ_r):	47.27	49.00	-3.53	10
		e"	18.9484	Conductivity (σ):	5.48	5.30	3.37	5
	Body 5300	e'	47.0940	Relative Permittivity (ϵ_r):	47.09	48.90	-3.69	10
		e"	19.0736	Conductivity (σ):	5.62	5.42	3.71	5
2013/7/15	Body 5200	e'	48.3328	Relative Permittivity (ϵ_r):	48.33	49.00	-1.36	10
		e"	18.8157	Conductivity (σ):	5.44	5.30	2.65	5
	Body 5300	e'	48.1897	Relative Permittivity (ϵ_r):	48.19	48.90	-1.45	10
		e"	18.9433	Conductivity (σ):	5.58	5.42	3.00	5
2013/7/16	Body 5500	e'	46.4669	Relative Permittivity (ϵ_r):	46.47	48.60	-4.39	10
		e"	18.8634	Conductivity (σ):	5.77	5.65	2.10	5
	Body 5600	e'	46.2525	Relative Permittivity (ϵ_r):	46.25	48.50	-4.63	10
		e"	19.0158	Conductivity (σ):	5.92	5.77	2.62	5
2013/7/17	Body 5700	e'	47.7164	Relative Permittivity (ϵ_r):	47.72	48.30	-1.21	10
		e"	18.7937	Conductivity (σ):	5.96	5.88	1.30	5
	Body 5800	e'	47.5393	Relative Permittivity (ϵ_r):	47.54	48.20	-1.37	10
		e"	18.7544	Conductivity (σ):	6.05	6.00	0.80	5
2013/7/18	Body 2450	e'	51.5372	Relative Permittivity (ϵ_r):	51.54	52.70	-2.21	5
		e"	14.4343	Conductivity (σ):	1.97	1.95	0.84	5

12. System Performance Check

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are remeasured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

12.1. System Performance Check Measurement Conditions

- The measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness: 2.0 ± 0.2 mm (bottom plate) filled with Body or Head simulating liquid of the following parameters.
- The depth of tissue-equivalent liquid in a phantom must be ≥ 15.0 cm $\pm$ 0.5 cm for SAR measurements.
- The DASY system with an E-Field Probe was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10 mm (above 3GHz), 12 mm (1GHz to 3GHz) and 15 mm (below 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 12 mm (1GHz to 3GHz) and 15 mm (below 1GHz) was aligned with the dipole. For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.
- Special 7x7x7 (below 3 GHz) and/or 8x8x7 (above 3 GHz) fine cube was chosen for the cube.
- Distance between probe sensors and phantom surface was set to 3 mm. For 5 GHz band - Distance between probe sensors and phantom surface was set to 2.5 mm
- The dipole input power (forward power) was 100 mW(For 5GHz band) or 250 mW(For 2.4GHz band).
- The results are normalized to 1 W input power.

12.2. Reference SAR Values for System Performance Check

The reference SAR values can be obtained from the calibration certificate of system validation dipoles

System Dipole	Serial No.	Cal. Date	Freq. (MHz)	Target SAR Values (mW/g)		
				1g/10g	Head	Body
D2450V2	713	9/6/2010	2450	1g	51.6	52.0
				10g	23.9	24.2
D5GHV2	1020	1/11/2013	5.2GHz	1g	75.2	75.0
				10g	21.4	21.0
			5.5GHz	1g	80.8	80.7
				10g	22.9	22.4
			5.8GHz	1g	75.6	75.5
				10g	21.4	20.9

Note(s):

1. According to the KDB450824D02, calibration of D2450V2 is expanded 3-year interval.

12.3. System Performance Check Results

The 1-g and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within 10% of the manufacturer calibrated dipole SAR target.

Date Tested	System Dipole		T.S. Liquid	Measured Results		Target (Ref. Value)	Delta ±10 %
	Type	Serial #		Zoom Scan	Normalize to 1 W		
7/9/2013	D5GHzV2 5.5 GHz	1020	Body	1g	8.77	87.7	8.67
				10g	2.46	24.6	9.82
7/10/2013	D5GHzV2 5.2 GHz	1020	Body	1g	8.16	81.6	75.0
				10g	2.28	22.8	21.0
7/10/2013	D5GHzV2 5.8 GHz	1020	Body	1g	8.02	80.2	75.5
				10g	2.21	22.1	20.9
7/14/2013	D5GHzV2 5.2 GHz	1020	Body	1g	8.16	81.6	75.0
				10g	2.28	22.8	21.0
7/15/2013	D5GHzV2 5.2 GHz	1020	Body	1g	7.22	72.2	75.0
				10g	2.02	20.2	21.0
7/16/2013	D5GHzV2 5.5 GHz	1020	Body	1g	7.66	76.6	80.7
				10g	2.12	21.2	22.4
7/17/2013	D5GHzV2 5.8 GHz	1020	Body	1g	7.18	71.8	75.5
				10g	1.99	19.9	20.9
7/18/2013	D2450V2	706	Body	1g	14.20	56.8	52.0
				10g	6.64	26.6	24.2

13. SAR Test Results

13.1. Standalone SAR Test Exclusion Considerations

Standalone SAR test exclusion was based upon the following criteria:

1. According to KDB 447498 § 4.1.5 if the antenna is at close proximity to user then the outer surface of the DUT should be treated as the radiating surface. The test separation distance is then determined by the smallest distance between the outer surface of the device and the user. For the purposes of this report close proximity has been defined as closer than 50 mm. For antennas <50 mm from the bottom or edge the separation distance used for the SAR exclusion calculations is 0mm.
2. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.
3. If the antenna to DUT adjacent edge or bottom separation distance is >50mm the actual antenna to user separation distance is used to determine SAR exclusion and estimated SAR value
4. As the SISO (1 Tx) mode powers are higher than the MIMO (2Tx) powers separate testing of the MIMO (2 Tx) SAR was considered unnecessary. The reported stand-alone values for 1Tx mode are used to cover simultaneous conditions.

13.1.1. SAR exclusion calculations for Wi-Fi SISO (1 Tx) and Bluetooth for antenna <50mm from the user

Antenna	Tx	Frequency (MHz)	Output power		Separation distances (mm)							Calculated Threshold Value						
			dBm	mW	Bottom	Edge 1	Edge 2	Edge 3	Edge 4	Edge Tilt 1	Front	Bottom	Edge 1	Edge 2	Edge 3	Edge 4	Edge Tilt 1	Front
WLAN Main	WiFi	2412	14.50	28	0	0	107.5	334	360.45	0		8.7	8.7	> 50 mm	> 50 mm	> 50 mm	8.7	N/A
WLAN Main	WiFi	5180	15.00	32	0	0	107.5	334	360.45	0		14.6	14.6	> 50 mm	> 50 mm	> 50 mm	14.6	N/A
WLAN Main	WiFi	5260	15.00	32	0	0	107.5	334	360.45	0		14.7	14.7	> 50 mm	> 50 mm	> 50 mm	14.7	N/A
WLAN Main	WiFi	5500	15.00	32	0	0	107.5	334	360.45	0		15.0	15.0	> 50 mm	> 50 mm	> 50 mm	15.0	N/A
WLAN Main	WiFi	5745	15.00	32	0	0	107.5	334	360.45	0		15.3	15.3	> 50 mm	> 50 mm	> 50 mm	15.3	N/A
Bluetooth / WiFi - Aux Antenna																		
WLAN Aux	WiFi	2412	15.50	35	0	0	342.3	334	125.7	0		10.9	10.9	> 50 mm	> 50 mm	> 50 mm	10.9	N/A
WLAN Aux	WiFi	5180	15.00	32	0	0	342.3	334	125.7	0		14.6	14.6	> 50 mm	> 50 mm	> 50 mm	14.6	N/A
WLAN Aux	WiFi	5260	15.00	32	0	0	342.3	334	125.7	0		14.7	14.7	> 50 mm	> 50 mm	> 50 mm	14.7	N/A
WLAN Aux	WiFi	5500	15.00	32	0	0	342.3	334	125.7	0		15.0	15.0	> 50 mm	> 50 mm	> 50 mm	15.0	N/A
WLAN Aux	WiFi	5745	15.00	32	0	0	342.3	334	125.7	0		15.3	15.3	> 50 mm	> 50 mm	> 50 mm	15.3	N/A
WLAN Aux	Bluetooth	2402	7.50	6	0	0	342.3	334	125.7	0		1.9	1.9	> 50 mm	> 50 mm	> 50 mm	1.9	N/A

Note(s):

1. According to KDB 447498, if the calculated threshold value is >3 then SAR testing is required.
2. SAR exclusion was not assessed for 2 Tx (MIMO) as the higher 1 Tx (SISO) SAR values were used for simultaneous transmission analysis.

13.1.2. SAR exclusion calculations for Wi-Fi SISO (1 Tx) and Bluetooth for antenna >50mm from the user

Antenna	Tx	Frequency (MHz)	Output power		Separation distances (mm)							Calculated Threshold Value						
			dBm	mW	Bottom	Edge 1	Edge 2	Edge 3	Edge 4	Edge 1 Tilt	Front	Bottom	Edge 1	Edge 2	Edge 3	Edge 4	Edge 1 Tilt	Front
WiFi – Main Antenna																		
WLAN Main	WiFi	2462	14.50	28	0	0	107.5	334	360.45	0		< 50 mm	< 50 mm	670.6	2935.6	3200.1	< 50 mm	N/A
WLAN Main	WiFi	5240	15.00	32	0	0	107.5	334	360.45	0		< 50 mm	< 50 mm	640.5	2905.5	3170.0	< 50 mm	N/A
WLAN Main	WiFi	5320	15.00	32	0	0	107.5	334	360.45	0		< 50 mm	< 50 mm	640.0	2905.0	3169.5	< 50 mm	N/A
WLAN Main	WiFi	5700	15.00	32	0	0	107.5	334	360.45	0		< 50 mm	< 50 mm	637.8	2902.8	3167.3	< 50 mm	N/A
WLAN Main	WiFi	5825	15.00	32	0	0	107.5	334	360.45	0		< 50 mm	< 50 mm	637.2	2902.2	3166.7	< 50 mm	N/A
Bluetooth / WiFi – Aux Antenna																		
WLAN Aux	WiFi	2462	15.00	32	0	0	342.3	334	125.7	0		< 50 mm	< 50 mm	3018.6	2935.6	852.6	< 50 mm	N/A
WLAN Aux	WiFi	5240	15.00	32	0	0	342.3	334	125.7	0		< 50 mm	< 50 mm	2988.5	2905.5	822.5	< 50 mm	N/A
WLAN Aux	WiFi	5320	15.00	32	0	0	342.3	334	125.7	0		< 50 mm	< 50 mm	2988.0	2905.0	822.0	< 50 mm	N/A
WLAN Aux	WiFi	5700	15.00	32	0	0	342.3	334	125.7	0		< 50 mm	< 50 mm	2985.8	2902.8	819.8	< 50 mm	N/A
WLAN Aux	WiFi	5825	15.00	32	0	0	342.3	334	125.7	0		< 50 mm	< 50 mm	2985.2	2902.2	819.2	< 50 mm	N/A
WLAN Aux	Bluetooth	2480	7.50	6	0	0	342.3	334	125.7	0		< 50 mm	< 50 mm	3018.3	2935.3	852.3	< 50 mm	N/A

Note(s):

- According to KDB 447498, if the calculated Power threshold is less than the output power then SAR testing is required.
- SAR exclusion was not assessed for 2 Tx (MIMO) as the higher 1 Tx (SISO) SAR values were used for simultaneous transmission analysis

Conclusion:

- As the calculated Power Threshold is greater than the DUT output power for Edge2, 3 and 4, SAR testing is not required for these configurations

13.2. Estimated SAR for Simultaneous Transmission SAR Analysis

Considerations for using estimated SAR values:

1. According to KDB 447498 § 4.1.5 if the antenna is at close proximity to user then the outer surface of the DUT should be treated as the radiating surface. The test separation distance is then determined by the smallest distance between the outer surface of the device and the user. For the purposes of this report close proximity has been defined as closer than 50 mm. For antennas <50 mm from the bottom or edge the separation distance used for the estimated SAR calculations is 0mm.
2. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.
3. Output power is the maximum rated power (including tune-up or manufacturing tolerances) and includes source-based averaging.
4. If the antenna separation distance is > 50mm then the estimated SAR value is 0.4 W/Kg.
5. Formulas round separation distance to nearest mm and power to nearest mW before calculating estimated SAR

13.2.1. Estimated SAR for Wi-Fi 1 Tx (SISO)

Antenna	Tx	Frequency (MHz)	Output power		Separation distances (mm)							Calculated Threshold Value						
			dBm	mW	Bottom	Edge 1	Edge 2	Edge 3	Edge 4	Edge 1 Tilt	Front	Bottom	Edge 1	Edge 2	Edge 3	Edge 4	Edge 1 Tilt	Front
WiFi – Main Antenna																		
WLAN Main	WiFi	2462	14.50	28	0	0	107.5	334	360.45	0		Measure	Measure	0.400	>200 mm	>200 mm	Measure	N/A
WLAN Main	WiFi	5240	15.00	32	0	0	107.5	334	360.45	0		Measure	Measure	0.400	>200 mm	>200 mm	Measure	N/A
WLAN Main	WiFi	5320	15.00	32	0	0	107.5	334	360.45	0		Measure	Measure	0.400	>200 mm	>200 mm	Measure	N/A
WLAN Main	WiFi	5700	15.00	32	0	0	107.5	334	360.45	0		Measure	Measure	0.400	>200 mm	>200 mm	Measure	N/A
WLAN Main	WiFi	5825	15.00	32	0	0	107.5	334	360.45	0		Measure	Measure	0.400	>200 mm	>200 mm	Measure	N/A
Bluetooth / WiFi – Aux Antenna																		
WLAN Aux	WiFi	2462	15.50	35	0	0	342.3	334	125.7	0		Measure	Measure	>200 mm	>200 mm	0.400	Measure	N/A
WLAN Aux	WiFi	5240	15.00	32	0	0	342.3	334	125.7	0		Measure	Measure	>200 mm	>200 mm	0.400	Measure	N/A
WLAN Aux	WiFi	5320	15.00	32	0	0	342.3	334	125.7	0		Measure	Measure	>200 mm	>200 mm	0.400	Measure	N/A
WLAN Aux	WiFi	5700	15.00	32	0	0	342.3	334	125.7	0		Measure	Measure	>200 mm	>200 mm	0.400	Measure	N/A
WLAN Aux	WiFi	5825	15.00	32	0	0	342.3	334	125.7	0		Measure	Measure	>200 mm	>200 mm	0.400	Measure	N/A
WLAN Aux	Bluetooth	2480	7.50	6	0	0	342.3	334	125.7	0		0.252	0.252	>200 mm	>200 mm	0.400	0.252	N/A

Notes:

1. Estimated SAR for 2 Tx (MIMO) was not assessed as the higher 1 Tx (SISO) SAR values were used for simultaneous transmission analysis.
2. As Simultaneous Transmission SAR of the DUT was compliant under the higher power conditions of Wi-Fi 1 Tx, it was judged that such analyses would be unnecessary for Wi-Fi 2 Tx (MIMO), given the substantially lower MIMO power levels and considerable separation distance between WLAN Main and the WLAN Auxiliary antennas.
3. Wherever appropriate, Wi-Fi 1 Tx (SISO) SAR values were used to represent those of Wi-Fi 2 Tx (MIMO); if compliance can be shown with the more conservative Wi-Fi 1 Tx values, then there is no need to perform separate assessment for Wi-Fi 2 Tx.

13.3. Wi-Fi 2.4 GHz Band

Main Antenna

Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
					Tune-up limit	Meas.	Meas.	Scaled		
Edge 1	802.11b	0	1	2412	12.00	11.88				1
			6	2437	14.50	14.40	0.211	0.216	1	
			11	2462	11.50	11.28				1
	802.11g	0	1	2412	12.00	11.84				1
			6	2437	14.50	14.24	0.205	0.218	2	
			11	2462	11.50	11.26				1
Bottom side	802.11b	0	1	2412	12.00	11.88				1
			6	2437	14.50	14.40	0.141	0.144	3	
			11	2462	11.50	11.28				1
	802.11g	0	1	2412	12.00	11.84				1
			6	2437	14.50	14.24	0.135	0.143	4	
			11	2462	11.50	11.26				1
Edge 1tilt	802.11b	0	1	2412	12.00	11.88				1
			6	2437	14.50	14.40	0.368	0.377	5	
			11	2462	11.50	11.28				1
	802.11g	0	1	2412	12.00	11.84				1
			6	2437	14.50	14.24	0.364	0.386	6	
			11	2462	11.50	11.26				1

Auxiliary Antenna

Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
					Tune-up limit	Meas.	Meas.	Scaled		
Edge 1	802.11b	0	1	2412	12.00	11.83				1
			6	2437	15.00	14.64	0.213	0.231	7	
			11	2462	11.50	11.03				1
	802.11g	0	1	2412	12.00	11.74				1
			6	2437	15.50	15.49	0.264	0.265	8	
			11	2462	11.50	11.43				1
Bottom side	802.11b	0	1	2412	12.00	11.83				1
			6	2437	15.00	14.64	0.193	0.210	9	
			11	2462	11.50	11.03				1
	802.11g	0	1	2412	12.00	11.74				1
			6	2437	15.50	15.49	0.239	0.240	10	
			11	2462	11.50	11.43				1
Edge 1tilt	802.11b	0	1	2412	12.00	11.83				1
			6	2437	15.00	14.64	0.525	0.570	11	
			11	2462	11.50	11.03				1
	802.11g	0	1	2412	12.00	11.74	0.134	0.142	12	
			6	2437	15.50	15.49	0.643	0.644	13	
			11	2462	11.50	11.43	0.147	0.149	14	

Note(s):

According to KDB 447498 D01 General RF Exposure Guidance v05, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is

1. ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
2. ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
3. ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

13.4. Wi-Fi 5.2 GHz Band

Main Antenna

Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
					Tune-up limit	Meas.	Meas.	Scaled		
Edge 1	802.11a	0	40	5200	15.00	14.93	0.653	0.664	1	
			48	5240	15.00	15.00	0.583	0.583	2	
Bottom	802.11a	0	40	5200	15.00	14.93				1
			48	5240	15.00	15.00	0.051	0.051	3	
Edge 1tilt	802.11a	0	40	5200	15.00	14.93				1
			48	5240	15.00	15.00	0.260	0.260	4	

Auxiliary Antenna

Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
					Tune-up limit	Meas.	Meas.	Scaled		
Edge 1	802.11a	0	40	5200	15.00	15.00	0.878	0.878	5	
			44	5220	15.00	14.93	0.879	0.893	6	
Bottom side	802.11a	0	40	5200	15.00	15.00	0.153	0.153	7	
			44	5220	15.00	14.93				1
Edge 1tilt	802.11a	0	40	5200	15.00	15.00	0.593	0.593	8	
			44	5220	15.00	14.93				1

Note(s):

According to KDB 447498 D01 General RF Exposure Guidance v05, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is

1. ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
2. ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
3. ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

13.5. Wi-Fi 5.3 GHz Band

Main Antenna

Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
					Tune-up limit	Meas.	Meas.	Scaled		
Edge 1	802.11a	0	52	5260	15.00	14.87	0.567	0.584	9	
			60	5300	15.00	14.95	0.629	0.636	10	
Bpptom sode	802.11a	0	52	5260	15.00	14.87				1
			60	5300	15.00	14.95	0.035	0.035	11	
Edge 1tilt	802.11a	0	52	5260	15.00	14.87				1
			60	5300	15.00	14.95	0.216	0.219	12	

Auxiliary Antenna

Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
					Tune-up limit	Meas.	Meas.	Scaled		
Edge 1	802.11a	0	52	5260	15.00	14.96	1.130	1.140	13	
			60	5300	15.00	14.93	1.100	1.118	14	
Bottom	802.11a	0	52	5260	15.00	14.96	0.185	0.187	15	
			60	5300	15.00	14.93				1
Edge 1tilt	802.11a	0	52	5260	15.00	14.96	0.943	0.952	16	
			60	5300	15.00	14.93	1.070	1.087	17	

Note(s):

According to KDB 447498 D01 General RF Exposure Guidance v05, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is

1. ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
2. ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
3. ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

13.6. Wi-Fi 5.5 GHz Band

Main Antenna

Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
					Tune-up limit	Meas.	Meas.	Scaled		
Edge 1	802.11a	0	100	5500	15.00	14.97	1.260	1.269	18	
			112	5560	15.00	14.75	1.050	1.112	19	
			120	5600	15.00	14.68	0.887	0.955	20	
			132	5660	15.00	14.96	0.817	0.825	21	
Bottom side	802.11a	0	100	5500	15.00	14.97	0.099	0.0997	22	
			112	5560	15.00	14.75				1
			120	5600	15.00	14.68				1
			132	5660	15.00	14.96				1
Edge 1tilt	802.11a	0	100	5500	15.00	14.97	0.443	0.446	23	
			112	5560	15.00	14.75	0.304	0.322	24	
			120	5600	15.00	14.68	0.269	0.290	25	
			132	5660	15.00	14.96	0.212	0.214	26	

Auxiliary Antenna

Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
					Tune-up limit	Meas.	Meas.	Scaled		
Edge 1	802.11a	0	104	5520	15.00	14.97	1.110	1.118	27	
			116	5580	15.00	14.92	0.866	0.882	28	
			128	5640	15.00	14.97	0.930	0.936	29	
			136	5680	15.00	14.96	0.960	0.969	30	
Bottom side	802.11a	0	104	5520	15.00	14.97	0.142	0.143	31	
			116	5580	15.00	14.92				1
			128	5640	15.00	14.97				1
			136	5680	15.00	14.96				1
Edge 1tilt	802.11a	0	104	5520	15.00	14.97	0.938	0.945	32	
			116	5580	15.00	14.92	0.689	0.702	33	
			128	5640	15.00	14.97	0.651	0.656	34	
			136	5680	15.00	14.96	0.565	0.570	35	

Note(s):

According to KDB 447498 D01 General RF Exposure Guidance v05, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is

1. ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
2. ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
3. ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

13.7. Wi-Fi 5.8 GHz Band

Main Antenna

Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
					Tune-up limit	Meas.	Meas.	Scaled		
Edge 1	802.11a	0	149	5745	15.00	14.98	0.618	0.621	36	
			161	5805	15.00	15.00	0.626	0.626	37	
			165	5825	15.00	14.98	0.657	0.660	38	
Bottom side	802.11a	0	149	5745	15.00	14.98				1
			161	5805	15.00	15.00	0.00558	0.00558	39	
			165	5825	15.00	14.98				1
Edge 1tilt	802.11a	0	149	5745	15.00	14.98				1
			161	5805	15.00	15.00	0.148	0.148	40	
			165	5825	15.00	14.98				1

Auxiliary Antenna

Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
					Tune-up limit	Meas.	Meas.	Scaled		
Edge 1	802.11a	0	149	5745	15.00	14.79	0.958	1.005	41	
			157	5785	15.00	14.66	0.955	1.033	42	
			165	5825	14.50	14.31	0.975	1.019	43	
Bottom side	802.11a	0	100	5745	15.00	14.79	0.163	0.171	44	
			112	5785	15.00	14.66				1
			120	5825	14.50	14.31				1
Edge 1tilt	802.11a	0	100	5745	15.00	14.79	0.867	0.910	45	
			112	5785	15.00	14.66	0.868	0.939	46	
			120	5825	14.50	14.31	0.909	0.950	47	

Note(s):

According to KDB 447498 D01 General RF Exposure Guidance v05, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is

1. ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
2. ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
3. ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

13.8. Summary of Highest SAR Values

Results for the highest measured SAR values in each frequency band and mode

Technology/ Band	Test configuration			Mode	Dist. (mm)	Freq. (Mhz)	Power (dBm)	1g SAR (W/kg)
	Transmit Antenna	Exposure	Position					
Wi-Fi 2.4 GHz	Auxiliary	Body	Edge 1 tilt	802.11g	0	2437	15.49	0.644
Wi-Fi 5.2 GHz	Auxiliary	Body	Edge 1	802.11a	0	5220	14.93	0.893
Wi-Fi 5.3 GHz	Auxiliary	Body	Edge 1	802.11a	0	5260	14.96	1.14
Wi-Fi 5.5 GHz	Main	Body	Edge 1	802.11a	0	5500	14.97	1.269
Wi-Fi 5.8 GHz	Auxiliary	Body	Edge 1	802.11a	0	5785	14.66	1.033

13.9. SAR Measurement Variability and Uncertainty

In accordance with published RF Exposure KDB procedure 865664 D01 SAR measurement 100 MHz to 6 GHz v01. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20.

Wireless Technologies	Test Configuration			Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Meas. SAR (W/kg)		Largest to Smallest SAR Ratio	Plot No.
	Transmit Antenna	Exposure	Position					Original	Repeated		
Wi-Fi 2.4 GHz	Auxiliary	Body	Edge 1 tilt	802.11g 6 Mbps	0	6	2437	0.643	N/A	N/A	
Wi-Fi 5.2 GHz	Auxiliary	Body	Edge 1	802.11a 6 Mbps	0	44	5220	0.879	0.858	1.02	1
Wi-Fi 5.3 GHz	Auxiliary	Body	Edge 1	802.11a 6 Mbps	0	52	5260	1.13	1.04	1.09	2
Wi-Fi 5.5 GHz	Main	Body	Edge 1	802.11a 6 Mbps	0	100	5500	1.26	1.24	1.02	3
Wi-Fi 5.8 GHz	Auxiliary	Body	Edge 1	802.11a 6 Mbps	0	165	5825	0.975	0.949	1.03	4

Note(s):

Second Repeated Measurement is not required since the ratio of the largest to smallest SAR for the original and first repeated measurement is not > 1.20.

13.10. SAR Plots (from Summary of Highest Measured SAR Values)

WLAN 11g 6Mbps 2437MHz Edge 1 tilt (Top side tilt) 0mm Ant.Aux

Communication System: UID 0, WLAN 11a/b/g/n (0); Communication System Band: 11b/g/n (2.4G); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.951$ S/m; $\epsilon_r = 51.589$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825; ConvF(7.33, 7.33, 7.33); Calibrated: 2012/12/10;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1369; Calibrated: 2013/05/13

Phantom: ELI 4.0; Type: QDOVA001BA;

Measurement SW: DASY52, Version 52.8 (7);

Area Scan (51x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.15 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.306 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 1.87 W/kg

SAR(1 g) = 0.643 W/kg; SAR(10 g) = 0.244 W/kg

Maximum value of SAR (measured) = 1.18 W/kg

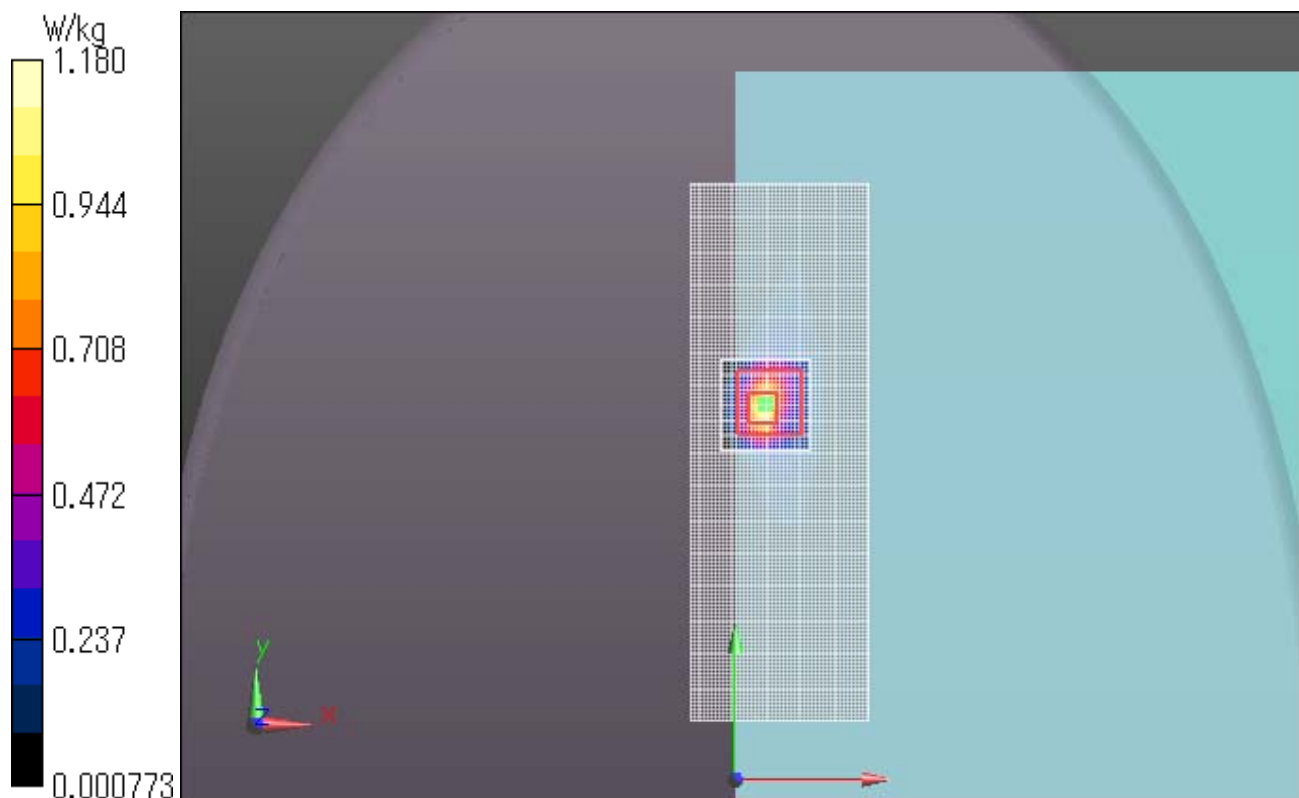

WLAN 11a 6Mbps 5220MHz Edge 1 (Top side) 0mm Ant.Aux

Communication System: UID 0, WLAN 11a/b/g/n (0); Communication System Band: 11a/n (W52 53);

Frequency: 5220 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5220 \text{ MHz}$; $\sigma = 5.496 \text{ S/m}$; $\epsilon_r = 48.249$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825; ConvF(4.63, 4.63, 4.63); Calibrated: 2012/12/10;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1369; Calibrated: 2013/05/13

Phantom: ELI 4.0; Type: QDOVA001BA;

Measurement SW: DASY52, Version 52.8 (7);

Area Scan (91x101x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 1.73 W/kg


Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 6.450 V/m ; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 3.79 W/kg

SAR(1 g) = 0.879 W/kg ; SAR(10 g) = 0.231 W/kg

Maximum value of SAR (measured) = 2.02 W/kg

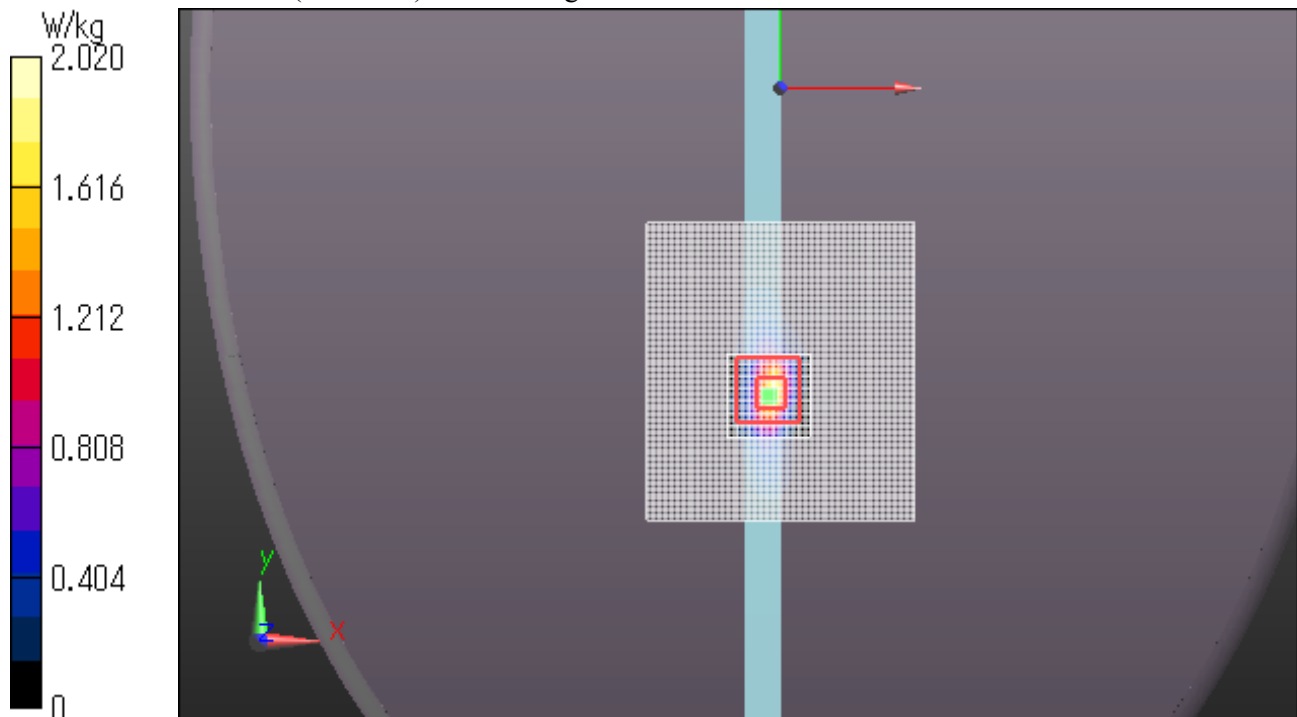

WLAN 11a 6Mbps 5260MHz Edge 1 (Top side) 0mm Ant.Aux

Communication System: UID 0, WLAN 11a/b/g/n (0); Communication System Band: 11a/n (W52 53);

Frequency: 5260 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5260$ MHz; $\sigma = 5.423$ S/m; $\epsilon_r = 48.725$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825; ConvF(4.34, 4.34, 4.34); Calibrated: 2012/12/10;

Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface:
2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1369; Calibrated: 2013/05/13

Phantom: ELI 4.0; Type: QDOVA001BA;

Measurement SW: DASY52, Version 52.8 (7);

Area Scan (91x161x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 2.29 W/kg


Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 24.10 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 4.87 W/kg

SAR(1 g) = 1.13 W/kg; SAR(10 g) = 0.292 W/kg

Maximum value of SAR (measured) = 2.44 W/kg

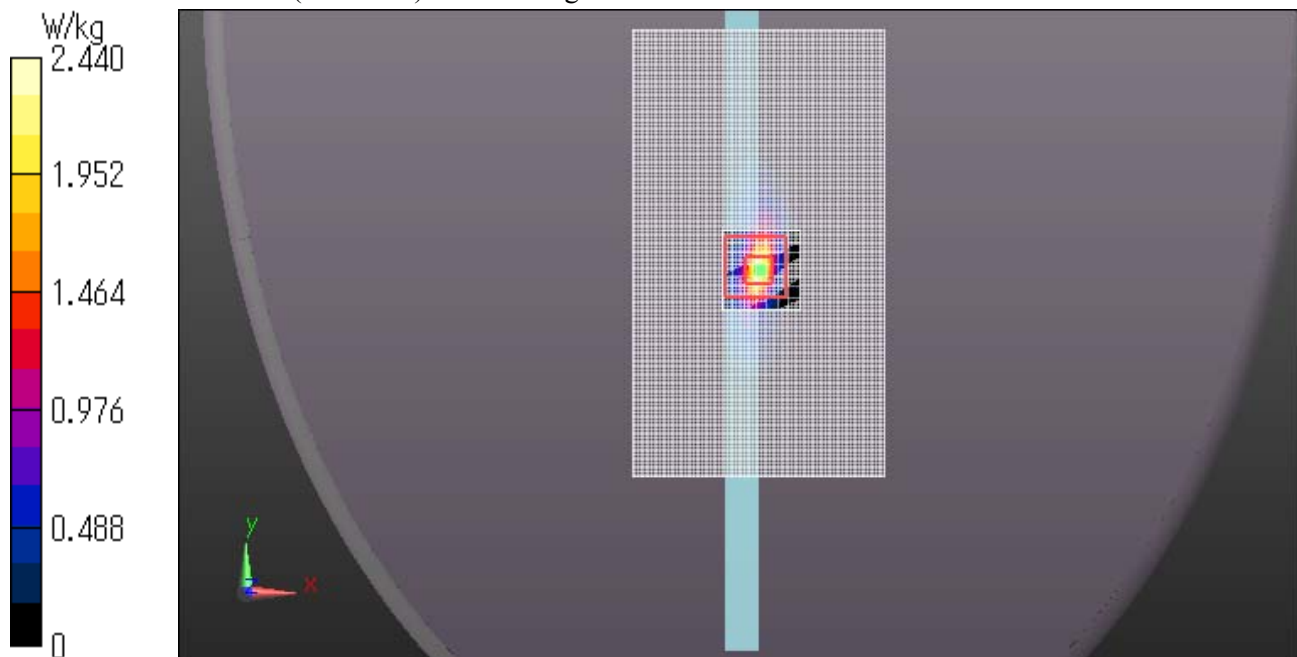

WLAN 11a 6Mbps 5500MHz Edge 1 (Top side) 0mm Ant.Main

Communication System: UID 0, WLAN 11a/b/g/n ; Communication System Band: 11a/n; Frequency: 5500 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5500$ MHz; $\sigma = 5.741$ S/m; $\epsilon_r = 48.331$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825; ConvF(3.89, 3.89, 3.89); Calibrated: 2012/12/10;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1369; Calibrated: 2013/05/13 Phantom: ELI 4.0; Type: QDOVA001BA;

Measurement SW: DASY52, Version 52.8 (7);

Area Scan (91x251x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 3.02 W/kg


Zoom Scan (8x8x6)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.150 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 5.66 W/kg

SAR(1 g) = 1.26 W/kg; SAR(10 g) = 0.333 W/kg

Maximum value of SAR (measured) = 2.81 W/kg

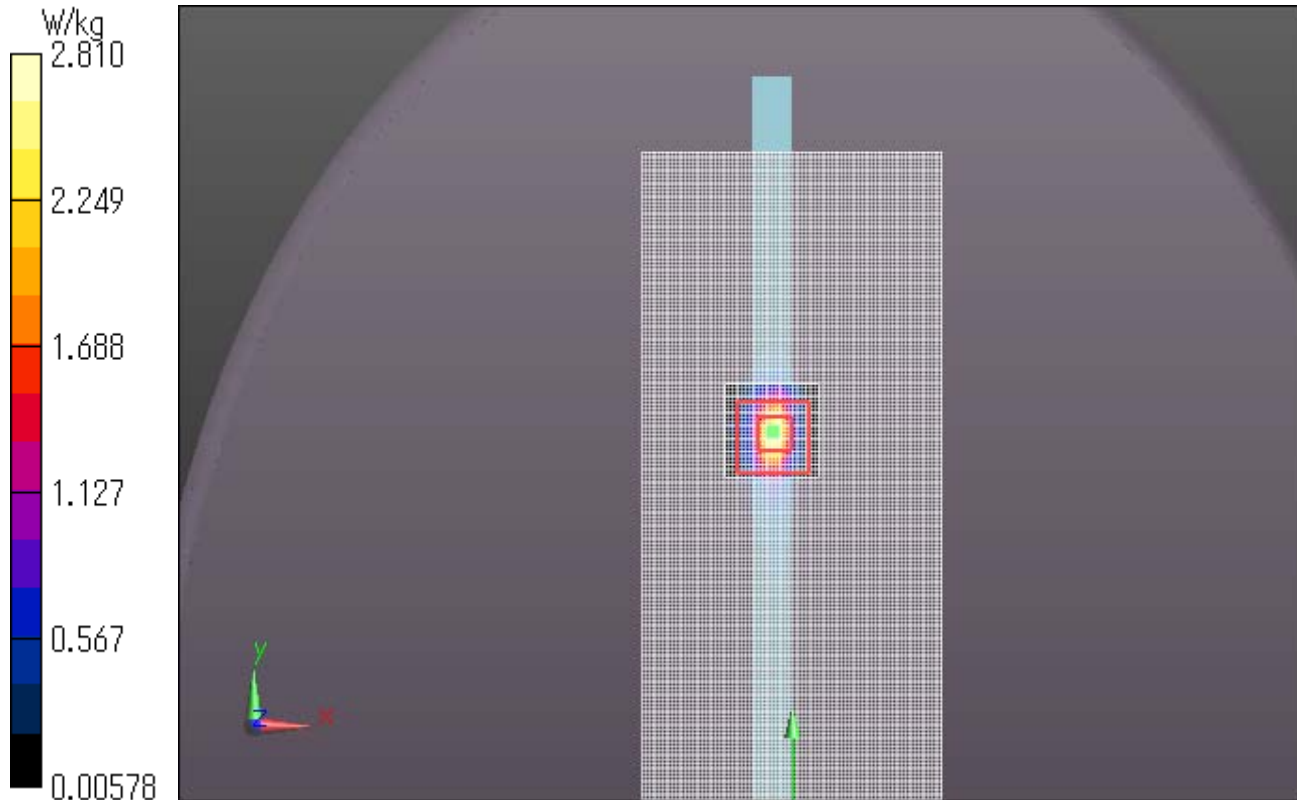

WLAN 11a 6Mbps 5785MHz Edge 1 (Top side) 0mm Ant.Aux

Communication System: UID 0, WLAN 11a/b/g/n (0); Communication System Band: 11a/n (W58); Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5785$ MHz; $\sigma = 6.141$ S/m; $\epsilon_r = 47.887$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825; ConvF(4.2, 4.2, 4.2); Calibrated: 2012/12/10;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1369; Calibrated: 2013/05/13

Phantom: ELI 4.0; Type: QDOVA001BA;

Measurement SW: DASYS2, Version 52.8 (7);

Area Scan (91x161x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 2.76 W/kg


Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 1.829 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 4.15 W/kg

SAR(1 g) = 0.955 W/kg; SAR(10 g) = 0.229 W/kg

Maximum value of SAR (measured) = 2.42 W/kg

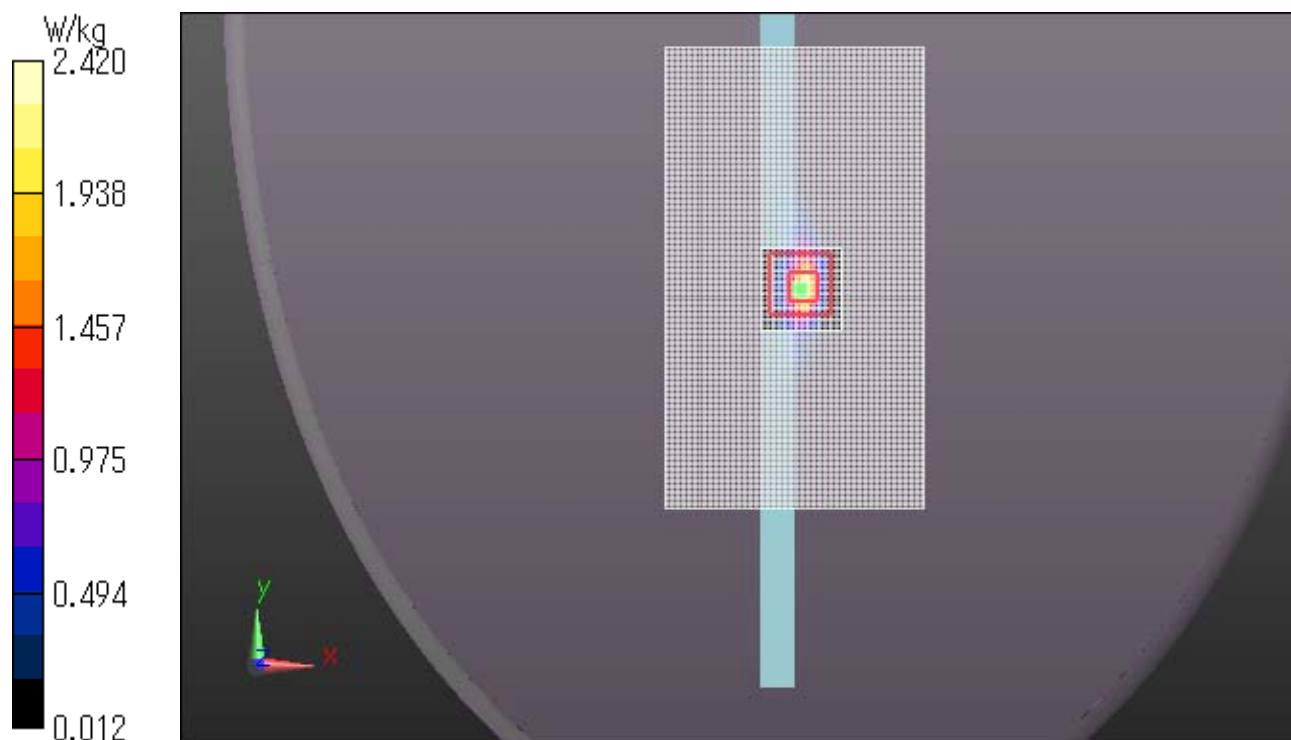

14. Simultaneous Transmission SAR Analysis

14.1. Sum of the SAR for Wi-Fi 2.4 GHz Band & Bluetooth

Test Position	Data	Data	Data	Σ 1-g SAR (mW/g)
	Wi-Fi 2.4 GHz Main	Wi-Fi 2.4 GHz Aux	Bluetooth	
Edge1 Wi-Fi 1 Tx	0.218		0.252	0.470
Edge1 Wi-Fi 2 Tx	0.218	0.265		0.483
Bottom Wi-Fi 1 Tx	0.144		0.252	0.396
Bottom Wi-Fi 2 Tx	0.144	0.240		0.384
Edge 1 tilt Wi-Fi 1 Tx	0.386		0.252	0.638
Edge 1 tilt Wi-Fi 2 Tx	0.386	0.644		1.030

Note(s):

1. Bluetooth and Wi-Fi Aux cannot simultaneously transmit
2. Values shaded green are estimated SAR

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

Conclusion:

- Simultaneous transmission SAR measurement (Volume Scan) is not required because the either sum of the 1-g SAR is < 1.6 W/kg or the SPLSR is < 0.04 for all circumstances that require such a calculation.

14.2. Sum of the SAR for Wi-Fi 5.2 GHz Band & Bluetooth

Test Position	Data	Data	Data	Σ 1-g SAR (mW/g)
	Wi-Fi 5.2 GHz Main	Wi-Fi 5.2 GHz Aux	Bluetooth	
Edge1 Wi-Fi 1 Tx	0.664		0.252	0.916
Edge1 Wi-Fi 2 Tx	0.664	0.893		1.557
Bottom Wi-Fi 1 Tx	0.051		0.252	0.303
Bottom Wi-Fi 2 Tx	0.051	0.153		0.204
Edge 1 tilt Wi-Fi 1 Tx	0.26		0.252	0.512
Edge 1 tilt Wi-Fi 2 Tx	0.26	0.593		0.853

Note(s):

1. Bluetooth and Wi-Fi Aux cannot simultaneously transmit
2. Values shaded green are estimated SAR

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

Conclusion:

- Simultaneous transmission SAR measurement (Volume Scan) is not required because the either sum of the 1-g SAR is < 1.6 W/kg or the SPLSR is < 0.04 for all circumstances that require such a calculation.

14.3. Sum of the SAR for Wi-Fi 5.3 GHz Band & Bluetooth

Test Position	Data	Data	Data	Σ 1-g SAR (mW/g)
	Wi-Fi 5.3 GHz Main	Wi-Fi 5.3 GHz Aux	Bluetooth	
Edge1 Wi-Fi 1 Tx	0.636		0.252	0.888
Edge1 Wi-Fi 2 Tx	0.636	1.14		1.776
Bottom Wi-Fi 1 Tx	0.035		0.252	0.287
Bottom Wi-Fi 2 Tx	0.035	0.187		0.222
Edge 1 tilt Wi-Fi 1 Tx	0.219		0.252	0.471
Edge 1 tilt Wi-Fi 2 Tx	0.219	1.087		1.306

Note(s):

1. Bluetooth and Wi-Fi Aux cannot simultaneously transmit
2. Values shaded green are estimated SAR

SAR to Peak Location Separation Ratio (SPLSR)

Case #	Test Position	Worst-case		Σ 1-g SAR (mW/g)	Calculated distance (mm)	SPLSR	Figure
		WiFi 5.3 GHz Main	WiFi 5.3 GHz Aux				
1	Edge 1 Wi-Fi 2 Tx	0.636	1.140	1.776	222.2	0.011	1

Conclusion:

- Simultaneous transmission SAR measurement (Volume Scan) is not required because the either sum of the 1-g SAR is < 1.6 W/kg or the SPLSR is < 0.04 for all circumstances that require such a calculation.

14.4. Sum of the SAR for Wi-Fi 5.5 GHz Bands & Bluetooth

Test Position	Data	Data	Data	Σ 1-g SAR (mW/g)
	Wi-Fi 5.5 GHz Main	Wi-Fi 5.5 GHz Aux	Bluetooth	
Edge1 Wi-Fi 1 Tx	1.269		0.252	1.521
Edge1 Wi-Fi 2 Tx	1.269	1.118		2.387
Bottom Wi-Fi 1 Tx	0.0997		0.252	0.352
Bottom Wi-Fi 2 Tx	0.0997	0.143		0.243
Edge 1 tilt Wi-Fi 1 Tx	0.446		0.252	0.698
Edge 1 tilt Wi-Fi 2 Tx	0.446	0.945		1.391

Note(s):

1. Bluetooth and Wi-Fi Aux cannot simultaneously transmit
2. Values shaded green are estimated SAR

SAR to Peak Location Separation Ratio (SPLSR)

Case #	Test Position	Worst-case		Σ 1-g SAR (mW/g)	Calculated distance (mm)	SPLSR	Figure
		WiFi 5.5 GHz Main	WiFi 5.5 GHz Aux				
1	Edge 1 Wi-Fi 2 Tx	1.269	1.118	2.387	231.2	0.016	2

Conclusion:

- Simultaneous transmission SAR measurement (Volume Scan) is not required because the either sum of the 1-g SAR is < 1.6 W/kg or the SPLSR is < 0.04 for all circumstances that require such a calculation.

14.5. Sum of the SAR for Wi-Fi 5.8 GHz Band & Bluetooth

Test Position	Data	Data	Data	Σ 1-g SAR (mW/g)
	Wi-Fi 5.8 GHz Main	Wi-Fi 5.8 GHz Aux	Bluetooth	
Edge1 Wi-Fi 1 Tx	0.66		0.252	0.912
Edge1 Wi-Fi 2 Tx	0.66	1.033		1.693
Bottom Wi-Fi 1 Tx	0.00558		0.252	0.258
Bottom Wi-Fi 2 Tx	0.00558	0.171		0.177
Edge 1 tilt Wi-Fi 1 Tx	0.148		0.252	0.400
Edge 1 tilt Wi-Fi 2 Tx	0.148	0.950		1.098

Note(s):

1. Bluetooth and Wi-Fi Aux cannot simultaneously transmit
2. Values shaded green are estimated SAR

SAR to Peak Location Separation Ratio (SPLSR)


Case #	Test Position	Worst-case		Σ 1-g SAR (mW/g)	Calculated distance (mm)	SPLSR	Figure
		WiFi 5.8 GHz Main	WiFi 5.8 GHz Aux				
1	Edge 1 Wi-Fi 2 Tx	0.660	1.033	1.693	220.3	0.010	3

Conclusion:

- Simultaneous transmission SAR measurement (Volume Scan) is not required because the either sum of the 1-g SAR is < 1.6 W/kg or the SPLSR is < 0.04 for all circumstances that require such a calculation.

14.6. Separation Distance Calculations and Figures

Figure (1)

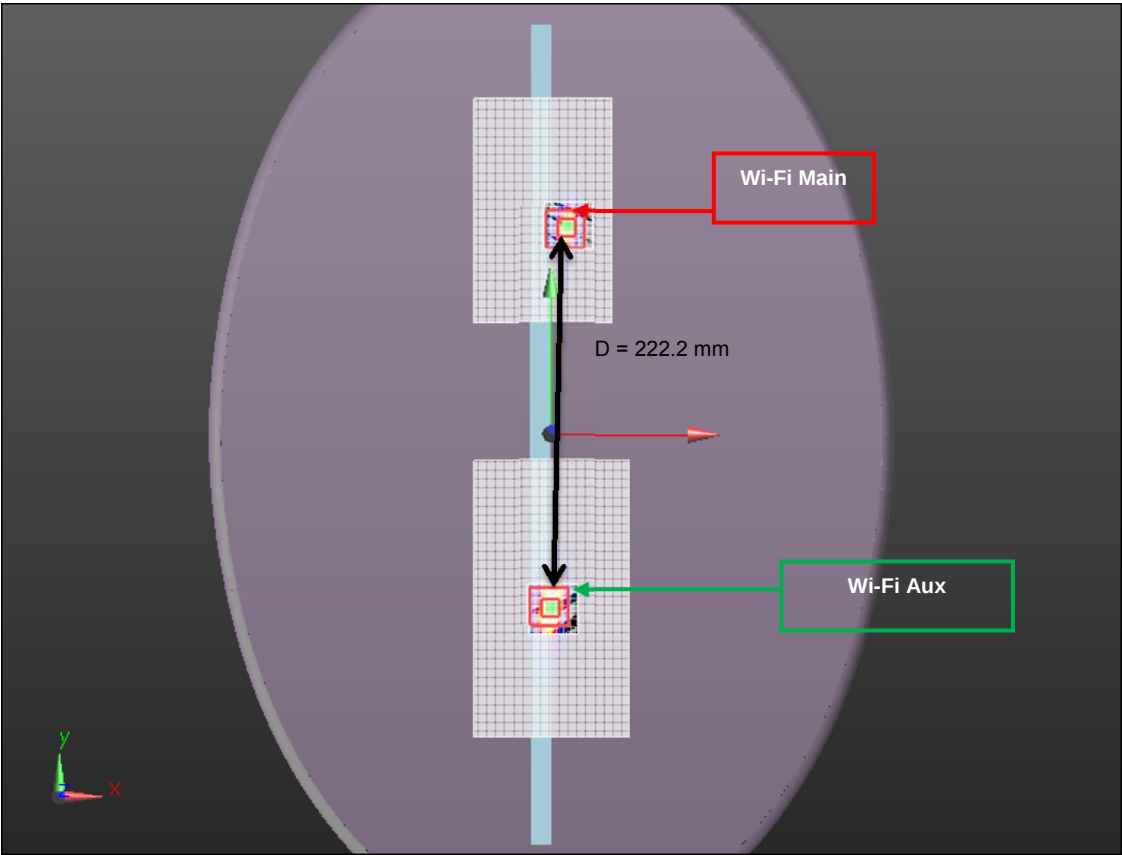


Mode	Peak SAR	X	Y	Z
	mW/g	m	m	m
Wi-Fi Main 5.3 GHz	0.636	0.008	0.119	-0.18
Wi-Fi Aux 5.3 GHz	1.14	-0.001	-0.103	-0.179

d: Calculated distance (mm)
222.2

The Peak Location Separation Distance is computed by using the formula below:
 $SQRT((X1-X2)^2+(Y1-Y2)^2+(Z1-Z2)^2)$

Figure (2)

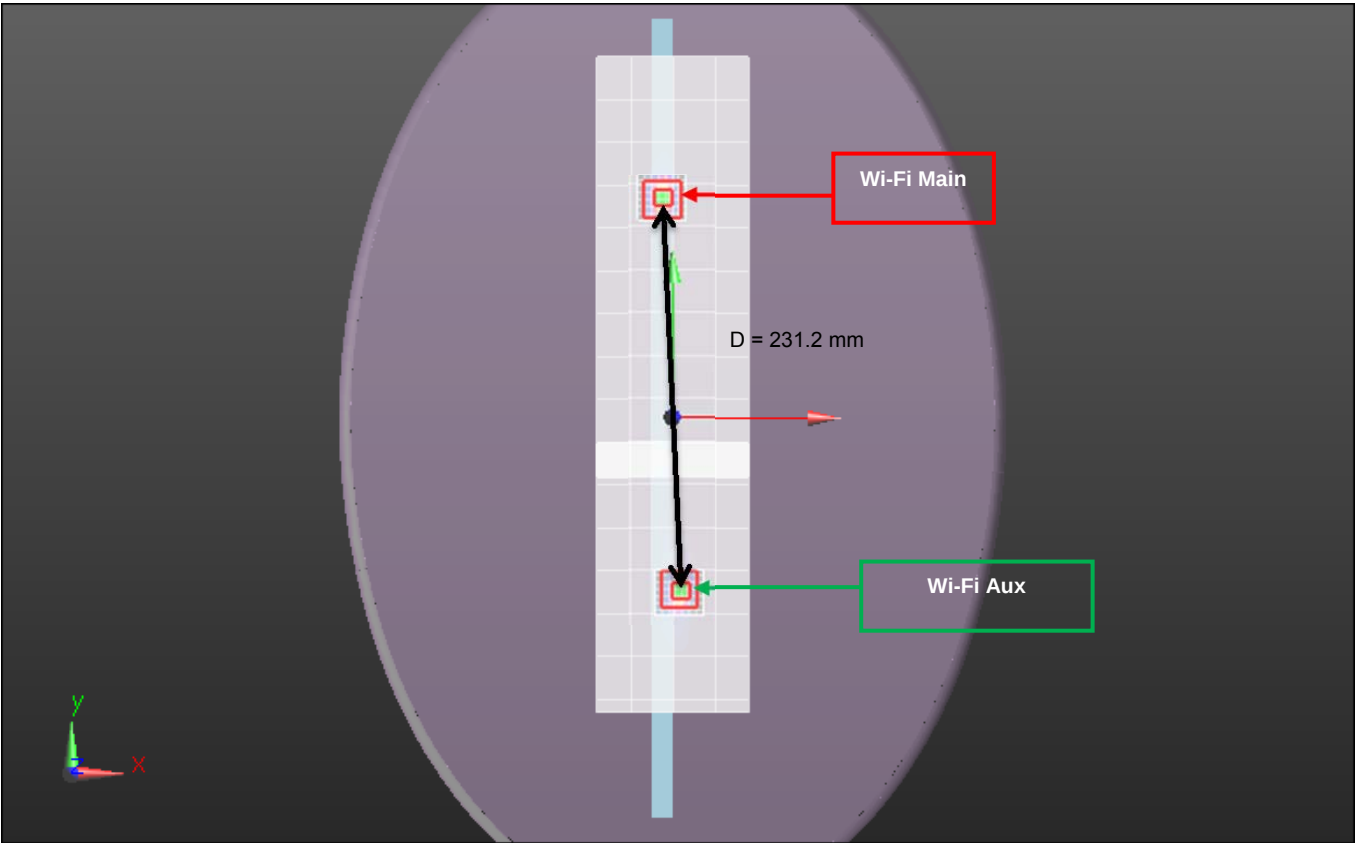


Mode	Peak SAR	X	Y	Z
	mW/g	m	m	m
Wi-Fi Main 5.5 GHz	1.289	-0.004	0.129	-0.179
Wi-Fi Aux 5.5 GHz	1.118	0.006	-0.102	-0.179

d: Calculated distance (mm)

231.2

The Peak Location Separation Distance is computed by using the formula below:
 $\text{SQRT}((X1-X2)^2+(Y1-Y2)^2+(Z1-Z2)^2)$

Figure (3)

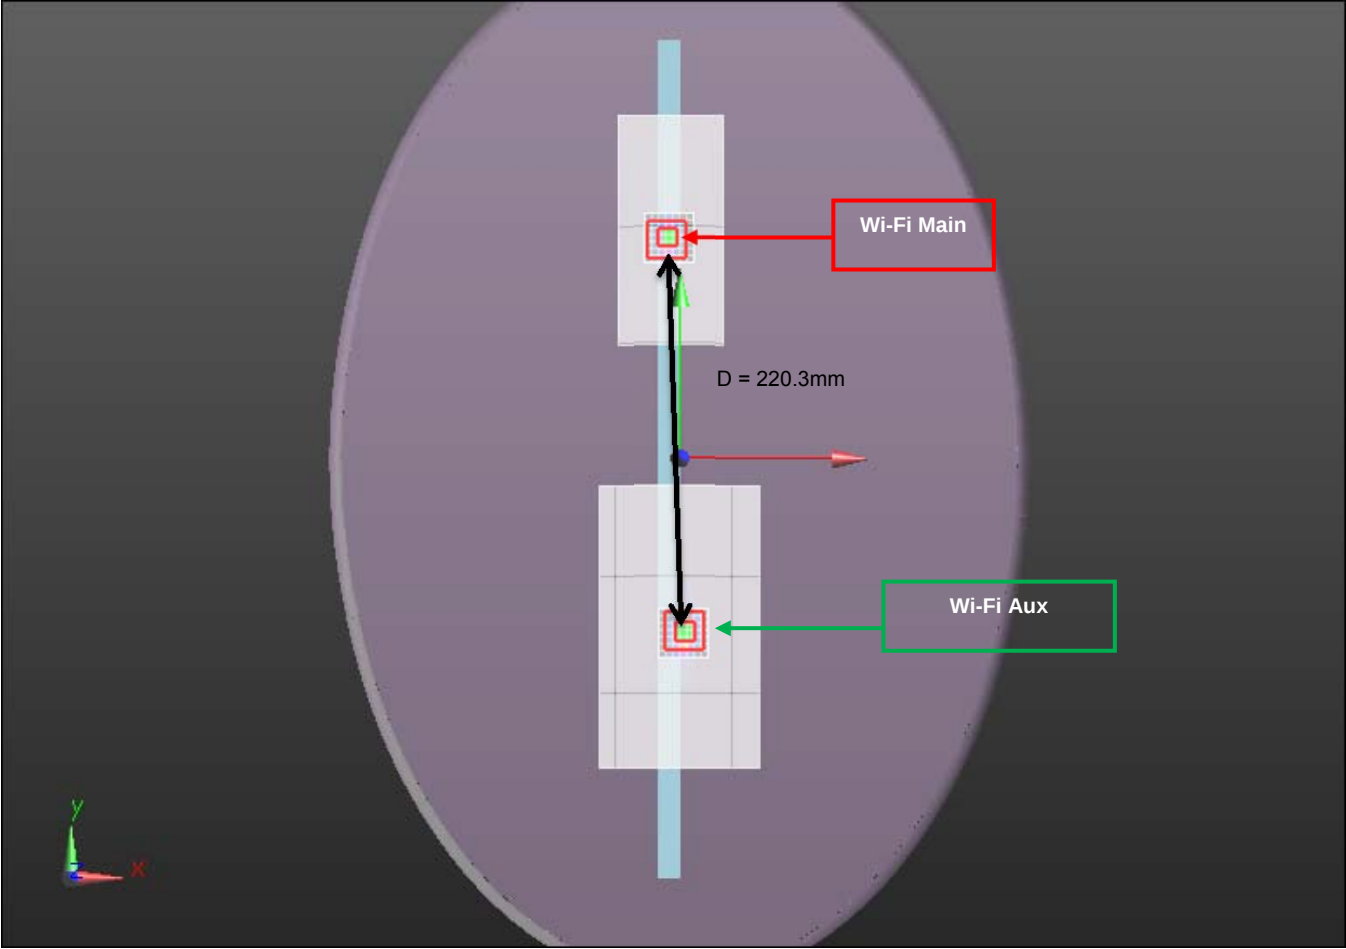

Mode	Peak SAR	X	Y	Z
	mW/g	m	m	m
Wi-Fi Main 5.8 GHz	0.66	-0.008	0.123	-0.177
Wi-Fi Aux 5.8 GHz	1.033	0.004	-0.097	-0.179

d: Calculated distance (mm)
220.3

The Peak Location Separation Distance is computed by using the formula below:
 $\text{SQRT}((X1-X2)^2+(Y1-Y2)^2+(Z1-Z2)^2)$

15. Appendixes

Refer to separated files for the following appendixes.

- 15.1. System Performance Check Plots**
- 15.2. SAR Test Plots for Wi-Fi 2.4 GHz Band**
- 15.3. SAR Test Plots for Wi-Fi 5 GHz Bands**
- 15.4. SAR Test Plots for Repeated Test**
- 15.5. Calibration Certificate for E-Field Probe EX3DV4 - SN 3825**
- 15.6. Calibration Certificate for D2450V2 - SN 713**
- 15.7. Calibration Certificate for D5GHzV2 - SN 1020**