

FCC SAR Test Report

Report No. : SA160601C13
Applicant : Panasonic Corporation of North America
Address : Two Riverfront Plaza, 9th Floor, Newark, New Jersey, United States
Product : Wireless module
FCC ID : ACJ9TGWL15B
Brand : Panasonic
Model No. : WL15B
Standards : FCC 47 CFR Part 2 (2.1093) / IEEE C95.1:1992 / IEEE Std 1528:2013
 KDB 865664 D01 v01r04 / KDB 865664 D02 v01r02 / KDB 248227 D01 v02r02
 KDB 447498 D01 v06 / KDB 616217 D04 v01r02
 KDB 941225 D01 v03r01 / KDB 941225 D05 v02r05
Sample Received Date : Jun. 01, 2016
Date of Testing : Jul. 12, 2016 ~ Jul. 16, 2016

CERTIFICATION: The above equipment have been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch – Lin Kou Laboratories**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample’s SAR characteristics under the conditions specified in this report. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product certification, approval, or endorsement by TAF or any government agencies.

Prepared By : Evonne Liu
 Evonne Liu / Specialist
Approved By : Eli Hsu
 Eli Hsu / Supervisor



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

Table of Contents

Release Control Record	3
1. Summary of Maximum SAR Value	4
2. Description of Equipment Under Test	5
3. SAR Measurement System	7
3.1 Definition of Specific Absorption Rate (SAR)	7
3.2 SPEAG DASY System	7
3.2.1 Robot.....	8
3.2.2 Probes.....	9
3.2.3 Data Acquisition Electronics (DAE)	9
3.2.4 Phantoms	10
3.2.5 Device Holder.....	11
3.2.6 System Validation Dipoles	11
3.2.7 Tissue Simulating Liquids.....	12
3.3 SAR System Verification	15
3.4 SAR Measurement Procedure	16
3.4.1 Area & Zoom Scan Procedure	16
3.4.2 Volume Scan Procedure.....	16
3.4.3 Power Drift Monitoring.....	17
3.4.4 Spatial Peak SAR Evaluation	17
3.4.5 SAR Averaged Methods	17
4. SAR Measurement Evaluation	18
4.1 EUT Configuration and Setting.....	18
4.2 EUT Testing Position	20
4.2.1 Body Exposure Conditions	20
4.2.2 SAR Test Exclusion Evaluations	21
4.2.3 Simultaneous Transmission Possibilities	22
4.3 Tissue Verification	23
4.4 System Validation.....	23
4.5 System Verification.....	23
4.6 Maximum Output Power.....	24
4.6.1 Maximum Conducted Power	24
4.6.2 Measured Conducted Power Result.....	25
4.7 SAR Testing Results	26
4.7.1 SAR Test Reduction Considerations	26
4.7.2 SAR Results for Body Exposure Condition (Separation Distance is 0 cm Gap).....	27
4.7.3 SAR Measurement Variability.....	29
4.7.4 Simultaneous Multi-band Transmission Evaluation	30
5. Calibration of Test Equipment.....	86
6. Measurement Uncertainty.....	87
7. Information on the Testing Laboratories.....	89
Appendix A. SAR Plots of System Verification	
Appendix B. SAR Plots of SAR Measurement	
Appendix C. Calibration Certificate for Probe and Dipole	
Appendix D. Photographs of EUT and Setup	

1. Summary of Maximum SAR Value

Equipment Class	Mode	Highest Reported Body SAR _{1g} (0 cm Gap) (W/kg)
PCB	GSM850	1.137
	GSM1900	1.254
	WCDMA II	1.128
	WCDMA IV	1.032
	WCDMA V	1.344
	CDMA BC0	1.251
	CDMA BC1	1.309
	CDMA BC10	1.194
	LTE 2	1.322
	LTE 4	1.344
	LTE 5	1.279
	LTE 13	1.340
	LTE 17	1.276
LTE 25	1.292	
DTS	2.4G WLAN	1.05
NII	5.2 / 5.3G WLAN	1.39
	5.6G WLAN	1.06
	5.8G WLAN	0.94
DSS	Bluetooth	0.01
Highest Simultaneous Transmission SAR		Body (W/kg)
PCB + DTS Ant0 + DTS Ant1		1.576
PCB + NII Ant0 + NII Ant1		1.591
PCB + DTS Ant0 + DSS Ant1		1.557
PCB + NII Ant0 + DSS Ant1		1.492

Note:

1. The SAR limit (**Head & Body: SAR_{1g} 1.6 W/kg, Extremity: SAR_{10g} 4.0 W/kg**) for general population / uncontrolled exposure is specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992.
2. The test data of GSM850/1900, WCDMA II/IV/V, LTE 2/4/5/13/17/25 is referring to UL SAR report (Test Report No.: 10936951H-A-R2, Issue Date: Oct. 23, 2015).

2. Description of Equipment Under Test

EUT Type	Wireless module
FCC ID	ACJ9TGWL15B
Brand Name	Panasonic
Model Name	WL15B
Tx Frequency Bands (Unit: MHz)	GSM850 : 824.2 ~ 848.8 GSM1900 : 1850.2 ~ 1909.8 WCDMA Band II : 1852.4 ~ 1907.6 WCDMA Band IV : 1712.4 ~ 1752.6 WCDMA Band V : 826.4 ~ 846.6 CDMA BC0 : 824.7 ~ 848.31 CDMA BC1 : 1851.25 ~ 1908.75 CDMA BC10 : 817.9 ~ 823.1 LTE Band 2 : 1850.7 ~ 1909.3 (1.4M), 1851.5 ~ 1908.5 (3M), 1852.5 ~ 1907.5 (5M), 1855 ~ 1905 (10M), 1857.5 ~ 1902.5 (15M), 1860 ~ 1900 (20M) LTE Band 4 : 1710.7 ~ 1754.3 (1.4M), 1711.5 ~ 1753.5 (3M), 1712.5 ~ 1752.5 (5M), 1715 ~ 1750 (10M), 1717.5 ~ 1747.5 (15M), 1720 ~ 1745 (20M) LTE Band 5 : 824.7 ~ 848.3 (1.4M), 825.5 ~ 847.5 (3M), 826.5 ~ 846.5 (5M), 829 ~ 844 (10M) LTE Band 13 : 779.5 ~ 784.5 (5M), 782 (10M) LTE Band 17 : 706.5 ~ 713.5 (5M), 709 ~ 711 (10M) LTE Band 25 : 1850.7 ~ 1914.3 (1.4M), 1851.5 ~ 1913.5 (3M), 1852.5 ~ 1912.5 (5M), 1855 ~ 1910 (10M), 1857.5 ~ 1907.5 (15M), 1860 ~ 1905 (20M) WLAN : 2412 ~ 2472, 5180 ~ 5240, 5260 ~ 5320, 5500 ~ 5700, 5745 ~ 5825 Bluetooth : 2402 ~ 2480
Uplink Modulations	GSM & GPRS : GMSK EDGE : 8PSK WCDMA : QPSK CDMA : QPSK LTE : QPSK, 16QAM 802.11b : DSSS 802.11a/g/n/ac : OFDM Bluetooth : GFSK, π/4-DQPSK, 8-DPSK
Maximum Tune-up Conducted Power (Unit: dBm)	GSM850 : 33.5 GSM1900 : 30.5 WCDMA Band II : 24.0 WCDMA Band IV : 24.0 WCDMA Band V : 24.0 CDMA BC0 : 25.0 CDMA BC1 : 25.0 CDMA BC10 : 25.0 LTE Band 2 : 24.0 LTE Band 4 : 24.0 LTE Band 5 : 24.0 LTE Band 13 : 24.0 LTE Band 17 : 24.0 LTE Band 25 : 24.0 WLAN 2.4G : 15.0 WLAN 5.2G : 13.5 WLAN 5.3G : 13.5 WLAN 5.6G : 13.5 WLAN 5.8G : 13.5 Bluetooth : 5.2
Antenna Type	Fixed Internal Antenna
EUT Stage	Identical Prototype

Note:

1. The EUT is authorized for use in specific End-product. Please refer to below table for more details.

Item	Brand Name	Model Name
Portable Computer - Tablet	Panasonic	FZ-A2

FCC SAR Test Report

2. The above EUT information is declared by manufacturer and for more detailed features description please refers to the manufacturer's specifications or User's Manual.

List of Accessory:

WWAN Module	Brand Name	Sierra
	Model Name	EM7355

3. SAR Measurement System

3.1 Definition of Specific Absorption Rate (SAR)

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person’s awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be related to the electrical field in the tissue by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

3.2 SPEAG DASY System

DASY system consists of high precision robot, probe alignment sensor, phantom, robot controller, controlled measurement server and near-field probe. The robot includes six axes that can move to the precision position of the DASY4/5 software defined. The DASY software can define the area that is detected by the probe. The robot is connected to controlled box. Controlled measurement server is connected to the controlled robot box. The DAE includes amplifier, signal multiplexing, AD converter, offset measurement and surface detection. It is connected to the Electro-optical coupler (ECO). The ECO performs the conversion form the optical into digital electric signal of the DAE and transfers data to the PC.

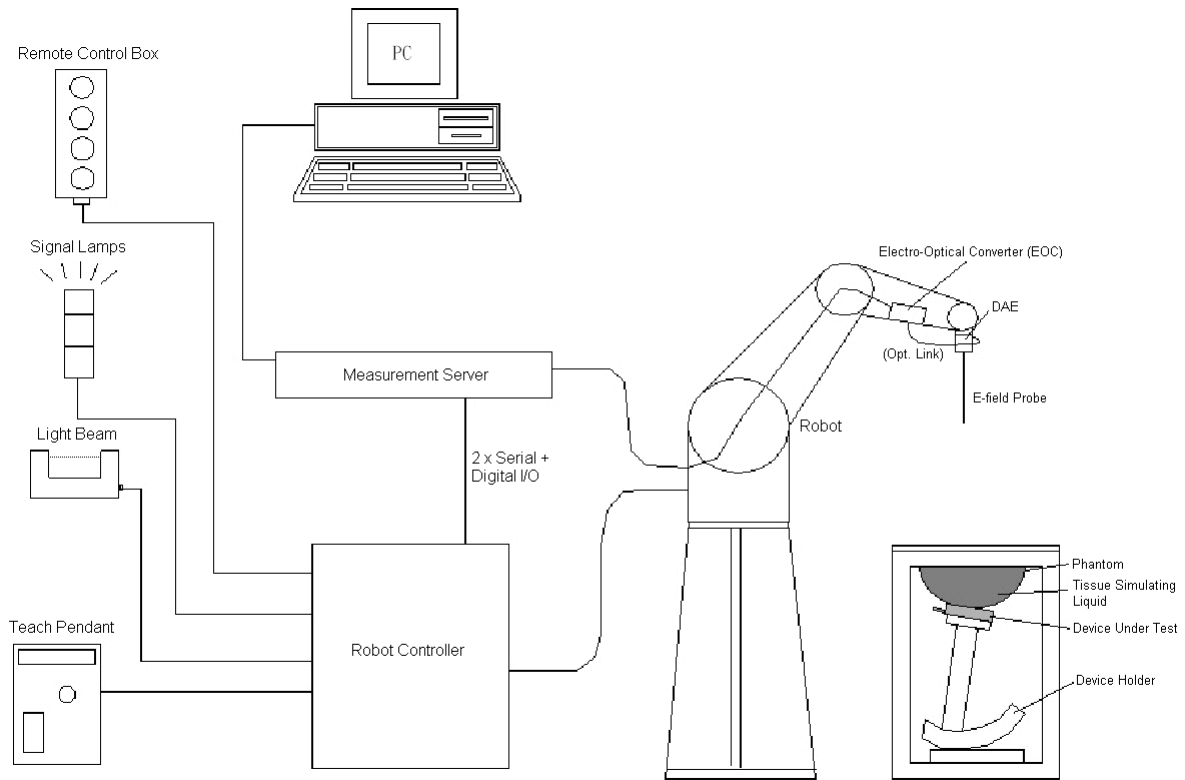


Fig-3.1 SPEAG DASY52 System Setup

3.2.1 Robot

The SPEAG DASY52 systems use the high precision robots from Stäubli SA (France). For the 6-axis controller system, the robot controller version (CS8c) from Stäubli is used. The Stäubli robot series have many features that are important for our application:

- High precision (repeatability ± 0.035 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)





Fig-3.2 SPEAG DASY52 System

FCC SAR Test Report


3.2.2 Probes

The SAR measurement is conducted with the dosimetric probe. The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency.

Model	EX3DV4	
Construction	Symmetrical design with triangular core. Built-in shielding against static charges. PEEK enclosure material (resistant to organic solvents, e.g., DGBE).	
Frequency	10 MHz to 6 GHz Linearity: ± 0.2 dB	
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)	
Dynamic Range	10 μ W/g to 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)	
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	


Model	ES3DV3	
Construction	Symmetrical design with triangular core. Interleaved sensors. Built-in shielding against static charges. PEEK enclosure material (resistant to organic solvents, e.g., DGBE).	
Frequency	10 MHz to 4 GHz Linearity: ± 0.2 dB	
Directivity	± 0.2 dB in HSL (rotation around probe axis) ± 0.3 dB in tissue material (rotation normal to probe axis)	
Dynamic Range	5 μ W/g to 100 mW/g Linearity: ± 0.2 dB	
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 3.9 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.0 mm	


3.2.3 Data Acquisition Electronics (DAE)

Model	DAE3, DAE4	
Construction	Signal amplifier, multiplexer, A/D converter and control logic. Serial optical link for communication with DASY embedded system (fully remote controlled). Two step probe touch detector for mechanical surface detection and emergency robot stop.	
Measurement Range	-100 to +300 mV (16 bit resolution and two range settings: 4mV, 400mV)	
Input Offset Voltage	< 5 μ V (with auto zero)	
Input Bias Current	< 50 fA	
Dimensions	60 x 60 x 68 mm	

FCC SAR Test Report


3.2.4 Phantoms


Model	Twin SAM	
Construction	The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 and IEC 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.	
Material	Vinylester, glass fiber reinforced (VE-GF)	
Shell Thickness	2 ± 0.2 mm (6 ± 0.2 mm at ear point)	
Dimensions	Length: 1000 mm Width: 500 mm Height: adjustable feet	
Filling Volume	approx. 25 liters	

Model	ELI	
Construction	Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.	
Material	Vinylester, glass fiber reinforced (VE-GF)	
Shell Thickness	2.0 ± 0.2 mm (bottom plate)	
Dimensions	Major axis: 600 mm Minor axis: 400 mm	
Filling Volume	approx. 30 liters	


FCC SAR Test Report

3.2.5 Device Holder

Model	Mounting Device	
Construction	In combination with the Twin SAM Phantom or ELI4, the Mounting Device enables the rotation of the mounted transmitter device in spherical coordinates. Rotation point is the ear opening point. Transmitter devices can be easily and accurately positioned according to IEC, IEEE, FCC or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat).	
Material	POM	


Model	Laptop Extensions Kit	
Construction	Simple but effective and easy-to-use extension for Mounting Device that facilitates the testing of larger devices according to IEC 62209-2 (e.g., laptops, cameras, etc.). It is lightweight and fits easily on the upper part of the Mounting Device in place of the phone positioner.	
Material	POM, Acrylic glass, Foam	

3.2.6 System Validation Dipoles

Model	D-Serial	
Construction	Symmetrical dipole with 1/4 balun. Enables measurement of feed point impedance with NWA. Matched for use near flat phantoms filled with tissue simulating solutions.	
Frequency	750 MHz to 5800 MHz	
Return Loss	> 20 dB	
Power Capability	> 100 W (f < 1GHz), > 40 W (f > 1GHz)	

3.2.7 Tissue Simulating Liquids

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm. The nominal dielectric values of the tissue simulating liquids in the phantom and the tolerance of 5% are listed in Table-3.1.

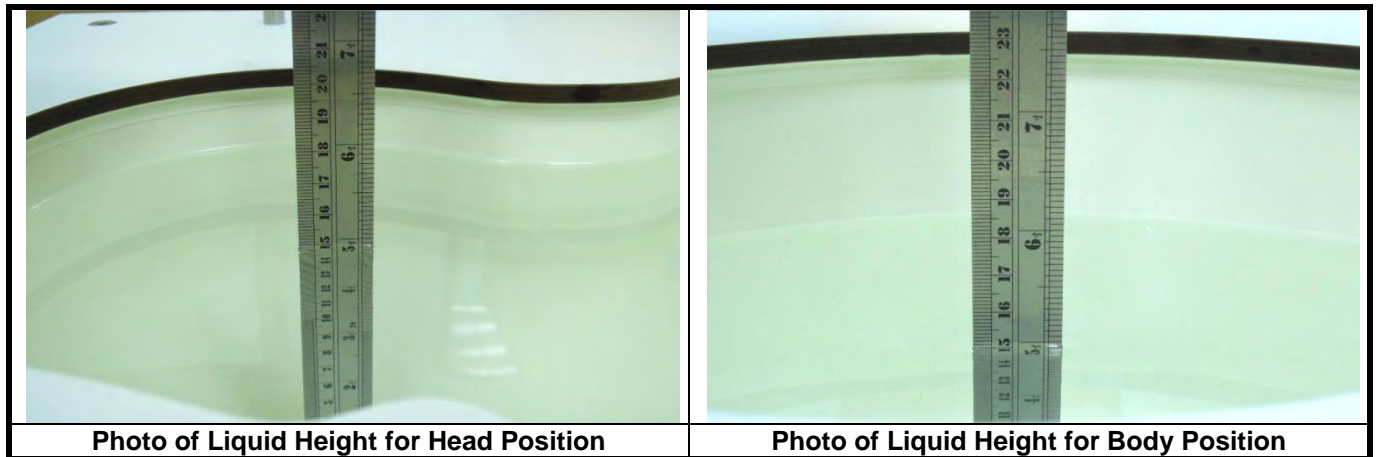

The dielectric properties of the head tissue simulating liquids are defined in IEEE 1528, and KDB 865664 D01 Appendix A. For the body tissue simulating liquids, the dielectric properties are defined in KDB 865664 D01 Appendix A. The dielectric properties of the tissue simulating liquids were verified prior to the SAR evaluation using a dielectric assessment kit and a network analyzer.

Table-3.1 Targets of Tissue Simulating Liquid

Frequency (MHz)	Target Permittivity	Range of $\pm 5\%$	Target Conductivity	Range of $\pm 5\%$
For Head				
750	41.9	39.8 ~ 44.0	0.89	0.85 ~ 0.93
835	41.5	39.4 ~ 43.6	0.90	0.86 ~ 0.95
900	41.5	39.4 ~ 43.6	0.97	0.92 ~ 1.02
1450	40.5	38.5 ~ 42.5	1.20	1.14 ~ 1.26
1640	40.3	38.3 ~ 42.3	1.29	1.23 ~ 1.35
1750	40.1	38.1 ~ 42.1	1.37	1.30 ~ 1.44
1800	40.0	38.0 ~ 42.0	1.40	1.33 ~ 1.47
1900	40.0	38.0 ~ 42.0	1.40	1.33 ~ 1.47
2000	40.0	38.0 ~ 42.0	1.40	1.33 ~ 1.47
2300	39.5	37.5 ~ 41.5	1.67	1.59 ~ 1.75
2450	39.2	37.2 ~ 41.2	1.80	1.71 ~ 1.89
2600	39.0	37.1 ~ 41.0	1.96	1.86 ~ 2.06
3500	37.9	36.0 ~ 39.8	2.91	2.76 ~ 3.06
5200	36.0	34.2 ~ 37.8	4.66	4.43 ~ 4.89
5300	35.9	34.1 ~ 37.7	4.76	4.52 ~ 5.00
5500	35.6	33.8 ~ 37.4	4.96	4.71 ~ 5.21
5600	35.5	33.7 ~ 37.3	5.07	4.82 ~ 5.32
5800	35.3	33.5 ~ 37.1	5.27	5.01 ~ 5.53
For Body				
750	55.5	52.7 ~ 58.3	0.96	0.91 ~ 1.01
835	55.2	52.4 ~ 58.0	0.97	0.92 ~ 1.02
900	55.0	52.3 ~ 57.8	1.05	1.00 ~ 1.10
1450	54.0	51.3 ~ 56.7	1.30	1.24 ~ 1.37
1640	53.8	51.1 ~ 56.5	1.40	1.33 ~ 1.47
1750	53.4	50.7 ~ 56.1	1.49	1.42 ~ 1.56
1800	53.3	50.6 ~ 56.0	1.52	1.44 ~ 1.60
1900	53.3	50.6 ~ 56.0	1.52	1.44 ~ 1.60
2000	53.3	50.6 ~ 56.0	1.52	1.44 ~ 1.60
2300	52.9	50.3 ~ 55.5	1.81	1.72 ~ 1.90
2450	52.7	50.1 ~ 55.3	1.95	1.85 ~ 2.05
2600	52.5	49.9 ~ 55.1	2.16	2.05 ~ 2.27
3500	51.3	48.7 ~ 53.9	3.31	3.14 ~ 3.48
5200	49.0	46.6 ~ 51.5	5.30	5.04 ~ 5.57
5300	48.9	46.5 ~ 51.3	5.42	5.15 ~ 5.69
5500	48.6	46.2 ~ 51.0	5.65	5.37 ~ 5.93
5600	48.5	46.1 ~ 50.9	5.77	5.48 ~ 6.06
5800	48.2	45.8 ~ 50.6	6.00	5.70 ~ 6.30

FCC SAR Test Report

The following table gives the recipes for tissue simulating liquids.

Table-3.2 Recipes of Tissue Simulating Liquid

Tissue Type	Bactericide	DGBE	HEC	NaCl	Sucrose	Triton X-100	Water	Diethylene Glycol Mono-hexylether
H750	0.2	-	0.2	1.5	56.0	-	42.1	-
H835	0.2	-	0.2	1.5	57.0	-	41.1	-
H900	0.2	-	0.2	1.4	58.0	-	40.2	-
H1450	-	43.3	-	0.6	-	-	56.1	-
H1640	-	45.8	-	0.5	-	-	53.7	-
H1750	-	47.0	-	0.4	-	-	52.6	-
H1800	-	44.5	-	0.3	-	-	55.2	-
H1900	-	44.5	-	0.2	-	-	55.3	-
H2000	-	44.5	-	0.1	-	-	55.4	-
H2300	-	44.9	-	0.1	-	-	55.0	-
H2450	-	45.0	-	0.1	-	-	54.9	-
H2600	-	45.1	-	0.1	-	-	54.8	-
H3500	-	8.0	-	0.2	-	20.0	71.8	-
H5G	-	-	-	-	-	17.2	65.5	17.3
B750	0.2	-	0.2	0.8	48.8	-	50.0	-
B835	0.2	-	0.2	0.9	48.5	-	50.2	-
B900	0.2	-	0.2	0.9	48.2	-	50.5	-
B1450	-	34.0	-	0.3	-	-	65.7	-
B1640	-	32.5	-	0.3	-	-	67.2	-
B1750	-	31.0	-	0.2	-	-	68.8	-
B1800	-	29.5	-	0.4	-	-	70.1	-
B1900	-	29.5	-	0.3	-	-	70.2	-
B2000	-	30.0	-	0.2	-	-	69.8	-
B2300	-	31.0	-	0.1	-	-	68.9	-
B2450	-	31.4	-	0.1	-	-	68.5	-
B2600	-	31.8	-	0.1	-	-	68.1	-
B3500	-	28.8	-	0.1	-	-	71.1	-
B5G	-	-	-	-	-	10.7	78.6	10.7

3.3 SAR System Verification

The system check verifies that the system operates within its specifications. It is performed daily or before every SAR measurement. The system check uses normal SAR measurements in the flat section of the phantom with a matched dipole at a specified distance. The system verification setup is shown as below.

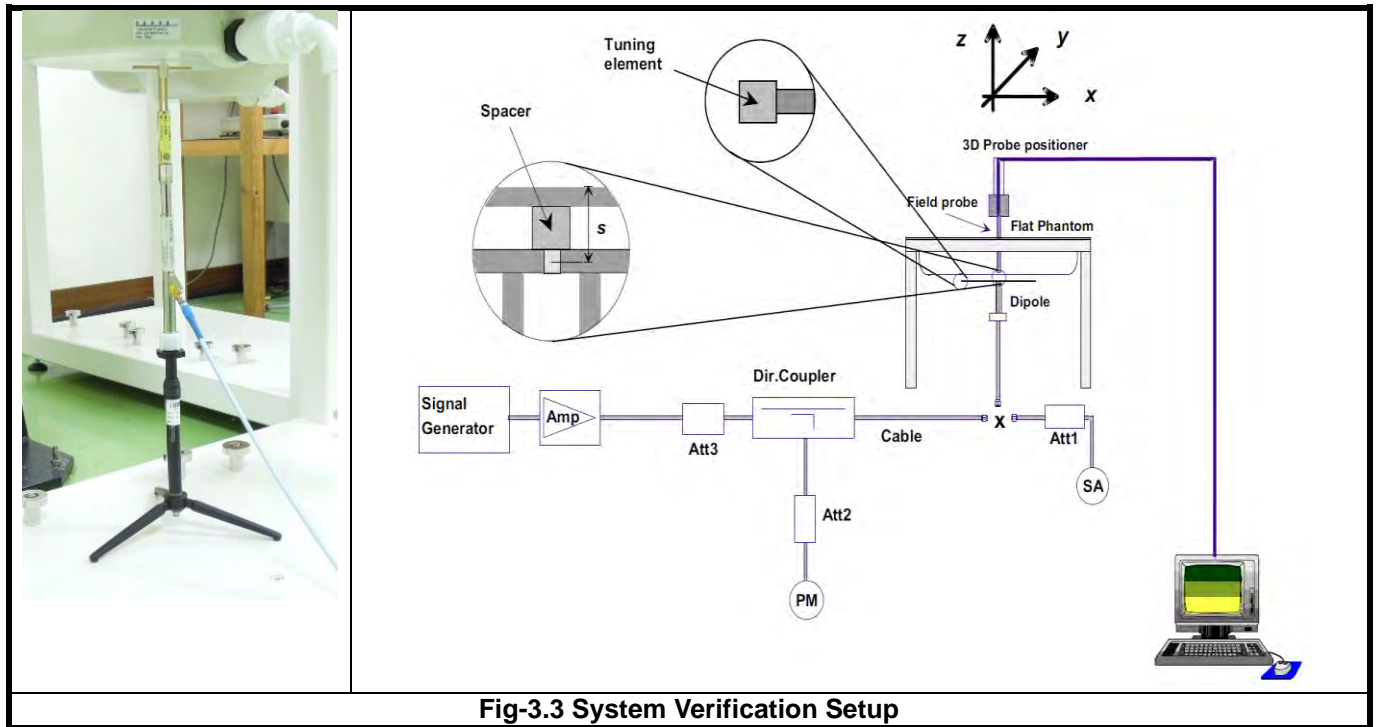


Fig-3.3 System Verification Setup

The validation dipole is placed beneath the flat phantom with the specific spacer in place. The distance spacer is touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The spectrum analyzer measures the forward power at the location of the system check dipole connector. The signal generator is adjusted for the desired forward power (250 mW is used for 700 MHz to 3 GHz, 100 mW is used for 3.5 GHz to 6 GHz) at the dipole connector and the power meter is read at that level. After connecting the cable to the dipole, the signal generator is readjusted for the same reading at power meter.

After system check testing, the SAR result will be normalized to 1W forward input power and compared with the reference SAR value derived from validation dipole certificate report. The deviation of system check should be within 10 %.

3.4 SAR Measurement Procedure

According to the SAR test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

The SAR measurement procedures for each of test conditions are as follows:

- (a) Make EUT to transmit maximum output power
- (b) Measure conducted output power through RF cable
- (c) Place the EUT in the specific position of phantom
- (d) Perform SAR testing steps on the DASY system
- (e) Record the SAR value

3.4.1 Area & Zoom Scan Procedure

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g. According to KDB 865664 D01, the resolution for Area and Zoom scan is specified in the table below.

Items	<= 2 GHz	2-3 GHz	3-4 GHz	4-5 GHz	5-6 GHz
Area Scan ($\Delta x, \Delta y$)	<= 15 mm	<= 12 mm	<= 12 mm	<= 10 mm	<= 10 mm
Zoom Scan ($\Delta x, \Delta y$)	<= 8 mm	<= 5 mm	<= 5 mm	<= 4 mm	<= 4 mm
Zoom Scan (Δz)	<= 5 mm	<= 5 mm	<= 4 mm	<= 3 mm	<= 2 mm
Zoom Scan Volume	>= 30 mm	>= 30 mm	>= 28 mm	>= 25 mm	>= 22 mm

Note:

When zoom scan is required and report SAR is <= 1.4 W/kg, the zoom scan resolution of $\Delta x / \Delta y$ (2-3GHz: <= 8 mm, 3-4GHz: <= 7 mm, 4-6GHz: <= 5 mm) may be applied.

3.4.2 Volume Scan Procedure

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

3.4.3 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drift more than 5%, the SAR will be retested.

3.4.4 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

3.4.5 SAR Averaged Methods

In DASY, the interpolation and extrapolation are both based on the modified Quadratic Shepard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5 mm.

4. SAR Measurement Evaluation

4.1 EUT Configuration and Setting

<Considerations Related to WLAN for Setup and Testing>

In general, various vendor specific external test software and chipset based internal test modes are typically used for SAR measurement. These chipset based test mode utilities are generally hardware and manufacturer dependent, and often include substantial flexibility to reconfigure or reprogram a device. A Wi-Fi device must be configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools for SAR measurement. The test frequencies established using test mode must correspond to the actual channel frequencies. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92 - 96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. In addition, a periodic transmission duty factor is required for current generation SAR systems to measure SAR correctly. The reported SAR must be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

According to KDB 248227 D01, this device has installed WLAN engineering testing software which can provide continuous transmitting RF signal. During WLAN SAR testing, this device was operated to transmit continuously at the maximum transmission duty with specified transmission mode, operating frequency, lowest data rate, and maximum output power.

Initial Test Configuration

An initial test configuration is determined for OFDM transmission modes in 2.4 GHz and 5 GHz bands according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency band. When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band.

Subsequent Test Configuration

SAR measurement requirements for the remaining 802.11 transmission mode configurations that have not been tested in the initial test configuration are determined separately for each standalone and aggregated frequency band, in each exposure condition, according to the maximum output power specified for production units. Additional power measurements may be required to determine if SAR measurements are required for subsequent highest output power channels in a subsequent test configuration. When the highest reported SAR for the initial test configuration according to the initial test position or fixed exposure position requirements, is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for that subsequent test configuration.

SAR Test Configuration and Channel Selection

When multiple channel bandwidth configurations in a frequency band have the same specified maximum output power, the initial test configuration is using largest channel bandwidth, lowest order modulation, lowest data rate, and lowest order 802.11 mode (i.e., 802.11a is chosen over 802.11n then 802.11ac or 802.11g is chosen over 802.11n). After an initial test configuration is determined, if multiple test channels have the same measured maximum output power, the channel chosen for SAR measurement is determined according to the following.

- 1) The channel closest to mid-band frequency is selected for SAR measurement.
- 2) For channels with equal separation from mid-band frequency; for example, high and low channels or two mid-band channels, the higher frequency (number) channel is selected for SAR measurement.

Test Reduction for U-NII-1 (5.2 GHz) and U-NII-2A (5.3 GHz) Bands

For devices that operate in both U-NII bands using the same transmitter and antenna(s), SAR test reduction is determined according to the following.

- 1) When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition).
- 2) When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for the band with lower maximum output power in that test configuration.

<Considerations Related to Bluetooth for Setup and Testing>

This device has installed Bluetooth engineering testing software which can provide continuous transmitting RF signal. During Bluetooth SAR testing, this device was operated to transmit continuously at the maximum transmission duty with specified transmission mode, operating frequency, lowest data rate, and maximum output power.

4.2 EUT Testing Position

4.2.1 Body Exposure Conditions

For full-size tablet, according to KDB 616217 D04, SAR evaluation is required for back surface and edges of the devices. The back surface and edges of the tablet are tested with the tablet touching the phantom. Exposures from antennas through the front surface of the display section of a tablet are generally limited to the user's hands. Exposures to hands for typical consumer transmitters used in tablets are not expected to exceed the extremity SAR limit; therefore, SAR evaluation for the front surface of tablet display screens are generally not necessary. When voice mode is supported on a tablet and it is limited to speaker mode or headset operations only, additional SAR testing for this type of voice use is not required.

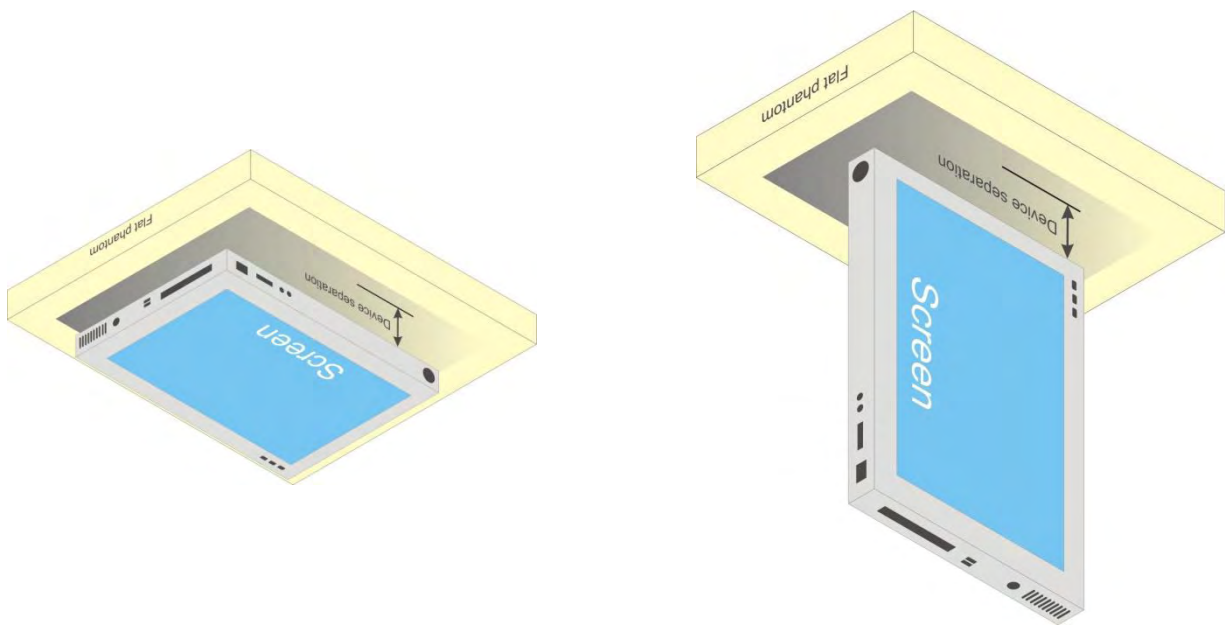


Fig-4.1 Illustration for Tablet Setup

FCC SAR Test Report

4.2.2 SAR Test Exclusion Evaluations

According to KDB 447498 D01, the SAR test exclusion condition is based on source-based time-averaged maximum conducted output power, adjusted for tune-up tolerance, and the minimum test separation distance required for the exposure conditions. The SAR exclusion threshold is determined by the following formula.

1. For the test separation distance ≤ 50 mm

$$\frac{\text{Max. Tune up Power}_{(mW)}}{\text{Min. Test Separation Distance}_{(mm)}} \times \sqrt{f_{(GHz)}} \leq 3.0 \text{ for SAR-1g, } \leq 7.5 \text{ for SAR-10g}$$

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

2. For the test separation distance > 50 mm, and the frequency at 100 MHz to 1500 MHz

$$\left[(\text{Threshold at 50 mm in Step 1}) + (\text{Test Separation Distance} - 50 \text{ mm}) \times \left(\frac{f_{(MHz)}}{150} \right) \right]_{(mW)}$$

3. For the test separation distance > 50 mm, and the frequency at > 1500 MHz to 6 GHz

$$[(\text{Threshold at 50 mm in Step 1}) + (\text{Test Separation Distance} - 50 \text{ mm}) \times 10]_{(mW)}$$

<For WLAN Ant-0>

Mode	Max. Tune-up Power (dBm)	Max. Tune-up Power (mW)	Rear Face			Left Side			Right Side			Top Side			Bottom Side		
			Ant. to Surface (mm)	Calculated Result	Require SAR Testing?	Ant. to Surface (mm)	Calculated Result	Require SAR Testing?	Ant. to Surface (mm)	Calculated Result	Require SAR Testing?	Ant. to Surface (mm)	Calculated Result	Require SAR Testing?	Ant. to Surface (mm)	Calculated Result	Require SAR Testing?
WLAN 2.4G	15.0	31.62	5	9.92	Yes	259.75	2193 mW	No	2.8	9.92	Yes	124.6	842 mW	No	37.2	1.33	No
WLAN 5.2G	13.5	22.39	5	10.25	Yes	259.75	2163 mW	No	2.8	10.25	Yes	124.6	812 mW	No	37.2	1.38	No
WLAN 5.3G	13.5	22.39	5	10.33	Yes	259.75	2163 mW	No	2.8	10.33	Yes	124.6	811 mW	No	37.2	1.39	No
WLAN 5.6G	13.5	22.39	5	10.69	Yes	259.75	2160 mW	No	2.8	10.69	Yes	124.6	809 mW	No	37.2	1.44	No
WLAN 5.8G	13.5	22.39	5	10.81	Yes	259.75	2160 mW	No	2.8	10.81	Yes	124.6	808 mW	No	37.2	1.45	No

<For BT/WLAN Ant-1>

Mode	Max. Tune-up Power (dBm)	Max. Tune-up Power (mW)	Rear Face			Left Side			Right Side			Top Side			Bottom Side		
			Ant. to Surface (mm)	Calculated Result	Require SAR Testing?	Ant. to Surface (mm)	Calculated Result	Require SAR Testing?	Ant. to Surface (mm)	Calculated Result	Require SAR Testing?	Ant. to Surface (mm)	Calculated Result	Require SAR Testing?	Ant. to Surface (mm)	Calculated Result	Require SAR Testing?
WLAN 2.4G	15.0	31.62	5	9.92	Yes	2.25	9.92	Yes	261.3	2209 mW	No	162.15	1217 mW	No	40	1.24	No
WLAN 5.2G	13.5	22.39	5	10.25	Yes	2.25	10.25	Yes	261.3	2179 mW	No	162.15	1187 mW	No	40	1.28	No
WLAN 5.3G	13.5	22.39	5	10.33	Yes	2.25	10.33	Yes	261.3	2178 mW	No	162.15	1187 mW	No	40	1.29	No
WLAN 5.6G	13.5	22.39	5	10.69	Yes	2.25	10.69	Yes	261.3	2176 mW	No	162.15	1184 mW	No	40	1.34	No
WLAN 5.8G	13.5	22.39	5	10.81	Yes	2.25	10.81	Yes	261.3	2175 mW	No	162.15	1184 mW	No	40	1.35	No
BT	5.2	3.31	5	1.04	No	2.25	1.04	No	261.3	2208 mW	No	162.15	1217 mW	No	40	0.13	No

FCC SAR Test Report

4.2.3 Simultaneous Transmission Possibilities

The simultaneous transmission possibilities for this device are listed as below.

Simultaneous TX Combination	Capable Transmit Configurations	Body Exposure Condition
1	GSM850 (Data) + WLAN Ant 0 (Data) + WLAN Ant 1 (Data)	Yes
2	GSM1900 (Data) + WLAN Ant 0 (Data) + WLAN Ant 1 (Data)	Yes
3	WCDMA II (Data) + WLAN Ant 0 (Data) + WLAN Ant 1 (Data)	Yes
4	WCDMA IV (Data) + WLAN Ant 0 (Data) + WLAN Ant 1 (Data)	Yes
5	WCDMA V (Data) + WLAN Ant 0 (Data) + WLAN Ant 1 (Data)	Yes
6	CDMA BC0 (Data) + WLAN Ant 0 (Data) + WLAN Ant 1 (Data)	Yes
7	CDMA BC1 (Data) + WLAN Ant 0 (Data) + WLAN Ant 1 (Data)	Yes
8	CDMA BC10 (Data) + WLAN Ant 0 (Data) + WLAN Ant 1 (Data)	Yes
9	LTE 2 (Data) + WLAN Ant 0 (Data) + WLAN Ant 1 (Data)	Yes
10	LTE 4 (Data) + WLAN Ant 0 (Data) + WLAN Ant 1 (Data)	Yes
11	LTE 5 (Data) + WLAN Ant 0 (Data) + WLAN Ant 1 (Data)	Yes
12	LTE 13 (Data) + WLAN Ant 0 (Data) + WLAN Ant 1 (Data)	Yes
13	LTE 17 (Data) + WLAN Ant 0 (Data) + WLAN Ant 1 (Data)	Yes
14	LTE 25 (Data) + WLAN Ant 0 (Data) + WLAN Ant 1 (Data)	Yes
15	GSM850 (Data) + WLAN Ant 0 (Data)+ BT Ant 1 (Data)	Yes
16	GSM1900 (Data) + WLAN Ant 0 (Data)+ BT Ant 1 (Data)	Yes
17	WCDMA II (Data) + WLAN Ant 0 (Data)+ BT Ant 1 (Data)	Yes
18	WCDMA IV (Data) + WLAN Ant 0 (Data)+ BT Ant 1 (Data)	Yes
19	WCDMA V (Data) + WLAN Ant 0 (Data)+ BT Ant 1 (Data)	Yes
20	CDMA BC0 (Data) + WLAN Ant 0 (Data)+ BT Ant 1 (Data)	Yes
21	CDMA BC1 (Data) + WLAN Ant 0 (Data)+ BT Ant 1 (Data)	Yes
22	CDMA BC10 (Data) + WLAN Ant 0 (Data)+ BT Ant 1 (Data)	Yes
23	LTE 2 (Data) + WLAN Ant 0 (Data)+ BT Ant 1 (Data)	Yes
24	LTE 4 (Data) + WLAN Ant 0 (Data)+ BT Ant 1 (Data)	Yes
25	LTE 5 (Data) + WLAN Ant 0 (Data)+ BT Ant 1 (Data)	Yes
26	LTE 13 (Data) + WLAN Ant 0 (Data)+ BT Ant 1 (Data)	Yes
27	LTE 17 (Data) + WLAN Ant 0 (Data)+ BT Ant 1 (Data)	Yes
28	LTE 25 (Data) + WLAN Ant 0 (Data)+ BT Ant 1 (Data)	Yes

Note:

1. The WLAN and Bluetooth can transmit simultaneously.

FCC SAR Test Report

4.3 Tissue Verification

The measuring results for tissue simulating liquid are shown as below.

Test Date	Tissue Type	Frequency (MHz)	Liquid Temp. (°C)	Measured Conductivity (σ)	Measured Permittivity (ϵ_r)	Target Conductivity (σ)	Target Permittivity (ϵ_r)	Conductivity Deviation (%)	Permittivity Deviation (%)
Jul. 12, 2016	Body	2450	23.5	1.996	51.281	1.95	52.7	2.36	-2.69
Jul. 15, 2016	Body	2450	23.6	2.014	50.654	1.95	52.7	3.28	-3.88
Jul. 16, 2016	Body	2450	23.4	2.013	50.777	1.95	52.7	3.23	-3.65
Jul. 12, 2016	Body	5250	23.5	5.370	48.944	5.36	48.9	0.19	0.09
Jul. 16, 2016	Body	5600	23.3	5.852	48.725	5.77	48.5	1.42	0.46
Jul. 16, 2016	Body	5800	23.3	6.113	48.226	6.00	48.2	1.88	0.05

Note:

The dielectric properties of the tissue simulating liquid must be measured within 24 hours before the SAR testing and within $\pm 5\%$ of the target values. Liquid temperature during the SAR testing must be within $\pm 2^\circ\text{C}$.

4.4 System Validation

The SAR measurement system was validated according to procedures in KDB 865664 D01. The validation status in tabulated summary is as below.

Test Date	Probe S/N	Calibration Point		Measured Conductivity (σ)	Measured Permittivity (ϵ_r)	Validation for CW			Validation for Modulation		
						Sensitivity Range	Probe Linearity	Probe Isotropy	Modulation Type	Duty Factor	PAR
Jul. 12, 2016	7350	Body	2450	1.996	51.281	Pass	Pass	Pass	OFDM	N/A	Pass
Jul. 15, 2016	7350	Body	2450	2.014	50.654	Pass	Pass	Pass	OFDM	N/A	Pass
Jul. 16, 2016	7350	Body	2450	2.013	50.777	Pass	Pass	Pass	N/A	N/A	N/A
Jul. 12, 2016	7350	Body	5250	5.370	48.944	Pass	Pass	Pass	OFDM	N/A	Pass
Jul. 16, 2016	7350	Body	5600	5.852	48.725	Pass	Pass	Pass	OFDM	N/A	Pass
Jul. 16, 2016	7350	Body	5800	6.113	48.226	Pass	Pass	Pass	OFDM	N/A	Pass

4.5 System Verification

The measuring result for system verification is tabulated as below.

Test Date	Mode	Frequency (MHz)	1W Target SAR-1g (W/kg)	Measured SAR-1g (W/kg)	Normalized to 1W SAR-1g (W/kg)	Deviation (%)	Dipole S/N	Probe S/N	DAE S/N
Jul. 12, 2016	Body	2450	51.10	12.30	49.20	-3.72	737	7350	1305
Jul. 15, 2016	Body	2450	51.10	13.20	52.80	3.33	737	7350	1305
Jul. 16, 2016	Body	2450	51.10	12.20	48.80	-4.50	737	7350	1305
Jul. 12, 2016	Body	5250	76.40	7.53	75.30	-1.44	1019	7350	1305
Jul. 16, 2016	Body	5600	79.80	7.98	79.80	0.00	1019	7350	1305
Jul. 16, 2016	Body	5800	77.30	8.04	80.40	4.01	1019	7350	1305

Note:

Comparing to the reference SAR value provided by SPEAG, the validation data should be within its specification of 10 %. The result indicates the system check can meet the variation criterion and the plots can be referred to Appendix A of this report.

FCC SAR Test Report

4.6 Maximum Output Power

4.6.1 Maximum Conducted Power

The maximum conducted average power (Unit: dBm) including tune-up tolerance is shown as below.

Mode	2.4G WLAN	5.2G WLAN	5.3G WLAN	5.6G WLAN	5.8G WLAN
802.11b	Ant0 CH1-12:15.0 CH13:11.0 Ant1 CH1-11:15.0 CH12:12.5 CH13:6.5	N/A	N/A	N/A	N/A
802.11g	Ant0 CH1-11:15.0 CH12:12.0 CH13:0.0 Ant1 CH1-11:15.0 CH12:11.0 CH13:-1.5	N/A	N/A	N/A	N/A
802.11a	N/A	Ant0:13.5 Ant1:13.5	Ant0:13.5 Ant1:13.5	Ant0:13.5 Ant1:13.5	Ant0:13.5 Ant1:13.5
802.11n HT20	Ant0 CH1-11:15.0 CH12:12.0 CH13:-0.5 Ant1 CH1-11:15.0 CH12:11.0 CH13:-1.0	Ant0:13.5 Ant1:13.5	Ant0:13.5 Ant1:13.5	Ant0:13.5 Ant1:13.5	Ant0:13.5 Ant1:13.5
802.11n HT40	Ant0 CH3-8:15.0 CH9:13.0 CH10:9.5 CH11:-1.0 Ant1 CH3:13.5 CH4-8:15.0 CH9:9.5 CH10:6.5 CH11:-1.0	Ant0:13.5 Ant1:13.5	Ant0:13.5 Ant1:13.5	Ant0:13.5 Ant1:13.5	Ant0:13.5 Ant1:13.5
802.11ac VHT80	N/A	Ant0:13.5 Ant1:13.5	Ant0:13.5 Ant1:13.5	Ant0:13.5 Ant1:13.5	Ant0:13.5 Ant1:13.5

Mode	2.4G Bluetooth
Bluetooth DH	5.2

FCC SAR Test Report

4.6.2 Measured Conducted Power Result

The measuring conducted average power (Unit: dBm) is shown as below.

<WLAN 2.4G>

Mode	802.11b				
Channel / Frequency (MHz)	1 (2412)	6 (2437)	11 (2462)	12 (2467)	13 (2472)
Average Power (Ant-0)	14.88	14.89	14.77	14.86	10.84
Average Power (Ant-1)	14.82	14.81	14.85	12.46	6.47

<WLAN 5.2G>

Mode	802.11a			
Channel / Frequency (MHz)	36 (5180)	40 (5200)	44 (5220)	48 (5240)
Average Power (Ant-1)	13.13	13.20	13.14	13.23
Mode	802.11n (HT20)			
Channel / Frequency (MHz)	36 (5180)	40 (5200)	44 (5220)	48 (5240)
Average Power (Ant-1)	13.14	13.10	13.11	13.20
Mode	802.11n (HT40)			
Channel / Frequency (MHz)	38 (5190)		46 (5230)	
Average Power (Ant-1)	13.19		13.24	
Mode	802.11ac (VHT80)			
Channel / Frequency (MHz)	42 (5210)			
Average Power (Ant-0)	13.32			
Average Power (Ant-1)	13.28			

<WLAN 5.3G>

Mode	802.11a			
Channel / Frequency (MHz)	52 (5260)	56 (5280)	60 (5300)	64 (5320)
Average Power (Ant-1)	13.25	13.31	13.16	13.23
Mode	802.11n (HT20)			
Channel / Frequency (MHz)	52 (5260)	56 (5280)	60 (5300)	64 (5320)
Average Power (Ant-1)	13.34	13.24	13.31	13.36
Mode	802.11n (HT40)			
Channel / Frequency (MHz)	54 (5270)		62 (5310)	
Average Power (Ant-1)	13.29		13.32	
Mode	802.11ac (VHT80)			
Channel / Frequency (MHz)	58 (5290)			
Average Power (Ant-0)	13.37			
Average Power (Ant-1)	13.39			

<WLAN 5.6G>

Mode	802.11ac (VHT80)		
Channel / Frequency (MHz)	106 (5530)	122 (5610)	138 (5690)
Average Power (Ant-0)	13.35	13.34	13.36
Average Power (Ant-1)	13.42	13.35	13.34

<WLAN 5.8G>

Mode	802.11ac (VHT80)
Channel / Frequency (MHz)	155 (5775)
Average Power (Ant-0)	13.38
Average Power (Ant-1)	13.37

FCC SAR Test Report

<Bluetooth>

Mode	Bluetooth			
	Channel / Frequency (MHz)	0 (2402)	39 (2441)	78 (2480)
Average Power		3.39	3.87	3.22

4.7 SAR Testing Results

4.7.1 SAR Test Reduction Considerations

<KDB 447498 D01, General RF Exposure Guidance>

Testing of other required channels within the operating mode of a frequency band is not required when the reported SAR for the mid-band or highest output power channel is:

- (1) ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
- (2) ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- (3) ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

<KDB 248227 D01, SAR Guidance for Wi-Fi Transmitters>

- (1) For handsets operating next to ear, hotspot mode or mini-tablet configurations, the initial test position procedures were applied. The test position with the highest extrapolated peak SAR will be used as the initial test position. When the reported SAR of initial test position is ≤ 0.4 W/kg, SAR testing for remaining test positions is not required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is ≤ 0.8 W/kg or all test positions are measured.
- (2) For WLAN 2.4 GHz, the highest measured maximum output power channel for DSSS was selected for SAR measurement. When the reported SAR is ≤ 0.8 W/kg, no further SAR testing is required. Otherwise, SAR is evaluated at the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel. For OFDM modes (802.11g/n), SAR is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and it is ≤ 1.2 W/kg.
- (3) For WLAN 5 GHz, the initial test configuration was selected according to the transmission mode with the highest maximum output power. When the reported SAR of initial test configuration is > 0.8 W/kg, SAR is required for the subsequent highest measured output power channel until the reported SAR result is ≤ 1.2 W/kg or all required channels are measured. For other transmission modes, SAR is not required when the highest reported SAR for initial test configuration is adjusted by the ratio of subsequent test configuration to initial test configuration specified maximum output power and it is ≤ 1.2 W/kg.

FCC SAR Test Report

4.7.2 SAR Results for Body Exposure Condition (Separation Distance is 0 cm Gap)

Plot No.	Band	Mode	Test Position	Ch.	Tx Antenna	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	2.4G WLAN	802.11b	Rear Face	6	0	15.0	14.89	1.03	-0.09	0.333	0.34
	2.4G WLAN	802.11b	Rear Face	11	1	15.0	14.85	1.04	0	0.341	0.35
	2.4G WLAN	802.11b	Left Side	6	0	15.0	14.89	1.03	0.12	0	0
	2.4G WLAN	802.11b	Left Side	11	1	15.0	14.85	1.04	-0.12	0.823	0.85
	2.4G WLAN	802.11b	Left Side	1	1	15.0	14.82	1.04	-0.04	0.78	0.81
	2.4G WLAN	802.11b	Right Side	6	0	15.0	14.89	1.03	-0.10	0.944	0.97
01	2.4G WLAN	802.11b	Right Side	1	0	15.0	14.88	1.03	-0.10	1.02	1.05
	2.4G WLAN	802.11b	Right Side	1	0	15.0	14.88	1.03	0.08	0.994	1.02
	2.4G WLAN	802.11b	Right Side	11	1	15.0	14.85	1.04	0.04	0	0
	2.4G WLAN	802.11b	Top Side	6	0	15.0	14.89	1.03	0.08	0.00763	0.01
	2.4G WLAN	802.11b	Top Side	11	1	15.0	14.85	1.04	0.05	0.00843	0.01
	5.3G WLAN	802.11ac VH80	Rear Face	58	0	13.5	13.37	1.03	-0.10	0.112	0.12
	5.3G WLAN	802.11ac VH80	Rear Face	58	1	13.5	13.39	1.03	-0.11	0.377	0.39
	5.3G WLAN	802.11ac VH80	Left Side	58	0	13.5	13.37	1.03	0.11	0	0
	5.2G WLAN	802.11a	Left Side	48	1	13.5	13.23	1.06	0.03	1.1	1.17
	5.2G WLAN	802.11a	Left Side	40	1	13.5	13.20	1.07	0.04	1.13	1.21
	5.2G WLAN	802.11a	Left Side	44	1	13.5	13.14	1.09	0.09	1.07	1.16
	5.2G WLAN	802.11n HT20	Left Side	48	1	13.5	13.20	1.07	0.18	1.04	1.11
	5.2G WLAN	802.11n HT20	Left Side	36	1	13.5	13.14	1.09	0.16	1.24	1.35
	5.2G WLAN	802.11n HT20	Left Side	44	1	13.5	13.11	1.09	-0.13	1.18	1.29
	5.2G WLAN	802.11n HT20	Left Side	40	1	13.5	13.10	1.10	-0.13	1.08	1.18
	5.2G WLAN	802.11n HT40	Left Side	46	1	13.5	13.24	1.06	0.14	1.25	1.33
	5.2G WLAN	802.11n HT40	Left Side	38	1	13.5	13.19	1.07	-0.07	1.14	1.22
	5.2G WLAN	802.11ac VH80	Left Side	42	1	13.5	13.28	1.05	0.07	1.29	1.36
	5.3G WLAN	802.11a	Left Side	56	1	13.5	13.31	1.04	0.13	1.27	1.33
	5.3G WLAN	802.11a	Left Side	52	1	13.5	13.25	1.06	0.15	1.22	1.29
	5.3G WLAN	802.11a	Left Side	64	1	13.5	13.23	1.06	-0.17	1.14	1.21
	5.3G WLAN	802.11a	Left Side	60	1	13.5	13.16	1.08	-0.02	1.03	1.11
	5.3G WLAN	802.11n HT20	Left Side	64	1	13.5	13.36	1.03	-0.11	1.24	1.28
	5.3G WLAN	802.11n HT20	Left Side	52	1	13.5	13.34	1.04	-0.19	1.21	1.26
	5.3G WLAN	802.11n HT20	Left Side	60	1	13.5	13.31	1.04	0.11	1.15	1.20
	5.3G WLAN	802.11n HT20	Left Side	56	1	13.5	13.24	1.06	-0.11	1.13	1.20
	5.3G WLAN	802.11n HT40	Left Side	62	1	13.5	13.32	1.04	-0.10	1.19	1.24
	5.3G WLAN	802.11n HT40	Left Side	54	1	13.5	13.29	1.05	-0.02	1.21	1.27
02	5.3G WLAN	802.11ac VH80	Left Side	58	1	13.5	13.39	1.03	-0.11	1.36	1.39
	5.3G WLAN	802.11ac VH80	Left Side	58	1	13.5	13.39	1.03	0.06	1.31	1.34
	5.3G WLAN	802.11ac VH80	Right Side	58	0	13.5	13.37	1.03	-0.02	0.212	0.22
	5.3G WLAN	802.11ac VH80	Right Side	58	1	13.5	13.39	1.03	0.05	0	0
	5.3G WLAN	802.11ac VH80	Top Side	58	0	13.5	13.37	1.03	0.05	0.00925	0.01
	5.3G WLAN	802.11ac VH80	Top Side	58	1	13.5	13.39	1.03	-0.05	0.00786	0.01
	5.6G WLAN	802.11ac VH80	Rear Face	138	0	13.5	13.36	1.03	-0.07	0.189	0.20
	5.6G WLAN	802.11ac VH80	Rear Face	106	1	13.5	13.42	1.02	0.10	0.48	0.49
	5.6G WLAN	802.11ac VH80	Left Side	138	0	13.5	13.36	1.03	0.10	0	0
	5.6G WLAN	802.11ac VH80	Left Side	106	1	13.5	13.42	1.02	0.10	1.02	1.04
	5.6G WLAN	802.11ac VH80	Left Side	106	1	13.5	13.42	1.02	0.10	0.997	1.02
	5.6G WLAN	802.11ac VH80	Left Side	122	1	13.5	13.35	1.04	-0.01	1	1.04
03	5.6G WLAN	802.11ac VH80	Left Side	138	1	13.5	13.34	1.04	0.10	1.02	1.06
	5.6G WLAN	802.11ac VH80	Left Side	138	1	13.5	13.34	1.04	0.04	0.998	1.04
	5.6G WLAN	802.11ac VH80	Right Side	138	0	13.5	13.36	1.03	0.08	0.623	0.64
	5.6G WLAN	802.11ac VH80	Right Side	106	1	13.5	13.42	1.02	0.06	0	0
	5.6G WLAN	802.11ac VH80	Top Side	138	0	13.5	13.36	1.03	0	0.02	0.02
	5.6G WLAN	802.11ac VH80	Top Side	106	1	13.5	13.42	1.02	0	0.042	0.04

FCC SAR Test Report

Plot No.	Band	Mode	Test Position	Ch.	Tx Antenna	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	5.8G WLAN	802.11ac VH80	Rear Face	155	0	13.5	13.38	1.03	0	0.107	0.11
	5.8G WLAN	802.11ac VH80	Rear Face	155	1	13.5	13.37	1.03	0	0.523	0.54
	5.8G WLAN	802.11ac VH80	Left Side	155	0	13.5	13.38	1.03	0.05	0	0
04	5.8G WLAN	802.11ac VH80	Left Side	155	1	13.5	13.37	1.03	0.07	0.913	0.94
	5.8G WLAN	802.11ac VH80	Left Side	155	1	13.5	13.37	1.03	0.01	0.896	0.92
	5.8G WLAN	802.11ac VH80	Right Side	155	0	13.5	13.38	1.03	-0.14	0.865	0.89
	5.8G WLAN	802.11ac VH80	Right Side	155	1	13.5	13.37	1.03	-0.04	0	0
	5.8G WLAN	802.11ac VH80	Top Side	155	0	13.5	13.38	1.03	0	0.05	0.05
	5.8G WLAN	802.11ac VH80	Top Side	155	1	13.5	13.37	1.03	0	0.038	0.04

Plot No.	Band	Test Position	Ch.	Tx Antenna	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	Bluetooth	Rear Face	39	1	5.2	3.87	1.36	0	0	0.00
	Bluetooth	Top Side	39	1	5.2	3.87	1.36	0	0.0000148	0.00
05	Bluetooth	Left Side	39	1	5.2	3.87	1.36	0	0.00778	0.01

4.7.3 SAR Measurement Variability

According to KDB 865664 D01, SAR measurement variability was assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. Alternatively, if the highest measured SAR for both head and body tissue-equivalent media are ≤ 1.45 W/kg and the ratio of these highest SAR values, i.e., largest divided by smallest value, is ≤ 1.10 , the highest SAR configuration for either head or body tissue-equivalent medium may be used to perform the repeated measurement. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR repeated measurement procedure:

1. When the highest measured SAR is < 0.80 W/kg, repeated measurement is not required.
2. When the highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
3. If the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 , or when the original or repeated measurement is ≥ 1.45 W/kg, perform a second repeated measurement.
4. If the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 , and the original, first or second repeated measurement is ≥ 1.5 W/kg, perform a third repeated measurement.

Band	Mode	Test Position	Ch.	Original Measured SAR-1g (W/kg)	1st Repeated SAR-1g (W/kg)	L/S Ratio	2nd Repeated SAR-1g (W/kg)	L/S Ratio	3rd Repeated SAR-1g (W/kg)	L/S Ratio
2.4G WLAN	802.11b	Right Side	1	1.02	0.994	1.03	N/A	N/A	N/A	N/A
5.3G WLAN	802.11 ac VH80	Left Side	58	1.36	1.31	1.04	N/A	N/A	N/A	N/A
5.6G WLAN	802.11 ac VH80	Left Side	106	1.02	0.997	1.02	N/A	N/A	N/A	N/A
5.6G WLAN	802.11 ac VH80	Left Side	138	1.02	0.998	1.02	N/A	N/A	N/A	N/A
5.8G WLAN	802.11 ac VH80	Left Side	155	0.913	0.896	1.02	N/A	N/A	N/A	N/A

4.7.4 Simultaneous Multi-band Transmission Evaluation

<Estimated SAR Calculation>

According to KDB 447498 D01, when standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR was estimated according to following formula to result in substantially conservative SAR values of ≤ 0.4 W/kg to determine simultaneous transmission SAR test exclusion.

$$\text{Estimated SAR} = \frac{\text{Max. Tune up Power}_{(mW)}}{\text{Min. Test Separation Distance}_{(mm)}} \times \frac{\sqrt{f_{(GHz)}}}{7.5}$$

If the minimum test separation distance is < 5 mm, a distance of 5 mm is used for estimated SAR calculation. When the test separation distance is > 50 mm, the 0.4 W/kg is used for SAR-1g.

Mode / Band	Frequency (GHz)	Max. Tune-up Power (dBm)	Test Position	Separation Distance (mm)	Estimated SAR (W/kg)
WLAN (DTS)	2.462	15.0	Body	5	0.40
WLAN (NII)	5.3	13.5	Body	5	0.40
WLAN (NII)	5.6	13.5	Body	5	0.40
WLAN (NII)	5.8	13.5	Body	5	0.40
BT (DSS)	2.48	5.2	Body	5	0.14

Note:

1. The separation distance is determined from the outer housing of the EUT to the user.
2. When standalone SAR testing is not required, an estimated SAR can be applied to determine simultaneous transmission SAR test exclusion.

FCC SAR Test Report

<SAR Summation Analysis>

Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneous transmitting antenna. When the sum of SAR_{1g} of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit (SAR_{1g} 1.6 W/kg), the simultaneous transmission SAR is not required. When the sum of SAR_{1g} is greater than the SAR limit (SAR_{1g} 1.6 W/kg), SAR test exclusion is determined by the SPLSR.

No.	Conditions (SAR1 + SAR2 + SAR3)	Exposure Condition	Test Position	Max. SAR1	Max. SAR2	Max. SAR3	SAR Summation	SPLSR Analysis
1	GSM 850 + WLAN Ant 0 (DTS) + WLAN Ant 1 (DTS)	Body	Rear Face	1.020	0.34	0.35	1.710	Analyzed as below
			Left Side	0.726	0.00	0.85	1.576	∑ SAR < 1.6, Not required
			Right Side	0.115	1.05	0.00	1.165	∑ SAR < 1.6, Not required
			Top Side	1.137	0.01	0.01	1.157	∑ SAR < 1.6, Not required
			Bottom Side	0.068	0.40	0.40	0.868	∑ SAR < 1.6, Not required
2	GSM 850 + WLAN Ant 0 (NII) + WLAN Ant 1 (NII)	Body	Rear Face	1.020	0.20	0.49	1.710	Analyzed as below
			Left Side	0.726	0.00	1.39	2.116	Analyzed as below
			Right Side	0.115	0.89	0.00	1.005	∑ SAR < 1.6, Not required
			Top Side	1.137	0.05	0.04	1.227	∑ SAR < 1.6, Not required
			Bottom Side	0.068	0.40	0.40	0.868	∑ SAR < 1.6, Not required
3	GSM 850 + WLAN Ant 0 (DTS) + BT (DSS) Ant 1	Body	Rear Face	1.020	0.34	0.00	1.360	∑ SAR < 1.6, Not required
			Left Side	0.726	0.00	0.01	0.736	∑ SAR < 1.6, Not required
			Right Side	0.115	1.05	0.00	1.165	∑ SAR < 1.6, Not required
			Top Side	1.137	0.01	0.00	1.147	∑ SAR < 1.6, Not required
			Bottom Side	0.068	0.40	0.14	0.608	∑ SAR < 1.6, Not required
4	GSM 850 + WLAN Ant 0 (NII) + BT (DSS) Ant 1	Body	Rear Face	1.020	0.20	0.00	1.220	∑ SAR < 1.6, Not required
			Left Side	0.726	0.00	0.01	0.736	∑ SAR < 1.6, Not required
			Right Side	0.115	0.89	0.00	1.005	∑ SAR < 1.6, Not required
			Top Side	1.137	0.05	0.00	1.187	∑ SAR < 1.6, Not required
			Bottom Side	0.068	0.40	0.14	0.608	∑ SAR < 1.6, Not required

FCC SAR Test Report

No.	Conditions (SAR1 + SAR2 + SAR3)	Exposure Condition	Test Position	Max. SAR1	Max. SAR2	Max. SAR3	SAR Summation	SPLSR Analysis
5	GSM 1900 + WLAN Ant 0 (DTS) + WLAN Ant 1 (DTS)	Body	Rear Face	1.029	0.34	0.35	1.719	Analyzed as below
			Left Side	0.038	0.00	0.85	0.888	Σ SAR < 1.6, Not required
			Right Side	0.400	1.05	0.00	1.450	Σ SAR < 1.6, Not required
			Top Side	1.254	0.01	0.01	1.274	Σ SAR < 1.6, Not required
			Bottom Side	0.400	0.40	0.40	1.200	Σ SAR < 1.6, Not required
6	GSM 1900 + WLAN Ant 0 (NII) + WLAN Ant 1 (NII)	Body	Rear Face	1.029	0.20	0.49	1.719	Analyzed as below
			Left Side	0.038	0.00	1.39	1.428	Σ SAR < 1.6, Not required
			Right Side	0.400	0.89	0.00	1.290	Σ SAR < 1.6, Not required
			Top Side	1.254	0.05	0.04	1.344	Σ SAR < 1.6, Not required
			Bottom Side	0.400	0.40	0.40	1.200	Σ SAR < 1.6, Not required
7	GSM 1900 + WLAN Ant 0 (DTS) + BT (DSS) Ant 1	Body	Rear Face	1.029	0.34	0.00	1.369	Σ SAR < 1.6, Not required
			Left Side	0.038	0.00	0.01	0.048	Σ SAR < 1.6, Not required
			Right Side	0.400	1.05	0.00	1.450	Σ SAR < 1.6, Not required
			Top Side	1.254	0.01	0.00	1.264	Σ SAR < 1.6, Not required
			Bottom Side	0.400	0.40	0.14	0.940	Σ SAR < 1.6, Not required
8	GSM 1900 + WLAN Ant 0 (NII) + BT (DSS) Ant 1	Body	Rear Face	1.029	0.20	0.00	1.229	Σ SAR < 1.6, Not required
			Left Side	0.038	0.00	0.01	0.048	Σ SAR < 1.6, Not required
			Right Side	0.400	0.89	0.00	1.290	Σ SAR < 1.6, Not required
			Top Side	1.254	0.05	0.00	1.304	Σ SAR < 1.6, Not required
			Bottom Side	0.400	0.40	0.14	0.940	Σ SAR < 1.6, Not required

FCC SAR Test Report

No.	Conditions (SAR1 + SAR2 + SAR3)	Exposure Condition	Test Position	Max. SAR1	Max. SAR2	Max. SAR3	SAR Summation	SPLSR Analysis
9	WCDMA II + WLAN Ant 0 (DTS) + WLAN Ant 1 (DTS)	Body	Rear Face	1.128	0.34	0.35	1.818	Analyzed as below
			Left Side	0.037	0.00	0.85	0.887	Σ SAR < 1.6, Not required
			Right Side	0.400	1.05	0.00	1.450	Σ SAR < 1.6, Not required
			Top Side	1.047	0.01	0.01	1.067	Σ SAR < 1.6, Not required
			Bottom Side	0.400	0.40	0.40	1.200	Σ SAR < 1.6, Not required
10	WCDMA II + WLAN Ant 0 (NII) + WLAN Ant 1 (NII)	Body	Rear Face	1.128	0.20	0.49	1.818	Analyzed as below
			Left Side	0.037	0.00	1.39	1.427	Σ SAR < 1.6, Not required
			Right Side	0.400	0.89	0.00	1.290	Σ SAR < 1.6, Not required
			Top Side	1.047	0.05	0.04	1.137	Σ SAR < 1.6, Not required
			Bottom Side	0.400	0.40	0.40	1.200	Σ SAR < 1.6, Not required
11	WCDMA II + WLAN Ant 0 (DTS) + BT (DSS) Ant 1	Body	Rear Face	1.128	0.34	0.00	1.468	Σ SAR < 1.6, Not required
			Left Side	0.037	0.00	0.01	0.047	Σ SAR < 1.6, Not required
			Right Side	0.400	1.05	0.00	1.450	Σ SAR < 1.6, Not required
			Top Side	1.047	0.01	0.00	1.057	Σ SAR < 1.6, Not required
			Bottom Side	0.400	0.40	0.14	0.940	Σ SAR < 1.6, Not required
12	WCDMA II + WLAN Ant 0 (NII) + BT (DSS) Ant 1	Body	Rear Face	1.128	0.20	0.00	1.328	Σ SAR < 1.6, Not required
			Left Side	0.037	0.00	0.01	0.047	Σ SAR < 1.6, Not required
			Right Side	0.400	0.89	0.00	1.290	Σ SAR < 1.6, Not required
			Top Side	1.047	0.05	0.00	1.097	Σ SAR < 1.6, Not required
			Bottom Side	0.400	0.40	0.14	0.940	Σ SAR < 1.6, Not required

FCC SAR Test Report

No.	Conditions (SAR1 + SAR2 + SAR3)	Exposure Condition	Test Position	Max. SAR1	Max. SAR2	Max. SAR3	SAR Summation	SPLSR Analysis
13	WCDMA IV + WLAN Ant 0 (DTS) + WLAN Ant 1 (DTS)	Body	Rear Face	1.032	0.34	0.35	1.722	Analyzed as below
			Left Side	0.284	0.00	0.85	1.134	Σ SAR < 1.6, Not required
			Right Side	0.400	1.05	0.00	1.450	Σ SAR < 1.6, Not required
			Top Side	0.962	0.01	0.01	0.982	Σ SAR < 1.6, Not required
			Bottom Side	0.400	0.40	0.40	1.200	Σ SAR < 1.6, Not required
14	WCDMA IV + WLAN Ant 0 (NII) + WLAN Ant 1 (NII)	Body	Rear Face	1.032	0.20	0.49	1.722	Analyzed as below
			Left Side	0.284	0.00	1.39	1.674	Analyzed as below
			Right Side	0.400	0.89	0.00	1.290	Σ SAR < 1.6, Not required
			Top Side	0.962	0.05	0.04	1.052	Σ SAR < 1.6, Not required
			Bottom Side	0.400	0.40	0.40	1.200	Σ SAR < 1.6, Not required
15	WCDMA IV + WLAN Ant 0 (DTS) + BT (DSS) Ant 1	Body	Rear Face	1.032	0.34	0.00	1.372	Σ SAR < 1.6, Not required
			Left Side	0.284	0.00	0.01	0.294	Σ SAR < 1.6, Not required
			Right Side	0.400	1.05	0.00	1.450	Σ SAR < 1.6, Not required
			Top Side	0.962	0.01	0.00	0.972	Σ SAR < 1.6, Not required
			Bottom Side	0.400	0.40	0.14	0.940	Σ SAR < 1.6, Not required
16	WCDMA IV + WLAN Ant 0 (NII) + BT (DSS) Ant 1	Body	Rear Face	1.032	0.20	0.00	1.232	Σ SAR < 1.6, Not required
			Left Side	0.284	0.00	0.01	0.294	Σ SAR < 1.6, Not required
			Right Side	0.400	0.89	0.00	1.290	Σ SAR < 1.6, Not required
			Top Side	0.962	0.05	0.00	1.012	Σ SAR < 1.6, Not required
			Bottom Side	0.400	0.40	0.14	0.940	Σ SAR < 1.6, Not required

FCC SAR Test Report

No.	Conditions (SAR1 + SAR2 + SAR3)	Exposure Condition	Test Position	Max. SAR1	Max. SAR2	Max. SAR3	SAR Summation	SPLSR Analysis
17	WCDMA V + WLAN Ant 0 (DTS) + WLAN Ant 1 (DTS)	Body	Rear Face	1.096	0.34	0.35	1.786	Analyzed as below
			Left Side	0.383	0.00	0.85	1.233	Σ SAR < 1.6, Not required
			Right Side	0.400	1.05	0.00	1.450	Σ SAR < 1.6, Not required
			Top Side	1.344	0.01	0.01	1.364	Σ SAR < 1.6, Not required
			Bottom Side	0.400	0.40	0.40	1.200	Σ SAR < 1.6, Not required
18	WCDMA V + WLAN Ant 0 (NII) + WLAN Ant 1 (NII)	Body	Rear Face	1.096	0.20	0.49	1.786	Analyzed as below
			Left Side	0.383	0.00	1.39	1.773	Analyzed as below
			Right Side	0.400	0.89	0.00	1.290	Σ SAR < 1.6, Not required
			Top Side	1.344	0.05	0.04	1.434	Σ SAR < 1.6, Not required
			Bottom Side	0.400	0.40	0.40	1.200	Σ SAR < 1.6, Not required
19	WCDMA V + WLAN Ant 0 (DTS) + BT (DSS) Ant 1	Body	Rear Face	1.096	0.34	0.00	1.436	Σ SAR < 1.6, Not required
			Left Side	0.383	0.00	0.01	0.393	Σ SAR < 1.6, Not required
			Right Side	0.400	1.05	0.00	1.450	Σ SAR < 1.6, Not required
			Top Side	1.344	0.01	0.00	1.354	Σ SAR < 1.6, Not required
			Bottom Side	0.400	0.40	0.14	0.940	Σ SAR < 1.6, Not required
20	WCDMA V + WLAN Ant 0 (NII) + BT (DSS) Ant 1	Body	Rear Face	1.096	0.20	0.00	1.296	Σ SAR < 1.6, Not required
			Left Side	0.383	0.00	0.01	0.393	Σ SAR < 1.6, Not required
			Right Side	0.400	0.89	0.00	1.290	Σ SAR < 1.6, Not required
			Top Side	1.344	0.05	0.00	1.394	Σ SAR < 1.6, Not required
			Bottom Side	0.400	0.40	0.14	0.940	Σ SAR < 1.6, Not required

FCC SAR Test Report

No.	Conditions (SAR1 + SAR2 + SAR3)	Exposure Condition	Test Position	Max. SAR1	Max. SAR2	Max. SAR3	SAR Summation	SPLSR Analysis
21	CDMA BC0 + WLAN Ant 0 (DTS) + WLAN Ant 1 (DTS)	Body	Rear Face	1.058	0.34	0.35	1.748	Analyzed as below
			Left Side	0.425	0.00	0.85	1.275	Σ SAR < 1.6, Not required
			Right Side	0.400	1.05	0.00	1.450	Σ SAR < 1.6, Not required
			Top Side	1.251	0.01	0.01	1.271	Σ SAR < 1.6, Not required
			Bottom Side	0.400	0.40	0.40	1.200	Σ SAR < 1.6, Not required
22	CDMA BC0 + WLAN Ant 0 (NII) + WLAN Ant 1 (NII)	Body	Rear Face	1.058	0.20	0.49	1.748	Analyzed as below
			Left Side	0.425	0.00	1.39	1.815	Analyzed as below
			Right Side	0.400	0.89	0.00	1.290	Σ SAR < 1.6, Not required
			Top Side	1.251	0.05	0.04	1.341	Σ SAR < 1.6, Not required
			Bottom Side	0.400	0.40	0.40	1.200	Σ SAR < 1.6, Not required
23	CDMA BC0 + WLAN Ant 0 (DTS) + BT (DSS) Ant 1	Body	Rear Face	1.058	0.34	0.00	1.398	Σ SAR < 1.6, Not required
			Left Side	0.425	0.00	0.01	0.435	Σ SAR < 1.6, Not required
			Right Side	0.400	1.05	0.00	1.450	Σ SAR < 1.6, Not required
			Top Side	1.251	0.01	0.00	1.261	Σ SAR < 1.6, Not required
			Bottom Side	0.400	0.40	0.14	0.940	Σ SAR < 1.6, Not required
24	CDMA BC0 + WLAN Ant 0 (NII) + BT (DSS) Ant 1	Body	Rear Face	1.058	0.20	0.00	1.258	Σ SAR < 1.6, Not required
			Left Side	0.425	0.00	0.01	0.435	Σ SAR < 1.6, Not required
			Right Side	0.400	0.89	0.00	1.290	Σ SAR < 1.6, Not required
			Top Side	1.251	0.05	0.00	1.301	Σ SAR < 1.6, Not required
			Bottom Side	0.400	0.40	0.14	0.940	Σ SAR < 1.6, Not required

FCC SAR Test Report

No.	Conditions (SAR1 + SAR2 + SAR3)	Exposure Condition	Test Position	Max. SAR1	Max. SAR2	Max. SAR3	SAR Summation	SPLSR Analysis
25	CDMA BC1 + WLAN Ant 0 (DTS) + WLAN Ant 1 (DTS)	Body	Rear Face	1.217	0.34	0.35	1.907	Analyzed as below
			Left Side	0.068	0.00	0.85	0.918	Σ SAR < 1.6, Not required
			Right Side	0.400	1.05	0.00	1.450	Σ SAR < 1.6, Not required
			Top Side	1.309	0.01	0.01	1.329	Σ SAR < 1.6, Not required
			Bottom Side	0.400	0.40	0.40	1.200	Σ SAR < 1.6, Not required
26	CDMA BC1 + WLAN Ant 0 (NII) + WLAN Ant 1 (NII)	Body	Rear Face	1.217	0.20	0.49	1.907	Analyzed as below
			Left Side	0.068	0.00	1.39	1.458	Σ SAR < 1.6, Not required
			Right Side	0.400	0.89	0.00	1.290	Σ SAR < 1.6, Not required
			Top Side	1.309	0.05	0.04	1.399	Σ SAR < 1.6, Not required
			Bottom Side	0.400	0.40	0.40	1.200	Σ SAR < 1.6, Not required
27	CDMA BC1 + WLAN Ant 0 (DTS) + BT (DSS) Ant 1	Body	Rear Face	1.217	0.34	0.00	1.557	Σ SAR < 1.6, Not required
			Left Side	0.068	0.00	0.01	0.078	Σ SAR < 1.6, Not required
			Right Side	0.400	1.05	0.00	1.450	Σ SAR < 1.6, Not required
			Top Side	1.309	0.01	0.00	1.319	Σ SAR < 1.6, Not required
			Bottom Side	0.400	0.40	0.14	0.940	Σ SAR < 1.6, Not required
28	CDMA BC1 + WLAN Ant 0 (NII) + BT (DSS) Ant 1	Body	Rear Face	1.217	0.20	0.00	1.417	Σ SAR < 1.6, Not required
			Left Side	0.068	0.00	0.01	0.078	Σ SAR < 1.6, Not required
			Right Side	0.400	0.89	0.00	1.290	Σ SAR < 1.6, Not required
			Top Side	1.309	0.05	0.00	1.359	Σ SAR < 1.6, Not required
			Bottom Side	0.400	0.40	0.14	0.940	Σ SAR < 1.6, Not required

FCC SAR Test Report

No.	Conditions (SAR1 + SAR2 + SAR3)	Exposure Condition	Test Position	Max. SAR1	Max. SAR2	Max. SAR3	SAR Summation	SPLSR Analysis
29	CDMA BC10 + WLAN Ant 0 (DTS) + WLAN Ant 1 (DTS)	Body	Rear Face	0.997	0.34	0.35	1.687	Analyzed as below
			Left Side	0.439	0.00	0.85	1.289	Σ SAR < 1.6, Not required
			Right Side	0.400	1.05	0.00	1.450	Σ SAR < 1.6, Not required
			Top Side	1.194	0.01	0.01	1.214	Σ SAR < 1.6, Not required
			Bottom Side	0.400	0.40	0.40	1.200	Σ SAR < 1.6, Not required
30	CDMA BC10 + WLAN Ant 0 (NII) + WLAN Ant 1 (NII)	Body	Rear Face	0.997	0.20	0.49	1.687	Analyzed as below
			Left Side	0.439	0.00	1.39	1.829	Analyzed as below
			Right Side	0.400	0.89	0.00	1.290	Σ SAR < 1.6, Not required
			Top Side	1.194	0.05	0.04	1.284	Σ SAR < 1.6, Not required
			Bottom Side	0.400	0.40	0.40	1.200	Σ SAR < 1.6, Not required
31	CDMA BC10 + WLAN Ant 0 (DTS) + BT (DSS) Ant 1	Body	Rear Face	0.997	0.34	0.00	1.337	Σ SAR < 1.6, Not required
			Left Side	0.439	0.00	0.01	0.449	Σ SAR < 1.6, Not required
			Right Side	0.400	1.05	0.00	1.450	Σ SAR < 1.6, Not required
			Top Side	1.194	0.01	0.00	1.204	Σ SAR < 1.6, Not required
			Bottom Side	0.400	0.40	0.14	0.940	Σ SAR < 1.6, Not required
32	CDMA BC10 + WLAN Ant 0 (NII) + BT (DSS) Ant 1	Body	Rear Face	0.997	0.20	0.00	1.197	Σ SAR < 1.6, Not required
			Left Side	0.439	0.00	0.01	0.449	Σ SAR < 1.6, Not required
			Right Side	0.400	0.89	0.00	1.290	Σ SAR < 1.6, Not required
			Top Side	1.194	0.05	0.00	1.244	Σ SAR < 1.6, Not required
			Bottom Side	0.400	0.40	0.14	0.940	Σ SAR < 1.6, Not required

FCC SAR Test Report

No.	Conditions (SAR1 + SAR2 + SAR3)	Exposure Condition	Test Position	Max. SAR1	Max. SAR2	Max. SAR3	SAR Summation	SPLSR Analysis
33	LTE 2 + WLAN Ant 0 (DTS) + WLAN Ant 1 (DTS)	Body	Rear Face	1.285	0.34	0.35	1.975	Analyzed as below
			Left Side	0.033	0.00	0.85	0.883	Σ SAR < 1.6, Not required
			Right Side	0.400	1.05	0.00	1.450	Σ SAR < 1.6, Not required
			Top Side	1.322	0.01	0.01	1.342	Σ SAR < 1.6, Not required
			Bottom Side	0.400	0.40	0.40	1.200	Σ SAR < 1.6, Not required
34	LTE 2 + WLAN Ant 0 (NII) + WLAN Ant 1 (NII)	Body	Rear Face	1.285	0.20	0.49	1.975	Analyzed as below
			Left Side	0.033	0.00	1.39	1.423	Σ SAR < 1.6, Not required
			Right Side	0.400	0.89	0.00	1.290	Σ SAR < 1.6, Not required
			Top Side	1.322	0.05	0.04	1.412	Σ SAR < 1.6, Not required
			Bottom Side	0.400	0.40	0.40	1.200	Σ SAR < 1.6, Not required
35	LTE 2 + WLAN Ant 0 (DTS) + BT (DSS) Ant 1	Body	Rear Face	1.285	0.34	0.00	1.625	Analyzed as below
			Left Side	0.033	0.00	0.01	0.043	Σ SAR < 1.6, Not required
			Right Side	0.400	1.05	0.00	1.450	Σ SAR < 1.6, Not required
			Top Side	1.322	0.01	0.00	1.332	Σ SAR < 1.6, Not required
			Bottom Side	0.400	0.40	0.14	0.940	Σ SAR < 1.6, Not required
36	LTE 2 + WLAN Ant 0 (NII) + BT (DSS) Ant 1	Body	Rear Face	1.285	0.20	0.00	1.485	Σ SAR < 1.6, Not required
			Left Side	0.033	0.00	0.01	0.043	Σ SAR < 1.6, Not required
			Right Side	0.400	0.89	0.00	1.290	Σ SAR < 1.6, Not required
			Top Side	1.322	0.05	0.00	1.372	Σ SAR < 1.6, Not required
			Bottom Side	0.400	0.40	0.14	0.940	Σ SAR < 1.6, Not required

FCC SAR Test Report

No.	Conditions (SAR1 + SAR2 + SAR3)	Exposure Condition	Test Position	Max. SAR1	Max. SAR2	Max. SAR3	SAR Summation	SPLSR Analysis
37	LTE 4 + WLAN Ant 0 (DTS) + WLAN Ant 1 (DTS)	Body	Rear Face	1.292	0.34	0.35	1.982	Analyzed as below
			Left Side	0.475	0.00	0.85	1.325	Σ SAR < 1.6, Not required
			Right Side	0.400	1.05	0.00	1.450	Σ SAR < 1.6, Not required
			Top Side	1.344	0.01	0.01	1.364	Σ SAR < 1.6, Not required
			Bottom Side	0.400	0.40	0.40	1.200	Σ SAR < 1.6, Not required
38	LTE 4 + WLAN Ant 0 (NII) + WLAN Ant 1 (NII)	Body	Rear Face	1.292	0.20	0.49	1.982	Analyzed as below
			Left Side	0.475	0.00	1.39	1.865	Analyzed as below
			Right Side	0.400	0.89	0.00	1.290	Σ SAR < 1.6, Not required
			Top Side	1.344	0.05	0.04	1.434	Σ SAR < 1.6, Not required
			Bottom Side	0.400	0.40	0.40	1.200	Σ SAR < 1.6, Not required
39	LTE 4 + WLAN Ant 0 (DTS) + BT (DSS) Ant 1	Body	Rear Face	1.292	0.34	0.00	1.632	Analyzed as below
			Left Side	0.475	0.00	0.01	0.485	Σ SAR < 1.6, Not required
			Right Side	0.400	1.05	0.00	1.450	Σ SAR < 1.6, Not required
			Top Side	1.344	0.01	0.00	1.354	Σ SAR < 1.6, Not required
			Bottom Side	0.400	0.40	0.14	0.940	Σ SAR < 1.6, Not required
40	LTE 4 + WLAN Ant 0 (NII) + BT (DSS) Ant 1	Body	Rear Face	1.292	0.20	0.00	1.492	Σ SAR < 1.6, Not required
			Left Side	0.475	0.00	0.01	0.485	Σ SAR < 1.6, Not required
			Right Side	0.400	0.89	0.00	1.290	Σ SAR < 1.6, Not required
			Top Side	1.344	0.05	0.00	1.394	Σ SAR < 1.6, Not required
			Bottom Side	0.400	0.40	0.14	0.940	Σ SAR < 1.6, Not required

FCC SAR Test Report

No.	Conditions (SAR1 + SAR2 + SAR3)	Exposure Condition	Test Position	Max. SAR1	Max. SAR2	Max. SAR3	SAR Summation	SPLSR Analysis
41	LTE 5 + WLAN Ant 0 (DTS) + WLAN Ant 1 (DTS)	Body	Rear Face	1.070	0.34	0.35	1.760	Analyzed as below
			Left Side	0.284	0.00	0.85	1.134	Σ SAR < 1.6, Not required
			Right Side	0.400	1.05	0.00	1.450	Σ SAR < 1.6, Not required
			Top Side	1.279	0.01	0.01	1.299	Σ SAR < 1.6, Not required
			Bottom Side	0.400	0.40	0.40	1.200	Σ SAR < 1.6, Not required
42	LTE 5 + WLAN Ant 0 (NII) + WLAN Ant 1 (NII)	Body	Rear Face	1.070	0.20	0.49	1.760	Analyzed as below
			Left Side	0.284	0.00	1.39	1.674	Analyzed as below
			Right Side	0.400	0.89	0.00	1.290	Σ SAR < 1.6, Not required
			Top Side	1.279	0.05	0.04	1.369	Σ SAR < 1.6, Not required
			Bottom Side	0.400	0.40	0.40	1.200	Σ SAR < 1.6, Not required
43	LTE 5 + WLAN Ant 0 (DTS) + BT (DSS) Ant 1	Body	Rear Face	1.070	0.34	0.00	1.410	Σ SAR < 1.6, Not required
			Left Side	0.284	0.00	0.01	0.294	Σ SAR < 1.6, Not required
			Right Side	0.400	1.05	0.00	1.450	Σ SAR < 1.6, Not required
			Top Side	1.279	0.01	0.00	1.289	Σ SAR < 1.6, Not required
			Bottom Side	0.400	0.40	0.14	0.940	Σ SAR < 1.6, Not required
44	LTE 5 + WLAN Ant 0 (NII) + BT (DSS) Ant 1	Body	Rear Face	1.070	0.20	0.00	1.270	Σ SAR < 1.6, Not required
			Left Side	0.284	0.00	0.01	0.294	Σ SAR < 1.6, Not required
			Right Side	0.400	0.89	0.00	1.290	Σ SAR < 1.6, Not required
			Top Side	1.279	0.05	0.00	1.329	Σ SAR < 1.6, Not required
			Bottom Side	0.400	0.40	0.14	0.940	Σ SAR < 1.6, Not required

FCC SAR Test Report

No.	Conditions (SAR1 + SAR2 + SAR3)	Exposure Condition	Test Position	Max. SAR1	Max. SAR2	Max. SAR3	SAR Summation	SPLSR Analysis
45	LTE 13 + WLAN Ant 0 (DTS) + WLAN Ant 1 (DTS)	Body	Rear Face	1.058	0.34	0.35	1.748	Analyzed as below
			Left Side	0.305	0.00	0.85	1.155	Σ SAR < 1.6, Not required
			Right Side	0.400	1.05	0.00	1.450	Σ SAR < 1.6, Not required
			Top Side	1.340	0.01	0.01	1.360	Σ SAR < 1.6, Not required
			Bottom Side	0.400	0.40	0.40	1.200	Σ SAR < 1.6, Not required
46	LTE 13 + WLAN Ant 0 (NII) + WLAN Ant 1 (NII)	Body	Rear Face	1.058	0.20	0.49	1.748	Analyzed as below
			Left Side	0.305	0.00	1.39	1.695	Analyzed as below
			Right Side	0.400	0.89	0.00	1.290	Σ SAR < 1.6, Not required
			Top Side	1.340	0.05	0.04	1.430	Σ SAR < 1.6, Not required
			Bottom Side	0.400	0.40	0.40	1.200	Σ SAR < 1.6, Not required
47	LTE 13 + WLAN Ant 0 (DTS) + BT (DSS) Ant 1	Body	Rear Face	1.058	0.34	0.00	1.398	Σ SAR < 1.6, Not required
			Left Side	0.305	0.00	0.01	0.315	Σ SAR < 1.6, Not required
			Right Side	0.400	1.05	0.00	1.450	Σ SAR < 1.6, Not required
			Top Side	1.340	0.01	0.00	1.350	Σ SAR < 1.6, Not required
			Bottom Side	0.400	0.40	0.14	0.940	Σ SAR < 1.6, Not required
48	LTE 13 + WLAN Ant 0 (NII) + BT (DSS) Ant 1	Body	Rear Face	1.058	0.20	0.00	1.258	Σ SAR < 1.6, Not required
			Left Side	0.305	0.00	0.01	0.315	Σ SAR < 1.6, Not required
			Right Side	0.400	0.89	0.00	1.290	Σ SAR < 1.6, Not required
			Top Side	1.340	0.05	0.00	1.390	Σ SAR < 1.6, Not required
			Bottom Side	0.400	0.40	0.14	0.940	Σ SAR < 1.6, Not required

FCC SAR Test Report

No.	Conditions (SAR1 + SAR2 + SAR3)	Exposure Condition	Test Position	Max. SAR1	Max. SAR2	Max. SAR3	SAR Summation	SPLSR Analysis
49	LTE 17 + WLAN Ant 0 (DTS) + WLAN Ant 1 (DTS)	Body	Rear Face	1.276	0.34	0.35	1.966	Analyzed as below
			Left Side	0.201	0.00	0.85	1.051	Σ SAR < 1.6, Not required
			Right Side	0.400	1.05	0.00	1.450	Σ SAR < 1.6, Not required
			Top Side	1.182	0.01	0.01	1.202	Σ SAR < 1.6, Not required
			Bottom Side	0.400	0.40	0.40	1.200	Σ SAR < 1.6, Not required
50	LTE 17 + WLAN Ant 0 (NII) + WLAN Ant 1 (NII)	Body	Rear Face	1.276	0.20	0.49	1.966	Analyzed as below
			Left Side	0.201	0.00	1.39	1.591	Σ SAR < 1.6, Not required
			Right Side	0.400	0.89	0.00	1.290	Σ SAR < 1.6, Not required
			Top Side	1.182	0.05	0.04	1.272	Σ SAR < 1.6, Not required
			Bottom Side	0.400	0.40	0.40	1.200	Σ SAR < 1.6, Not required
51	LTE 17 + WLAN Ant 0 (DTS) + BT (DSS) Ant 1	Body	Rear Face	1.276	0.34	0.00	1.616	Analyzed as below
			Left Side	0.201	0.00	0.01	0.211	Σ SAR < 1.6, Not required
			Right Side	0.400	1.05	0.00	1.450	Σ SAR < 1.6, Not required
			Top Side	1.182	0.01	0.00	1.192	Σ SAR < 1.6, Not required
			Bottom Side	0.400	0.40	0.14	0.940	Σ SAR < 1.6, Not required
52	LTE 17 + WLAN Ant 0 (NII) + BT (DSS) Ant 1	Body	Rear Face	1.276	0.20	0.00	1.476	Σ SAR < 1.6, Not required
			Left Side	0.201	0.00	0.01	0.211	Σ SAR < 1.6, Not required
			Right Side	0.400	0.89	0.00	1.290	Σ SAR < 1.6, Not required
			Top Side	1.182	0.05	0.00	1.232	Σ SAR < 1.6, Not required
			Bottom Side	0.400	0.40	0.14	0.940	Σ SAR < 1.6, Not required

FCC SAR Test Report

No.	Conditions (SAR1 + SAR2 + SAR3)	Exposure Condition	Test Position	Max. SAR1	Max. SAR2	Max. SAR3	SAR Summation	SPLSR Analysis
53	LTE 25 + WLAN Ant 0 (DTS) + WLAN Ant 1 (DTS)	Body	Rear Face	1.292	0.34	0.35	1.982	Analyzed as below
			Left Side	0.038	0.00	0.85	0.888	Σ SAR < 1.6, Not required
			Right Side	0.400	1.05	0.00	1.450	Σ SAR < 1.6, Not required
			Top Side	1.149	0.01	0.01	1.169	Σ SAR < 1.6, Not required
			Bottom Side	0.400	0.40	0.40	1.200	Σ SAR < 1.6, Not required
54	LTE 25 + WLAN Ant 0 (NII) + WLAN Ant 1 (NII)	Body	Rear Face	1.292	0.20	0.49	1.982	Analyzed as below
			Left Side	0.038	0.00	1.39	1.428	Σ SAR < 1.6, Not required
			Right Side	0.400	0.89	0.00	1.290	Σ SAR < 1.6, Not required
			Top Side	1.149	0.05	0.04	1.239	Σ SAR < 1.6, Not required
			Bottom Side	0.400	0.40	0.40	1.200	Σ SAR < 1.6, Not required
55	LTE 25 + WLAN Ant 0 (DTS) + BT (DSS) Ant 1	Body	Rear Face	1.292	0.34	0.00	1.632	Analyzed as below
			Left Side	0.038	0.00	0.01	0.048	Σ SAR < 1.6, Not required
			Right Side	0.400	1.05	0.00	1.450	Σ SAR < 1.6, Not required
			Top Side	1.149	0.01	0.00	1.159	Σ SAR < 1.6, Not required
			Bottom Side	0.400	0.40	0.14	0.940	Σ SAR < 1.6, Not required
56	LTE 25 + WLAN Ant 0 (NII) + BT (DSS) Ant 1	Body	Rear Face	1.292	0.20	0.00	1.492	Σ SAR < 1.6, Not required
			Left Side	0.038	0.00	0.01	0.048	Σ SAR < 1.6, Not required
			Right Side	0.400	0.89	0.00	1.290	Σ SAR < 1.6, Not required
			Top Side	1.149	0.05	0.00	1.199	Σ SAR < 1.6, Not required
			Bottom Side	0.400	0.40	0.14	0.940	Σ SAR < 1.6, Not required

<SAR to Peak Location Separation Ratio Analysis>

The simultaneous transmitting antennas in each operating mode and exposure condition combination are considered one pair at a time to determine the SPLSR. When SAR is measured for both antennas in the pair, the peak location separation distance is computed by the following formula.

$$\text{Peak Location Separation Distance} = \sqrt{(x_1 - x_2)^2 + (y_1 - y_2)^2 + (z_1 - z_2)^2}$$

Where (x_1, y_1, z_1) and (x_2, y_2, z_2) are the coordinates of the extrapolated peak SAR locations in the area or zoom scans.

When standalone test exclusion applies, SAR is estimated; the peak location is assumed to be at the feed-point or geometric center of the antenna. Due to curvatures on the SAM phantom, when SAR is estimated for one of the antennas in an antenna pair, the measured peak SAR location will be translated onto the test device to determine the peak location separation for the antenna pair.

The SPLSR is determined by the following formula.

$$\text{SPLSR} = \frac{(\text{SAR}_1 + \text{SAR}_2)^{1.5}}{R_i}$$


Where SAR_1 and SAR_2 are the highest reported or estimated SAR for each antenna in the pair, and R_i is the separation distance between the peak SAR locations for the antenna pair in mm.

When the SPLSR is ≤ 0.04 , the simultaneous transmission SAR is not required. Otherwise, the enlarged zoom scan and volume scan post-processing procedures will be performed.

FCC SAR Test Report


GSM 850

Conditions	Exposure Condition	Test Position	SAR Value (W/kg)	Coordinates			Peak Location Separation Distance (R _i , mm)	SPLSR	Simultaneous Transmission SAR Test
				x	y	z			
GSM 850_GPRS10_Ch128	Body	Rear Face	1.02	9.43	-7.88	-0.3	271.3	0.01	SPLSR ≤ 0.04, Not required
2.4G WALN_802.11_b_Ant0			0.34	-7.25	13.5	0.56			
GSM 850_GPRS10_Ch128	Body	Rear Face	1.02	9.43	-7.88	-0.3	157.9	0.01	SPLSR ≤ 0.04, Not required
2.4G WALN_802.11_b_Ant1			0.35	-5.48	-13.02	0.55			
2.4G WALN_802.11_b_Ant0	Body	Rear Face	0.34	-7.25	13.5	0.56	265.8	0.00	SPLSR ≤ 0.04, Not required
2.4G WALN_802.11_b_Ant1			0.35	-5.48	-13.02	0.55			

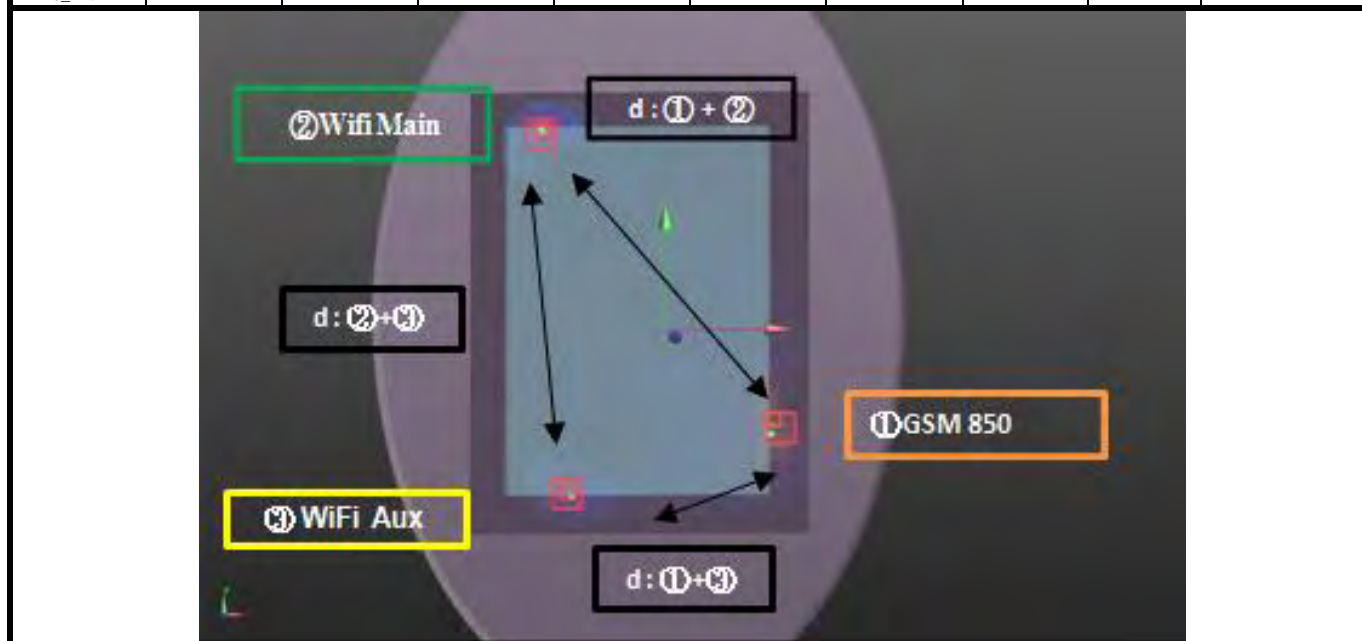


FCC SAR Test Report

Conditions	Exposure Condition	Test Position	SAR Value (W/kg)	Coordinates			Peak Location Separation Distance (R _i , mm)	SPLSR	Simultaneous Transmission SAR Test
				x	y	z			
GSM 850_GPRS10_Ch128	Body	Rear Face	1.02	9.43	-7.88	-0.3	250.1	0.01	SPLSR ≤ 0.04, Not required
5.6G WLAN_802.11 ac VH80_Ch138			0.2	-4.7	12.75	-0.27			
GSM 850_GPRS10_Ch128	Body	Rear Face	1.02	9.43	-7.88	-0.3	141.6	0.01	SPLSR ≤ 0.04, Not required
5.6G WLAN_802.11 ac VH80_Ch106			0.49	-3.75	-13.05	-0.34			
5.6G WLAN_802.11 ac VH80_Ch138	Body	Rear Face	0.2	-4.7	12.75	-0.27	258.2	0.00	SPLSR ≤ 0.04, Not required
5.6G WLAN_802.11 ac VH80_Ch106			0.49	-3.75	-13.05	-0.34			

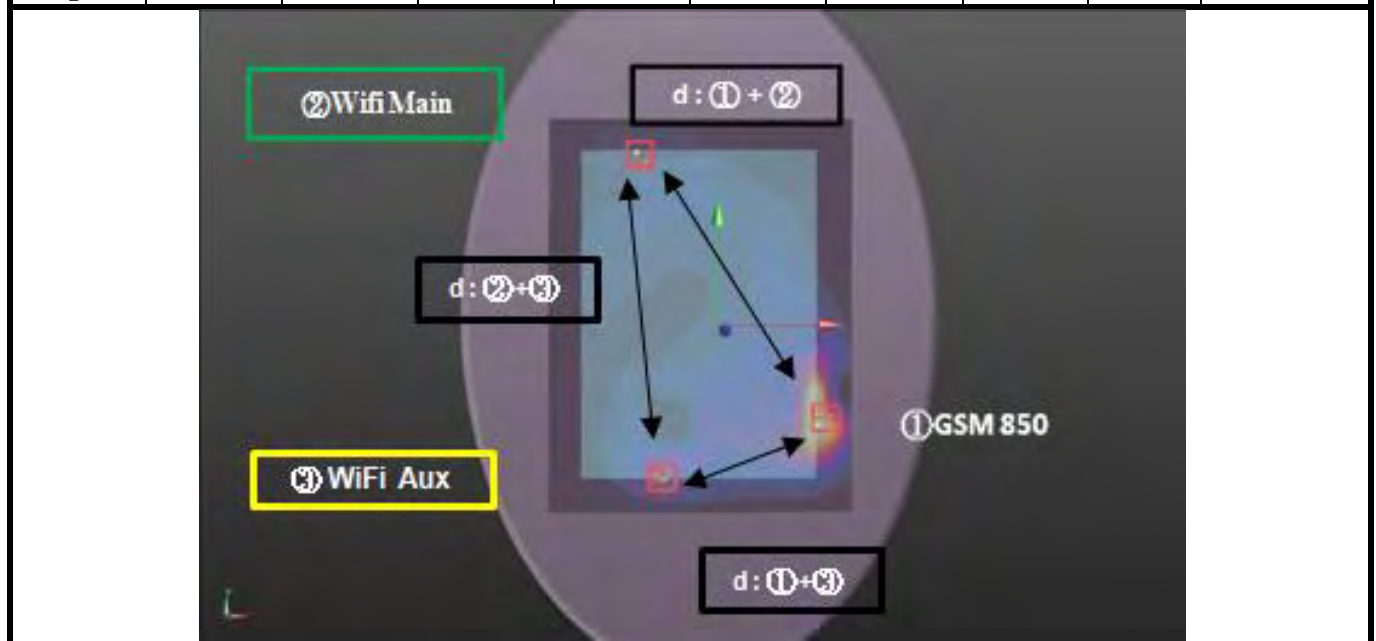

FCC SAR Test Report


Conditions	Exposure Condition	Test Position	SAR Value (W/kg)	Coordinates			Peak Location Separation Distance (R _i , mm)	SPLSR	Simultaneous Transmission SAR Test
				x	y	z			
GSM 850_GPRS10_Ch190	Body	Left Side	0.726	-0.25	6.15	-0.08	86.3	0.04	SPLSR ≤ 0.04, Not required
5.3G WLAN_802.11ac_VH80_Ch58			1.39	0.45	-2.45	-0.35			

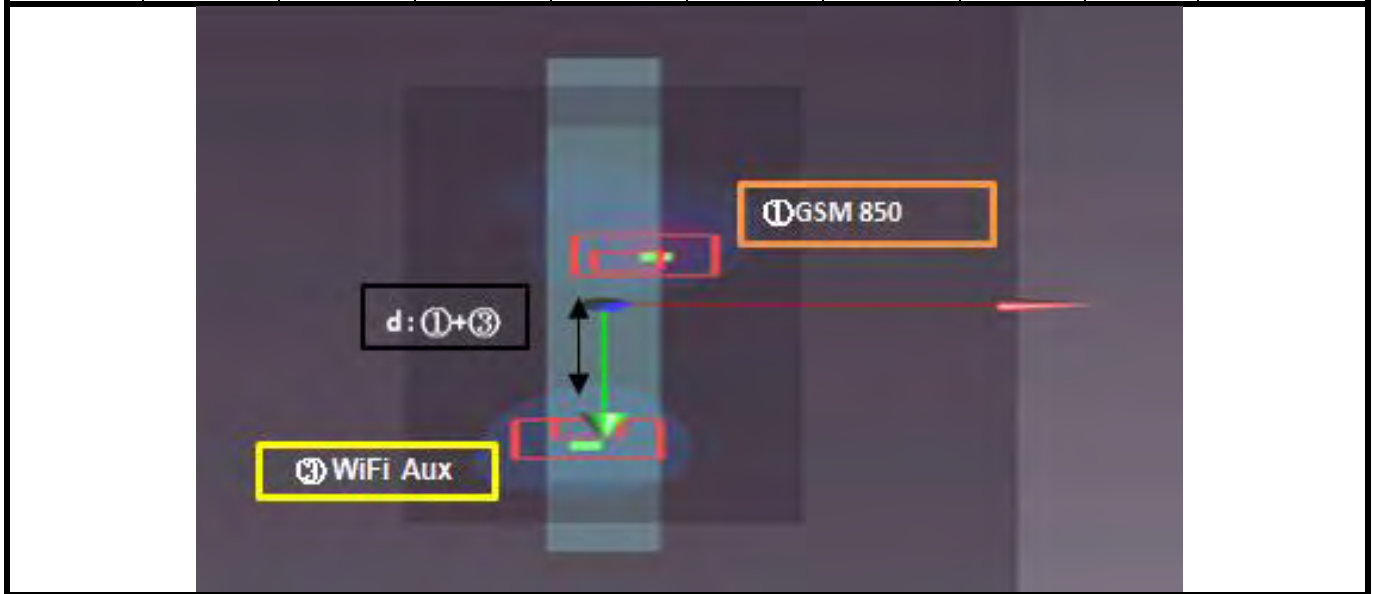

FCC SAR Test Report


GSM 1900

Conditions	Exposure Condition	Test Position	SAR Value (W/kg)	Coordinates			Peak Location Separation Distance (R _i , mm)	SPLSR	Simultaneous Transmission SAR Test
				x	y	z			
GSM 1900_GPRS10_Ch810	Body	Rear Face	1.029	9.84	-4.88	0.69	251.0	0.01	SPLSR ≤ 0.04, Not required
2.4G WALN_802.11b_Ant0			0.34	-7.25	13.5	0.56			
GSM 1900_GPRS10_Ch810	Body	Rear Face	1.029	9.84	-4.88	0.69	173.5	0.01	SPLSR ≤ 0.04, Not required
2.4G WALN_802.11b_Ant1			0.35	-5.48	-13.02	0.55			
2.4G WALN_802.11b_Ant0	Body	Rear Face	0.34	-7.25	13.5	0.56	265.8	0.00	SPLSR ≤ 0.04, Not required
2.4G WALN_802.11b_Ant1			0.35	-5.48	-13.02	0.55			

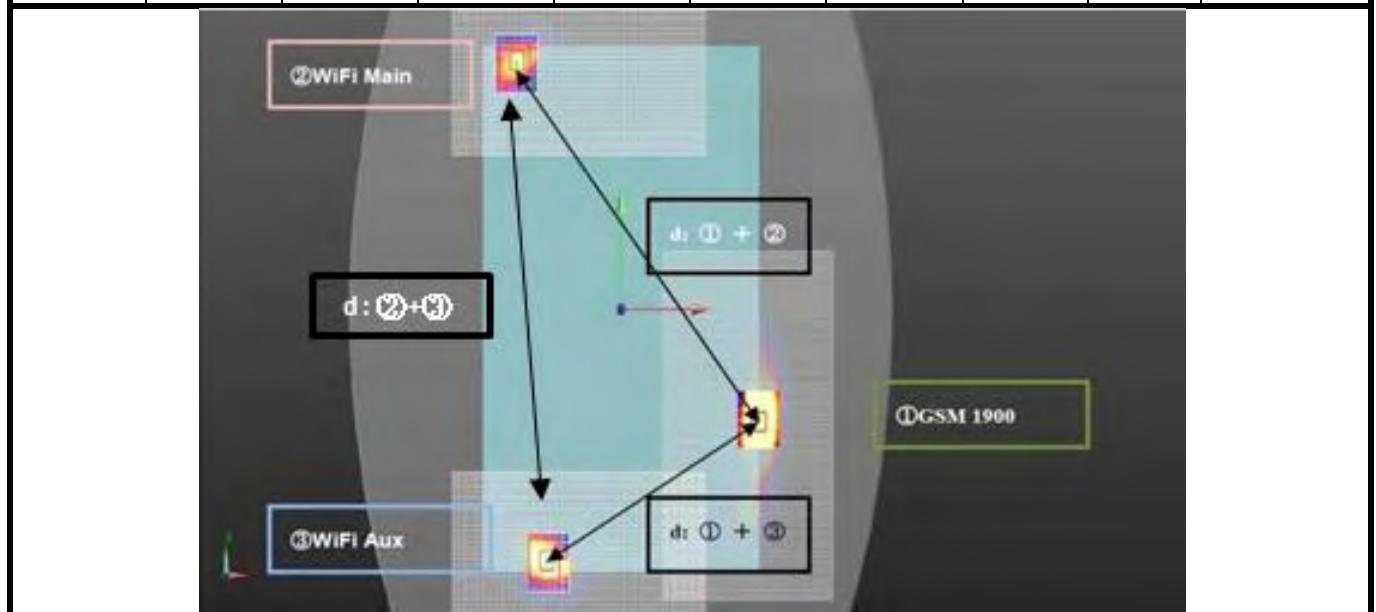

FCC SAR Test Report


Conditions	Exposure Condition	Test Position	SAR Value (W/kg)	Coordinates			Peak Location Separation Distance (R _i , mm)	SPLSR	Simultaneous Transmission SAR Test
				x	y	z			
GSM 1900_GPRS10_Ch810	Body	Rear Face	1.029	9.84	-4.88	0.69	228.7	0.01	SPLSR ≤ 0.04, Not required
5.6G WLAN_802.11 ac VH80_Ch138			0.2	-4.7	12.75	-0.27			
GSM 1900_GPRS10_Ch810	Body	Rear Face	1.029	9.84	-4.88	0.69	158.9	0.01	SPLSR ≤ 0.04, Not required
5.6G WLAN_802.11 ac VH80_Ch106			0.49	-3.75	-13.05	-0.34			
5.6G WLAN_802.11 ac VH80_Ch138	Body	Rear Face	0.2	-4.7	12.75	-0.27	258.2	0.00	SPLSR ≤ 0.04, Not required
5.6G WLAN_802.11 ac VH80_Ch106			0.49	-3.75	-13.05	-0.34			

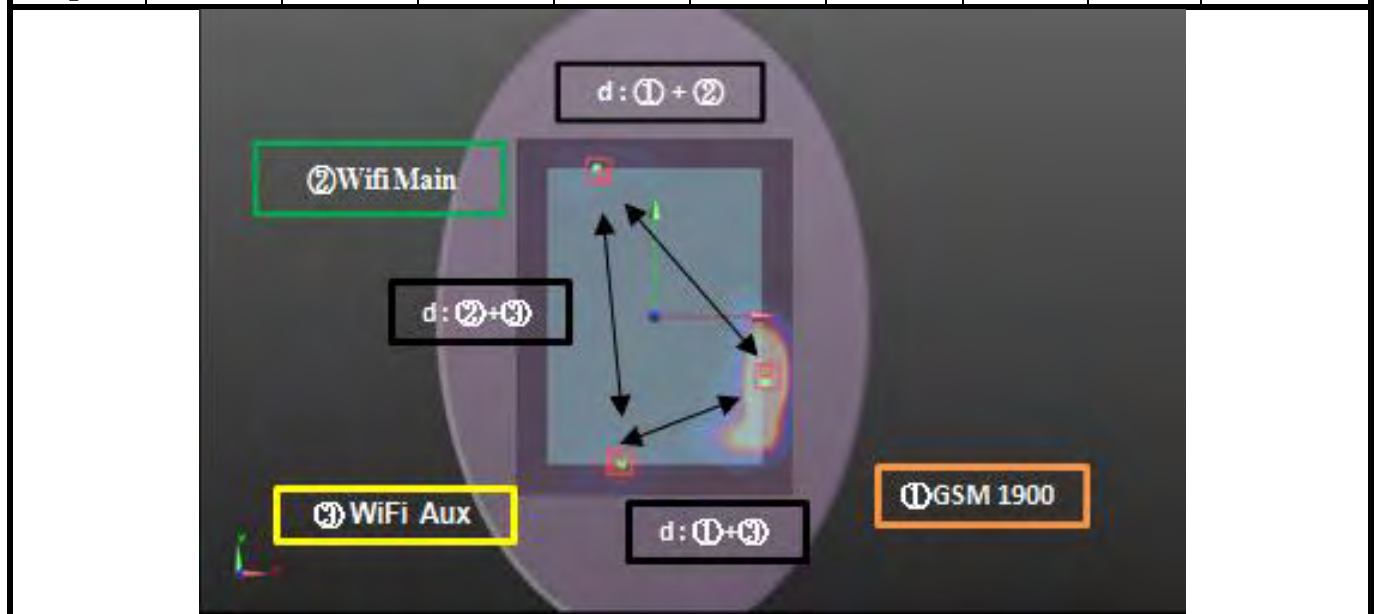

FCC SAR Test Report


WCDMA II

Conditions	Exposure Condition	Test Position	SAR Value (W/kg)	Coordinates			Peak Location Separation Distance (R _i , mm)	SPLSR	Simultaneous Transmission SAR Test
				x	y	z			
WCDMA II_RMC12.2K_Ch9262	Body	Rear Face	1.128	9.68	-5.68	0.65	255.8	0.01	SPLSR ≤ 0.04, Not required
2.4G WALN_802.11 b_Ant0			0.34	-7.25	13.5	0.56			
WCDMA II_RMC12.2K_Ch9262	Body	Rear Face	1.128	9.68	-5.68	0.65	168.4	0.01	SPLSR ≤ 0.04, Not required
2.4G WALN_802.11 b_Ant1			0.35	-5.48	-13.02	0.55			
2.4G WALN_802.11 b_Ant0	Body	Rear Face	0.34	-7.25	13.5	0.56	265.8	0.00	SPLSR ≤ 0.04, Not required
2.4G WALN_802.11 b_Ant1			0.35	-5.48	-13.02	0.55			

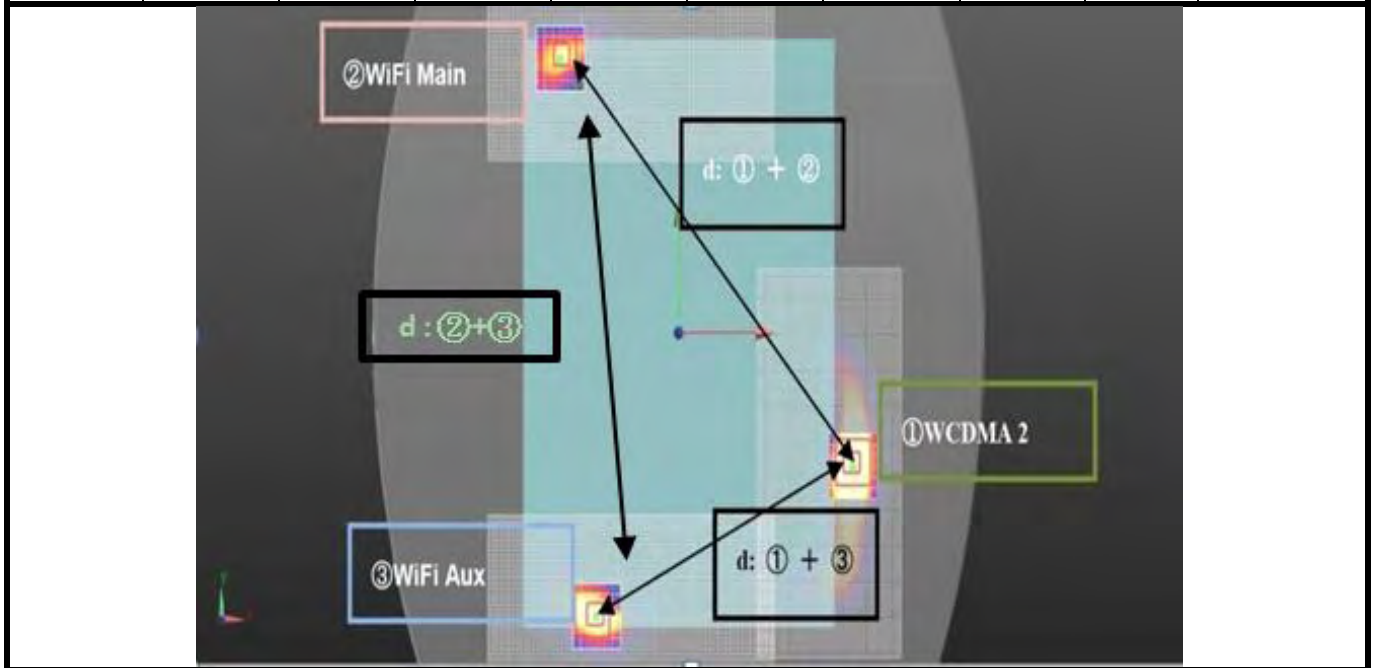

FCC SAR Test Report


Conditions	Exposure Condition	Test Position	SAR Value (W/kg)	Coordinates			Peak Location Separation Distance (R _i , mm)	SPLSR	Simultaneous Transmission SAR Test
				x	y	z			
WCDMA II_RMC12.2K_Ch9262	Body	Rear Face	1.128	9.68	-5.68	0.65	233.9	0.01	SPLSR ≤ 0.04, Not required
5.6G WLAN_802.11 ac VH80_Ch138			0.2	-4.7	12.75	-0.27			
WCDMA II_RMC12.2K_Ch9262	Body	Rear Face	1.128	9.68	-5.68	0.65	153.5	0.01	SPLSR ≤ 0.04, Not required
5.6G WLAN_802.11 ac VH80_Ch106			0.49	-3.75	-13.05	-0.34			
5.6G WLAN_802.11 ac VH80_Ch138	Body	Rear Face	0.2	-4.7	12.75	-0.27	258.2	0.00	SPLSR ≤ 0.04, Not required
5.6G WLAN_802.11 ac VH80_Ch106			0.49	-3.75	-13.05	-0.34			

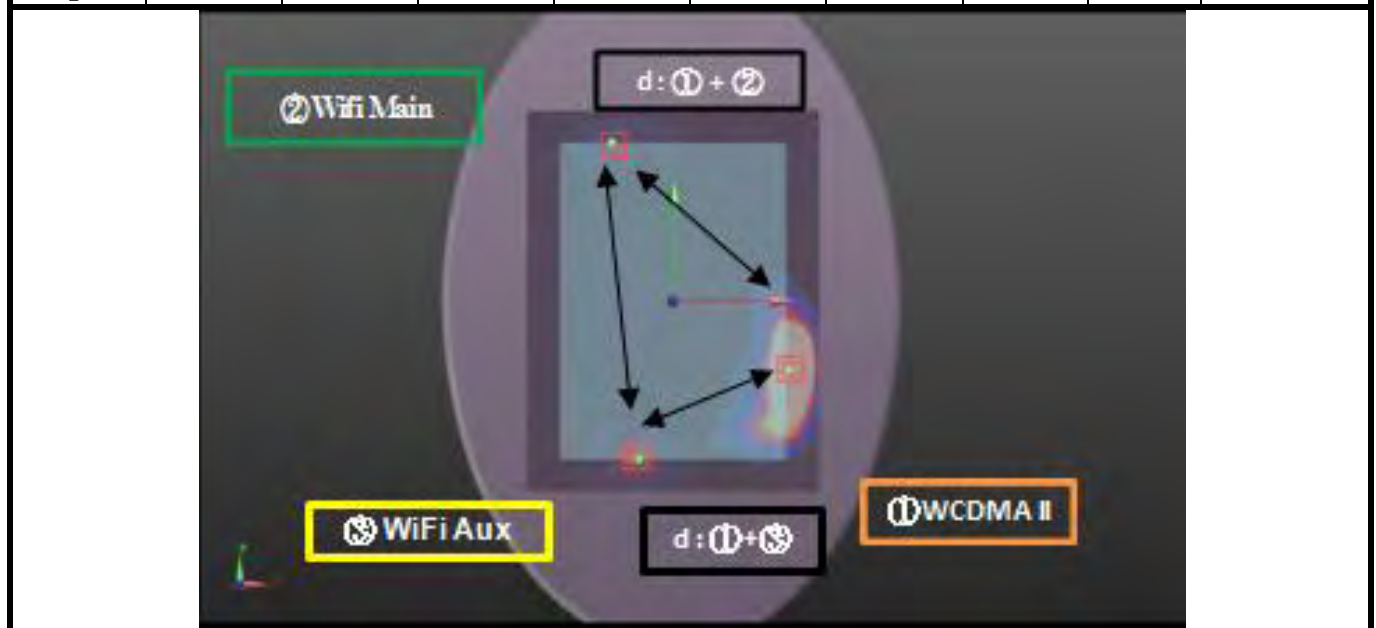

FCC SAR Test Report


WCDMA IV

Conditions	Exposure Condition	Test Position	SAR Value (W/kg)	Coordinates			Peak Location Separation Distance (R _i , mm)	SPLSR	Simultaneous Transmission SAR Test
				x	y	z			
WCDMA IV_RMC12.2K_Ch1513	Body	Rear Face	1.032	10.16	-6.66	0.21	266.4	0.01	SPLSR ≤ 0.04, Not required
2.4G WALN_802.11 b_Ant0			0.34	-7.25	13.5	0.56			
WCDMA IV_RMC12.2K_Ch1513	Body	Rear Face	1.032	10.16	-6.66	0.21	168.9	0.01	SPLSR ≤ 0.04, Not required
2.4G WALN_802.11 b_Ant1			0.35	-5.48	-13.02	0.55			
2.4G WALN_802.11 b_Ant0	Body	Rear Face	0.34	-7.25	13.5	0.56	265.8	0.00	SPLSR ≤ 0.04, Not required
2.4G WALN_802.11 b_Ant1			0.35	-5.48	-13.02	0.55			

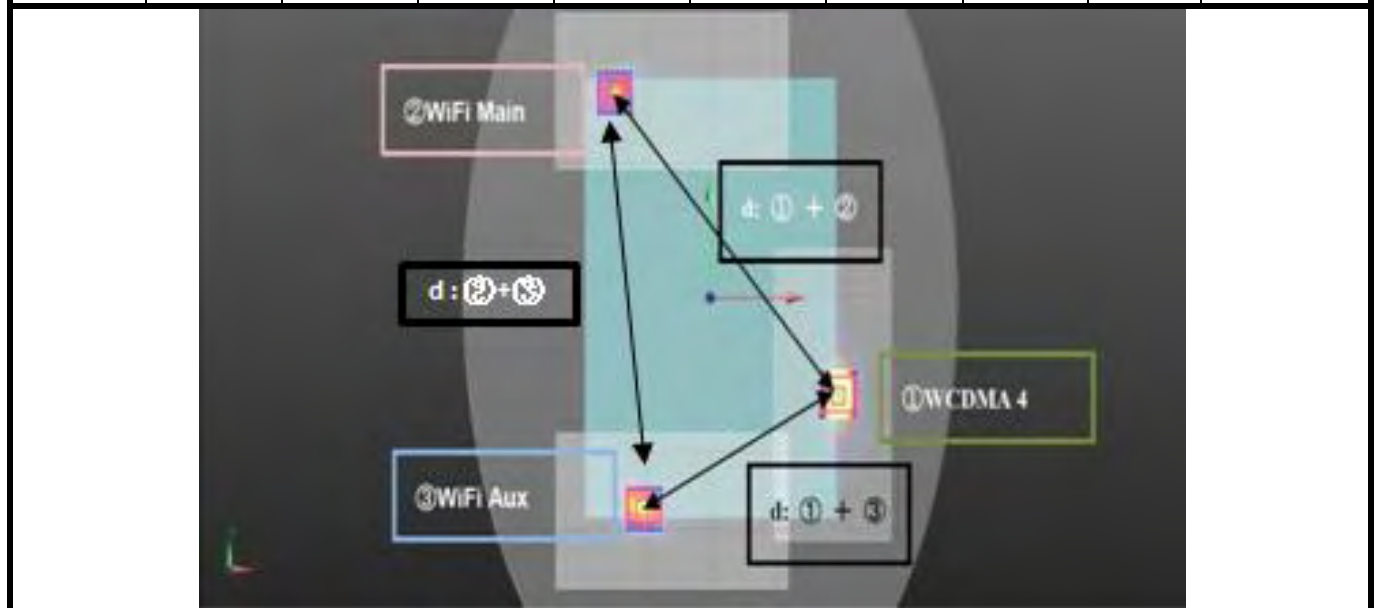


FCC SAR Test Report

Conditions	Exposure Condition	Test Position	SAR Value (W/kg)	Coordinates			Peak Location Separation Distance (R _i , mm)	SPLSR	Simultaneous Transmission SAR Test
				x	y	z			
WCDMA IV_RMC12.2K_Ch1513	Body	Rear Face	1.032	10.16	-6.66	0.21	244.5	0.01	SPLSR ≤ 0.04, Not required
5.6G WLAN_802.11 ac VH80_Ch138			0.2	-4.7	12.75	-0.27			
WCDMA IV_RMC12.2K_Ch1513	Body	Rear Face	1.032	10.16	-6.66	0.21	153.2	0.01	SPLSR ≤ 0.04, Not required
5.6G WLAN_802.11 ac VH80_Ch106			0.49	-3.75	-13.05	-0.34			
5.6G WLAN_802.11 ac VH80_Ch138	Body	Rear Face	0.2	-4.7	12.75	-0.27	258.2	0.00	SPLSR ≤ 0.04, Not required
5.6G WLAN_802.11 ac VH80_Ch106			0.49	-3.75	-13.05	-0.34			

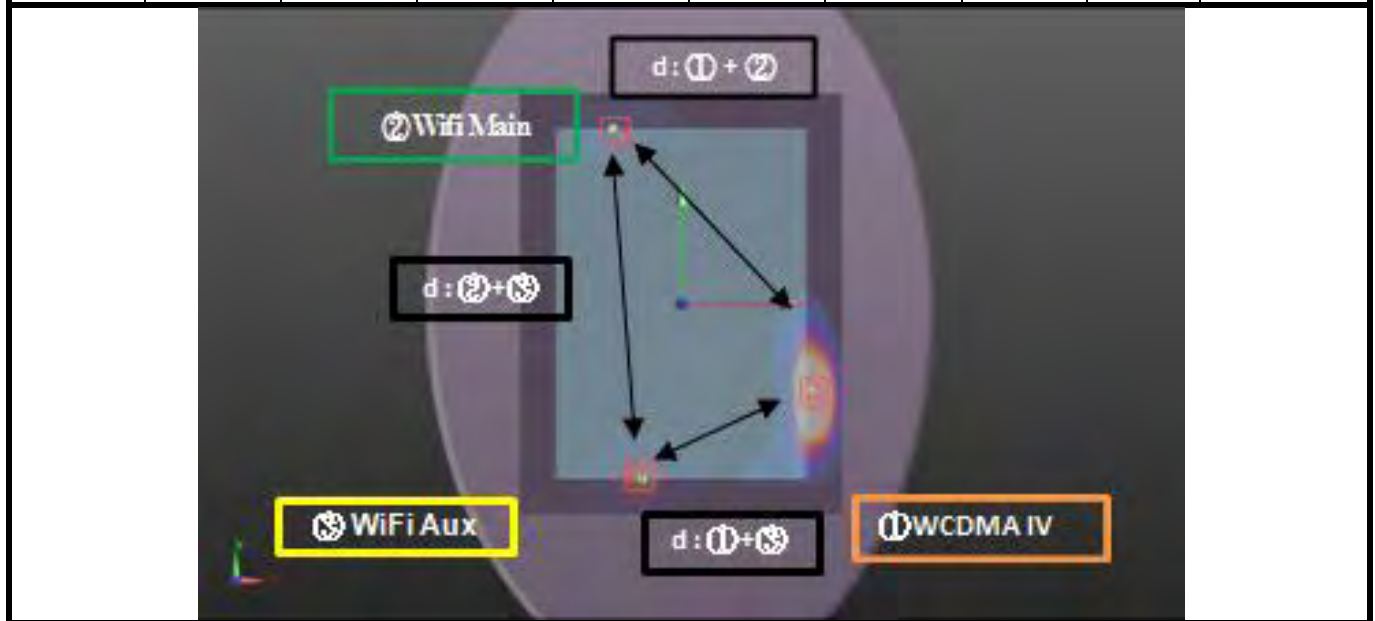

FCC SAR Test Report


Conditions	Exposure Condition	Test Position	SAR Value (W/kg)	Coordinates			Peak Location Separation Distance (R _i , mm)	SPLSR	Simultaneous Transmission SAR Test
				x	y	z			
WCDMA IV_RMC12.2K_Ch1513	Body	Left Side	0.284	0	6.2	0.17	86.8	0.02	SPLSR ≤ 0.04, Not required
5.3G WLAN_802.11 ac_VH80_Ch58			1.39	0.45	-2.45	-0.35			

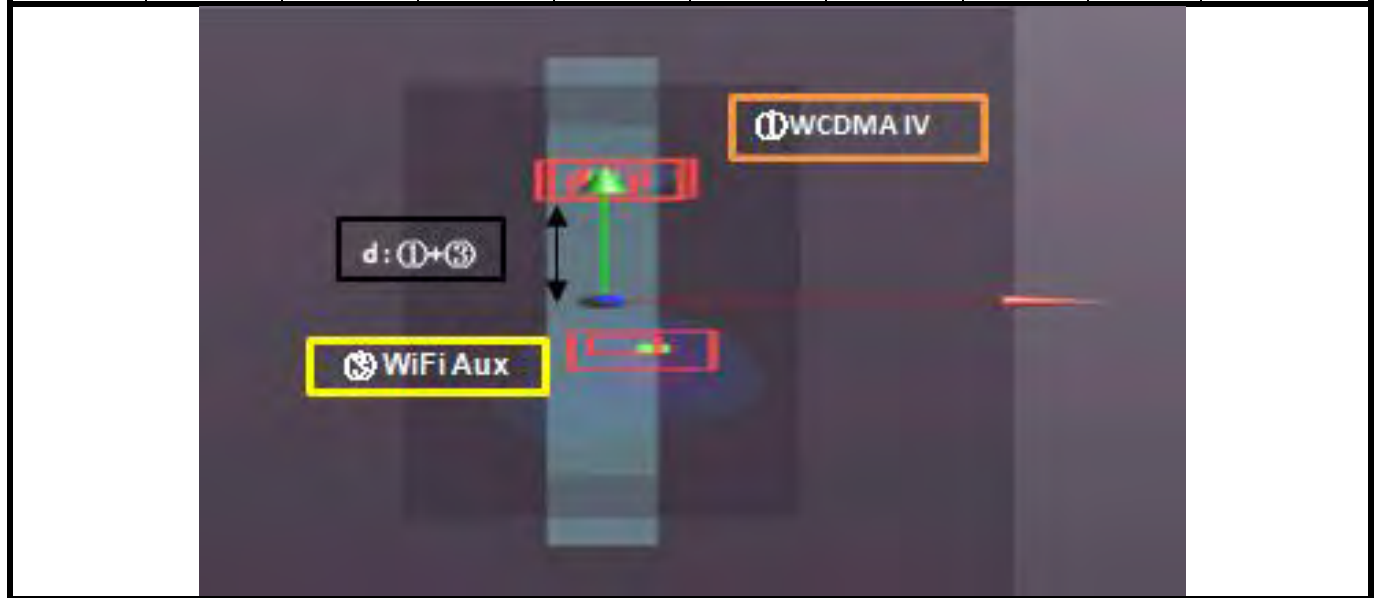

FCC SAR Test Report


WCDMA V

Conditions	Exposure Condition	Test Position	SAR Value (W/kg)	Coordinates			Peak Location Separation Distance (R _i , mm)	SPLSR	Simultaneous Transmission SAR Test
				x	y	z			
WCDMA V_RMC12.2K_Ch4132	Body	Rear Face	1.096	9.75	-7.86	0.25	273.0	0.01	SPLSR ≤ 0.04, Not required
2.4G WALN_802.11 b_Ant0			0.34	-7.25	13.5	0.56			
WCDMA V_RMC12.2K_Ch4132	Body	Rear Face	1.096	9.75	-7.86	0.25	160.8	0.01	SPLSR ≤ 0.04, Not required
2.4G WALN_802.11 b_Ant1			0.35	-5.48	-13.02	0.55			
2.4G WALN_802.11 b_Ant0	Body	Rear Face	0.34	-7.25	13.5	0.56	265.8	0.00	SPLSR ≤ 0.04, Not required
2.4G WALN_802.11 b_Ant1			0.35	-5.48	-13.02	0.55			

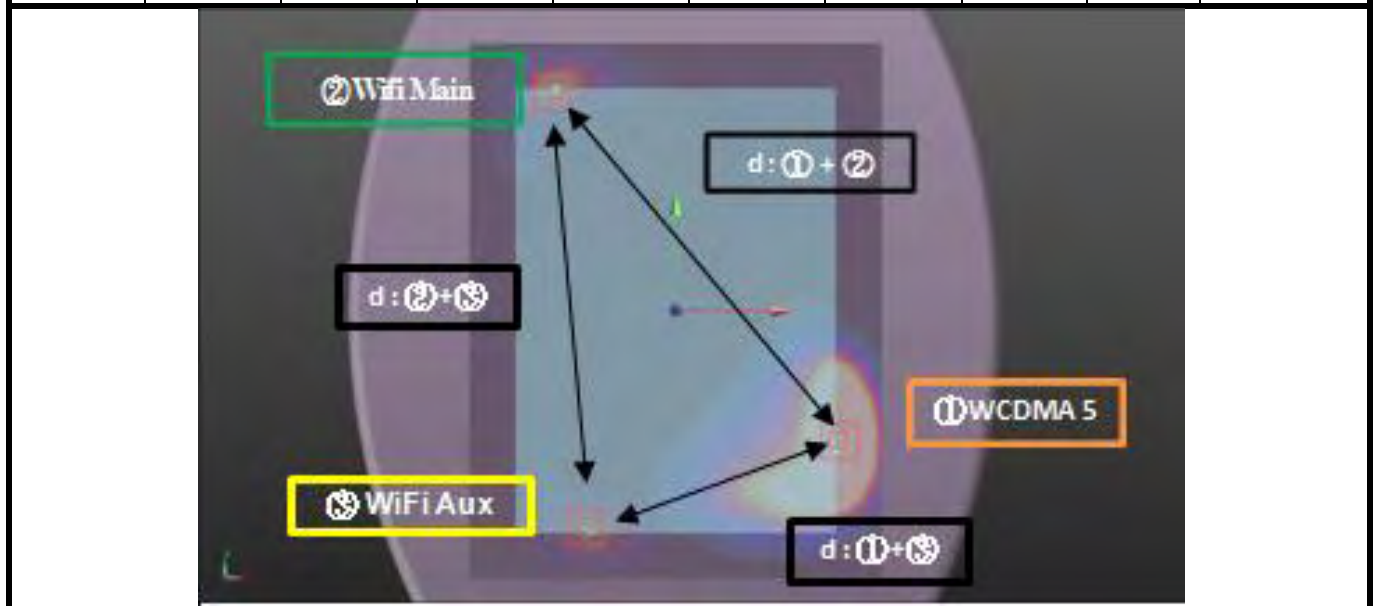


FCC SAR Test Report

Conditions	Exposure Condition	Test Position	SAR Value (W/kg)	Coordinates			Peak Location Separation Distance (R _i , mm)	SPLSR	Simultaneous Transmission SAR Test
				x	y	z			
WCDMA V_RMC12.2K_Ch4132	Body	Rear Face	1.096	9.75	-7.86	0.25	251.8	0.01	SPLSR ≤ 0.04, Not required
5.6G WLAN_802.11 ac VH80_Ch138			0.2	-4.7	12.75	-0.27			
WCDMA V_RMC12.2K_Ch4132	Body	Rear Face	1.096	9.75	-7.86	0.25	144.8	0.01	SPLSR ≤ 0.04, Not required
5.6G WLAN_802.11 ac VH80_Ch106			0.49	-3.75	-13.05	-0.34			
5.6G WLAN_802.11 ac VH80_Ch138	Body	Rear Face	0.2	-4.7	12.75	-0.27	258.2	0.00	SPLSR ≤ 0.04, Not required
5.6G WLAN_802.11 ac VH80_Ch106			0.49	-3.75	-13.05	-0.34			

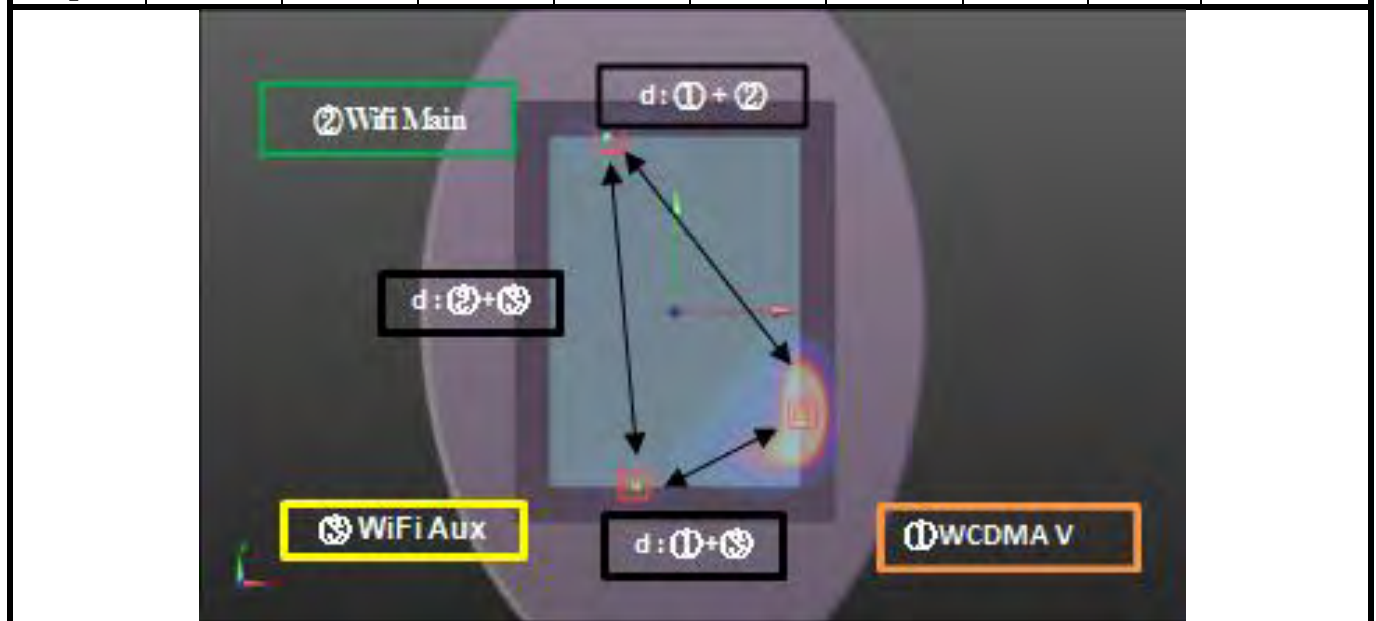

FCC SAR Test Report


Conditions	Exposure Condition	Test Position	SAR Value (W/kg)	Coordinates			Peak Location Separation Distance (R _i , mm)	SPLSR	Simultaneous Transmission SAR Test
				x	y	z			
WCDMA V_RMC12.2K_Ch4183	Body	Left Side	0.383	-0.25	6.7	-0.1	91.8	0.03	SPLSR ≤ 0.04, Not required
5.3G WLAN_802.11 ac_VH80_Ch58			1.39	0.45	-2.45	-0.35			

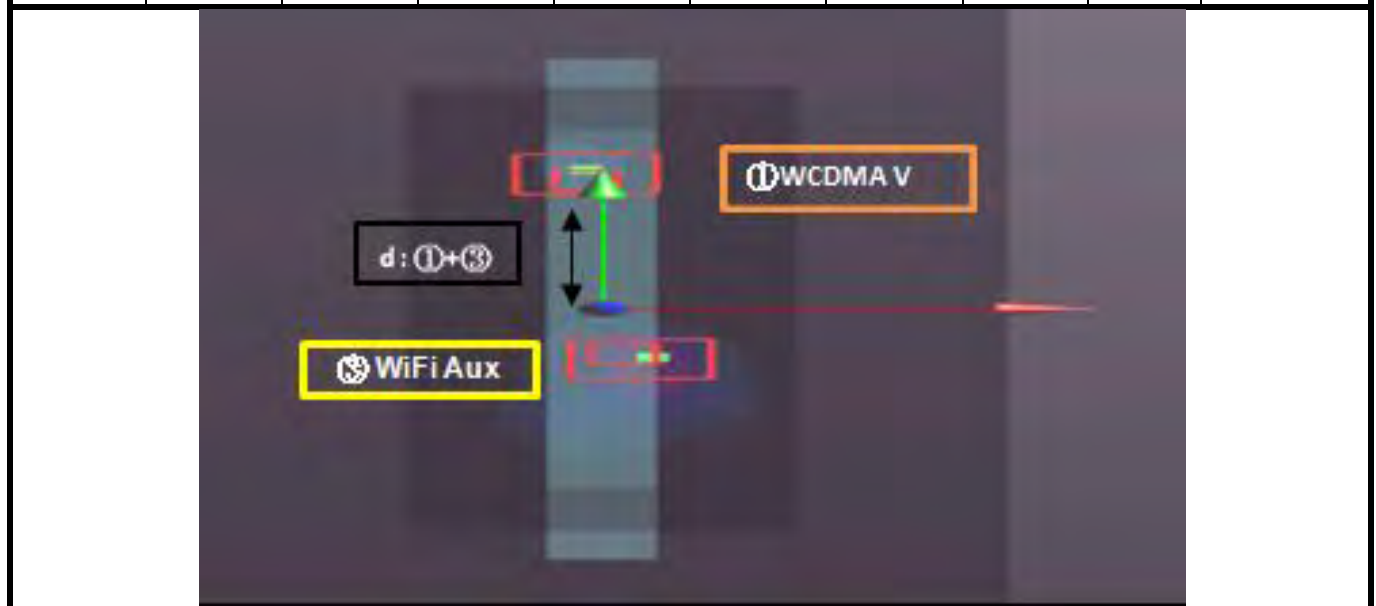

FCC SAR Test Report


CDMA BC0

Conditions	Exposure Condition	Test Position	SAR Value (W/kg)	Coordinates			Peak Location Separation Distance (R _i , mm)	SPLSR	Simultaneous Transmission SAR Test
				x	y	z			
CDMA BC0_RC3+SO 32_Ch1013	Body	Rear Face	1.058	9.27	-7.36	0.19	266.1	0.01	SPLSR ≤ 0.04, Not required
2.4G WALN_802.11 b_Ant0			0.34	-7.25	13.5	0.56			
CDMA BC0_RC3+SO 32_Ch1013	Body	Rear Face	1.058	9.27	-7.36	0.19	158.0	0.01	SPLSR ≤ 0.04, Not required
2.4G WALN_802.11 b_Ant1			0.35	-5.48	-13.02	0.55			
2.4G WALN_802.11 b_Ant0	Body	Rear Face	0.34	-7.25	13.5	0.56	265.8	0.00	SPLSR ≤ 0.04, Not required
2.4G WALN_802.11 b_Ant1			0.35	-5.48	-13.02	0.55			

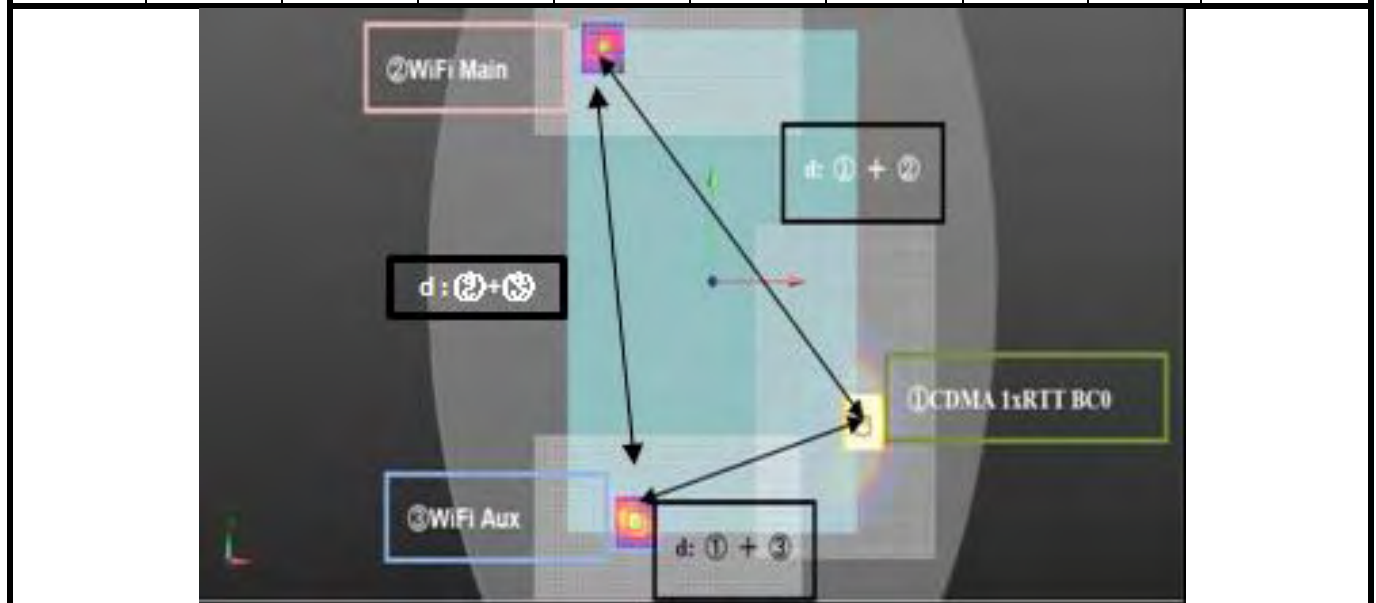


FCC SAR Test Report

Conditions	Exposure Condition	Test Position	SAR Value (W/kg)	Coordinates			Peak Location Separation Distance (R _i , mm)	SPLSR	Simultaneous Transmission SAR Test
				x	y	z			
CDMA BC0_RC3+SO 32_Ch1013	Body	Rear Face	1.058	9.27	-7.36	0.19	244.9	0.01	SPLSR ≤ 0.04, Not required
5.6G WLAN_802.11 ac VH80_Ch138			0.2	-4.7	12.75	-0.27			
CDMA BC0_RC3+SO 32_Ch1013	Body	Rear Face	1.058	9.27	-7.36	0.19	142.2	0.01	SPLSR ≤ 0.04, Not required
5.6G WLAN_802.11 ac VH80_Ch106			0.49	-3.75	-13.05	-0.34			
5.6G WLAN_802.11 ac VH80_Ch138	Body	Rear Face	0.2	-4.7	12.75	-0.27	258.2	0.00	SPLSR ≤ 0.04, Not required
5.6G WLAN_802.11 ac VH80_Ch106			0.49	-3.75	-13.05	-0.34			

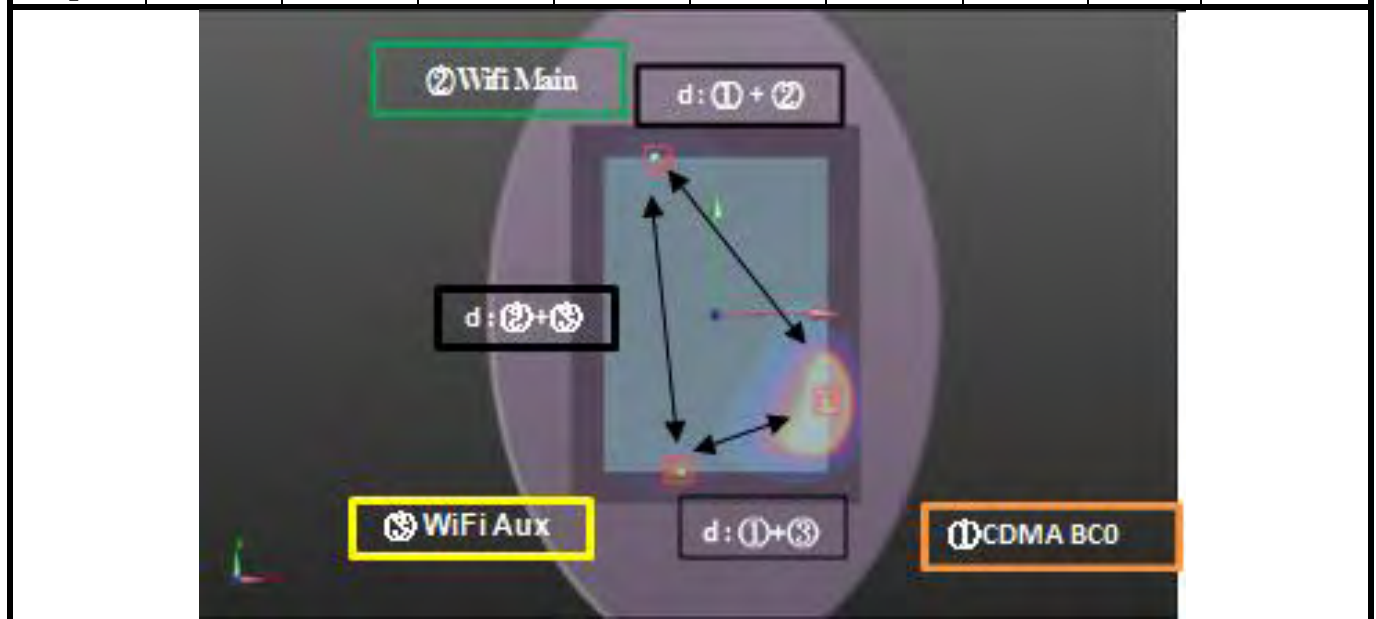


FCC SAR Test Report

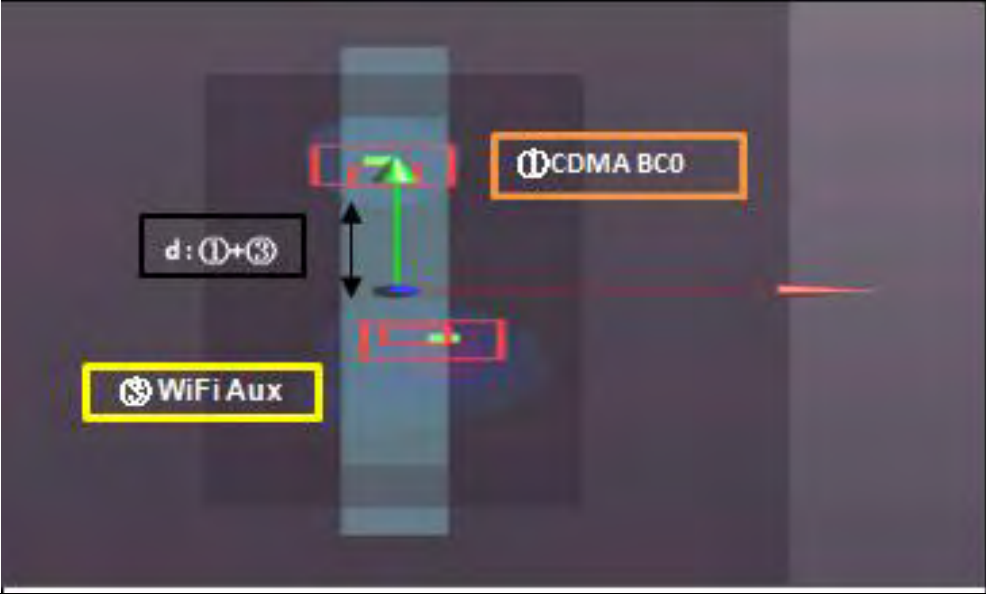Conditions	Exposure Condition	Test Position	SAR Value (W/kg)	Coordinates			Peak Location Separation Distance (R _i , mm)	SPLSR	Simultaneous Transmission SAR Test
				x	y	z			
CDMA BC0_RC3+SO 32_Ch384	Body	Left Side	0.425	-0.25	6.29	-0.09	87.7	0.03	SPLSR ≤ 0.04, Not required
5.3G WLAN_802.11 ac_VH80_Ch58			1.39	0.45	-2.45	-0.35			
 <p>The diagram illustrates the SAR test setup. It shows a vertical blue beam representing the test area. Two antennas are positioned vertically: a CDMA BC0 antenna (top, orange box) and a WiFi Aux antenna (bottom, yellow box). A double-headed vertical arrow between them is labeled 'd: ①+③'. A red laser line is shown extending horizontally from the WiFi Aux antenna to the right. The background is a dark, textured surface.</p>									

FCC SAR Test Report


CDMA BC1

Conditions	Exposure Condition	Test Position	SAR Value (W/kg)	Coordinates			Peak Location Separation Distance (R _i , mm)	SPLSR	Simultaneous Transmission SAR Test
				x	y	z			
CDMA BC1_RTAP15 3.6_Ch1175	Body	Rear Face	1.217	9.27	-5.61	0.21	252.6	0.01	SPLSR ≤ 0.04, Not required
2.4G WALN_802.11 b_Ant0			0.34	-7.25	13.5	0.56			
CDMA BC1_RTAP15 3.6_Ch1175	Body	Rear Face	1.217	9.27	-5.61	0.21	165.1	0.01	SPLSR ≤ 0.04, Not required
2.4G WALN_802.11 b_Ant1			0.35	-5.48	-13.02	0.55			
2.4G WALN_802.11 b_Ant0	Body	Rear Face	0.34	-7.25	13.5	0.56	265.8	0.00	SPLSR ≤ 0.04, Not required
2.4G WALN_802.11 b_Ant1			0.35	-5.48	-13.02	0.55			

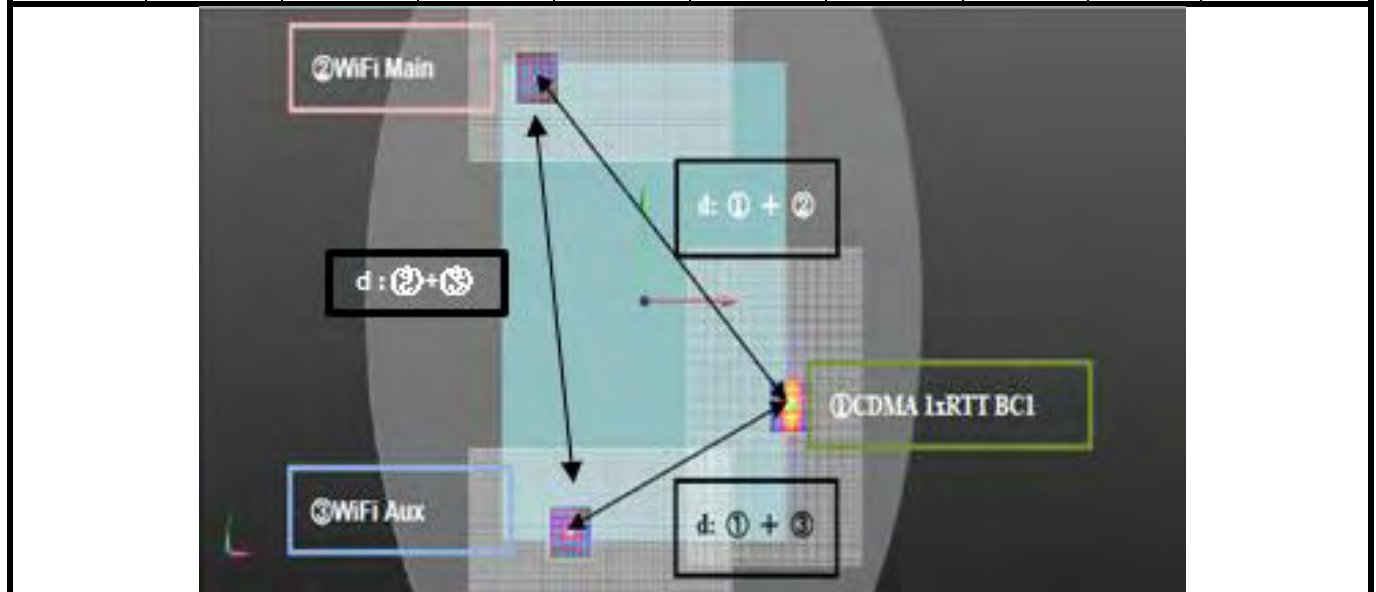

FCC SAR Test Report


Conditions	Exposure Condition	Test Position	SAR Value (W/kg)	Coordinates			Peak Location Separation Distance (R _i , mm)	SPLSR	Simultaneous Transmission SAR Test
				x	y	z			
CDMA BC1_RTAP15 3.6_Ch1175	Body	Rear Face	1.217	9.27	-5.61	0.21	230.8	0.01	SPLSR ≤ 0.04, Not required
5.6G WLAN_802.11 ac VH80_Ch138			0.2	-4.7	12.75	-0.27			
CDMA BC1_RTAP15 3.6_Ch1175	Body	Rear Face	1.217	9.27	-5.61	0.21	150.1	0.01	SPLSR ≤ 0.04, Not required
5.6G WLAN_802.11 ac VH80_Ch106			0.49	-3.75	-13.05	-0.34			
5.6G WLAN_802.11 ac VH80_Ch138	Body	Rear Face	0.2	-4.7	12.75	-0.27	258.2	0.00	SPLSR ≤ 0.04, Not required
5.6G WLAN_802.11 ac VH80_Ch106			0.49	-3.75	-13.05	-0.34			

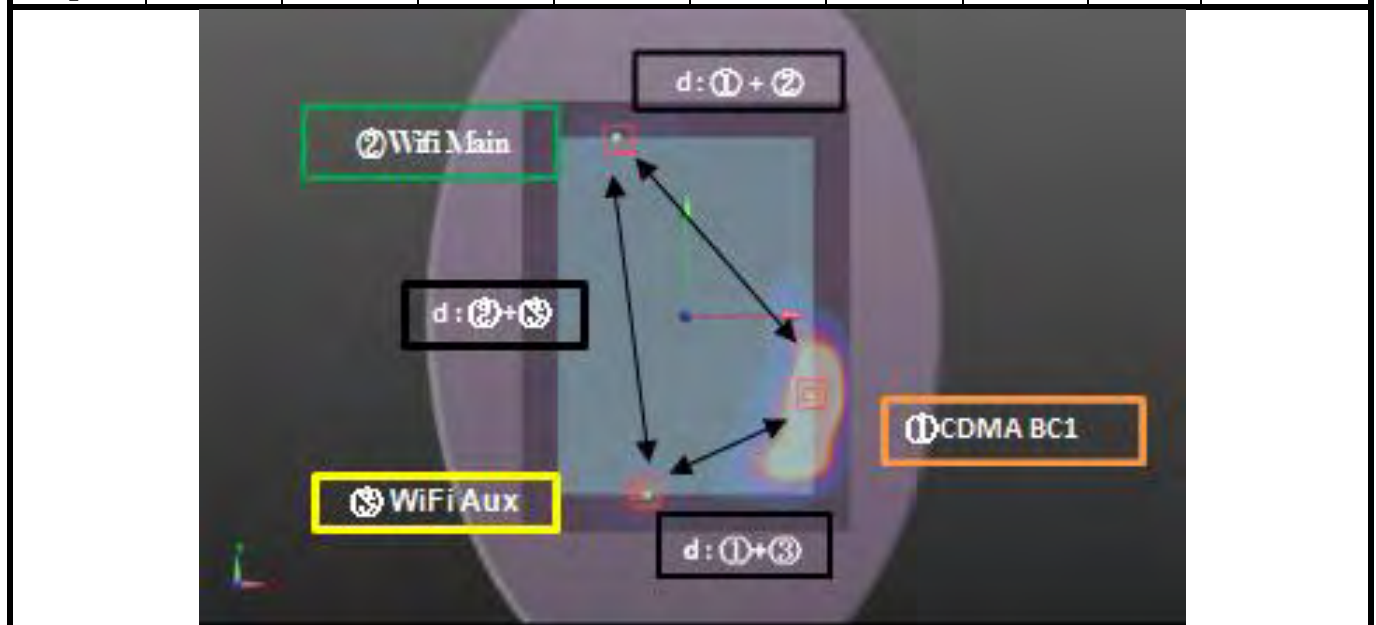

FCC SAR Test Report


CDMA BC10

Conditions	Exposure Condition	Test Position	SAR Value (W/kg)	Coordinates			Peak Location Separation Distance (R _i , mm)	SPLSR	Simultaneous Transmission SAR Test
				x	y	z			
CDMA BC10_RC3+S O32_Ch560	Body	Rear Face	0.997	9.27	-7.41	0.19	266.5	0.01	SPLSR ≤ 0.04, Not required
2.4G WALN_802.11 b_Ant0			0.34	-7.25	13.5	0.56			
CDMA BC10_RC3+S O32_Ch560	Body	Rear Face	0.997	9.27	-7.41	0.19	157.8	0.01	SPLSR ≤ 0.04, Not required
2.4G WALN_802.11 b_Ant1			0.35	-5.48	-13.02	0.55			
2.4G WALN_802.11 b_Ant0	Body	Rear Face	0.34	-7.25	13.5	0.56	265.8	0.00	SPLSR ≤ 0.04, Not required
2.4G WALN_802.11 b_Ant1			0.35	-5.48	-13.02	0.55			

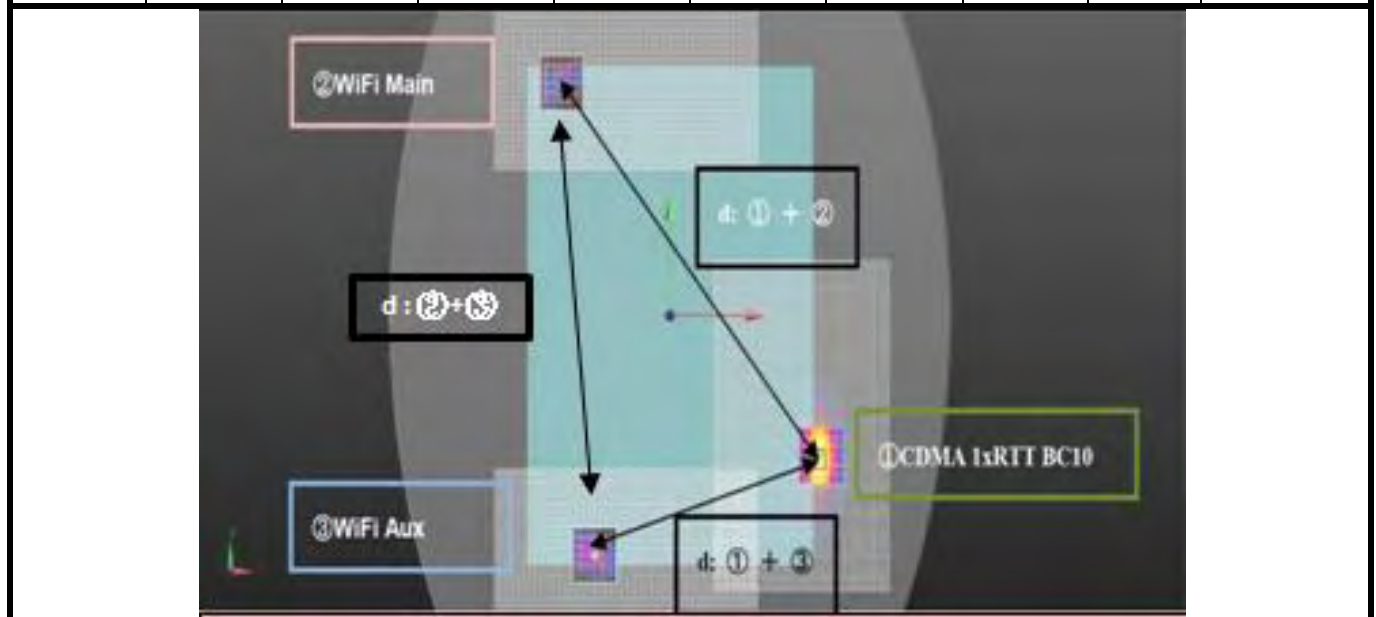


FCC SAR Test Report

Conditions	Exposure Condition	Test Position	SAR Value (W/kg)	Coordinates			Peak Location Separation Distance (R _i , mm)	SPLSR	Simultaneous Transmission SAR Test
				x	y	z			
CDMA BC10_RC3+S O32_Ch560	Body	Rear Face	0.997	9.27	-7.41	0.19	245.3	0.01	SPLSR ≤ 0.04, Not required
5.6G WLAN_802.11 ac VH80_Ch138			0.2	-4.7	12.75	-0.27			
CDMA BC10_RC3+S O32_Ch560	Body	Rear Face	0.997	9.27	-7.41	0.19	142.0	0.01	SPLSR ≤ 0.04, Not required
5.6G WLAN_802.11 ac VH80_Ch106			0.49	-3.75	-13.05	-0.34			
5.6G WLAN_802.11 ac VH80_Ch138	Body	Rear Face	0.2	-4.7	12.75	-0.27	258.2	0.00	SPLSR ≤ 0.04, Not required
5.6G WLAN_802.11 ac VH80_Ch106			0.49	-3.75	-13.05	-0.34			

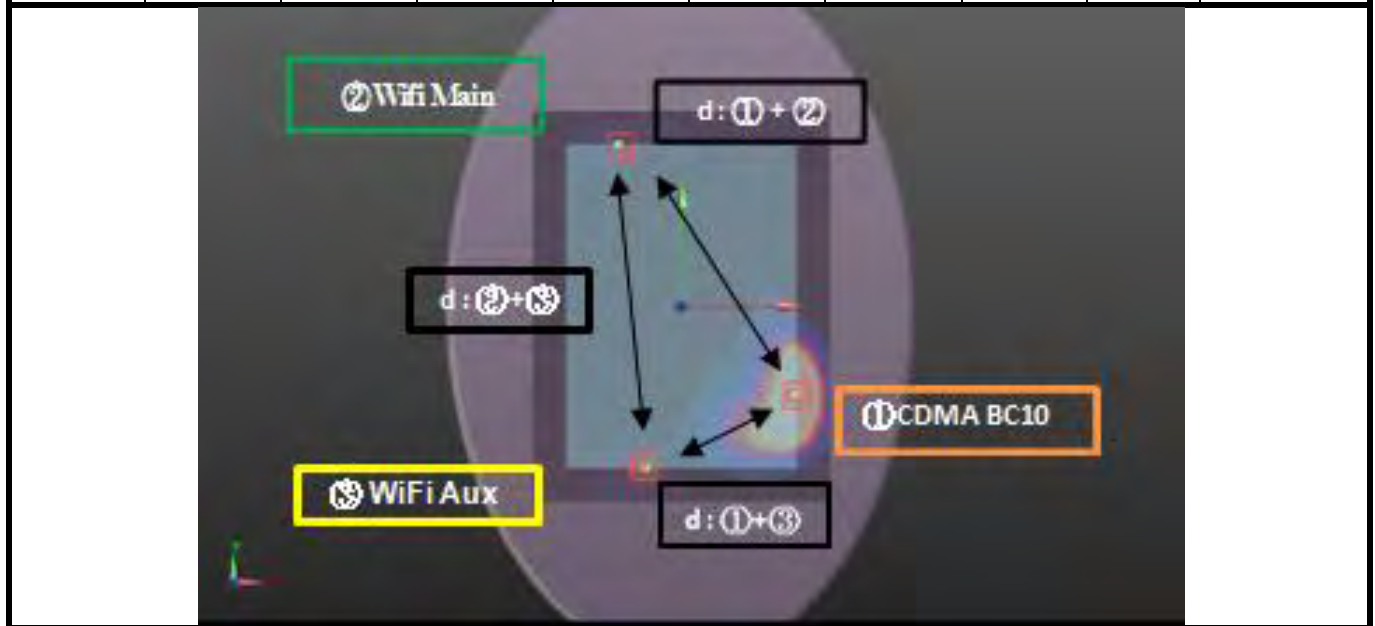

FCC SAR Test Report


Conditions	Exposure Condition	Test Position	SAR Value (W/kg)	Coordinates			Peak Location Separation Distance (R _i , mm)	SPLSR	Simultaneous Transmission SAR Test
				x	y	z			
CDMA BC10_RC3+S O32_Ch580	Body	Left Side	0.439	-0.25	5.9	-0.1	83.8	0.03	SPLSR ≤ 0.04, Not required
5.3G WLAN_802.11 ac_VH80_Ch58			1.39	0.45	-2.45	-0.35			

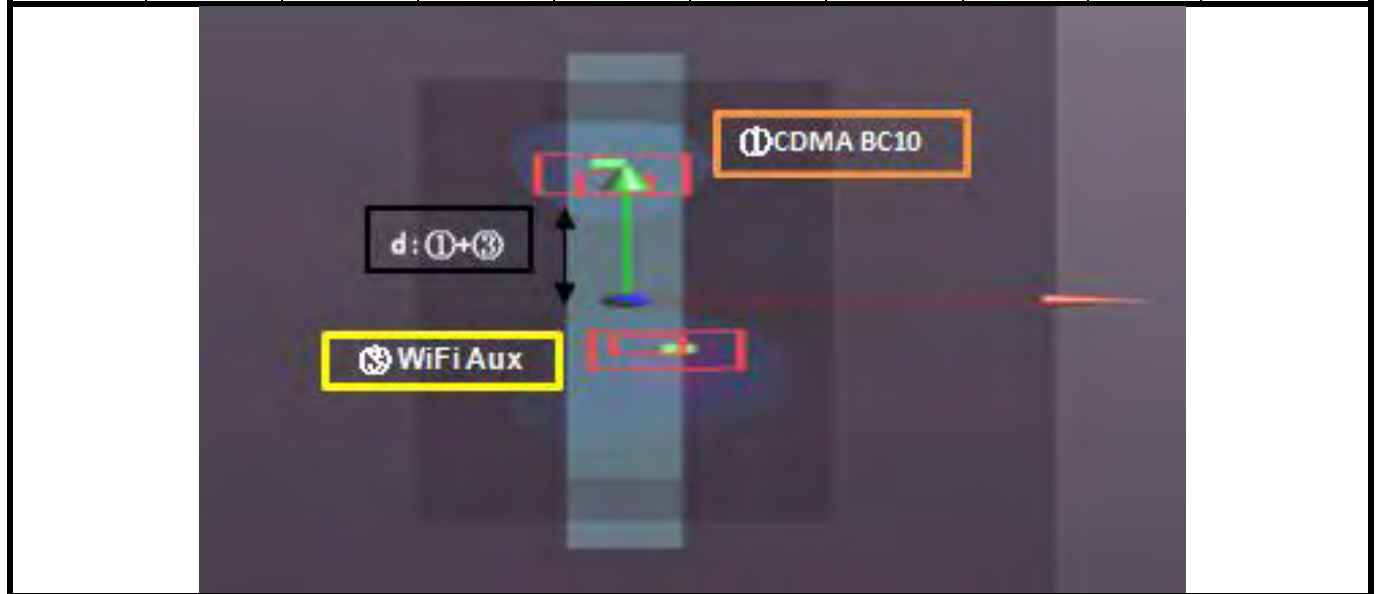

FCC SAR Test Report


LTE 2

Conditions	Exposure Condition	Test Position	SAR Value (W/kg)	Coordinates			Peak Location Separation Distance (R _i , mm)	SPLSR	Simultaneous Transmission SAR Test
				x	y	z			
LTE 2_QPSK20M_Ch18700	Body	Rear Face	1.285	10.25	-5.93	0.25	261.5	0.01	SPLSR ≤ 0.04, Not required
2.4G WALN_802.11 b_Ant0			0.34	-7.25	13.5	0.56			
LTE 2_QPSK20M_Ch18700	Body	Rear Face	1.285	10.25	-5.93	0.25	172.6	0.01	SPLSR ≤ 0.04, Not required
2.4G WALN_802.11 b_Ant1			0.35	-5.48	-13.02	0.55			
2.4G WALN_802.11 b_Ant0	Body	Rear Face	0.34	-7.25	13.5	0.56	265.8	0.00	SPLSR ≤ 0.04, Not required
2.4G WALN_802.11 b_Ant1			0.35	-5.48	-13.02	0.55			

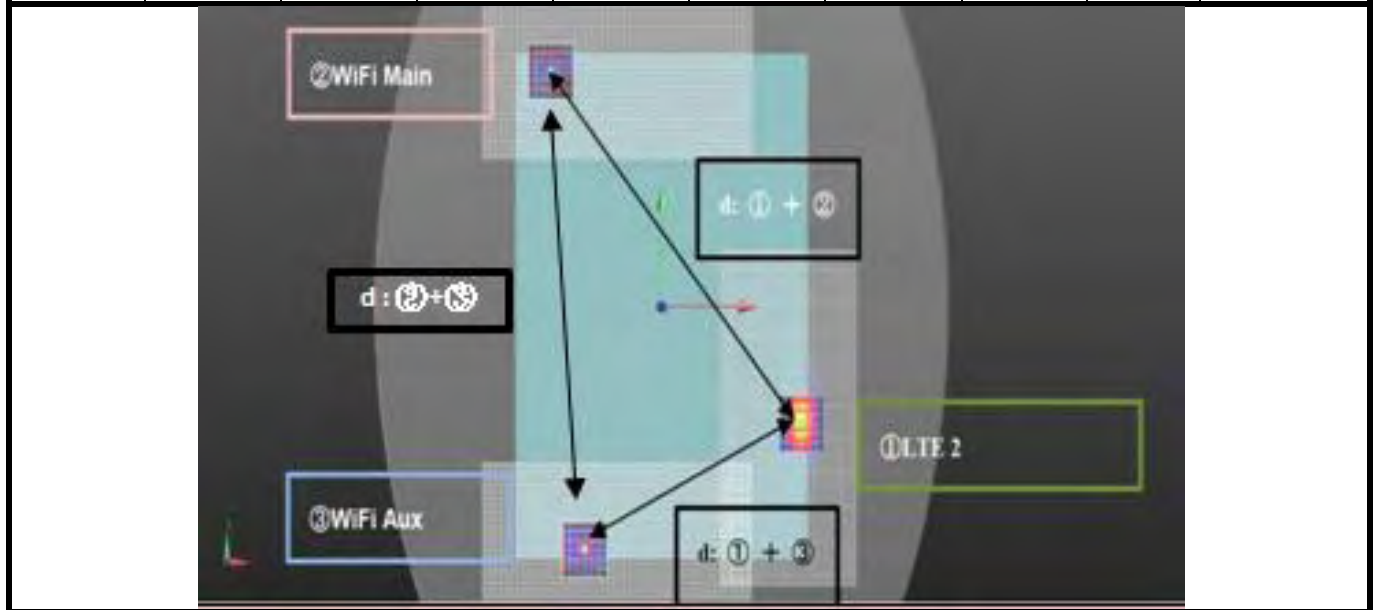


FCC SAR Test Report

Conditions	Exposure Condition	Test Position	SAR Value (W/kg)	Coordinates			Peak Location Separation Distance (R _i , mm)	SPLSR	Simultaneous Transmission SAR Test
				x	y	z			
LTE 2_QPSK20M_Ch18700	Body	Rear Face	1.285	10.25	-5.93	0.25	239.3	0.01	SPLSR ≤ 0.04, Not required
5.6G WLAN_802.11 ac VH80_Ch138			0.2	-4.7	12.75	-0.27			
LTE 2_QPSK20M_Ch18700	Body	Rear Face	1.285	10.25	-5.93	0.25	157.2	0.02	SPLSR ≤ 0.04, Not required
5.6G WLAN_802.11 ac VH80_Ch106			0.49	-3.75	-13.05	-0.34			
5.6G WLAN_802.11 ac VH80_Ch138	Body	Rear Face	0.2	-4.7	12.75	-0.27	258.2	0.00	SPLSR ≤ 0.04, Not required
5.6G WLAN_802.11 ac VH80_Ch106			0.49	-3.75	-13.05	-0.34			

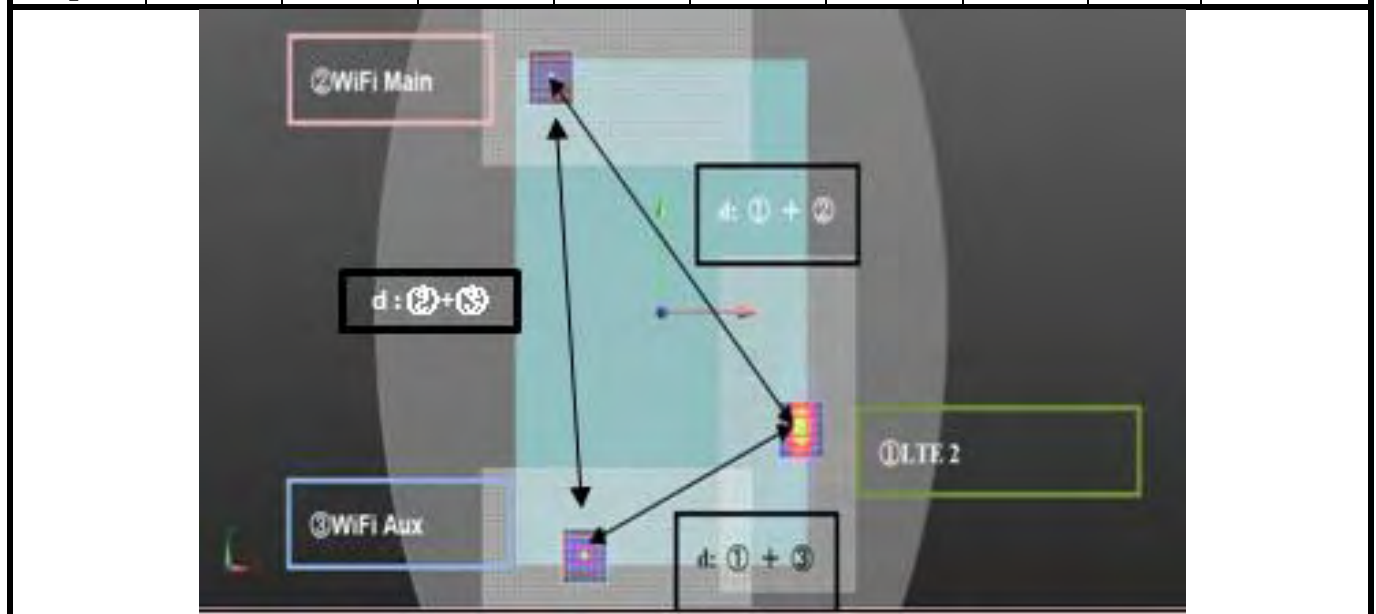

FCC SAR Test Report


Conditions	Exposure Condition	Test Position	SAR Value (W/kg)	Coordinates			Peak Location Separation Distance (R _i , mm)	SPLSR	Simultaneous Transmission SAR Test
				x	y	z			
LTE 2_QPSK20M_Ch18700	Body	Rear Face	1.285	10.25	-5.93	0.25	261.5	0.01	SPLSR ≤ 0.04, Not required
2.4G WALN_802.11 b			0.34	-7.25	13.5	0.56			

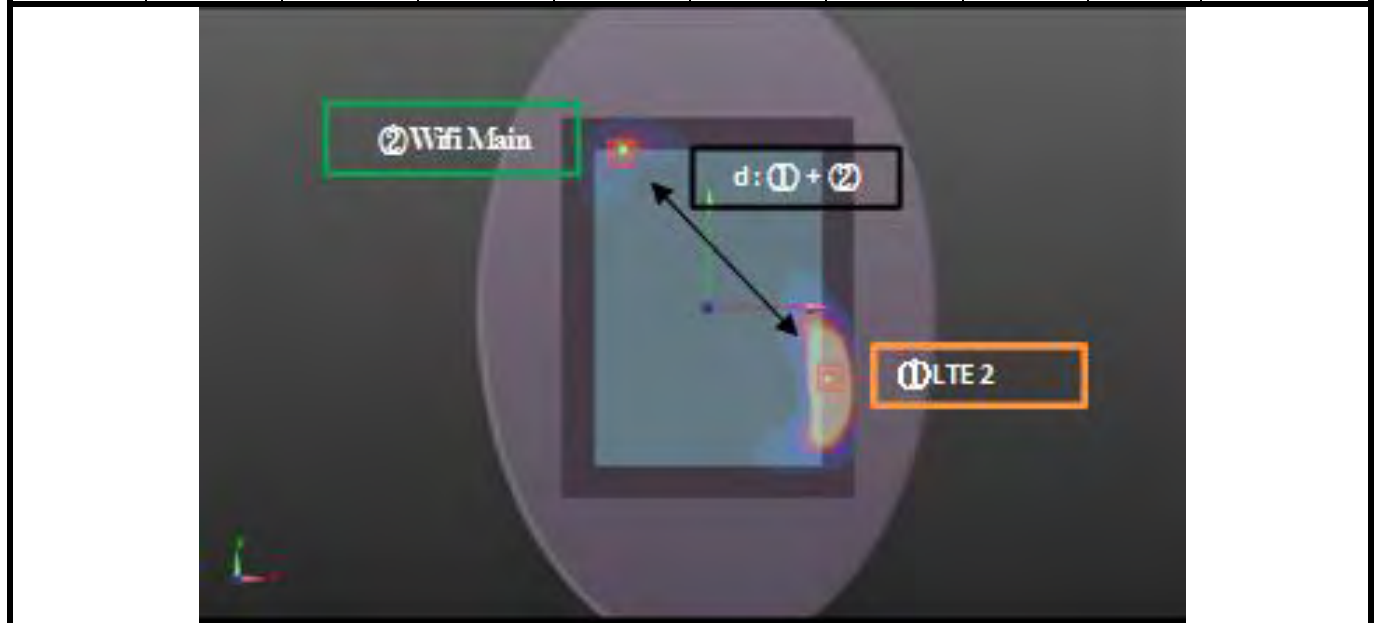

FCC SAR Test Report


LTE 4

Conditions	Exposure Condition	Test Position	SAR Value (W/kg)	Coordinates			Peak Location Separation Distance (R _i , mm)	SPLSR	Simultaneous Transmission SAR Test
				x	y	z			
LTE 4_QPSK20M_Ch20300	Body	Rear Face	1.292	9.27	-6.5	0.18	259.4	0.01	SPLSR ≤ 0.04, Not required
2.4G WALN_802.11 b_Ant0			0.34	-7.25	13.5	0.56			
LTE 4_QPSK20M_Ch20300	Body	Rear Face	1.292	9.27	-6.5	0.18	161.3	0.01	SPLSR ≤ 0.04, Not required
2.4G WALN_802.11 b_Ant1			0.35	-5.48	-13.02	0.55			
2.4G WALN_802.11 b_Ant0	Body	Rear Face	0.34	-7.25	13.5	0.56	265.8	0.00	SPLSR ≤ 0.04, Not required
2.4G WALN_802.11 b_Ant1			0.35	-5.48	-13.02	0.55			

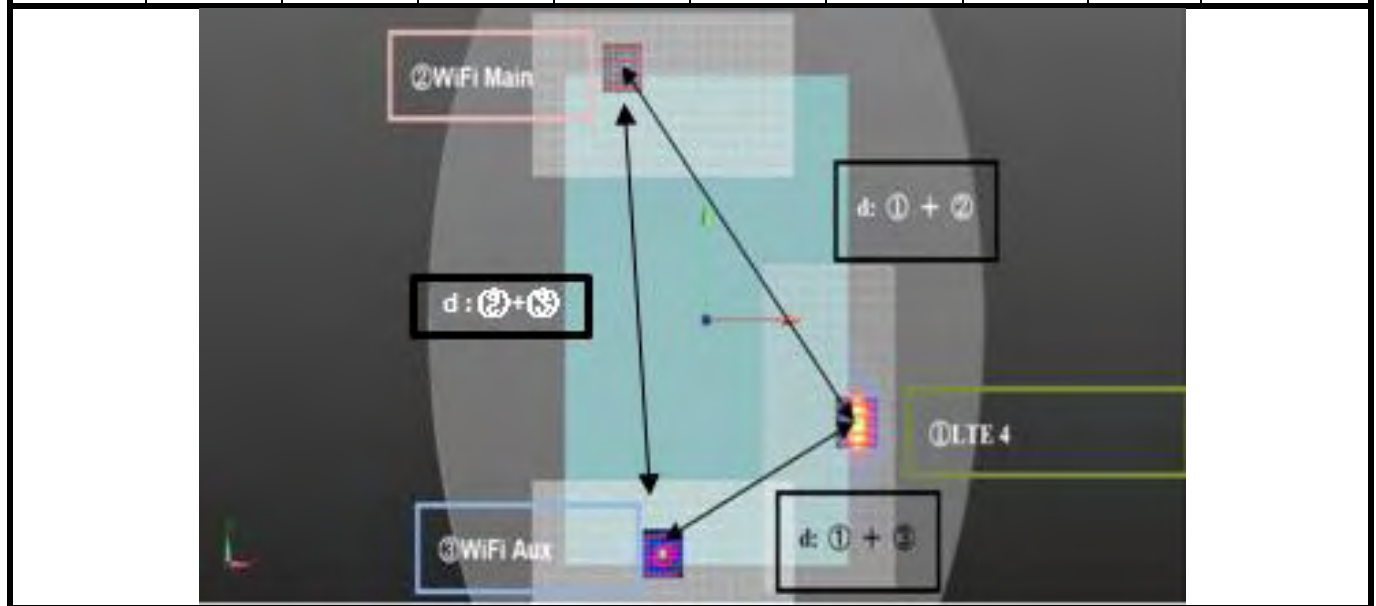


FCC SAR Test Report

Conditions	Exposure Condition	Test Position	SAR Value (W/kg)	Coordinates			Peak Location Separation Distance (R _i , mm)	SPLSR	Simultaneous Transmission SAR Test
				x	y	z			
LTE 4_QPSK20M_Ch20300	Body	Rear Face	1.292	9.27	-6.5	0.18	237.9	0.01	SPLSR ≤ 0.04, Not required
5.6G WLAN_802.11 ac VH80_Ch138			0.2	-4.7	12.75	-0.27			
LTE 4_QPSK20M_Ch20300	Body	Rear Face	1.292	9.27	-6.5	0.18	145.8	0.02	SPLSR ≤ 0.04, Not required
5.6G WLAN_802.11 ac VH80_Ch106			0.49	-3.75	-13.05	-0.34			
5.6G WLAN_802.11 ac VH80_Ch138	Body	Rear Face	0.2	-4.7	12.75	-0.27	258.2	0.00	SPLSR ≤ 0.04, Not required
5.6G WLAN_802.11 ac VH80_Ch106			0.49	-3.75	-13.05	-0.34			

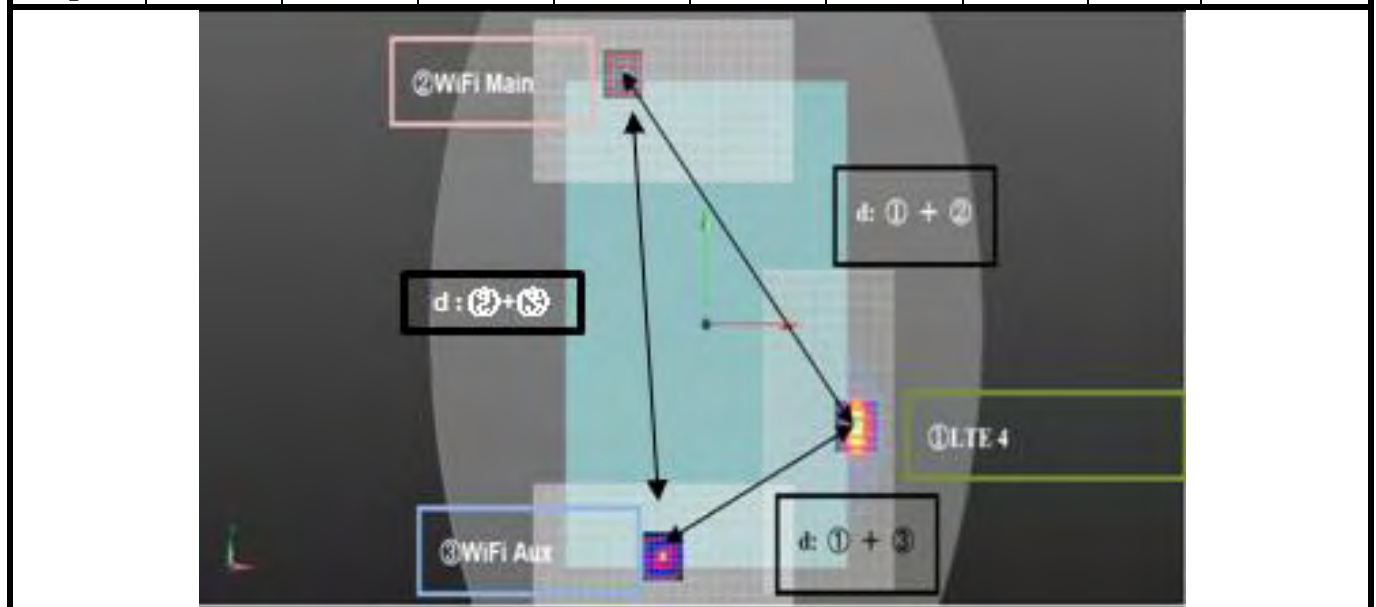


FCC SAR Test Report

Conditions	Exposure Condition	Test Position	SAR Value (W/kg)	Coordinates			Peak Location Separation Distance (R _i , mm)	SPLSR	Simultaneous Transmission SAR Test
				x	y	z			
LTE 4_QPSK20M_Ch20175	Body	Left Side	0.475	-0.39	6.77	0.09	92.7	0.03	SPLSR ≤ 0.04, Not required
5.3G WLAN_802.11 ac_VH80_Ch58			1.39	0.45	-2.45	-0.35			

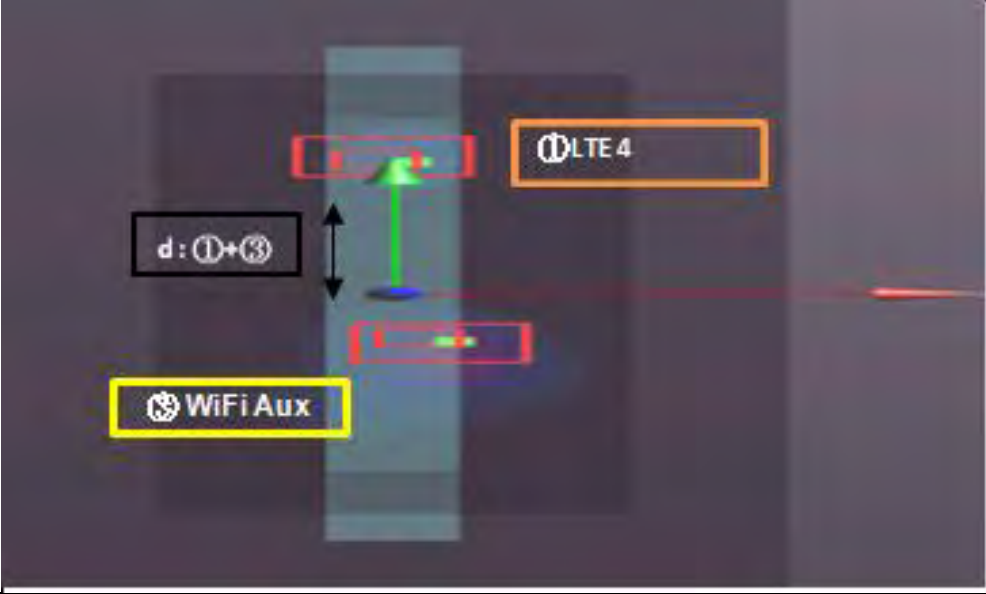

FCC SAR Test Report


Conditions	Exposure Condition	Test Position	SAR Value (W/kg)	Coordinates			Peak Location Separation Distance (R _i , mm)	SPLSR	Simultaneous Transmission SAR Test
				x	y	z			
LTE 4_QPSK20M_Ch20300	Body	Rear Face	1.292	9.27	-6.5	0.18	259.4	0.01	SPLSR ≤ 0.04, Not required
2.4G WALN_802.11b			0.34	-7.25	13.5	0.56			

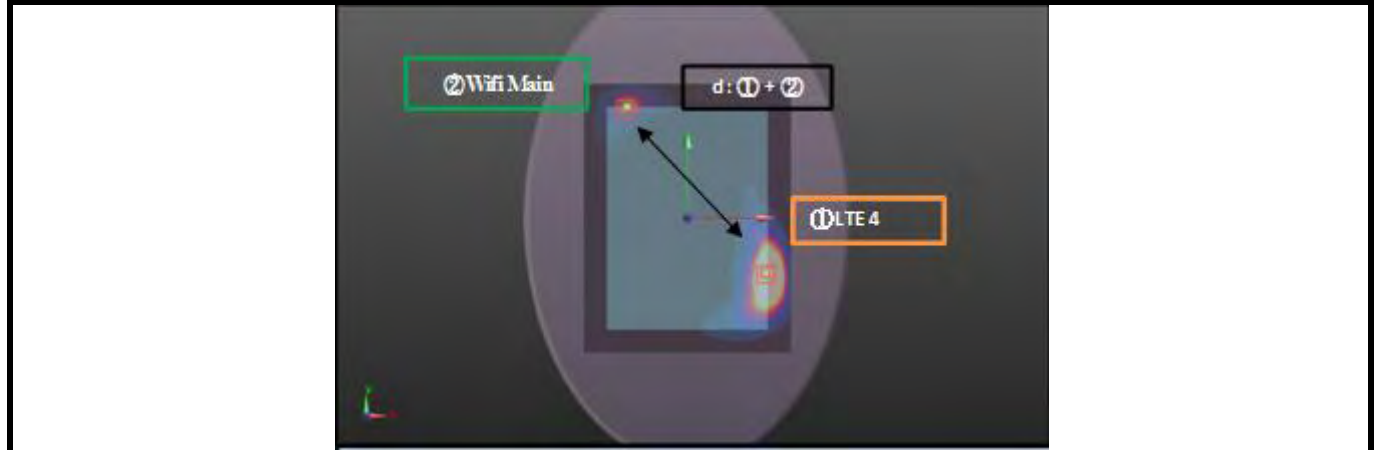

FCC SAR Test Report


LTE 5

Conditions	Exposure Condition	Test Position	SAR Value (W/kg)	Coordinates			Peak Location Separation Distance (R _i , mm)	SPLSR	Simultaneous Transmission SAR Test
				x	y	z			
LTE 5_QPSK10M_Ch20600	Body	Rear Face	1.07	9.75	-8.02	0.25	274.3	0.01	SPLSR ≤ 0.04, Not required
2.4G WALN_802.11 b_Ant0			0.34	-7.25	13.5	0.56			
LTE 5_QPSK10M_Ch20600	Body	Rear Face	1.07	9.75	-8.02	0.25	160.3	0.01	SPLSR ≤ 0.04, Not required
2.4G WALN_802.11 b_Ant1			0.35	-5.48	-13.02	0.55			
2.4G WALN_802.11 b_Ant0	Body	Rear Face	0.34	-7.25	13.5	0.56	265.8	0.00	SPLSR ≤ 0.04, Not required
2.4G WALN_802.11 b_Ant1			0.35	-5.48	-13.02	0.55			

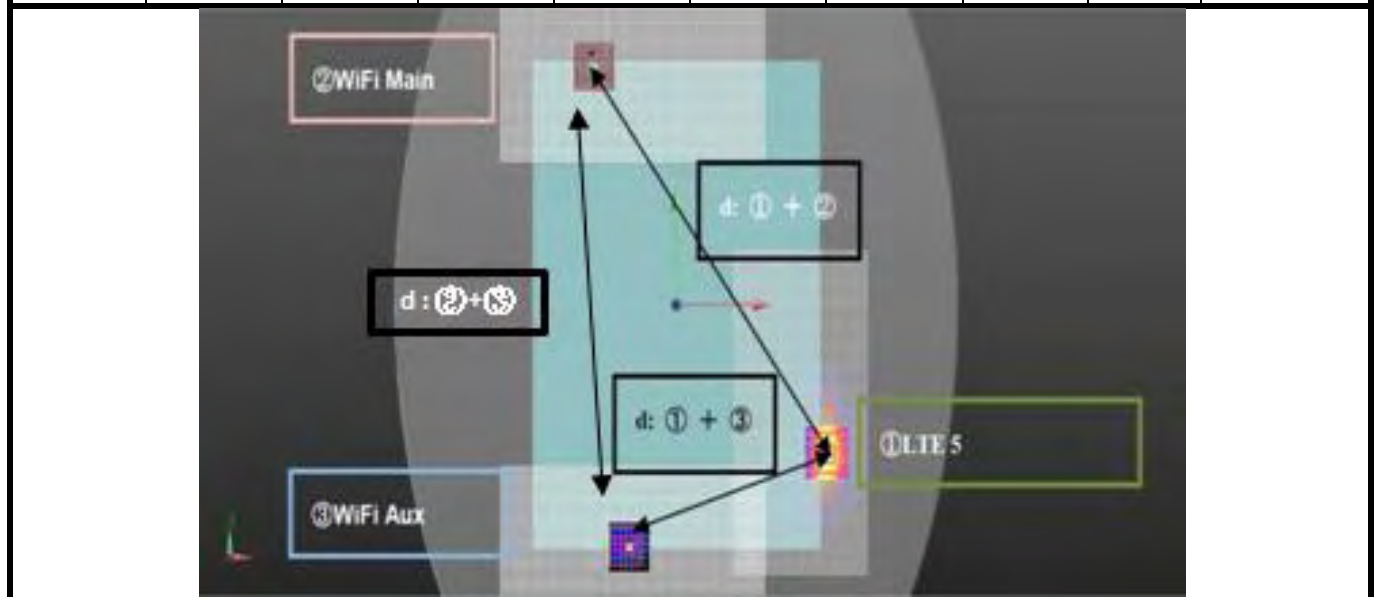


FCC SAR Test Report

Conditions	Exposure Condition	Test Position	SAR Value (W/kg)	Coordinates			Peak Location Separation Distance (R _i , mm)	SPLSR	Simultaneous Transmission SAR Test
				x	y	z			
LTE 5_QPSK10M_Ch20600	Body	Rear Face	1.07	9.75	-8.02	0.25	253.1	0.01	SPLSR ≤ 0.04, Not required
5.6G WLAN_802.11 ac VH80_Ch138			0.2	-4.7	12.75	-0.27			
LTE 5_QPSK10M_Ch20600	Body	Rear Face	1.07	9.75	-8.02	0.25	144.2	0.01	SPLSR ≤ 0.04, Not required
5.6G WLAN_802.11 ac VH80_Ch106			0.49	-3.75	-13.05	-0.34			
5.6G WLAN_802.11 ac VH80_Ch138	Body	Rear Face	0.2	-4.7	12.75	-0.27	258.2	0.00	SPLSR ≤ 0.04, Not required
5.6G WLAN_802.11 ac VH80_Ch106			0.49	-3.75	-13.05	-0.34			

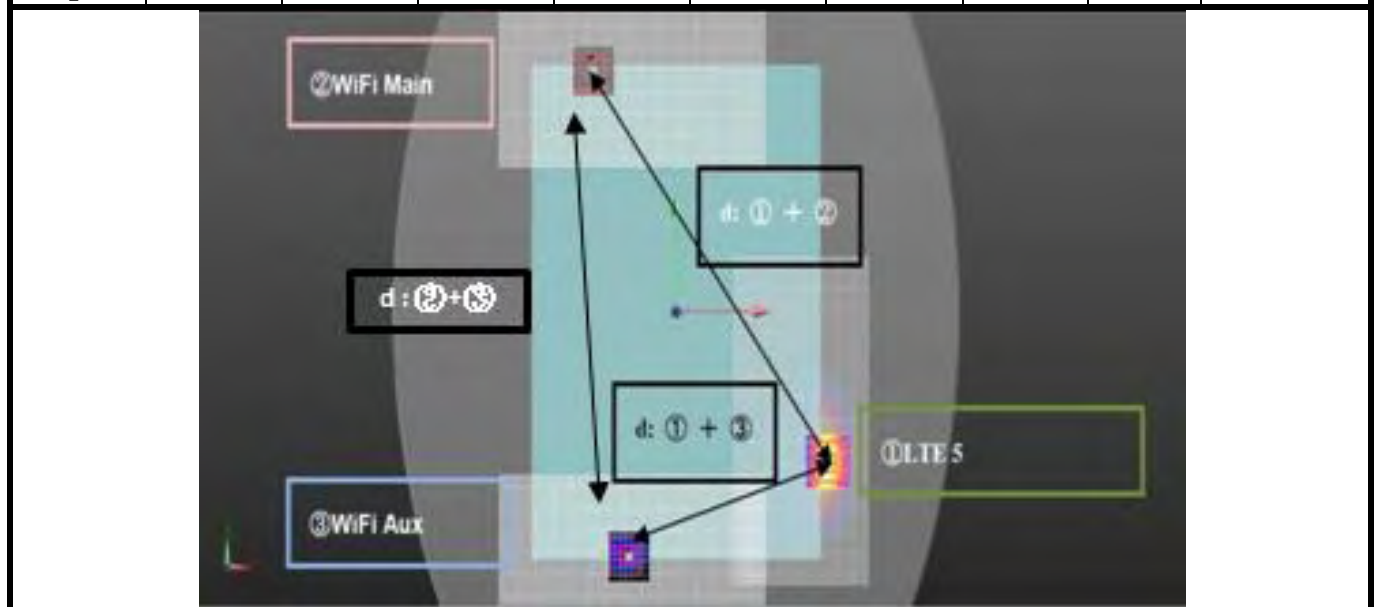

FCC SAR Test Report


Conditions	Exposure Condition	Test Position	SAR Value (W/kg)	Coordinates			Peak Location Separation Distance (R _i , mm)	SPLSR	Simultaneous Transmission SAR Test
				x	y	z			
LTE 5_QPSK10M_Ch20525	Body	Left Side	0.284	-0.16	6.84	-0.1	93.1	0.02	SPLSR ≤ 0.04, Not required
5.3G WLAN_802.11 ac_VH80_Ch58			1.39	0.45	-2.45	-0.35			

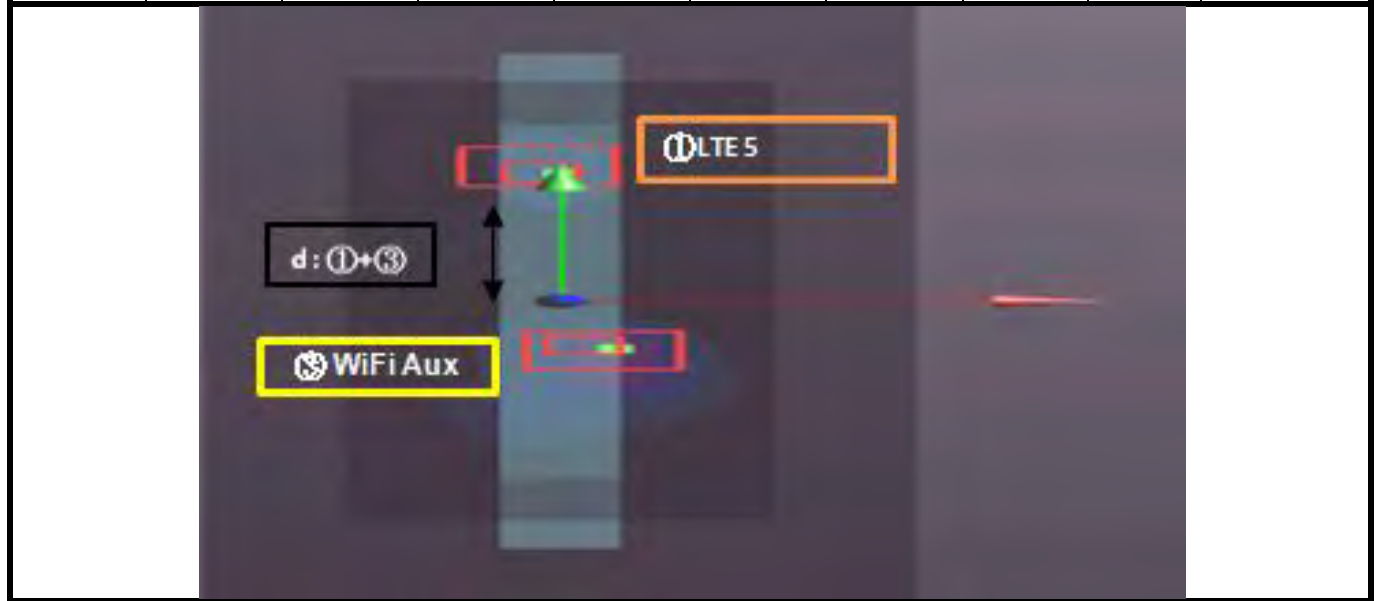

FCC SAR Test Report


LTE 13

Conditions	Exposure Condition	Test Position	SAR Value (W/kg)	Coordinates			Peak Location Separation Distance (R _i , mm)	SPLSR	Simultaneous Transmission SAR Test
				x	y	z			
LTE 13_QPSK10M_Ch23230	Body	Rear Face	1.058	9.91	-8.18	0.23	276.5	0.01	SPLSR ≤ 0.04, Not required
2.4G WALN_802.11_b_Ant0			0.34	-7.25	13.5	0.56			
LTE 13_QPSK10M_Ch23230	Body	Rear Face	1.058	9.91	-8.18	0.23	161.4	0.01	SPLSR ≤ 0.04, Not required
2.4G WALN_802.11_b_Ant1			0.35	-5.48	-13.02	0.55			
2.4G WALN_802.11_b_Ant0	Body	Rear Face	0.34	-7.25	13.5	0.56	265.8	0.00	SPLSR ≤ 0.04, Not required
2.4G WALN_802.11_b_Ant1			0.35	-5.48	-13.02	0.55			

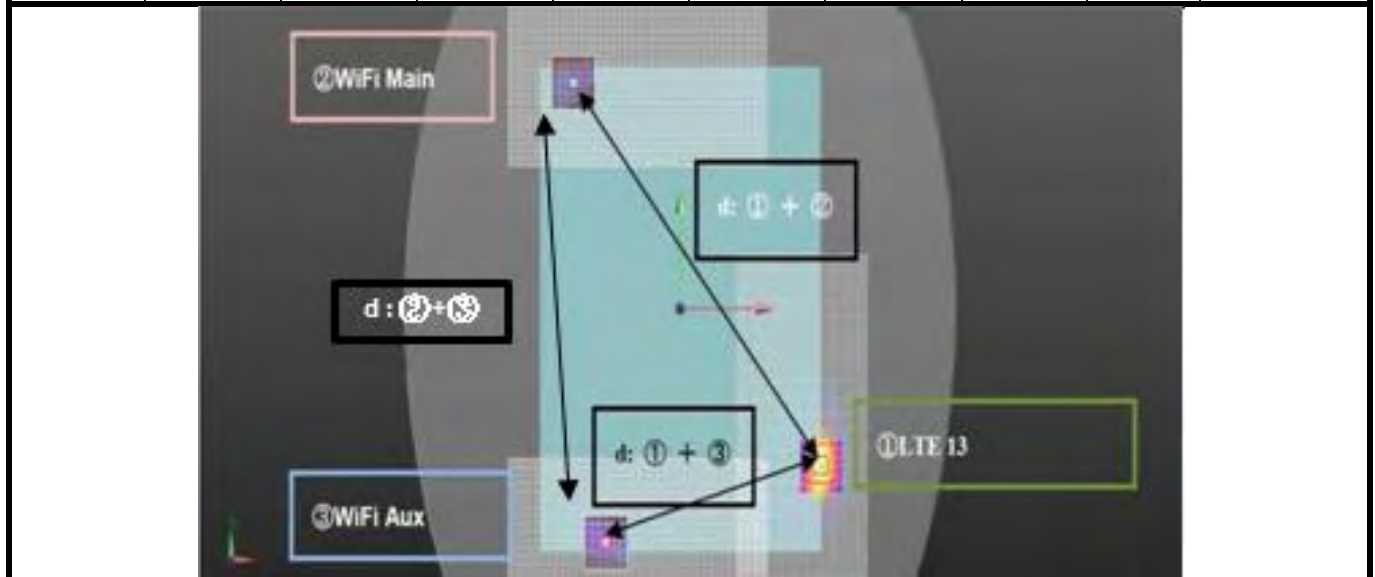


FCC SAR Test Report

Conditions	Exposure Condition	Test Position	SAR Value (W/kg)	Coordinates			Peak Location Separation Distance (R _i , mm)	SPLSR	Simultaneous Transmission SAR Test
				x	y	z			
LTE 13_QPSK10M_Ch23230	Body	Rear Face	1.058	9.91	-8.18	0.23	255.3	0.01	SPLSR ≤ 0.04, Not required
5.6G WLAN_802.11 ac VH80_Ch138			0.2	-4.7	12.75	-0.27			
LTE 13_QPSK10M_Ch23230	Body	Rear Face	1.058	9.91	-8.18	0.23	145.1	0.01	SPLSR ≤ 0.04, Not required
5.6G WLAN_802.11 ac VH80_Ch106			0.49	-3.75	-13.05	-0.34			
5.6G WLAN_802.11 ac VH80_Ch138	Body	Rear Face	0.2	-4.7	12.75	-0.27	258.2	0.00	SPLSR ≤ 0.04, Not required
5.6G WLAN_802.11 ac VH80_Ch106			0.49	-3.75	-13.05	-0.34			

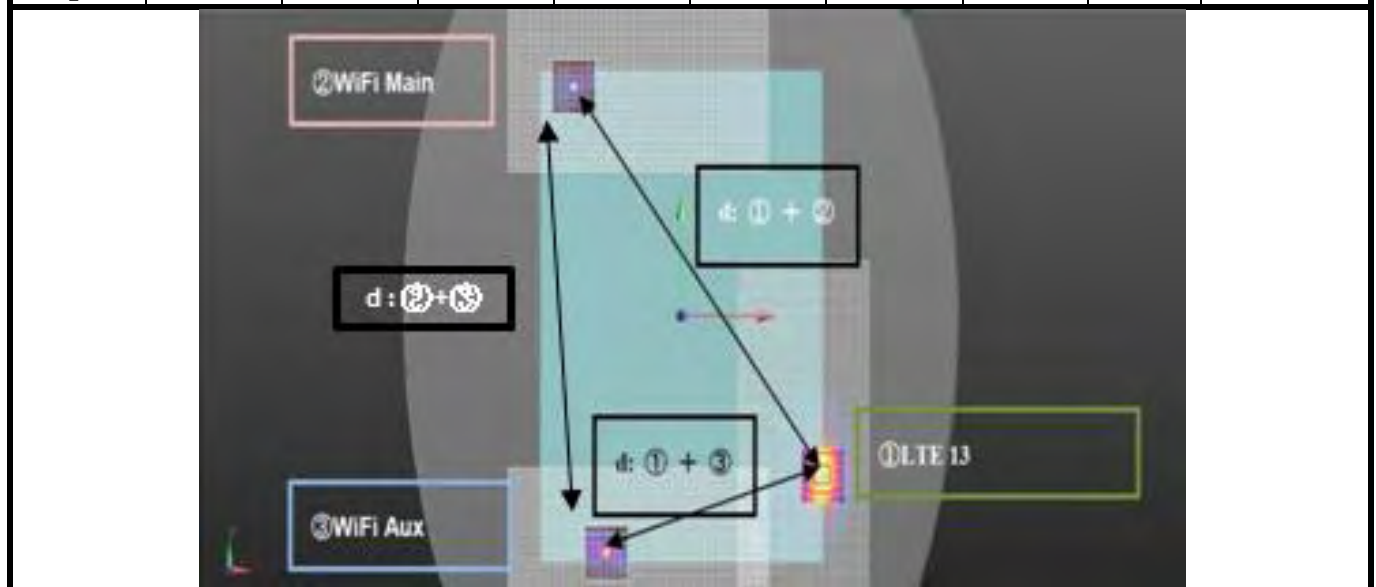

FCC SAR Test Report


Conditions	Exposure Condition	Test Position	SAR Value (W/kg)	Coordinates			Peak Location Separation Distance (R _i , mm)	SPLSR	Simultaneous Transmission SAR Test
				x	y	z			
LTE 13_QPSK10M_Ch23230	Body	Left Side	0.305	-0.16	7	-0.09	94.7	0.02	SPLSR ≤ 0.04, Not required
5.3G WLAN_802.11 ac_VH80_Ch58			1.39	0.45	-2.45	-0.35			

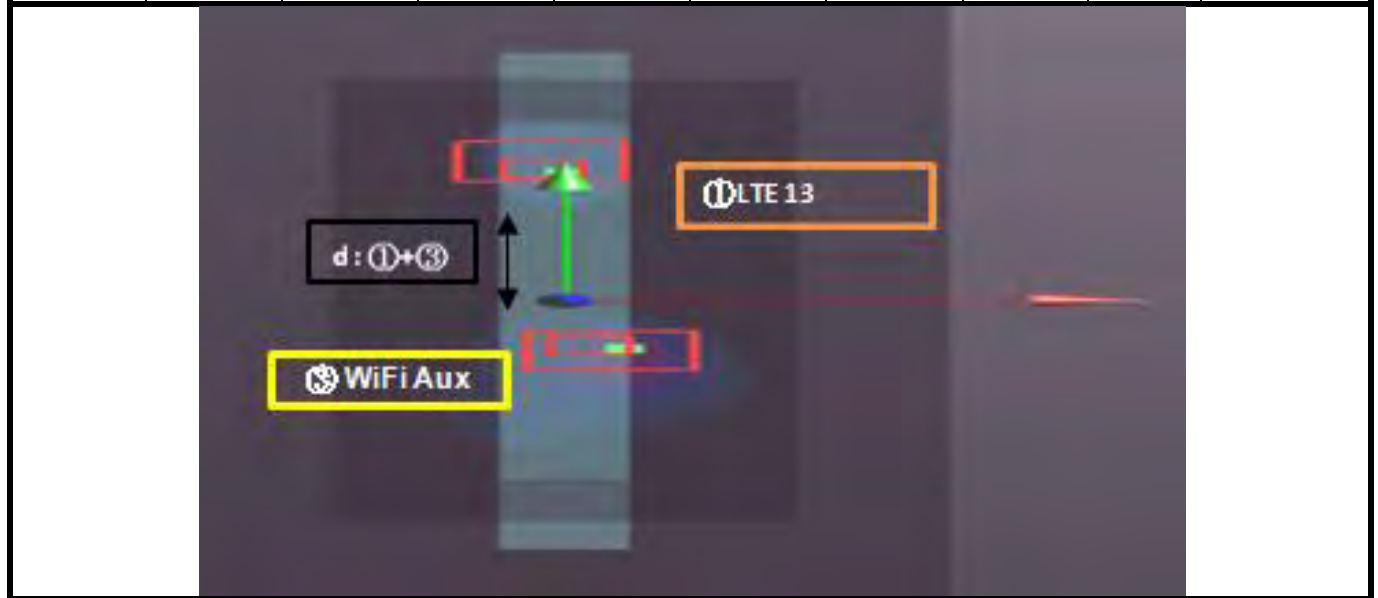

FCC SAR Test Report


LTE 17

Conditions	Exposure Condition	Test Position	SAR Value (W/kg)	Coordinates			Peak Location Separation Distance (R _i , mm)	SPLSR	Simultaneous Transmission SAR Test
				x	y	z			
LTE 17_QPSK10M_Ch23800	Body	Rear Face	1.276	9.75	-7.86	0.22	273.0	0.01	SPLSR ≤ 0.04, Not required
2.4G WALN_802.11_b_Ant0			0.34	-7.25	13.5	0.56			
LTE 17_QPSK10M_Ch23800	Body	Rear Face	1.276	9.75	-7.86	0.22	160.8	0.01	SPLSR ≤ 0.04, Not required
2.4G WALN_802.11_b_Ant1			0.35	-5.48	-13.02	0.55			
2.4G WALN_802.11_b_Ant0	Body	Rear Face	0.34	-7.25	13.5	0.56	265.8	0.00	SPLSR ≤ 0.04, Not required
2.4G WALN_802.11_b_Ant1			0.35	-5.48	-13.02	0.55			

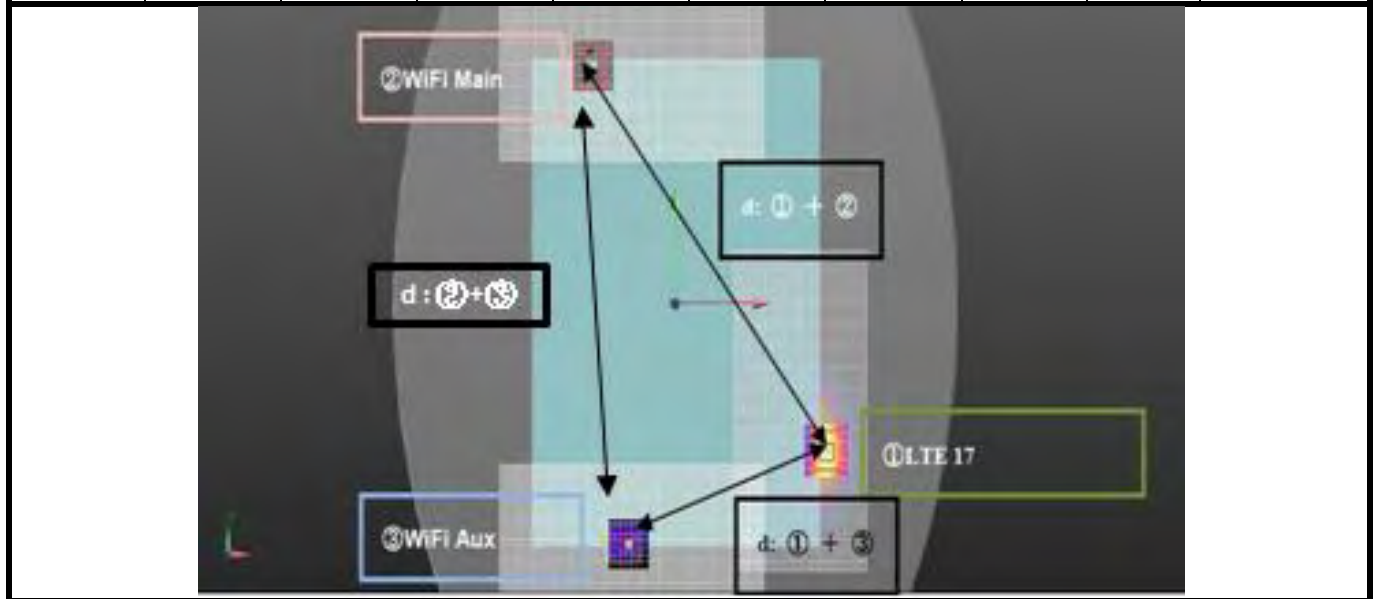


FCC SAR Test Report

Conditions	Exposure Condition	Test Position	SAR Value (W/kg)	Coordinates			Peak Location Separation Distance (R _i , mm)	SPLSR	Simultaneous Transmission SAR Test
				x	y	z			
LTE 17_QPSK10M_Ch23800	Body	Rear Face	1.276	9.75	-7.86	0.22	251.8	0.01	SPLSR ≤ 0.04, Not required
5.6G WLAN_802.11 ac VH80_Ch138			0.2	-4.7	12.75	-0.27			
LTE 17_QPSK10M_Ch23800	Body	Rear Face	1.276	9.75	-7.86	0.22	144.7	0.02	SPLSR ≤ 0.04, Not required
5.6G WLAN_802.11 ac VH80_Ch106			0.49	-3.75	-13.05	-0.34			
5.6G WLAN_802.11 ac VH80_Ch138	Body	Rear Face	0.2	-4.7	12.75	-0.27	258.2	0.00	SPLSR ≤ 0.04, Not required
5.6G WLAN_802.11 ac VH80_Ch106			0.49	-3.75	-13.05	-0.34			

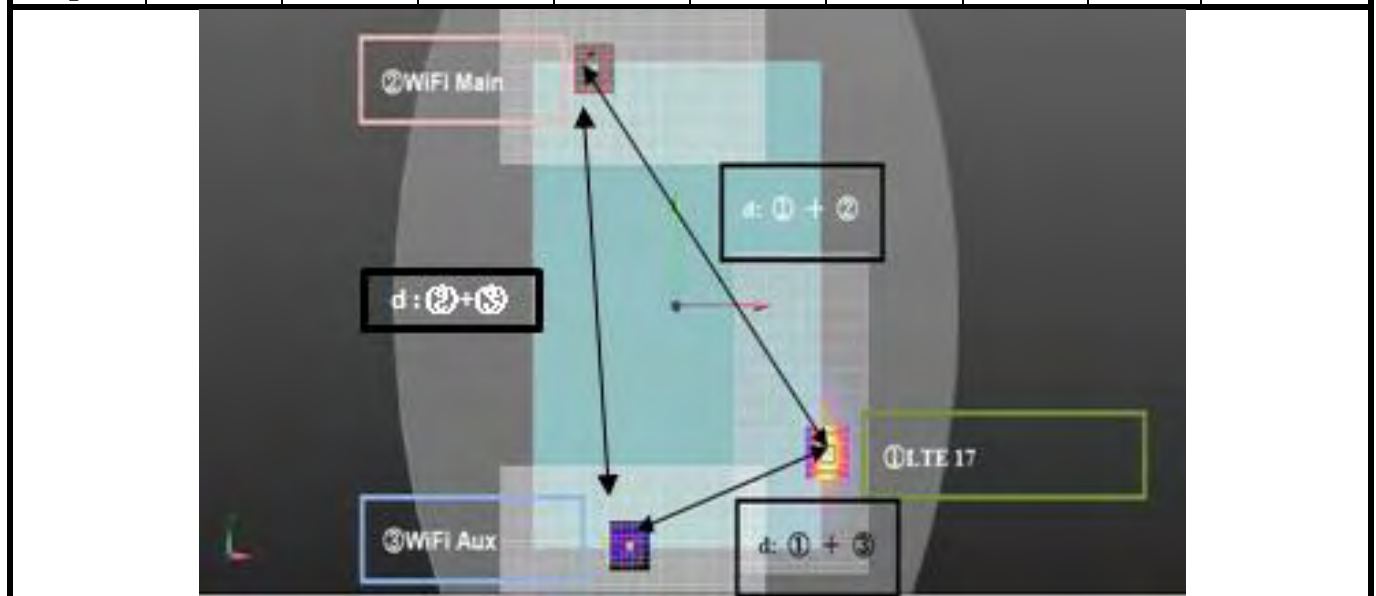

FCC SAR Test Report


Conditions	Exposure Condition	Test Position	SAR Value (W/kg)	Coordinates			Peak Location Separation Distance (R _i , mm)	SPLSR	Simultaneous Transmission SAR Test
				x	y	z			
LTE 17_QPSK10M_Ch23800	Body	Rear Face	1.276	9.75	-7.86	0.22	160.8	0.01	SPLSR ≤ 0.04, Not required
2.4G WALN_802.11b			0.34	-5.48	-13.02	0.55			

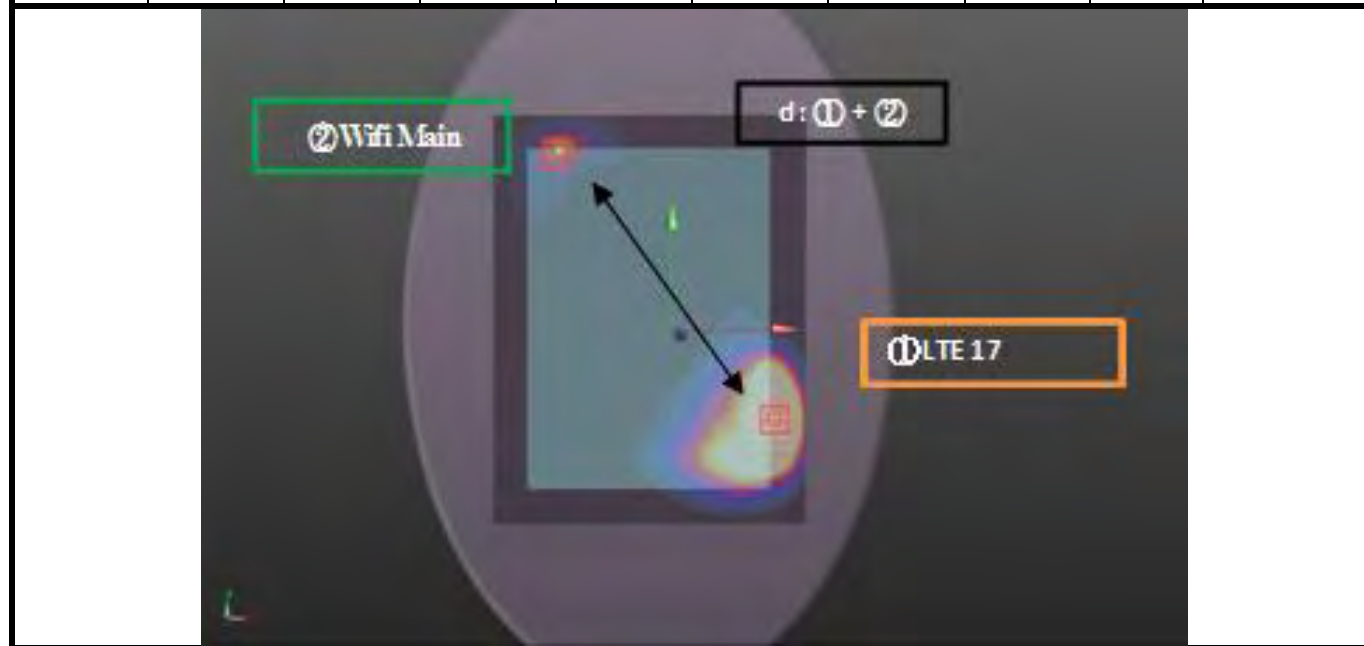

FCC SAR Test Report


LTE 25

Conditions	Exposure Condition	Test Position	SAR Value (W/kg)	Coordinates			Peak Location Separation Distance (R _i , mm)	SPLSR	Simultaneous Transmission SAR Test
				x	y	z			
LTE 25_QPSK20M_Ch26140	Body	Rear Face	1.292	9.27	-6.5	0.18	259.4	0.01	SPLSR ≤ 0.04, Not required
2.4G WALN_802.11_b_Ant0			0.34	-7.25	13.5	0.56			
LTE 25_QPSK20M_Ch26140	Body	Rear Face	1.292	9.27	-6.5	0.18	161.3	0.01	SPLSR ≤ 0.04, Not required
2.4G WALN_802.11_b_Ant1			0.35	-5.48	-13.02	0.55			
2.4G WALN_802.11_b_Ant0	Body	Rear Face	0.34	-7.25	13.5	0.56	265.8	0.00	SPLSR ≤ 0.04, Not required
2.4G WALN_802.11_b_Ant1			0.35	-5.48	-13.02	0.55			

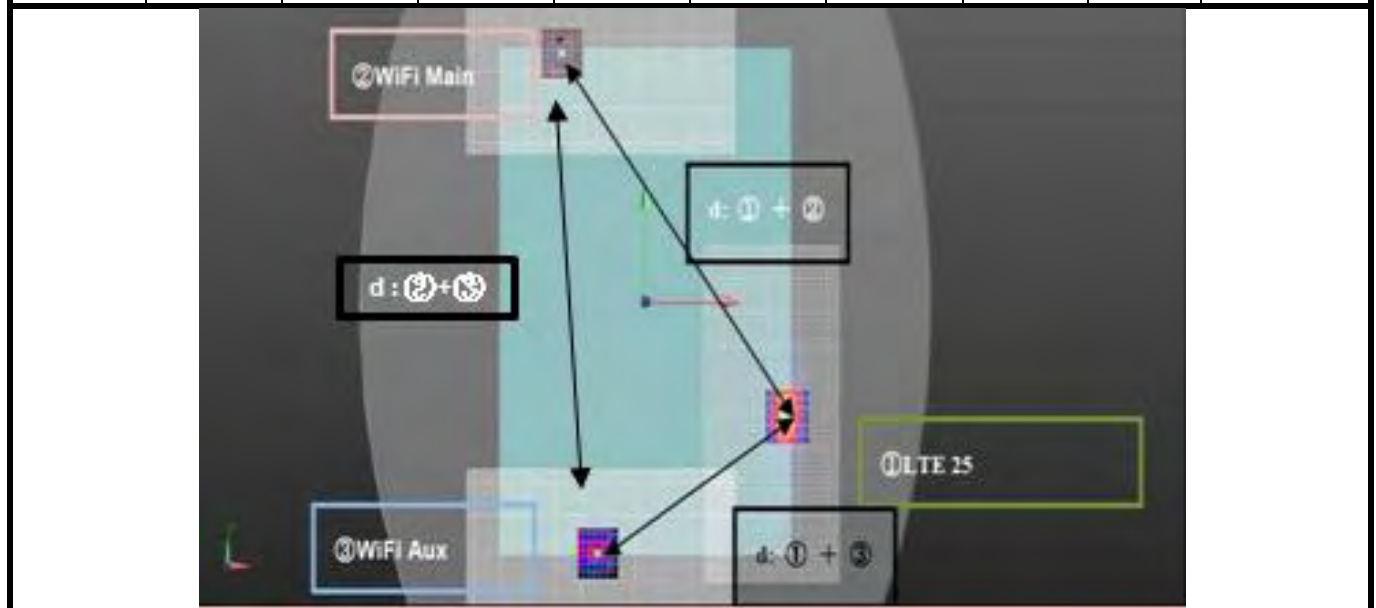


FCC SAR Test Report

Conditions	Exposure Condition	Test Position	SAR Value (W/kg)	Coordinates			Peak Location Separation Distance (R _i , mm)	SPLSR	Simultaneous Transmission SAR Test
				x	y	z			
LTE 25_QPSK20M_Ch26140	Body	Rear Face	1.292	9.27	-6.5	0.18	237.9	0.01	SPLSR ≤ 0.04, Not required
5.6G WLAN_802.11 ac VH80_Ch138			0.2	-4.7	12.75	-0.27			
LTE 25_QPSK20M_Ch26140	Body	Rear Face	1.292	9.27	-6.5	0.18	145.8	0.02	SPLSR ≤ 0.04, Not required
5.6G WLAN_802.11 ac VH80_Ch106			0.49	-3.75	-13.05	-0.34			
5.6G WLAN_802.11 ac VH80_Ch138	Body	Rear Face	0.2	-4.7	12.75	-0.27	258.2	0.00	SPLSR ≤ 0.04, Not required
5.6G WLAN_802.11 ac VH80_Ch106			0.49	-3.75	-13.05	-0.34			

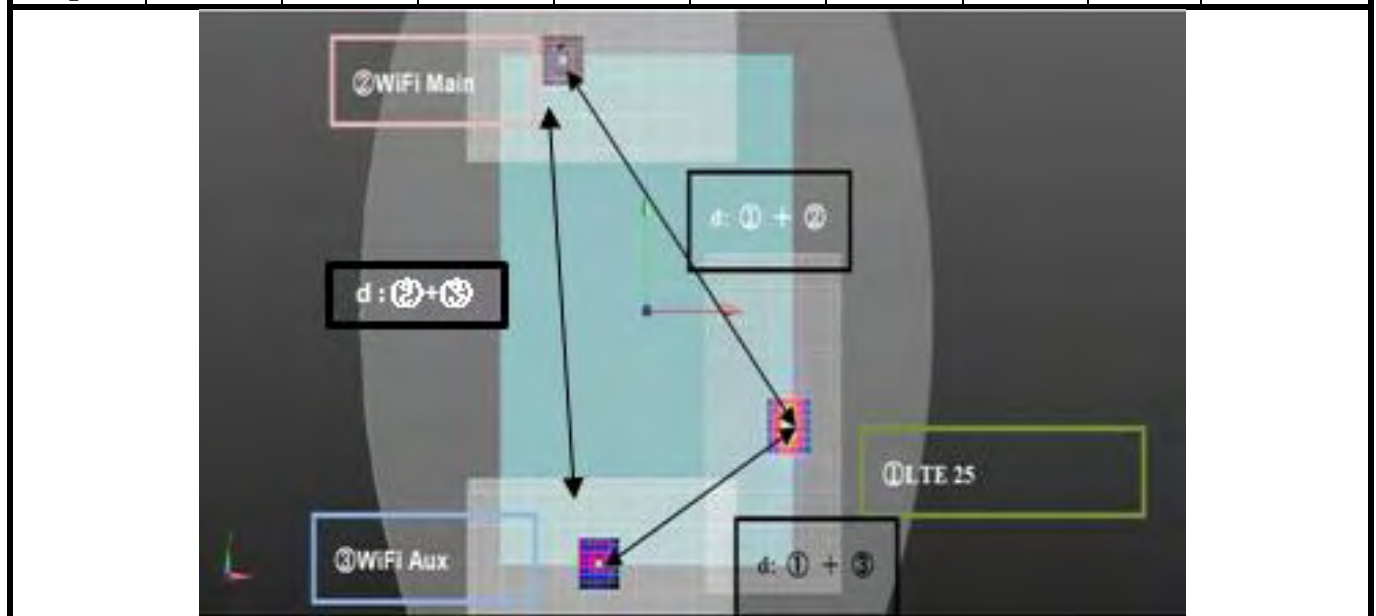

FCC SAR Test Report

Conditions	Exposure Condition	Test Position	SAR Value (W/kg)	Coordinates			Peak Location Separation Distance (R _i , mm)	SPLSR	Simultaneous Transmission SAR Test
				x	y	z			
LTE 25_QPSK20M_Ch26140	Body	Rear Face	1.292	9.27	-6.5	0.18	161.3	0.01	SPLSR ≤ 0.04, Not required
2.4G WALN_802.11b			0.34	-5.48	-13.02	0.55			

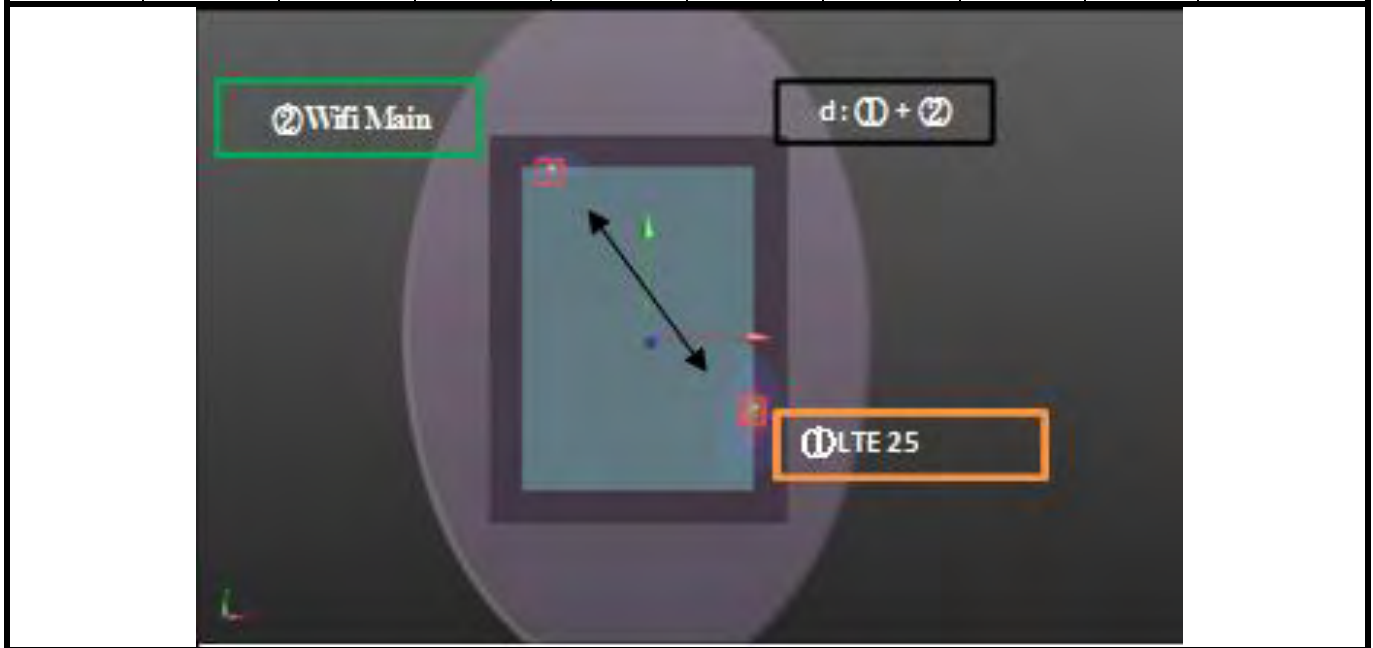

Test Engineer : Way Huang, and Kevin Yao

5. Calibration of Test Equipment

Equipment	Manufacturer	Model	SN	Cal. Date	Cal. Interval
System Validation Dipole	SPEAG	D2450V2	737	Aug. 20, 2015	1 Year
System Validation Dipole	SPEAG	D5GHzV2	1019	Aug. 28, 2015	1 Year
Dosimetric E-Field Probe	SPEAG	EX3DV4	7350	Dec. 17, 2015	1 Year
Data Acquisition Electronics	SPEAG	DAE3	1305	Dec. 11, 2015	1 Year
ENA Series Network Analyzer	Agilent	E5071C	MY46214281	Jun. 13, 2016	1 Year
Spectrum Analyzer	R&S	FSL6	102006	Mar. 25, 2016	1 Year
MXG Analog Signal Generator	Agilent	N5181A	MY50143868	Jul. 07, 2016	1 Year
Power Meter	Anritsu	ML2495A	1218009	Jul. 06, 2016	1 Year
Power Sensor	Anritsu	MA2411B	1207252	Jul. 06, 2016	1 Year
Thermometer	YFE	YF-160A	130504579	Aug. 20, 2015	1 Year

6. Measurement Uncertainty

Source of Uncertainty	Tolerance (± %)	Probability Distribution	Divisor	Ci (1g)	Ci (10g)	Standard Uncertainty (± %, 1g)	Standard Uncertainty (± %, 10g)	Vi
Measurement System								
Probe Calibration	6.0	Normal	1	1	1	6.0	6.0	∞
Axial Isotropy	4.7	Rectangular	√3	0.707	0.707	1.9	1.9	∞
Hemispherical Isotropy	9.6	Rectangular	√3	0.707	0.707	3.9	3.9	∞
Boundary Effect	1.0	Rectangular	√3	1	1	0.6	0.6	∞
Linearity	4.7	Rectangular	√3	1	1	2.7	2.7	∞
System Detection Limits	0.25	Rectangular	√3	1	1	0.14	0.14	∞
Readout Electronics	0.3	Normal	1	1	1	0.3	0.3	∞
Response Time	0.0	Rectangular	√3	1	1	0.0	0.0	∞
Integration Time	1.7	Rectangular	√3	1	1	1.0	1.0	∞
RF Ambient Conditions - Noise	3.0	Rectangular	√3	1	1	1.7	1.7	∞
RF Ambient Conditions - Reflections	3.0	Rectangular	√3	1	1	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	0.4	Rectangular	√3	1	1	0.2	0.2	∞
Probe Positioning with Respect to Phantom Shell	2.9	Rectangular	√3	1	1	1.7	1.7	∞
Extrapolation, interpolation, and integration algorithms for max. SAR evaluation	2.0	Rectangular	√3	1	1	1.2	1.2	∞
Test Sample Related								
Test Sample Positioning	1.5 / 0.7	Normal	1	1	1	1.5	0.7	32
Device Holder Uncertainty	4.2 / 1.8	Normal	1	1	1	4.2	1.8	32
Output Power Variation - SAR Drift Measurement	5.0	Rectangular	√3	1	1	2.9	2.9	∞
Phantom and Tissue Parameters								
Phantom Uncertainty (Shape and Thickness Tolerances)	7.2	Rectangular	√3	1	1	4.2	4.2	∞
Liquid Conductivity - Deviation from Target Values	5.0	Rectangular	√3	0.64	0.43	1.8	1.2	∞
Liquid Conductivity - Measurement Uncertainty	1.0	Normal	1	0.64	0.43	0.6	0.4	25
Liquid Permittivity - Deviation from Target Values	5.0	Rectangular	√3	0.60	0.49	1.7	1.4	∞
Liquid Permittivity - Measurement Uncertainty	0.5	Normal	1	0.60	0.49	0.3	0.2	25
Combined Standard Uncertainty						± 11.2 %	± 10.4 %	
Expanded Uncertainty (K=2)						± 22.4 %	± 20.8 %	

Uncertainty budget for frequency range 300 MHz to 3 GHz

FCC SAR Test Report

Source of Uncertainty	Tolerance (± %)	Probability Distribution	Divisor	C _i (1g)	C _i (10g)	Standard Uncertainty (± %, 1g)	Standard Uncertainty (± %, 10g)	V _i
Measurement System								
Probe Calibration	6.55	Normal	1	1	1	6.55	6.55	∞
Axial Isotropy	4.7	Rectangular	√3	0.707	0.707	1.9	1.9	∞
Hemispherical Isotropy	9.6	Rectangular	√3	0.707	0.707	3.9	3.9	∞
Boundary Effect	2.0	Rectangular	√3	1	1	1.2	1.2	∞
Linearity	4.7	Rectangular	√3	1	1	2.7	2.7	∞
System Detection Limits	0.25	Rectangular	√3	1	1	0.14	0.14	∞
Readout Electronics	0.3	Normal	1	1	1	0.3	0.3	∞
Response Time	0.0	Rectangular	√3	1	1	0.0	0.0	∞
Integration Time	1.7	Rectangular	√3	1	1	1.0	1.0	∞
RF Ambient Conditions - Noise	3.0	Rectangular	√3	1	1	1.7	1.7	∞
RF Ambient Conditions - Reflections	3.0	Rectangular	√3	1	1	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	0.4	Rectangular	√3	1	1	0.2	0.2	∞
Probe Positioning with Respect to Phantom Shell	6.7	Rectangular	√3	1	1	3.9	3.9	∞
Extrapolation, interpolation, and integration algorithms for max. SAR evaluation	4.0	Rectangular	√3	1	1	2.3	2.3	∞
Test Sample Related								
Test Sample Positioning	1.5 / 0.7	Normal	1	1	1	1.5	0.7	32
Device Holder Uncertainty	4.2 / 1.8	Normal	1	1	1	4.2	1.8	32
Output Power Variation - SAR Drift Measurement	5.0	Rectangular	√3	1	1	2.9	2.9	∞
Phantom and Tissue Parameters								
Phantom Uncertainty (Shape and Thickness Tolerances)	7.6	Rectangular	√3	1	1	4.4	4.4	∞
Liquid Conductivity - Deviation from Target Values	5.0	Rectangular	√3	0.64	0.43	1.8	1.2	∞
Liquid Conductivity - Measurement Uncertainty	1.0	Normal	1	0.64	0.43	0.6	0.4	25
Liquid Permittivity - Deviation from Target Values	5.0	Rectangular	√3	0.60	0.49	1.7	1.4	∞
Liquid Permittivity - Measurement Uncertainty	0.5	Normal	1	0.60	0.49	0.3	0.2	25
Combined Standard Uncertainty						± 12.3 %	± 11.5 %	
Expanded Uncertainty (K=2)						± 24.6 %	± 23.0 %	

Uncertainty budget for frequency range 3 GHz to 6 GHz

7. Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Taiwan HwaYa EMC/RF/Safety/Telecom Lab:

Add: No. 19, Hwa Ya 2nd Rd, Wen Hwa Vil., Kwei Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

Tel: 886-3-318-3232

Fax: 886-3-327-0892

Taiwan LinKo EMC/RF Lab:

Add: No. 47-2, 14th Ling, Chia Pau Vil., Linkou Dist., New Taipei City 244, Taiwan, R.O.C.

Tel: 886-2-2605-2180

Fax: 886-2-2605-1924

Taiwan HsinChu EMC/RF Lab:

Add: No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Vil., Chiung Lin Township, Hsinchu County 307, Taiwan, R.O.C.

Tel: 886-3-593-5343

Fax: 886-3-593-5342

Email: service.adt@tw.bureauveritas.com

Web Site: www.adt.com.tw

The road map of all our labs can be found in our web site also.

---END---



Appendix A. SAR Plots of System Verification

The plots for system verification with largest deviation for each SAR system combination are shown as follows.

System Check_B2450_160716

DUT: Dipole 2450 MHz; Type: D2450V2; SN: 737

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: B19T27N3_0716 Medium parameters used: $f = 2450$ MHz; $\sigma = 2.013$ S/m; $\epsilon_r = 50.777$; $\rho = 1000$ kg/m³


Ambient Temperature : 23.8 °C ; Liquid Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7350; ConvF(7.49, 7.49, 7.49); Calibrated: 2015/12/17;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1305; Calibrated: 2015/12/11
- Phantom: ELI Phantom_1039; Type: QDOVA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 18.6 W/kg

Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 97.83 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 25.0 W/kg
SAR(1 g) = 12.2 W/kg; SAR(10 g) = 5.62 W/kg
Maximum value of SAR (measured) = 18.6 W/kg

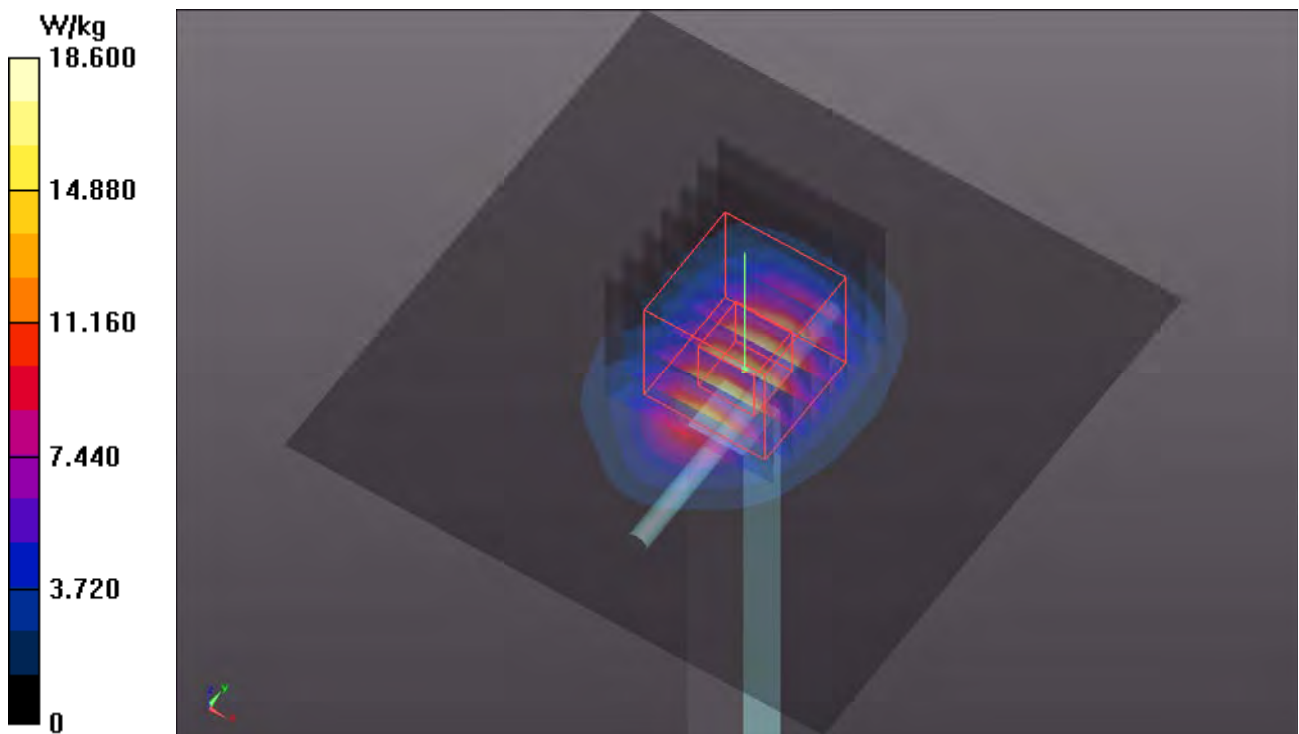

System Check_B5250_160712

DUT: Dipole 5 GHz; Type: D5GHzV2; SN: 1019

Communication System: CW; Frequency: 5250 MHz; Duty Cycle: 1:1

Medium: B34T60N1_0712 Medium parameters used: $f = 5250$ MHz; $\sigma = 5.37$ S/m; $\epsilon_r = 48.944$; $\rho = 1000$ kg/m³


Ambient Temperature : 23.7 °C ; Liquid Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7350; ConvF(4.62, 4.62, 4.62); Calibrated: 2015/12/17;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1305; Calibrated: 2015/12/11
- Phantom: ELI Phantom_1206; Type: QDOVA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=100mW/Area Scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 16.7 W/kg

Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 56.57 V/m; Power Drift = -0.14 dB
Peak SAR (extrapolated) = 29.5 W/kg
SAR(1 g) = 7.53 W/kg; SAR(10 g) = 2.17 W/kg
Maximum value of SAR (measured) = 18.7 W/kg

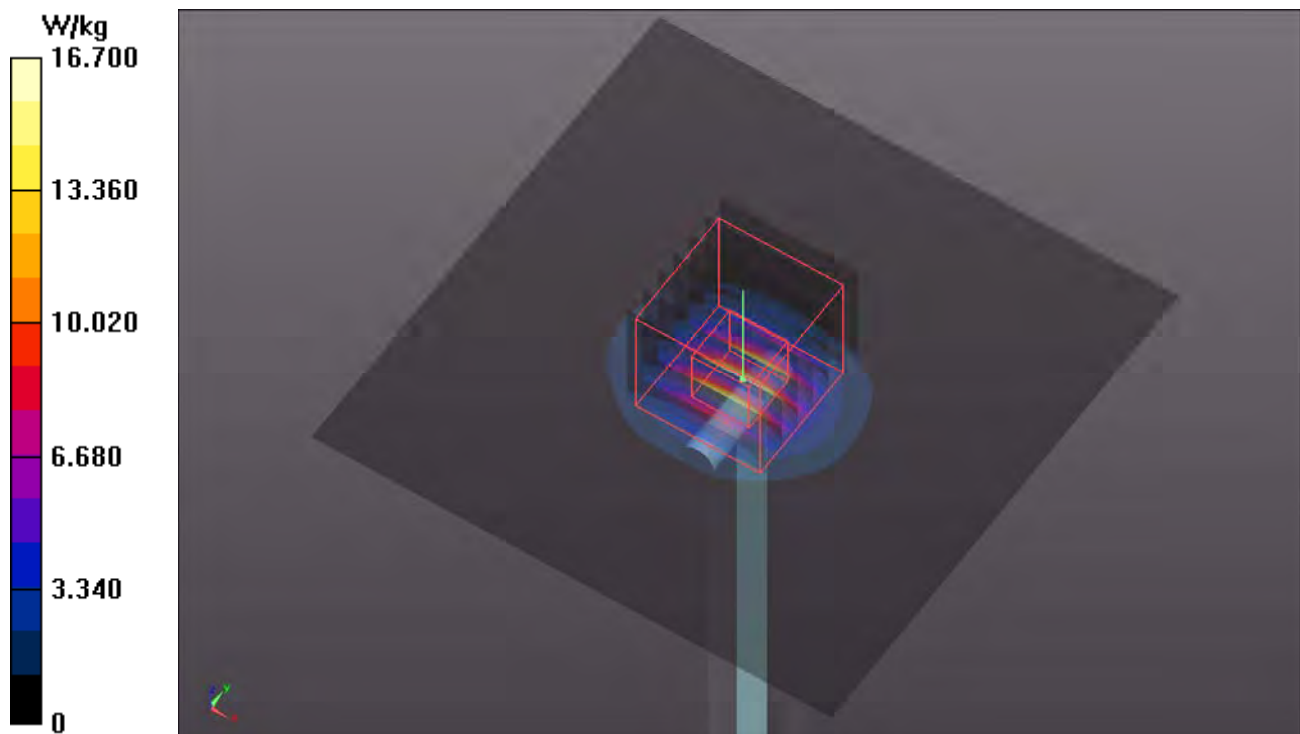

System Check_B5600_160716

DUT: Dipole 5 GHz; Type: D5GHzV2; SN: 1019

Communication System: CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: B34T60N2_0716 Medium parameters used: $f = 5600$ MHz; $\sigma = 5.852$ S/m; $\epsilon_r = 48.725$; $\rho = 1000$ kg/m³


Ambient Temperature : 23.7 °C ; Liquid Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7350; ConvF(3.91, 3.91, 3.91); Calibrated: 2015/12/17;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1305; Calibrated: 2015/12/11
- Phantom: ELI Phantom_1206; Type: QDOVA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=100mW/Area Scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 16.3 W/kg

Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 60.46 V/m; Power Drift = 0.09 dB
Peak SAR (extrapolated) = 31.6 W/kg
SAR(1 g) = 7.98 W/kg; SAR(10 g) = 2.21 W/kg
Maximum value of SAR (measured) = 17.2 W/kg

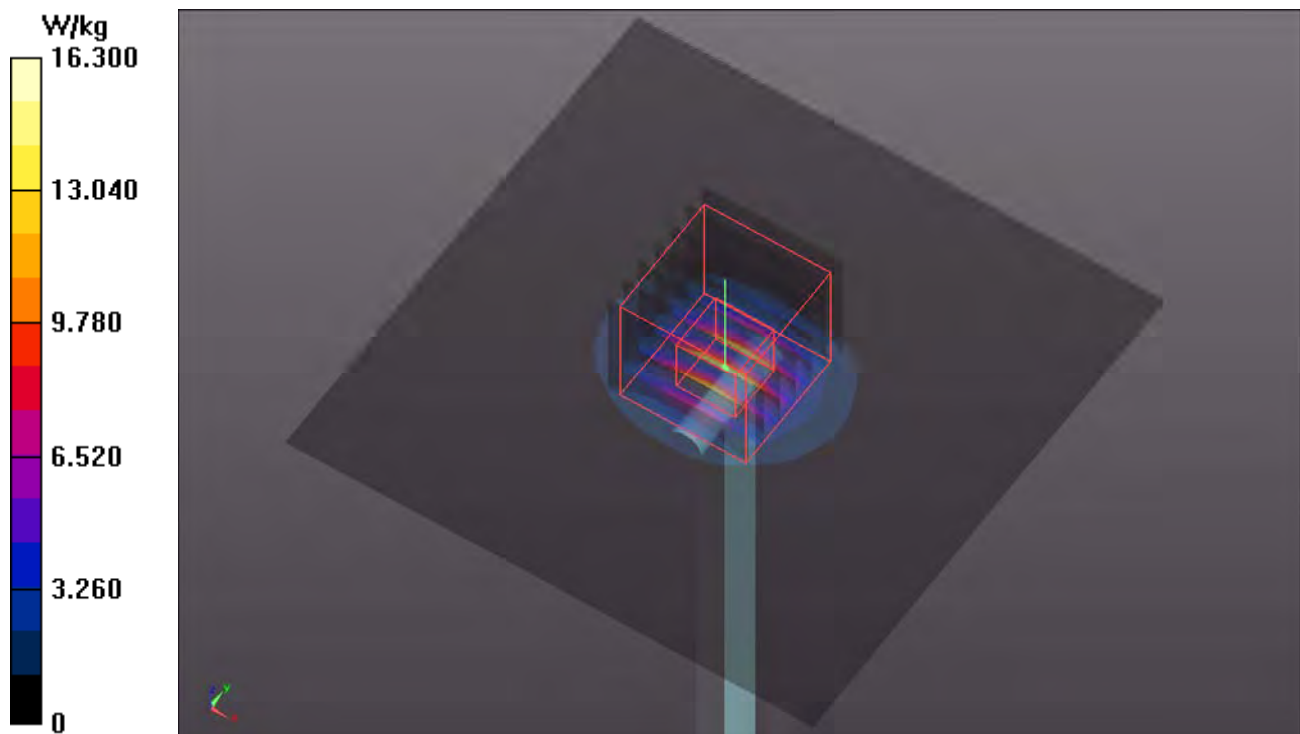

System Check_B5800_160716

DUT: Dipole 5 GHz; Type: D5GHzV2; SN: 1019

Communication System: CW; Frequency: 5800 MHz; Duty Cycle: 1:1

Medium: B34T60N2_0716 Medium parameters used: $f = 5800$ MHz; $\sigma = 6.113$ S/m; $\epsilon_r = 48.226$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C ; Liquid Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7350; ConvF(4.03, 4.03, 4.03); Calibrated: 2015/12/17;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1305; Calibrated: 2015/12/11
- Phantom: ELI Phantom_1206; Type: QDOVA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)


Pin=100mW/Area Scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 16.0 W/kg

Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 57.83 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 35.2 W/kg

SAR(1 g) = 8.04 W/kg; SAR(10 g) = 2.24 W/kg

Maximum value of SAR (measured) = 17.5 W/kg

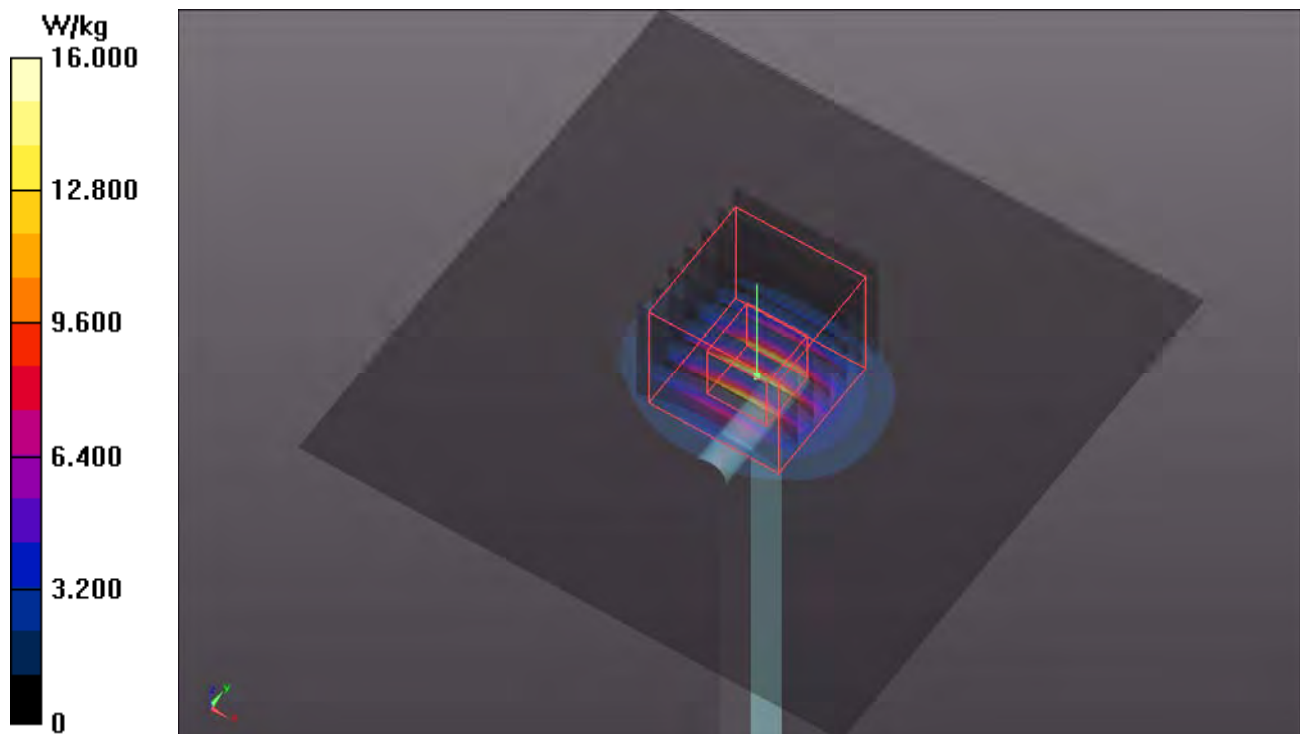



Appendix B. SAR Plots of SAR Measurement

The SAR plots for highest measured SAR in each exposure configuration, wireless mode and frequency band combination, and measured SAR > 1.5 W/kg are shown as follows.

P01 2.4G WLAN_802.11b_Right Side_0cm_Ch1_Ant0

DUT: 160601C13

Communication System: WLAN_2.4G; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: B19T27N3_0712 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.954$ S/m; $\epsilon_r = 51.383$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C ; Liquid Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7350; ConvF(7.49, 7.49, 7.49); Calibrated: 2015/12/17;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1305; Calibrated: 2015/12/11
- Phantom: ELI Phantom_1206; Type: QDOVA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

- **Area Scan (51x201x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.08 W/kg


- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.184 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 2.11 W/kg

SAR(1 g) = 1.02 W/kg; SAR(10 g) = 0.471 W/kg

Maximum value of SAR (measured) = 1.64 W/kg

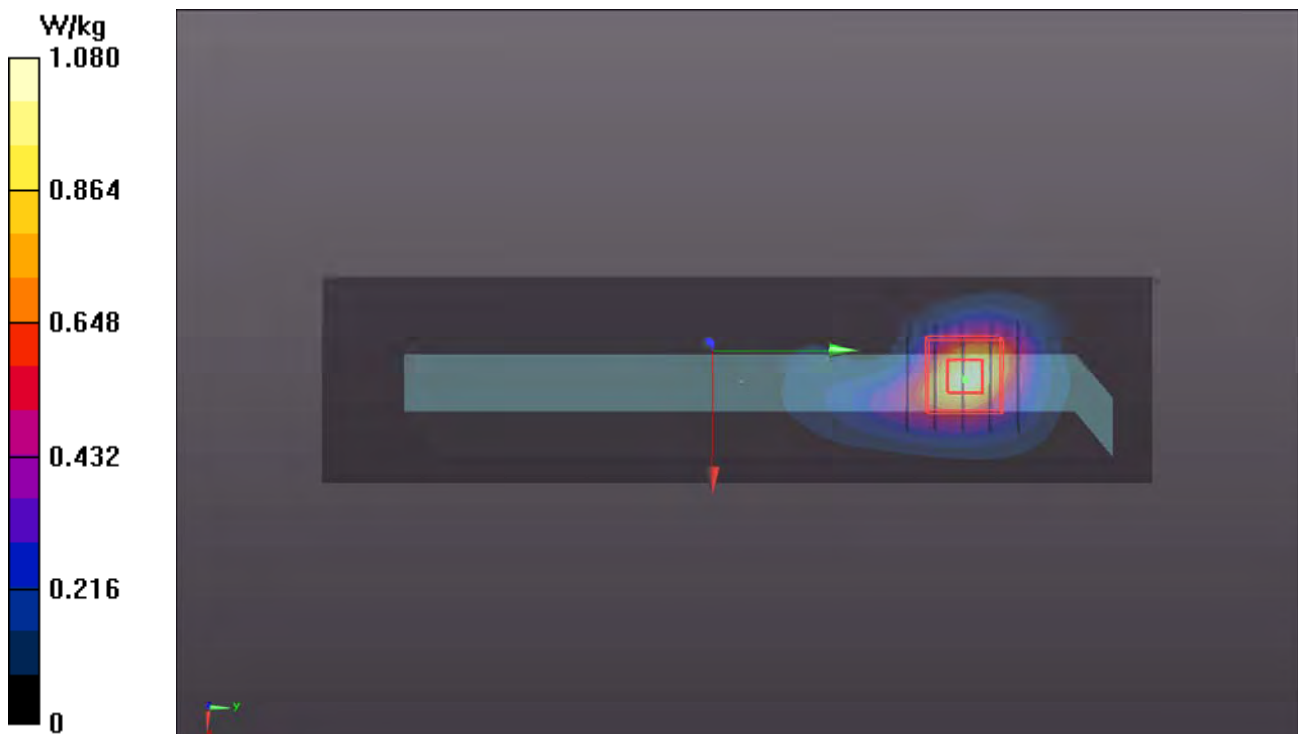

P02 5.3G WLAN_802.11ac VH80_Left Side_0cm_Ch58_Ant1

DUT: 160601C13

Communication System: WLAN_5G; Frequency: 5290 MHz; Duty Cycle: 1:1

Medium: B34T60N1_0712 Medium parameters used: $f = 5290$ MHz; $\sigma = 5.379$ S/m; $\epsilon_r = 48.359$; $\rho = 1000$ kg/m³


Ambient Temperature : 23.7 °C ; Liquid Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7350; ConvF(4.62, 4.62, 4.62); Calibrated: 2015/12/17;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1305; Calibrated: 2015/12/11
- Phantom: ELI Phantom_1206; Type: QDOVA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

- **Area Scan (61x241x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm
 Maximum value of SAR (interpolated) = 1.45 W/kg

- **Zoom Scan (6x6x12)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm
 Reference Value = 9.384 V/m; Power Drift = -0.11 dB
 Peak SAR (extrapolated) = 5.24 W/kg
SAR(1 g) = 1.36 W/kg; SAR(10 g) = 0.335 W/kg
 Maximum value of SAR (measured) = 3.35 W/kg

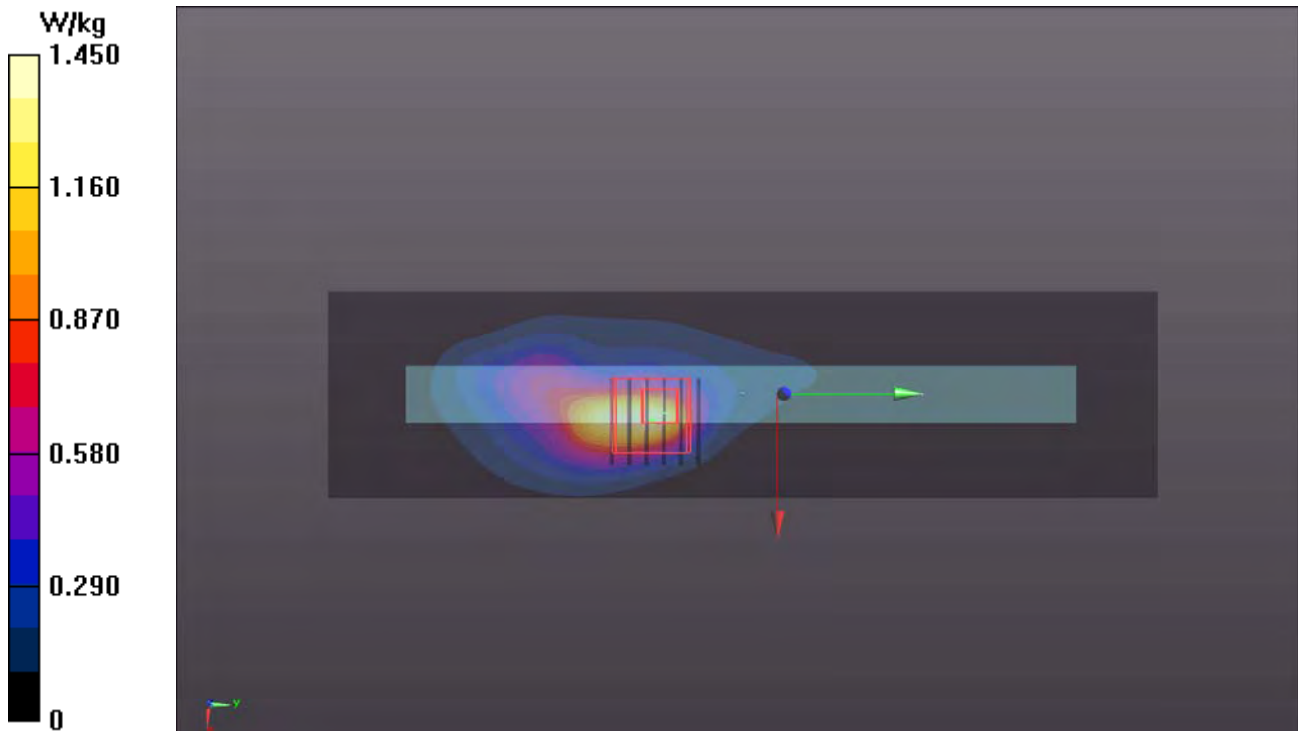

P03 5.6G WLAN_802.11ac VH80_Left Side_0cm_Ch106_Ant1

DUT: 160601C13

Communication System: WLAN_5G; Frequency: 5530 MHz; Duty Cycle: 1:1

Medium: B34T60N2_0716 Medium parameters used: $f = 5530$ MHz; $\sigma = 5.689$ S/m; $\epsilon_r = 48.865$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C ; Liquid Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7350; ConvF(4.05, 4.05, 4.05); Calibrated: 2015/12/17;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1305; Calibrated: 2015/12/11
- Phantom: ELI Phantom_1206; Type: QDOVA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

- **Area Scan (61x221x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.12 W/kg


- **Zoom Scan (6x6x12)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 7.816 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 4.33 W/kg

SAR(1 g) = 1.02 W/kg; SAR(10 g) = 0.282 W/kg

Maximum value of SAR (measured) = 2.42 W/kg

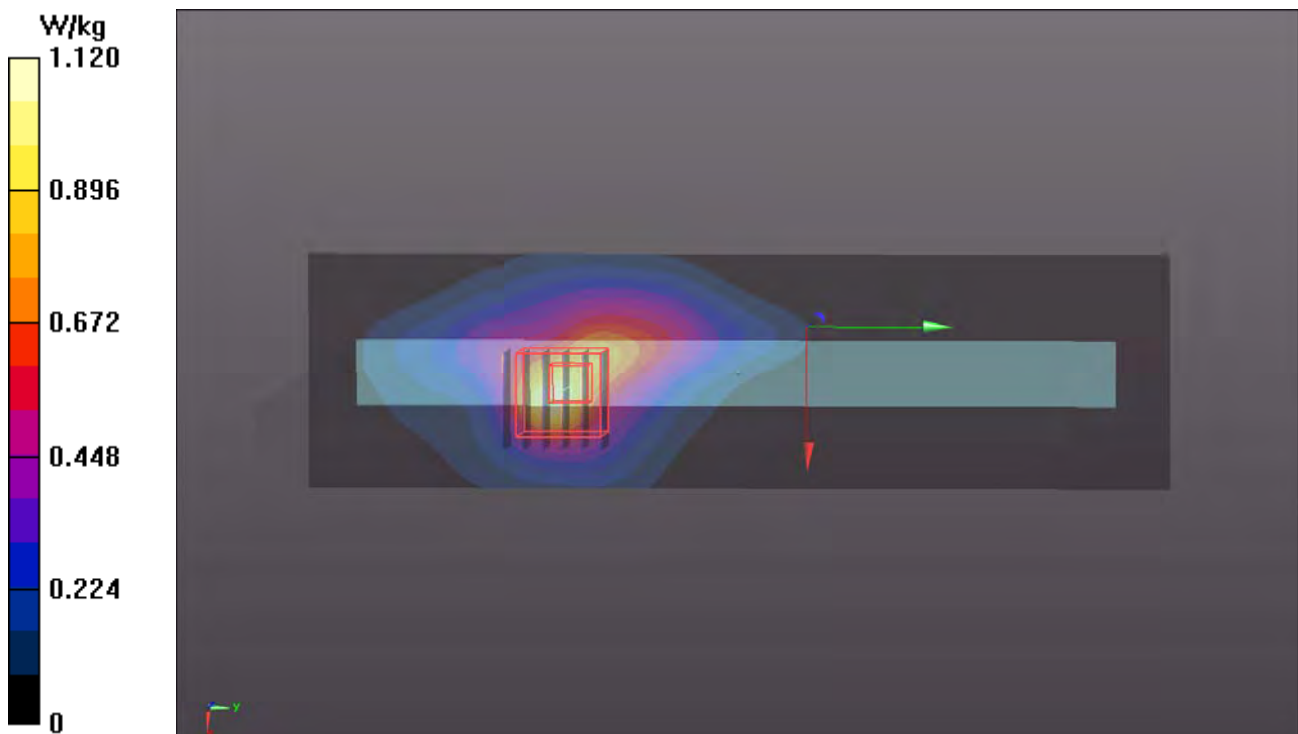

P04 5.8G WLAN_802.11ac VH80_Left Side_0cm_Ch155_Ant1

DUT: 160601C13

Communication System: WLAN_5G; Frequency: 5775 MHz; Duty Cycle: 1:1

Medium: B34T60N2_0716 Medium parameters used: $f = 5775$ MHz; $\sigma = 6.034$ S/m; $\epsilon_r = 48.389$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C ; Liquid Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7350; ConvF(4.03, 4.03, 4.03); Calibrated: 2015/12/17;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1305; Calibrated: 2015/12/11
- Phantom: ELI Phantom_1206; Type: QDOVA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

- **Area Scan (61x241x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.72 W/kg


- **Zoom Scan (6x6x12)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 5.322 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 4.68 W/kg

SAR(1 g) = 0.913 W/kg; SAR(10 g) = 0.262 W/kg

Maximum value of SAR (measured) = 2.21 W/kg

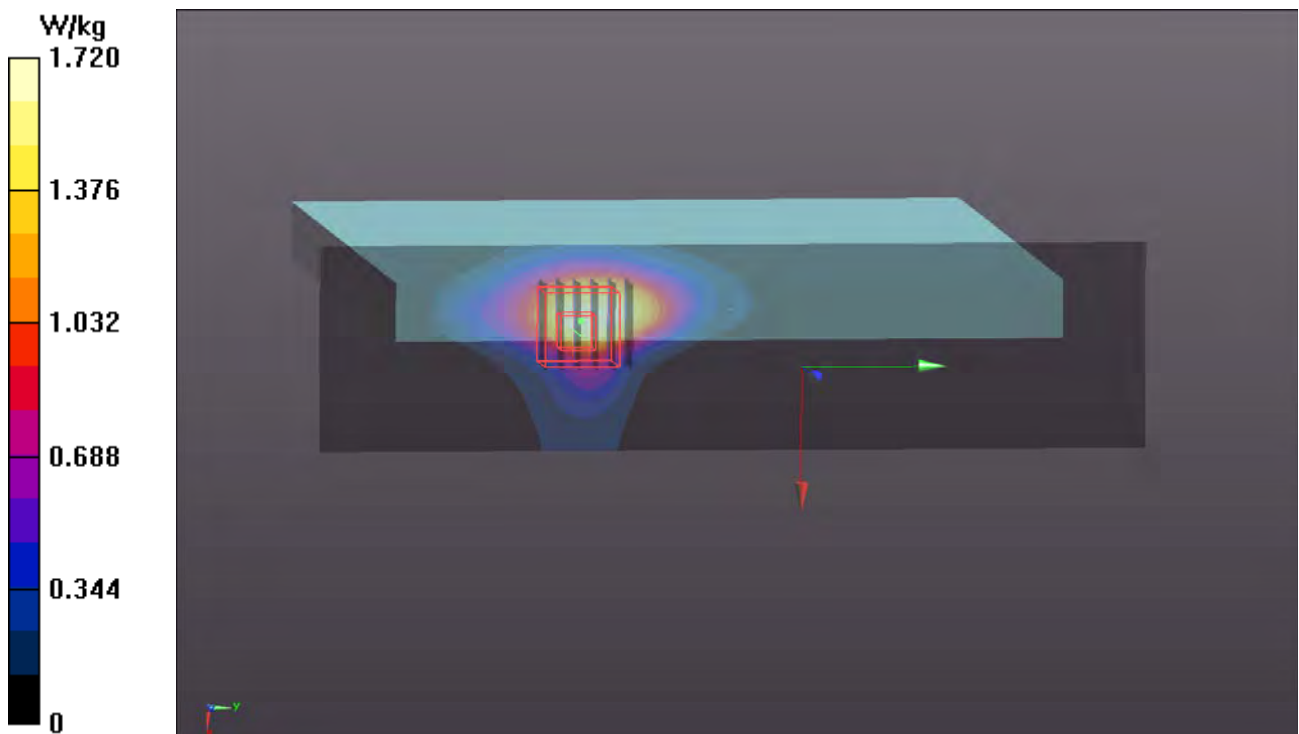

P05 Bluetooth_Left Side_0cm_Ch39

DUT: 160601C13

Communication System: BT; Frequency: 2441 MHz; Duty Cycle: 1:3.25

Medium: B19T27N3_0716 Medium parameters used: $f = 2441$ MHz; $\sigma = 2.003$ S/m; $\epsilon_r = 50.795$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.8 °C ; Liquid Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7350; ConvF(7.49, 7.49, 7.49); Calibrated: 2015/12/17;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1305; Calibrated: 2015/12/11
- Phantom: ELI Phantom_1039; Type: QDOVA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

- **Area Scan (51x201x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.00782 W/kg


- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.0370 W/kg

SAR(1 g) = 0.00778 W/kg; SAR(10 g) = 0.0019 W/kg

Maximum value of SAR (measured) = 0.0109 W/kg

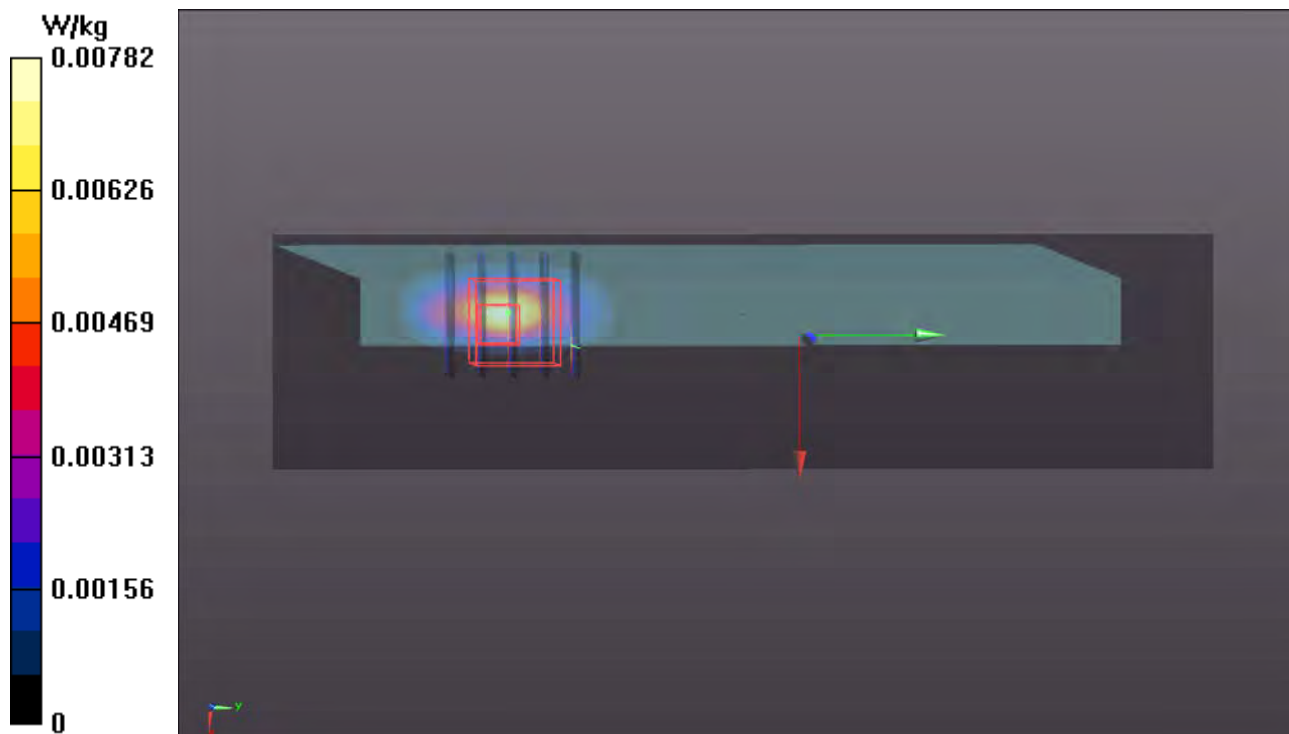



Appendix C. Calibration Certificate for Probe and Dipole

The SPEAG calibration certificates are shown as follows.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **B.V. ADT (Auden)**

Certificate No: **D2450V2-737_Aug15**

CALIBRATION CERTIFICATE

Object **D2450V2 - SN: 737**

Calibration procedure(s) **QA CAL-05.v9
Calibration procedure for dipole validation kits above 700 MHz**

Calibration date: **August 20, 2015**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	07-Oct-14 (No. 217-02020)	Oct-15
Power sensor HP 8481A	US37292783	07-Oct-14 (No. 217-02020)	Oct-15
Power sensor HP 8481A	MY41092317	07-Oct-14 (No. 217-02021)	Oct-15
Reference 20 dB Attenuator	SN: 5058 (20k)	01-Apr-15 (No. 217-02131)	Mar-16
Type-N mismatch combination	SN: 5047.2 / 06327	01-Apr-15 (No. 217-02134)	Mar-16
Reference Probe ES3DV3	SN: 3205	30-Dec-14 (No. ES3-3205_Dec14)	Dec-15
DAE4	SN: 601	17-Aug-15 (No. DAE4-601_Aug15)	Aug-16
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-13)	In house check: Oct-16
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-14)	In house check: Oct-15

Calibrated by: **Name: Michael Weber, Function: Laboratory Technician**

Approved by: **Name: Katja Pokovic, Function: Technical Manager**

Signature

Issued: August 21, 2015

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:* SAR measured at the stated antenna input power.
- SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2450 MHz ± 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	39.2 ± 6 %	1.87 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	---	---

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	13.5 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	53.0 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	6.32 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	25.0 W/kg ± 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.7	1.95 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	53.2 ± 6 %	2.00 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	---	---

SAR result with Body TSL

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	12.9 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	51.1 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	6.02 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	24.0 W/kg ± 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	$53.5 \Omega + 3.5 j\Omega$
Return Loss	- 26.3 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	$49.8 \Omega + 4.8 j\Omega$
Return Loss	- 26.3 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.161 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	August 26, 2003

DASY5 Validation Report for Head TSL

Date: 20.08.2015

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 737

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.87$ S/m; $\epsilon_r = 39.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.54, 4.54, 4.54); Calibrated: 30.12.2014;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 17.08.2015
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 101.6 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 27.8 W/kg

SAR(1 g) = 13.5 W/kg; SAR(10 g) = 6.32 W/kg

Maximum value of SAR (measured) = 18.0 W/kg

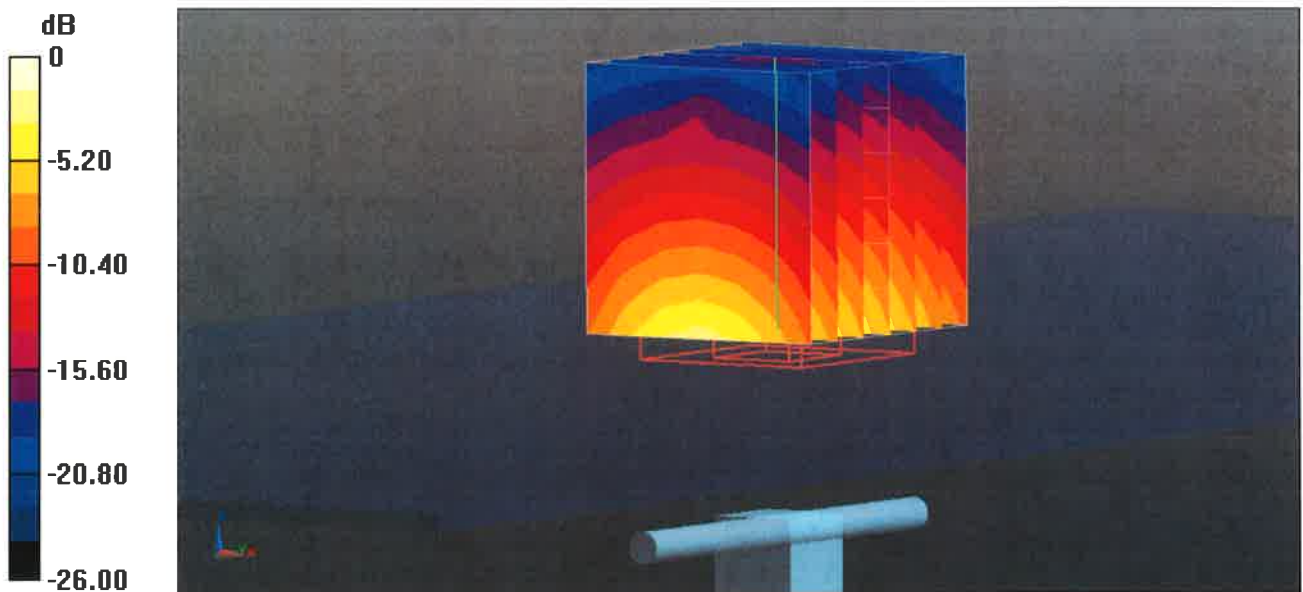


0 dB = 18.0 W/kg = 12.55 dBW/kg

Impedance Measurement Plot for Head TSL

19 Aug 2015 12:42:13

CH1 S11 1 U FS 4: 53.531 Ω 3.5332 Ω 229.52 pF 2 450.000 000 MHz

*
De l
CA

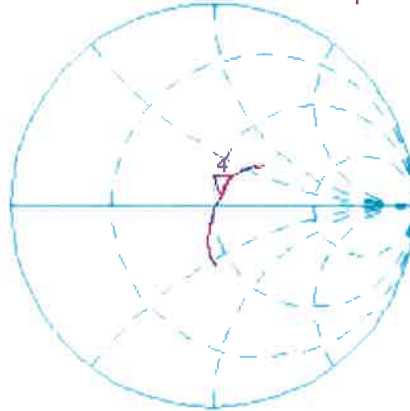

Av 9
16


H1 d

CH2 S11 LOG 5 dB/ REF -20 dB 4: -26.333 dB 2 450.000 000 MHz

CA

Av 9
16

H1 d

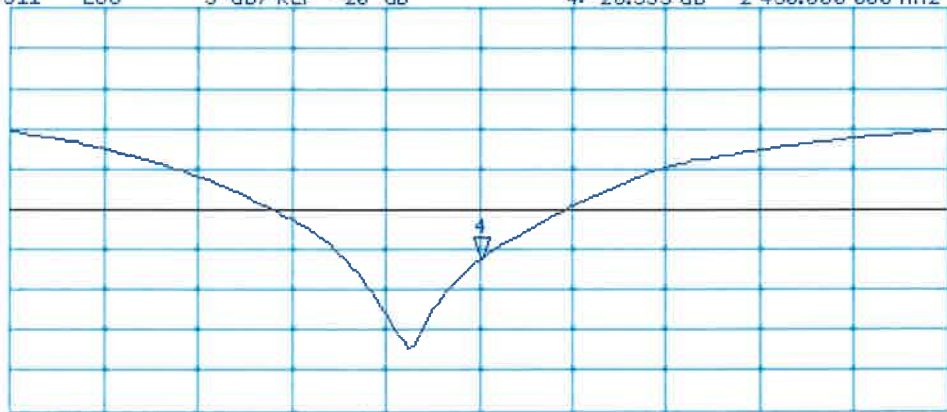

START 2 250.000 000 MHz

STOP 2 650.000 000 MHz

DASY5 Validation Report for Body TSL

Date: 19.08.2015

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 737

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 2$ S/m; $\epsilon_r = 53.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.32, 4.32, 4.32); Calibrated: 30.12.2014;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 17.08.2015
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:



Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 95.46 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 26.6 W/kg

SAR(1 g) = 12.9 W/kg; SAR(10 g) = 6.02 W/kg

Maximum value of SAR (measured) = 17.1 W/kg

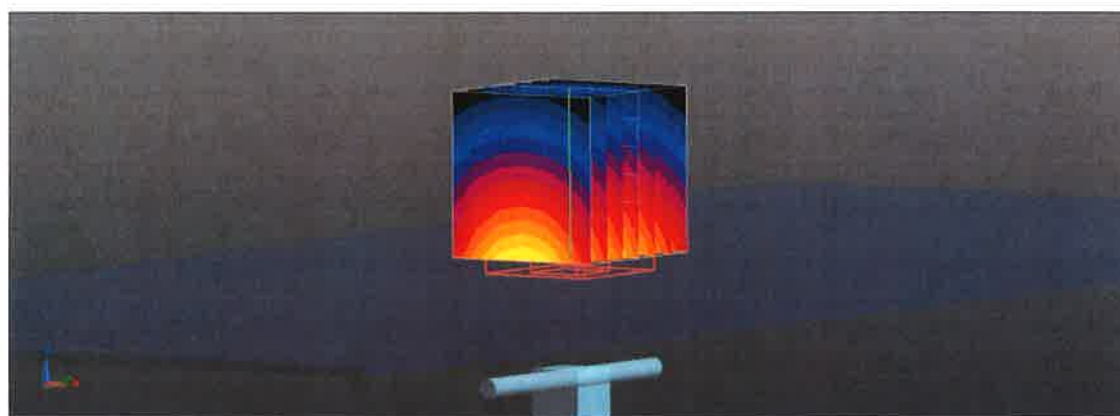


0 dB = 17.1 W/kg = 12.33 dBW/kg

Impedance Measurement Plot for Body TSL

19 Aug 2015 12:40:41

CH1 S11 1 U FS 4: 49.811 Ω 4.8281 Ω 313.64 pF 2 450.000 000 MHz

*
Del
CA

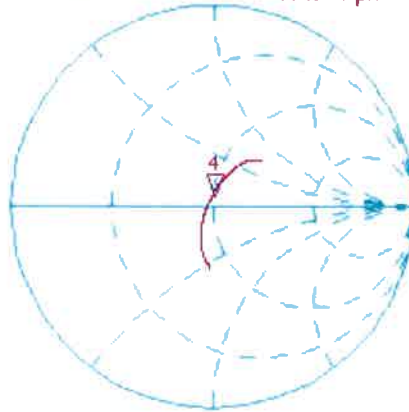

Avg
16


H1d

CH2 S11 LOG 5 dB/REF -20 dB 4: -26.305 dB 2 450.000 000 MHz

CA

Avg
16

H1d

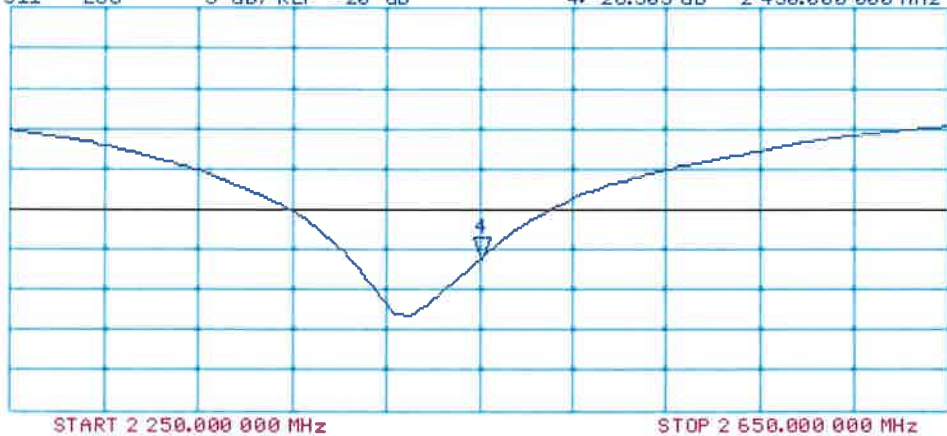



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **B.V. ADT (Auden)**

Certificate No: **D5GHzV2-1019_Aug15**

CALIBRATION CERTIFICATE

Object **D5GHzV2 - SN: 1019**

Calibration procedure(s) **QA CAL-22.v2**
Calibration procedure for dipole validation kits between 3-6 GHz

Calibration date: **August 28, 2015**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	07-Oct-14 (No. 217-02020)	Oct-15
Power sensor HP 8481A	US37292783	07-Oct-14 (No. 217-02020)	Oct-15
Power sensor HP 8481A	MY41092317	07-Oct-14 (No. 217-02021)	Oct-15
Reference 20 dB Attenuator	SN: 5058 (20k)	01-Apr-15 (No. 217-02131)	Mar-16
Type-N mismatch combination	SN: 5047.2 / 06327	01-Apr-15 (No. 217-02134)	Mar-16
Reference Probe EX3DV4	SN: 3503	30-Dec-14 (No. EX3-3503_Dec14)	Dec-15
DAE4	SN: 601	17-Aug-15 (No. DAE4-601_Aug15)	Aug-16
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-13)	In house check: Oct-16
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-14)	In house check: Oct-15

	Name	Function	Signature
Calibrated by:	Jeton Kastrati	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: August 28, 2015

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V5.0	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy = 4.0 mm, dz = 1.4 mm	Graded Ratio = 1.4 (Z direction)
Frequency	5200 MHz ± 1 MHz 5250 MHz ± 1 MHz 5300 MHz ± 1 MHz 5600 MHz ± 1 MHz 5800 MHz ± 1 MHz	

Head TSL parameters at 5200 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	36.0	4.66 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	35.0 ± 6 %	4.49 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5200 MHz

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.11 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	80.6 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.32 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.0 W/kg ± 19.5 % (k=2)

Head TSL parameters at 5250 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.9	4.71 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	35.0 ± 6 %	4.54 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5250 MHz

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.29 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	82.4 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.37 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.5 W/kg ± 19.5 % (k=2)

Head TSL parameters at 5300 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.9	4.76 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.9 ± 6 %	4.59 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5300 MHz

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.56 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	85.0 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.45 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	24.3 W/kg ± 19.5 % (k=2)

Head TSL parameters at 5600 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.5	5.07 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.5 ± 6 %	4.88 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5600 MHz

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.45 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	83.9 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.40 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.8 W/kg ± 19.5 % (k=2)

Head TSL parameters at 5800 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.3	5.27 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.2 ± 6 %	5.09 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5800 MHz

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.25 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	81.8 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.34 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.2 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5200 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	49.0	5.30 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	47.4 ± 6 %	5.46 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5200 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.57 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	75.2 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.12 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	21.0 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5250 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.9	5.36 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	47.3 ± 6 %	5.52 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5250 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.69 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	76.4 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.15 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	21.3 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5300 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.9	5.42 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	47.3 ± 6 %	5.59 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5300 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.70 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	76.6 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.16 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	21.4 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5600 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.5	5.77 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.7 ± 6 %	5.99 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5600 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	8.03 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	79.8 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.23 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	22.1 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5800 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.2	6.00 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.4 ± 6 %	6.27 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5800 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.77 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	77.3 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.15 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	21.3 W/kg ± 19.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL at 5200 MHz

Impedance, transformed to feed point	51.5 Ω - 8.8 j Ω
Return Loss	- 21.2 dB

Antenna Parameters with Head TSL at 5250 MHz

Impedance, transformed to feed point	52.9 Ω - 3.7 j Ω
Return Loss	- 26.8 dB

Antenna Parameters with Head TSL at 5300 MHz

Impedance, transformed to feed point	53.7 Ω - 0.9 j Ω
Return Loss	- 28.7 dB

Antenna Parameters with Head TSL at 5600 MHz

Impedance, transformed to feed point	57.3 Ω - 2.0 j Ω
Return Loss	- 23.0 dB

Antenna Parameters with Head TSL at 5800 MHz

Impedance, transformed to feed point	56.5 Ω + 2.6 j Ω
Return Loss	- 23.7 dB

Antenna Parameters with Body TSL at 5200 MHz

Impedance, transformed to feed point	52.0 Ω - 6.7 j Ω
Return Loss	- 23.4 dB

Antenna Parameters with Body TSL at 5250 MHz

Impedance, transformed to feed point	53.0 Ω - 3.1 j Ω
Return Loss	- 27.5 dB

Antenna Parameters with Body TSL at 5300 MHz

Impedance, transformed to feed point	53.2 Ω - 0.3 j Ω
Return Loss	- 30.1 dB

Antenna Parameters with Body TSL at 5600 MHz

Impedance, transformed to feed point	57.3 Ω - 1.1 j Ω
Return Loss	- 23.2 dB

Antenna Parameters with Body TSL at 5800 MHz

Impedance, transformed to feed point	56.6 Ω + 4.0 j Ω
Return Loss	- 22.8 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.204 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	February 05, 2004

DASY5 Validation Report for Head TSL

Date: 28.08.2015

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 5GHz; Type: D5GHzV2; Serial: D5GHzV2 - SN: 1019

Communication System: UID 0 - CW; Frequency: 5200 MHz, Frequency: 5250 MHz, Frequency: 5300 MHz, Frequency: 5600 MHz, Frequency: 5800 MHz

Medium parameters used: $f = 5200$ MHz; $\sigma = 4.49$ S/m; $\epsilon_r = 35$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5250$ MHz; $\sigma = 4.54$ S/m; $\epsilon_r = 35$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5300$ MHz; $\sigma = 4.59$ S/m; $\epsilon_r = 34.9$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5600$ MHz; $\sigma = 4.88$ S/m; $\epsilon_r = 34.5$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5800$ MHz; $\sigma = 5.09$ S/m; $\epsilon_r = 34.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(5.51, 5.51, 5.51); Calibrated: 30.12.2014, ConvF(5.45, 5.45, 5.45); Calibrated: 30.12.2014, ConvF(5.21, 5.21, 5.21); Calibrated: 30.12.2014, ConvF(4.92, 4.92, 4.92); Calibrated: 30.12.2014, ConvF(4.9, 4.9, 4.9); Calibrated: 30.12.2014;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 17.08.2015
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5200 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 67.05 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 29.2 W/kg

SAR(1 g) = 8.11 W/kg; SAR(10 g) = 2.32 W/kg

Maximum value of SAR (measured) = 18.3 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5250 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 67.57 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 30.1 W/kg

SAR(1 g) = 8.29 W/kg; SAR(10 g) = 2.37 W/kg

Maximum value of SAR (measured) = 18.8 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5300 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 67.84 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 31.7 W/kg

SAR(1 g) = 8.56 W/kg; SAR(10 g) = 2.45 W/kg

Maximum value of SAR (measured) = 19.4 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 66.21 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 33.1 W/kg
SAR(1 g) = 8.45 W/kg; SAR(10 g) = 2.4 W/kg
Maximum value of SAR (measured) = 19.8 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 63.99 V/m; Power Drift = -0.00 dB
Peak SAR (extrapolated) = 33.7 W/kg
SAR(1 g) = 8.25 W/kg; SAR(10 g) = 2.34 W/kg

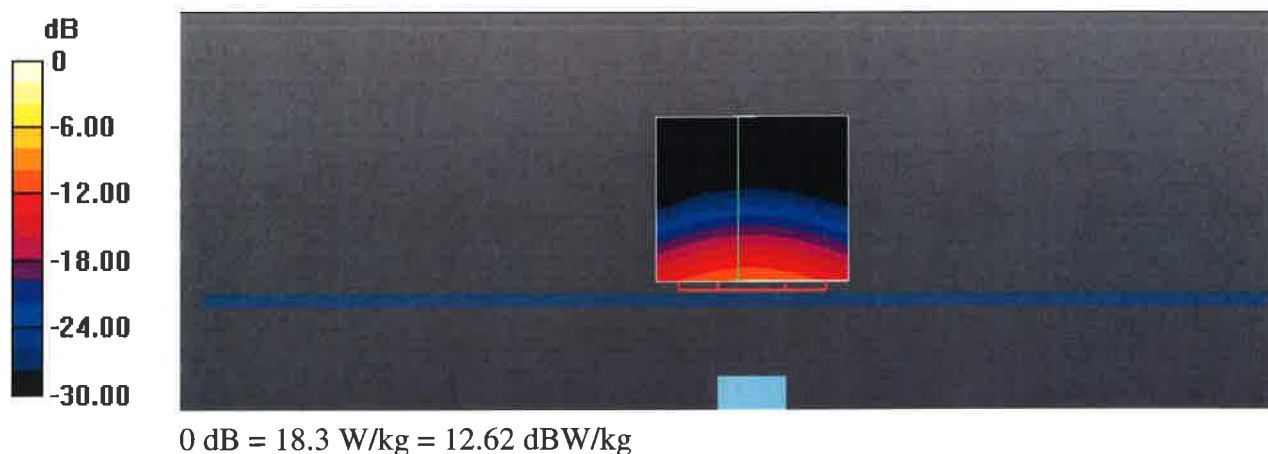


Impedance Measurement Plot for Head TSL

28 Aug 2015 14:02:22

CH1 S11 1 U FS 1: 51.523 Ω -8.7676 Ω 3.4909 pF 5 200.000 000 MHz

*
De l
Cor
Avg
16
H1 d

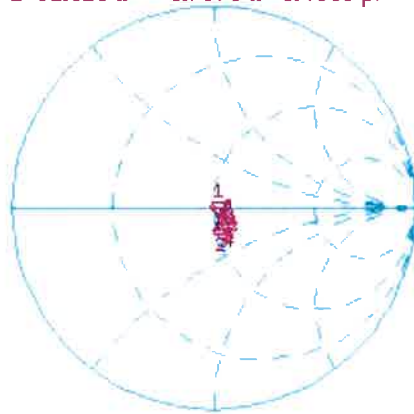

CH1 Markers
2: 52.939 Ω
-3.6992 Ω
5.25000 GHz
3: 53.695 Ω
-939.45 m Ω
5.30000 GHz
4: 57.330 Ω
-1.9707 Ω
5.60000 GHz
5: 56.473 Ω
2.6055 Ω
5.80000 GHz

CH2 S11 LOG 5 dB/REF -20 dB 1: -21.176 dB 5 200.000 000 MHz

Cor
Avg
16
H1 d



CH2 Markers
2: -26.764 dB
5.25000 GHz
3: -28.683 dB
5.30000 GHz
4: -23.009 dB
5.60000 GHz
5: -23.668 dB
5.80000 GHz

DASY5 Validation Report for Body TSL

Date: 27.08.2015

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 5GHz; Type: D5GHzV2; Serial: D5GHzV2 - SN: 1019

Communication System: UID 0 - CW; Frequency: 5200 MHz, Frequency: 5250 MHz, Frequency: 5300 MHz, Frequency: 5600 MHz, Frequency: 5800 MHz

Medium parameters used: $f = 5200$ MHz; $\sigma = 5.46$ S/m; $\epsilon_r = 47.4$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5250$ MHz; $\sigma = 5.52$ S/m; $\epsilon_r = 47.3$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5300$ MHz; $\sigma = 5.59$ S/m; $\epsilon_r = 47.3$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5600$ MHz; $\sigma = 5.99$ S/m; $\epsilon_r = 46.7$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5800$ MHz; $\sigma = 6.27$ S/m; $\epsilon_r = 46.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(4.95, 4.95, 4.95); Calibrated: 30.12.2014, ConvF(4.9, 4.9, 4.9); Calibrated: 30.12.2014, ConvF(4.78, 4.78, 4.78); Calibrated: 30.12.2014, ConvF(4.35, 4.35, 4.35); Calibrated: 30.12.2014, ConvF(4.32, 4.32, 4.32); Calibrated: 30.12.2014;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 17.08.2015
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5200 MHz/Zoom Scan,

dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 59.22 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 29.3 W/kg

SAR(1 g) = 7.57 W/kg; SAR(10 g) = 2.12 W/kg

Maximum value of SAR (measured) = 17.4 W/kg

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5250 MHz/Zoom Scan,

dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 59.60 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 30.0 W/kg

SAR(1 g) = 7.69 W/kg; SAR(10 g) = 2.15 W/kg

Maximum value of SAR (measured) = 17.6 W/kg

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5300 MHz/Zoom Scan,

dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 59.29 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 30.6 W/kg

SAR(1 g) = 7.7 W/kg; SAR(10 g) = 2.16 W/kg

Maximum value of SAR (measured) = 17.9 W/kg

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 58.65 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 34.8 W/kg

SAR(1 g) = 8.03 W/kg; SAR(10 g) = 2.23 W/kg

Maximum value of SAR (measured) = 19.2 W/kg


Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 56.66 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 35.6 W/kg

SAR(1 g) = 7.77 W/kg; SAR(10 g) = 2.15 W/kg

Maximum value of SAR (measured) = 19.0 W/kg

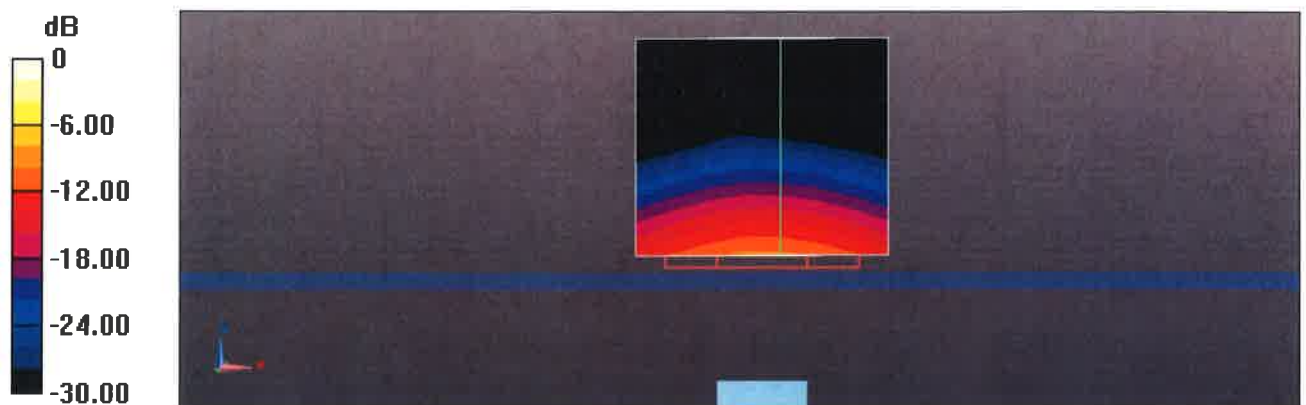

0 dB = 19.0 W/kg = 12.79 dBW/kg

Impedance Measurement Plot for Body TSL

27 Aug 2015 14:04:18

[CH1] S11 1 U FS 1: 51.992 Ω -6.6523 Ω 4.6009 pF 5 200.000 000 MHz


*

De1

Cor

Avg
16

H1d

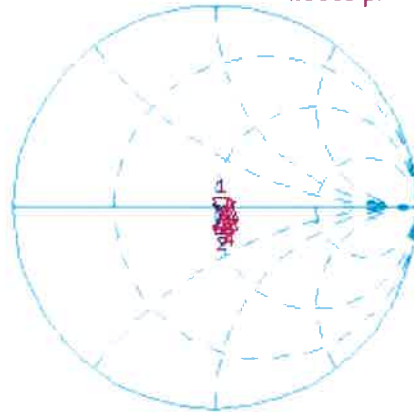

CH1 Markers

- 2: 53.043 Ω
-3.1152 Ω
5.25000 GHz
- 3: 53.219 Ω
-255.86 m Ω
5.30000 GHz
- 4: 57.346 Ω
-1.1133 Ω
5.60000 GHz
- 5: 56.588 Ω
3.9883 Ω
5.80000 GHz

CH2 S11 LOG 5 dB/REF -20 dB 1: -23.357 dB 5 200.000 000 MHz

De1

Cor

Avg
16

H1d



CH2 Markers

- 2: -27.480 dB
5.25000 GHz
- 3: -30.089 dB
5.30000 GHz
- 4: -23.195 dB
5.60000 GHz
- 5: -22.029 dB
5.80000 GHz

START 5 000.000 000 MHz

STOP 6 000.000 000 MHz



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **Auden**

Certificate No: **EX3-7350_Dec15**

CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:7350**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-14.v4, QA CAL-23.v5, QA CAL-25.v6
Calibration procedure for dosimetric E-field probes**

Calibration date: **December 17, 2015**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	01-Apr-15 (No. 217-02128)	Mar-16
Power sensor E4412A	MY41498087	01-Apr-15 (No. 217-02128)	Mar-16
Reference 3 dB Attenuator	SN: S5054 (3c)	01-Apr-15 (No. 217-02129)	Mar-16
Reference 20 dB Attenuator	SN: S5277 (20x)	01-Apr-15 (No. 217-02132)	Mar-16
Reference 30 dB Attenuator	SN: S5129 (30b)	01-Apr-15 (No. 217-02133)	Mar-16
Reference Probe ES3DV2	SN: 3013	30-Dec-14 (No. ES3-3013_Dec14)	Dec-15
DAE4	SN: 660	14-Jan-15 (No. DAE4-660_Jan15)	Jan-16
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Apr-13)	In house check: Apr-16
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-15)	In house check: Oct-16

Calibrated by:	Name Claudio Leubler	Function Laboratory Technician	Signature
Approved by:	Name Katja Pokovic	Function Technical Manager	Signature

Issued: December 17, 2015

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization φ	φ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E²-field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z}** = NORM_{x,y,z} * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}**: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).

Probe EX3DV4

SN:7350

Manufactured: October 13, 2014
Calibrated: December 17, 2015

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7350

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	0.50	0.51	0.48	± 10.1 %
DCP (mV) ^B	97.8	98.5	97.4	

Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB $\sqrt{\mu\text{V}}$	C	D dB	VR mV	Unc ^E (k=2)
0	CW	X	0.0	0.0	1.0	0.00	139.6	±3.5 %
		Y	0.0	0.0	1.0		146.2	
		Z	0.0	0.0	1.0		132.3	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of Norm X,Y,Z do not affect the E²-field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7350

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unc (k=2)
750	41.9	0.89	10.26	10.26	10.26	0.19	1.60	± 12.0 %
835	41.5	0.90	9.97	9.97	9.97	0.18	1.70	± 12.0 %
900	41.5	0.97	9.80	9.80	9.80	0.27	1.16	± 12.0 %
1450	40.5	1.20	8.66	8.66	8.66	0.14	2.06	± 12.0 %
1750	40.1	1.37	8.59	8.59	8.59	0.21	1.11	± 12.0 %
1900	40.0	1.40	8.31	8.31	8.31	0.39	0.80	± 12.0 %
2100	39.8	1.49	8.42	8.42	8.42	0.39	0.80	± 12.0 %
2300	39.5	1.67	7.87	7.87	7.87	0.40	0.84	± 12.0 %
2450	39.2	1.80	7.50	7.50	7.50	0.32	0.99	± 12.0 %
2600	39.0	1.96	7.18	7.18	7.18	0.33	1.01	± 12.0 %
3500	37.9	2.91	7.26	7.26	7.26	0.27	1.31	± 13.1 %
5200	36.0	4.66	5.48	5.48	5.48	0.40	1.80	± 13.1 %
5300	35.9	4.76	5.25	5.25	5.25	0.40	1.80	± 13.1 %
5500	35.6	4.96	4.87	4.87	4.87	0.45	1.80	± 13.1 %
5600	35.5	5.07	4.52	4.52	4.52	0.50	1.80	± 13.1 %
5800	35.3	5.27	4.53	4.53	4.53	0.50	1.80	± 13.1 %

^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7350

Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unc (k=2)
750	55.5	0.96	10.15	10.15	10.15	0.42	0.89	± 12.0 %
835	55.2	0.97	9.83	9.83	9.83	0.21	1.56	± 12.0 %
900	55.0	1.05	9.84	9.84	9.84	0.34	1.08	± 12.0 %
1450	54.0	1.30	8.54	8.54	8.54	0.14	2.22	± 12.0 %
1750	53.4	1.49	8.30	8.30	8.30	0.30	0.93	± 12.0 %
1900	53.3	1.52	8.04	8.04	8.04	0.32	0.94	± 12.0 %
2100	53.2	1.62	8.05	8.05	8.05	0.27	1.06	± 12.0 %
2300	52.9	1.81	7.69	7.69	7.69	0.39	0.87	± 12.0 %
2450	52.7	1.95	7.49	7.49	7.49	0.40	0.80	± 12.0 %
2600	52.5	2.16	7.30	7.30	7.30	0.44	0.83	± 12.0 %
3500	51.3	3.31	6.80	6.80	6.80	0.30	1.36	± 13.1 %
5200	49.0	5.30	4.84	4.84	4.84	0.50	1.90	± 13.1 %
5300	48.9	5.42	4.62	4.62	4.62	0.50	1.90	± 13.1 %
5500	48.6	5.65	4.05	4.05	4.05	0.60	1.90	± 13.1 %
5600	48.5	5.77	3.91	3.91	3.91	0.60	1.90	± 13.1 %
5800	48.2	6.00	4.03	4.03	4.03	0.60	1.90	± 13.1 %


^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

Frequency Response of E-Field


(TEM-Cell:ifi110 EXX, Waveguide: R22)

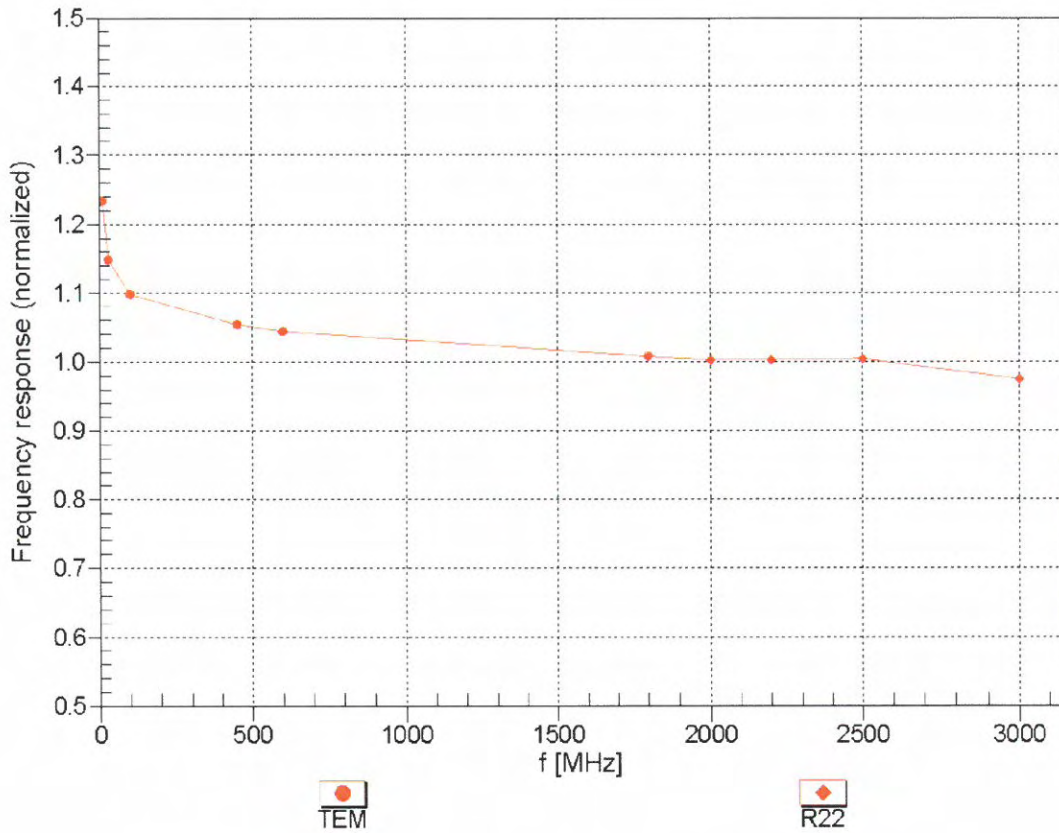



Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ (k=2)

Receiving Pattern (ϕ), $\vartheta = 0^\circ$

f=450 MHz,TEM


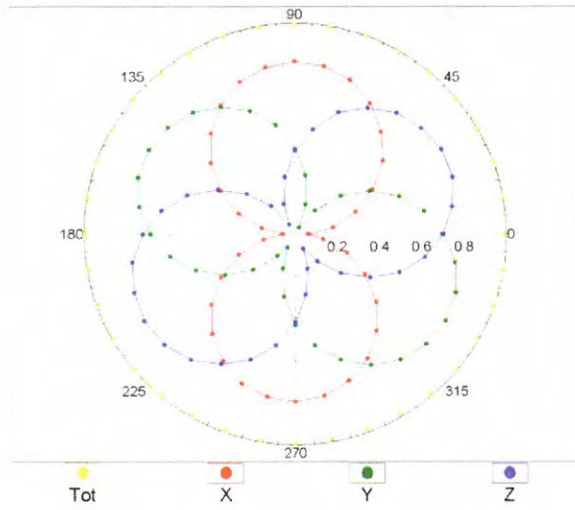


f=1800 MHz,R22

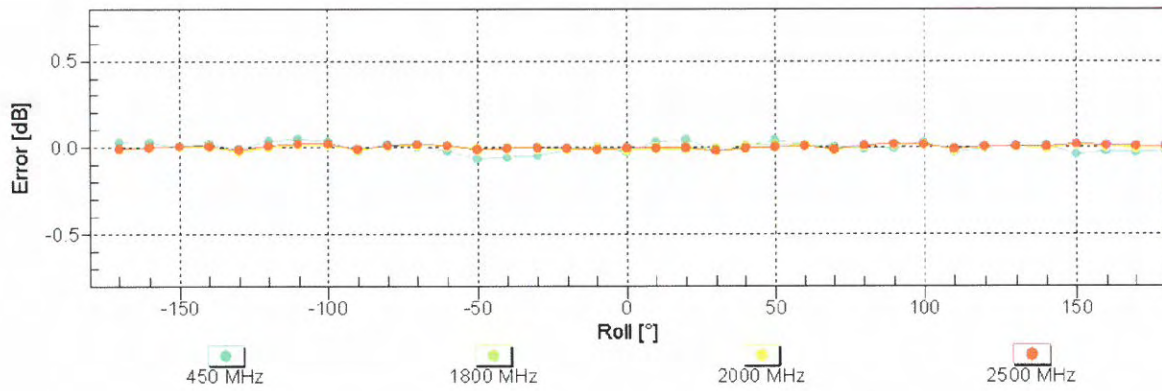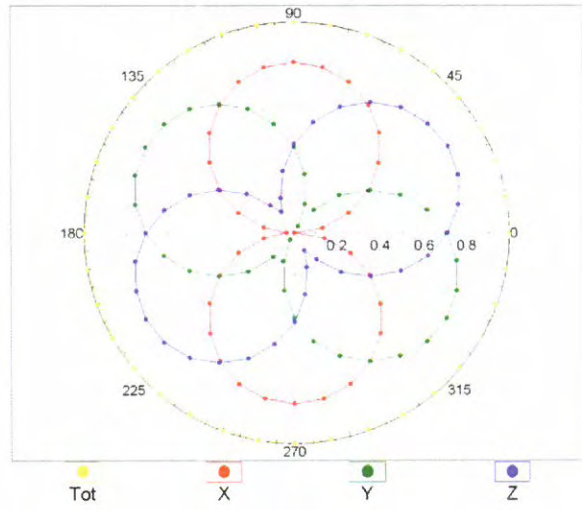


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ (k=2)

Dynamic Range f(SAR_{head}) (TEM cell , f_{eval}= 1900 MHz)

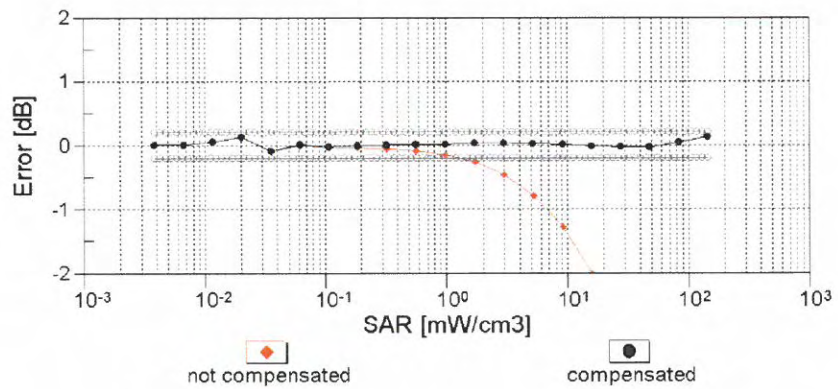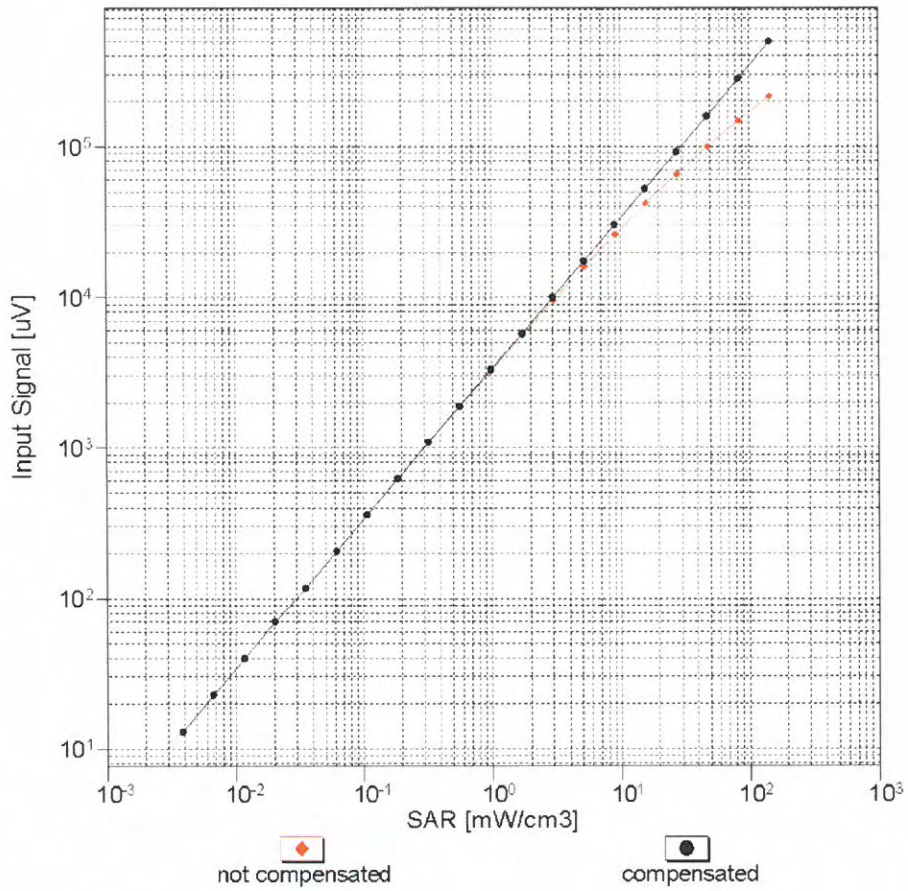


Uncertainty of Linearity Assessment: ± 0.6% (k=2)

Conversion Factor Assessment

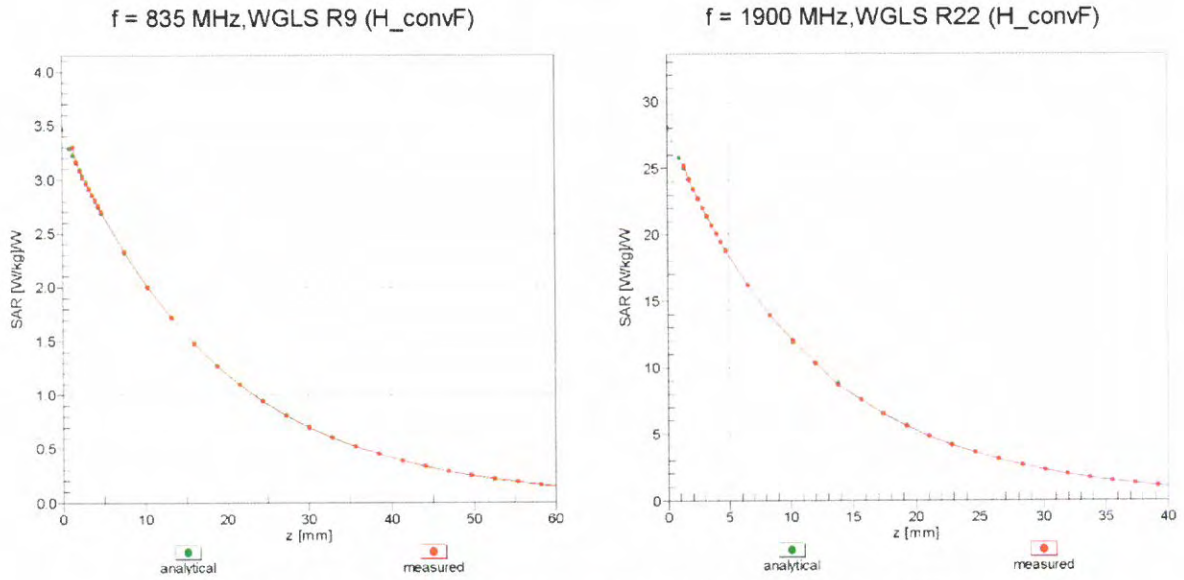

Deviation from Isotropy in Liquid Error (ϕ, ϑ), f = 900 MHz

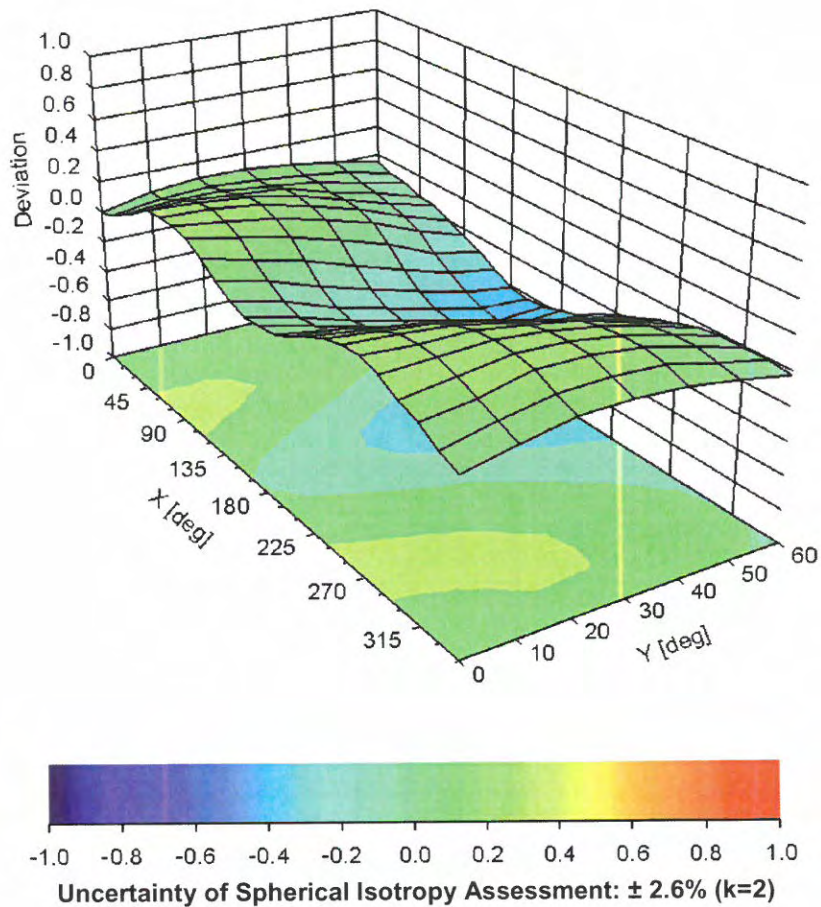

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7350

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	29.8
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	1.4 mm