

TD-CDMA 2.6GHz Band_Body_Edge 4

Frequency: 2506 MHz; Duty Cycle: 1:3.0; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used (interpolated): $f = 2506$ MHz; $\sigma = 2.082$ mho/m; $\epsilon_r = 51.519$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1239; Calibrated: 10/18/2011
- Probe: EX3DV4 - SN3751; ConvF(6.4, 6.4, 6.4); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (A); Type: QDOVA001BB; Serial: 1117

QPSK_BW-10MHz_Low-Ch/Area Scan (9x11x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.778 mW/g

QPSK_BW-10MHz_Low-Ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 19.372 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.2630

SAR(1 g) = 0.646 mW/g; SAR(10 g) = 0.315 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.887 mW/g

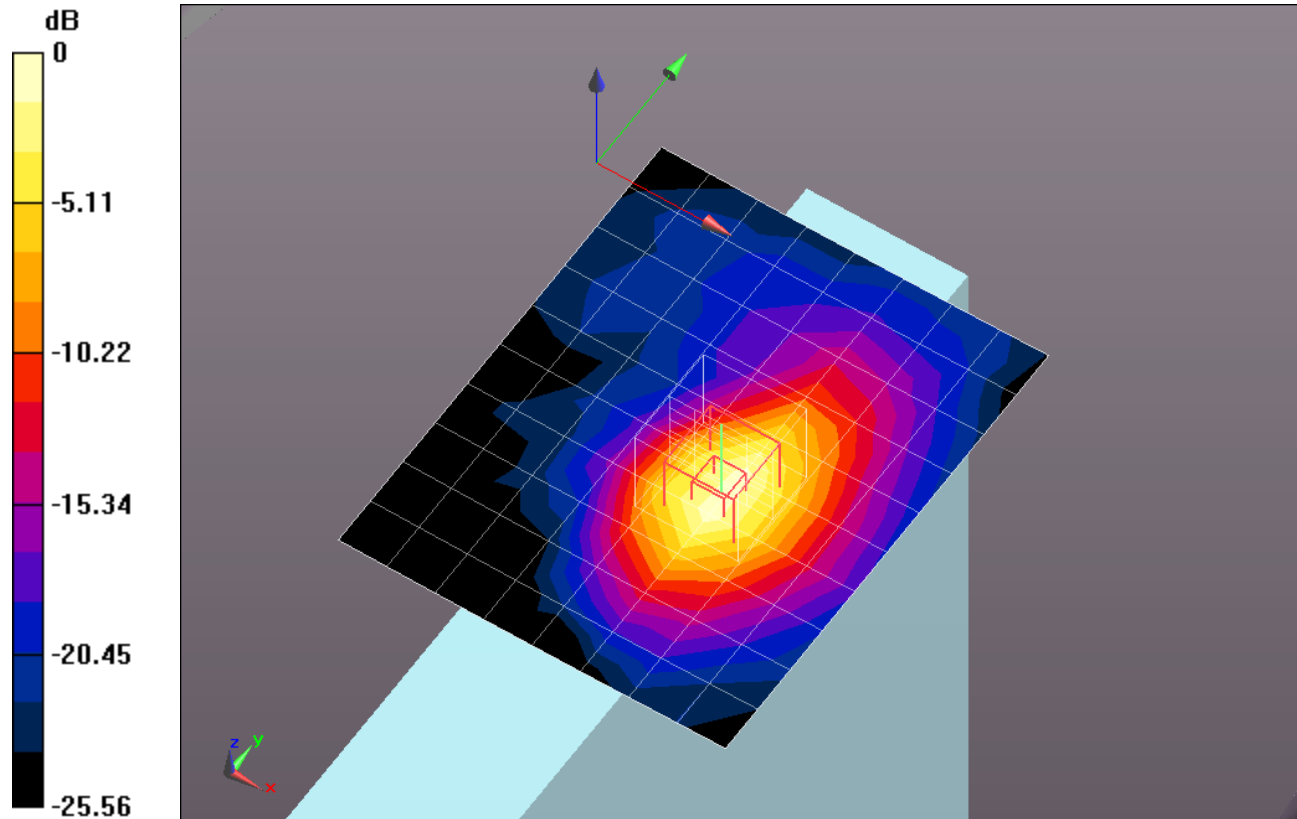

0 dB = 0.890mW/g = -1.01 dB mW/g


TD-CDMA 2.6GHz Band_Body_Edge 4

Frequency: 2506 MHz; Duty Cycle: 1:3.0

QPSK_BW-10MHz_Low-Ch/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.777 mW/g

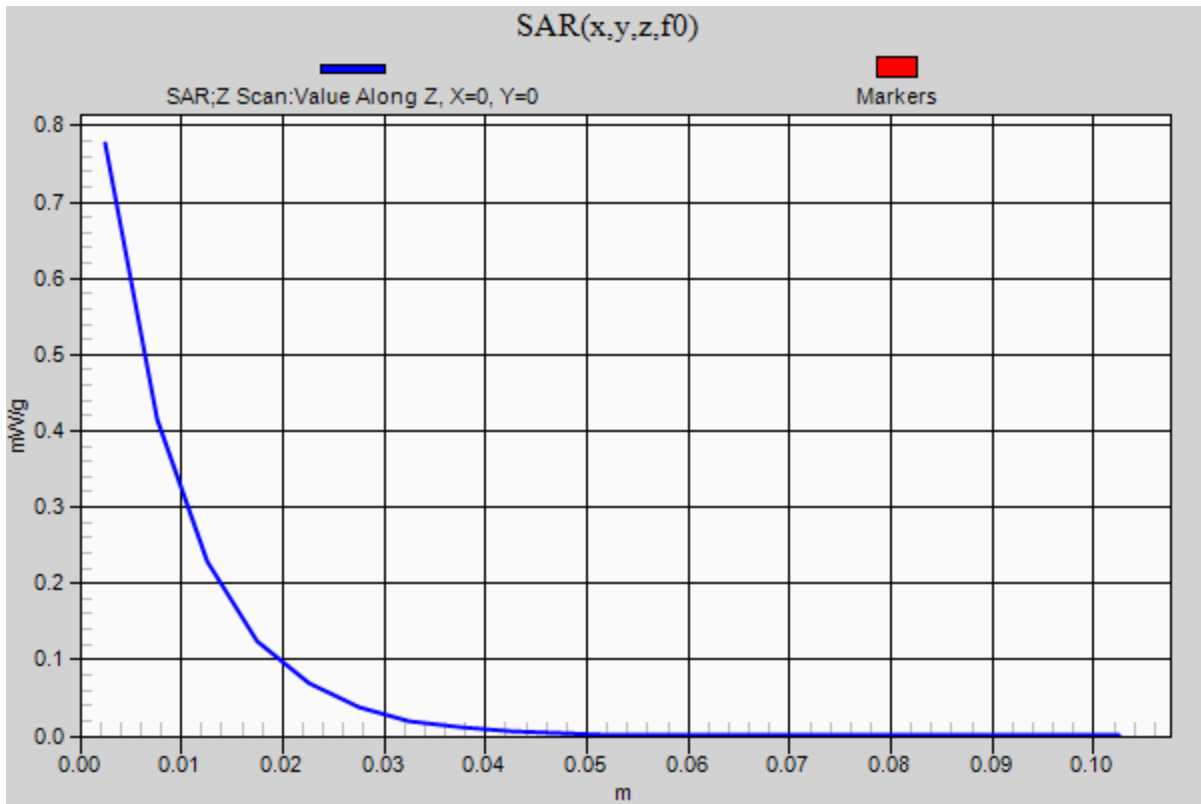

TD-CDMA 2.6GHz Band_Body_Edge 4

Frequency: 2593 MHz; Duty Cycle: 1:3.0; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used (interpolated): $f = 2593$ MHz; $\sigma = 2.206$ mho/m; $\epsilon_r = 51.131$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1239; Calibrated: 10/18/2011
- Probe: EX3DV4 - SN3751; ConvF(6.4, 6.4, 6.4); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (A); Type: QDOVA001BB; Serial: 1117

QPSK_BW-10MHz_Mid-Ch/Area Scan (9x11x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.318 mW/g

QPSK_BW-10MHz_Mid-Ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 24.502 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 2.1120

SAR(1 g) = 1.06 mW/g; SAR(10 g) = 0.501 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.459 mW/g

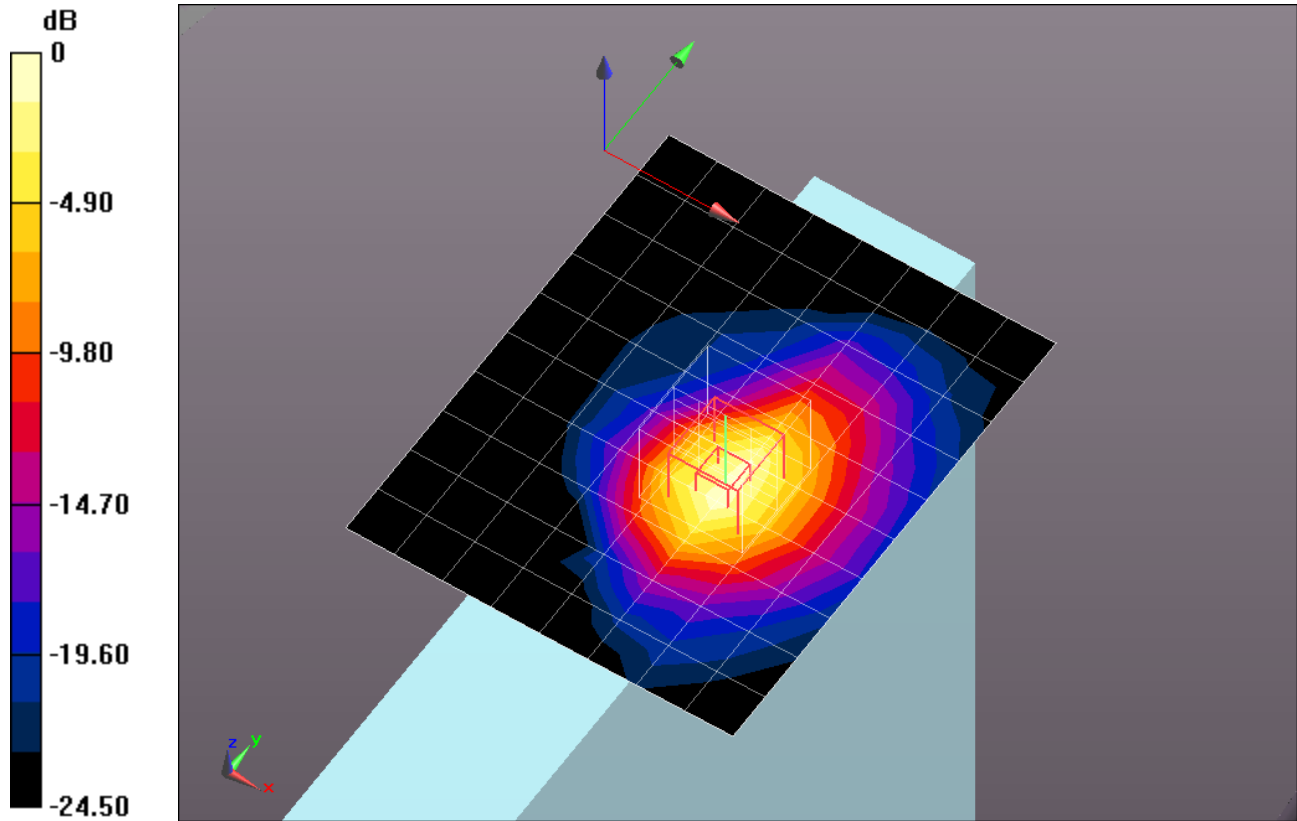

0 dB = 1.460mW/g = 3.29 dB mW/g


TD-CDMA 2.6GHz Band_Body_Edge 4

Frequency: 2593 MHz; Duty Cycle: 1:3.0

QPSK_BW-10MHz_Mid-Ch/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.311 mW/g

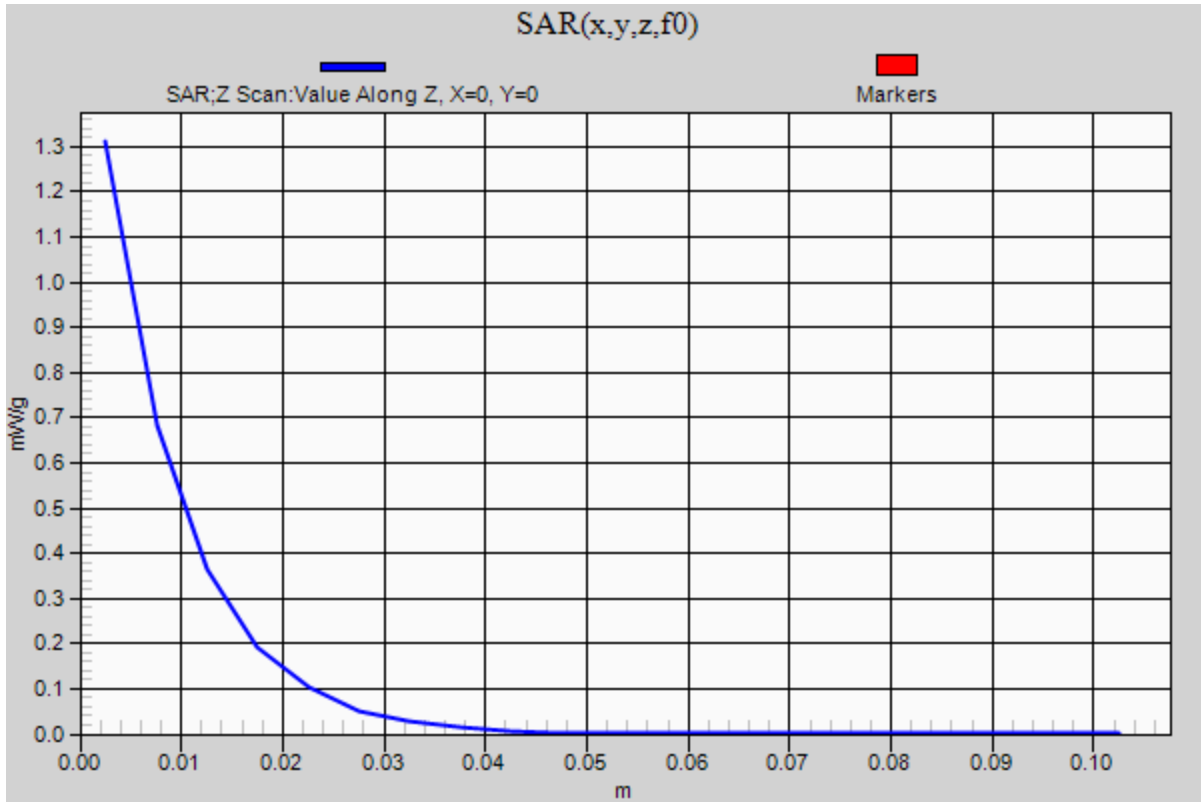

TD-CDMA 2.6GHz Band_Body_Edge 4

Frequency: 2685 MHz; Duty Cycle: 1:3.0; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used: $f = 2685 \text{ MHz}$; $\sigma = 2.351 \text{ mho/m}$; $\epsilon_r = 50.763$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Electronics: DAE4 Sn1239; Calibrated: 10/18/2011
- Probe: EX3DV4 - SN3751; ConvF(6.4, 6.4, 6.4); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (A); Type: QDOVA001BB; Serial: 1117

QPSK_BW-10MHz_High-Ch/Area Scan (9x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.919 mW/g

QPSK_BW-10MHz_High-Ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$,


$dz=5\text{mm}$

Reference Value = 19.765 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.5350

SAR(1 g) = 0.741 mW/g; SAR(10 g) = 0.344 mW/g

Maximum value of SAR (measured) = 1.040 mW/g

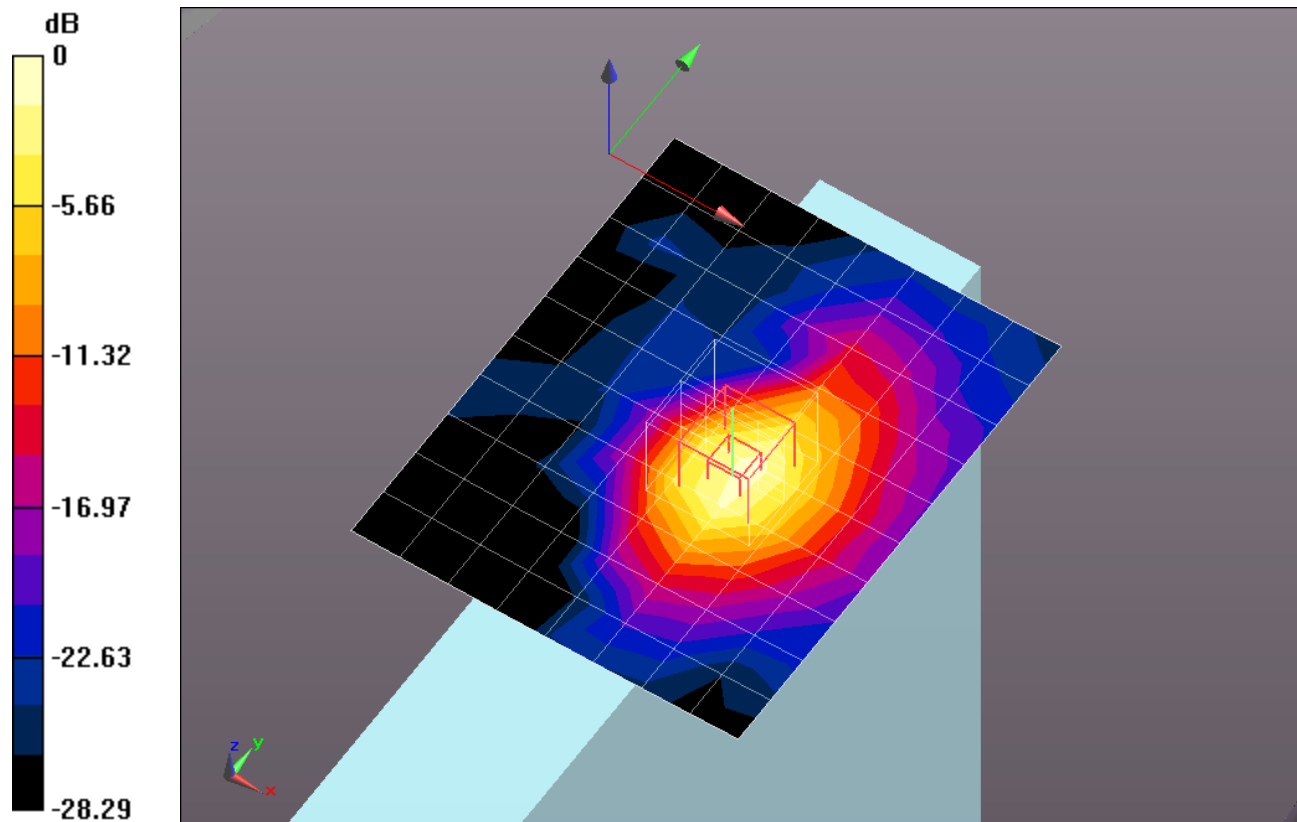


0 dB = 1.040mW/g = 0.34 dB mW/g

TD-CDMA 2.6GHz Band_Body_Edge 4

Frequency: 2685 MHz; Duty Cycle: 1:3.0

QPSK_BW-10MHz_High-Ch/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 0.918 mW/g

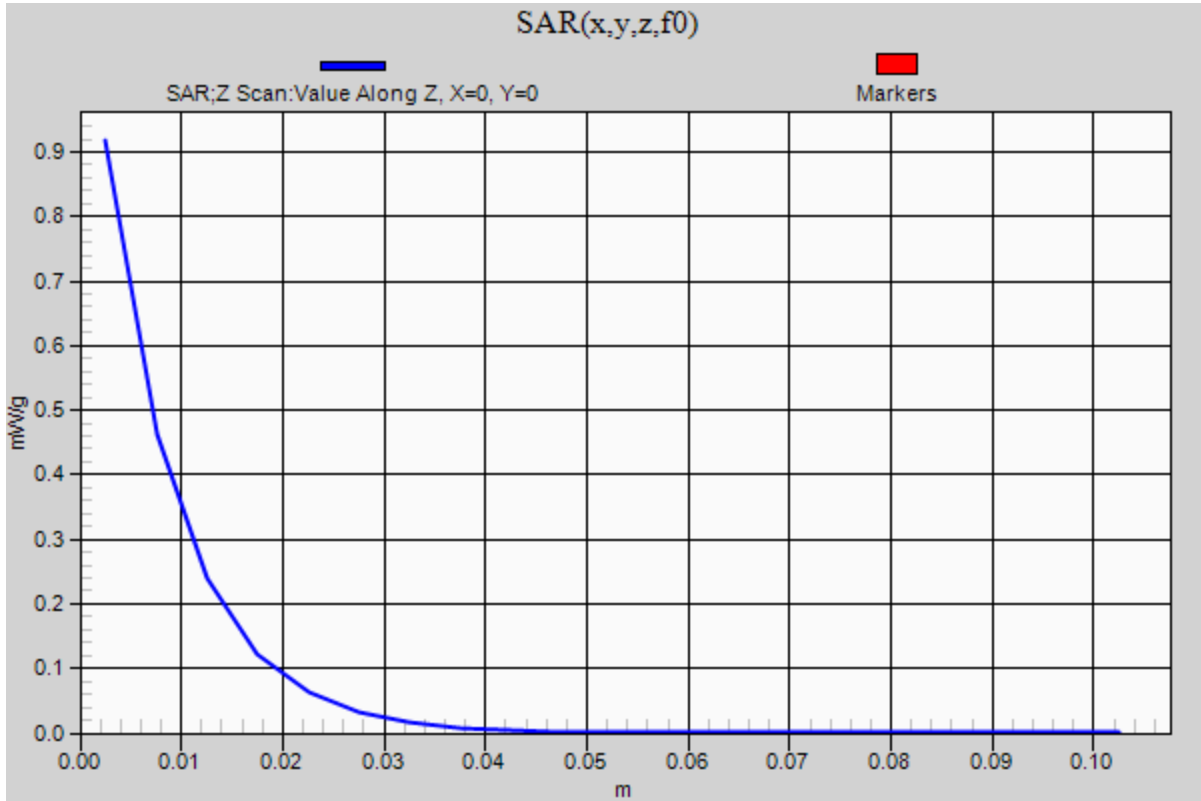

TD-CDMA 2.6GHz Band_Body_Edge 4

Frequency: 2593 MHz; Duty Cycle: 1:3.0; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used (interpolated): $f = 2593$ MHz; $\sigma = 2.216$ mho/m; $\epsilon_r = 51.895$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1239; Calibrated: 10/18/2011
- Probe: EX3DV4 - SN3751; ConvF(6.4, 6.4, 6.4); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (A); Type: QDOVA001BB; Serial: 1117

16QAM_BW-10MHz_Mid-Ch/Area Scan (9x11x1): Measurement grid: dx=15mm, dy=15mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.294 mW/g

16QAM_BW-10MHz_Mid-Ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 24.216 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 2.1250

SAR(1 g) = 1.06 mW/g; SAR(10 g) = 0.500 mW/g

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.451 mW/g

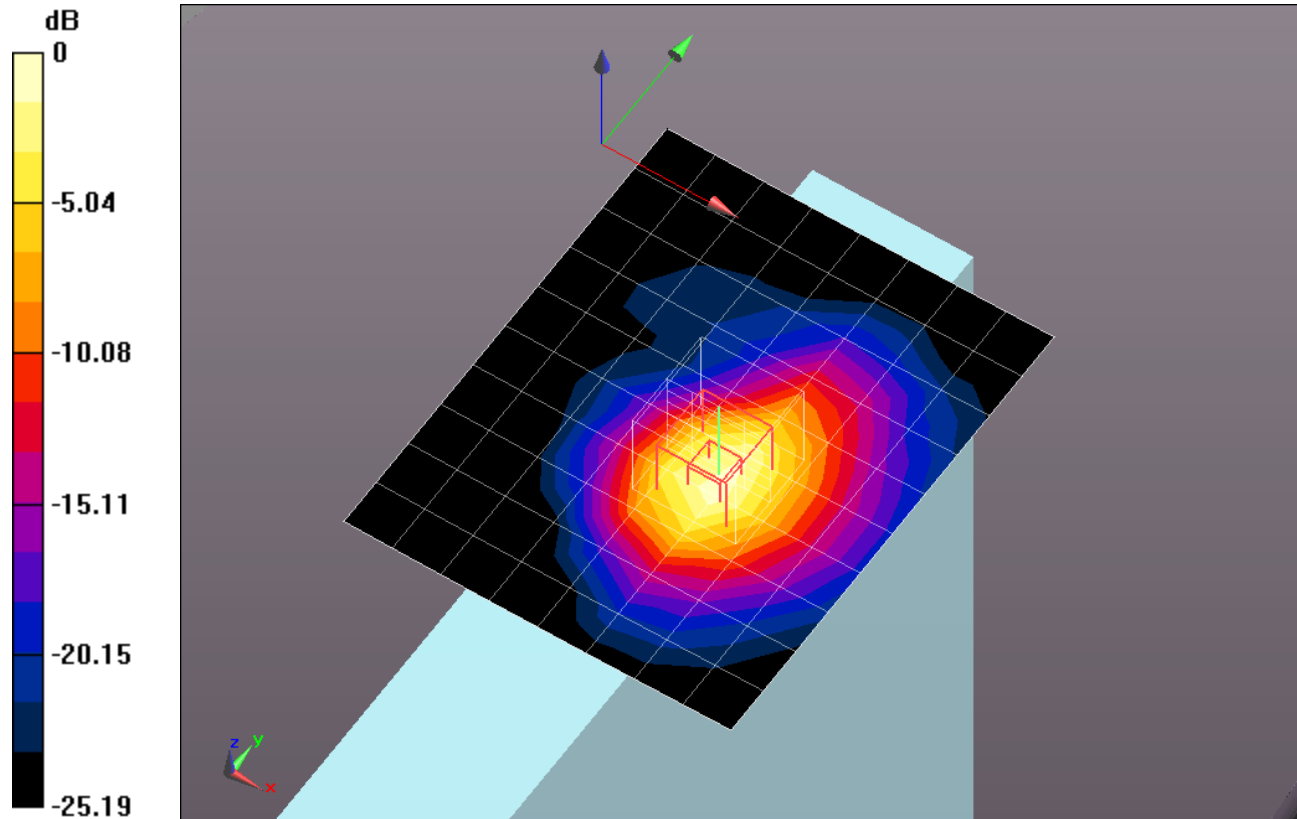

0 dB = 1.450mW/g = 3.23 dB mW/g


TD-CDMA 2.6GHz Band_Body_Edge 4

Frequency: 2593 MHz; Duty Cycle: 1:3.0

16QAM_BW-10MHz_Mid-Ch/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.292 mW/g

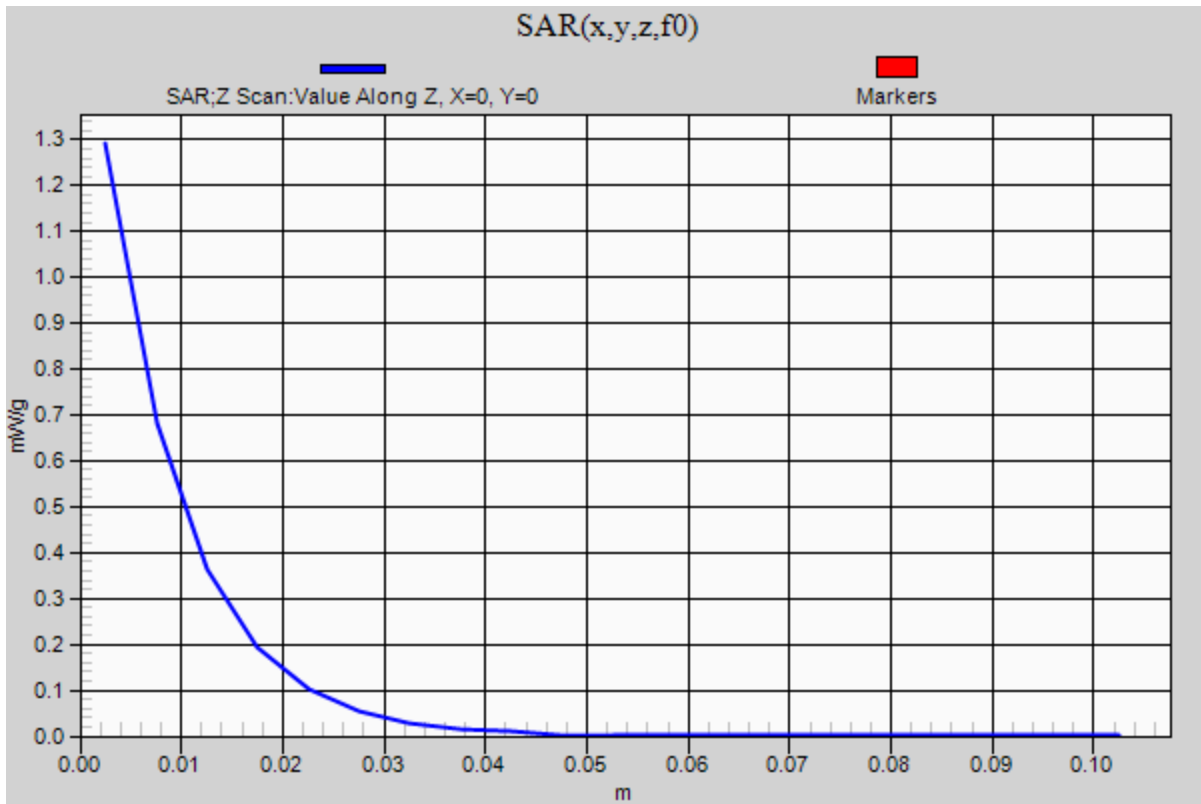

TD-CDMA 2.6GHz Band_Body_Edge 4

Frequency: 2593 MHz; Duty Cycle: 1:3.0; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used (interpolated): $f = 2593$ MHz; $\sigma = 2.216$ mho/m; $\epsilon_r = 51.895$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1239; Calibrated: 10/18/2011
- Probe: EX3DV4 - SN3751; ConvF(6.4, 6.4, 6.4); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (A); Type: QDOVA001BB; Serial: 1117

64QAM_BW-10MHz_Mid-Ch/Area Scan (9x11x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.263 mW/g

64QAM_BW-10MHz_Mid-Ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 23.927 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 2.0680

SAR(1 g) = 1.03 mW/g; SAR(10 g) = 0.490 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.413 mW/g

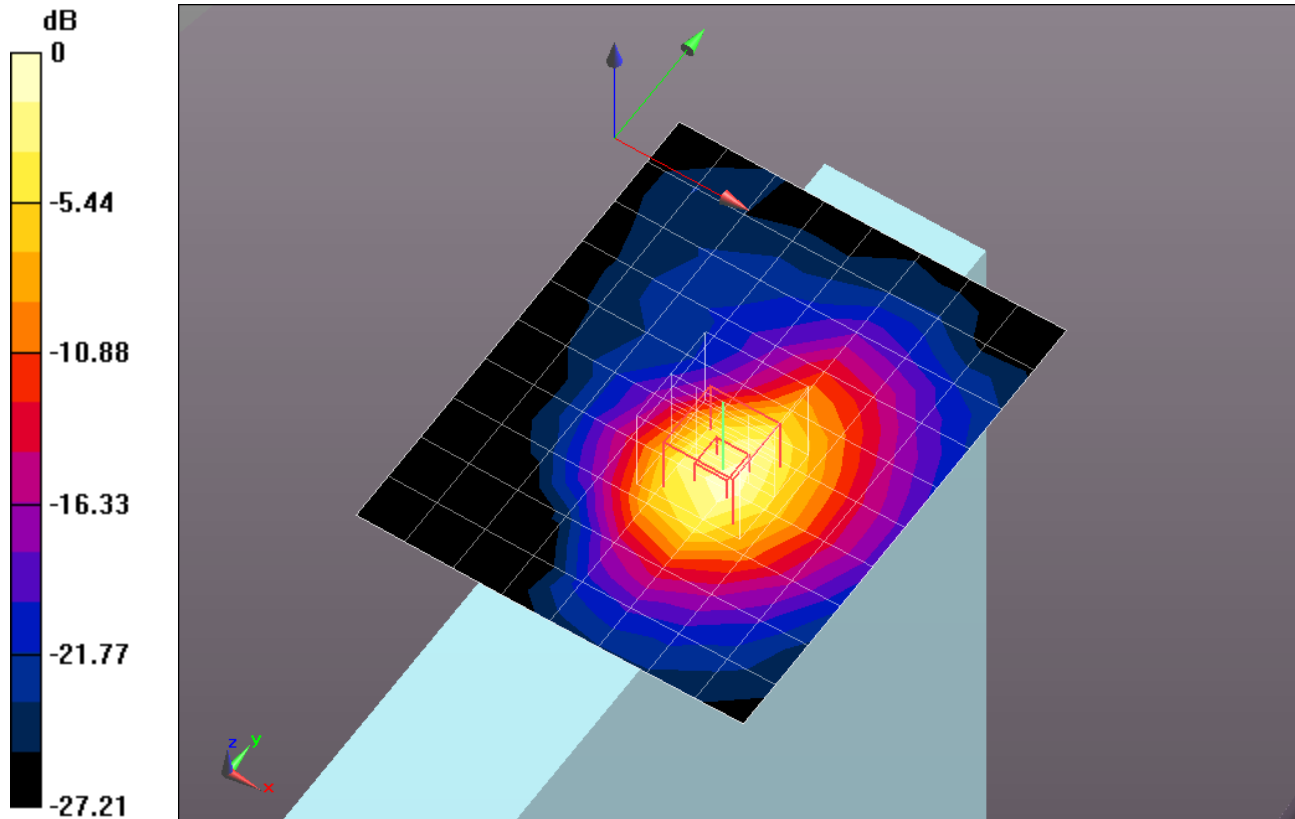

0 dB = 1.410mW/g = 2.98 dB mW/g


TD-CDMA 2.6GHz Band_Body_Edge 4

Frequency: 2593 MHz; Duty Cycle: 1:3.0

64QAM_BW-10MHz_Mid-Ch/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.260 mW/g

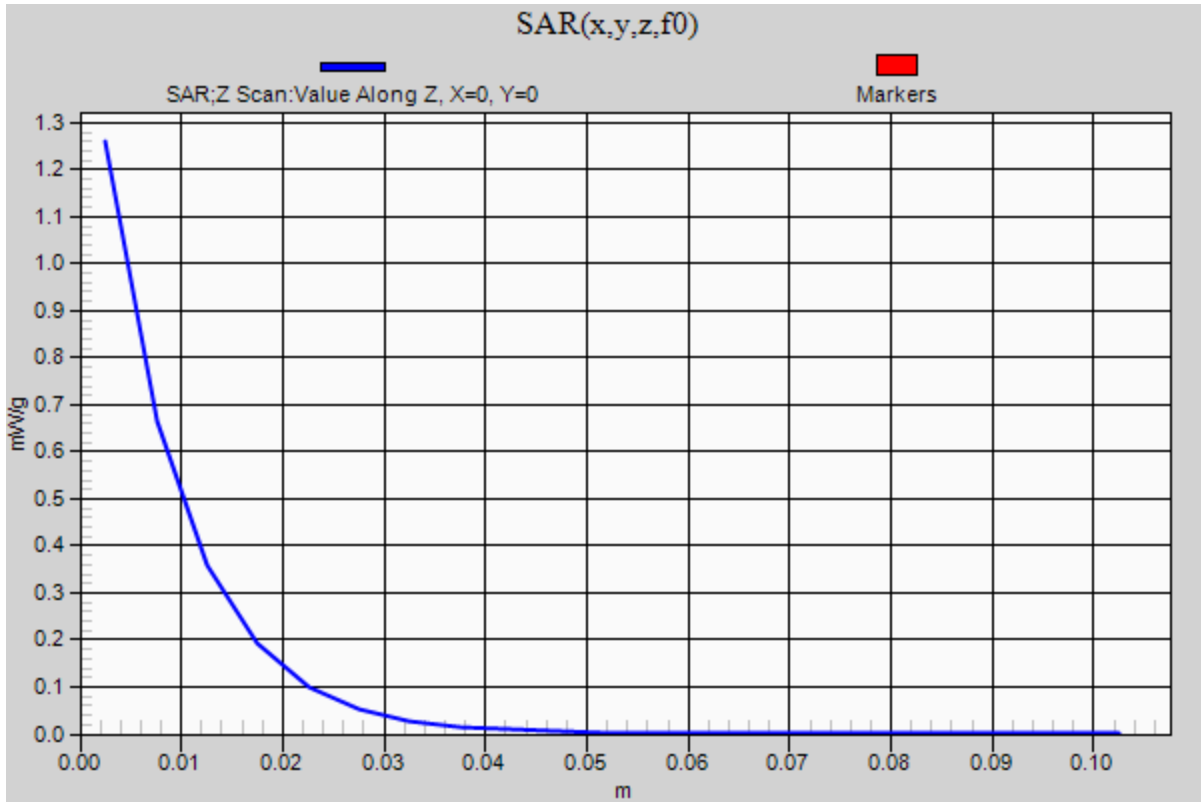

TD-CDMA 2.6GHz Band_Body_Edge 4

Frequency: 2506 MHz; Duty Cycle: 1:3.0; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used (interpolated): $f = 2506$ MHz; $\sigma = 2.082$ mho/m; $\epsilon_r = 51.519$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1239; Calibrated: 10/18/2011
- Probe: EX3DV4 - SN3751; ConvF(6.4, 6.4, 6.4); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (A); Type: QDOVA001BB; Serial: 1117

QPSK_BW-5MHz_Low-Ch/Area Scan (9x11x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.677 mW/g

QPSK_BW-5MHz_Low-Ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 18.085 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.2800

SAR(1 g) = 0.655 mW/g; SAR(10 g) = 0.320 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.898 mW/g

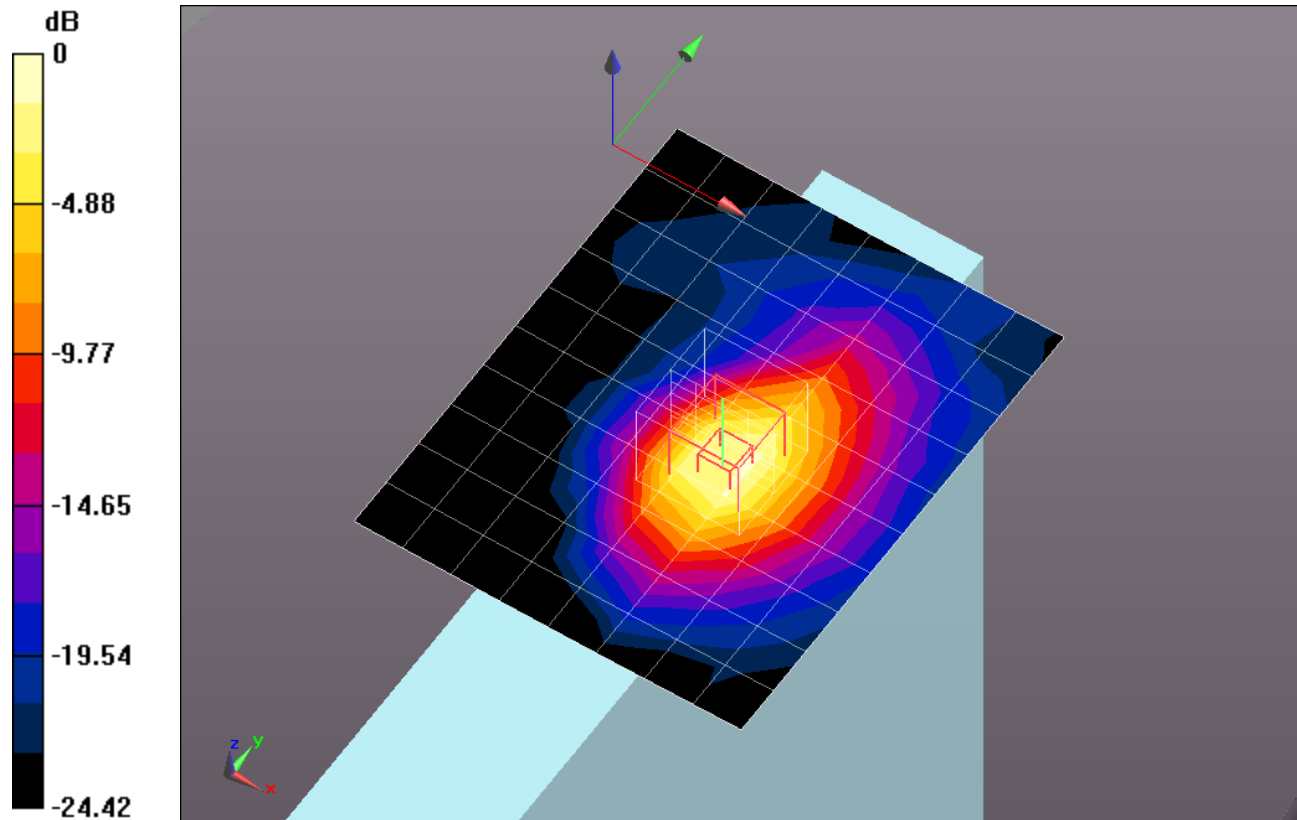

0 dB = 0.900mW/g = -0.92 dB mW/g


TD-CDMA 2.6GHz Band_Body_Edge 4

Frequency: 2506 MHz; Duty Cycle: 1:3.0

QPSK_BW-5MHz_Low-Ch/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.677 mW/g

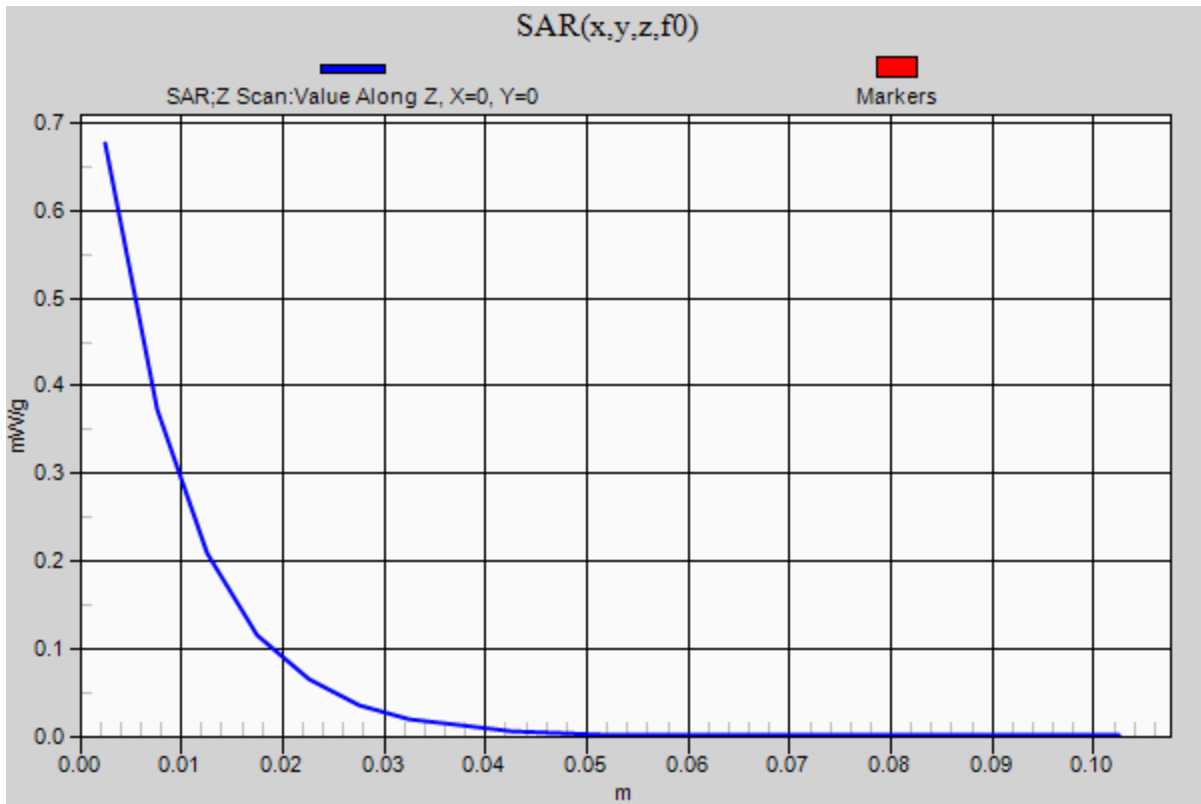

TD-CDMA 2.6GHz Band_Body_Edge 4

Frequency: 2593 MHz; Duty Cycle: 1:3.0; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used (interpolated): $f = 2593$ MHz; $\sigma = 2.216$ mho/m; $\epsilon_r = 51.895$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1239; Calibrated: 10/18/2011
- Probe: EX3DV4 - SN3751; ConvF(6.4, 6.4, 6.4); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (A); Type: QDOVA001BB; Serial: 1117

QPSK_BW-5MHz_Mid-Ch/Area Scan (9x11x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.287 mW/g

QPSK_BW-5MHz_Mid-Ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 24.134 V/m; Power Drift = -0.0021 dB

Peak SAR (extrapolated) = 2.0930

SAR(1 g) = 1.04 mW/g; SAR(10 g) = 0.495 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.444 mW/g

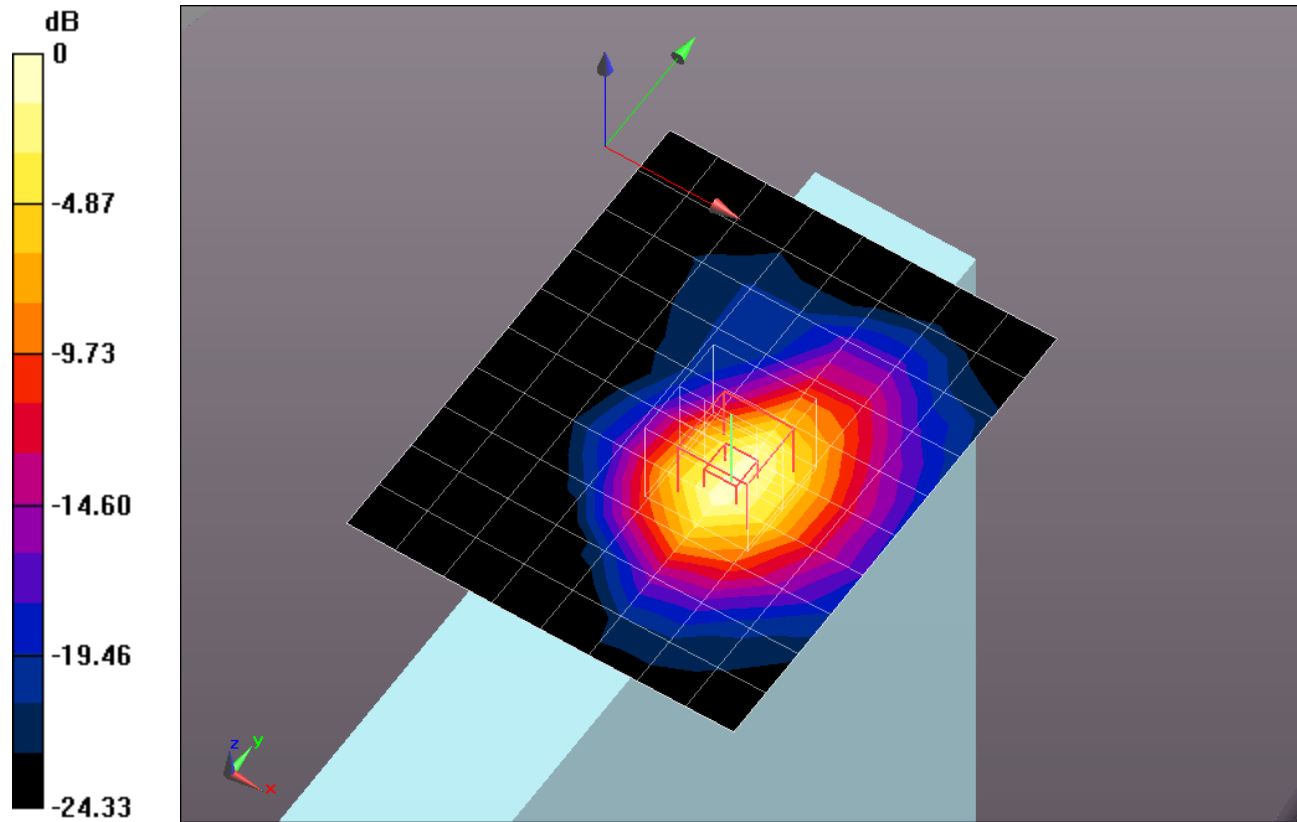

0 dB = 1.440mW/g = 3.17 dB mW/g


TD-CDMA 2.6GHz Band_Body_Edge 4

Frequency: 2593 MHz; Duty Cycle: 1:3.0

QPSK_BW-5MHz_Mid-Ch/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.275 mW/g

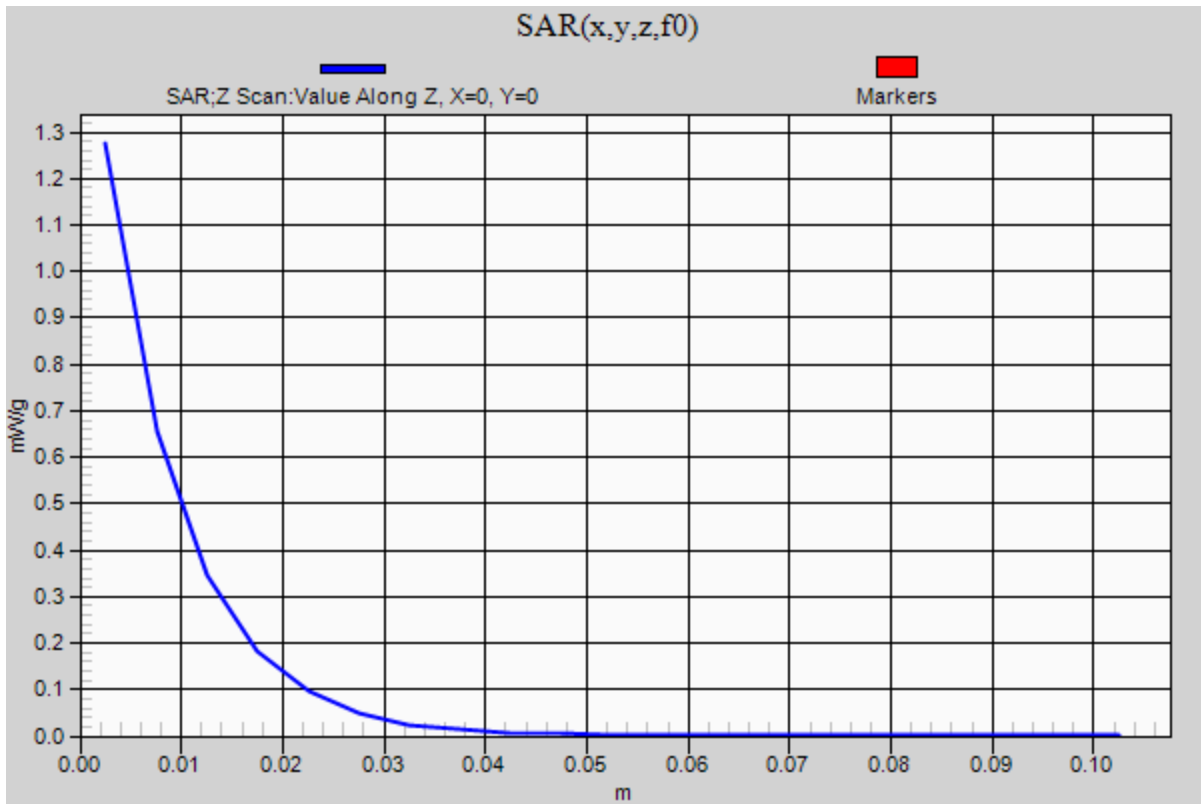

TD-CDMA 2.6GHz Band_Body_Edge 4

Frequency: 2685 MHz; Duty Cycle: 1:3.0; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used: $f = 2685$ MHz; $\sigma = 2.351$ mho/m; $\epsilon_r = 50.763$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1239; Calibrated: 10/18/2011
- Probe: EX3DV4 - SN3751; ConvF(6.4, 6.4, 6.4); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (A); Type: QDOVA001BB; Serial: 1117

QPSK_BW-5MHz_High-Ch/Area Scan (9x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.788 mW/g


QPSK_BW-5MHz_High-Ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.275 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.5560

SAR(1 g) = 0.752 mW/g; SAR(10 g) = 0.347 mW/g

Maximum value of SAR (measured) = 1.056 mW/g

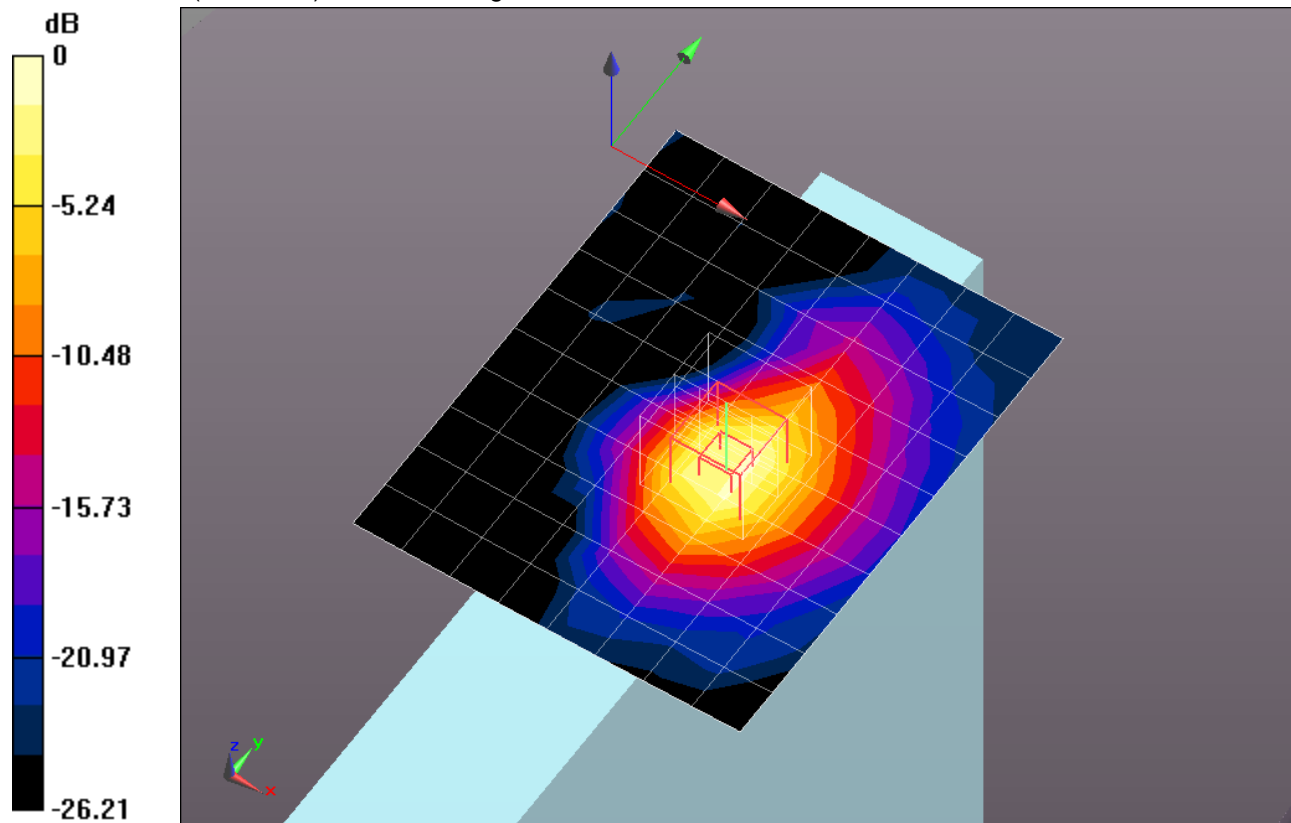


0 dB = 1.060mW/g = 0.51 dB mW/g

TD-CDMA 2.6GHz Band_Body_Edge 4

Frequency: 2685 MHz; Duty Cycle: 1:3.0

QPSK_BW-5MHz_High-Ch/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 0.784 mW/g

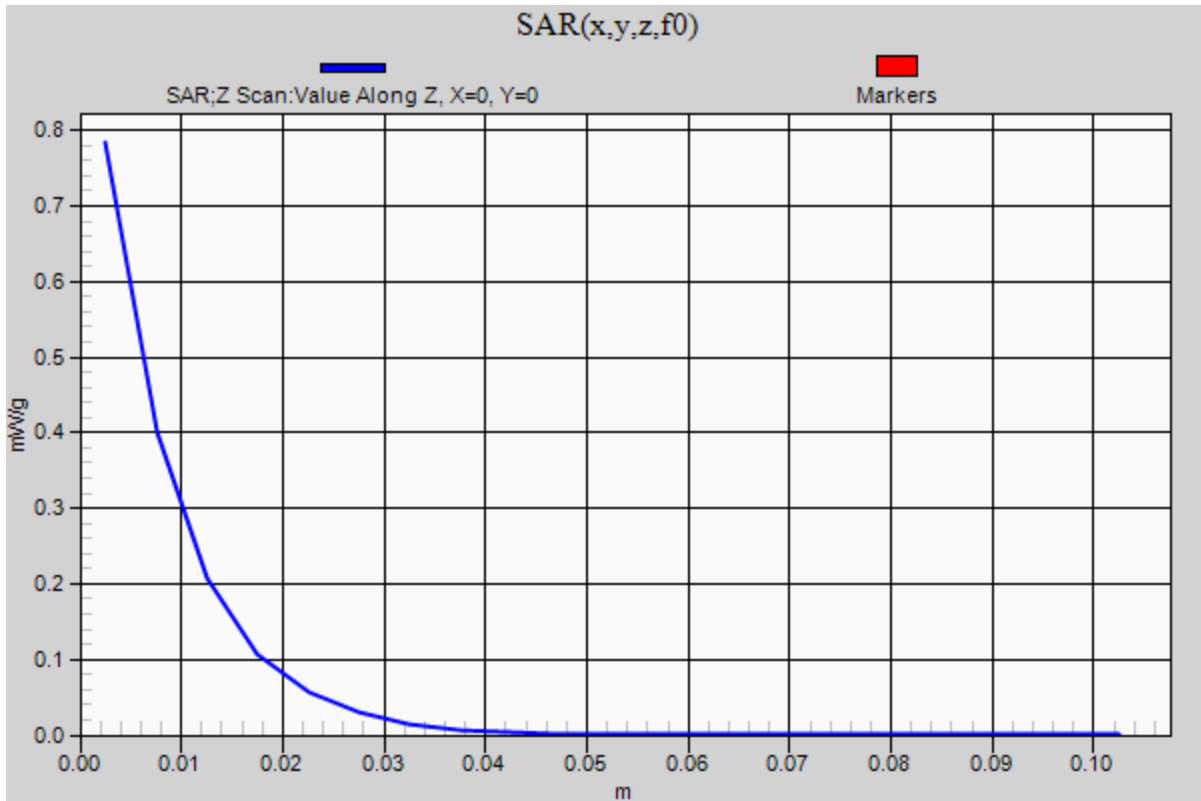

TD-CDMA 2.6GHz Band_Body_Edge 4

Frequency: 2593 MHz; Duty Cycle: 1:3.0; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used (interpolated): $f = 2593$ MHz; $\sigma = 2.216$ mho/m; $\epsilon_r = 51.895$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1239; Calibrated: 10/18/2011
- Probe: EX3DV4 - SN3751; ConvF(6.4, 6.4, 6.4); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (A); Type: QDOVA001BB; Serial: 1117

16QAM_BW-5MHz_Mid-Ch/Area Scan (9x11x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.136 mW/g

16QAM_BW-5MHz_Mid-Ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 22.682 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 2.1070

SAR(1 g) = 1.04 mW/g; SAR(10 g) = 0.496 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.450 mW/g

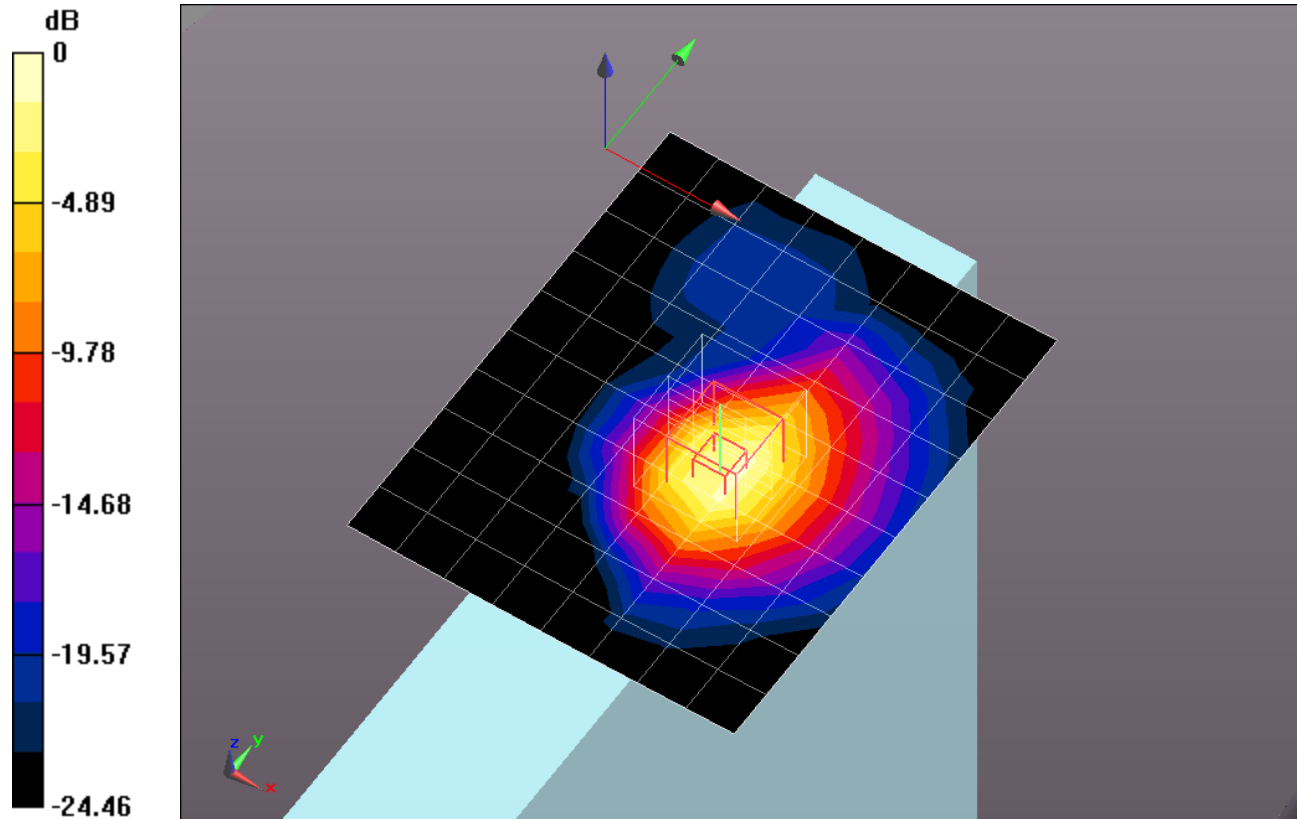

0 dB = 1.450mW/g = 3.23 dB mW/g


TD-CDMA 2.6GHz Band_Body_Edge 4

Frequency: 2593 MHz; Duty Cycle: 1:3.0

16QAM_BW-5MHz_Mid-Ch/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.136 mW/g

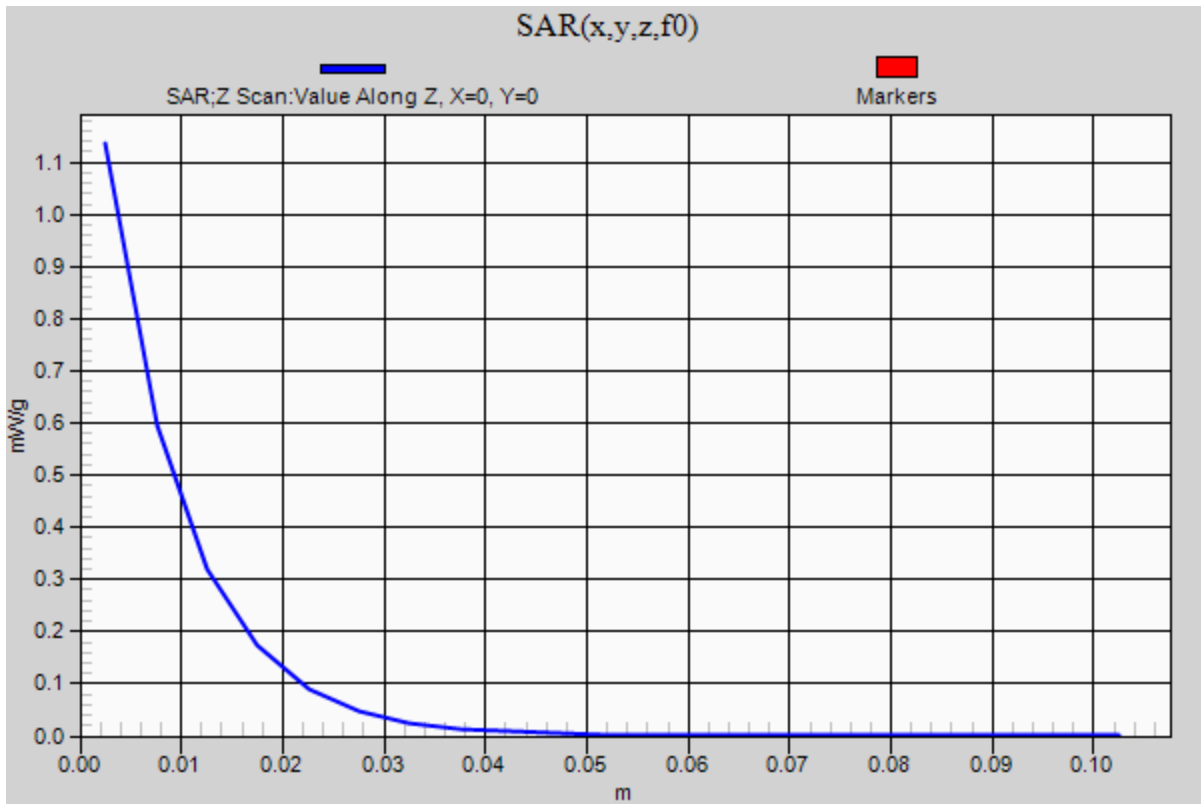

TD-CDMA 2.6GHz Band_Body_Edge 4

Frequency: 2593 MHz; Duty Cycle: 1:3.0; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used (interpolated): $f = 2593$ MHz; $\sigma = 2.216$ mho/m; $\epsilon_r = 51.895$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1239; Calibrated: 10/18/2011
- Probe: EX3DV4 - SN3751; ConvF(6.4, 6.4, 6.4); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (A); Type: QDOVA001BB; Serial: 1117

64QAM_BW-5MHz_Mid-Ch/Area Scan (9x11x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.225 mW/g

64QAM_BW-5MHz_Mid-Ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 23.554 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 2.1020

SAR(1 g) = 1.05 mW/g; SAR(10 g) = 0.497 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.451 mW/g

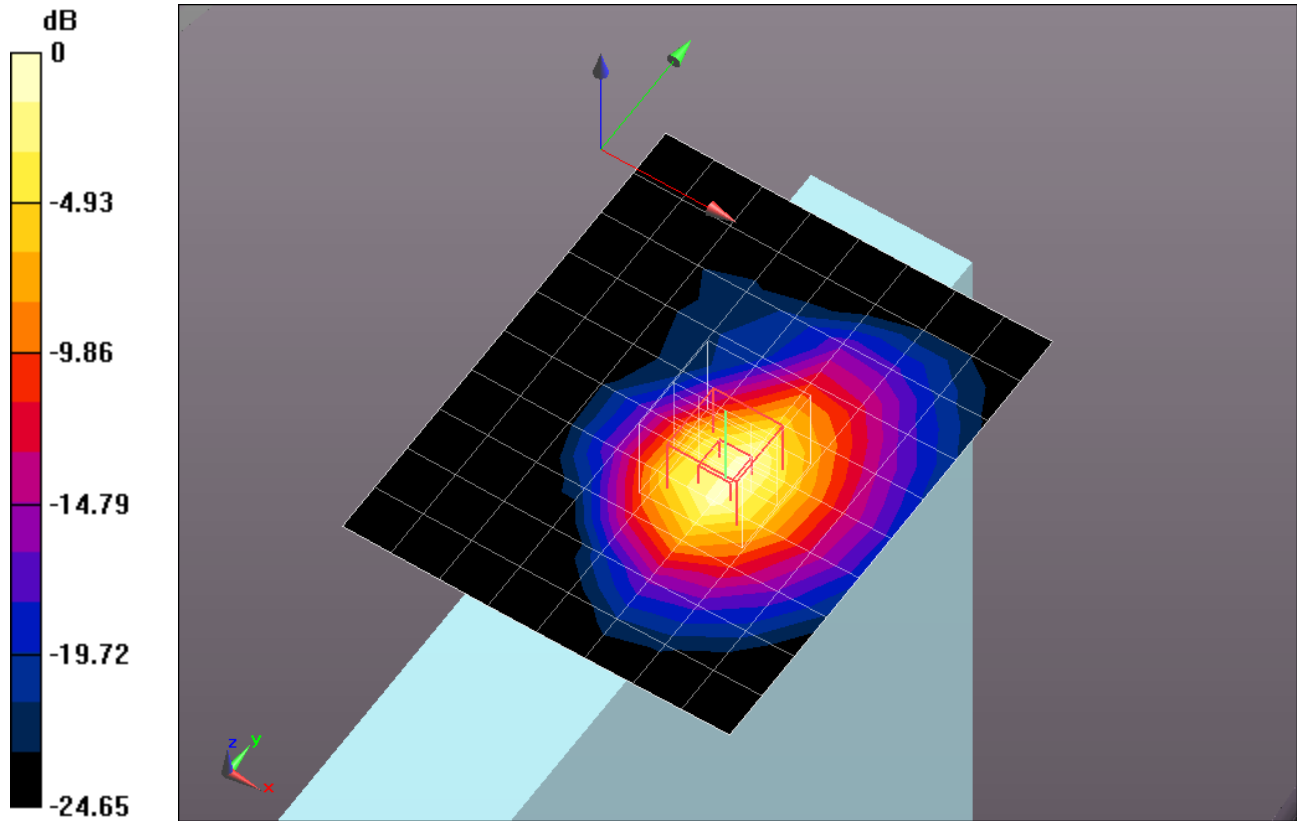

0 dB = 1.450mW/g = 3.23 dB mW/g


TD-CDMA 2.6GHz Band_Body_Edge 4

Frequency: 2593 MHz; Duty Cycle: 1:3.0

64QAM_BW-5MHz_Mid-Ch/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.225 mW/g

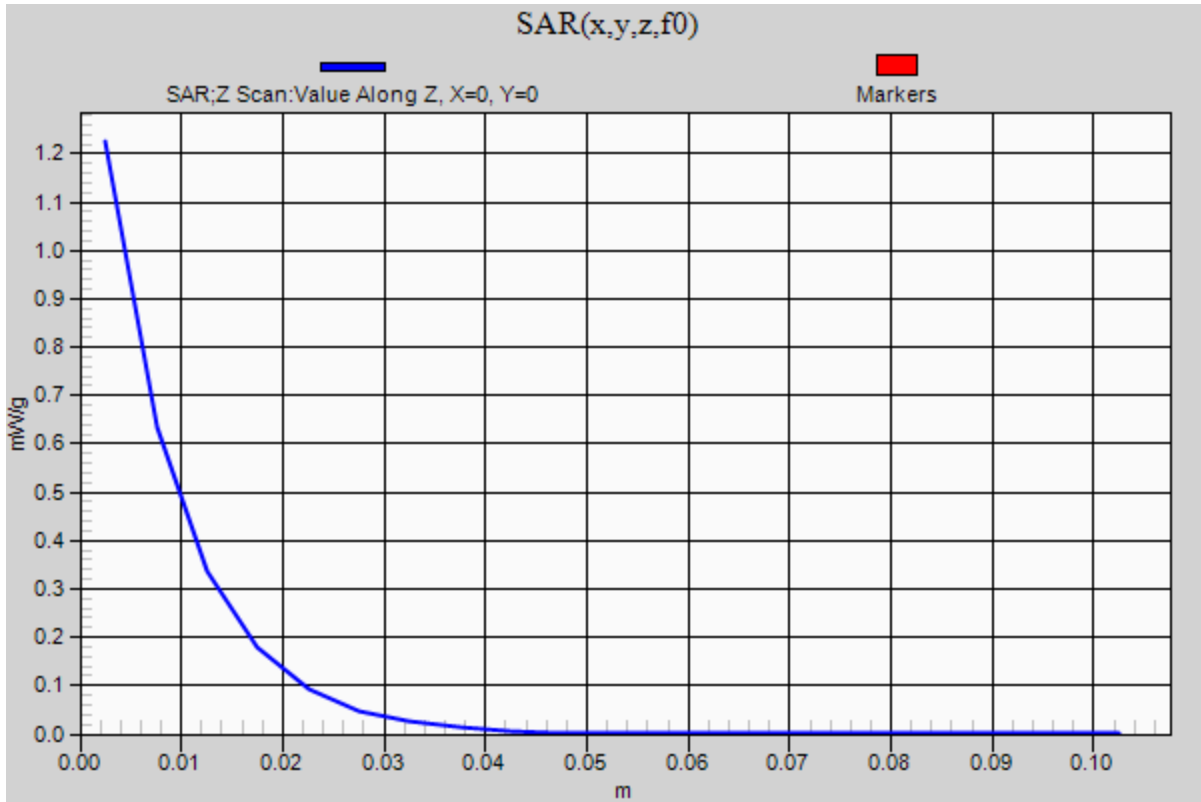

TD-CDMA 2.6GHz Band_Body_Edge 1

Frequency: 2593 MHz; Duty Cycle: 1:3.0; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used (interpolated): $f = 2593$ MHz; $\sigma = 2.206$ mho/m; $\epsilon_r = 51.131$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1239; Calibrated: 10/18/2011
- Probe: EX3DV4 - SN3751; ConvF(6.4, 6.4, 6.4); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (A); Type: QDOVA001BB; Serial: 1117

QPSK_BW-10MHz_Mid-Ch/Area Scan (13x15x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.040 mW/g

QPSK_BW-10MHz_Mid-Ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 4.231 V/m; Power Drift = 0.0098 dB

Peak SAR (extrapolated) = 0.0740

SAR(1 g) = 0.034 mW/g; SAR(10 g) = 0.017 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.048 mW/g

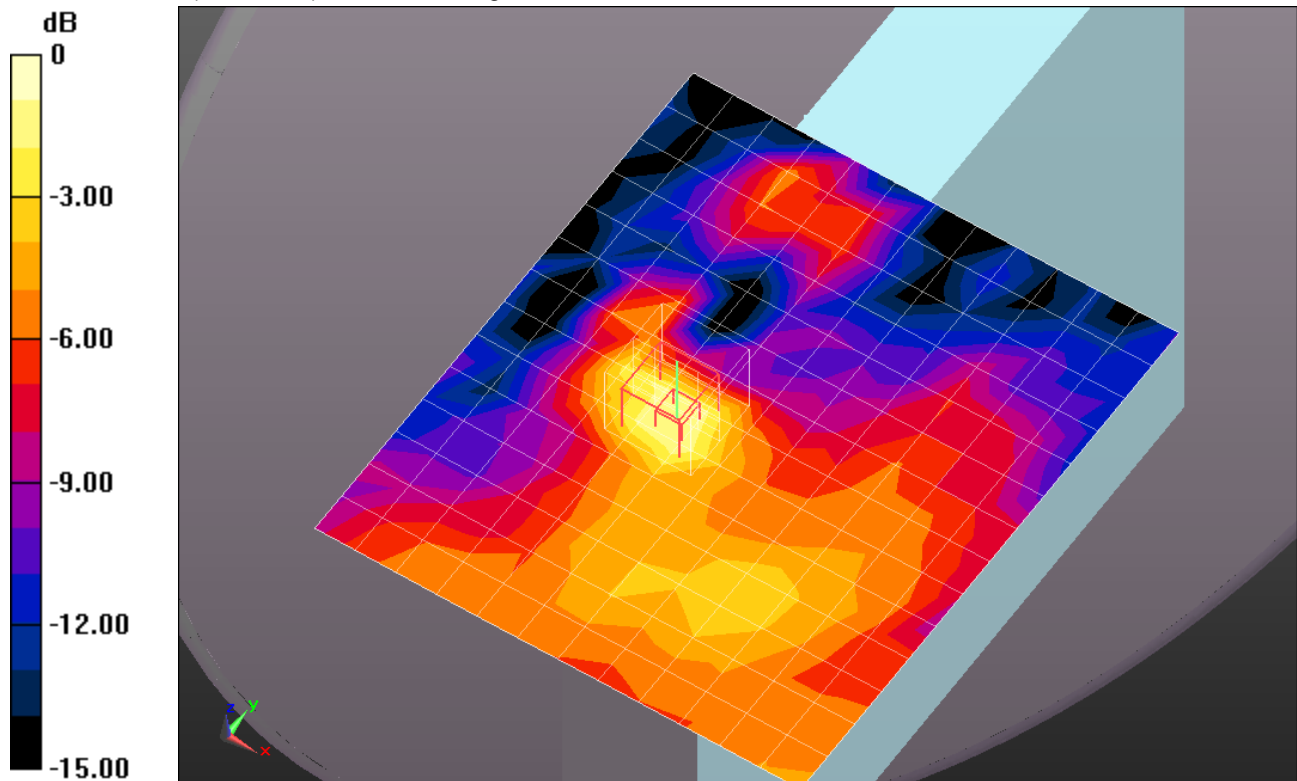

0 dB = 0.050mW/g = -26.02 dB mW/g


TD-CDMA 2.6GHz Band_Body_Edge 1

Frequency: 2593 MHz; Duty Cycle: 1:3.0

QPSK_BW-10MHz_Mid-Ch/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.040 mW/g

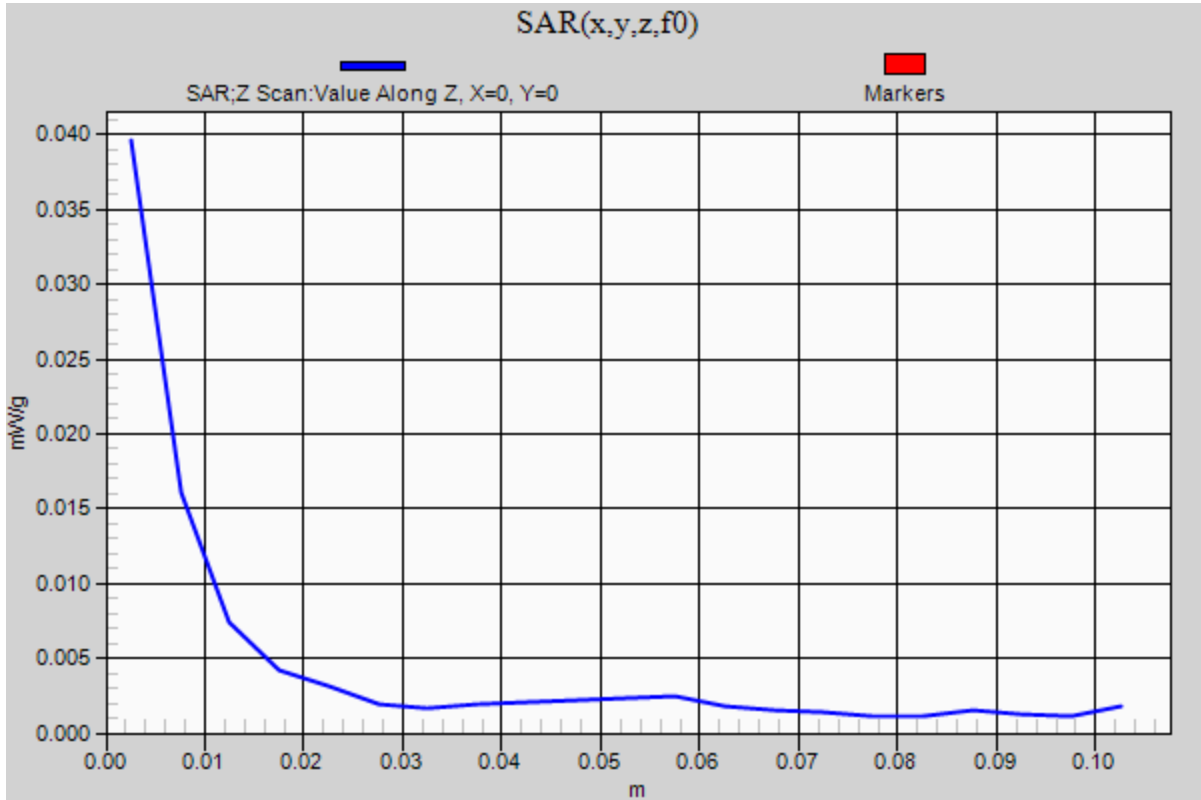

TD-CDMA 2.6GHz Band_Body_Edge 1

Frequency: 2593 MHz; Duty Cycle: 1:3.0; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used (interpolated): $f = 2593$ MHz; $\sigma = 2.206$ mho/m; $\epsilon_r = 51.131$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1239; Calibrated: 10/18/2011
- Probe: EX3DV4 - SN3751; ConvF(6.4, 6.4, 6.4); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (A); Type: QDOVA001BB; Serial: 1117

QPSK_BW-5MHz_Mid-Ch/Area Scan (13x15x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.035 mW/g

QPSK_BW-5MHz_Mid-Ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 3.795 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.1330

SAR(1 g) = 0.027 mW/g; SAR(10 g) = 0.012 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.034 mW/g

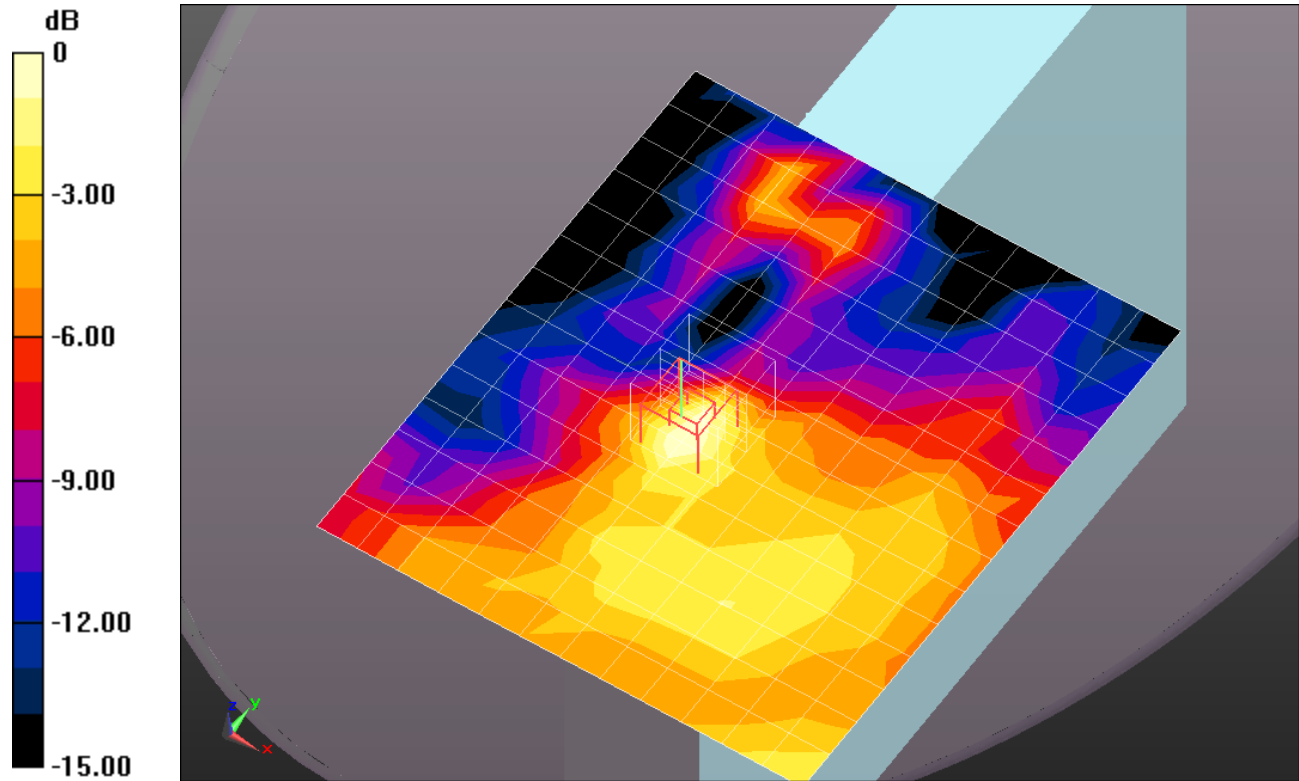

0 dB = 0.030mW/g = -30.46 dB mW/g

TD-CDMA 2.6GHz Band_Body_Bottom-Base

Frequency: 2593 MHz; Duty Cycle: 1:3.0; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used (interpolated): $f = 2593$ MHz; $\sigma = 2.201$ mho/m; $\epsilon_r = 52.023$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1239; Calibrated: 10/18/2011
- Probe: EX3DV4 - SN3751; ConvF(6.4, 6.4, 6.4); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (A); Type: QDOVA001BB; Serial: 1117

QPSK_BW-10MHz_Mid-Ch/Area Scan (13x16x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.025 mW/g

QPSK_BW-10MHz_Mid-Ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm,

dz=5mm


Reference Value = 3.186 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.0370

SAR(1 g) = 0.021 mW/g; SAR(10 g) = 0.010 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.028 mW/g

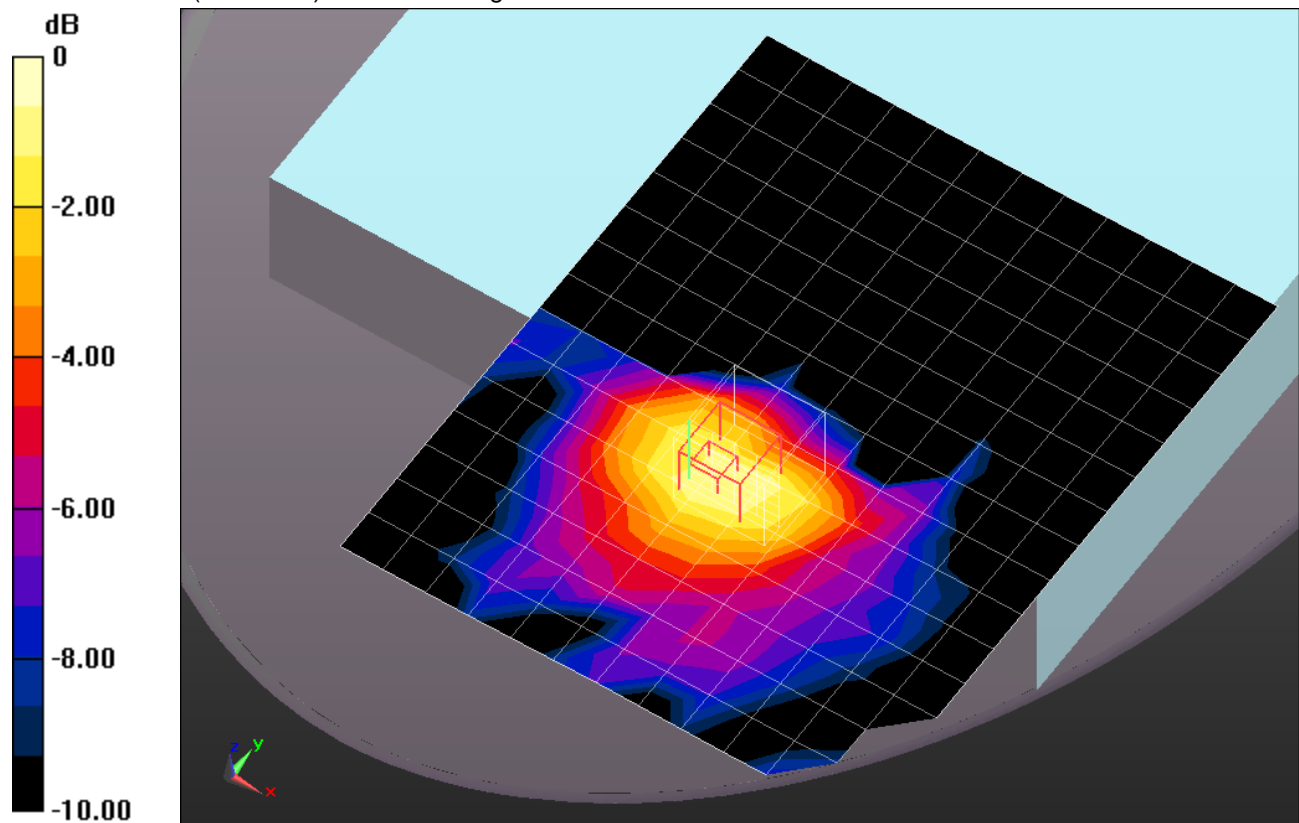

0 dB = 0.030mW/g = -30.46 dB mW/g

TD-CDMA 2.6GHz Band_Body_Bottom-Base

Frequency: 2593 MHz; Duty Cycle: 1:3.0; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used (interpolated): $f = 2593$ MHz; $\sigma = 2.201$ mho/m; $\epsilon_r = 52.023$; $\rho = 1000$ kg/m³

DASY5 Configuration:


- Electronics: DAE4 Sn1239; Calibrated: 10/18/2011
- Probe: EX3DV4 - SN3751; ConvF(6.4, 6.4, 6.4); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (A); Type: QDOVA001BB; Serial: 1117

QPSK_BW-5MHz_Mid-Ch/Area Scan (13x11x1):

Measurement grid: dx=15mm, dy=15mm
[Info: Interpolated medium parameters used for SAR evaluation.](#)
 Maximum value of SAR (measured) = 0.022 mW/g

QPSK_BW-5MHz_Mid-Ch/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 3.195 V/m; Power Drift = -0.07 dB
 Peak SAR (extrapolated) = 0.0430
SAR(1 g) = 0.014 mW/g; SAR(10 g) = 0.0052 mW/g
[Info: Interpolated medium parameters used for SAR evaluation.](#)
 Maximum value of SAR (measured) = 0.023 mW/g

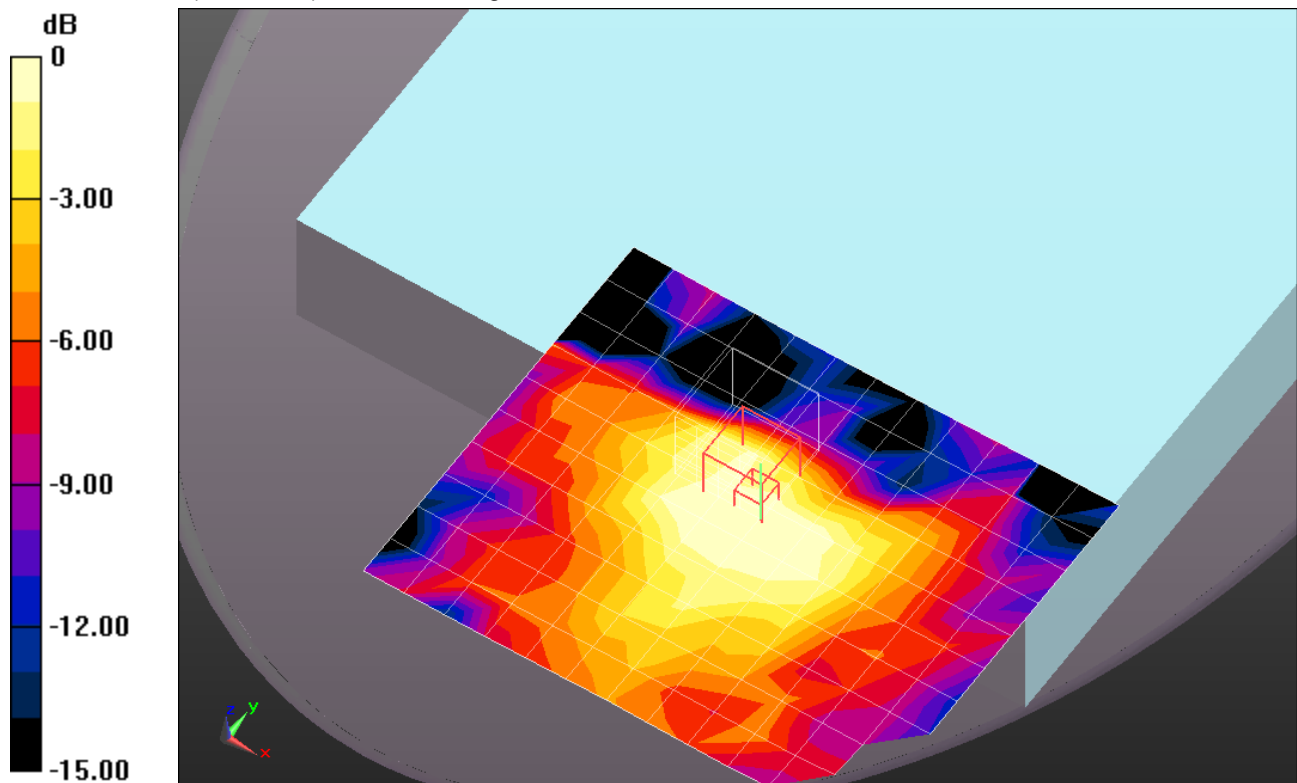

0 dB = 0.020mW/g = -33.98 dB mW/g

TD-CDMA 2.6GHz Band_Body_Lapheld

Frequency: 2593 MHz; Duty Cycle: 1:3.0; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used (interpolated): $f = 2593$ MHz; $\sigma = 2.201$ mho/m; $\epsilon_r = 52.023$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1239; Calibrated: 10/18/2011
- Probe: EX3DV4 - SN3751; ConvF(6.4, 6.4, 6.4); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (A); Type: QDOVA001BB; Serial: 1117

QPSK_BW-10MHz_Mid-Ch/Area Scan (13x25x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.00794 mW/g

QPSK_BW-10MHz_Mid-Ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm,

dz=5mm


Reference Value = 1.660 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.0130

SAR(1 g) = 0.00609 mW/g; SAR(10 g) = 0.00353 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0087 mW/g

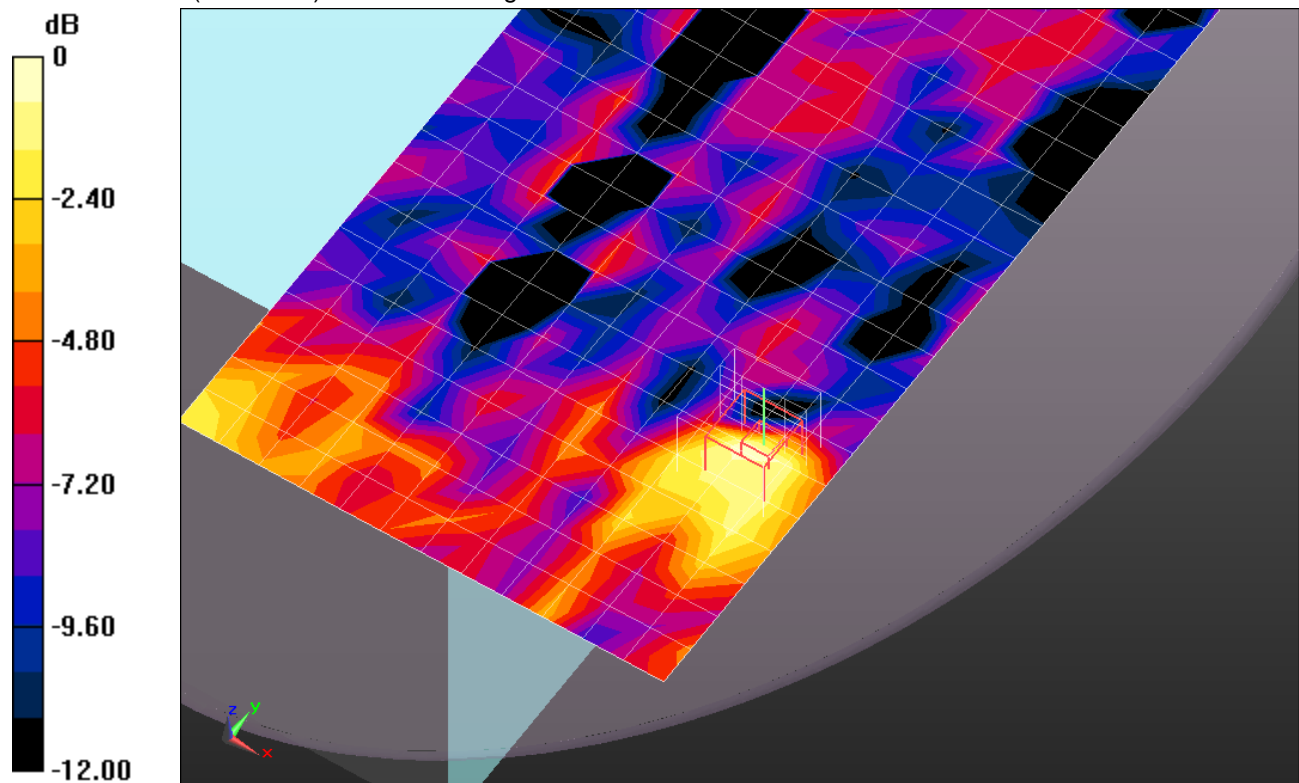

0 dB = 0.0087mW/g = -41.21 dB mW/g

TD-CDMA 2.6GHz Band_Body_Lapheld

Frequency: 2593 MHz; Duty Cycle: 1:3.0; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used (interpolated): $f = 2593$ MHz; $\sigma = 2.201$ mho/m; $\epsilon_r = 52.023$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1239; Calibrated: 10/18/2011
- Probe: EX3DV4 - SN3751; ConvF(6.4, 6.4, 6.4); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (A); Type: QDOVA001BB; Serial: 1117

QPSK_BW-5MHz_Mid-Ch/Area Scan (13x25x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.00919 mW/g

QPSK_BW-5MHz_Mid-Ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 1.665 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.0140

SAR(1 g) = 0.00613 mW/g; SAR(10 g) = 0.00309 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.00843 mW/g

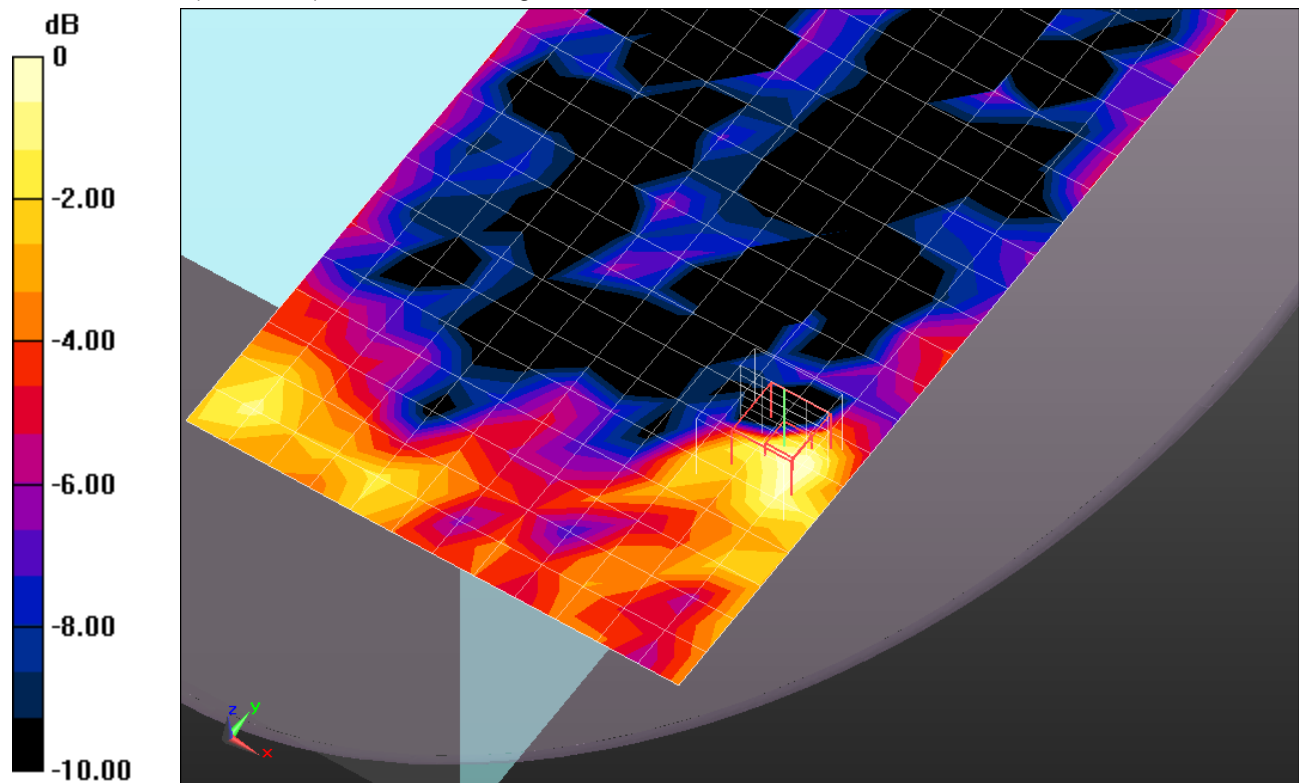

0 dB = 0.0084mW/g = -41.51 dB mW/g