

**GSM850**

Frequency: 848.8 MHz; Duty Cycle: 1:4.00037; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C  
 Medium parameters used (interpolated):  $f = 848.8$  MHz;  $\sigma = 1.017$  S/m;  $\epsilon_r = 53.025$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1359; Calibrated: 08.02.2013
- Probe: EX3DV4 - SN3902; ConvF(9.96, 9.96, 9.96); Calibrated: 27.02.2013;
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1196

**Edge 1/GPRS 1 slots\_ch 251 / PRM 1/Area Scan (11x14x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.973 W/kg

**Edge 1/GPRS 1 slots\_ch 251 / PRM 1/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 31.041 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 1.68 W/kg

**SAR(1 g) = 0.984 W/kg; SAR(10 g) = 0.555 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.29 W/kg

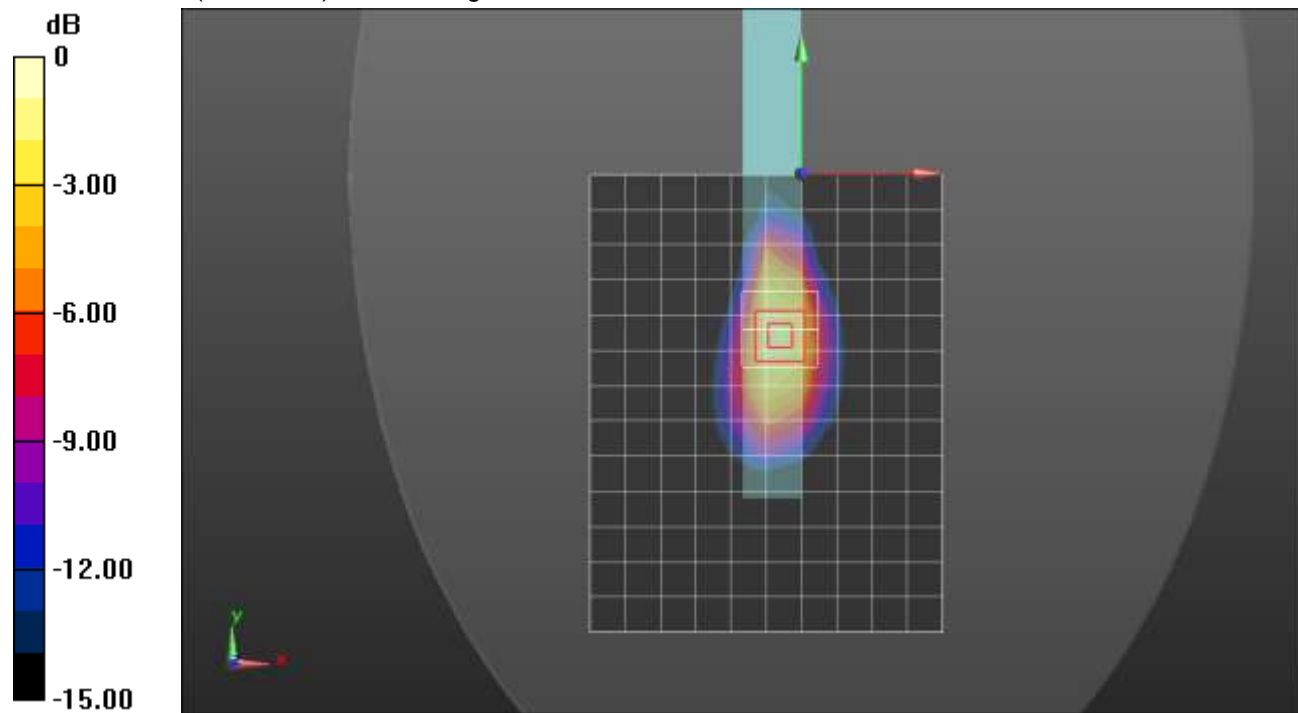

0 dB = 1.29 W/kg = 1.11 dBW/kg

## GSM 1900

Frequency: 1909.8 MHz; Duty Cycle: 1:4.00037; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C  
 Medium parameters used:  $f = 1910 \text{ MHz}$ ;  $\sigma = 1.524 \text{ S/m}$ ;  $\epsilon_r = 50.936$ ;  $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1359; Calibrated: 2/8/2013
- Probe: EX3DV4 - SN3902; ConvF(7.85, 7.85, 7.85); Calibrated: 2/27/2013;
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1198

**Edge 1/GPRS 2 Slots, Ch 810/ PRM 1/Area Scan (11x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.10 W/kg


**Edge 1/GPRS 2 Slots, Ch 810/ PRM 1/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.404 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.66 W/kg

**SAR(1 g) = 0.948 W/kg; SAR(10 g) = 0.473 W/kg**

Maximum value of SAR (measured) = 1.28 W/kg

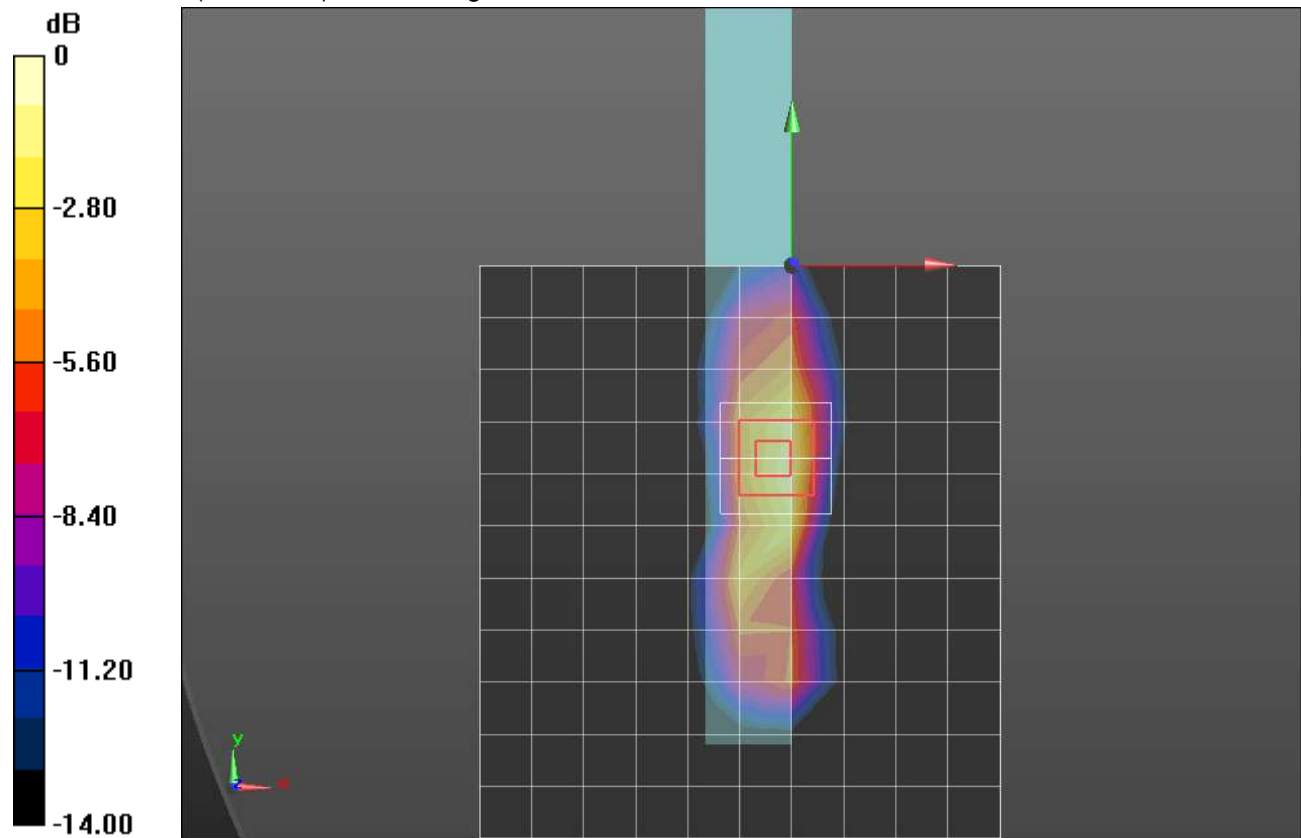

0 dB = 1.28 W/kg = 1.07 dBW/kg

## W-CDMA Band V

Frequency: 836.6 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C  
Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.987$  S/m;  $\epsilon_r = 53.259$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1359; Calibrated: 08.02.2013
- Probe: EX3DV4 - SN3902; ConvF(9.96, 9.96, 9.96); Calibrated: 27.02.2013;
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELLI v4.0; Type: QDOVA001BB; Serial: TP:1196

**Edge 1/W-CDMA Band V\_ch 4183/ PRM 1/Area Scan (11x14x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.382 W/kg

**Edge 1/W-CDMA Band V\_ch 4183/ PRM 1/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:

dx=8mm, dy=8mm, dz=5mm


Reference Value = 19.983 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.811 W/kg

**SAR(1 g) = 0.430 W/kg; SAR(10 g) = 0.234 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.599 W/kg

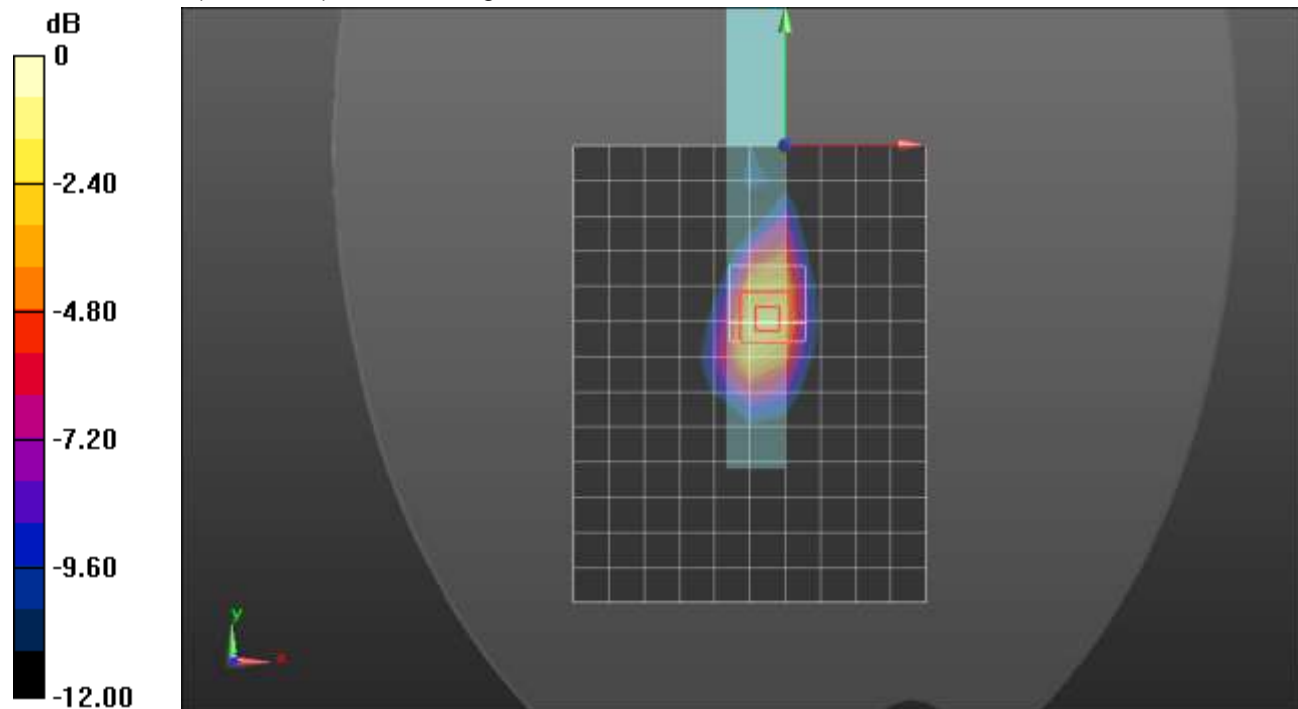

## W-CDMA Band IV

Frequency: 1732.6 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C  
 Medium parameters used (interpolated):  $f = 1732.6$  MHz;  $\sigma = 1.45$  S/m;  $\epsilon_r = 53.109$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1359; Calibrated: 08.02.2013
- Probe: EX3DV4 - SN3773; ConvF(7.29, 7.29, 7.29); Calibrated: 26.04.2013;
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1198

**Edge 1/Rel. 99 RMC, Ch 1413/ PRM 1/Area Scan (11x14x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.19 W/kg

**Edge 1/Rel. 99 RMC, Ch 1413/ PRM 1/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 32.900 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 2.05 W/kg

**SAR(1 g) = 1.06 W/kg; SAR(10 g) = 0.515 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.50 W/kg

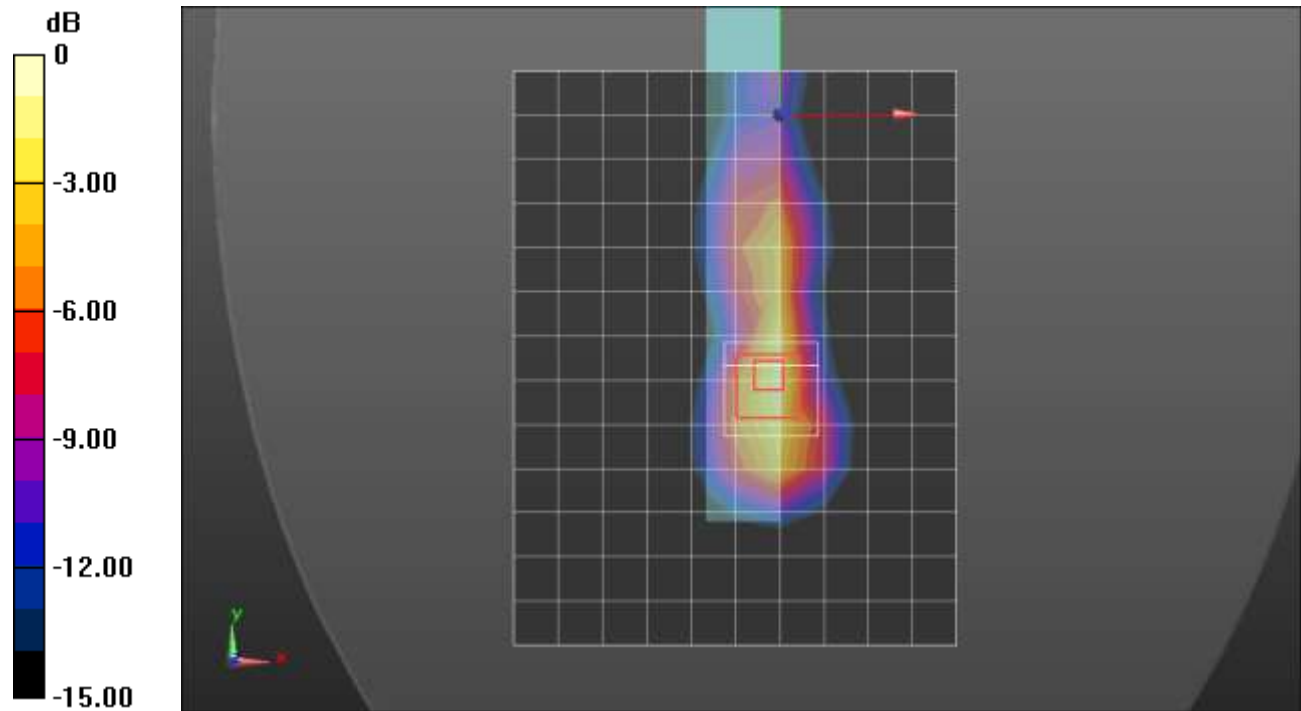

0 dB = 1.50 W/kg = 1.76 dBW/kg

## W-CDMA Band II

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.495$  S/m;  $\epsilon_r = 51.056$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1359; Calibrated: 2/8/2013
- Probe: EX3DV4 - SN3902; ConvF(7.85, 7.85, 7.85); Calibrated: 2/27/2013;
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1198

**Edge 1/Rel. 99 RMC, Ch 9400/ PRM 1/Area Scan (11x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.791 W/kg


**Edge 1/Rel. 99 RMC, Ch 9400/ PRM 1/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.573 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.05 W/kg

**SAR(1 g) = 0.601 W/kg; SAR(10 g) = 0.300 W/kg**

Maximum value of SAR (measured) = 0.808 W/kg

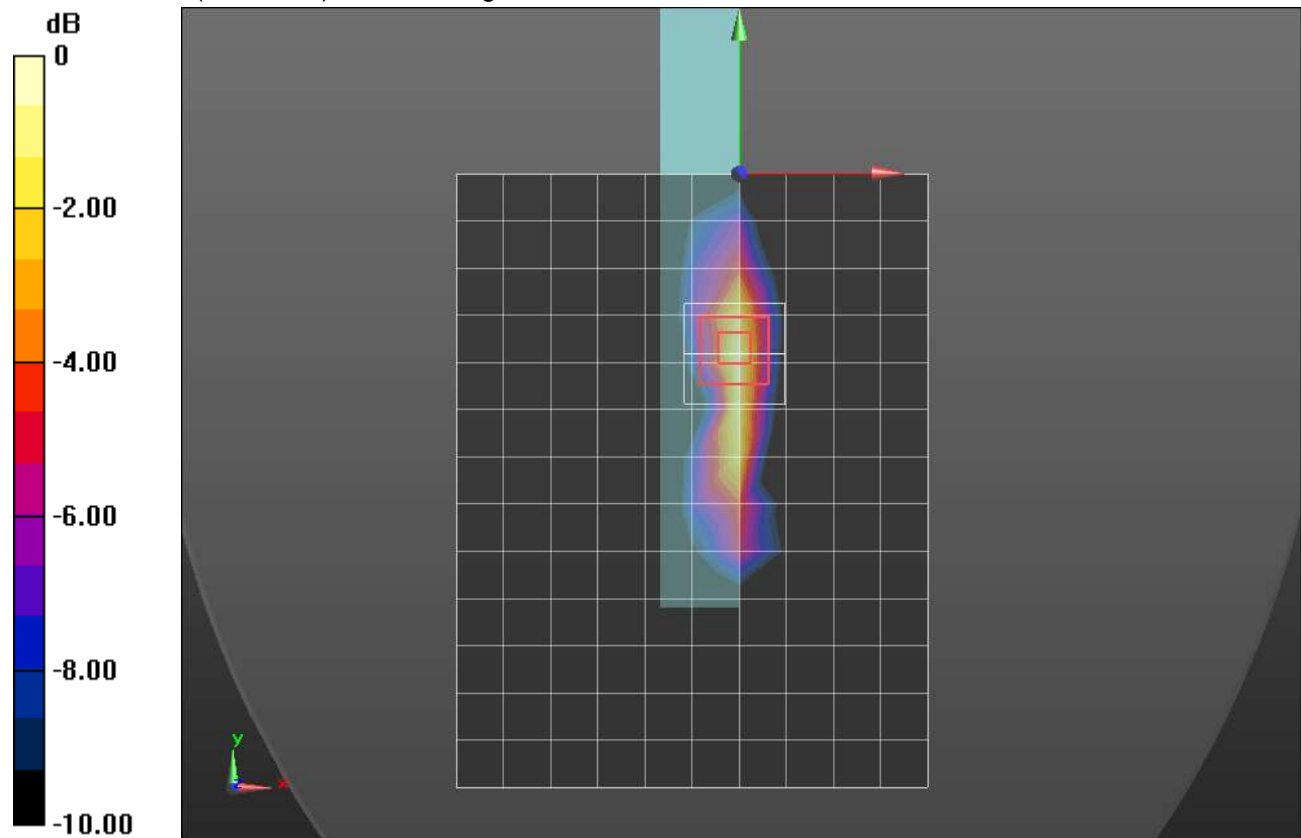

0 dB = 0.808 W/kg = -0.93 dBW/kg

## CDMA BC0

Frequency: 836.52 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C  
 Medium parameters used (interpolated):  $f = 836.52$  MHz;  $\sigma = 0.987$  S/m;  $\epsilon_r = 53.26$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1359; Calibrated: 08.02.2013
- Probe: EX3DV4 - SN3902; ConvF(9.96, 9.96, 9.96); Calibrated: 27.02.2013;
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1196

**Edge 1/1xEVDO Rel. 0/ CH 384/ PRM 1/Area Scan (11x14x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.372 W/kg

**Edge 1/1xEVDO Rel. 0/ CH 384/ PRM 1/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 18.729 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.661 W/kg

**SAR(1 g) = 0.347 W/kg; SAR(10 g) = 0.184 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.442 W/kg

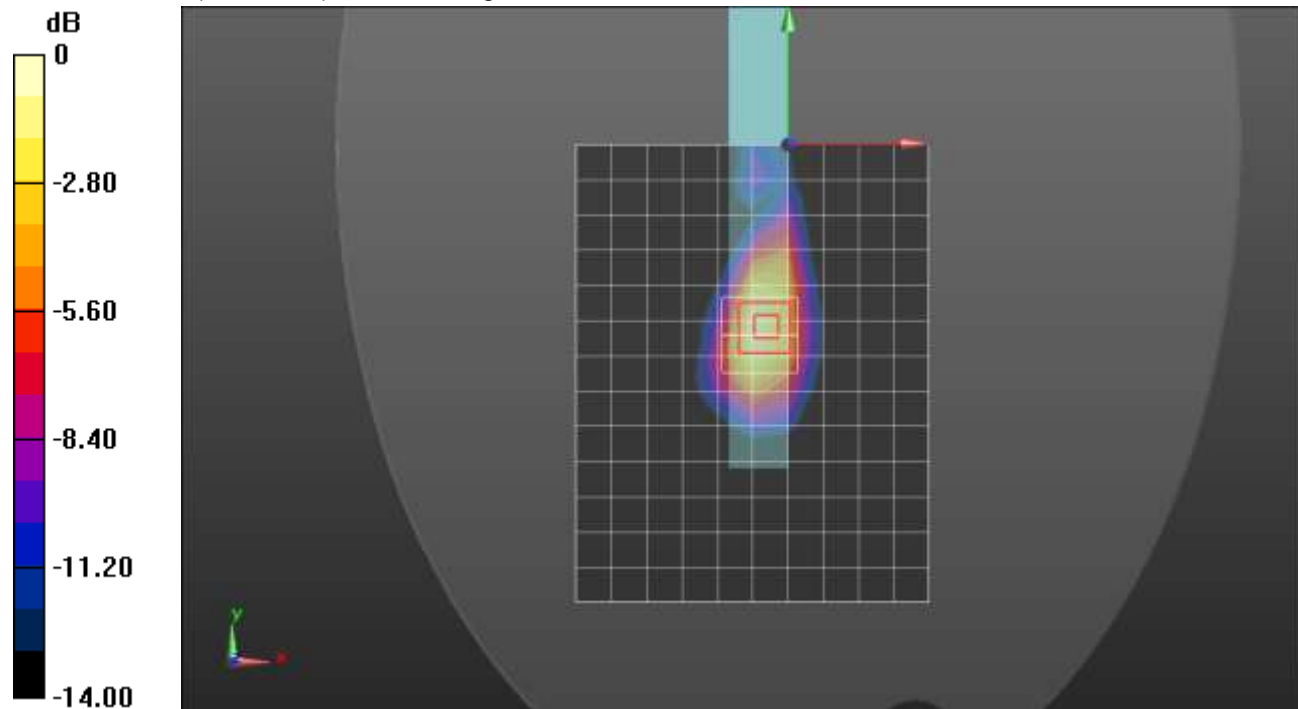

0 dB = 0.442 W/kg = -3.55 dBW/kg

## CDMA BC1

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.512$  S/m;  $\epsilon_r = 54.016$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1359; Calibrated: 08.02.2013
- Probe: EX3DV4 - SN3902; ConvF(7.85, 7.85, 7.85); Calibrated: 27.02.2013;
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1198

**Edge 1/1xEVDO ch600/ PRM 1/Area Scan (11x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.972 W/kg


**Edge 1/1xEVDO ch600/ PRM 1/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.164 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.81 W/kg

**SAR(1 g) = 1.04 W/kg; SAR(10 g) = 0.519 W/kg**

Maximum value of SAR (measured) = 1.41 W/kg

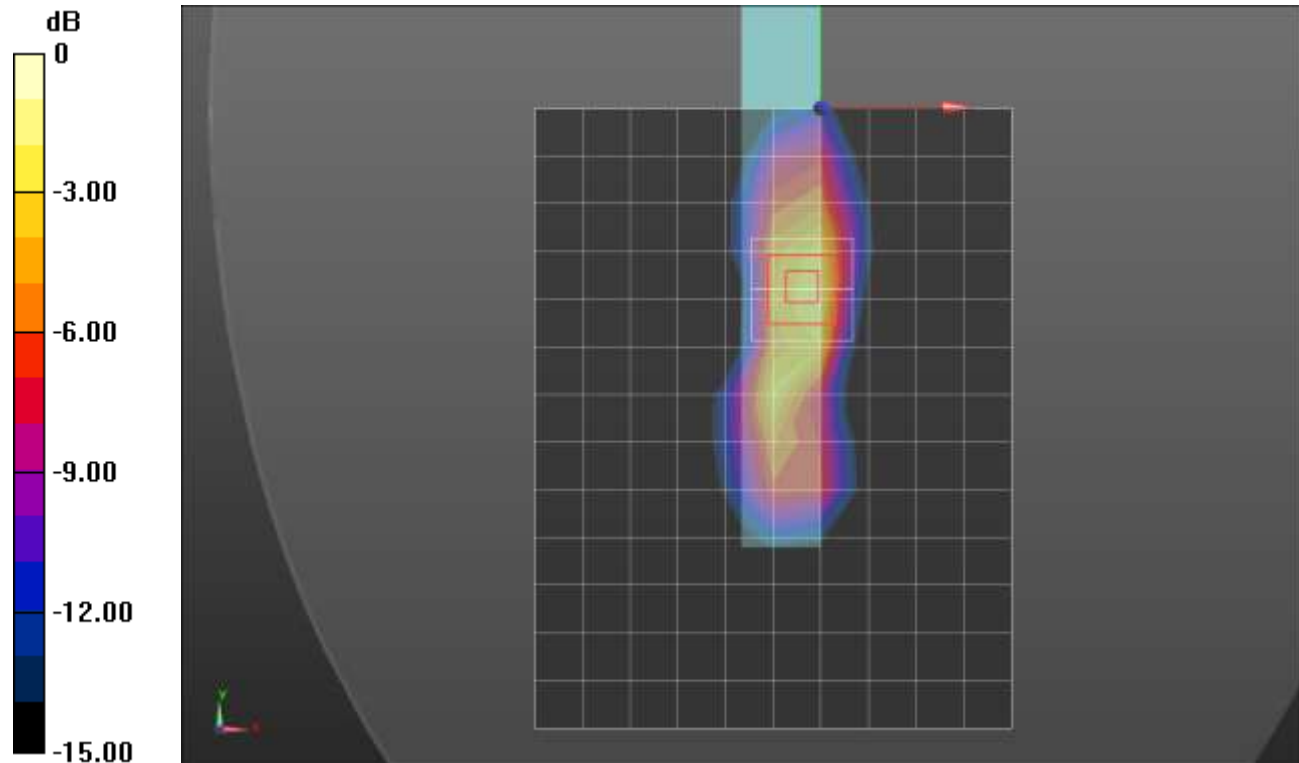

0 dB = 1.41 W/kg = 1.49 dBW/kg

## CDMA BC10

Frequency: 820.5 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C  
 Medium parameters used (interpolated):  $f = 820.5$  MHz;  $\sigma = 0.989$  S/m;  $\epsilon_r = 53.328$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1359; Calibrated: 2/8/2013
- Probe: EX3DV4 - SN3902; ConvF(9.96, 9.96, 9.96); Calibrated: 2/27/2013;
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1196

**Edge 1/1xEVDO Rel. 0/Ch 580/ PRM 1/Area Scan (11x14x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.271 W/kg

**Edge 1/1xEVDO Rel. 0/Ch 580/ PRM 1/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 17.003 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.583 W/kg

**SAR(1 g) = 0.315 W/kg; SAR(10 g) = 0.167 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.445 W/kg

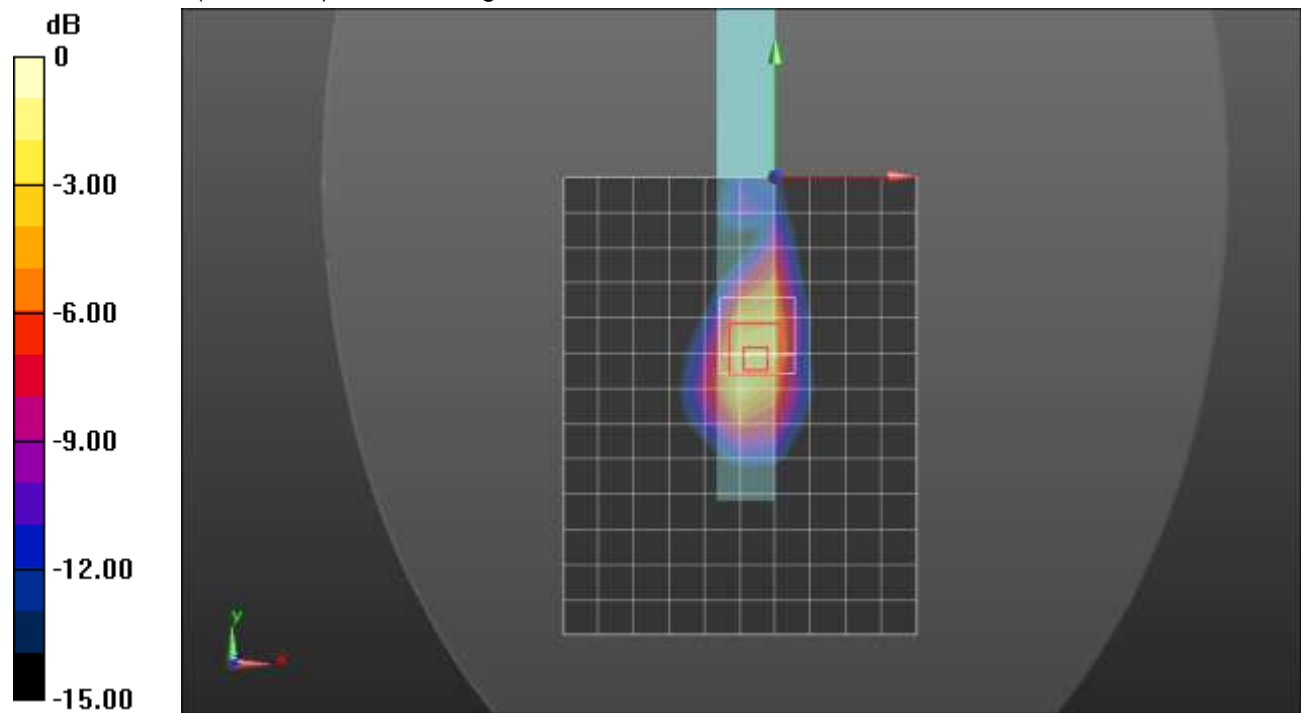

0 dB = 0.445 W/kg = -3.52 dBW/kg

## LTE Band 2

Frequency: 1900 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.515$  S/m;  $\epsilon_r = 50.983$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1359; Calibrated: 08.02.2013
- Probe: EX3DV4 - SN3902; ConvF(7.85, 7.85, 7.85); Calibrated: 27.02.2013;
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1198

**Edge 1/QPSK ch 19100 RB 1/ 99/ PRM 1/Area Scan (11x14x1):** Measurement grid: dx=15mm,

dy=15mm

Maximum value of SAR (measured) = 0.857 W/kg

**Edge 1/QPSK ch 19100 RB 1/ 99/ PRM 1/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm,


dy=8mm, dz=5mm

Reference Value = 23.916 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.90 W/kg

**SAR(1 g) = 1.09 W/kg; SAR(10 g) = 0.543 W/kg**

Maximum value of SAR (measured) = 1.46 W/kg

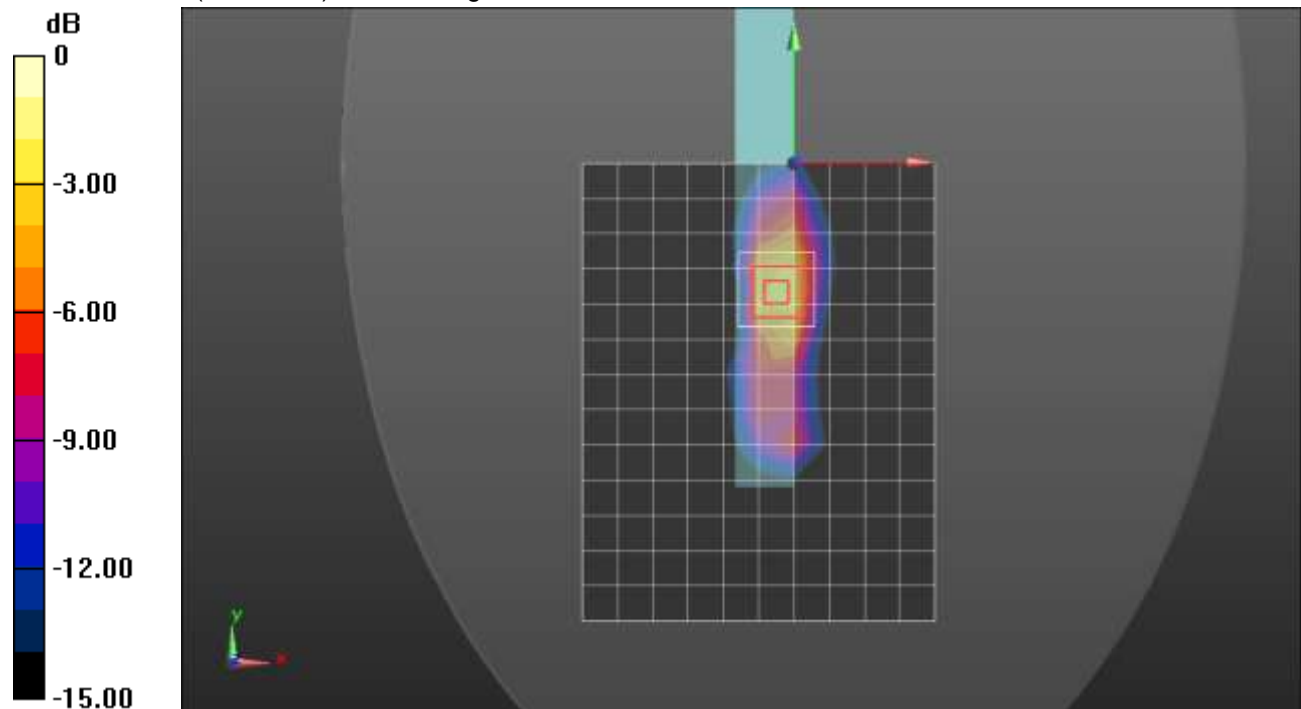

0 dB = 1.46 W/kg = 1.64 dBW/kg

## LTE Band 4

Frequency: 1720 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used:  $f = 1720$  MHz;  $\sigma = 1.472$  S/m;  $\epsilon_r = 52.716$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1359; Calibrated: 2/8/2013
- Probe: EX3DV4 - SN3902; ConvF(8.07, 8.07, 8.07); Calibrated: 2/27/2013;
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1196

**Edge 1/QPSK ch 20300 RB 50/ 24/ PRM 1/Area Scan (11x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.25 W/kg

**Edge 1/QPSK ch 20300 RB 50/ 24/ PRM 1/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.099 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.45 W/kg

**SAR(1 g) = 0.872 W/kg; SAR(10 g) = 0.450 W/kg**

Maximum value of SAR (measured) = 1.14 W/kg

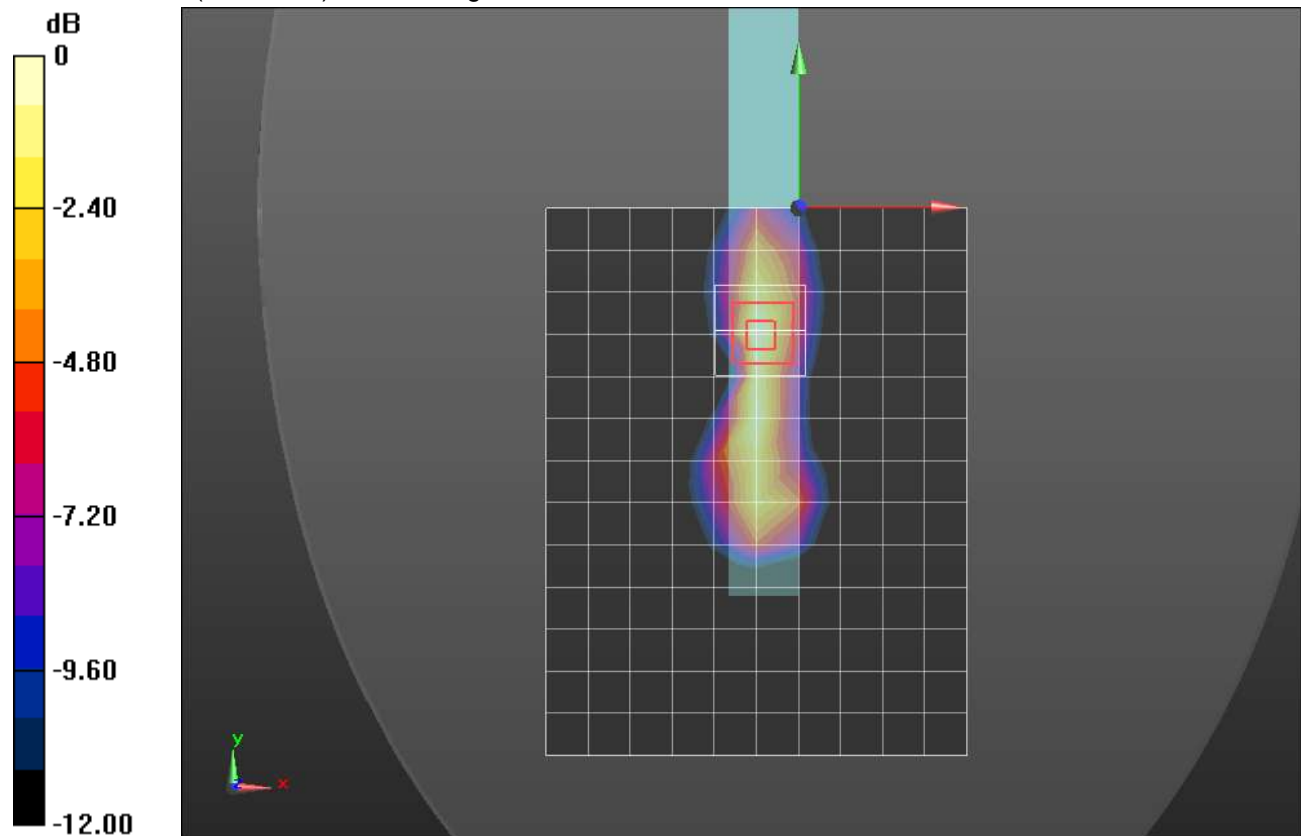

0 dB = 1.14 W/kg = 0.57 dBW/kg

## LTE Band 5

Frequency: 844 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C  
 Medium parameters used (interpolated):  $f = 844$  MHz;  $\sigma = 1.029$  S/m;  $\epsilon_r = 53.244$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1359; Calibrated: 08.02.2013
- Probe: EX3DV4 - SN3773; ConvF(8.78, 8.78, 8.78); Calibrated: 26.04.2013;
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1198

**Edge 1/QPSK ch 20600 RB 50/0 PRM 1/Area Scan (11x14x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.11 W/kg

**Edge 1/QPSK ch 20600 RB 50/0 PRM 1/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 33.661 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.78 W/kg

**SAR(1 g) = 1.05 W/kg; SAR(10 g) = 0.589 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.37 W/kg

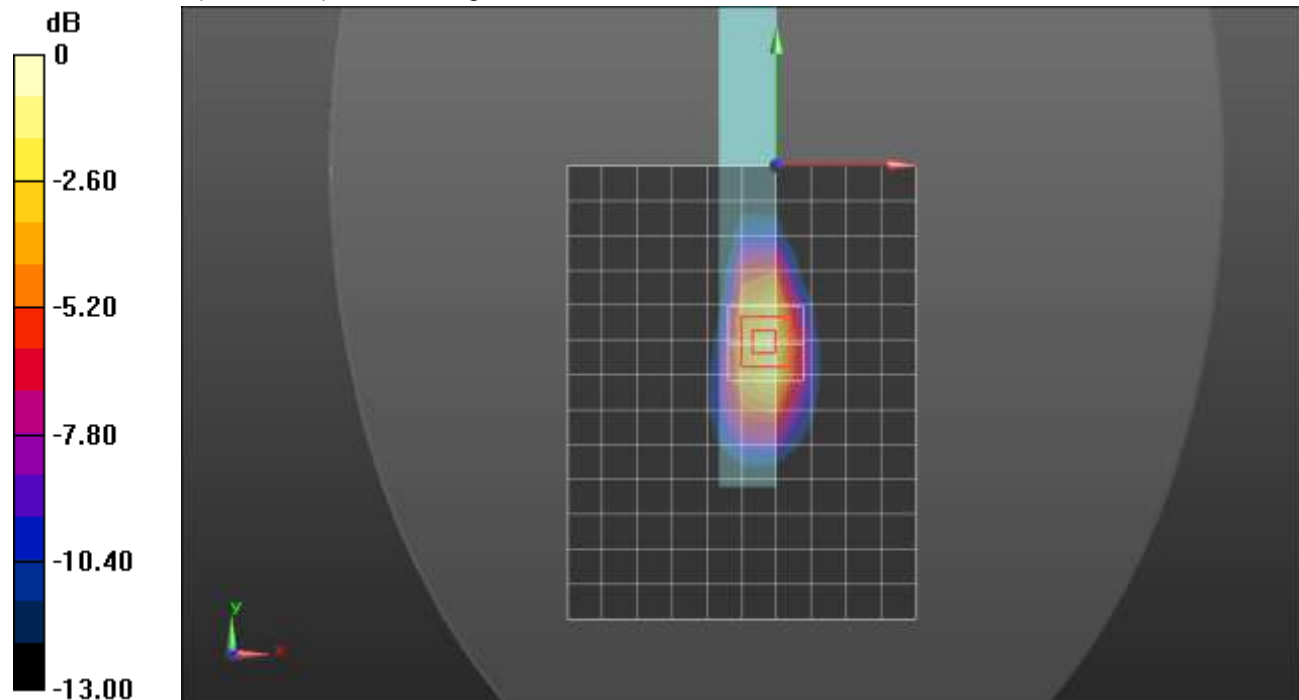

0 dB = 1.37 W/kg = 1.37 dBW/kg

## LTE Band 13

Frequency: 782 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used (interpolated):  $f = 782$  MHz;  $\sigma = 1.018$  S/m;  $\epsilon_r = 54.327$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1359; Calibrated: 08.02.2013
- Probe: EX3DV4 - SN3902; ConvF(10.11, 10.11, 10.11); Calibrated: 27.02.2013;
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx

**Edge 1 PRM1/QPSK ch 23230 RB 1/ 0/ PRM 1/Area Scan (11x14x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.592 W/kg

**Edge 1 PRM1/QPSK ch 23230 RB 1/ 0/ PRM 1/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:

dx=8mm, dy=8mm, dz=5mm


Reference Value = 24.367 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.823 W/kg

**SAR(1 g) = 0.452 W/kg; SAR(10 g) = 0.248 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.606 W/kg

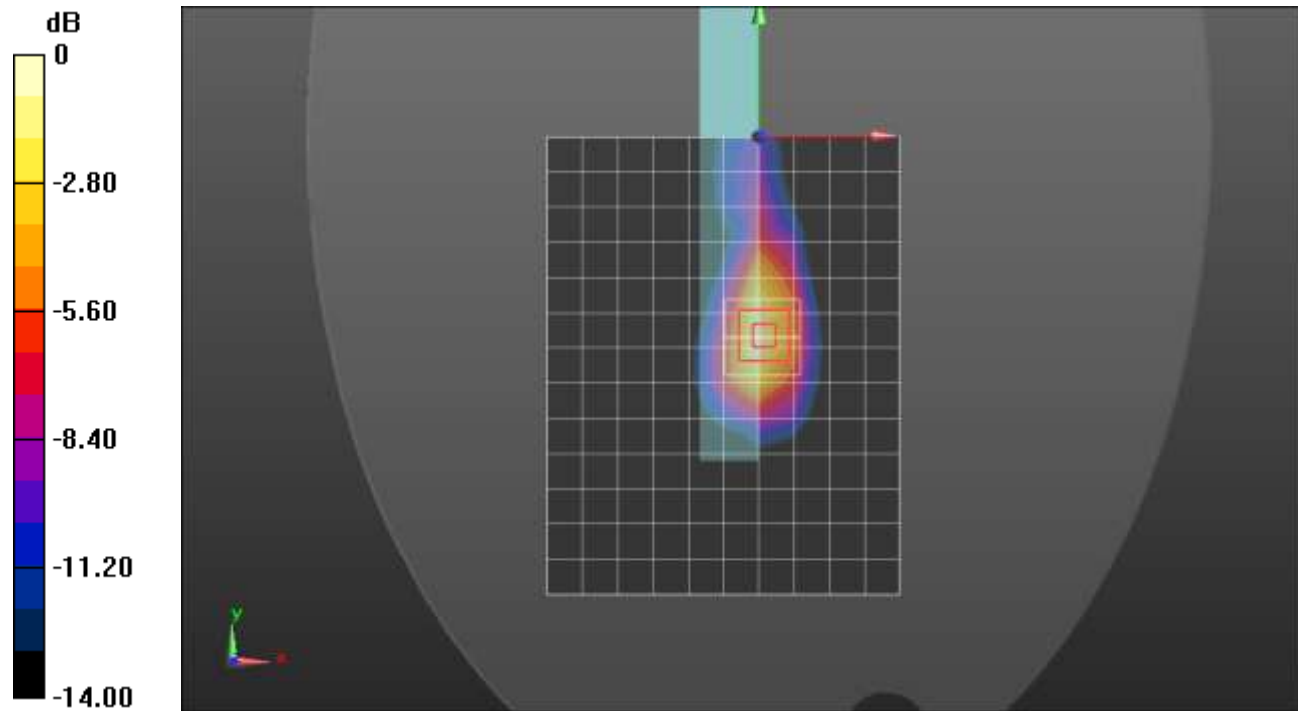

0 dB = 0.606 W/kg = -2.18 dBW/kg

## LTE Band 17

Frequency: 709 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 709$  MHz;  $\sigma = 0.947$  S/m;  $\epsilon_r = 55.126$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1359; Calibrated: 08.02.2013
- Probe: EX3DV4 - SN3902; ConvF(10.11, 10.11, 10.11); Calibrated: 27.02.2013;
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1198

**Edge 1/QPSK ch 23780 RB 1/24/ PRM 1/Area Scan (11x14x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.749 W/kg

**Edge 1/QPSK ch 23780 RB 1/24/ PRM 1/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 27.701 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.999 W/kg

**SAR(1 g) = 0.537 W/kg; SAR(10 g) = 0.293 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.735 W/kg

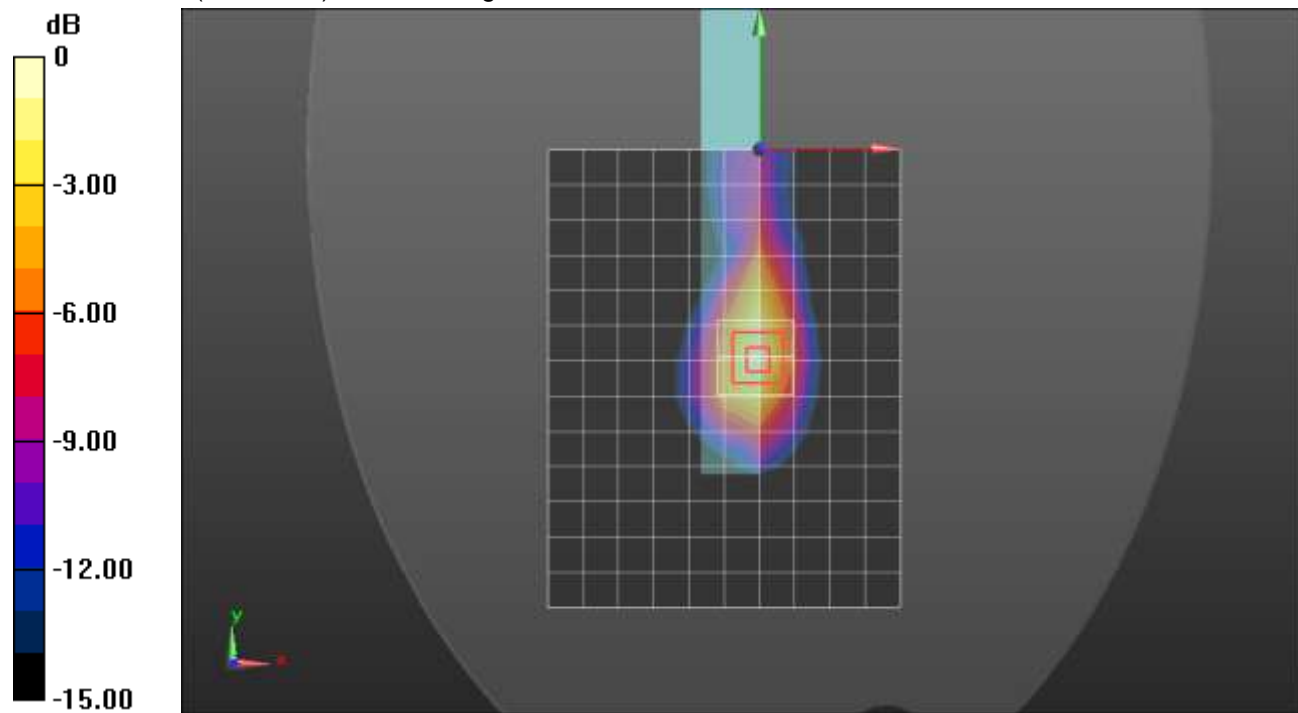

0 dB = 0.735 W/kg = -1.34 dBW/kg

## LTE Band 25

Frequency: 1882.5 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated):  $f = 1882.5 \text{ MHz}$ ;  $\sigma = 1.497 \text{ S/m}$ ;  $\epsilon_r = 51.049$ ;  $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1359; Calibrated: 2/8/2013
- Probe: EX3DV4 - SN3902; ConvF(7.85, 7.85, 7.85); Calibrated: 2/27/2013;
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1198

**Edge 1/QPSK ch 26365 RB 100/ 00/ PRM 1/Area Scan (11x14x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.901 W/kg

**Edge 1/QPSK ch 26365 RB 100/ 00/ PRM 1/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:

dx=8mm, dy=8mm, dz=5mm


Reference Value = 22.166 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.44 W/kg

**SAR(1 g) = 0.859 W/kg; SAR(10 g) = 0.431 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.12 W/kg

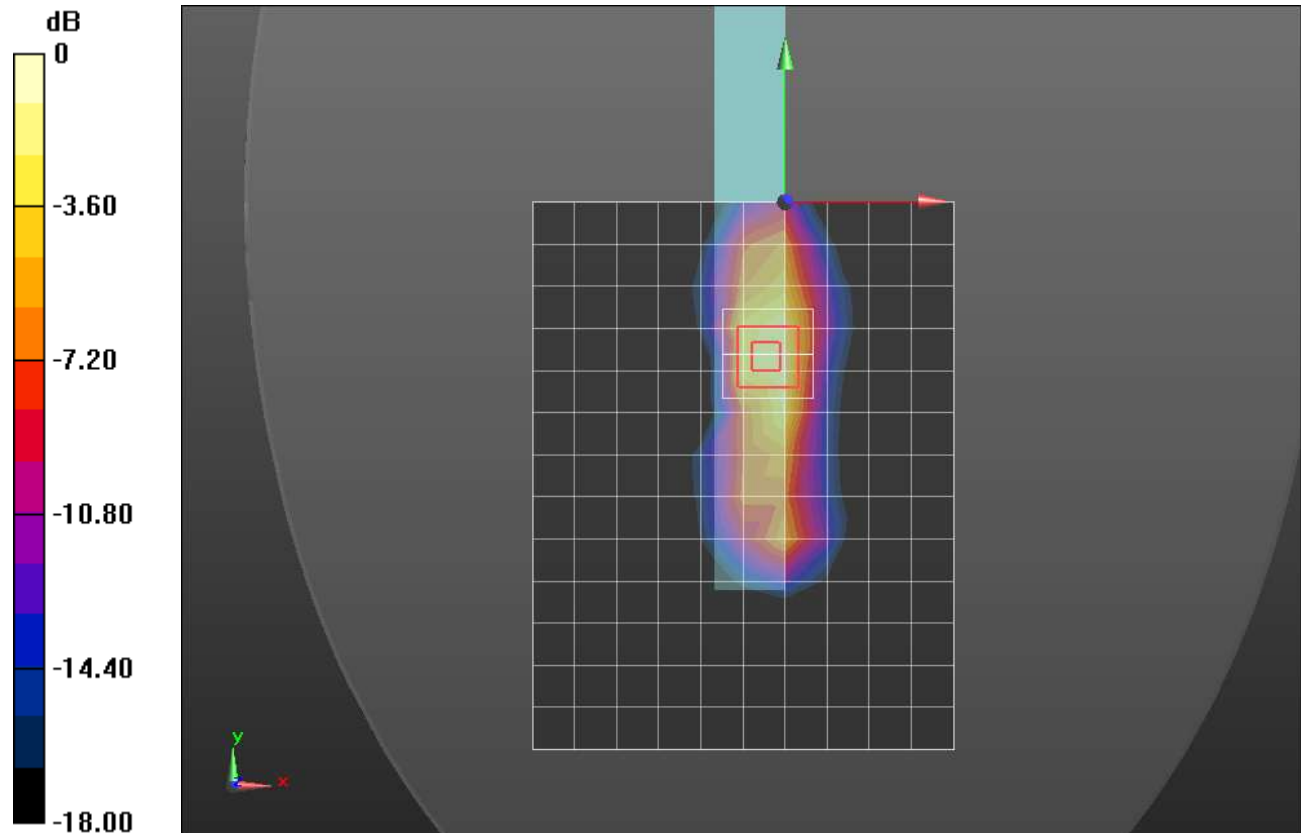

0 dB = 1.12 W/kg = 0.49 dBW/kg