



MEASUREMENT REPORT FCC Part 22, 24, & 27 LTE

Applicant Name:
 Panasonic Corporation of North America
 Two Riverfront Plaza, 9th Floor
 Newark, NJ 07102-5490
 United States

Date of Testing:
 12/10/2014 - 1/7/2015, 3/18/2015
Test Site/Location:
 PCTEST Lab., Columbia, MD, USA
Test Report Serial No.:
 0Y1412152302.ACJ

FCC ID :	ACJ9TGWW13B
APPLICANT:	PANASONIC CORPORATION OF NORTH AMERICA

Application Type: Class II Permissive Change
FCC Classification: PCS Licensed Transmitter (PCB)
FCC Rule Part(s): §2; §22; §24; §27
Test Procedure(s): ANSI/TIA-603-C-2004, KDB 971168 v02r02
EUT Type: Wireless Network Adapter
Model(s): FZ-R1
Test Device Serial No.: *identical prototype* [S/N: WWAN Model 5]
Class II Permissive Change: Please see FCC change document
Original Grant Date: 08/4/2014

Mode	Tx Frequency (MHz)	Emission Designator	Modulation	ERP/EIRP	
				Max. Power (W)	Max. Power (dBm)
LTE Band 17	706.5 - 713.5	N/A	QPSK	0.024	13.80
LTE Band 17	706.5 - 713.5	N/A	16QAM	0.019	12.90
LTE Band 17	709 - 711	N/A	QPSK	0.029	14.55
LTE Band 17	709 - 711	N/A	16QAM	0.022	13.47
LTE Band 13	779.5 - 784.5	N/A	QPSK	0.051	17.04
LTE Band 13	779.5 - 784.5	N/A	16QAM	0.039	15.86
LTE Band 13	782	N/A	QPSK	0.038	15.80
LTE Band 13	782	N/A	16QAM	0.031	14.96
LTE Band 5	824.7 - 848.3	1M11G7D	QPSK	0.049	16.91
LTE Band 5	824.7 - 848.3	1M12W7D	16QAM	0.032	15.06
LTE Band 5	825.5 - 847.5	2M72G7D	QPSK	0.050	17.00
LTE Band 5	825.5 - 847.5	2M71W7D	16QAM	0.042	16.20
LTE Band 5	826.5 - 846.5	N/A	QPSK	0.057	17.53
LTE Band 5	826.5 - 846.5	N/A	16QAM	0.045	16.57
LTE Band 5	829 - 844	N/A	QPSK	0.064	18.07
LTE Band 5	829 - 844	N/A	16QAM	0.051	17.08
LTE Band 4	1710.7 - 1754.3	1M12G7D	QPSK	0.161	22.07
LTE Band 4	1710.7 - 1754.3	1M13W7D	16QAM	0.131	21.19
LTE Band 4	1711.5 - 1753.5	2M72G7D	QPSK	0.184	22.65
LTE Band 4	1711.5 - 1753.5	2M71W7D	16QAM	0.146	21.63
LTE Band 4	1712.5 - 1752.5	N/A	QPSK	0.182	22.60
LTE Band 4	1712.5 - 1752.5	N/A	16QAM	0.138	21.41
LTE Band 4	1715 - 1750	N/A	QPSK	0.168	22.26
LTE Band 4	1715 - 1750	N/A	16QAM	0.132	21.19
LTE Band 4	1717.5 - 1747.5	N/A	QPSK	0.185	22.68
LTE Band 4	1717.5 - 1747.5	N/A	16QAM	0.148	21.70
LTE Band 4	1720 - 1745	N/A	QPSK	0.181	22.57
LTE Band 4	1720 - 1745	N/A	16QAM	0.137	21.36
LTE Band 2/25	1850.7 - 1914.3	1M12G7D	QPSK	0.205	23.13
LTE Band 2/25	1850.7 - 1914.3	1M12W7D	16QAM	0.175	22.42
LTE Band 2/25	1851.5 - 1913.5	2M72G7D	QPSK	0.176	22.46
LTE Band 2/25	1851.5 - 1913.5	2M72W7D	16QAM	0.141	21.48
LTE Band 2/25	1852.5 - 1912.5	N/A	QPSK	0.170	22.31
LTE Band 2/25	1852.5 - 1912.5	N/A	16QAM	0.130	21.15
LTE Band 2/25	1855 - 1910	N/A	QPSK	0.222	23.47
LTE Band 2/25	1855 - 1910	N/A	16QAM	0.179	22.54
LTE Band 2/25	1857.5 - 1907.5	N/A	QPSK	0.223	23.49
LTE Band 2/25	1857.5 - 1907.5	N/A	16QAM	0.173	22.39
LTE Band 2/25	1860 - 1905	N/A	QPSK	0.221	23.44
LTE Band 2/25	1860 - 1905	N/A	16QAM	0.177	22.49

Note: The emission designators shown as 'N/A' in the table above are the same as those shown in the original Grant of Authorization

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Randy Ortanez
 President




FCC ID: ACJ9TGWW13B		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1412152302.ACJ	Test Dates: 12/10/2014 - 1/7/2015, 3/18/2015	EUT Type: Wireless Network Adapter	Page 1 of 52	

T A B L E O F C O N T E N T S


FCC PART 22, 24, & 27 MEASUREMENT REPORT		3
1.0 INTRODUCTION		4
1.1 SCOPE		4
1.2 TESTING FACILITY		4
2.0 PRODUCT INFORMATION		5
2.1 EQUIPMENT DESCRIPTION		5
2.2 DEVICE CAPABILITIES		5
2.3 TEST CONFIGURATION		5
2.4 EMI SUPPRESSION DEVICE(S)/MODIFICATIONS		5
3.0 DESCRIPTION OF TESTS		6
3.1 MEASUREMENT PROCEDURE		6
3.1 BLOCK C FREQUENCY RANGE		6
3.2 BLOCK A FREQUENCY RANGE		6
3.3 CELLULAR - BASE FREQUENCY BLOCKS		6
3.4 CELLULAR - MOBILE FREQUENCY BLOCKS		7
3.5 PCS - BASE FREQUENCY BLOCKS		7
3.6 PCS - MOBILE FREQUENCY BLOCKS		7
3.7 AWS - BASE FREQUENCY BLOCKS		7
3.8 AWS - MOBILE FREQUENCY BLOCKS		8
3.9 RADIATED POWER AND RADIATED SPURIOUS EMISSIONS		9
4.0 TEST EQUIPMENT CALIBRATION DATA		10
5.0 SAMPLE CALCULATIONS		11
6.0 TEST RESULTS		12
6.1 SUMMARY		12
6.2 OCCUPIED BANDWIDTH		13
6.3 BAND EDGE EMISSIONS AT ANTENNA TERMINAL		20
6.4 PEAK-AVERAGE RATIO		33
6.5 RADIATED POWER (ERP/EIRP)		36
6.6 RADIATED SPURIOUS EMISSIONS MEASUREMENTS		42
7.0 CONCLUSION		52

FCC ID: ACJ9TGWW13B		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1412152302.ACJ	Test Dates: 12/10/2014 - 1/7/2015, 3/18/2015	EUT Type: Wireless Network Adapter		Page 2 of 52



MEASUREMENT REPORT

FCC Part 22, 24, & 27




§2.1033 General Information



APPLICANT: Panasonic Corporation of North America
APPLICANT ADDRESS: Two Riverfront Plaza, 9th Floor
 Newark, NJ 07102-5490, United States
TEST SITE: PCTEST ENGINEERING LABORATORY, INC.
TEST SITE ADDRESS: 7185 Oakland Mills Road, Columbia, MD 21045 USA
FCC RULE PART(S): §2; §22; §24; §27
BASE MODEL: FZ-R1
FCC ID: ACJ9TGWW13B
FCC CLASSIFICATION: PCS Licensed Transmitter (PCB)
FREQUENCY TOLERANCE: ±0.00025 % (2.5 ppm)
Test Device Serial No.: WWAN Model 5 Production Pre-Production Engineering
DATE(S) OF TEST: 12/10/2014 - 1/7/2015, 3/18/2015
TEST REPORT S/N: 0Y1412152302.ACJ

Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.



- PCTEST facility is an FCC registered (PCTEST Reg. No. 159966) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (2451B-1).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (2451B-1) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.

FCC ID: ACJ9TGWW13B		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1412152302.ACJ	Test Dates: 12/10/2014 - 1/7/2015, 3/18/2015	EUT Type: Wireless Network Adapter	Page 3 of 52	

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

1.2 Testing Facility

The map below shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity, the Baltimore-Washington Intern't'l (BWI) airport, the city of Baltimore and the Washington, DC area. (See Figure 1-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The site coordinates are 39° 10'23" N latitude and 76° 49'50" W longitude. The facility is 0.4 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2003 on February 15, 2012.

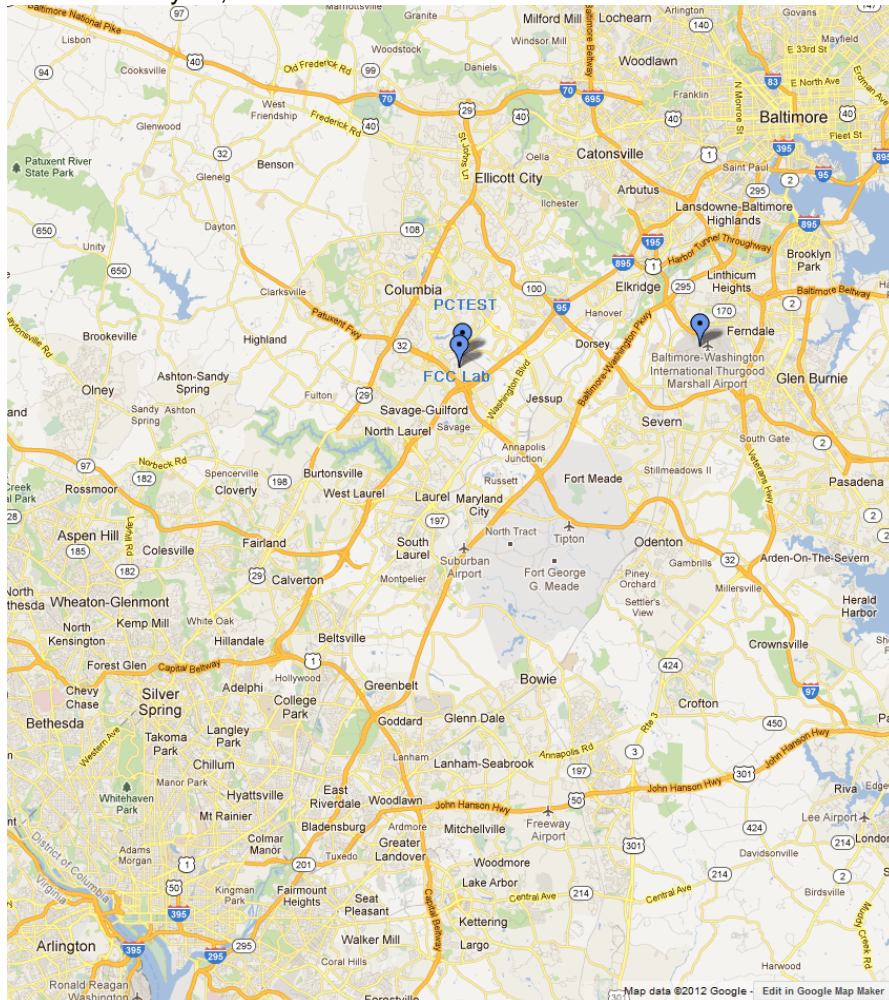




Figure 1-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area

FCC ID: ACJ9TGWW13B		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1412152302.ACJ	Test Dates: 12/10/2014 - 1/7/2015, 3/18/2015	EUT Type: Wireless Network Adapter	Page 4 of 52	

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Panasonic Wireless Network Adapter FCC ID: ACJ9TGWW13B**. The test data contained in this report pertains only to the emissions due to the EUT's LTE function.

2.2 Device Capabilities

This device contains the following capabilities:



850/1900 CDMA/EvDO Rev0/A (BC0, BC1, BC10), 850/1900 GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE

2.3 Test Configuration

The Panasonic Wireless Network Adapter FCC ID: ACJ9TGWW13B was integrated into a portable host tablet (Panasonic Model: FZ-R1) and tested per the guidance of ANSI/TIA-603-C-2004 and KDB 971168 v02r02

2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: ACJ9TGWW13B		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	 Reviewed by: Quality Manager
Test Report S/N: 0Y1412152302.ACJ	Test Dates: 12/10/2014 - 1/7/2015, 3/18/2015	EUT Type: Wireless Network Adapter	Page 5 of 52

3.0 DESCRIPTION OF TESTS

3.1 Measurement Procedure

The measurement procedures described in the document titled “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI/TIA-603-C-2004) and “Procedures for Compliance Measurement of the Fundamental Emission Power of Licensed Wideband (> 1 MHz) Digital Transmission Systems” (KDB 971168) were used in the measurement of the **Panasonic Wireless Network Adapter FCC ID: ACJ9TGWW13B**.

3.1 Block C Frequency Range

§27.5(b)(3)

Two paired channels of 11 megahertz each are available for assignment in Block C in the 746-757 MHz and 776-787 MHz bands. In the event that no licenses for two channels in this Block C are assigned based on the results of the first auction in which such licenses were offered because the auction results do not satisfy the applicable reserve price, the spectrum in the 746-757 MHz and 776-787 MHz bands will instead be made available for assignment at a subsequent auction as follows: (i) Two paired channels of 6 megahertz each available for assignment in Block C1 in the 746-752 MHz and 776-782 MHz bands. (ii) Two paired channels of 5 megahertz each available for assignment in Block C2 in the 752-757 MHz and 782-787 MHz bands.

3.2 Block A Frequency Range

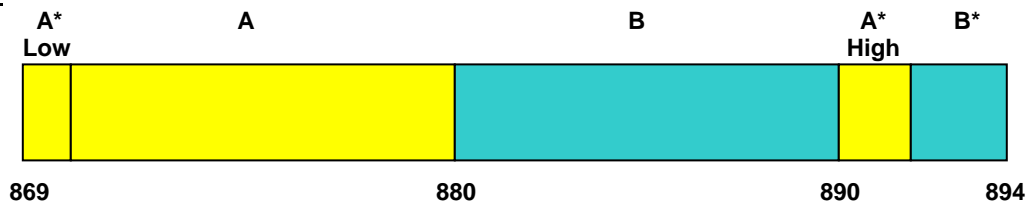
§27.5(c)

698-746 MHz band. The following frequencies are available for licensing pursuant to this part in the 698-746 MHz band: (1) Three paired channel blocks of 12 megahertz each are available for assignment as follows:

Block A: 698-704 MHz and 728-734 MHz;
 Block B: 704-710 MHz and 734-740 MHz; and
 Block C: 710-716 MHz and 740-746 MHz.



3.3 Cellular - Base Frequency Blocks

§22.905




BLOCK 1: 869 – 880 MHz (A* Low + A)
BLOCK 2: 880 – 890 MHz (B)

BLOCK 3: 890 – 891.5 MHz (A* High)
BLOCK 4: 891.5 – 894 MHz (B*)

FCC ID: ACJ9TGWW13B	 PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1412152302.ACJ	Test Dates: 12/10/2014 - 1/7/2015, 3/18/2015	EUT Type: Wireless Network Adapter	Page 6 of 52	

3.4 Cellular - Mobile Frequency Blocks

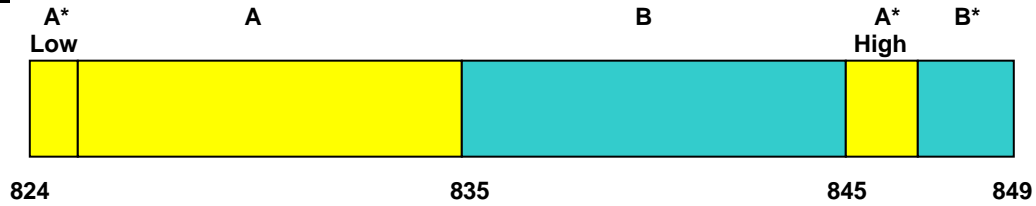§22.905




BLOCK 1: 824 – 835 MHz (A* Low + A)
 BLOCK 2: 835 – 845 MHz (B)

BLOCK 3: 845 – 846.5 MHz (A* High)
 BLOCK 4: 846.5 – 849 MHz (B*)

3.5 PCS - Base Frequency Blocks

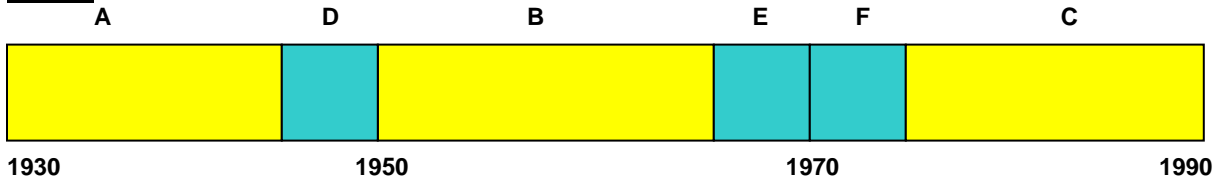§24.229




BLOCK 1: 1930 – 1945 MHz (A)
 BLOCK 2: 1945 – 1950 MHz (D)
 BLOCK 3: 1950 – 1965 MHz (B)

BLOCK 4: 1965 – 1970 MHz (E)
 BLOCK 5: 1970 – 1975 MHz (F)
 BLOCK 6: 1975 – 1990 MHz (C)

3.6 PCS - Mobile Frequency Blocks

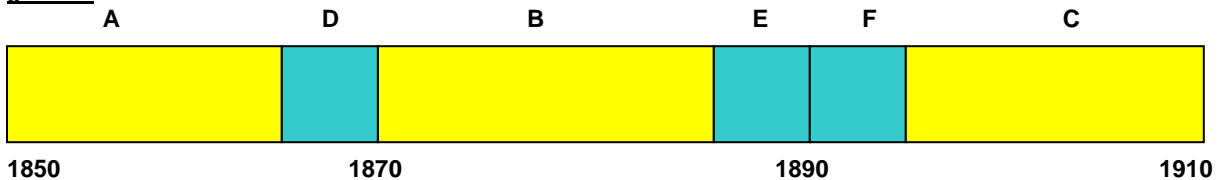§24.229




BLOCK 1: 1850 – 1865 MHz (A)
 BLOCK 2: 1865 – 1870 MHz (D)
 BLOCK 3: 1870 – 1885 MHz (B)

BLOCK 4: 1885 – 1890 MHz (E)
 BLOCK 5: 1890 – 1895 MHz (F)
 BLOCK 6: 1895 – 1910 MHz (C)

3.7 AWS - Base Frequency Blocks

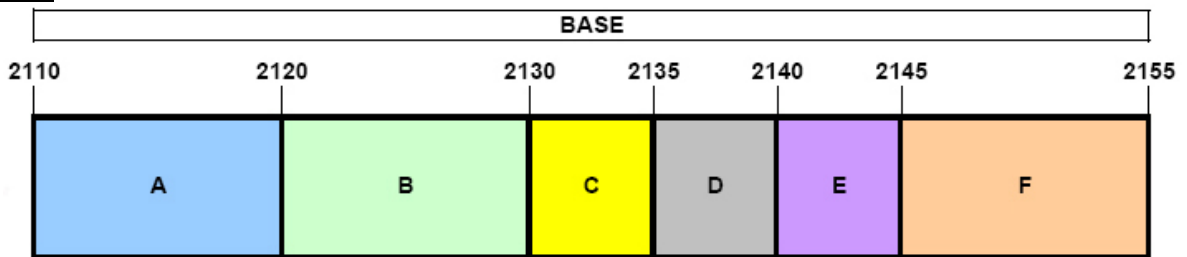§27.5(h)




BLOCK 1: 2110 – 2120 MHz (A)
 BLOCK 2: 2120 – 2130 MHz (B)
 BLOCK 3: 2130 – 2135 MHz (C)

BLOCK 4: 2135 – 2140 MHz (D)
 BLOCK 5: 2140 – 2145 MHz (E)
 BLOCK 6: 2145 – 2155 MHz (F)

FCC ID: ACJ9TGWW13B		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1412152302.ACJ	Test Dates: 12/10/2014 - 1/7/2015, 3/18/2015	EUT Type: Wireless Network Adapter		Page 7 of 52



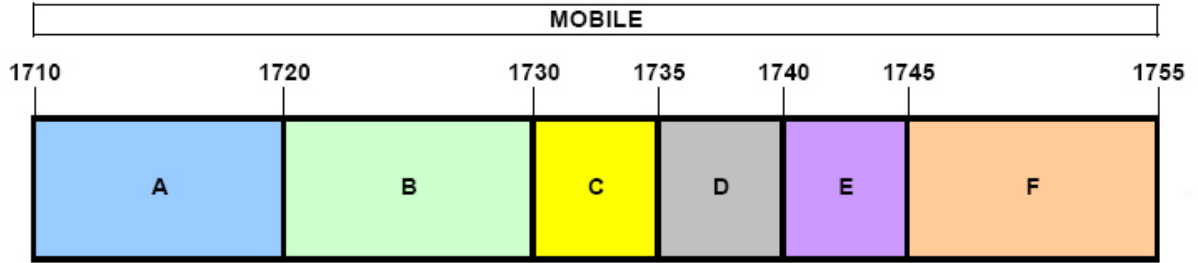3.8 AWS - Mobile Frequency Blocks

§27.5(h)



BLOCK 1: 1710 – 1720 MHz (A)
 BLOCK 2: 1720 – 1730 MHz (B)
 BLOCK 3: 1730 – 1735 MHz (C)

BLOCK 4: 1735 – 1740 MHz (D)
 BLOCK 5: 1740 – 1745 MHz (E)
 BLOCK 6: 1745 – 1755 MHz (F)

FCC ID: ACJ9TGWW13B		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	 Reviewed by: Quality Manager
Test Report S/N: 0Y1412152302.ACJ	Test Dates: 12/10/2014 - 1/7/2015, 3/18/2015	EUT Type: Wireless Network Adapter	Page 8 of 52

3.9 Radiated Power and Radiated Spurious Emissions

§2.1053 §22.913(a.2) §22.917(a) §24.232(c) §24.238(a) §27.50(b.10) §27.50(c.10) §27.50(d.4) §27.53(f) §27.53(g) §27.53(h)

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Clause 5, Figure 5.7 of ANSI C63.4-2009. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. An ETS Lindgren Model 2188 raised turntable is used for radiated measurement. It is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. A 78cm high PVC support structure is placed on top of the turntable. A 3/4" (~1.9cm) sheet of high density polyethylene is used as the table top and is placed on top of the PVC supports to bring the total height of the table to 80cm.



The equipment under test was transmitting while connected to its integral antenna and is placed on a wooden turntable 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer. Radiated power levels are also investigated with the receive antenna horizontally and vertically polarized. The maximized power level is recorded using the spectrum analyzer "Channel Power" function with the integration band set to the emissions' occupied bandwidth, a RMS detector, RBW = 100kHz, VBW = 300kHz, and a 1 second sweep time over a minimum of 10 sweeps, per the guidelines of KDB 971168.

Per the guidance of ANSI/TIA-603-C-2004, a half-wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d \text{ [dBm]} = P_g \text{ [dBm]} - \text{cable loss} \text{ [dB]} + \text{antenna gain} \text{ [dBd/dBi]}$$

Where, P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_g \text{ [dBm]} - \text{cable loss} \text{ [dB]}$.

The calculated P_d levels are then compared to the absolute spurious emission limit of -13dBm which is equivalent to the required minimum attenuation of $43 + 10\log_{10}(\text{Power} \text{ [Watts]})$.

FCC ID: ACJ9TGWW13B		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1412152302.ACJ	Test Dates: 12/10/2014 - 1/7/2015, 3/18/2015	EUT Type: Wireless Network Adapter		Page 9 of 52

4.0 TEST EQUIPMENT CALIBRATION DATA



Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	LTX1	Licensed Transmitter Cable Set	1/29/2014	Annual	1/29/2015	N/A
-	LTX3	Licensed Transmitter Cable Set	12/19/2014	Annual	12/19/2015	N/A
-	RE1	Radiated Emissions Cable Set (UHF/EHF)	5/29/2014	Annual	5/29/2015	N/A
Agilent	N9020A	MXA Signal Analyzer	10/27/2014	Annual	10/27/2015	US46470561
Agilent	N9030A	PXA Signal Analyzer (44GHz)	1/17/2014	Annual	1/17/2015	MY52350166
Anritsu	MT8820C	Radio Communication Analyzer	8/28/2014	Annual	8/28/2015	6201240328
Emco	3115	Horn Antenna (1-18GHz)	1/30/2014	Biennial	1/30/2016	9704-5182
ETS Lindgren	3160-09	18-26.5 GHz Standard Gain Horn	6/17/2014	Biennial	6/17/2016	135427
ETS Lindgren	3164-08	Quad Ridge Horn Antenna	3/12/2014	Biennial	3/12/2016	128337
K & L	11SH10-3075/U18000	High Pass Filter	12/1/2014	Annual	12/1/2015	2
K & L	13SH10-1000/U1000	N Type High Pass Filter	12/1/2014	Annual	12/1/2015	1
Mini Circuits	PWR-SEN-4GHS	USB Power Sensor	4/9/2014	Annual	4/9/2015	11401010036
Mini-Circuits	SSG-4000HP	USB Synthesized Signal Generator	N/A			11208010032
Mini-Circuits	TVA-11-422	RF Power Amp	N/A			QA1303002
Rohde & Schwarz	CMW500	Radio Communication Tester	10/4/2013	Biennial	10/4/2015	103962
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	1/27/2014	Annual	1/27/2015	100342
Rohde & Schwarz	TS-PR18	1-18 GHz Pre-Amplifier	3/5/2014	Annual	3/5/2015	100071
Rohde & Schwarz	TS-PR26	18-26.5 GHz Pre-Amplifier	3/12/2014	Annual	3/12/2015	100040
Schwarzbeck	UHA 9105	Dipole Antenna (400 - 1GHz) Rx	11/21/2013	Biennial	11/21/2015	9105-2404
Seekonk	NC-100	Torque Wrench 5/16", 8" lbs	3/18/2014	Biennial	3/18/2016	N/A
VWR	62344-734	Thermometer with Clock	2/20/2014	Biennial	2/20/2016	140140420

Table 4-1. Test Equipment

Notes:

1. Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.
2. The TS-PR18 and TS-PR26 pre-amplifiers were calibrated during all test periods.

FCC ID: ACJ9TGWW13B		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1412152302.ACJ	Test Dates: 12/10/2014 - 1/7/2015, 3/18/2015	EUT Type: Wireless Network Adapter	Page 10 of 52	

5.0 SAMPLE CALCULATIONS

Emission Designator

QPSK Modulation

Emission Designator = 8M62G7D

LTE BW = 8.62 MHz
 G = Phase Modulation
 7 = Quantized/Digital Info
 D = Data transmission, telemetry, telecommand

16QAM Modulation



Emission Designator = 8M45W7D

LTE BW = 8.45 MHz
 W = Amplitude/Angle Modulated
 7 = Quantized/Digital Info
 D = Data transmission, telemetry, telecommand

Spurious Radiated Emission – LTE Band

Example: Middle Channel LTE Mode 2nd Harmonic (1564 MHz)

The average spectrum analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 1564 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.501 dBm so this harmonic was 25.501 dBm - (-24.80).

FCC ID: ACJ9TGWW13B		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1412152302.ACJ	Test Dates: 12/10/2014 - 1/7/2015, 3/18/2015	EUT Type: Wireless Network Adapter		Page 11 of 52

6.0 TEST RESULTS

6.1 Summary



Company Name: Panasonic Corporation of North America
 FCC ID: ACJ9TGWW13B
 FCC Classification: PCS Licensed Transmitter (PCB)
 Mode(s): LTE

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Result	Reference
TRANSMITTER MODE (TX)					
2.1049	Occupied Bandwidth	N/A	CONDUCTED	PASS	Section 6.2
2.1051 22.917(a) 24.238(a) 27.53(c) 27.53(g) 27.53(h)	Out of Band Emissions	> 43 + 10log ₁₀ (P[Watts]) at Band Edge and for all out-of-band emissions		PASS	Section 6.3
24.232(d)	Peak-Average Ratio	< 13 dB		PASS	Section 6.4
2.1046	Transmitter Conducted Output Power	N/A		PASS	See RF Exposure Report
22.913(a.2)	Effective Radiated Power (Band 5)	< 7 Watts max. ERP	RADIATED	PASS	Section 6.5
27.50(b.10) 27.50(c.10)	Effective Radiated Power (Band 13, 17)	< 3 Watts max. ERP		PASS	Section 6.5
24.232(c)	Equivalent Isotropic Radiated Power (Band 2, 25)	< 2 Watts max. EIRP		PASS	Section 6.5
27.50(d.4)	Equivalent Isotropic Radiated Power (Band 4)	< 1 Watts max. EIRP		PASS	Section 6.5
2.1053 22.917(a) 24.238(a) 27.53(c) 27.53(g) 27.53(h)	Undesirable Emissions	> 43 + 10log ₁₀ (P[Watts]) for all out-of-band emissions		PASS	Section 6.6
27.53(f)	Undesirable Emissions (Band 13)	< -70 dBW/MHz (for wideband signals) < -80 dBW (for discrete emissions less than 700Hz BW) For all emissions in the band 1559 – 1610 MHz		PASS	Section 6.6

Table 6-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots (Sections 6.2, 6.3, 6.4) were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.

FCC ID: ACJ9TGWW13B		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1412152302.ACJ	Test Dates: 12/10/2014 - 1/7/2015, 3/18/2015	EUT Type: Wireless Network Adapter	Page 12 of 52	

6.2 Occupied Bandwidth

§2.1049

Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Procedure Used

KDB 971168 v02r02 – Section 4.2

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW \geq 3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

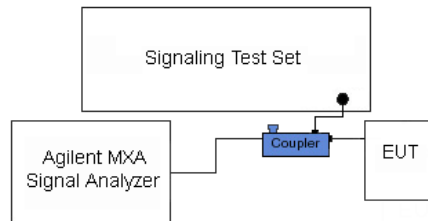


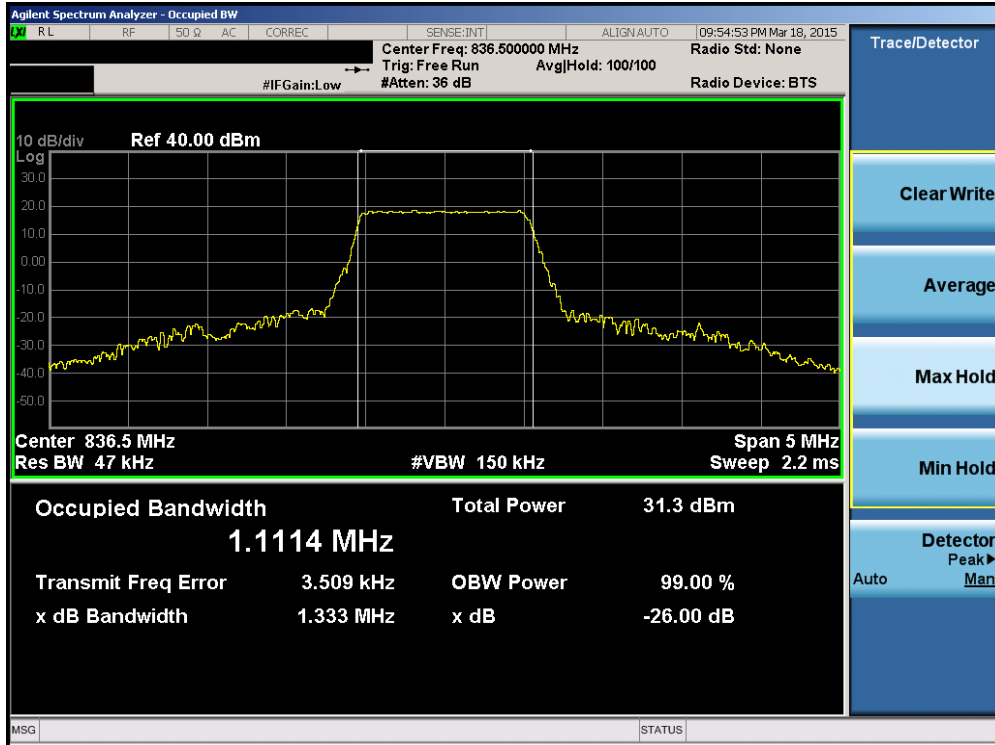


Figure 6-1. Test Instrument & Measurement Setup


Test Notes

None.

FCC ID: ACJ9TGWW13B		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1412152302.ACJ	Test Dates: 12/10/2014 - 1/7/2015, 3/18/2015	EUT Type: Wireless Network Adapter		Page 13 of 52




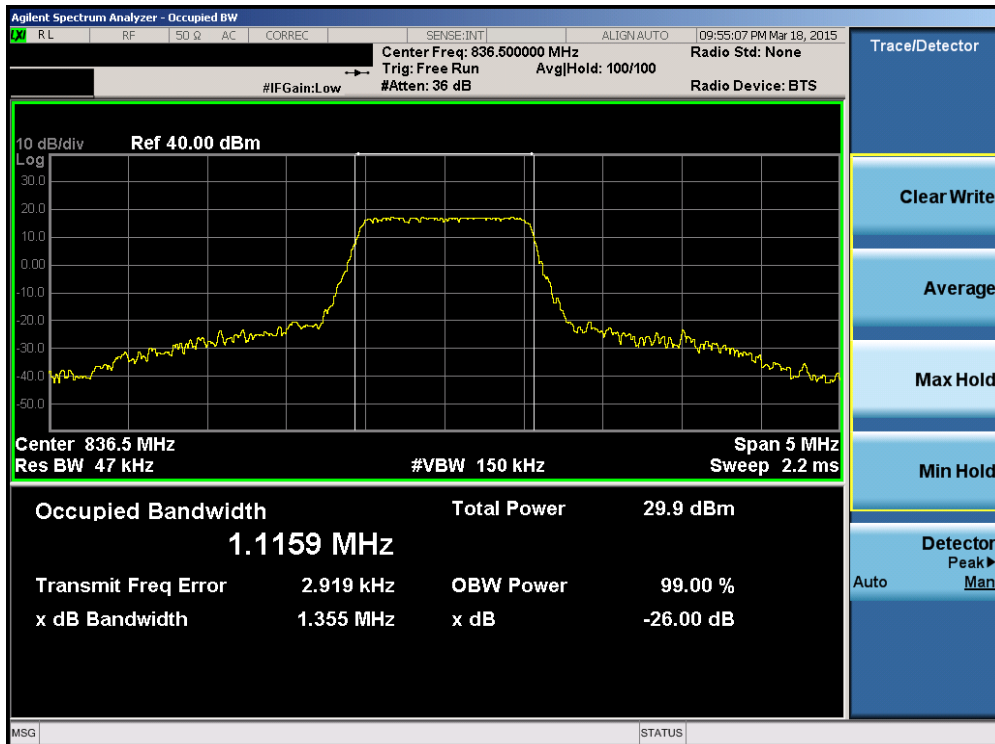Plot 6-1. Occupied Bandwidth Plot (Band 5 – 1.4MHz QPSK – RB Size 6)




Plot 6-2. Occupied Bandwidth Plot (Band 5 – 1.4MHz 16-QAM – RB Size 6)

FCC ID: ACJ9TGWW13B		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1412152302.ACJ	Test Dates: 12/10/2014 - 1/7/2015, 3/18/2015	EUT Type: Wireless Network Adapter		Page 14 of 52

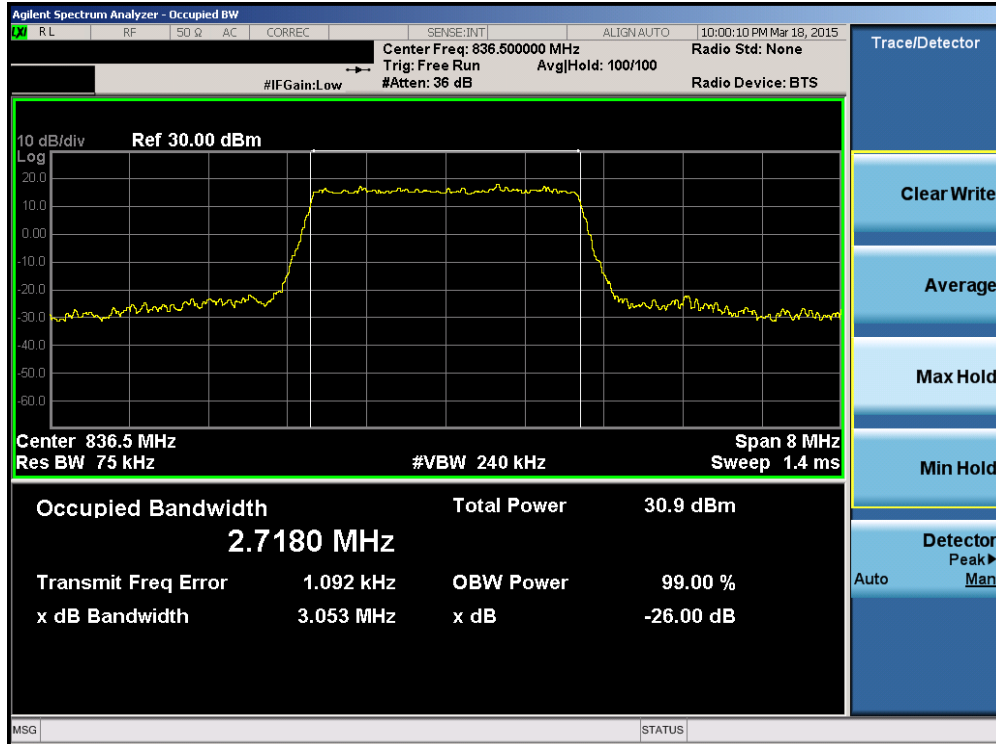


Plot 6-3. Occupied Bandwidth Plot (Band 5 – 3.0MHz QPSK – RB Size 15)

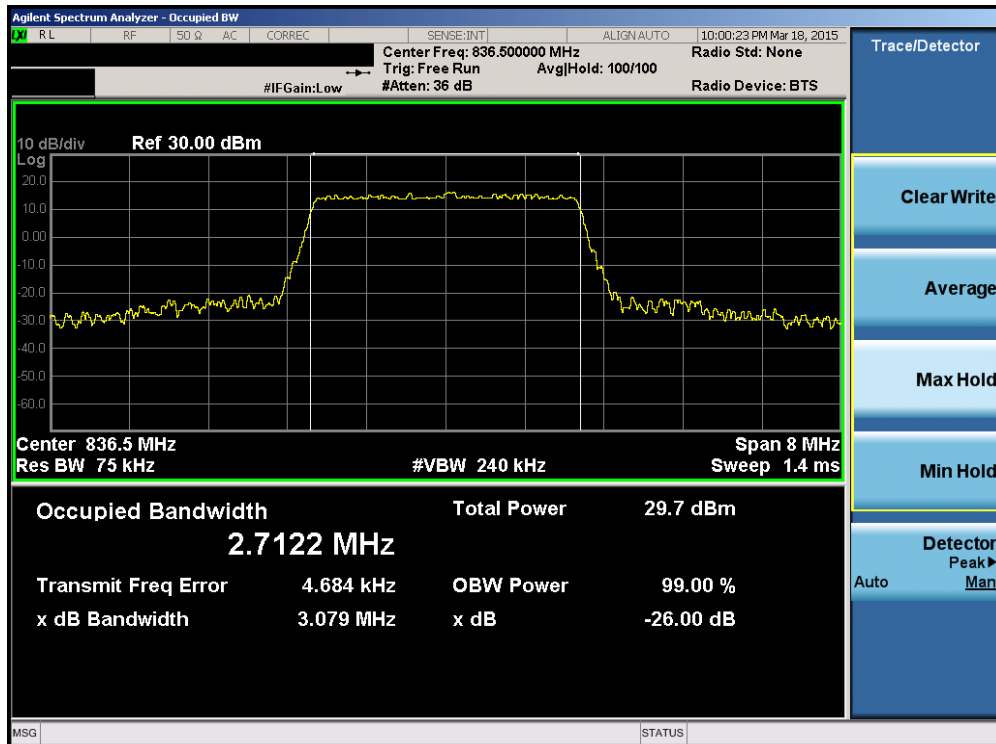


Plot 6-4. Occupied Bandwidth Plot (Band 5 – 3.0MHz 16-QAM – RB Size 15)

FCC ID: ACJ9TGWW13B		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1412152302.ACJ	Test Dates: 12/10/2014 - 1/7/2015, 3/18/2015	EUT Type: Wireless Network Adapter		Page 15 of 52

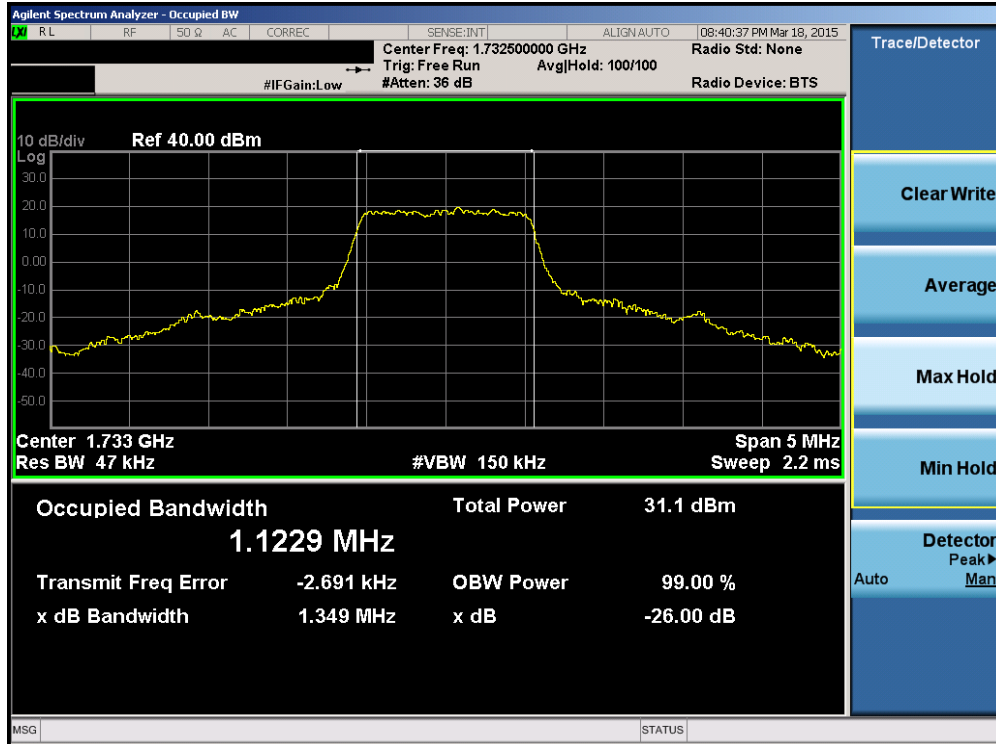


Plot 6-5. Occupied Bandwidth Plot (Band 4 – 1.4MHz QPSK – RB Size 6)

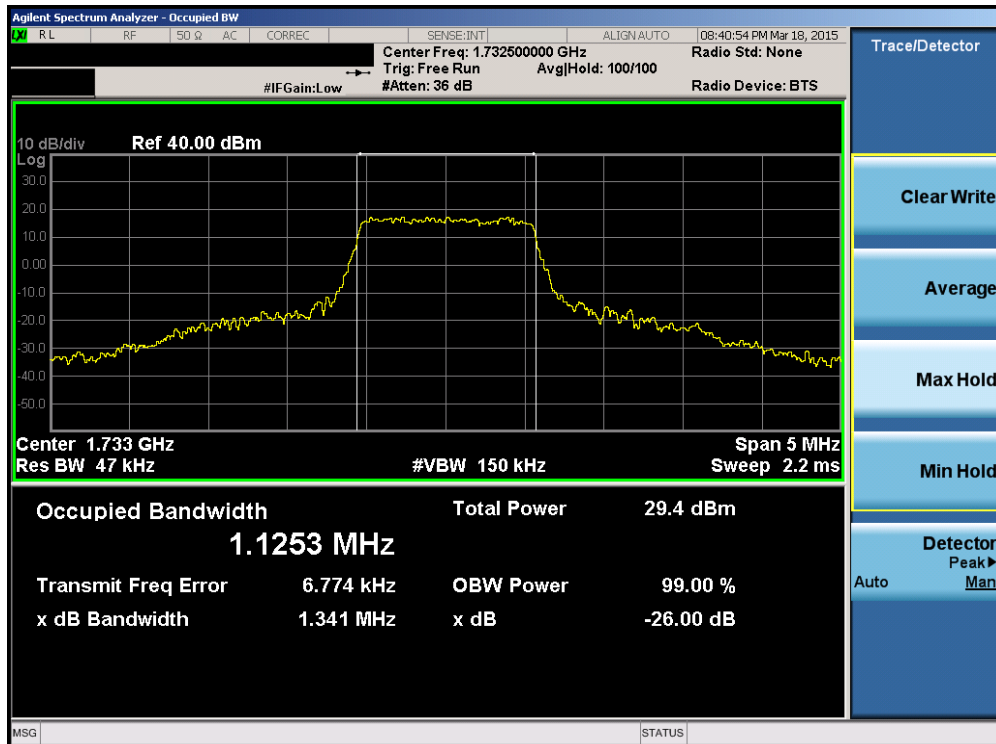


Plot 6-6. Occupied Bandwidth Plot (Band 4 – 1.4MHz 16-QAM – RB Size 6)

FCC ID: ACJ9TGWW13B		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1412152302.ACJ	Test Dates: 12/10/2014 - 1/7/2015, 3/18/2015	EUT Type: Wireless Network Adapter		Page 16 of 52

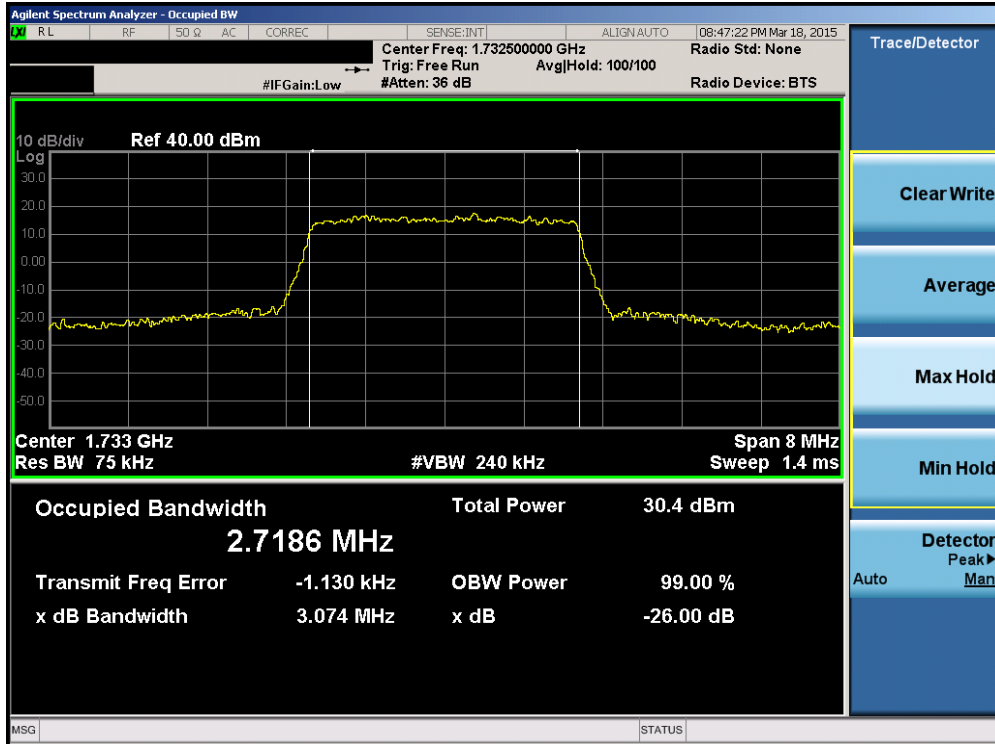


Plot 6-7. Occupied Bandwidth Plot (Band 4 – 3.0MHz QPSK – RB Size 15)

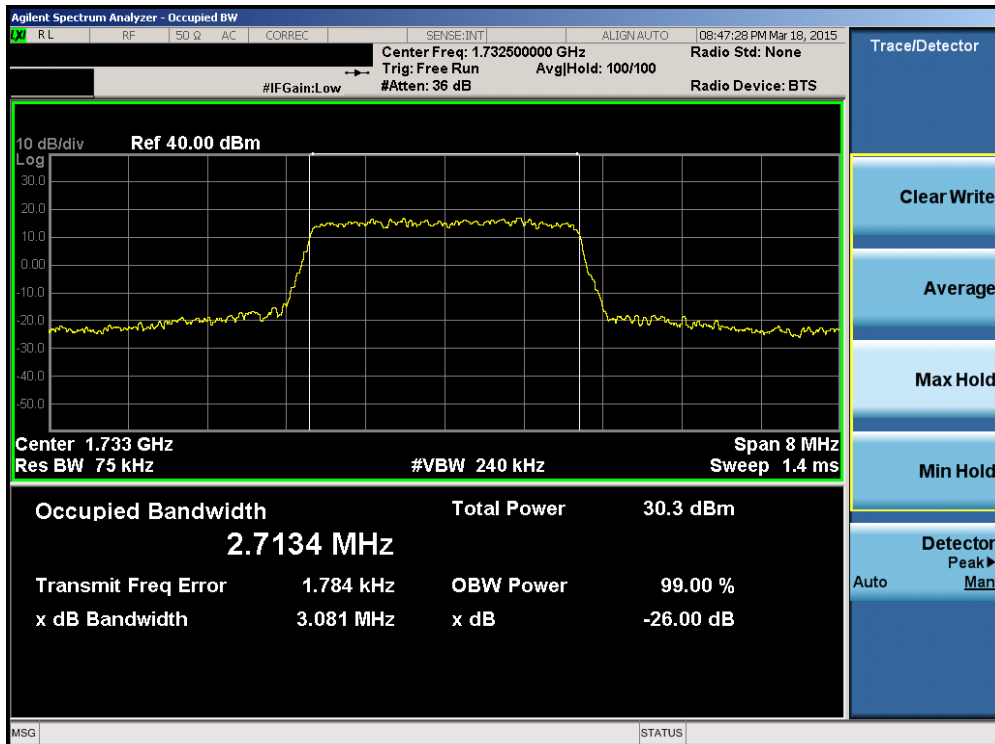


Plot 6-8. Occupied Bandwidth Plot (Band 4 – 3.0MHz 16-QAM – RB Size 15)

FCC ID: ACJ9TGWW13B		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1412152302.ACJ	Test Dates: 12/10/2014 - 1/7/2015, 3/18/2015	EUT Type: Wireless Network Adapter		Page 17 of 52

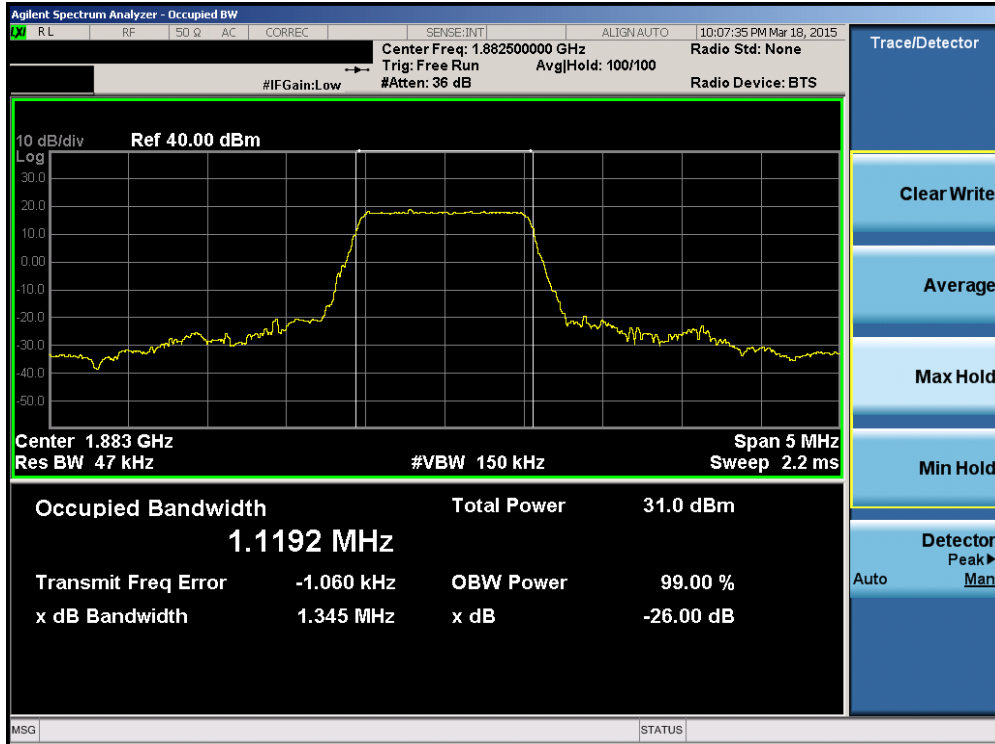


Plot 6-9. Occupied Bandwidth Plot (Band 2/25 – 1.4MHz QPSK – RB Size 6)

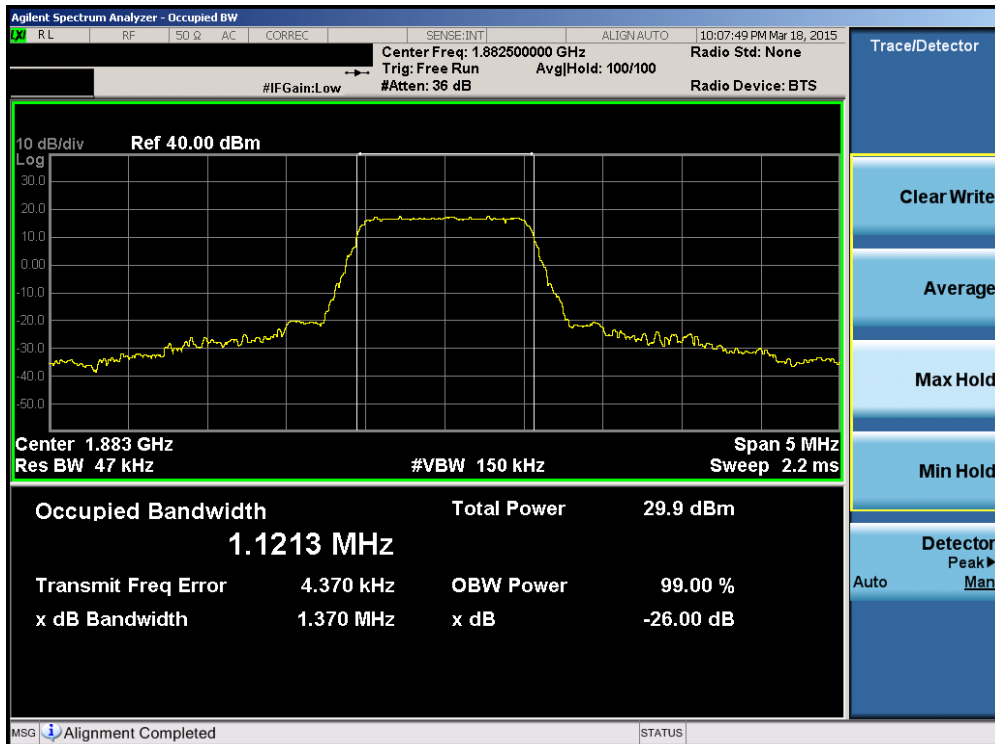


Plot 6-10. Occupied Bandwidth Plot (Band 2/25 – 1.4MHz 16-QAM – RB Size 6)

FCC ID: ACJ9TGWW13B		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1412152302.ACJ	Test Dates: 12/10/2014 - 1/7/2015, 3/18/2015	EUT Type: Wireless Network Adapter		Page 18 of 52

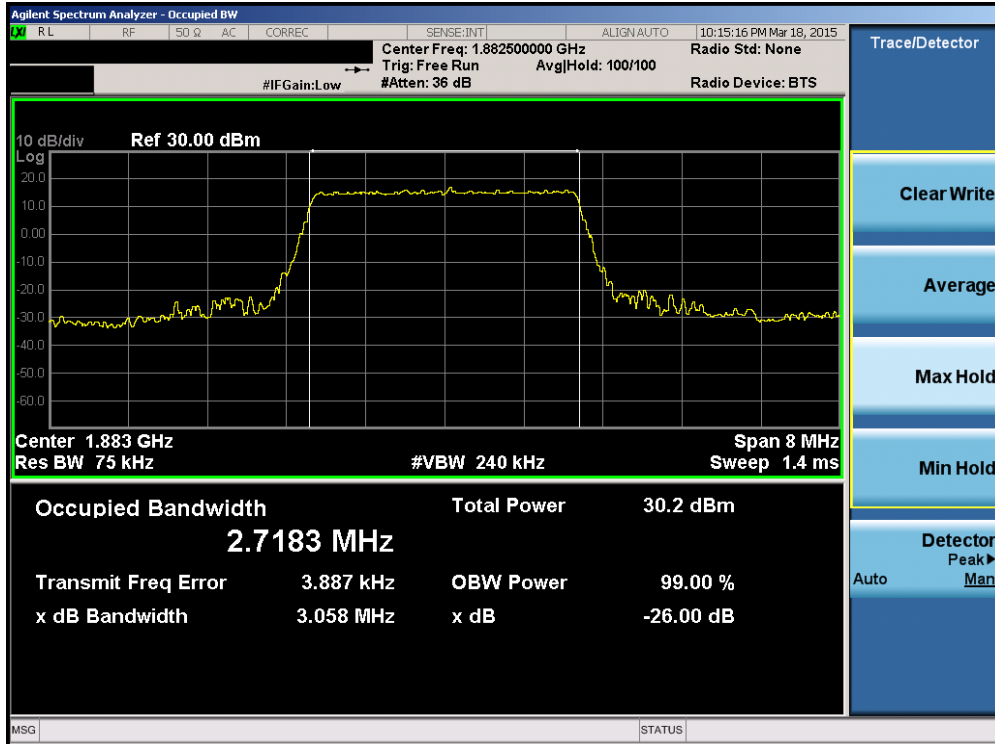

Plot 6-11. Occupied Bandwidth Plot (Band 2/25 – 3.0MHz QPSK – RB Size 15)

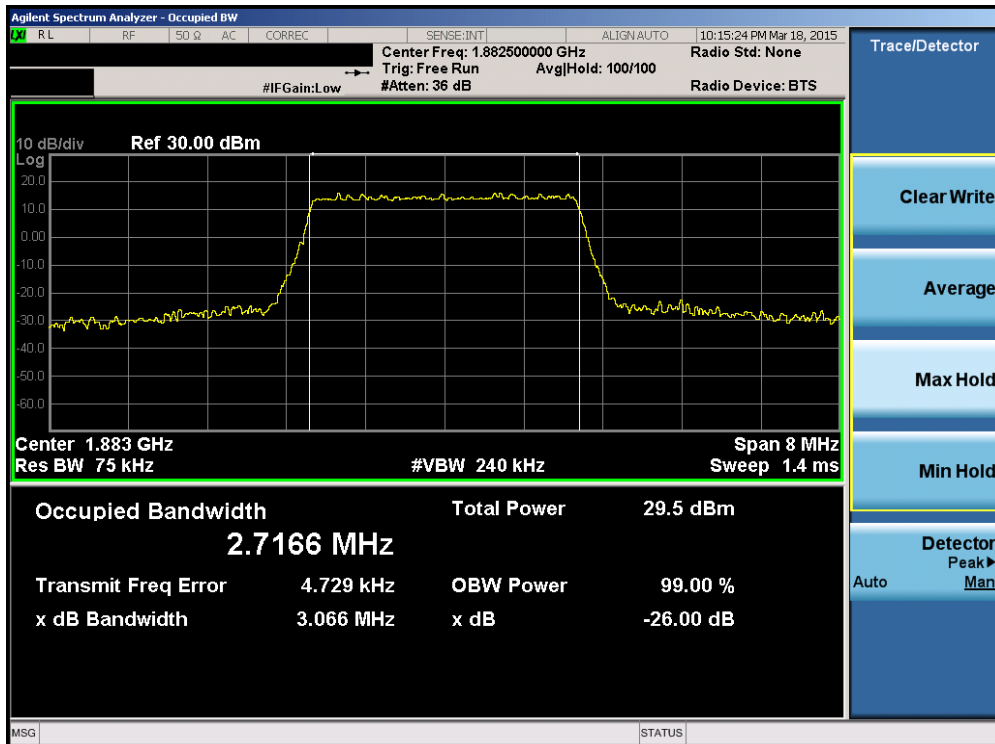

Plot 6-12. Occupied Bandwidth Plot (Band 2/25 – 3.0MHz 16-QAM – RB Size 15)

FCC ID: ACJ9TGWW13B		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1412152302.ACJ	Test Dates: 12/10/2014 - 1/7/2015, 3/18/2015	EUT Type: Wireless Network Adapter		Page 19 of 52

6.3 Band Edge Emissions at Antenna Terminal

§2.1051 §22.917(a) §24.238(a) §27.53(c) §27.53(g) §27.53(h)

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P_{[Watts]})$, where P is the transmitter power in Watts.

Test Procedure Used

KDB 971168 v02r02 – Section 6.0

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW \geq 1% of the emission bandwidth
4. VBW \geq 3 x RBW
5. Detector = RMS
6. Number of sweep points \geq 2 x Span/RBW
7. Trace mode = max hold
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

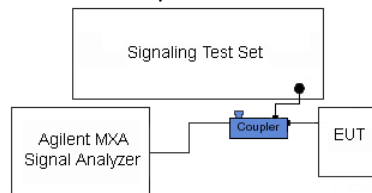


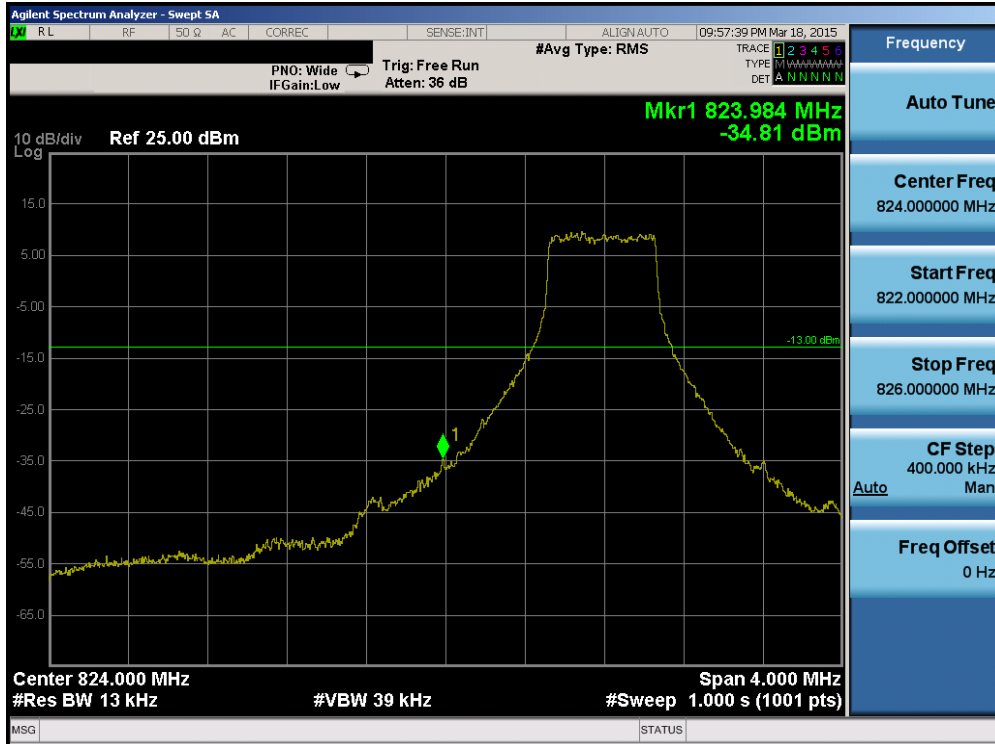


Figure 6-2. Test Instrument & Measurement Setup


Test Notes

Per 22.917(b) 24.238(a) 27.53(h) in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to demonstrate compliance with the out-of-band emissions limit. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

FCC ID: ACJ9TGWW13B		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1412152302.ACJ	Test Dates: 12/10/2014 - 1/7/2015, 3/18/2015	EUT Type: Wireless Network Adapter	Page 20 of 52	



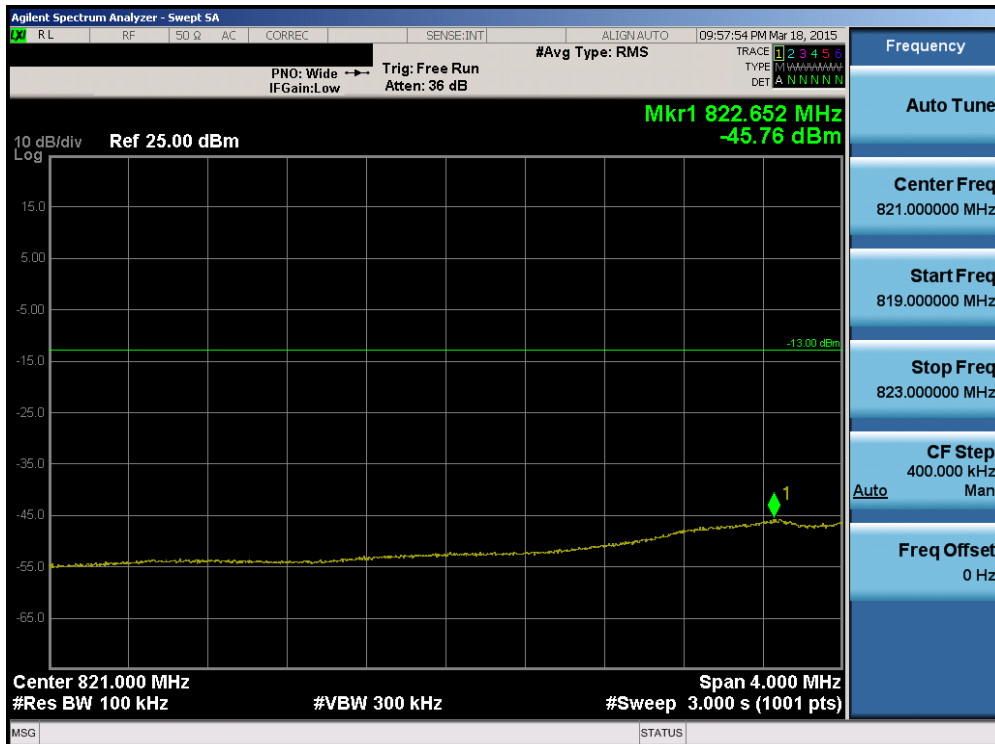Plot 6-13. Lower Band Edge Plot (Band 5 – 1.4MHz QPSK – RB Size 6)



Plot 6-14. Lower Extended Band Edge Plot (Band 5 – 1.4MHz QPSK – RB Size 6)

FCC ID: ACJ9TGWW13B	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0Y1412152302.ACJ	Test Dates: 12/10/2014 - 1/7/2015, 3/18/2015	EUT Type: Wireless Network Adapter		Page 21 of 52




Plot 6-17. Lower Band Edge Plot (Band 5 – 3.0MHz QPSK – RB Size 15)




Plot 6-18. Lower Extended Band Edge Plot (Band 5 – 3.0MHz QPSK – RB Size 15)

FCC ID: ACJ9TGWW13B	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0Y1412152302.ACJ	Test Dates: 12/10/2014 - 1/7/2015, 3/18/2015	EUT Type: Wireless Network Adapter		Page 23 of 52

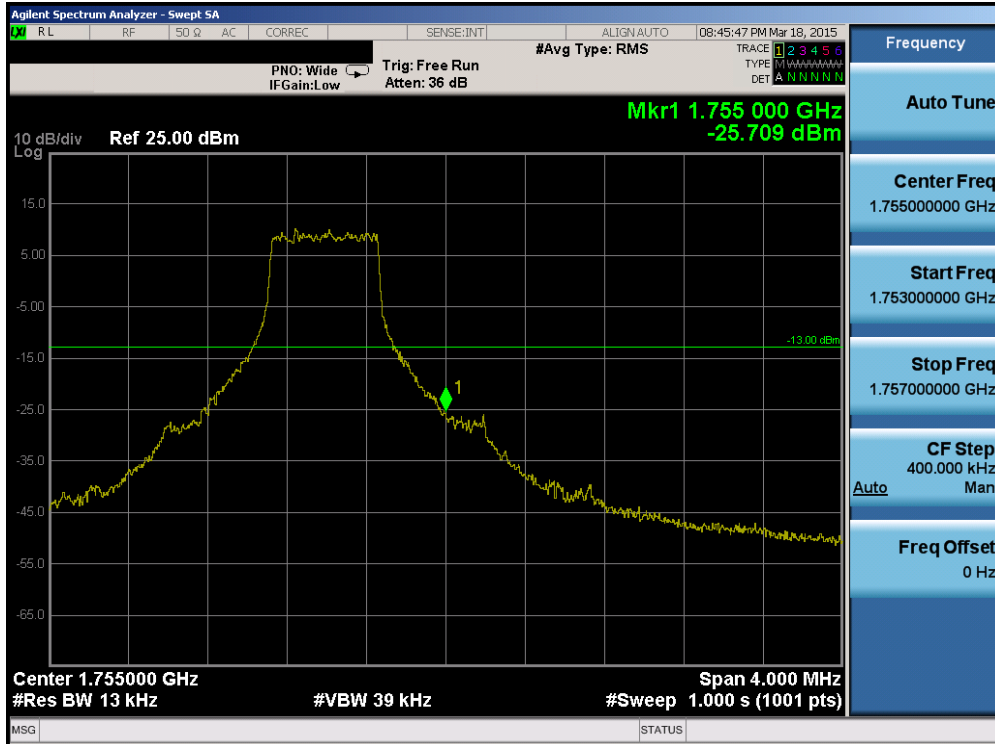


Plot 6-23. Upper Band Edge Plot (Band 4 – 1.4MHz QPSK – RB Size 6)

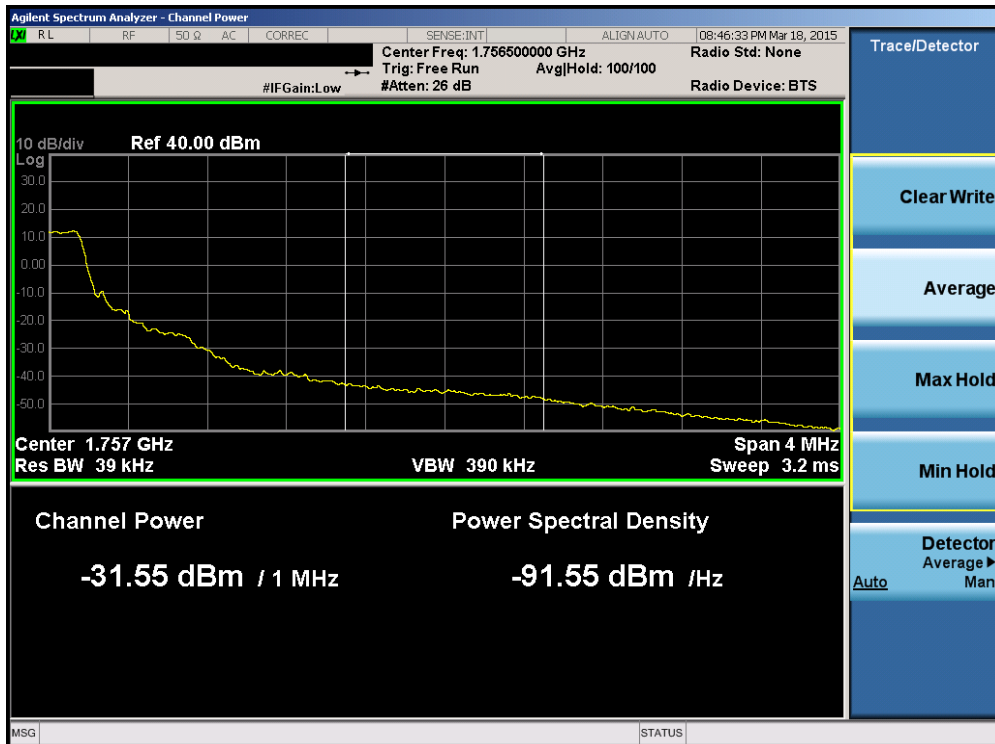


Plot 6-24. Upper Extended Band Edge Plot (Band 4 – 1.4MHz QPSK – RB Size 6)

FCC ID: ACJ9TGWW13B	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0Y1412152302.ACJ	Test Dates: 12/10/2014 - 1/7/2015, 3/18/2015	EUT Type: Wireless Network Adapter		Page 26 of 52

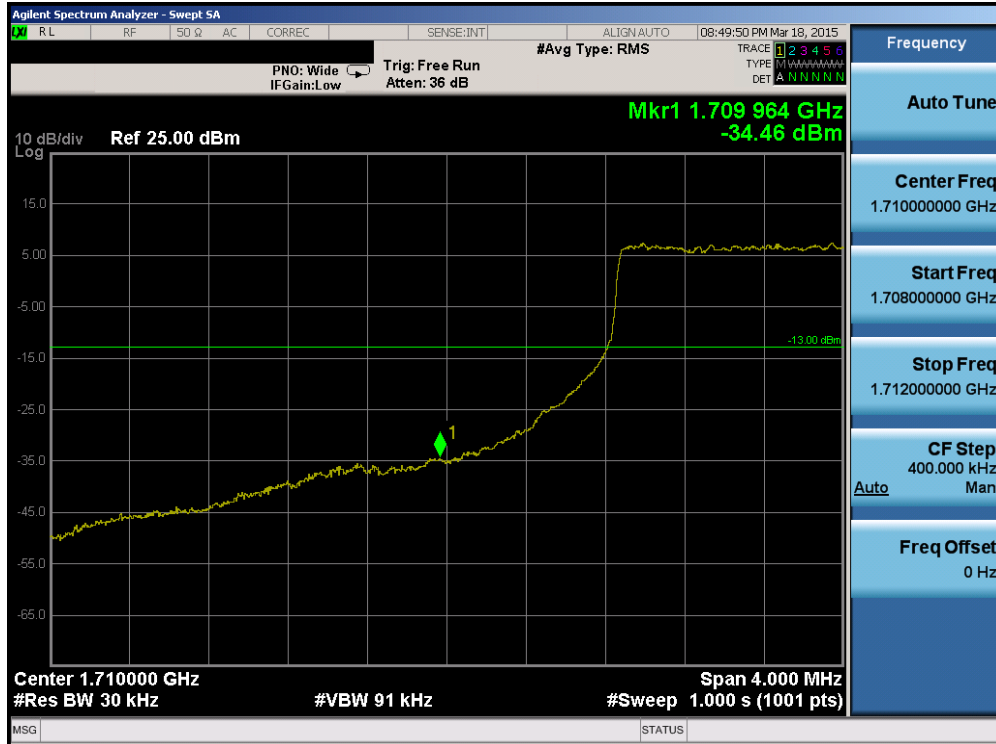

Plot 6-25. Lower Band Edge Plot (Band 4 – 3.0MHz QPSK – RB Size 15)

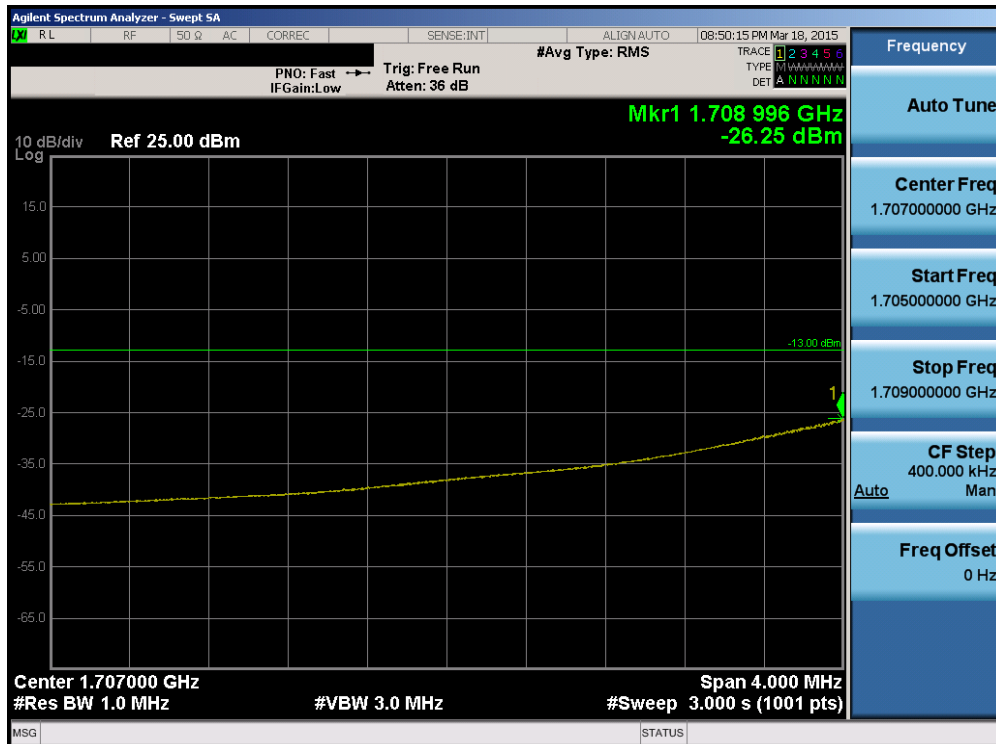


Plot 6-26. Lower Extended Band Edge Plot (Band 4 – 3.0MHz QPSK – RB Size 15)

FCC ID: ACJ9TGWW13B	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0Y1412152302.ACJ	Test Dates: 12/10/2014 - 1/7/2015, 3/18/2015	EUT Type: Wireless Network Adapter	Page 27 of 52	



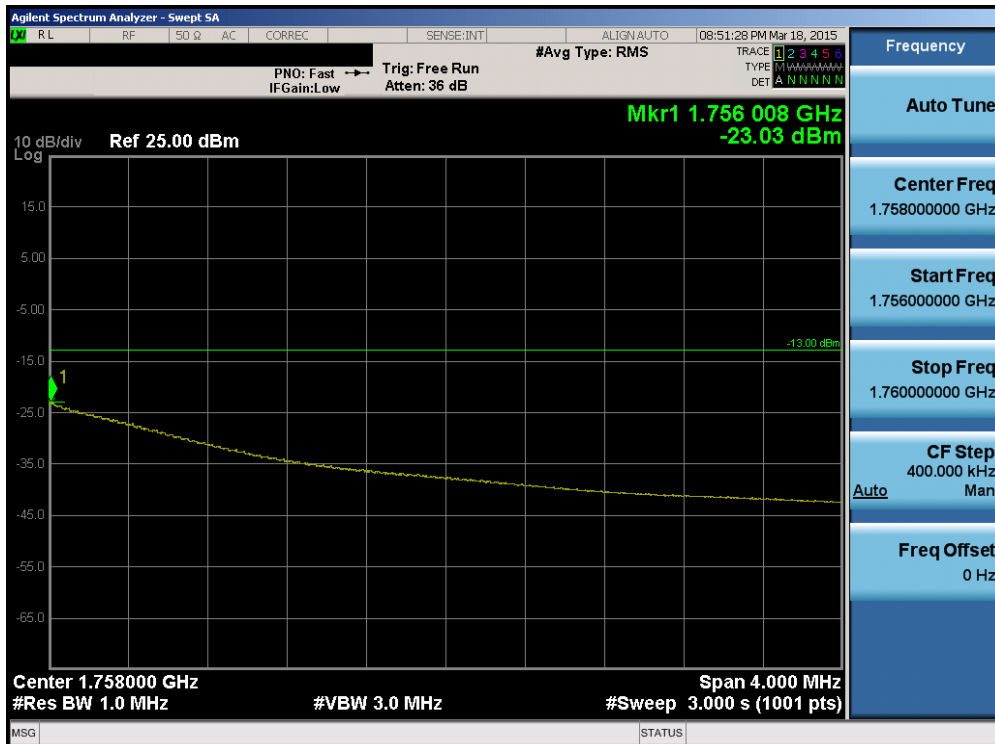Plot 6-27. Upper Band Edge Plot (Band 4 – 3.0MHz QPSK – RB Size 15)




Plot 6-28. Upper Extended Band Edge Plot (Band 4 – 3.0MHz QPSK – RB Size 15)

FCC ID: ACJ9TGWW13B	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0Y1412152302.ACJ	Test Dates: 12/10/2014 - 1/7/2015, 3/18/2015	EUT Type: Wireless Network Adapter		Page 28 of 52



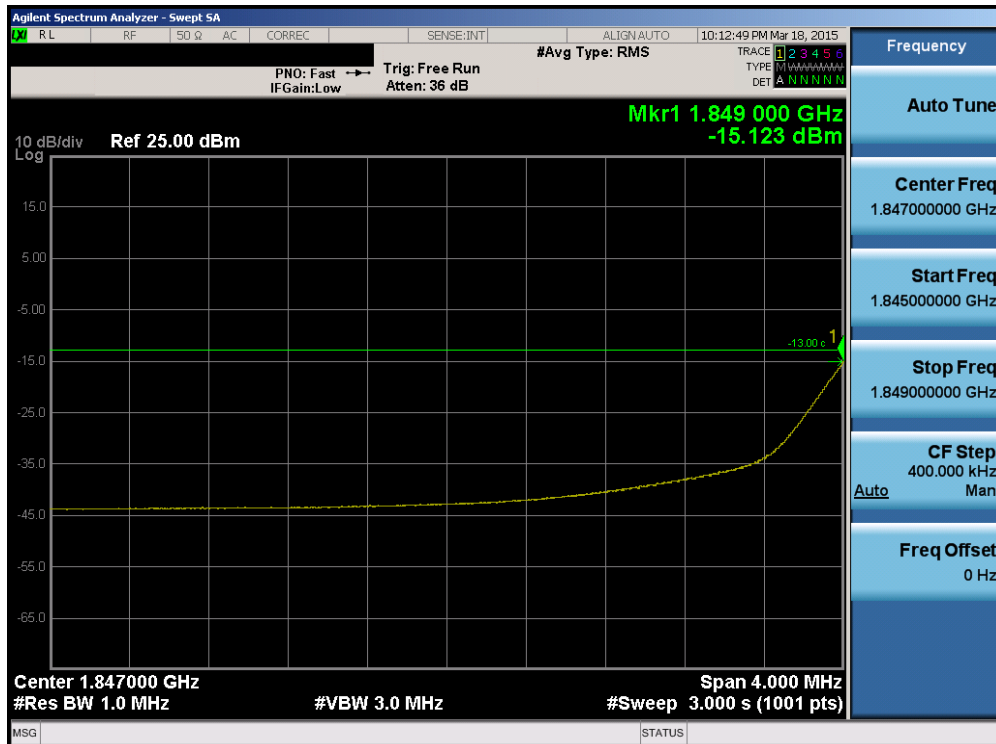Plot 6-29. Lower Band Edge Plot (Band 2/25 – 1.4MHz QPSK – RB Size 6)




Plot 6-30. Lower Extended Band Edge Plot (Band 2/25 – 1.4MHz QPSK – RB Size 6)

FCC ID: ACJ9TGWW13B	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0Y1412152302.ACJ	Test Dates: 12/10/2014 - 1/7/2015, 3/18/2015	EUT Type: Wireless Network Adapter		Page 29 of 52




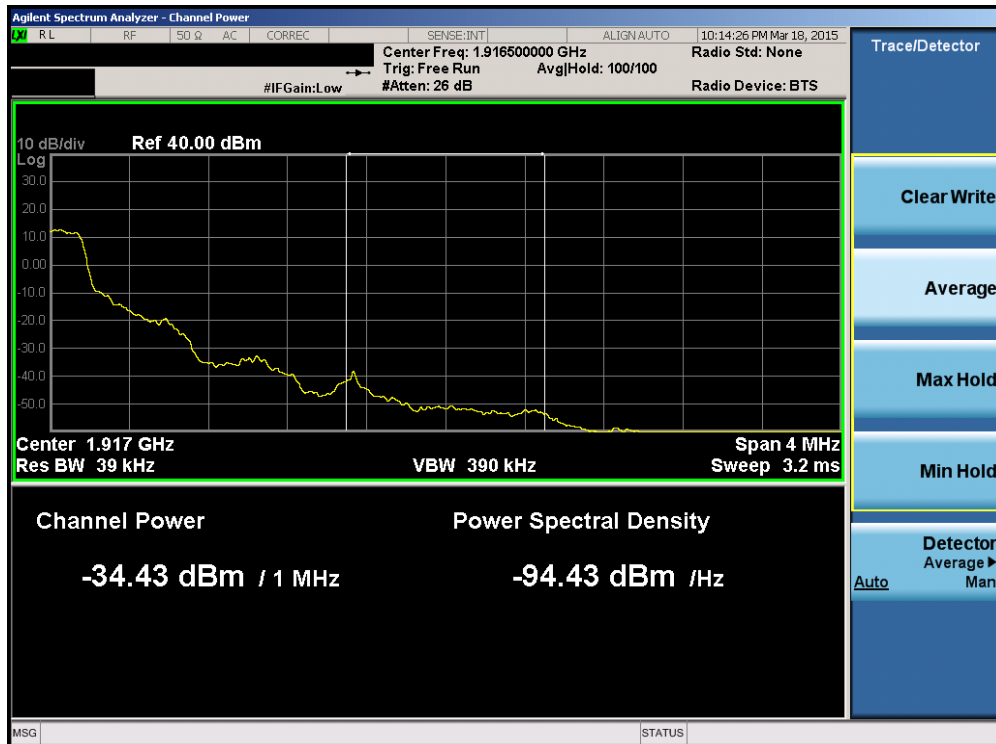Plot 6-31. Upper Band Edge Plot (Band 2/25 – 1.4MHz QPSK – RB Size 6)



Plot 6-32. Upper Extended Band Edge Plot (Band 2/25 – 1.4MHz QPSK – RB Size 6)

FCC ID: ACJ9TGWW13B	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0Y1412152302.ACJ	Test Dates: 12/10/2014 - 1/7/2015, 3/18/2015	EUT Type: Wireless Network Adapter		Page 30 of 52

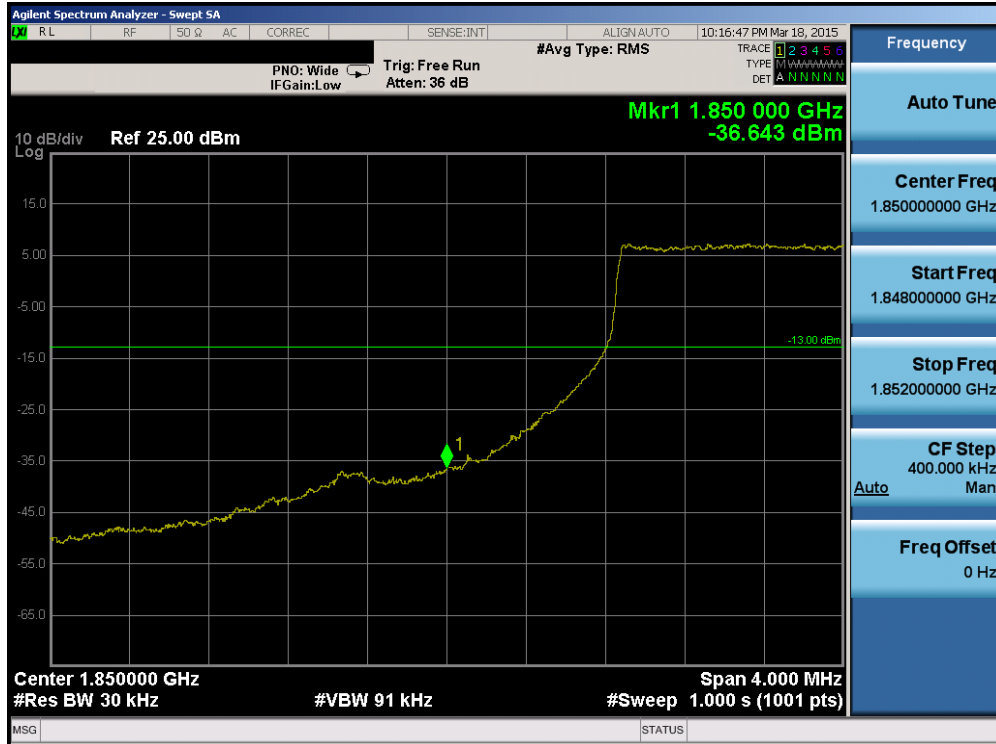

Plot 6-33. Lower Band Edge Plot (Band 2/25 – 3.0MHz QPSK – RB Size 15)



Plot 6-34. Lower Extended Band Edge Plot (Band 2/25 – 3.0MHz QPSK – RB Size 15)

FCC ID: ACJ9TGW13B	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0Y1412152302.ACJ	Test Dates: 12/10/2014 - 1/7/2015, 3/18/2015	EUT Type: Wireless Network Adapter		Page 31 of 52



Plot 6-35. Upper Band Edge Plot (Band 2/25 – 3.0MHz QPSK – RB Size 15)



Plot 6-36. Upper Extended Band Edge Plot (Band 2/25 – 3.0MHz QPSK – RB Size 15)

FCC ID: ACJ9TGWW13B		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1412152302.ACJ	Test Dates: 12/10/2014 - 1/7/2015, 3/18/2015	EUT Type: Wireless Network Adapter		Page 32 of 52

6.4 Peak-Average Ratio

§24.232(d)

Test Overview

A peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

Test Procedure Used

KDB 971168 v02r02 – Section 5.7.1

Test Settings

1. The signal analyzer's CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW > Emission bandwidth of signal
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

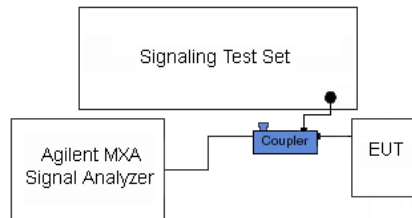


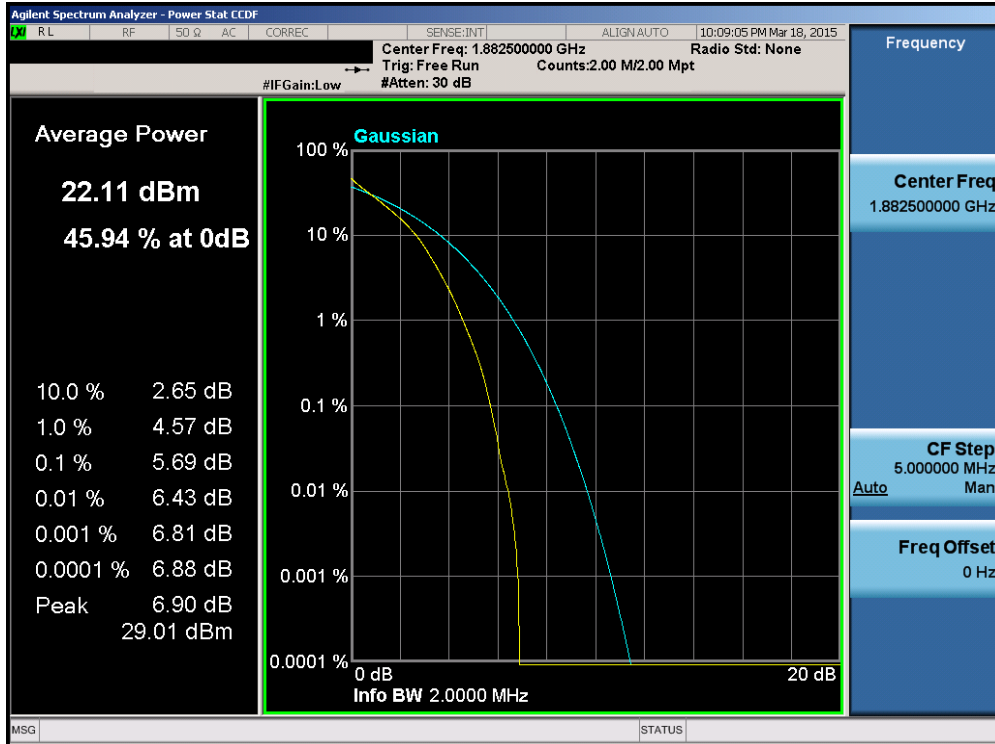


Figure 6-3. Test Instrument & Measurement Setup


Test Notes

None.

FCC ID: ACJ9TGWW13B		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1412152302.ACJ	Test Dates: 12/10/2014 - 1/7/2015, 3/18/2015	EUT Type: Wireless Network Adapter	Page 33 of 52	




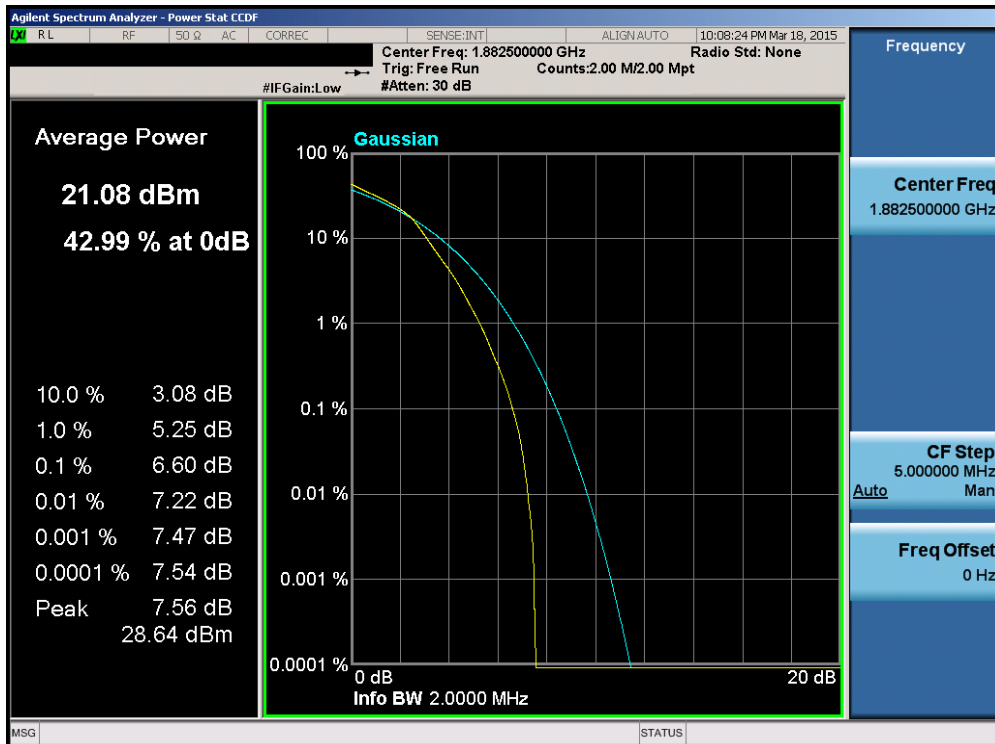Plot 6-37. PAR Plot (Band 2/25 – 1.4MHz QPSK – RB Size 6)




Plot 6-38. PAR Plot (Band 2/25 – 1.4MHz 16-QAM – RB Size 6)

FCC ID: ACJ9TGWW13B		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1412152302.ACJ	Test Dates: 12/10/2014 - 1/7/2015, 3/18/2015	EUT Type: Wireless Network Adapter		Page 34 of 52

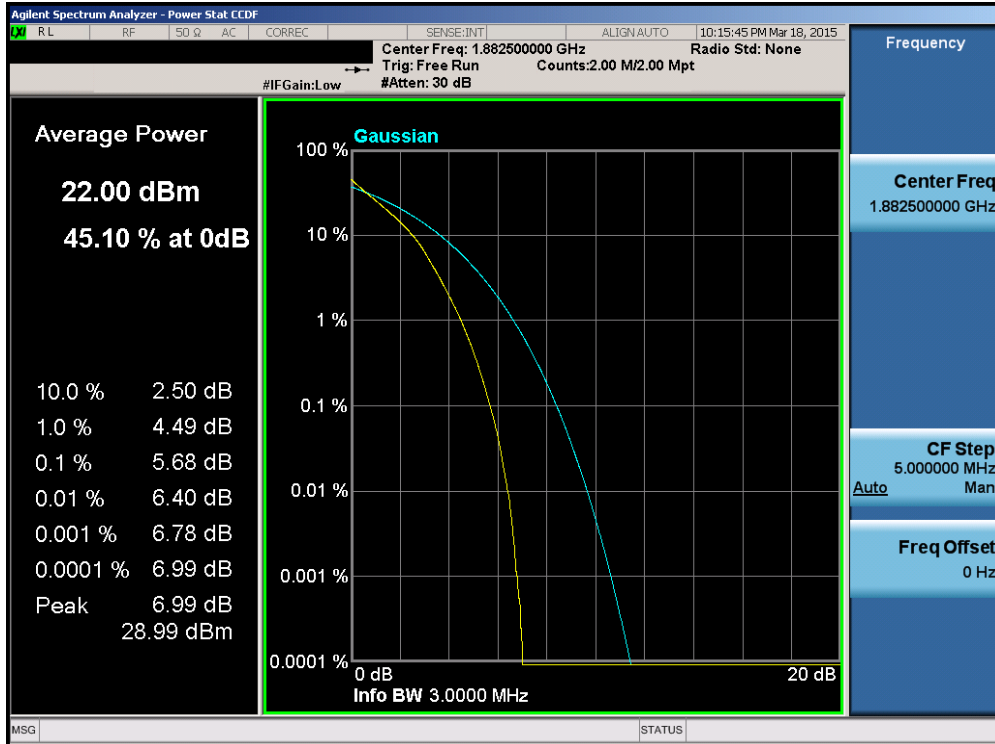

Plot 6-39. PAR Plot (Band 2/25 – 3.0MHz QPSK – RB Size 15)

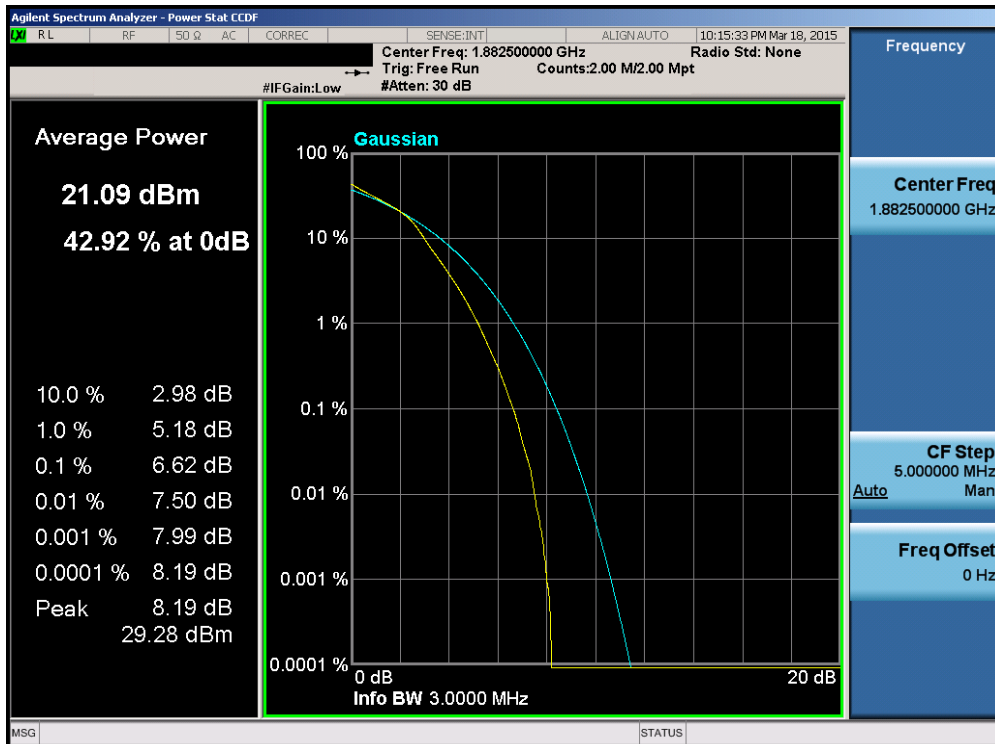

Plot 6-40. PAR Plot (Band 2/25 – 3.0MHz 16-QAM – RB Size 15)

FCC ID: ACJ9TGWW13B	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	Panasonic	Reviewed by: Quality Manager
Test Report S/N: 0Y1412152302.ACJ	Test Dates: 12/10/2014 - 1/7/2015, 3/18/2015	EUT Type: Wireless Network Adapter		Page 35 of 52

6.5 Radiated Power (ERP/EIRP)

§22.913(a.2) §24.232(c.2) §27.50(b.10) §27.50(c.10) §27.50(d.4)

Test Overview

Effective Radiated Power (ERP) and Equivalent Isotropic Radiated Power (EIRP) measurements are performed using the substitution method described in ANSI/TIA-603-C-2004 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically polarized broadband horn antennas. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.



Test Procedures Used

KDB 971168 v02r02 – Section 5.2.1

ANSI/TIA-603-C-2004 – Section 2.2.17

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW \geq 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points \geq 2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

FCC ID: ACJ9TGWW13B		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1412152302.ACJ	Test Dates: 12/10/2014 - 1/7/2015, 3/18/2015	EUT Type: Wireless Network Adapter		Page 36 of 52

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.






Figure 6-4. Test Instrument & Measurement Setup

Test Notes

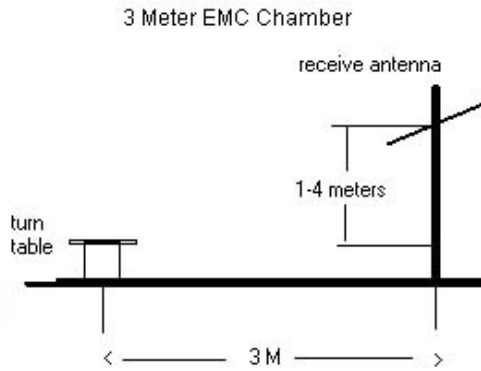- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning.
- 2) This unit was tested with its standard battery.



FCC ID: ACJ9TGWW13B		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	 Reviewed by: Quality Manager
Test Report S/N: 0Y1412152302.ACJ	Test Dates: 12/10/2014 - 1/7/2015, 3/18/2015	EUT Type: Wireless Network Adapter	Page 37 of 52

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Battery	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBd]	Ant. Pol. [H/V]	ERP [dBm]	ERP Limit [dBm]	Margin [dB]
706.50	5	QPSK	Standard	12 / 6	12.75	1.05	V	13.80	34.77	-20.97
710.00	5	QPSK	Standard	12 / 6	12.00	1.12	V	13.12	34.77	-21.65
713.50	5	QPSK	Standard	1 / 0	12.03	1.19	V	13.22	34.77	-21.55
706.50	5	16-QAM	Standard	12 / 6	11.85	1.05	V	12.90	34.77	-21.87
710.00	5	16-QAM	Standard	12 / 6	11.09	1.12	V	12.21	34.77	-22.56
713.50	5	16-QAM	Standard	1 / 0	10.96	1.19	V	12.15	34.77	-22.62
709.00	10	QPSK	Standard	1 / 0	12.84	1.10	V	13.94	34.77	-20.83
710.00	10	QPSK	Standard	1 / 0	13.15	1.12	V	14.27	34.77	-20.50
711.00	10	QPSK	Standard	1 / 0	13.41	1.14	V	14.55	34.77	-20.22
709.00	10	16-QAM	Standard	1 / 0	11.91	1.10	V	13.01	34.77	-21.76
710.00	10	16-QAM	Standard	1 / 0	12.14	1.12	V	13.26	34.77	-21.51
711.00	10	16-QAM	Standard	1 / 0	12.33	1.14	V	13.47	34.77	-21.30

Table 6-2. ERP Data (Band 17)



Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Battery	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBd]	Ant. Pol. [H/V]	ERP [dBm]	ERP Limit [dBm]	Margin [dB]
779.50	5	QPSK	Standard	1 / 24	13.97	2.47	V	16.44	34.77	-18.33
782.00	5	QPSK	Standard	1 / 0	13.98	2.51	V	16.49	34.77	-18.28
784.50	5	QPSK	Standard	1 / 0	14.48	2.56	V	17.04	34.77	-17.73
779.50	5	16QAM	Standard	1 / 24	12.87	2.47	V	15.34	34.77	-19.43
782.00	5	16QAM	Standard	1 / 0	12.92	2.51	V	15.43	34.77	-19.34
784.50	5	16QAM	Standard	1 / 0	13.30	2.56	V	15.86	34.77	-18.91
782.00	10	QPSK	Standard	1 / 49	13.29	2.51	V	15.80	34.77	-18.97
782.00	10	16QAM	Standard	1 / 49	12.45	2.51	V	14.96	34.77	-19.81

Table 6-3. ERP Data (Band 13)

FCC ID: ACJ9TGWW13B		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1412152302.ACJ	Test Dates: 12/10/2014 - 1/7/2015, 3/18/2015	EUT Type: Wireless Network Adapter	Page 38 of 52	



Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Battery	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBd]	Ant. Pol. [H/V]	ERP [dBm]	ERP Limit [dBm]	Margin [dB]
824.70	1.4	QPSK	Standard	3 / 2	13.93	2.98	V	16.91	38.45	-21.54
836.50	1.4	QPSK	Standard	1 / 0	12.08	3.04	V	15.12	38.45	-23.33
848.30	1.4	QPSK	Standard	1 / 0	13.80	3.10	V	16.90	38.45	-21.55
824.70	1.4	16-QAM	Standard	3 / 2	11.81	2.98	V	14.79	38.45	-23.66
836.50	1.4	16-QAM	Standard	1 / 0	10.72	3.04	V	13.76	38.45	-24.69
848.30	1.4	16-QAM	Standard	1 / 0	11.96	3.10	V	15.06	38.45	-23.39
825.50	3	QPSK	Standard	1 / 0	14.02	2.98	V	17.00	38.45	-21.45
836.50	3	QPSK	Standard	1 / 0	13.30	3.04	V	16.34	38.45	-22.11
847.50	3	QPSK	Standard	8 / 4	12.66	3.10	V	15.76	38.45	-22.69
825.50	3	16-QAM	Standard	1 / 0	13.22	2.98	V	16.20	38.45	-22.25
836.50	3	16-QAM	Standard	1 / 0	11.71	3.04	V	14.75	38.45	-23.70
847.50	3	16-QAM	Standard	8 / 4	11.50	3.10	V	14.60	38.45	-23.85
826.50	5	QPSK	Standard	12 / 6	14.54	2.99	V	17.53	38.45	-20.92
836.50	5	QPSK	Standard	1 / 0	14.03	3.04	V	17.07	38.45	-21.38
846.50	5	QPSK	Standard	12 / 6	13.77	3.09	V	16.86	38.45	-21.59
826.50	5	16-QAM	Standard	12 / 6	13.58	2.99	V	16.57	38.45	-21.88
836.50	5	16-QAM	Standard	1 / 0	12.96	3.04	V	16.00	38.45	-22.45
846.50	5	16-QAM	Standard	12 / 6	12.87	3.09	V	15.96	38.45	-22.49
829.00	10	QPSK	Standard	1 / 0	15.07	3.00	V	18.07	38.45	-20.38
836.50	10	QPSK	Standard	1 / 0	14.75	3.04	V	17.79	38.45	-20.66
844.00	10	QPSK	Standard	1 / 0	13.97	3.08	V	17.05	38.45	-21.40
829.00	10	16-QAM	Standard	1 / 0	14.08	3.00	V	17.08	38.45	-21.37
836.50	10	16-QAM	Standard	1 / 0	13.76	3.04	V	16.80	38.45	-21.65
844.00	10	16-QAM	Standard	1 / 0	13.04	3.08	V	16.12	38.45	-22.33

Table 6-4. ERP Data (Band 5)

FCC ID: ACJ9TGWW13B		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1412152302.ACJ	Test Dates: 12/10/2014 - 1/7/2015, 3/18/2015	EUT Type: Wireless Network Adapter	Page 39 of 52	



Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Battery	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBi]	Ant. Pol. [H/V]	EIRP [dBm]	EIRP Limit [dBm]	Margin [dB]
1710.70	1.4	QPSK	Standard	1 / 5	12.77	9.28	V	22.05	30.000	-7.95
1732.50	1.4	QPSK	Standard	3 / 2	13.07	9.00	V	22.07	30.000	-7.93
1754.30	1.4	QPSK	Standard	1 / 5	12.70	8.72	V	21.42	30.000	-8.58
1710.70	1.4	16-QAM	Standard	1 / 5	11.74	9.28	V	21.02	30.000	-8.98
1732.50	1.4	16-QAM	Standard	3 / 2	12.19	9.00	V	21.19	30.000	-8.81
1754.30	1.4	16-QAM	Standard	1 / 5	11.75	8.72	V	20.47	30.000	-9.53
1711.50	3	QPSK	Standard	1 / 14	13.23	9.27	V	22.50	30.000	-7.50
1732.50	3	QPSK	Standard	1 / 14	13.65	9.00	V	22.65	30.000	-7.35
1753.50	3	QPSK	Standard	1 / 14	13.20	8.73	V	21.93	30.000	-8.07
1711.50	3	16-QAM	Standard	1 / 14	12.36	9.27	V	21.63	30.000	-8.37
1732.50	3	16-QAM	Standard	1 / 14	12.61	9.00	V	21.61	30.000	-8.39
1753.50	3	16-QAM	Standard	1 / 14	12.32	8.73	V	21.05	30.000	-8.95
1712.50	5	QPSK	Standard	1 / 0	13.34	9.26	V	22.60	30.000	-7.40
1732.50	5	QPSK	Standard	1 / 24	12.31	9.00	V	21.31	30.000	-8.69
1752.50	5	QPSK	Standard	1 / 24	12.27	8.74	V	21.01	30.000	-8.99
1712.50	5	16-QAM	Standard	1 / 0	12.15	9.26	V	21.41	30.000	-8.59
1732.50	5	16-QAM	Standard	1 / 24	11.22	9.00	V	20.22	30.000	-9.78
1752.50	5	16-QAM	Standard	1 / 24	11.15	8.74	V	19.89	30.000	-10.11
1715.00	10	QPSK	Standard	1 / 0	13.04	9.22	V	22.26	30.000	-7.74
1732.50	10	QPSK	Standard	1 / 0	12.97	9.00	V	21.97	30.000	-8.03
1750.00	10	QPSK	Standard	1 / 0	12.38	8.77	V	21.15	30.000	-8.85
1715.00	10	16-QAM	Standard	1 / 0	11.97	9.22	V	21.19	30.000	-8.81
1732.50	10	16-QAM	Standard	1 / 0	12.09	9.00	V	21.09	30.000	-8.91
1750.00	10	16-QAM	Standard	1 / 0	11.30	8.77	V	20.07	30.000	-9.93
1717.50	15	QPSK	Standard	1 / 0	13.49	9.19	V	22.68	30.000	-7.32
1732.50	15	QPSK	Standard	1 / 74	13.07	9.00	V	22.07	30.000	-7.93
1747.50	15	QPSK	Standard	1 / 0	12.68	8.80	V	21.48	30.000	-8.52
1717.50	15	16-QAM	Standard	1 / 0	12.51	9.19	V	21.70	30.000	-8.30
1732.50	15	16-QAM	Standard	1 / 74	12.08	9.00	V	21.08	30.000	-8.92
1747.50	15	16-QAM	Standard	1 / 0	11.52	8.80	V	20.32	30.000	-9.68
1720.00	20	QPSK	Standard	1 / 99	13.39	9.16	V	22.55	30.000	-7.45
1732.50	20	QPSK	Standard	1 / 0	13.57	9.00	V	22.57	30.000	-7.43
1745.00	20	QPSK	Standard	1 / 0	13.34	8.83	V	22.17	30.000	-7.83
1720.00	20	16-QAM	Standard	1 / 99	12.06	9.16	V	21.22	30.000	-8.78
1732.50	20	16-QAM	Standard	1 / 0	12.36	9.00	V	21.36	30.000	-8.64
1745.00	20	16-QAM	Standard	1 / 0	12.22	8.83	V	21.05	30.000	-8.95

Table 6-5. EIRP Data (Band 4)

FCC ID: ACJ9TGWW13B		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1412152302.ACJ	Test Dates: 12/10/2014 - 1/7/2015, 3/18/2015	EUT Type: Wireless Network Adapter	Page 40 of 52	

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Battery	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBi]	Ant. Pol. [H/V]	EIRP [dBm]	EIRP Limit [dBm]	Margin [dB]
1850.70	1.4	QPSK	Standard	1 / 0	14.24	8.34	V	22.58	33.01	-10.43
1882.50	1.4	QPSK	Standard	1 / 0	14.66	8.47	V	23.13	33.01	-9.88
1914.30	1.4	QPSK	Standard	1 / 0	13.80	8.70	V	22.50	33.01	-10.51
1850.70	1.4	16-QAM	Standard	1 / 0	13.42	8.34	V	21.76	33.01	-11.25
1882.50	1.4	16-QAM	Standard	1 / 0	13.85	8.47	V	22.32	33.01	-10.69
1914.30	1.4	16-QAM	Standard	1 / 0	13.72	8.70	V	22.42	33.01	-10.59
1851.50	3	QPSK	Standard	1 / 0	14.11	8.35	V	22.46	33.01	-10.55
1882.50	3	QPSK	Standard	1 / 0	13.87	8.47	V	22.34	33.01	-10.67
1913.50	3	QPSK	Standard	1 / 0	13.67	8.69	V	22.36	33.01	-10.65
1851.50	3	16-QAM	Standard	1 / 0	12.97	8.35	V	21.32	33.01	-11.69
1882.50	3	16-QAM	Standard	1 / 0	12.66	8.47	V	21.13	33.01	-11.88
1913.50	3	16-QAM	Standard	1 / 0	12.79	8.69	V	21.48	33.01	-11.53
1852.50	5	QPSK	Standard	12 / 6	13.41	8.35	V	21.76	33.01	-11.25
1882.50	5	QPSK	Standard	12 / 6	13.47	8.47	V	21.94	33.01	-11.07
1912.50	5	QPSK	Standard	1 / 0	13.63	8.68	V	22.31	33.01	-10.70
1852.50	5	16-QAM	Standard	12 / 6	12.45	8.35	V	20.80	33.01	-12.21
1882.50	5	16-QAM	Standard	12 / 6	12.48	8.47	V	20.95	33.01	-12.06
1912.50	5	16-QAM	Standard	1 / 0	12.47	8.68	V	21.15	33.01	-11.86
1855.00	10	QPSK	Standard	1 / 49	13.66	8.36	V	22.02	33.01	-10.99
1882.50	10	QPSK	Standard	1 / 49	15.00	8.47	V	23.47	33.01	-9.54
1910.00	10	QPSK	Standard	1 / 49	14.80	8.65	V	23.45	33.01	-9.56
1855.00	10	16-QAM	Standard	1 / 49	12.60	8.36	V	20.96	33.01	-12.05
1882.50	10	16-QAM	Standard	1 / 49	14.07	8.47	V	22.54	33.01	-10.47
1910.00	10	16-QAM	Standard	1 / 49	13.78	8.65	V	22.43	33.01	-10.58
1857.50	15	QPSK	Standard	1 / 74	14.37	8.37	V	22.74	33.01	-10.27
1882.50	15	QPSK	Standard	1 / 0	15.02	8.47	V	23.49	33.01	-9.52
1907.50	15	QPSK	Standard	1 / 0	14.14	8.62	V	22.76	33.01	-10.25
1857.50	15	16-QAM	Standard	1 / 74	13.28	8.37	V	21.65	33.01	-11.36
1882.50	15	16-QAM	Standard	1 / 0	13.92	8.47	V	22.39	33.01	-10.62
1907.50	15	16-QAM	Standard	1 / 0	13.27	8.62	V	21.89	33.01	-11.12
1860.00	20	QPSK	Standard	1 / 99	14.75	8.38	V	23.13	33.01	-9.88
1882.50	20	QPSK	Standard	1 / 0	14.97	8.47	V	23.44	33.01	-9.57
1905.00	20	QPSK	Standard	1 / 0	14.56	8.59	V	23.15	33.01	-9.86
1860.00	20	16-QAM	Standard	1 / 99	13.74	8.38	V	22.12	33.01	-10.89
1882.50	20	16-QAM	Standard	1 / 0	14.02	8.47	V	22.49	33.01	-10.52
1905.00	20	16-QAM	Standard	1 / 0	13.81	8.59	V	22.40	33.01	-10.61

Table 6-6. EIRP Data (Band 2/25)

FCC ID: ACJ9TGWW13B		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1412152302.ACJ	Test Dates: 12/10/2014 - 1/7/2015, 3/18/2015	EUT Type: Wireless Network Adapter	Page 41 of 52	

6.6 Radiated Spurious Emissions Measurements

§2.1053 §22.917(a) §24.238(a) §27.53(c) §27.53(f) §27.53(g) §27.53(h)

Test Overview

Radiated spurious emissions measurements are performed using the substitution method described in ANSI/TIA-603-C-2004 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and horizontally polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as peak measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 v02r02 – Section 5.8

ANSI/TIA-603-C-2004 – Section 2.2.12

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW \geq 3 x RBW
3. Span = 1.5 times the OBW
4. No. of sweep points \geq 2 x span / RBW
5. Detector = Peak
6. Trace mode = max hold
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

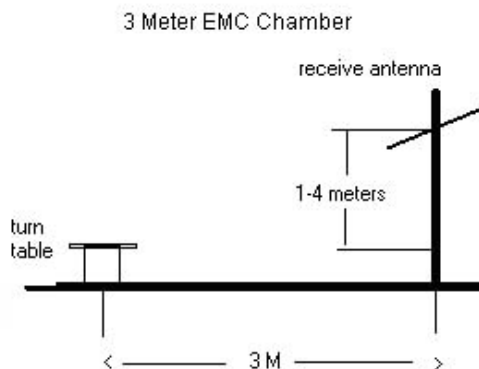




Figure 6-5. Test Instrument & Measurement Setup

FCC ID: ACJ9TGWW13B		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1412152302.ACJ	Test Dates: 12/10/2014 - 1/7/2015, 3/18/2015	EUT Type: Wireless Network Adapter		Page 42 of 52



Test Notes

- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning.
- 2) This unit was tested with its standard battery.
- 3) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 4) Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- 5) Worst case emissions are reported while using 1 RB with 0 RB offset.

OPERATING FREQUENCY: 709.00 MHz
 CHANNEL: 23780
 MEASURED OUTPUT POWER: 13.94 dBm = 0.025 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 26.94 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
1418.00	-43.01	5.77	-37.24	V	51.2
2127.00	-41.49	6.76	-34.73	V	48.7
2836.00	-56.68	7.80	-48.88	V	62.8
3545.00	-59.74	7.62	-52.12	V	66.1
4254.00	-61.30	8.46	-52.84	V	66.8
4963.00	-62.10	8.77	-53.33	V	67.3
5672.00	-62.66	9.01	-53.65	V	67.6
6381.00	-62.60	9.69	-52.91	V	66.9

Table 6-7. Radiated Spurious Data (Band 17 – Low Channel)

FCC ID: ACJ9TGWW13B		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1412152302.ACJ	Test Dates: 12/10/2014 - 1/7/2015, 3/18/2015	EUT Type: Wireless Network Adapter		Page 43 of 52

OPERATING FREQUENCY: 710.00 MHz
 CHANNEL: 23790
 MEASURED OUTPUT POWER: 14.27 dBm = 0.027 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 27.27 dBc



Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
1420.00	-42.08	5.78	-36.30	V	50.6
2130.00	-41.20	6.78	-34.42	V	48.7
2840.00	-57.97	7.79	-50.17	V	64.4
3550.00	-58.98	7.63	-51.36	V	65.6
4260.00	-64.04	8.48	-55.57	V	69.8
4970.00	-62.46	8.78	-53.69	V	68.0
5680.00	-61.71	9.04	-52.68	V	66.9

Table 6-8. Radiated Spurious Data (Band 17 – Mid Channel)

OPERATING FREQUENCY: 711.00 MHz
 CHANNEL: 23800
 MEASURED OUTPUT POWER: 14.55 dBm = 0.029 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 27.55 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
1422.00	-45.88	5.79	-40.09	V	54.6
2133.00	-43.27	6.80	-36.48	V	51.0
2844.00	-57.32	7.79	-49.53	V	64.1
3555.00	-60.21	7.63	-52.58	V	67.1
4266.00	-63.95	8.50	-55.45	V	70.0
4977.00	-63.68	8.78	-54.90	V	69.5
5688.00	-62.69	9.06	-53.63	V	68.2

Table 6-9. Radiated Spurious Data (Band 17 – High Channel)

FCC ID: ACJ9TGWW13B		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1412152302.ACJ	Test Dates: 12/10/2014 - 1/7/2015, 3/18/2015	EUT Type: Wireless Network Adapter	Page 44 of 52	

OPERATING FREQUENCY: 779.50 MHz
 CHANNEL: 23205
 MEASURED OUTPUT POWER: 16.44 dBm = 0.044 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 29.44 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
2338.50	-55.99	7.25	-48.73	V	65.2
3118.00	-61.25	7.26	-53.99	V	70.4
3897.50	-58.78	7.14	-51.64	V	68.1
4677.00	-66.58	8.74	-57.84	V	74.3
5456.50	-62.57	8.49	-54.09	V	70.5
6236.00	-62.15	9.26	-52.89	V	69.3

Table 6-10. Radiated Spurious Data (Band 13 – Low Channel)

OPERATING FREQUENCY: 782.00 MHz
 CHANNEL: 23230
 MEASURED OUTPUT POWER: 16.49 dBm = 0.045 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 29.49 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
1564.00	-52.98	6.48	-46.50	V	63.0
2346.00	-50.42	7.24	-43.18	V	59.7
3128.00	-64.75	7.27	-57.48	V	74.0
3910.00	-60.95	7.18	-53.77	V	70.3
4692.00	-66.21	8.73	-57.48	V	74.0
5474.00	-61.82	8.50	-53.31	V	69.8
6256.00	-61.70	9.29	-52.40	V	68.9

Table 6-11. Radiated Spurious Data (Band 13 – Mid Channel)

FCC ID: ACJ9TGWW13B		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1412152302.ACJ	Test Dates: 12/10/2014 - 1/7/2015, 3/18/2015	EUT Type: Wireless Network Adapter		Page 45 of 52

OPERATING FREQUENCY: 784.50 MHz
 CHANNEL: 23255
 MEASURED OUTPUT POWER: 17.04 dBm = 0.051 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 30.04 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
2353.50	-54.84	7.23	-47.62	V	64.7
3138.00	-60.68	7.28	-53.39	V	70.4
3922.50	-58.17	7.23	-50.93	V	68.0
4707.00	-66.25	8.72	-57.53	V	74.6
5491.50	-61.74	8.52	-53.22	V	70.3
6276.00	-62.19	9.33	-52.86	V	69.9

Table 6-12. Radiated Spurious Data (Band 13 – High Channel)

OPERATING FREQUENCY: 782.00 MHz
 CHANNEL: 23230
 MEASURED OUTPUT POWER: 16.49 dBm = 0.045 W
 MODULATION SIGNAL: QPSK
 DISTANCE: 3 meters
 JARROWBAND EMISSION LIMIT: -50 dBm
 WIDEBAND EMISSION LIMIT: -40 dBm/MHz

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	Margin [dB]
1564.00	-52.98	6.48	-46.50	V	-6.50

Table 6-11b. Radiated Spurious Data In the 1559 – 1610MHz GPS Band (Band 13)

OPERATING FREQUENCY: 829.00 MHz
 CHANNEL: 20450
 MEASURED OUTPUT POWER: 18.07 dBm = 0.064 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 31.07 dBc



Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
1658.00	-49.82	6.59	-43.23	V	61.3
2487.00	-53.27	7.31	-45.97	V	64.0
3316.00	-59.40	7.40	-52.00	V	70.1
4145.00	-61.90	8.14	-53.76	V	71.8
4974.00	-63.50	8.78	-54.72	V	72.8
5803.00	-62.32	9.27	-53.06	V	71.1
6632.00	-60.86	9.80	-51.06	V	69.1

Table 6-13. Radiated Spurious Data (Band 5 – Low Channel)

OPERATING FREQUENCY: 836.50 MHz
 CHANNEL: 20525
 MEASURED OUTPUT POWER: 17.79 dBm = 0.060 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 30.79 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
1673.00	-51.46	6.59	-44.87	V	62.7
2509.50	-52.67	7.34	-45.34	V	63.1
3346.00	-56.42	7.45	-48.96	V	66.8
4182.50	-61.05	8.25	-52.80	V	70.6
5019.00	-62.38	8.76	-53.62	V	71.4
5855.50	-62.89	9.30	-53.58	V	71.4
6692.00	-61.46	9.66	-51.80	V	69.6

Table 6-14. Radiated Spurious Data (Band 5 – Mid Channel)

FCC ID: ACJ9TGWW13B		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1412152302.ACJ	Test Dates: 12/10/2014 - 1/7/2015, 3/18/2015	EUT Type: Wireless Network Adapter	Page 47 of 52	

OPERATING FREQUENCY: 844.00 MHz
 CHANNEL: 20600
 MEASURED OUTPUT POWER: 17.05 dBm = 0.051 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 30.05 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
1688.00	-49.74	6.58	-43.16	V	60.2
2532.00	-56.15	7.36	-48.80	V	65.8
3376.00	-59.30	7.50	-51.79	V	68.8
4220.00	-64.22	8.36	-55.86	V	72.9
5064.00	-64.26	8.66	-55.60	V	72.7
5908.00	-62.68	9.32	-53.36	V	70.4

Table 6-15. Radiated Spurious Data (Band 5 – High Channel)

OPERATING FREQUENCY: 1717.50 MHz
 CHANNEL: 20025
 MEASURED OUTPUT POWER: 22.68 dBm = 0.185 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 15.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 35.68 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
3435.00	-45.38	9.69	-35.69	H	58.4
5152.50	-60.81	10.65	-50.16	H	72.8
6870.00	-62.70	11.74	-50.95	H	73.6
8587.50	-57.79	11.04	-46.75	H	69.4
10305.00	-60.13	12.30	-47.83	H	70.5

Table 6-16. Radiated Spurious Data (Band 4 – Low Channel)

OPERATING FREQUENCY: 1732.50 MHz
 CHANNEL: 20175
 MEASURED OUTPUT POWER: 22.07 dBm = 0.161 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 15.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 35.07 dBc



Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
3465.00	-48.11	9.71	-38.41	H	60.5
5197.50	-60.51	10.59	-49.93	H	72.0
6930.00	-63.42	11.75	-51.67	H	73.7
8662.50	-57.96	11.06	-46.89	H	69.0
10395.00	-59.69	12.37	-47.31	H	69.4

Table 6-17. Radiated Spurious Data (Band 4 – Mid Channel)

OPERATING FREQUENCY: 1747.50 MHz
 CHANNEL: 20325
 MEASURED OUTPUT POWER: 21.48 dBm = 0.141 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 15.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 34.48 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
3495.00	-47.78	9.72	-38.06	H	59.5
5242.50	-60.81	10.62	-50.18	H	71.7
6990.00	-62.13	11.76	-50.37	H	71.9
8737.50	-58.19	11.03	-47.16	H	68.6
10485.00	-60.91	12.46	-48.45	H	69.9

Table 6-18. Radiated Spurious Data (Band 4 – High Channel)

FCC ID: ACJ9TGWW13B		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1412152302.ACJ	Test Dates: 12/10/2014 - 1/7/2015, 3/18/2015	EUT Type: Wireless Network Adapter	Page 49 of 52	

OPERATING FREQUENCY: 1855.00 MHz
 CHANNEL: 26090
 MEASURED OUTPUT POWER: 22.02 dBm = 0.159 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 35.02 dBc



Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
3710.00	-70.37	7.96	-62.41	V	84.4
5565.00	-76.65	21.29	-55.36	V	77.4
7420.00	-86.61	11.95	-74.67	V	96.7
9275.00	-85.72	9.87	-75.85	V	97.9
11130.00	-58.76	12.79	-45.96	V	68.0

Table 6-19. Radiated Spurious Data (Band 25 – Low Channel)

OPERATING FREQUENCY: 1882.50 MHz
 CHANNEL: 26365
 MEASURED OUTPUT POWER: 23.47 dBm = 0.222 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 36.47 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
3765.00	-71.15	8.47	-62.68	V	86.1
5647.50	-76.42	22.33	-54.10	V	77.6
7530.00	-87.26	12.39	-74.87	V	98.3
9412.50	-84.32	9.05	-75.27	V	98.7
11295.00	-57.96	12.71	-45.25	V	68.7



Table 6-20. Radiated Spurious Data (Band 25 – Mid Channel)

FCC ID: ACJ9TGWW13B		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1412152302.ACJ	Test Dates: 12/10/2014 - 1/7/2015, 3/18/2015	EUT Type: Wireless Network Adapter	Page 50 of 52	

OPERATING FREQUENCY: 1910.00 MHz
 CHANNEL: 26615
 MEASURED OUTPUT POWER: 23.45 dBm = 0.221 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 36.45 dBc



Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
5730.00	-77.06	22.83	-54.23	V	77.7
7640.00	-87.10	12.36	-74.74	V	98.2
9550.00	-84.32	7.70	-76.62	V	100.1
11460.00	-58.55	12.72	-45.83	V	69.3

Table 6-21. Radiated Spurious Data (Band 25 – High Channel)

FCC ID: ACJ9TGWW13B		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1412152302.ACJ	Test Dates: 12/10/2014 - 1/7/2015, 3/18/2015	EUT Type: Wireless Network Adapter	Page 51 of 52	

7.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Panasonic Wireless Network Adapter FCC ID: ACJ9TGWW13B** complies with all the requirements of Parts 22, 24, & 27 of the FCC rules for LTE operation only.

FCC ID: ACJ9TGWW13B		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1412152302.ACJ	Test Dates: 12/10/2014 - 1/7/2015, 3/18/2015	EUT Type: Wireless Network Adapter		Page 52 of 52