


## 14.8 SAR test plots for CDMA Band 1

### BC1 1xRTT Main Ant. Rear 0mm Reduced power 1851.25MHz

Communication System: UID 0, CDMA2000 (0); Communication System Band: US PCS (BC1);  
Frequency: 1851.25 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 1851.25$  MHz;  $\sigma = 1.522$  S/m;  $\epsilon_r = 52.489$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section  
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)  
DASY5 Configuration  
Probe: EX3DV4 - SN3917; ConvF(7.62, 7.62, 7.62); Calibrated: 2013/05/14;  
Sensor-Surface: 2mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1369; Calibrated: 2013/05/13  
Phantom: ELI v5.0 SN1203; Type: QDOVA002AA; Serial: TP:1203  
Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Area Scan (61x101x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm  
Maximum value of SAR (interpolated) = 0.335 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm  
Reference Value = 16.279 V/m; Power Drift = -0.13 dB  
Peak SAR (extrapolated) = 0.491 W/kg  
**SAR(1 g) = 0.287 W/kg; SAR(10 g) = 0.154 W/kg**  
Maximum value of SAR (measured) = 0.392 W/kg

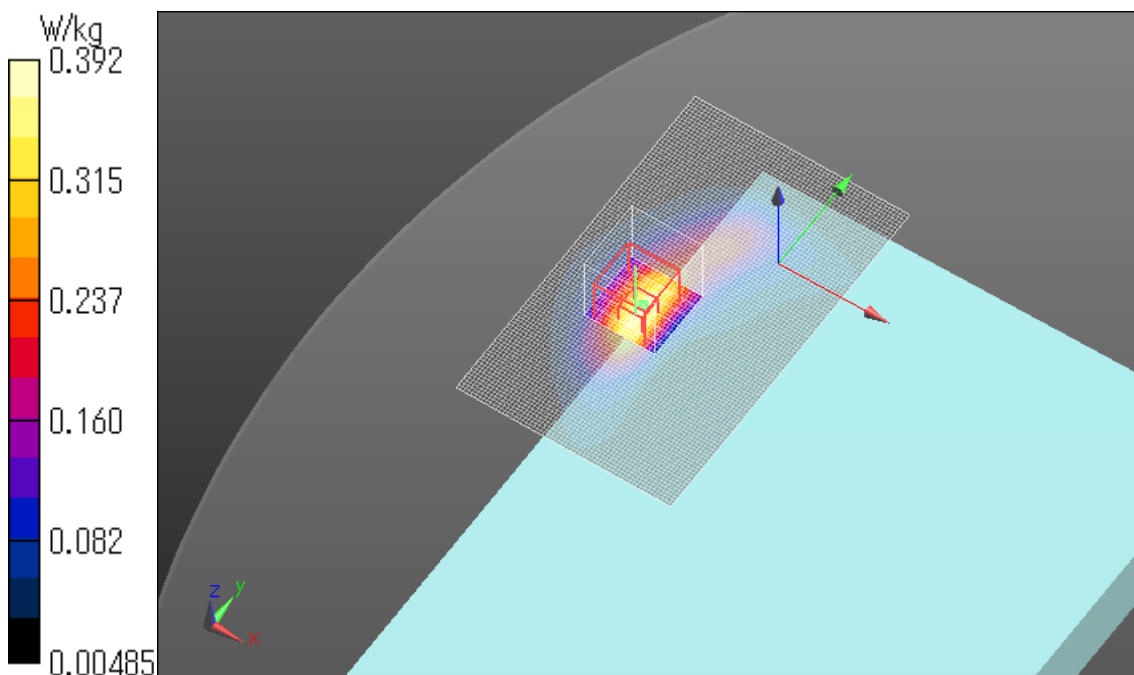


**BC1 1xEV-DO Rel.0 Main Ant. Rear 0mm Reduced power 1851.25MHz**

Communication System: UID 0, CDMA2000 (0); Communication System Band: US PCS (BC1);  
Frequency: 1851.25 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 1851.25$  MHz;  $\sigma = 1.522$  S/m;  $\epsilon_r = 52.489$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section  
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)  
DASY5 Configuration  
Probe: EX3DV4 - SN3917; ConvF(7.62, 7.62, 7.62); Calibrated: 2013/05/14;  
Sensor-Surface: 2mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1369; Calibrated: 2013/05/13  
Phantom: ELI v5.0 SN1203; Type: QDOVA002AA; Serial: TP:1203  
Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.356 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 16.211 V/m; Power Drift = -0.11 dB  
Peak SAR (extrapolated) = 0.505 W/kg  
**SAR(1 g) = 0.293 W/kg; SAR(10 g) = 0.157 W/kg**  
Maximum value of SAR (measured) = 0.389 W/kg

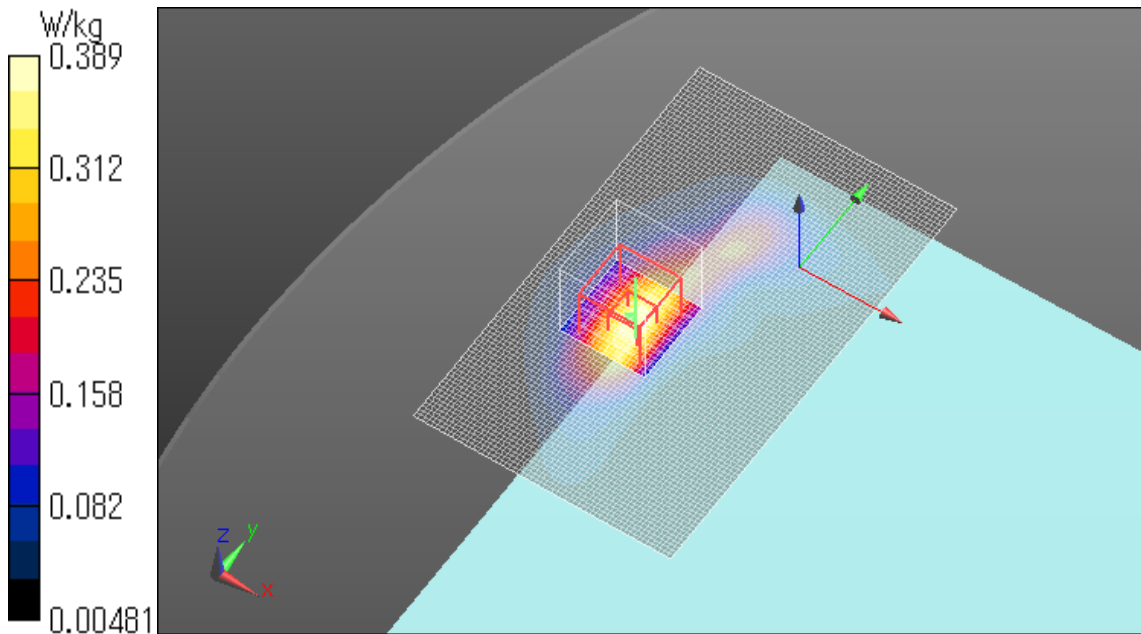


**BC1 1xRTT Main Ant edge1 0mm Reduced power 1851.25MHz**

Communication System: UID 0, CDMA2000 (0); Communication System Band: US PCS (BC1);  
Frequency: 1851.25 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 1851.25$  MHz;  $\sigma = 1.522$  S/m;  $\epsilon_r = 52.489$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section  
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)  
DASY5 Configuration  
Probe: EX3DV4 - SN3917; ConvF(7.62, 7.62, 7.62); Calibrated: 2013/05/14;  
Sensor-Surface: 2mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1369; Calibrated: 2013/05/13  
Phantom: ELI v5.0 SN1203; Type: QDOVA002AA; Serial: TP:1203  
Measurement SW: DASYS2, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Area Scan (51x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 1.63 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 33.080 V/m; Power Drift = -0.02 dB  
Peak SAR (extrapolated) = 2.16 W/kg  
**SAR(1 g) = 1.03 W/kg; SAR(10 g) = 0.491 W/kg**  
Maximum value of SAR (measured) = 1.60 W/kg

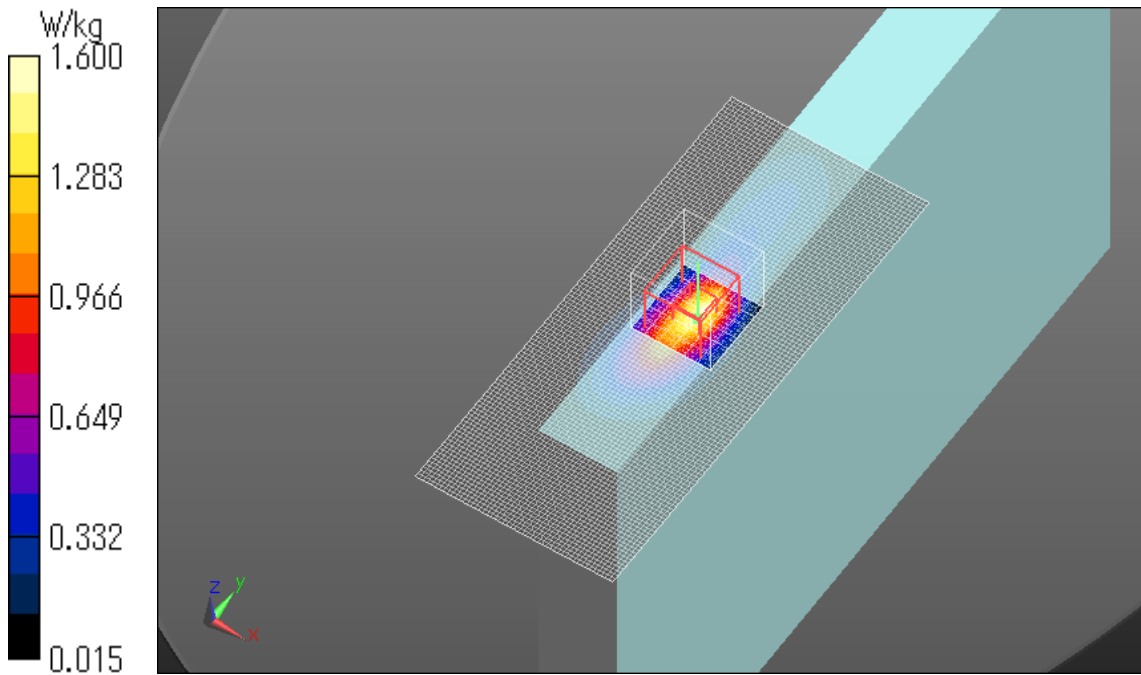

**BC1 1xRTT Main Ant edge1 0mm Reduced power 1851.25MHz**

Communication System: UID 0, CDMA2000 (0); Communication System Band: US PCS (BC1);  
Frequency: 1851.25 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 1851.25$  MHz;  $\sigma = 1.522$  S/m;  $\epsilon_r = 52.489$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section  
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)  
DASY5 Configuration  
Probe: EX3DV4 - SN3917; ConvF(7.62, 7.62, 7.62); Calibrated: 2013/05/14;  
Sensor-Surface: 2mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1369; Calibrated: 2013/05/13  
Phantom: ELI v5.0 SN1203; Type: QDOVA002AA; Serial: TP:1203  
Measurement SW: DASYS2, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Z Scan (1x1x31):** Measurement grid: dx=20mm, dy=20mm, dz=5mm  
Maximum value of SAR (measured) = 1.61 W/kg

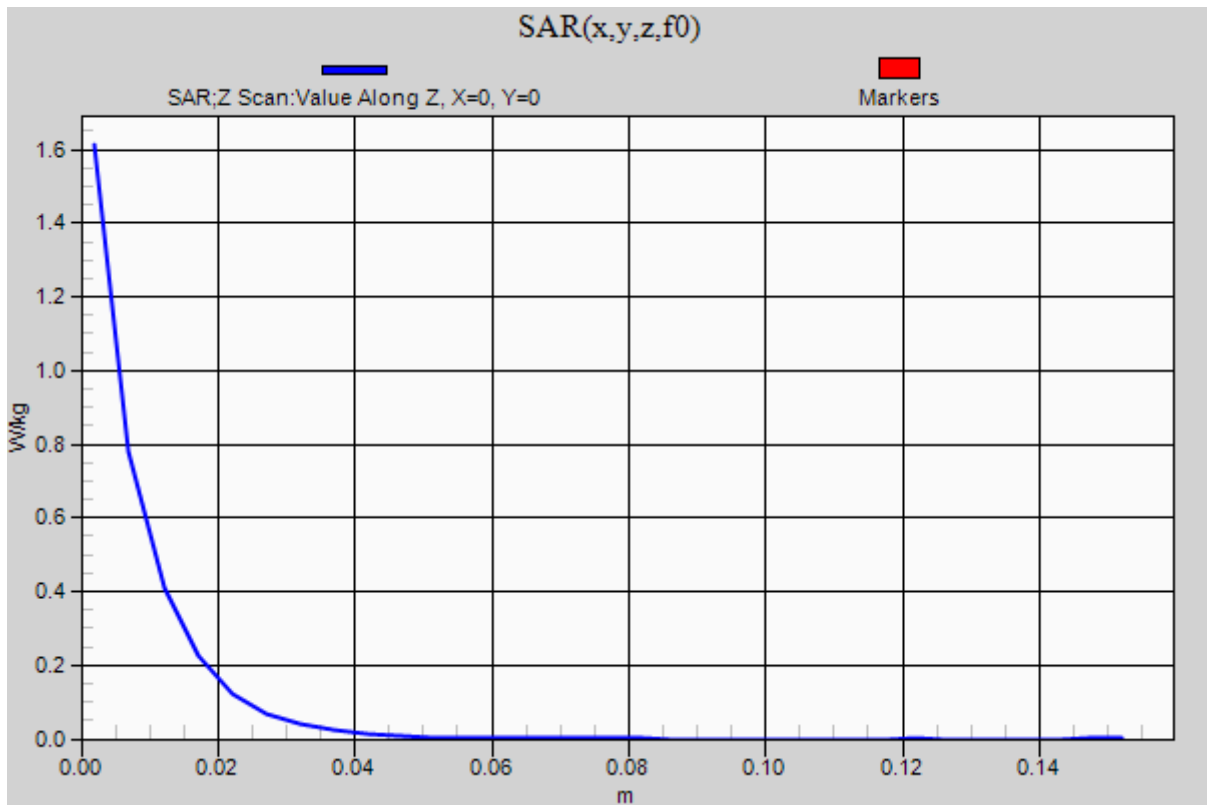


**BC1 1xRTT Main Ant. Edge1 0mm Reduced power 1880MHz**

Communication System: UID 0, CDMA2000 (0); Communication System Band: US PCS (BC1);  
Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.555$  S/m;  $\epsilon_r = 52.379$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section  
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)  
DASY5 Configuration  
Probe: EX3DV4 - SN3917; ConvF(7.62, 7.62, 7.62); Calibrated: 2013/05/14;  
Sensor-Surface: 2mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1369; Calibrated: 2013/05/13  
Phantom: ELI v5.0 SN1203; Type: QDOVA002AA; Serial: TP:1203  
Measurement SW: DASYS2, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Area Scan (51x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 1.47 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 31.645 V/m; Power Drift = -0.06 dB  
Peak SAR (extrapolated) = 1.95 W/kg  
**SAR(1 g) = 0.938 W/kg; SAR(10 g) = 0.450 W/kg**  
Maximum value of SAR (measured) = 1.42 W/kg

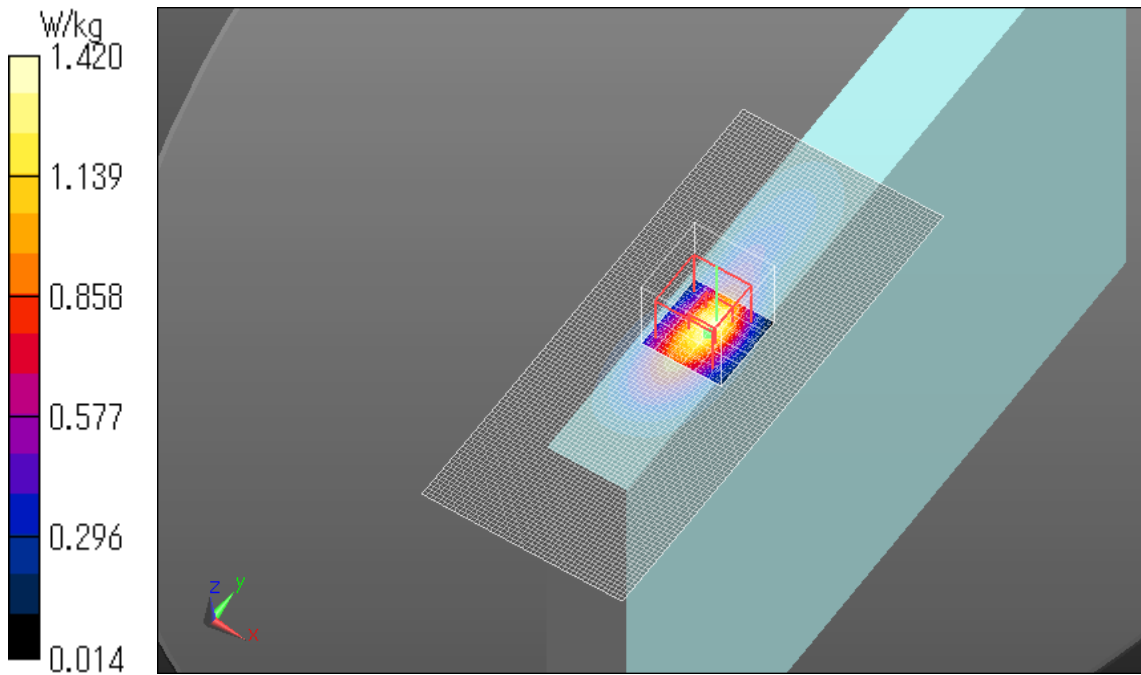


**BC1 1xRTT Main Ant. Edge1 0mm Reduced power 1908.75MHz**

Communication System: UID 0, CDMA2000 (0); Communication System Band: US PCS (BC1);  
Frequency: 1908.75 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 1908.75$  MHz;  $\sigma = 1.585$  S/m;  $\epsilon_r = 52.253$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section  
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)  
DASY5 Configuration  
Probe: EX3DV4 - SN3917; ConvF(7.62, 7.62, 7.62); Calibrated: 2013/05/14;  
Sensor-Surface: 2mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1369; Calibrated: 2013/05/13  
Phantom: ELI v5.0 SN1203; Type: QDOVA002AA; Serial: TP:1203  
Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Area Scan (51x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 1.50 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 31.566 V/m; Power Drift = -0.01 dB  
Peak SAR (extrapolated) = 2.08 W/kg  
**SAR(1 g) = 0.988 W/kg; SAR(10 g) = 0.463 W/kg**  
Maximum value of SAR (measured) = 1.55 W/kg

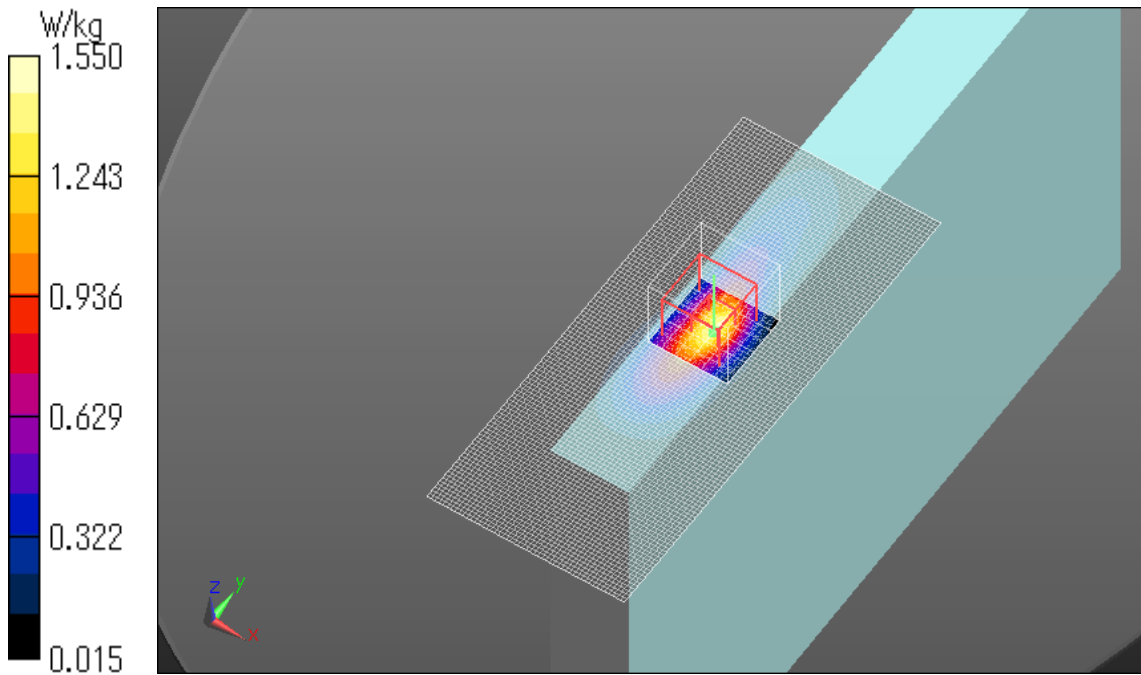


**BC1 1xEV-DO Rel.0 Main Ant. Edge1 0mm Reduced power 1851.25MHz**

Communication System: UID 0, CDMA2000 (0); Communication System Band: US PCS (BC1);  
Frequency: 1851.25 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 1851.25$  MHz;  $\sigma = 1.522$  S/m;  $\epsilon_r = 52.489$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section  
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)  
DASY5 Configuration  
Probe: EX3DV4 - SN3917; ConvF(7.62, 7.62, 7.62); Calibrated: 2013/05/14;  
Sensor-Surface: 2mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1369; Calibrated: 2013/05/13  
Phantom: ELI v5.0 SN1203; Type: QDOVA002AA; Serial: TP:1203  
Measurement SW: DASYS2, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Area Scan (51x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 1.65 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 31.715 V/m; Power Drift = 0.12 dB  
Peak SAR (extrapolated) = 2.12 W/kg  
**SAR(1 g) = 1.01 W/kg; SAR(10 g) = 0.487 W/kg**  
Maximum value of SAR (measured) = 1.56 W/kg

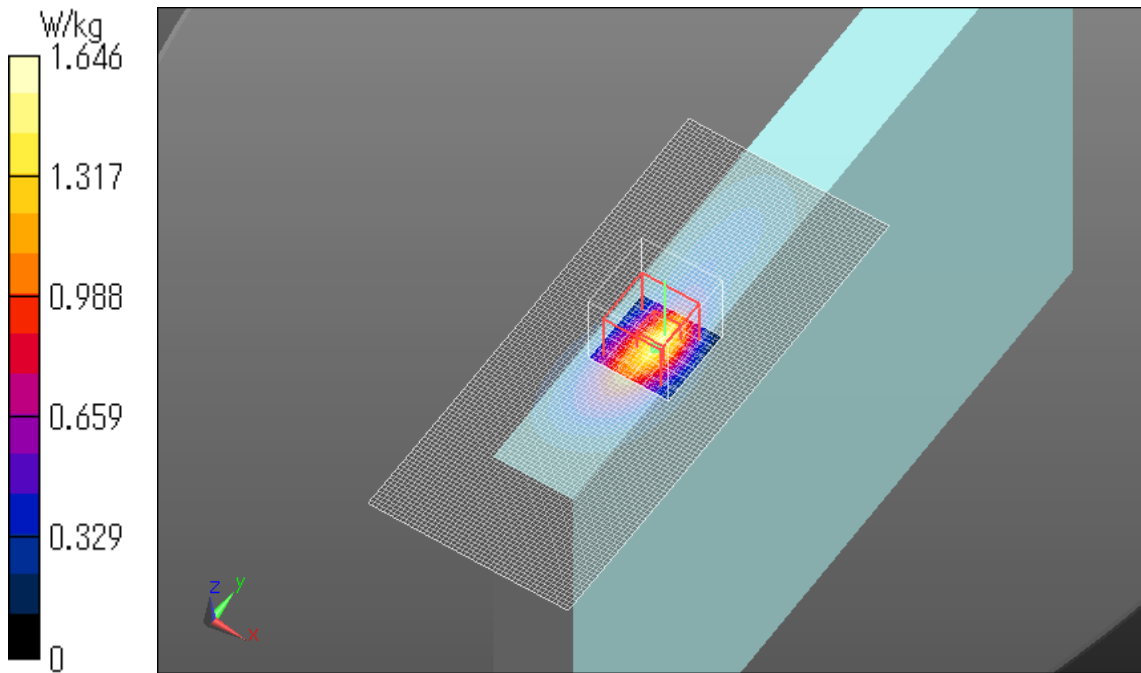


**BC1 1xEV-DO Rel.0 Main Ant. Edge1 0mm Reduced power 1880MHz**

Communication System: UID 0, CDMA2000 (0); Communication System Band: US PCS (BC1);  
Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.555$  S/m;  $\epsilon_r = 52.379$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section  
Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)  
DASY5 Configuration  
Probe: EX3DV4 - SN3917; ConvF(7.62, 7.62, 7.62); Calibrated: 2013/05/14;  
Sensor-Surface: 2mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1369; Calibrated: 2013/05/13  
Phantom: ELI v5.0 SN1203; Type: QDOVA002AA; Serial: TP:1203  
Measurement SW: DASYS2, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Area Scan (51x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 1.64 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 32.049 V/m; Power Drift = -0.02 dB  
Peak SAR (extrapolated) = 2.09 W/kg  
**SAR(1 g) = 0.998 W/kg; SAR(10 g) = 0.473 W/kg**  
Maximum value of SAR (measured) = 1.54 W/kg

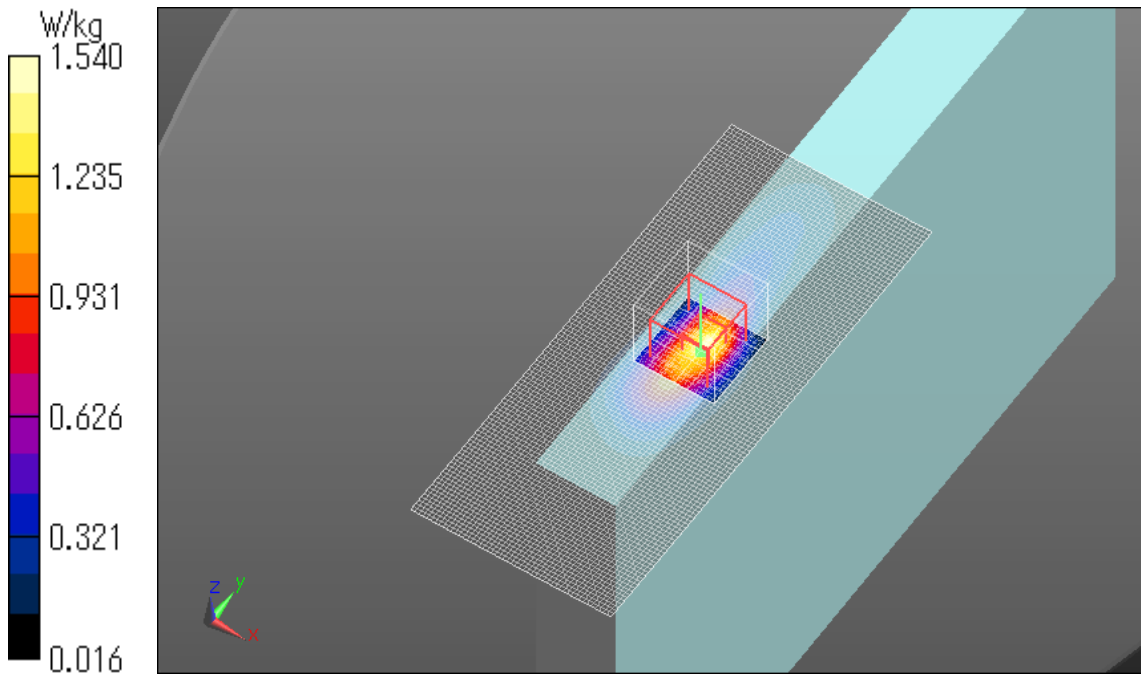


**BC1 1xEV-DO Rel.0 Main Ant. Edge1 0mm Reduced power 1908.75MHz**

Communication System: UID 0, CDMA2000 (0); Communication System Band: US PCS (BC1);  
Frequency: 1908.75 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 1908.75$  MHz;  $\sigma = 1.585$  S/m;  $\epsilon_r = 52.253$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section  
Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)  
DASY5 Configuration  
Probe: EX3DV4 - SN3917; ConvF(7.62, 7.62, 7.62); Calibrated: 2013/05/14;  
Sensor-Surface: 2mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1369; Calibrated: 2013/05/13  
Phantom: ELI v5.0 SN1203; Type: QDOVA002AA; Serial: TP:1203  
Measurement SW: DASYS2, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Area Scan (51x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 1.55 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 30.515 V/m; Power Drift = 0.18 dB  
Peak SAR (extrapolated) = 2.06 W/kg  
**SAR(1 g) = 0.985 W/kg; SAR(10 g) = 0.459 W/kg**  
Maximum value of SAR (measured) = 1.52 W/kg

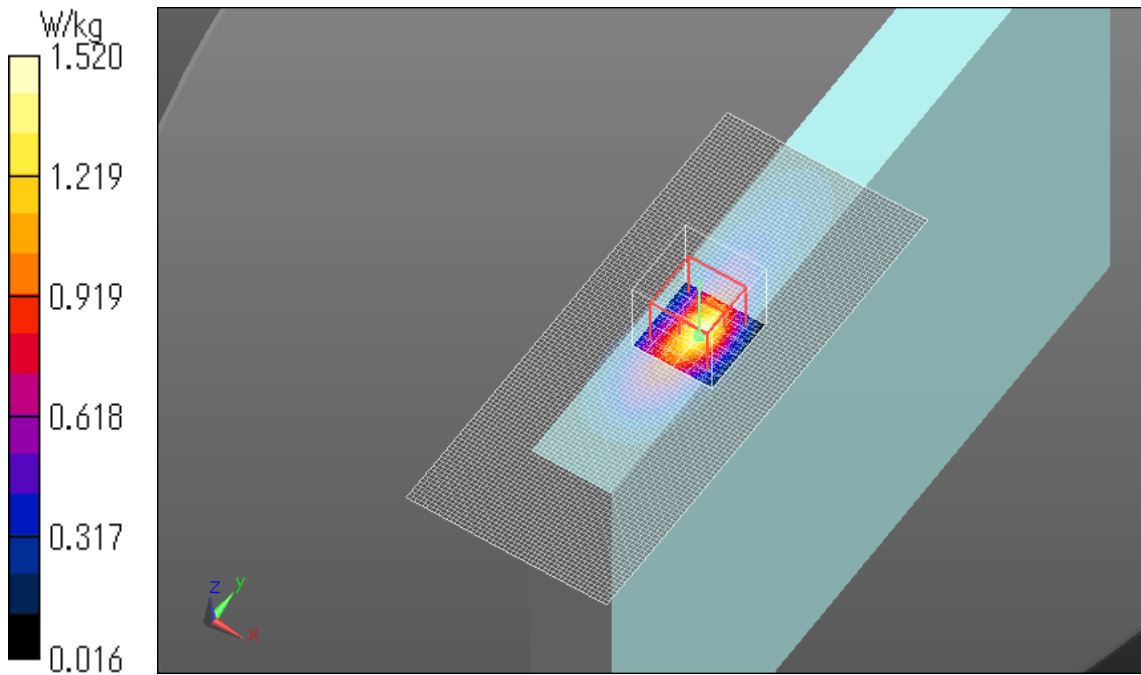


**BC1 1xRTT Main Ant. Rear 13mm Full power 1908.75MHz**

Communication System: UID 0, CDMA2000 (0); Communication System Band: US PCS (BC1);  
Frequency: 1908.75 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 1908.75$  MHz;  $\sigma = 1.585$  S/m;  $\epsilon_r = 52.253$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section  
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)  
DASY5 Configuration  
Probe: EX3DV4 - SN3917; ConvF(7.62, 7.62, 7.62); Calibrated: 2013/05/14;  
Sensor-Surface: 2mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1369; Calibrated: 2013/05/13  
Phantom: ELI v5.0 SN1203; Type: QDOVA002AA; Serial: TP:1203  
Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.382 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 15.481 V/m; Power Drift = 0.01 dB  
Peak SAR (extrapolated) = 0.445 W/kg  
**SAR(1 g) = 0.277 W/kg; SAR(10 g) = 0.165 W/kg**  
Maximum value of SAR (measured) = 0.366 W/kg

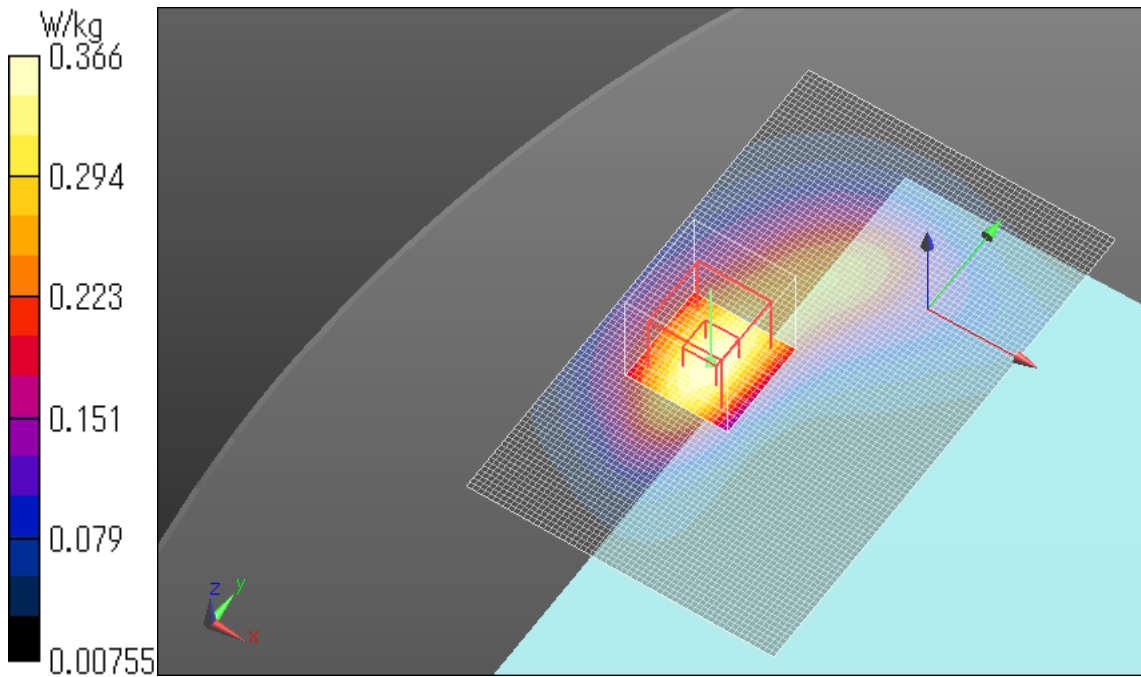

**BC1 1xEV-DO Rel.0 Main Ant. Rear 13mm Full power 1880MHz**

Communication System: UID 0, CDMA2000 (0); Communication System Band: US PCS (BC1);

Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.555$  S/m;  $\epsilon_r = 52.379$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3917; ConvF(7.62, 7.62, 7.62); Calibrated: 2013/05/14;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1369; Calibrated: 2013/05/13

Phantom: ELI v5.0 SN1203; Type: QDOVA002AA; Serial: TP:1203

Measurement SW: DASYS2, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.414 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.115 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.479 W/kg

**SAR(1 g) = 0.292 W/kg; SAR(10 g) = 0.172 W/kg**

Maximum value of SAR (measured) = 0.390 W/kg

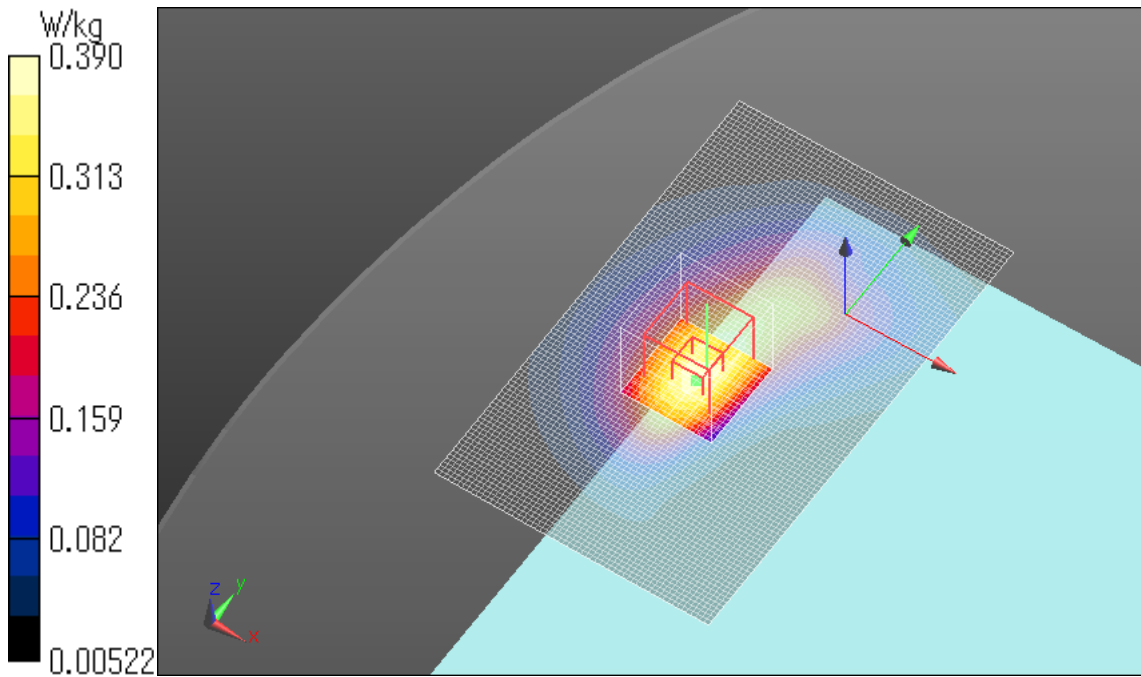


**BC1 1xRTT Main Ant. Edge1 21mm Full power 1908.75MHz**

Communication System: UID 0, CDMA2000 (0); Communication System Band: US PCS (BC1);  
Frequency: 1908.75 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 1908.75$  MHz;  $\sigma = 1.585$  S/m;  $\epsilon_r = 52.253$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section  
Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)  
DASY5 Configuration  
Probe: EX3DV4 - SN3917; ConvF(7.62, 7.62, 7.62); Calibrated: 2013/05/14;  
Sensor-Surface: 2mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1369; Calibrated: 2013/05/13  
Phantom: ELI v5.0 SN1203; Type: QDOVA002AA; Serial: TP:1203  
Measurement SW: DASYS2, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Area Scan (51x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.548 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 18.904 V/m; Power Drift = -0.06 dB  
Peak SAR (extrapolated) = 0.663 W/kg  
**SAR(1 g) = 0.413 W/kg; SAR(10 g) = 0.251 W/kg**  
Maximum value of SAR (measured) = 0.545 W/kg

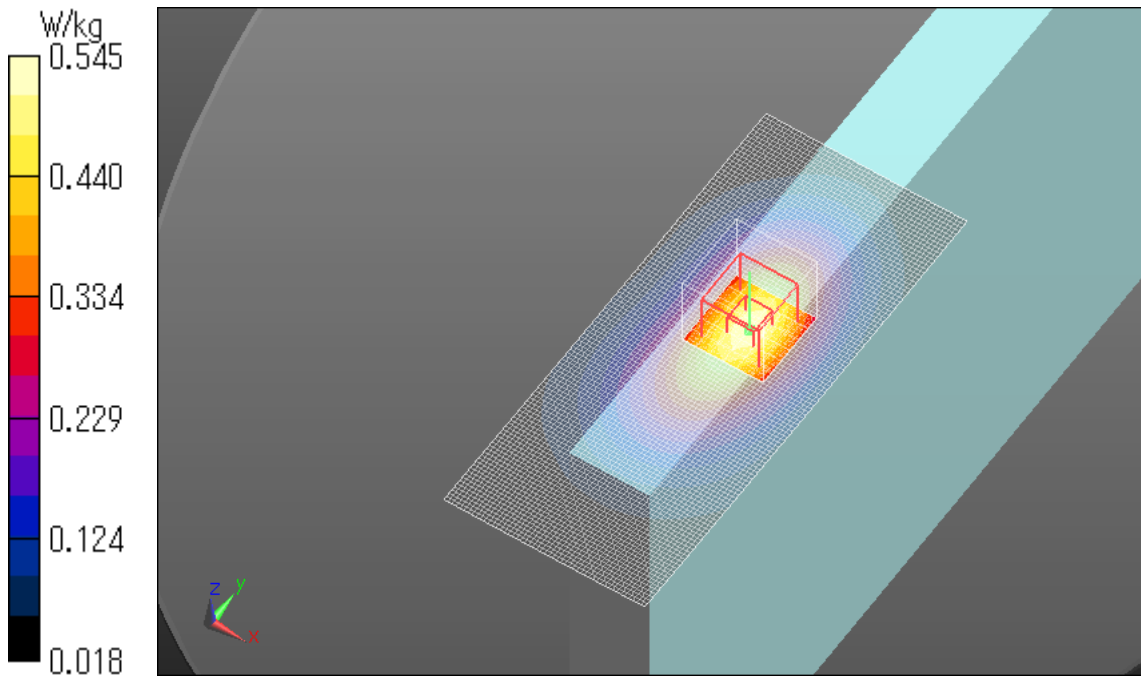

**Plot No.11**

**BC1 1xEV-DO Rel.0 Main Ant. Edge1 21mm Full power 1880MHz**

Communication System: UID 0, CDMA2000 (0); Communication System Band: US PCS (BC1);

Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.555$  S/m;  $\epsilon_r = 52.379$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3917; ConvF(7.62, 7.62, 7.62); Calibrated: 2013/05/14;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1369; Calibrated: 2013/05/13

Phantom: ELI v5.0 SN1203; Type: QDOVA002AA; Serial: TP:1203

Measurement SW: DASYS2, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Area Scan (51x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.684 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.262 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.821 W/kg

**SAR(1 g) = 0.506 W/kg; SAR(10 g) = 0.301 W/kg**

Maximum value of SAR (measured) = 0.672 W/kg

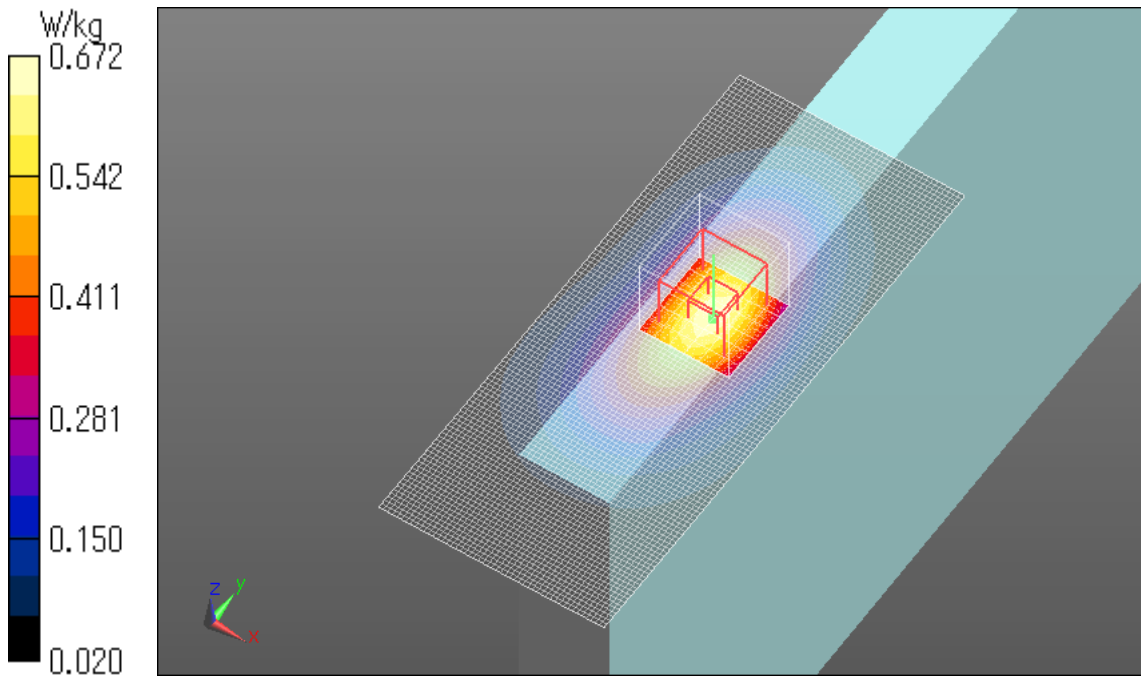


**BC1 1xRTT Main Ant. Edge4 0mm Full power 1908.75MHz**

Communication System: UID 0, CDMA2000 (0); Communication System Band: US PCS (BC1);  
Frequency: 1908.75 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 1908.75$  MHz;  $\sigma = 1.585$  S/m;  $\epsilon_r = 52.253$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section  
Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)  
DASY5 Configuration  
Probe: EX3DV4 - SN3917; ConvF(7.62, 7.62, 7.62); Calibrated: 2013/05/14;  
Sensor-Surface: 2mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1369; Calibrated: 2013/05/13  
Phantom: ELI v5.0 SN1203; Type: QDOVA002AA; Serial: TP:1203  
Measurement SW: DASYS2, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Area Scan (61x181x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.156 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 10.022 V/m; Power Drift = 0.07 dB  
Peak SAR (extrapolated) = 0.200 W/kg  
**SAR(1 g) = 0.113 W/kg; SAR(10 g) = 0.060 W/kg**  
Maximum value of SAR (measured) = 0.157 W/kg

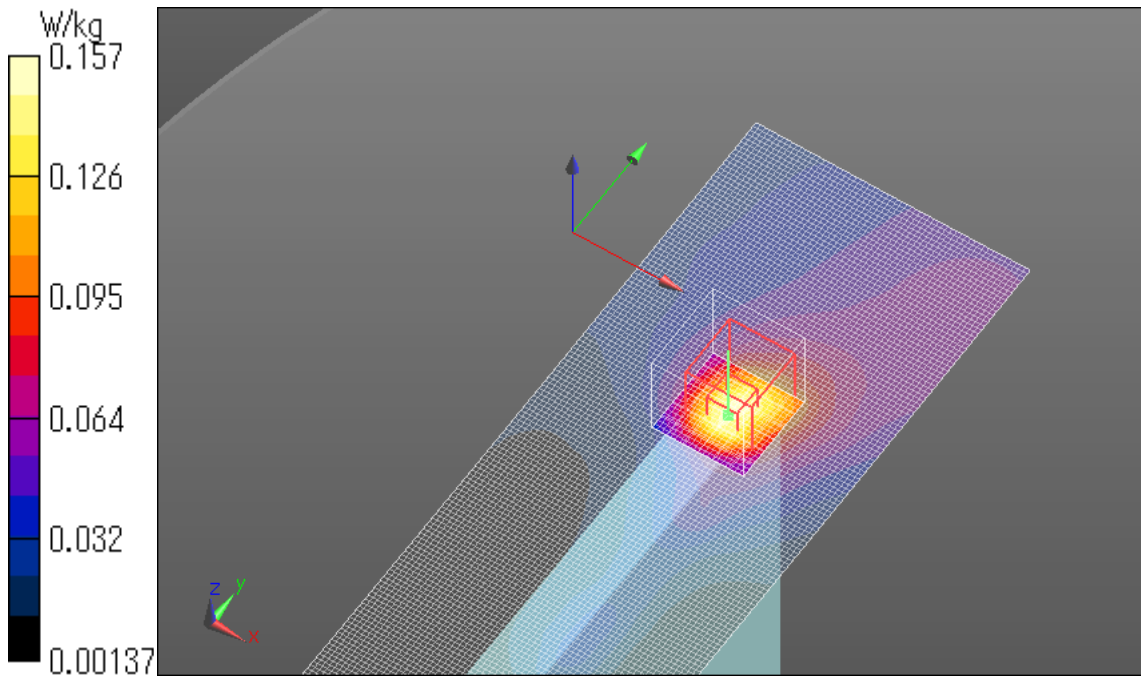

**Plot No.13**

**BC1 1xEV-DO Rel.0 Main Ant. Edge4 0mm Full power 1880MHz**

Communication System: UID 0, CDMA2000 (0); Communication System Band: US PCS (BC1);

Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.555$  S/m;  $\epsilon_r = 52.379$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3917; ConvF(7.62, 7.62, 7.62); Calibrated: 2013/05/14;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1369; Calibrated: 2013/05/13

Phantom: ELI v5.0 SN1203; Type: QDOVA002AA; Serial: TP:1203

Measurement SW: DASYS2, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Area Scan (61x181x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.154 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.138 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.196 W/kg

**SAR(1 g) = 0.108 W/kg; SAR(10 g) = 0.058 W/kg**

Maximum value of SAR (measured) = 0.151 W/kg

