


14.14 SAR test plots for LTE Band 17

LTE Band XVII Main Ant. Rear 0mm 1RB Reduced power 709MHz

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 17,
E-UTRA/FDD (704.0 - 716.0 MHz); Frequency: 709 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 709$ MHz; $\sigma = 0.923$ S/m; $\epsilon_r = 56.3$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration
Probe: EX3DV4 - SN3917; ConvF(9.99, 9.99, 9.99); Calibrated: 2013/05/14;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1369; Calibrated: 2013/05/13
Phantom: ELI v5.0 SN1203; Type: QDOVA002AA; Serial: TP:1203
Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.596 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 25.919 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 0.743 W/kg
SAR(1 g) = 0.447 W/kg; SAR(10 g) = 0.276 W/kg
Maximum value of SAR (measured) = 0.597 W/kg

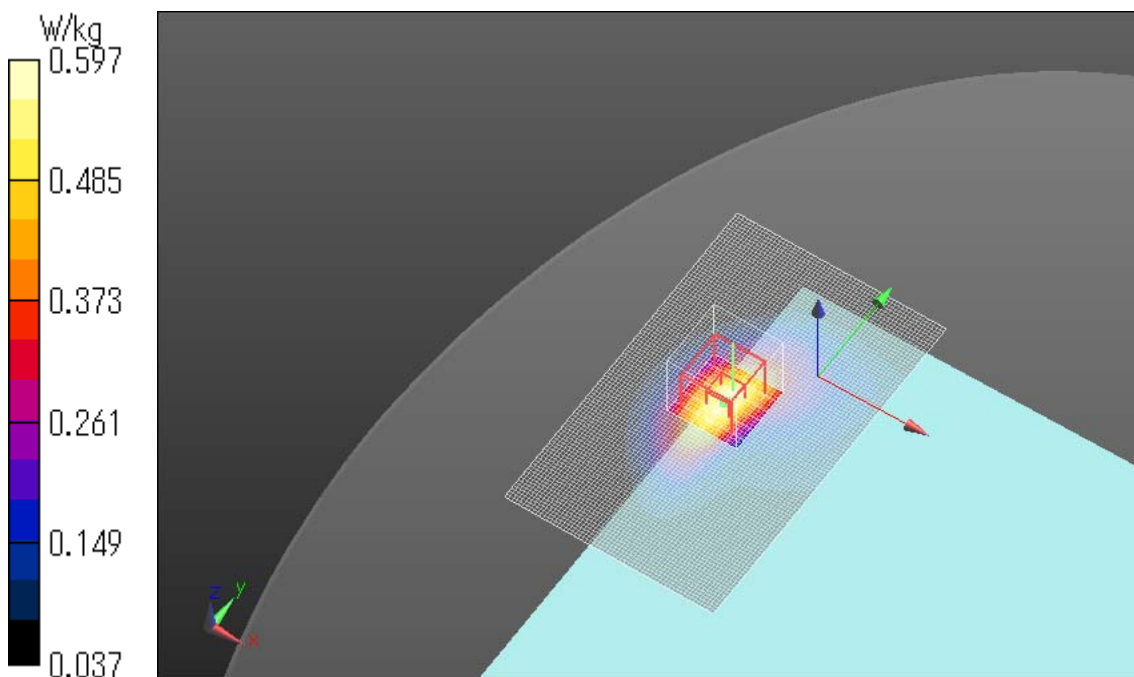


LTE Band XVII Main Ant. Rear 0mm 25RB Reduced power 709MHz

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 17, E-UTRA/FDD (704.0 - 716.0 MHz); Frequency: 709 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 709$ MHz; $\sigma = 0.923$ S/m; $\epsilon_r = 56.3$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration
Probe: EX3DV4 - SN3917; ConvF(9.99, 9.99, 9.99); Calibrated: 2013/05/14;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1369; Calibrated: 2013/05/13
Phantom: ELI v5.0 SN1203; Type: QDOVA002AA; Serial: TP:1203
Measurement SW: DASYS2, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.579 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 25.740 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 0.714 W/kg
SAR(1 g) = 0.440 W/kg; SAR(10 g) = 0.271 W/kg
Maximum value of SAR (measured) = 0.584 W/kg

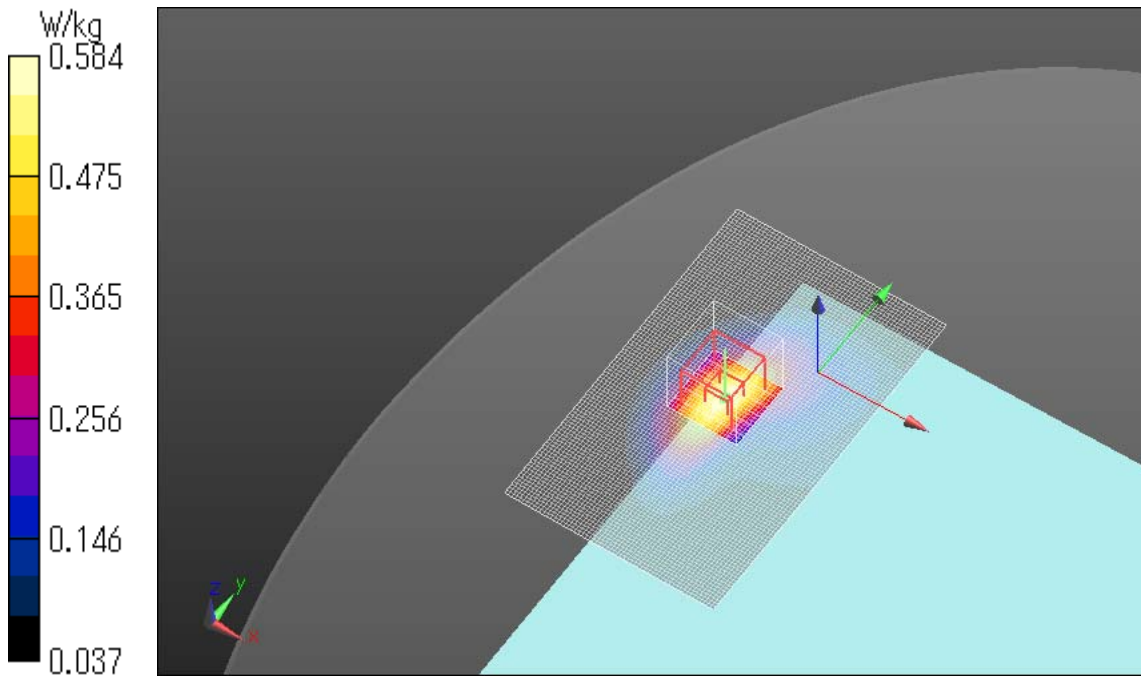


LTE Band XVII Main Ant. Edge1 0mm 1RB Reduced power 709MHz

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 17,
E-UTRA/FDD (704.0 - 716.0 MHz); Frequency: 709 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 709$ MHz; $\sigma = 0.923$ S/m; $\epsilon_r = 56.3$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration
Probe: EX3DV4 - SN3917; ConvF(9.99, 9.99, 9.99); Calibrated: 2013/05/14;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1369; Calibrated: 2013/05/13
Phantom: ELI v5.0 SN1203; Type: QDOVA002AA; Serial: TP:1203
Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Area Scan (51x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.12 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 37.318 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 1.57 W/kg
SAR(1 g) = 0.889 W/kg; SAR(10 g) = 0.514 W/kg
Maximum value of SAR (measured) = 1.24 W/kg

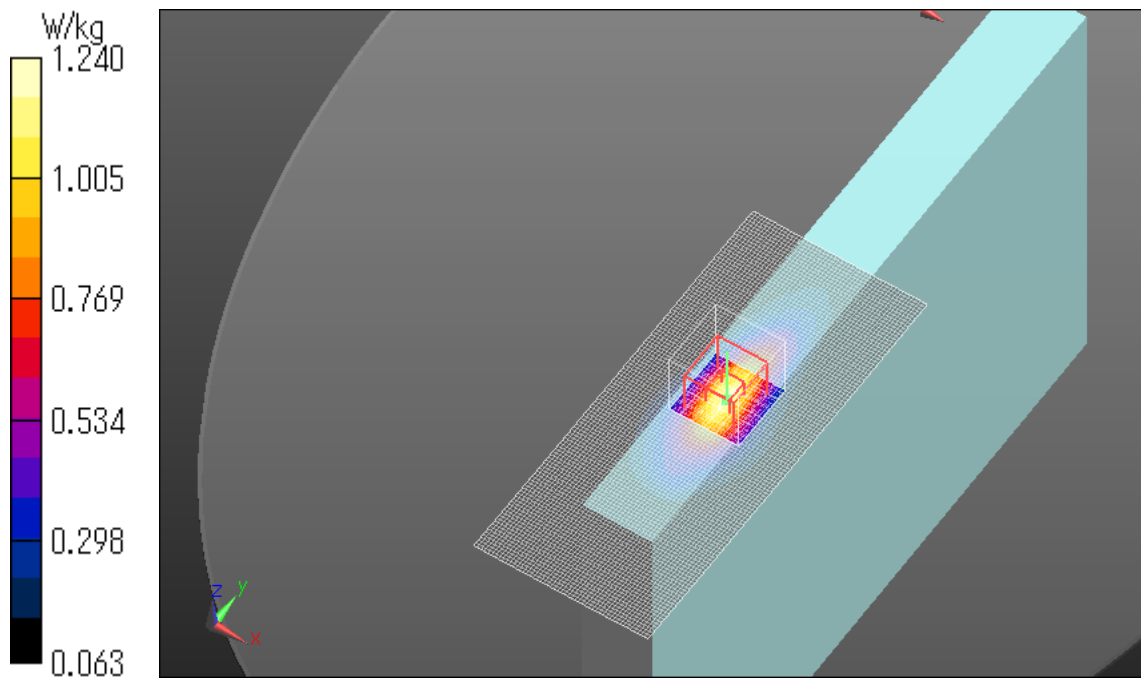


LTE Band XVII Main Ant. Edge1 0mm 1RB Reduced power 710MHz

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 17, E-UTRA/FDD (704.0 - 716.0 MHz); Frequency: 710 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 710$ MHz; $\sigma = 0.923$ S/m; $\epsilon_r = 56.289$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration
Probe: EX3DV4 - SN3917; ConvF(9.99, 9.99, 9.99); Calibrated: 2013/05/14;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1369; Calibrated: 2013/05/13
Phantom: ELI v5.0 SN1203; Type: QDOVA002AA; Serial: TP:1203
Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Area Scan (51x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.13 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 36.753 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 1.65 W/kg
SAR(1 g) = 0.889 W/kg; SAR(10 g) = 0.509 W/kg
Maximum value of SAR (measured) = 1.28 W/kg

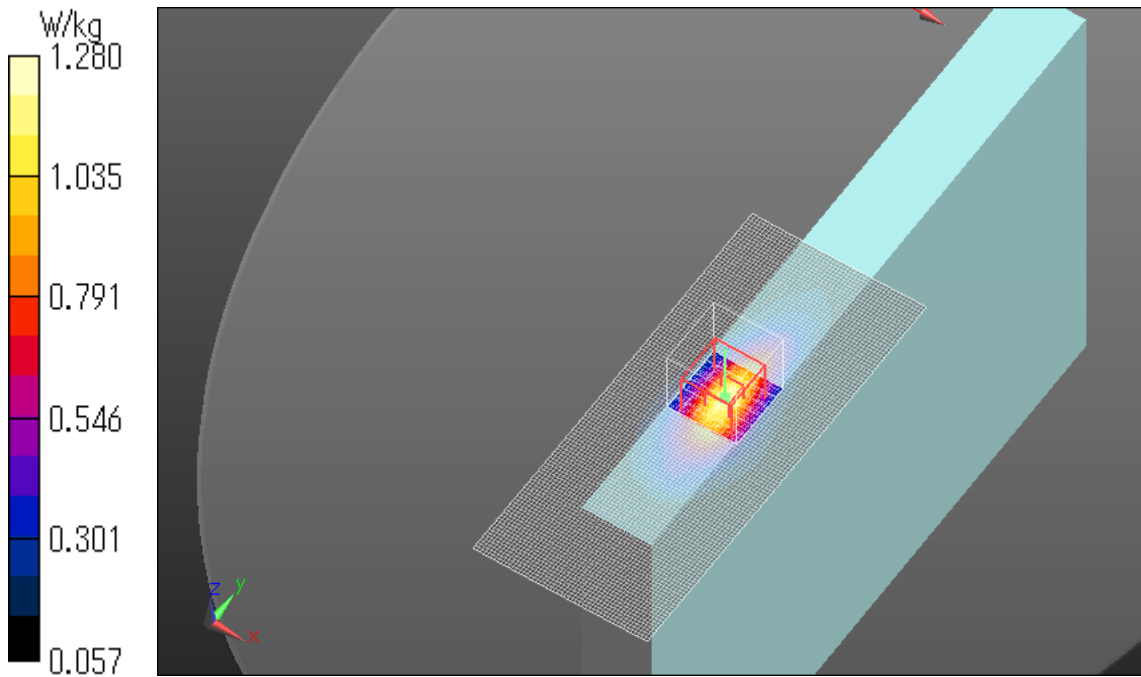


LTE Band XVII Main Ant. Edge1 0mm 1RB Reduced power 711MHz

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 17,
E-UTRA/FDD (704.0 - 716.0 MHz); Frequency: 711 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 711$ MHz; $\sigma = 0.925$ S/m; $\epsilon_r = 56.279$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration
Probe: EX3DV4 - SN3917; ConvF(9.99, 9.99, 9.99); Calibrated: 2013/05/14;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1369; Calibrated: 2013/05/13
Phantom: ELI v5.0 SN1203; Type: QDOVA002AA; Serial: TP:1203
Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Area Scan (51x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.26 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 37.396 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 1.60 W/kg
SAR(1 g) = 0.908 W/kg; SAR(10 g) = 0.525 W/kg
Maximum value of SAR (measured) = 1.26 W/kg

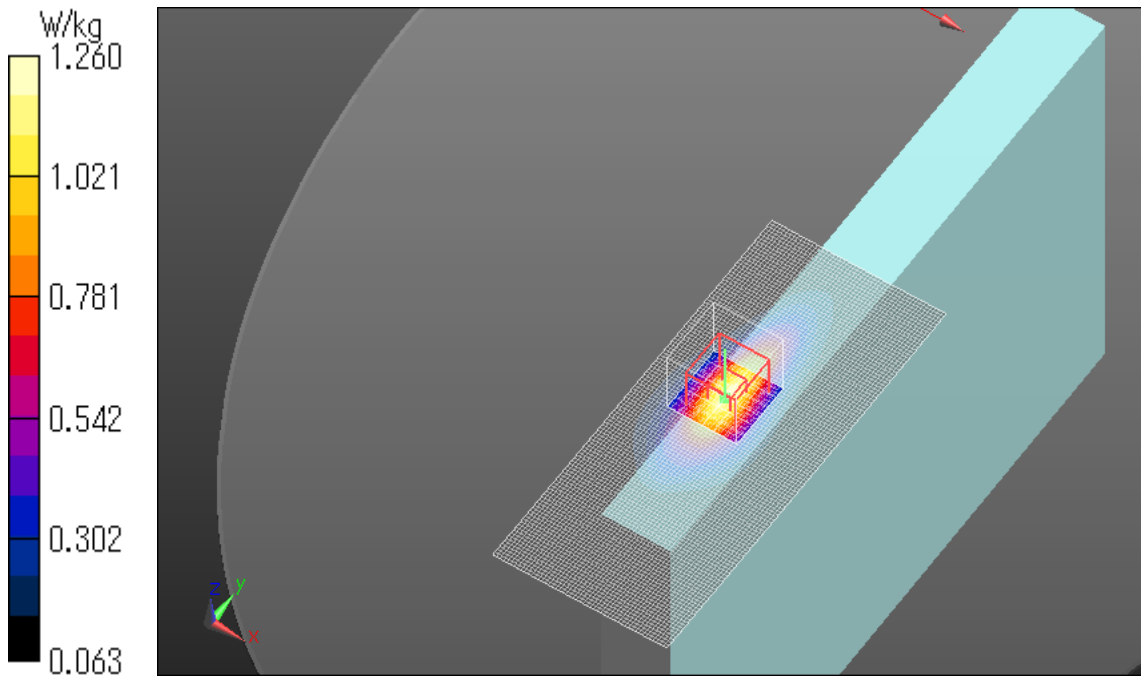

LTE Band XVII Main Ant. Edge1 0mm 1RB Reduced power 711MHz

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 17,
E-UTRA/FDD (704.0 - 716.0 MHz); Frequency: 711 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 711$ MHz; $\sigma = 0.925$ S/m; $\epsilon_r = 56.279$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration
Probe: EX3DV4 - SN3917; ConvF(9.99, 9.99, 9.99); Calibrated: 2013/05/14;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1369; Calibrated: 2013/05/13
Phantom: ELI v5.0 SN1203; Type: QDOVA002AA; Serial: TP:1203
Measurement SW: DASYS5, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Z Scan (1x1x31): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 1.25 W/kg

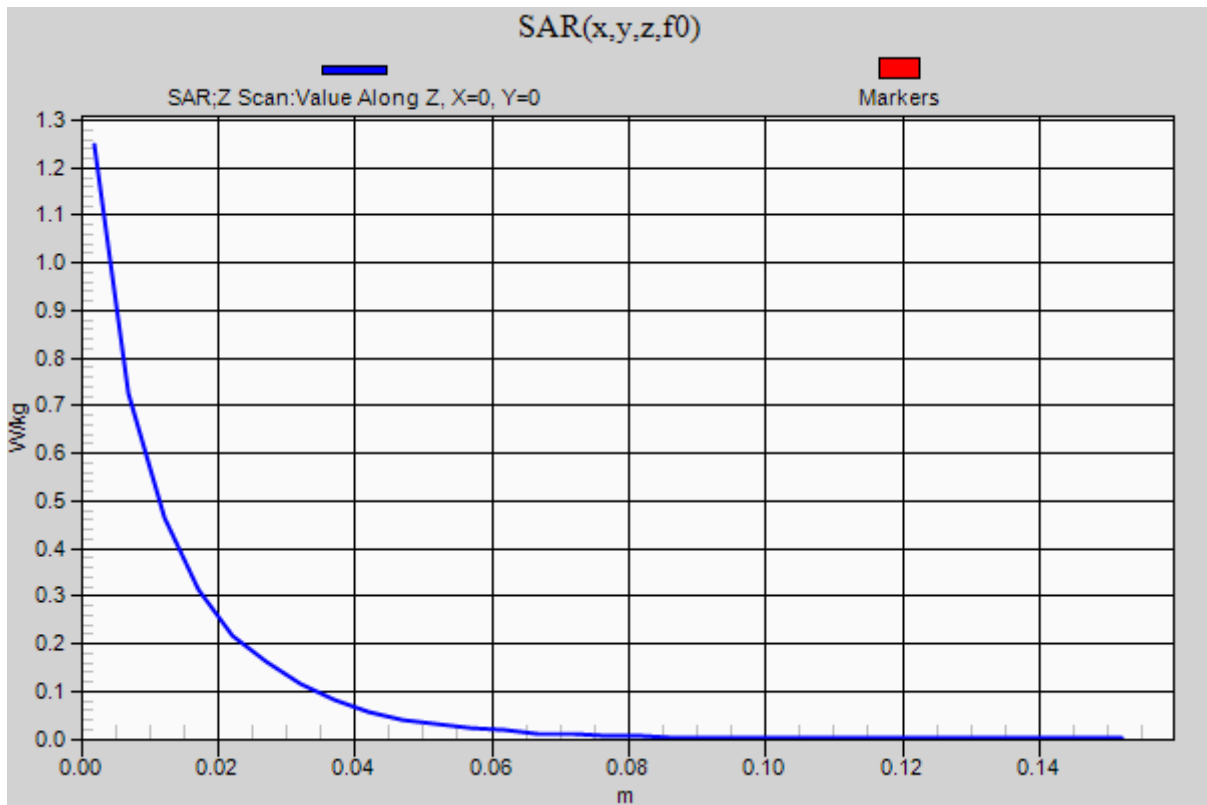


LTE Band XVII Main Ant. Edge1 0mm 25RB Reduced power 709MHz

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 17,
E-UTRA/FDD (704.0 - 716.0 MHz); Frequency: 709 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 709$ MHz; $\sigma = 0.923$ S/m; $\epsilon_r = 56.3$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration
Probe: EX3DV4 - SN3917; ConvF(9.99, 9.99, 9.99); Calibrated: 2013/05/14;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1369; Calibrated: 2013/05/13
Phantom: ELI v5.0 SN1203; Type: QDOVA002AA; Serial: TP:1203
Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Area Scan (51x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.22 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 36.890 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 1.55 W/kg
SAR(1 g) = 0.879 W/kg; SAR(10 g) = 0.508 W/kg
Maximum value of SAR (measured) = 1.22 W/kg

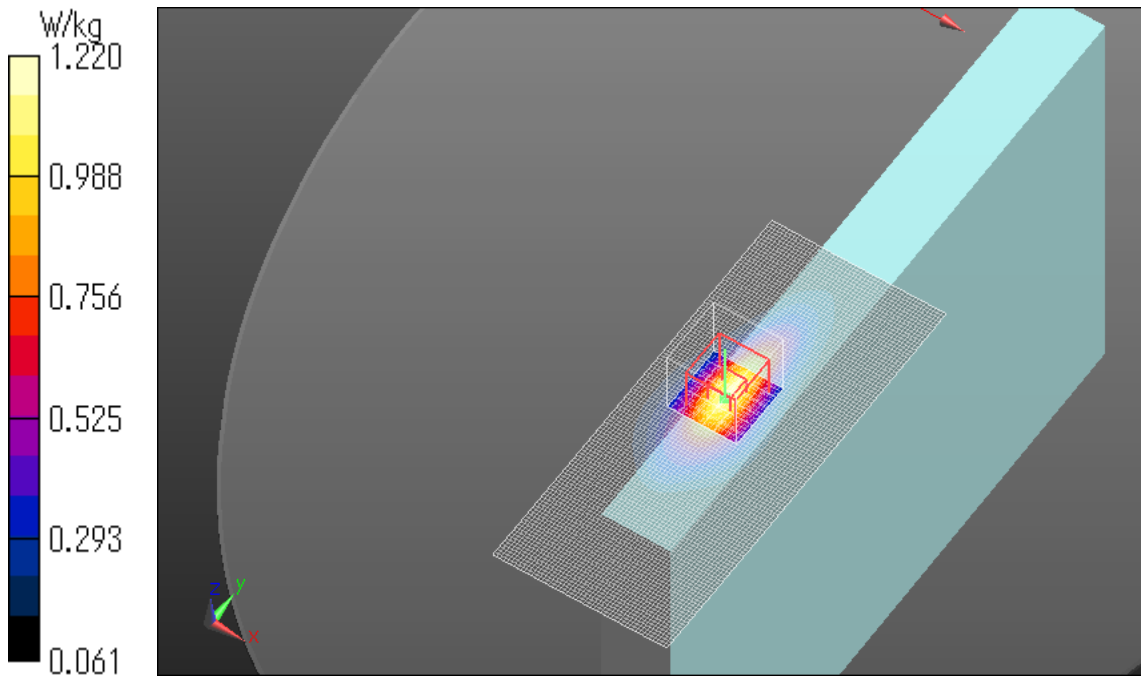


LTE Band XVII Main Ant. Edge1 0mm 25RB Reduced power 710MHz

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 17, E-UTRA/FDD (704.0 - 716.0 MHz); Frequency: 710 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 710$ MHz; $\sigma = 0.923$ S/m; $\epsilon_r = 56.289$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration
Probe: EX3DV4 - SN3917; ConvF(9.99, 9.99, 9.99); Calibrated: 2013/05/14;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1369; Calibrated: 2013/05/13
Phantom: ELI v5.0 SN1203; Type: QDOVA002AA; Serial: TP:1203
Measurement SW: DASYS2, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Area Scan (51x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.22 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 36.601 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 1.53 W/kg
SAR(1 g) = 0.857 W/kg; SAR(10 g) = 0.496 W/kg
Maximum value of SAR (measured) = 1.20 W/kg

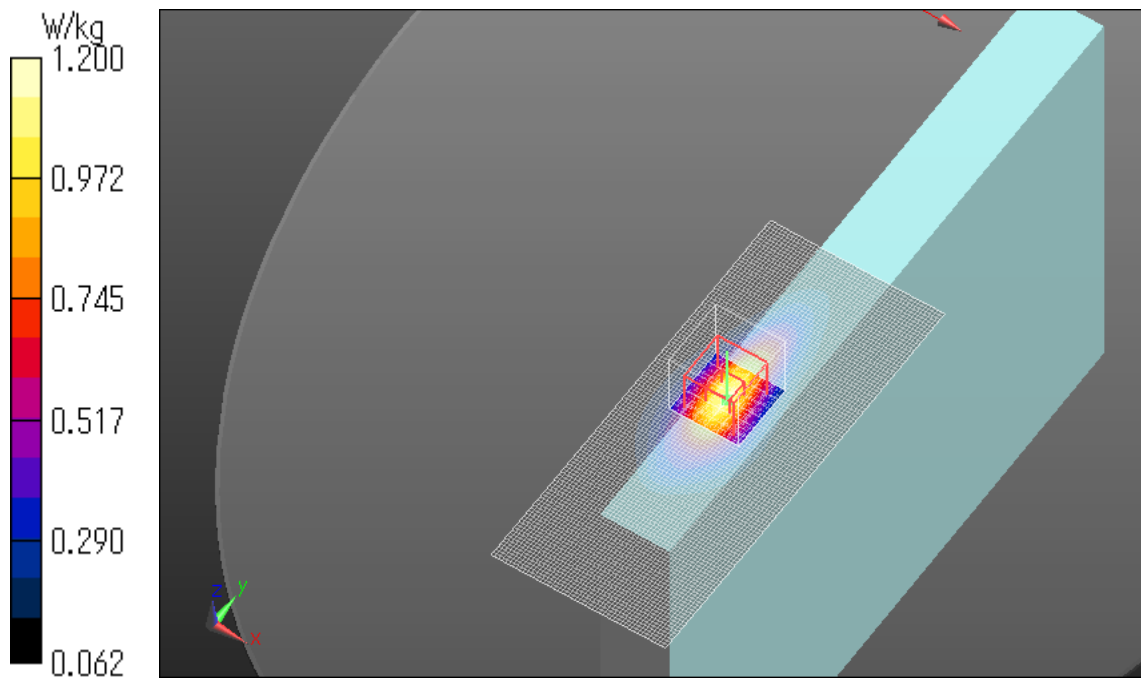


LTE Band XVII Main Ant. Edge1 0mm 25RB Reduced power 711MHz

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 17,
E-UTRA/FDD (704.0 - 716.0 MHz); Frequency: 711 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 711$ MHz; $\sigma = 0.925$ S/m; $\epsilon_r = 56.279$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration
Probe: EX3DV4 - SN3917; ConvF(9.99, 9.99, 9.99); Calibrated: 2013/05/14;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1369; Calibrated: 2013/05/13
Phantom: ELI v5.0 SN1203; Type: QDOVA002AA; Serial: TP:1203
Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Area Scan (51x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.21 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 36.725 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 1.52 W/kg
SAR(1 g) = 0.863 W/kg; SAR(10 g) = 0.500 W/kg
Maximum value of SAR (measured) = 1.19 W/kg

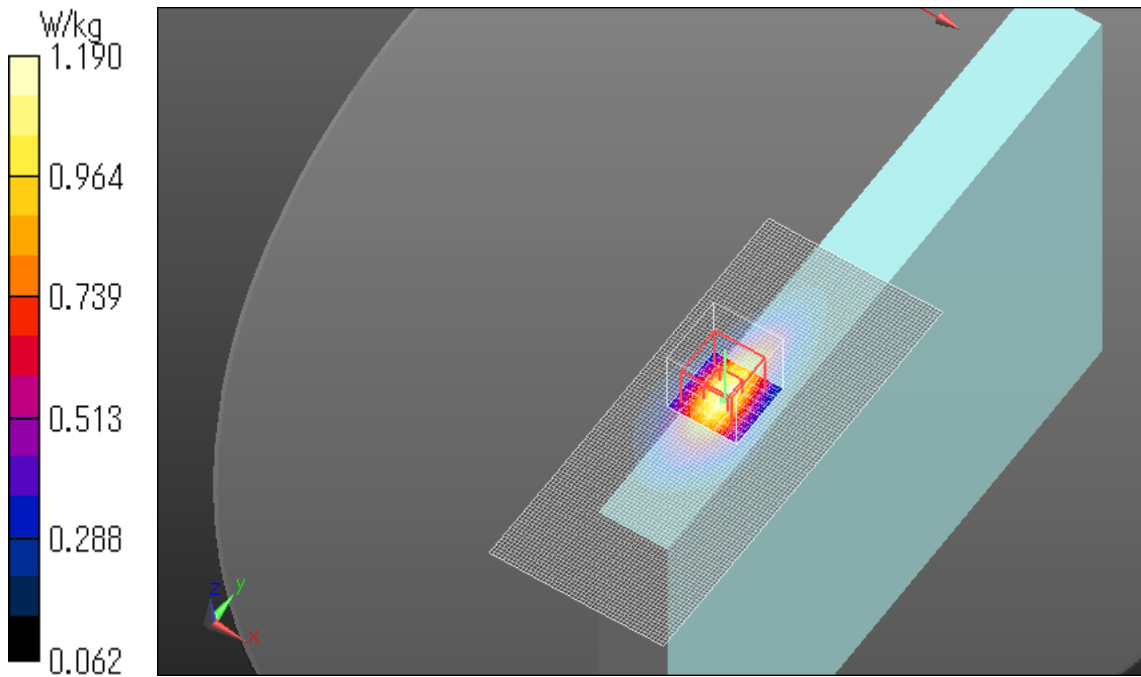


LTE Band XVII Main Ant. Edge1 0mm 50RB Reduced power 710MHz

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 17, E-UTRA/FDD (704.0 - 716.0 MHz); Frequency: 710 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 710$ MHz; $\sigma = 0.923$ S/m; $\epsilon_r = 56.289$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration
Probe: EX3DV4 - SN3917; ConvF(9.99, 9.99, 9.99); Calibrated: 2013/05/14;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1369; Calibrated: 2013/05/13
Phantom: ELI v5.0 SN1203; Type: QDOVA002AA; Serial: TP:1203
Measurement SW: DASYS2, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Area Scan (51x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.14 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 35.463 V/m; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 1.41 W/kg
SAR(1 g) = 0.813 W/kg; SAR(10 g) = 0.468 W/kg
Maximum value of SAR (measured) = 1.12 W/kg

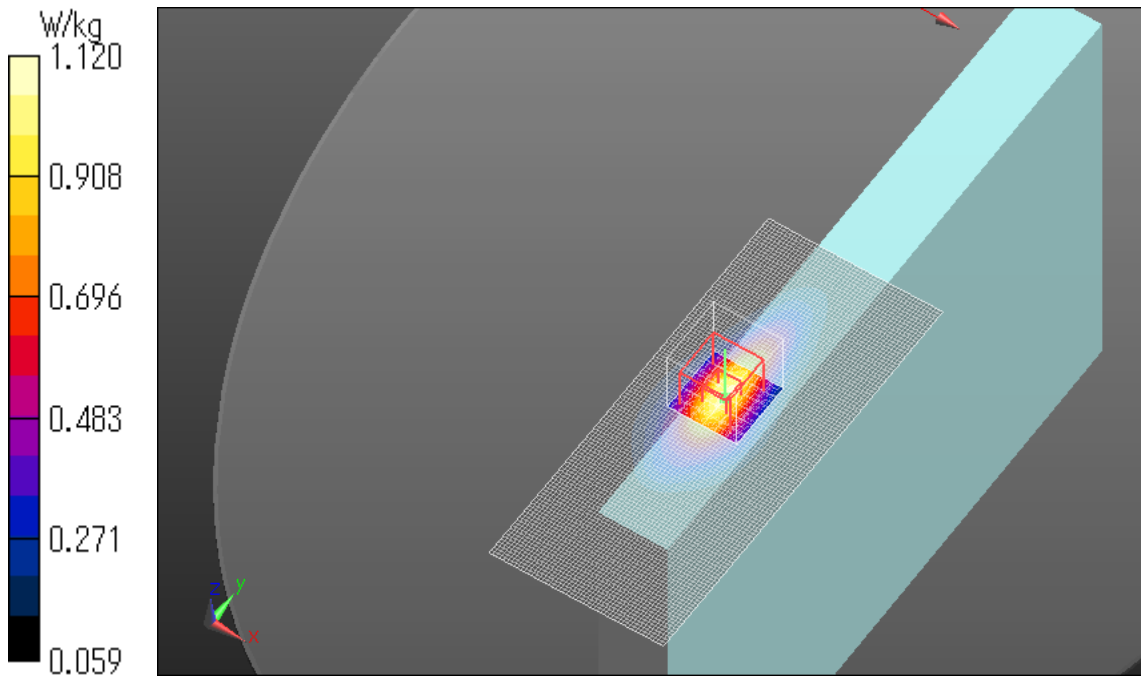


LTE Band XVII Main Ant. Rear 13mm 1RB Full power 709MHz

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 17, E-UTRA/FDD (704.0 - 716.0 MHz); Frequency: 709 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 709$ MHz; $\sigma = 0.923$ S/m; $\epsilon_r = 56.3$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration
Probe: EX3DV4 - SN3917; ConvF(9.99, 9.99, 9.99); Calibrated: 2013/05/14;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1369; Calibrated: 2013/05/13
Phantom: ELI v5.0 SN1203; Type: QDOVA002AA; Serial: TP:1203
Measurement SW: DASYS2, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.114 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 11.429 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 0.141 W/kg
SAR(1 g) = 0.099 W/kg; SAR(10 g) = 0.069 W/kg
Maximum value of SAR (measured) = 0.120 W/kg

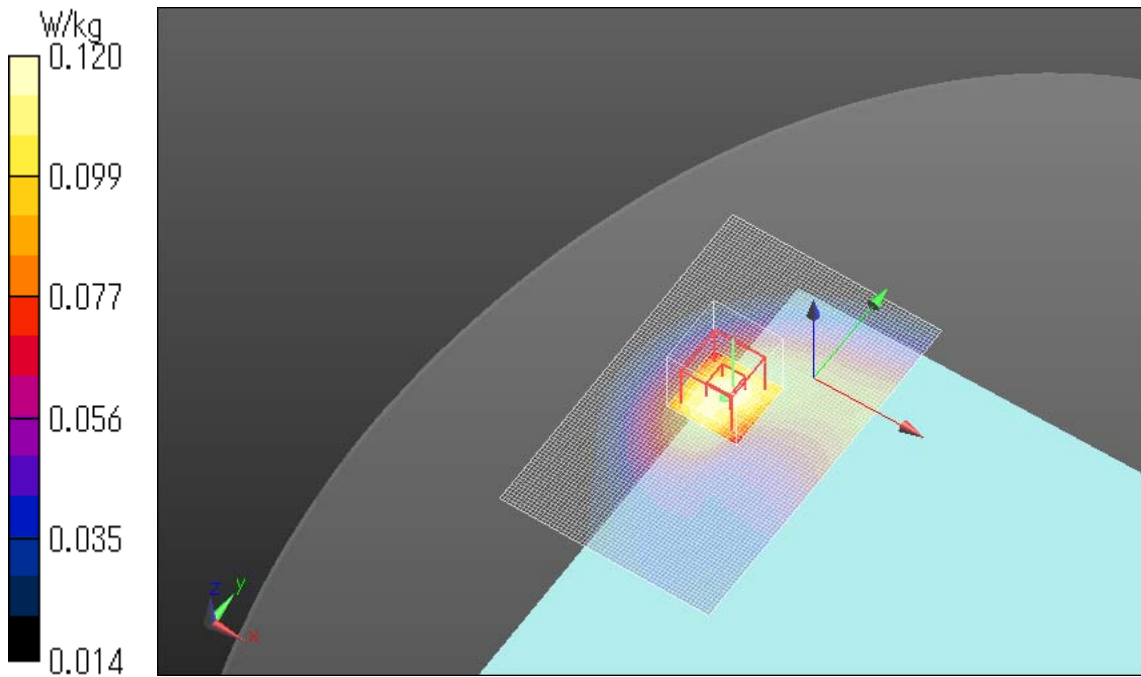


LTE Band XVII Main Ant. Rear 13mm 25RB Full power 709MHz

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 17, E-UTRA/FDD (704.0 - 716.0 MHz); Frequency: 709 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 709$ MHz; $\sigma = 0.923$ S/m; $\epsilon_r = 56.3$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration
Probe: EX3DV4 - SN3917; ConvF(9.99, 9.99, 9.99); Calibrated: 2013/05/14;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1369; Calibrated: 2013/05/13
Phantom: ELI v5.0 SN1203; Type: QDOVA002AA; Serial: TP:1203
Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.0999 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 10.651 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 0.117 W/kg
SAR(1 g) = 0.084 W/kg; SAR(10 g) = 0.059 W/kg
Maximum value of SAR (measured) = 0.102 W/kg

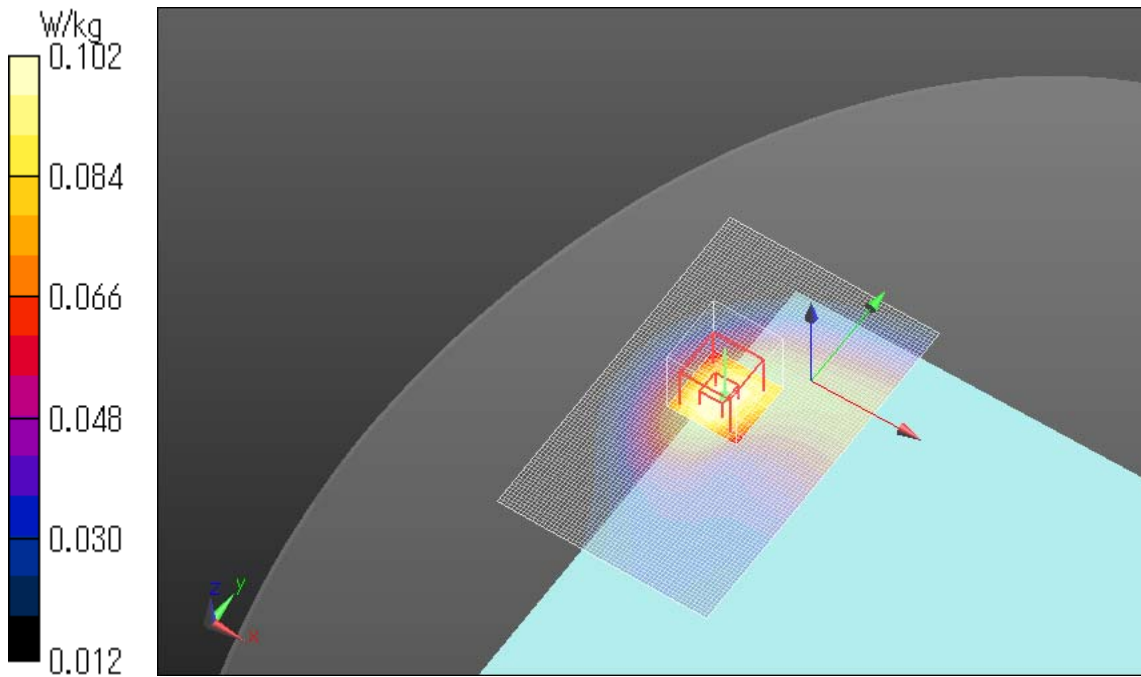


LTE Band XVII Main Ant. Edge1 20mm 1RB Full power 709MHz

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 17,
E-UTRA/FDD (704.0 - 716.0 MHz); Frequency: 709 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 709$ MHz; $\sigma = 0.923$ S/m; $\epsilon_r = 56.3$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration
Probe: EX3DV4 - SN3917; ConvF(9.99, 9.99, 9.99); Calibrated: 2013/05/14;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1369; Calibrated: 2013/05/13
Phantom: ELI v5.0 SN1203; Type: QDOVA002AA; Serial: TP:1203
Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Area Scan (51x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.104 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 10.796 V/m; Power Drift = -0.14 dB
Peak SAR (extrapolated) = 0.114 W/kg
SAR(1 g) = 0.082 W/kg; SAR(10 g) = 0.057 W/kg
Maximum value of SAR (measured) = 0.0998 W/kg

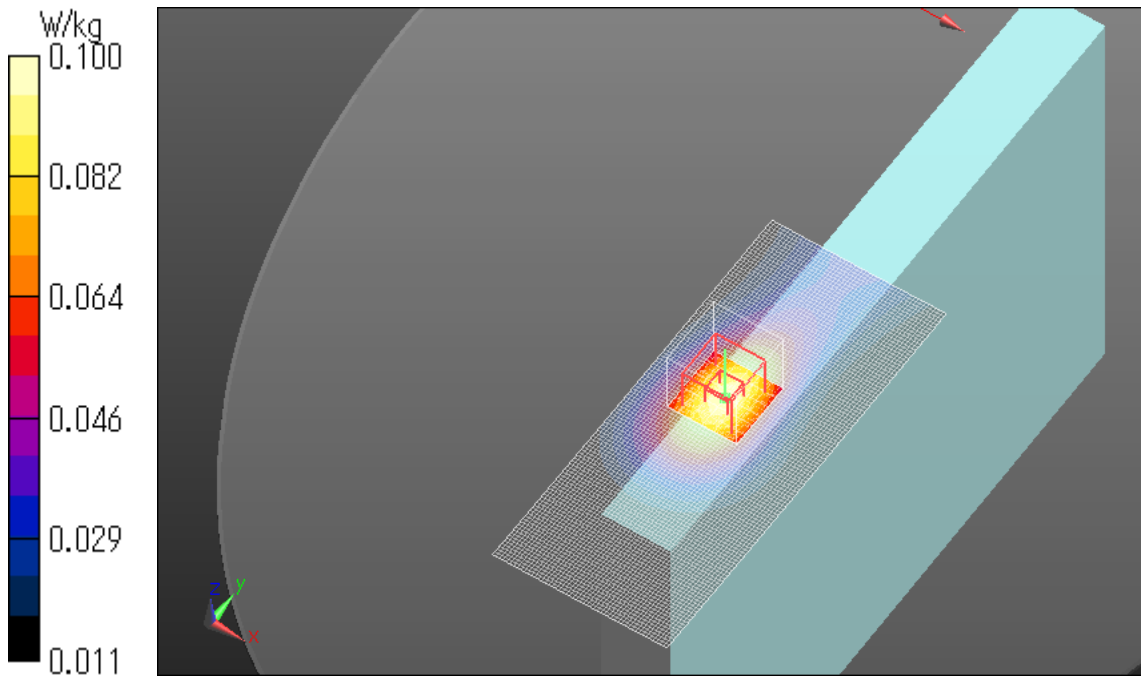


LTE Band XVII Main Ant. Edge1 20mm 25RB Full power 709MHz

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 17,
E-UTRA/FDD (704.0 - 716.0 MHz); Frequency: 709 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 709$ MHz; $\sigma = 0.923$ S/m; $\epsilon_r = 56.3$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration
Probe: EX3DV4 - SN3917; ConvF(9.99, 9.99, 9.99); Calibrated: 2013/05/14;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1369; Calibrated: 2013/05/13
Phantom: ELI v5.0 SN1203; Type: QDOVA002AA; Serial: TP:1203
Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Area Scan (51x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.0934 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 10.241 V/m; Power Drift = -0.06 dB
Peak SAR (extrapolated) = 0.108 W/kg
SAR(1 g) = 0.076 W/kg; SAR(10 g) = 0.053 W/kg
Maximum value of SAR (measured) = 0.0955 W/kg

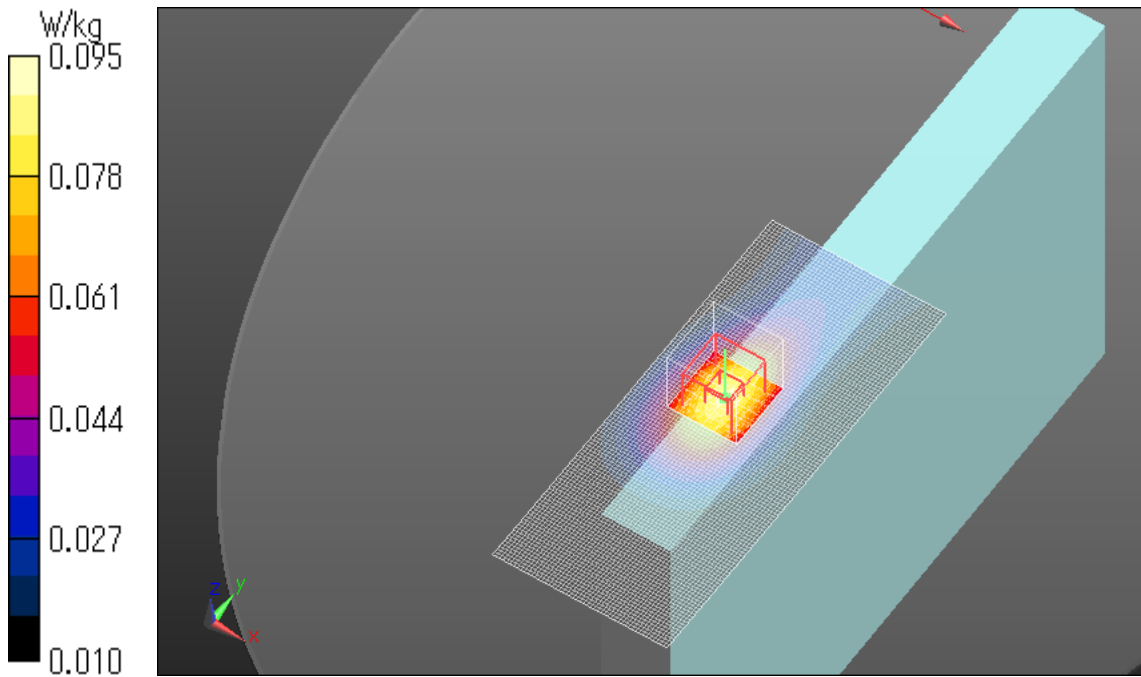


LTE Band XVII Main Ant. Edge4 0mm 1RB Full power 709MHz

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 17, E-UTRA/FDD (704.0 - 716.0 MHz); Frequency: 709 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 709$ MHz; $\sigma = 0.923$ S/m; $\epsilon_r = 56.3$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration
Probe: EX3DV4 - SN3917; ConvF(9.99, 9.99, 9.99); Calibrated: 2013/05/14;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1369; Calibrated: 2013/05/13
Phantom: ELI v5.0 SN1203; Type: QDOVA002AA; Serial: TP:1203
Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Area Scan (61x181x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.121 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 11.423 V/m; Power Drift = -0.13 dB
Peak SAR (extrapolated) = 0.221 W/kg
SAR(1 g) = 0.078 W/kg; SAR(10 g) = 0.037 W/kg
Maximum value of SAR (measured) = 0.128 W/kg

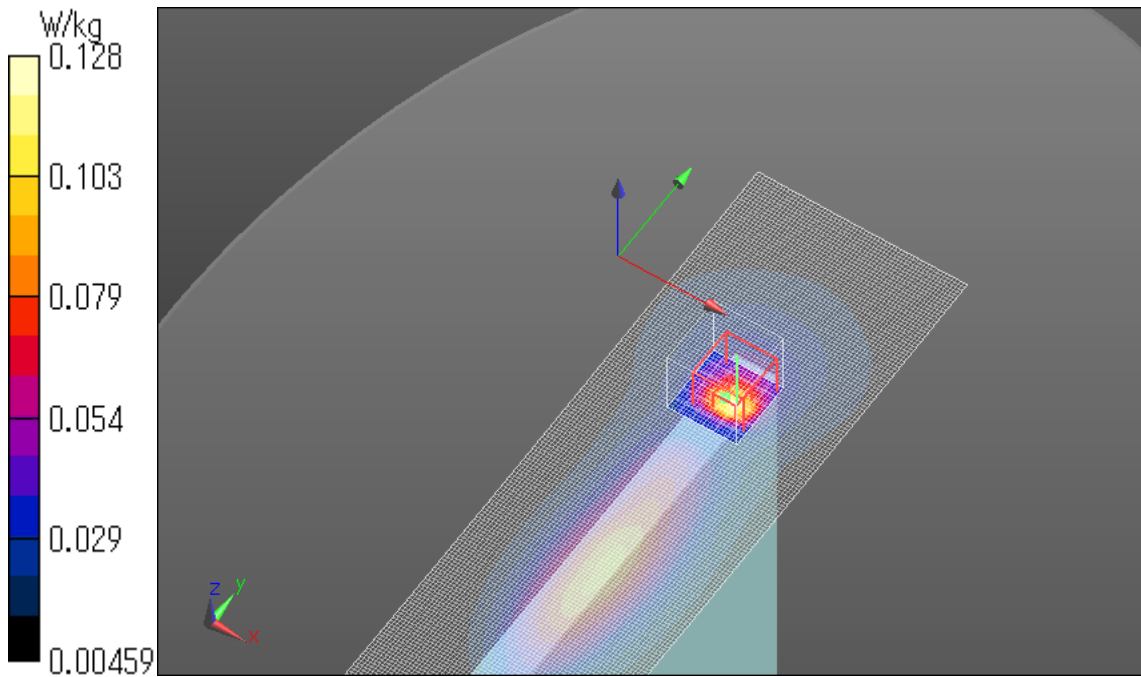

LTE Band XVII Main Ant. Edge4 0mm 25RB Full power 709MHz

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 17,
E-UTRA/FDD (704.0 - 716.0 MHz); Frequency: 709 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 709$ MHz; $\sigma = 0.923$ S/m; $\epsilon_r = 56.3$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration
Probe: EX3DV4 - SN3917; ConvF(9.99, 9.99, 9.99); Calibrated: 2013/05/14;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1369; Calibrated: 2013/05/13
Phantom: ELI v5.0 SN1203; Type: QDOVA002AA; Serial: TP:1203
Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Area Scan (61x181x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.101 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 10.322 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 0.169 W/kg
SAR(1 g) = 0.064 W/kg; SAR(10 g) = 0.031 W/kg
Maximum value of SAR (measured) = 0.103 W/kg

