


14.15 SAR test plots for LTE Band 25

LTE Band XXV Main Ant. Rear 0mm 1RB Reduced power 1882.5MHz

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 25, E-UTRA/FDD (1850.0 - 1915.0 MHz); Frequency: 1882.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1882.5$ MHz; $\sigma = 1.557$ S/m; $\epsilon_r = 52.368$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration
Probe: EX3DV4 - SN3917; ConvF(7.62, 7.62, 7.62); Calibrated: 2013/05/14;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1369; Calibrated: 2013/05/13
Phantom: ELI v5.0 SN1203; Type: QDOVA002AA; Serial: TP:1203
Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.375 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 14.703 V/m; Power Drift = -0.00 dB
Peak SAR (extrapolated) = 0.424 W/kg
SAR(1 g) = 0.238 W/kg; SAR(10 g) = 0.126 W/kg
Maximum value of SAR (measured) = 0.329 W/kg

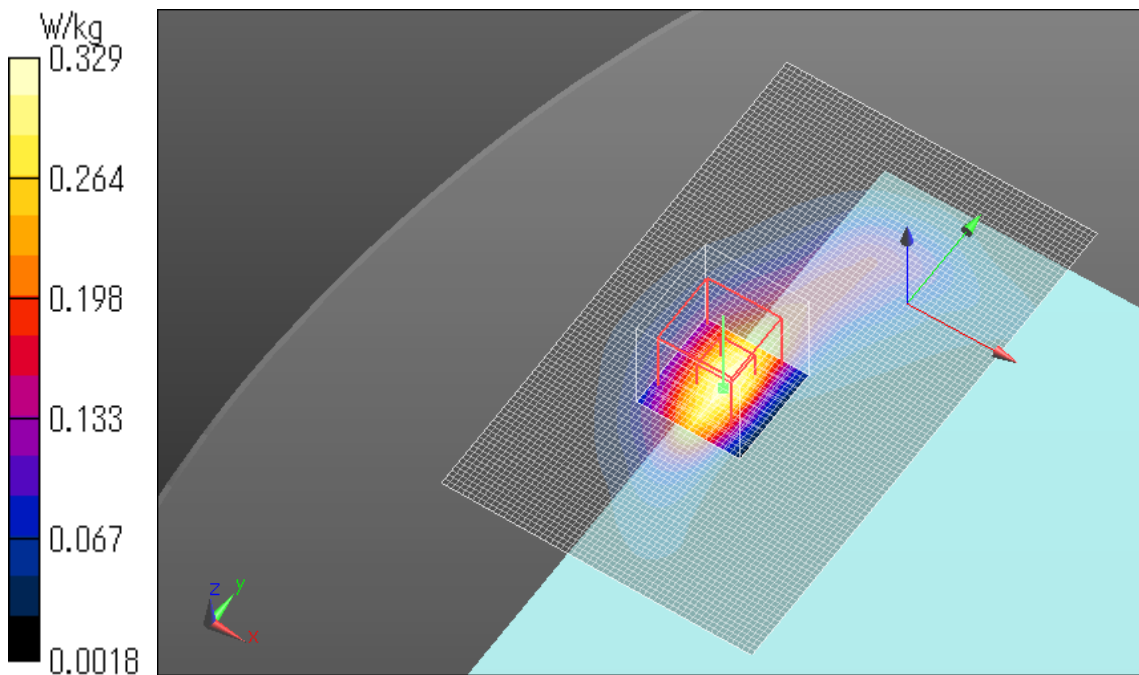


LTE Band XXV Main Ant. Rear 0mm 50RB Reduced power 1905MHz

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 25, E-UTRA/FDD (1850.0 - 1915.0 MHz); Frequency: 1905 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1905$ MHz; $\sigma = 1.581$ S/m; $\epsilon_r = 52.268$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration
Probe: EX3DV4 - SN3917; ConvF(7.62, 7.62, 7.62); Calibrated: 2013/05/14;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1369; Calibrated: 2013/05/13
Phantom: ELI v5.0 SN1203; Type: QDOVA002AA; Serial: TP:1203
Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.417 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 15.262 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 0.446 W/kg
SAR(1 g) = 0.256 W/kg; SAR(10 g) = 0.134 W/kg
Maximum value of SAR (measured) = 0.356 W/kg

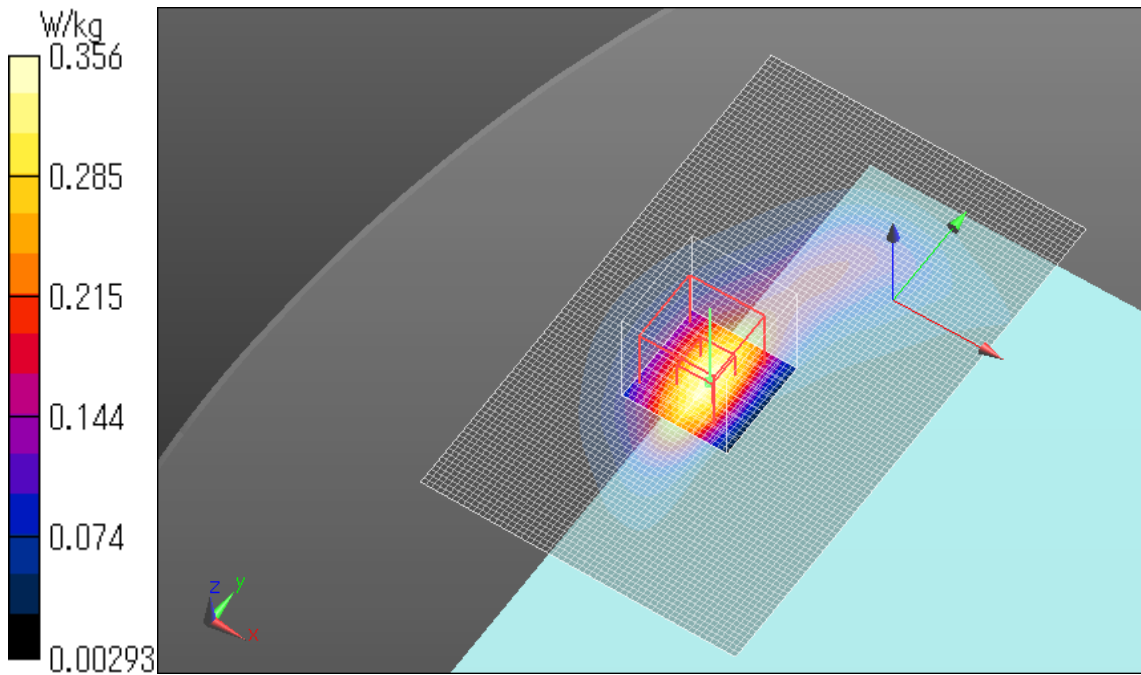


LTE Band XXV Main Ant. Edge1 0mm 1RB Reduced power 1882.5MHz

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 25, E-UTRA/FDD (1850.0 - 1915.0 MHz); Frequency: 1882.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1882.5$ MHz; $\sigma = 1.557$ S/m; $\epsilon_r = 52.368$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration
Probe: EX3DV4 - SN3917; ConvF(7.62, 7.62, 7.62); Calibrated: 2013/05/14;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1369; Calibrated: 2013/05/13
Phantom: ELI v5.0 SN1203; Type: QDOVA002AA; Serial: TP:1203
Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Area Scan (51x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.28 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 29.843 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 2.01 W/kg
SAR(1 g) = 0.894 W/kg; SAR(10 g) = 0.417 W/kg
Maximum value of SAR (measured) = 1.44 W/kg

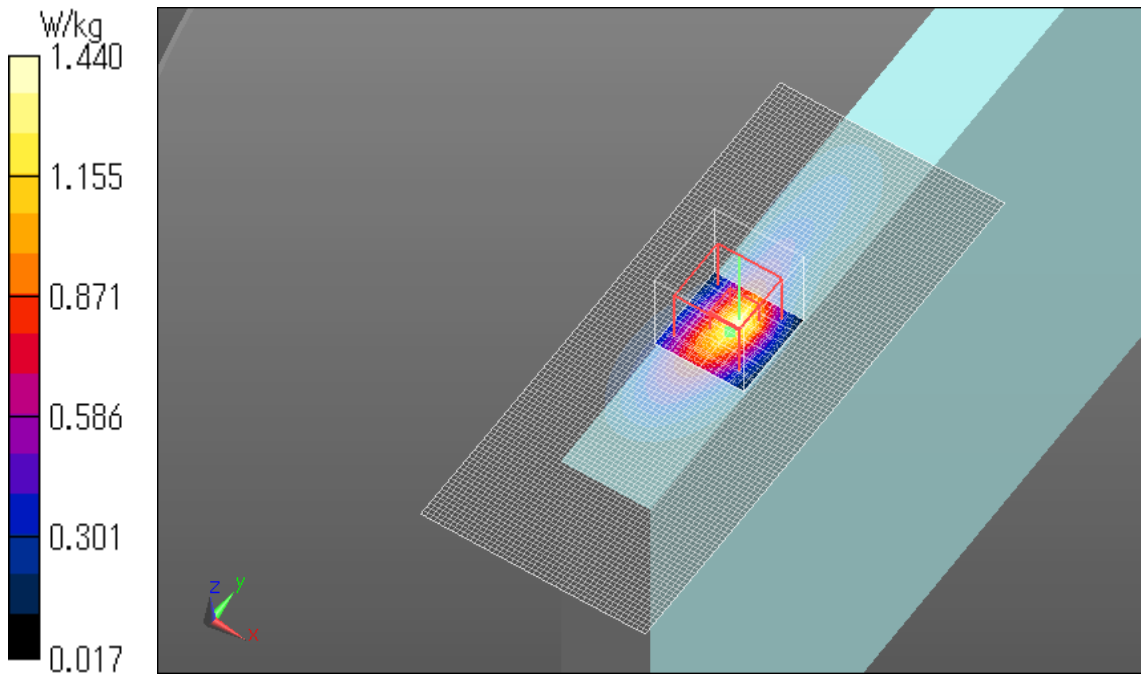


LTE Band XXV Main Ant. Edge1 0mm 1RB Reduced power 1860MHz

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 25, E-UTRA/FDD (1850.0 - 1915.0 MHz); Frequency: 1860 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1860$ MHz; $\sigma = 1.532$ S/m; $\epsilon_r = 52.457$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration
Probe: EX3DV4 - SN3917; ConvF(7.62, 7.62, 7.62); Calibrated: 2013/05/14;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1369; Calibrated: 2013/05/13
Phantom: ELI v5.0 SN1203; Type: QDOVA002AA; Serial: TP:1203
Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Area Scan (51x121x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 1.27 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 29.878 V/m; Power Drift = 0.16 dB
Peak SAR (extrapolated) = 1.78 W/kg
SAR(1 g) = 0.885 W/kg; SAR(10 g) = 0.423 W/kg
Maximum value of SAR (measured) = 1.36 W/kg

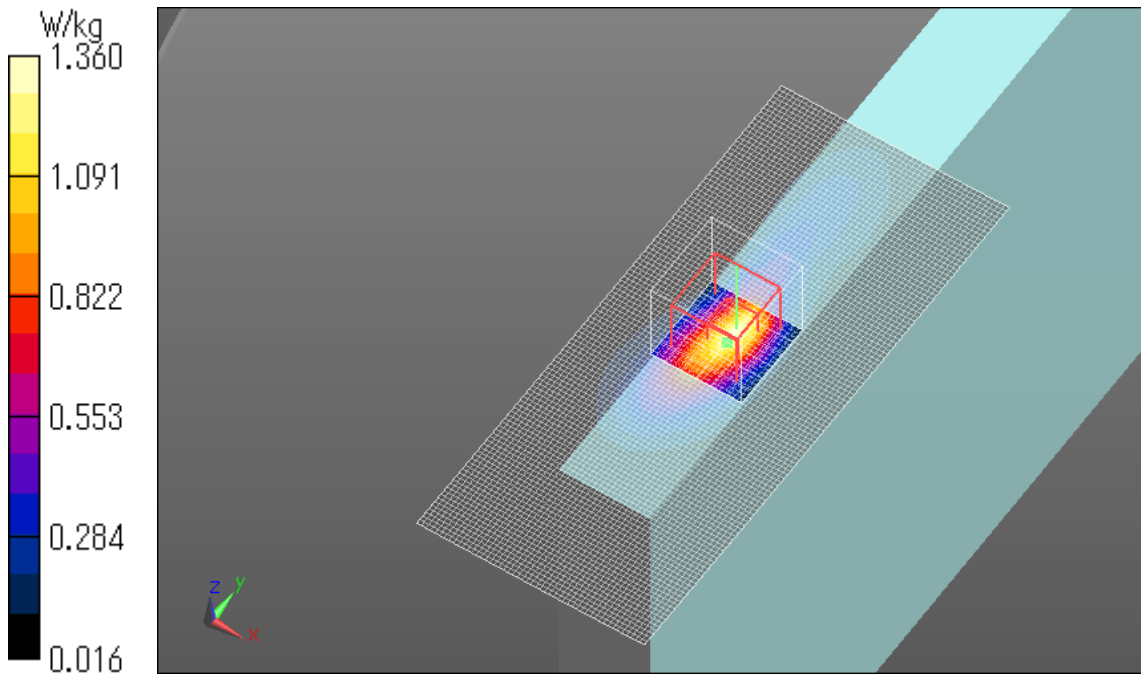


LTE Band XXV Main Ant. Edge1 0mm 1RB Reduced power 1905MHz

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 25, E-UTRA/FDD (1850.0 - 1915.0 MHz); Frequency: 1905 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1905$ MHz; $\sigma = 1.581$ S/m; $\epsilon_r = 52.268$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration
Probe: EX3DV4 - SN3917; ConvF(7.62, 7.62, 7.62); Calibrated: 2013/05/14;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1369; Calibrated: 2013/05/13
Phantom: ELI v5.0 SN1203; Type: QDOVA002AA; Serial: TP:1203
Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Area Scan (51x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.24 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 30.850 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 1.91 W/kg
SAR(1 g) = 0.901 W/kg; SAR(10 g) = 0.425 W/kg
Maximum value of SAR (measured) = 1.43 W/kg

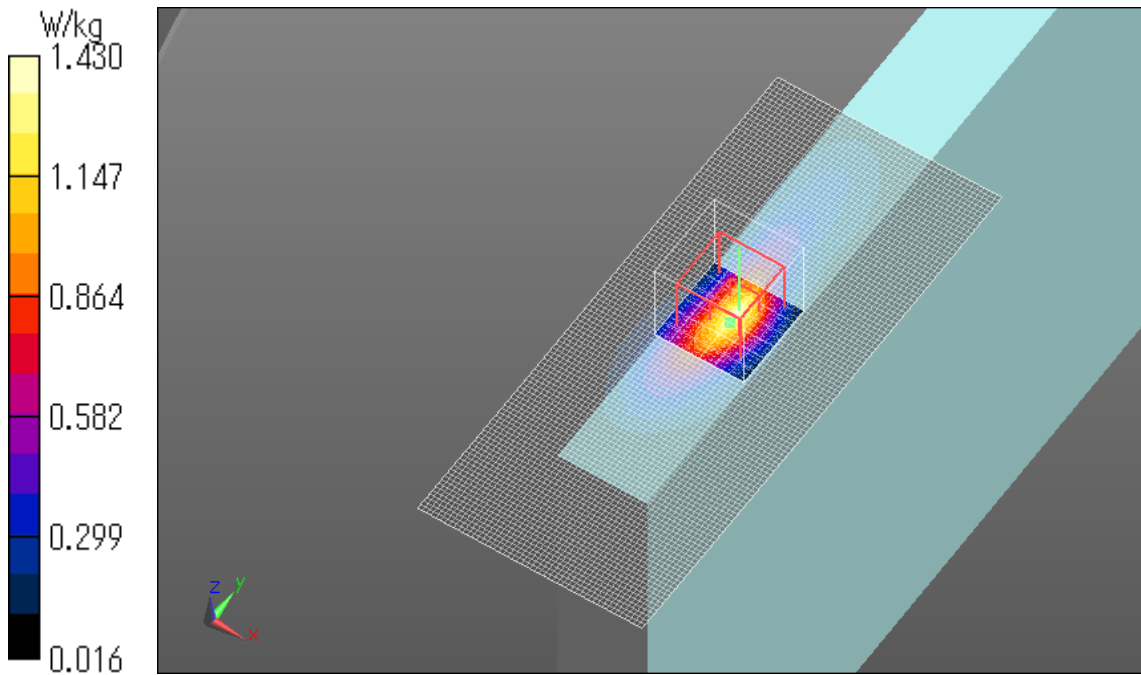

LTE Band XXV Main Ant. Edge1 0mm 1RB Reduced power 1905MHz

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 25, E-UTRA/FDD (1850.0 - 1915.0 MHz); Frequency: 1905 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1905$ MHz; $\sigma = 1.581$ S/m; $\epsilon_r = 52.268$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration
Probe: EX3DV4 - SN3917; ConvF(7.62, 7.62, 7.62); Calibrated: 2013/05/14;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1369; Calibrated: 2013/05/13
Phantom: ELI v5.0 SN1203; Type: QDOVA002AA; Serial: TP:1203
Measurement SW: DASYS2, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Z Scan (1x1x31): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 1.38 W/kg

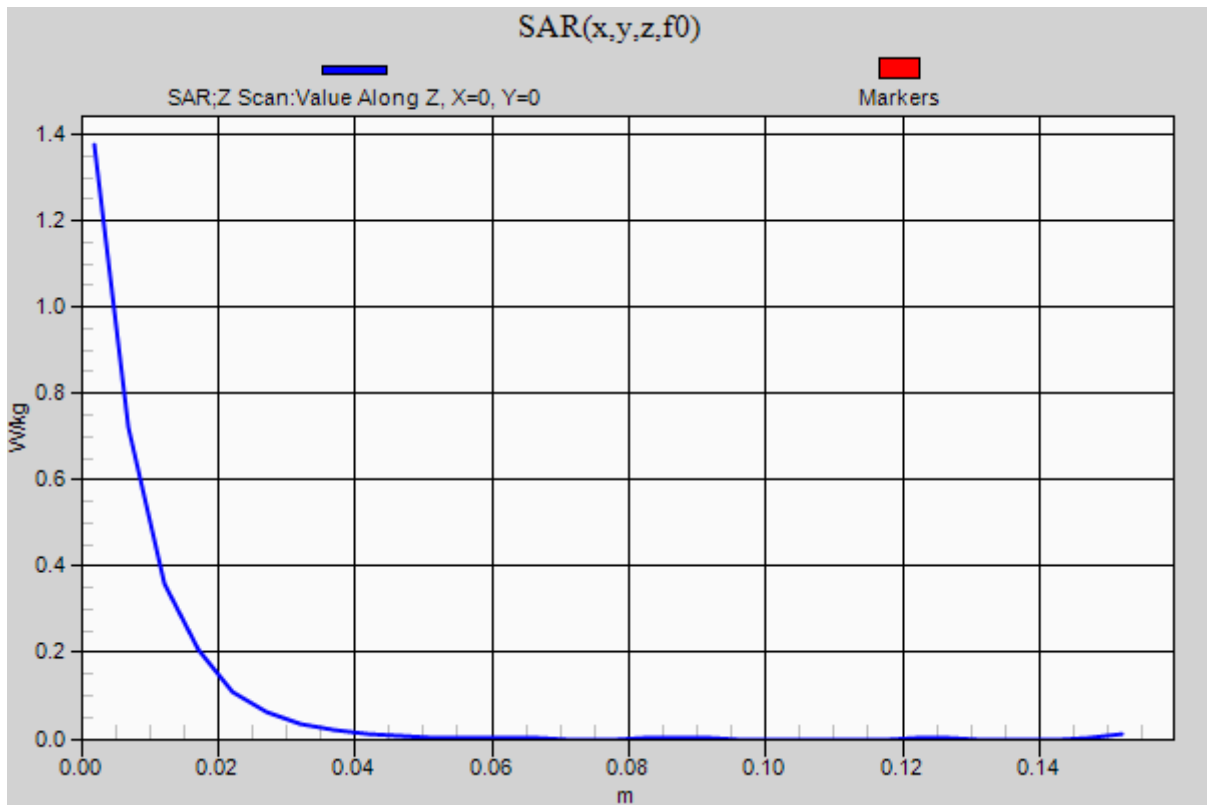


LTE Band XXV Main Ant. Edge1 0mm 50RB Reduced power 1905MHz

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 25, E-UTRA/FDD (1850.0 - 1915.0 MHz); Frequency: 1905 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1905$ MHz; $\sigma = 1.581$ S/m; $\epsilon_r = 52.268$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration
Probe: EX3DV4 - SN3917; ConvF(7.62, 7.62, 7.62); Calibrated: 2013/05/14;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1369; Calibrated: 2013/05/13
Phantom: ELI v5.0 SN1203; Type: QDOVA002AA; Serial: TP:1203
Measurement SW: DASYS2, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Area Scan (51x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.22 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 29.662 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 1.86 W/kg
SAR(1 g) = 0.877 W/kg; SAR(10 g) = 0.410 W/kg
Maximum value of SAR (measured) = 1.35 W/kg

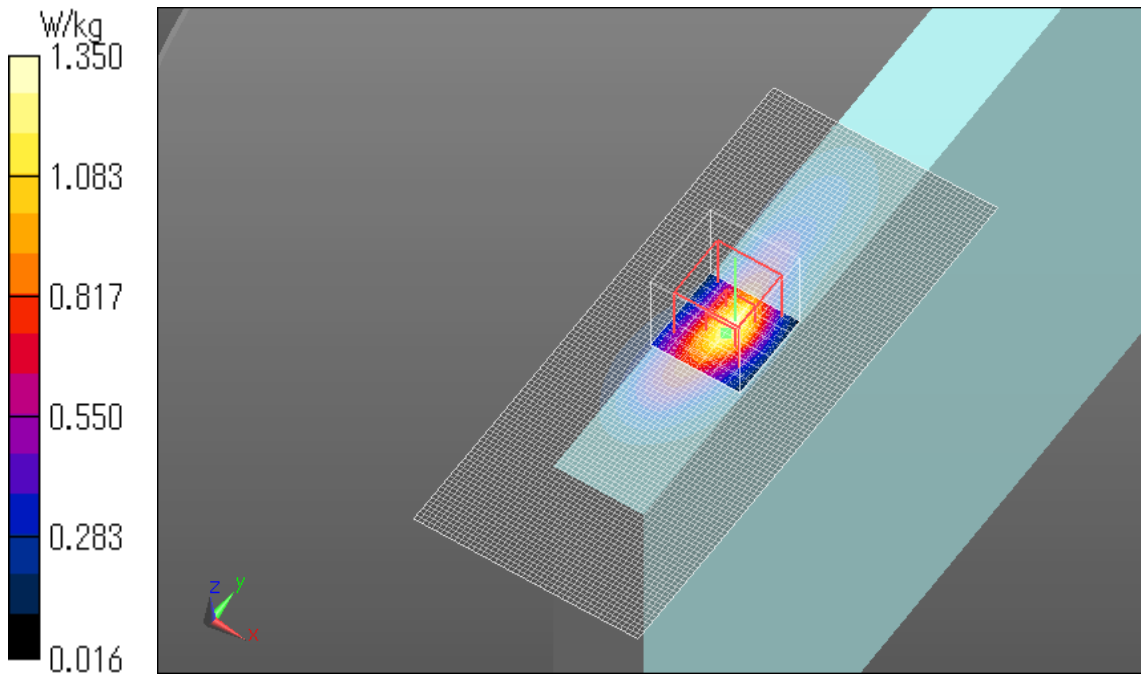


LTE Band XXV Main Ant. Edge1 0mm 50RB Reduced power 1860MHz

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 25, E-UTRA/FDD (1850.0 - 1915.0 MHz); Frequency: 1860 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1860$ MHz; $\sigma = 1.532$ S/m; $\epsilon_r = 52.457$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration
Probe: EX3DV4 - SN3917; ConvF(7.62, 7.62, 7.62); Calibrated: 2013/05/14;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1369; Calibrated: 2013/05/13
Phantom: ELI v5.0 SN1203; Type: QDOVA002AA; Serial: TP:1203
Measurement SW: DASYS2, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Area Scan (51x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.23 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 29.468 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 1.79 W/kg
SAR(1 g) = 0.850 W/kg; SAR(10 g) = 0.411 W/kg
Maximum value of SAR (measured) = 1.31 W/kg

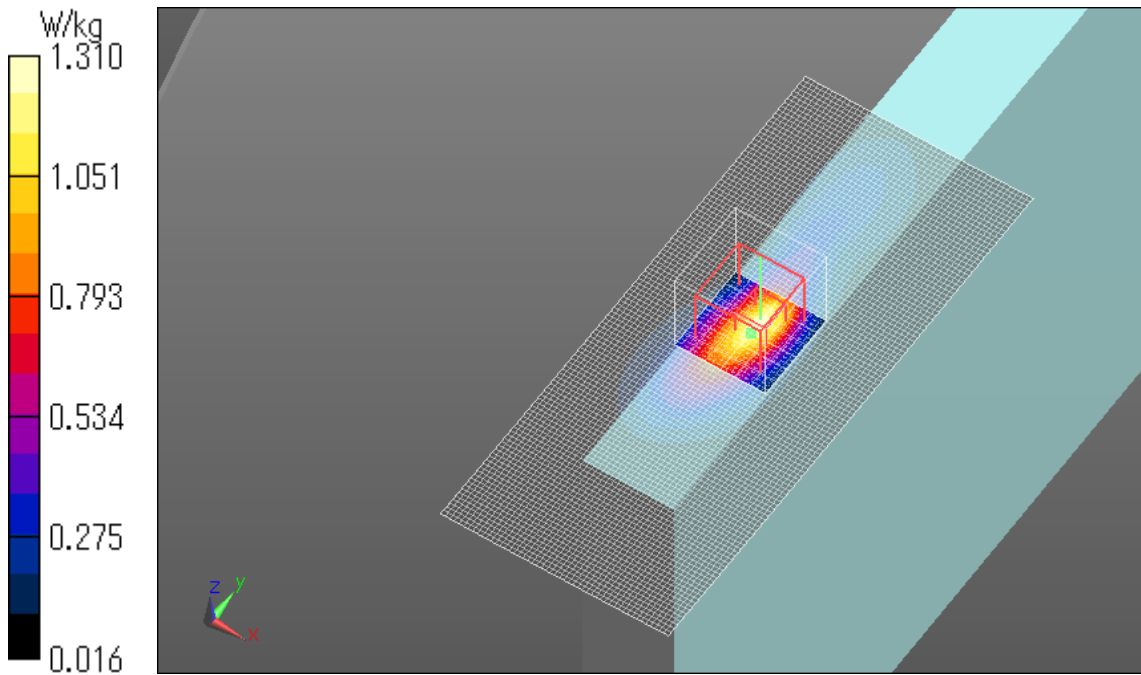


LTE Band XXV Main Ant. Edge1 0mm 50RB Reduced power 1882.5MHz

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 25,
E-UTRA/FDD (1850.0 - 1915.0 MHz); Frequency: 1882.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1882.5$ MHz; $\sigma = 1.557$ S/m; $\epsilon_r = 52.368$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration
Probe: EX3DV4 - SN3917; ConvF(7.62, 7.62, 7.62); Calibrated: 2013/05/14;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1369; Calibrated: 2013/05/13
Phantom: ELI v5.0 SN1203; Type: QDOVA002AA; Serial: TP:1203
Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Area Scan (51x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.26 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 29.910 V/m; Power Drift = -0.00 dB
Peak SAR (extrapolated) = 1.87 W/kg
SAR(1 g) = 0.884 W/kg; SAR(10 g) = 0.420 W/kg
Maximum value of SAR (measured) = 1.35 W/kg

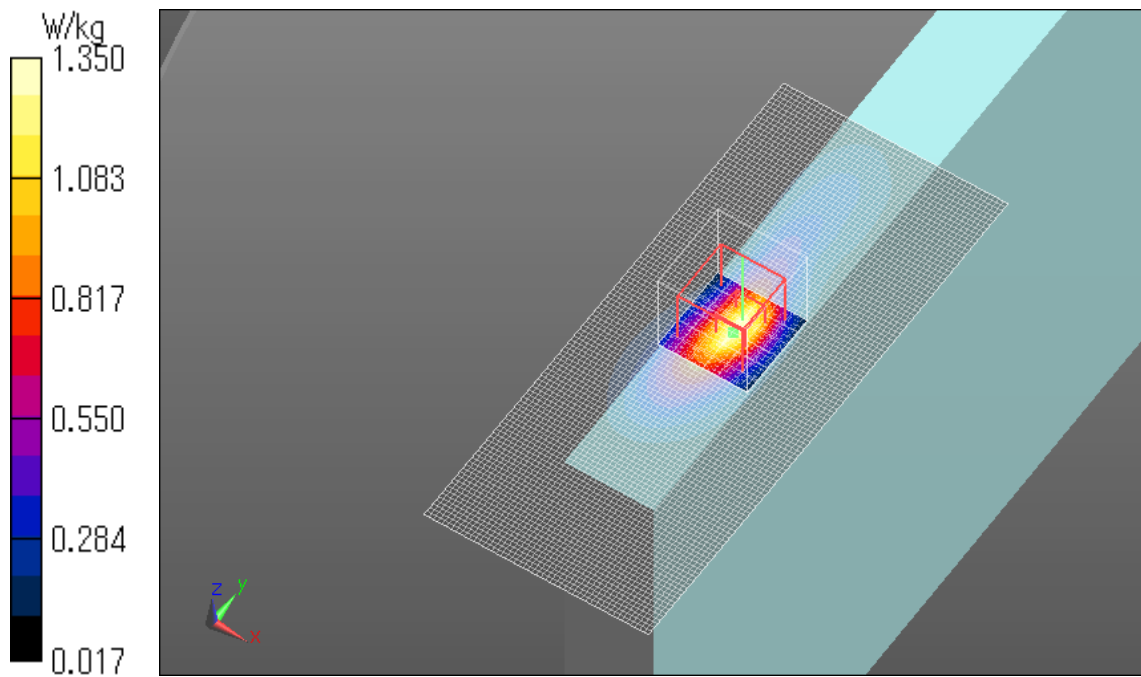


LTE Band XXV Main Ant. Edge1 0mm 100RB Reduced power 1860MHz

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 25, E-UTRA/FDD (1850.0 - 1915.0 MHz); Frequency: 1860 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1860$ MHz; $\sigma = 1.532$ S/m; $\epsilon_r = 52.457$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration
Probe: EX3DV4 - SN3917; ConvF(7.62, 7.62, 7.62); Calibrated: 2013/05/14;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1369; Calibrated: 2013/05/13
Phantom: ELI v5.0 SN1203; Type: QDOVA002AA; Serial: TP:1203
Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Area Scan (51x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.28 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 29.870 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 1.83 W/kg
SAR(1 g) = 0.874 W/kg; SAR(10 g) = 0.418 W/kg
Maximum value of SAR (measured) = 1.35 W/kg

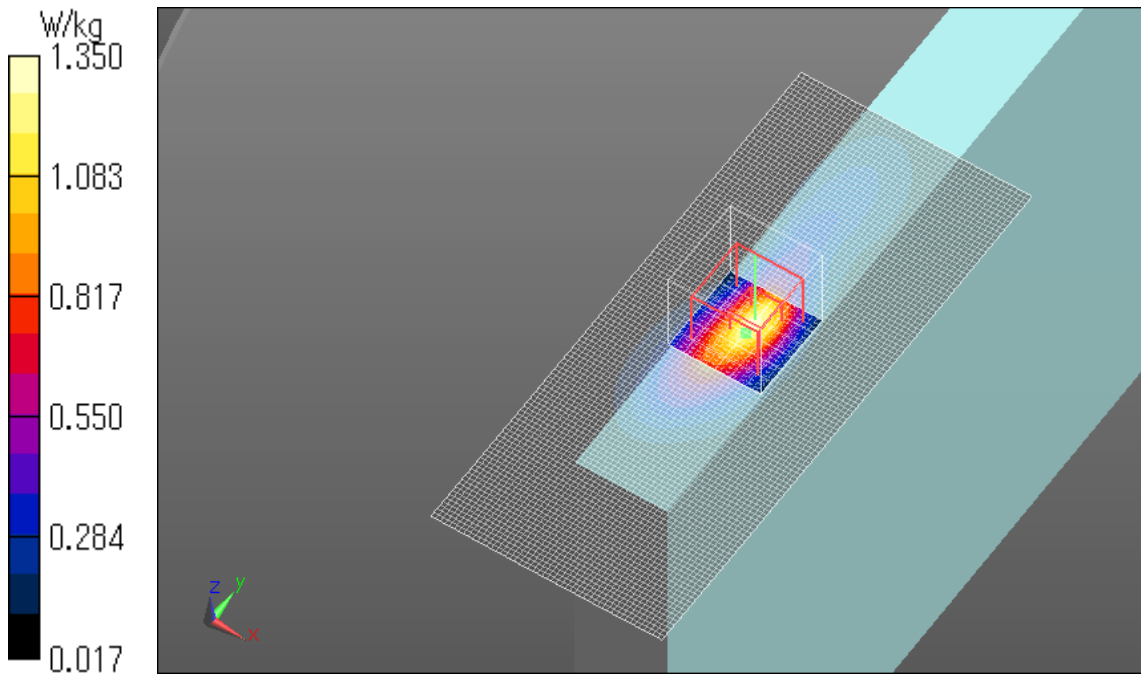


LTE Band XXV Main Ant. Rear 13mm 1RB Full power 1882.5MHz

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 25, E-UTRA/FDD (1850.0 - 1915.0 MHz); Frequency: 1882.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1882.5$ MHz; $\sigma = 1.557$ S/m; $\epsilon_r = 52.368$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration
Probe: EX3DV4 - SN3917; ConvF(7.62, 7.62, 7.62); Calibrated: 2013/05/14;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1369; Calibrated: 2013/05/13
Phantom: ELI v5.0 SN1203; Type: QDOVA002AA; Serial: TP:1203
Measurement SW: DASYS2, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.293 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 13.489 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 0.341 W/kg
SAR(1 g) = 0.213 W/kg; SAR(10 g) = 0.129 W/kg
Maximum value of SAR (measured) = 0.280 W/kg

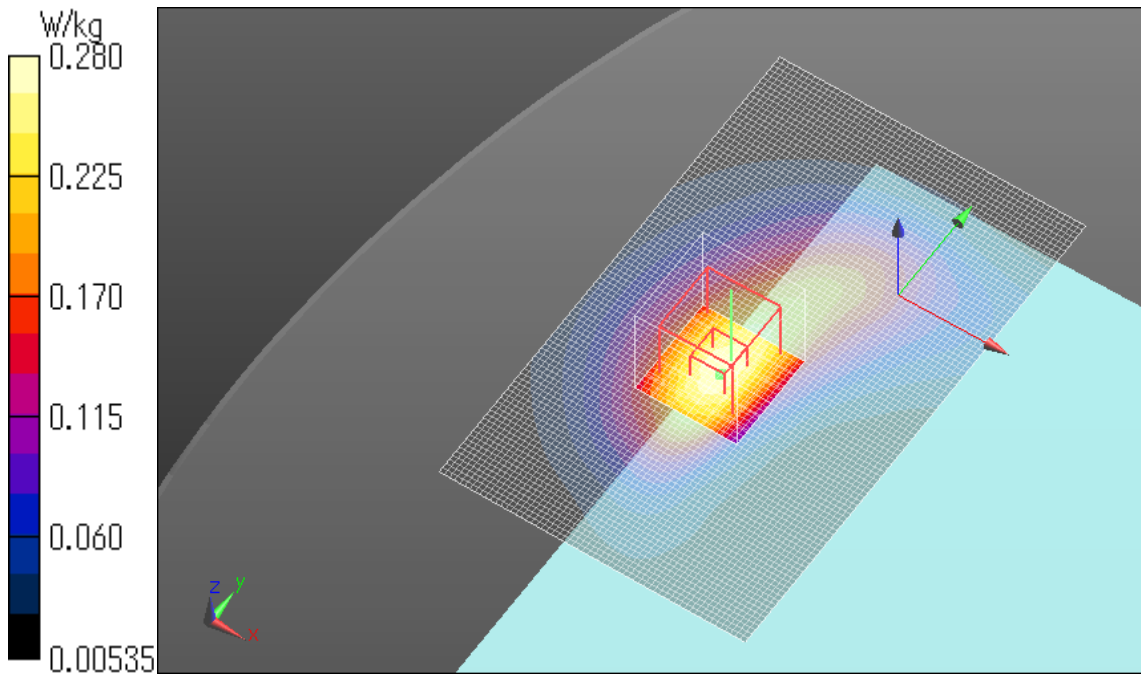


LTE Band XXV Main Ant. Rear 13mm 50RB Full power 1905MHz

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 25, E-UTRA/FDD (1850.0 - 1915.0 MHz); Frequency: 1905 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1905$ MHz; $\sigma = 1.581$ S/m; $\epsilon_r = 52.268$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration
Probe: EX3DV4 - SN3917; ConvF(7.62, 7.62, 7.62); Calibrated: 2013/05/14;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1369; Calibrated: 2013/05/13
Phantom: ELI v5.0 SN1203; Type: QDOVA002AA; Serial: TP:1203
Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.238 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 12.323 V/m; Power Drift = -0.10 dB
Peak SAR (extrapolated) = 0.285 W/kg
SAR(1 g) = 0.174 W/kg; SAR(10 g) = 0.105 W/kg
Maximum value of SAR (measured) = 0.233 W/kg

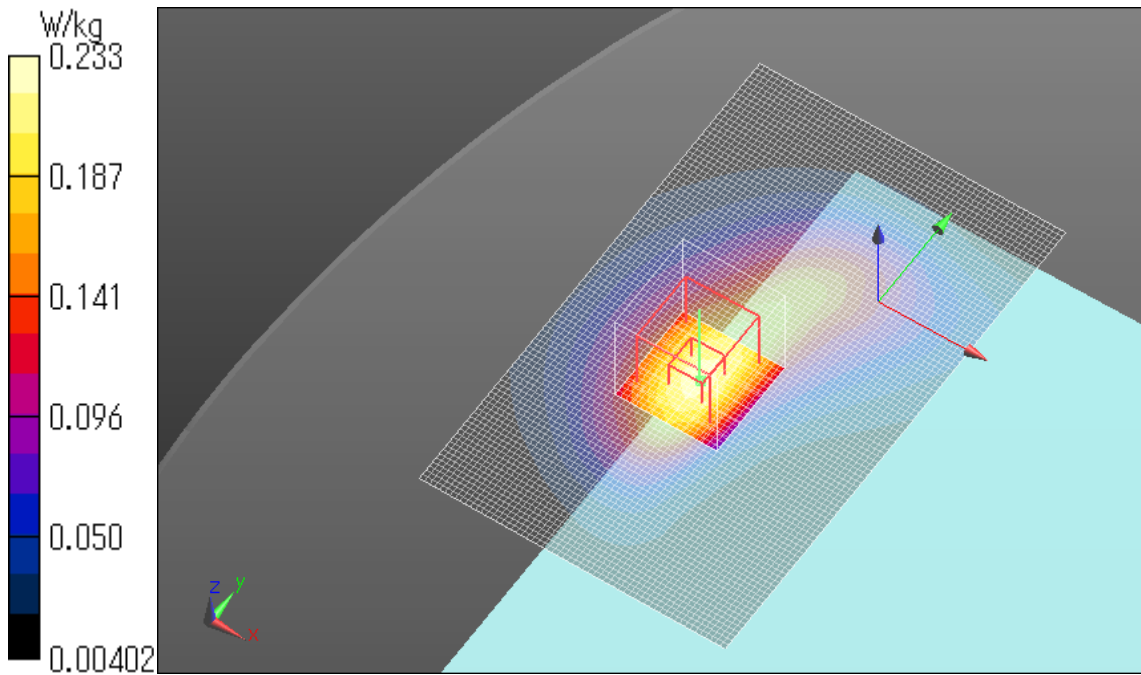


LTE Band XXV Main Ant. Edge1 21mm 1RB Full power 1882.5MHz

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 25, E-UTRA/FDD (1850.0 - 1915.0 MHz); Frequency: 1882.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1882.5$ MHz; $\sigma = 1.557$ S/m; $\epsilon_r = 52.368$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration
Probe: EX3DV4 - SN3917; ConvF(7.62, 7.62, 7.62); Calibrated: 2013/05/14;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1369; Calibrated: 2013/05/13
Phantom: ELI v5.0 SN1203; Type: QDOVA002AA; Serial: TP:1203
Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Area Scan (51x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.420 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 16.814 V/m; Power Drift = -0.14 dB
Peak SAR (extrapolated) = 0.506 W/kg
SAR(1 g) = 0.320 W/kg; SAR(10 g) = 0.197 W/kg
Maximum value of SAR (measured) = 0.422 W/kg

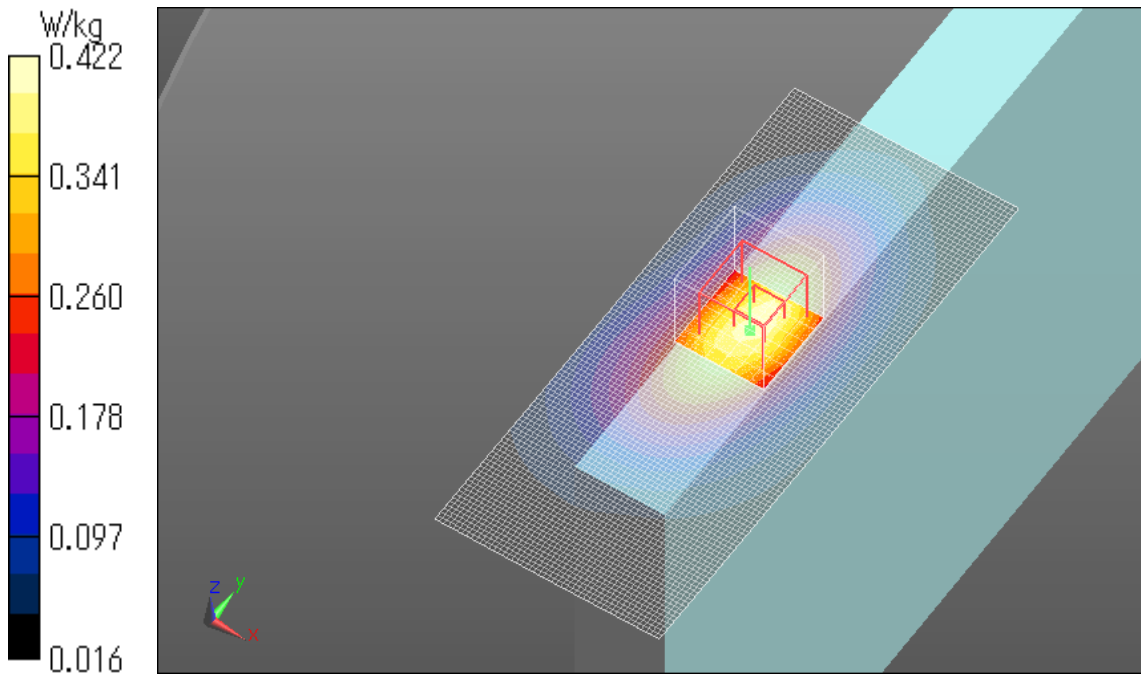


LTE Band XXV Main Ant. Edge1 21mm 50RB Full power 1905MHz

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 25, E-UTRA/FDD (1850.0 - 1915.0 MHz); Frequency: 1905 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1905$ MHz; $\sigma = 1.581$ S/m; $\epsilon_r = 52.268$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration
Probe: EX3DV4 - SN3917; ConvF(7.62, 7.62, 7.62); Calibrated: 2013/05/14;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1369; Calibrated: 2013/05/13
Phantom: ELI v5.0 SN1203; Type: QDOVA002AA; Serial: TP:1203
Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Area Scan (51x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.324 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 14.616 V/m; Power Drift = -0.16 dB
Peak SAR (extrapolated) = 0.398 W/kg
SAR(1 g) = 0.247 W/kg; SAR(10 g) = 0.152 W/kg
Maximum value of SAR (measured) = 0.328 W/kg

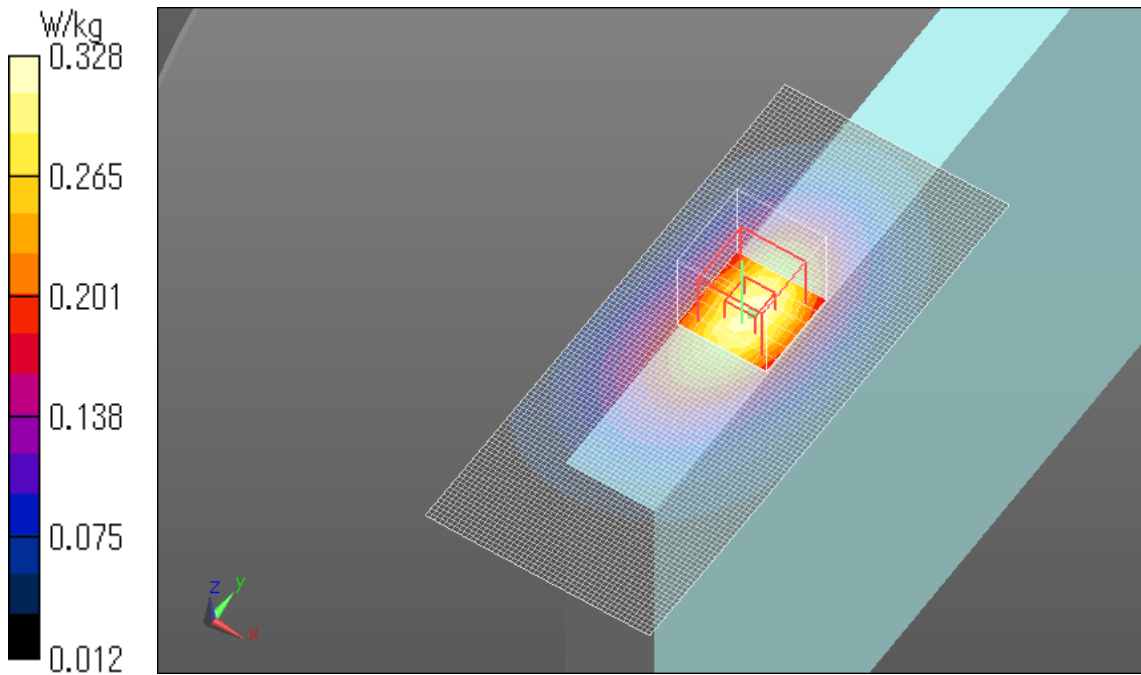


LTE Band XXV Main Ant. Edge4 0mm 1RB Full power 1882.5MHz

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 25, E-UTRA/FDD (1850.0 - 1915.0 MHz); Frequency: 1882.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1882.5$ MHz; $\sigma = 1.557$ S/m; $\epsilon_r = 52.368$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration
Probe: EX3DV4 - SN3917; ConvF(7.62, 7.62, 7.62); Calibrated: 2013/05/14;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1369; Calibrated: 2013/05/13
Phantom: ELI v5.0 SN1203; Type: QDOVA002AA; Serial: TP:1203
Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Area Scan (61x181x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.306 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 14.160 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 0.393 W/kg
SAR(1 g) = 0.208 W/kg; SAR(10 g) = 0.110 W/kg
Maximum value of SAR (measured) = 0.299 W/kg

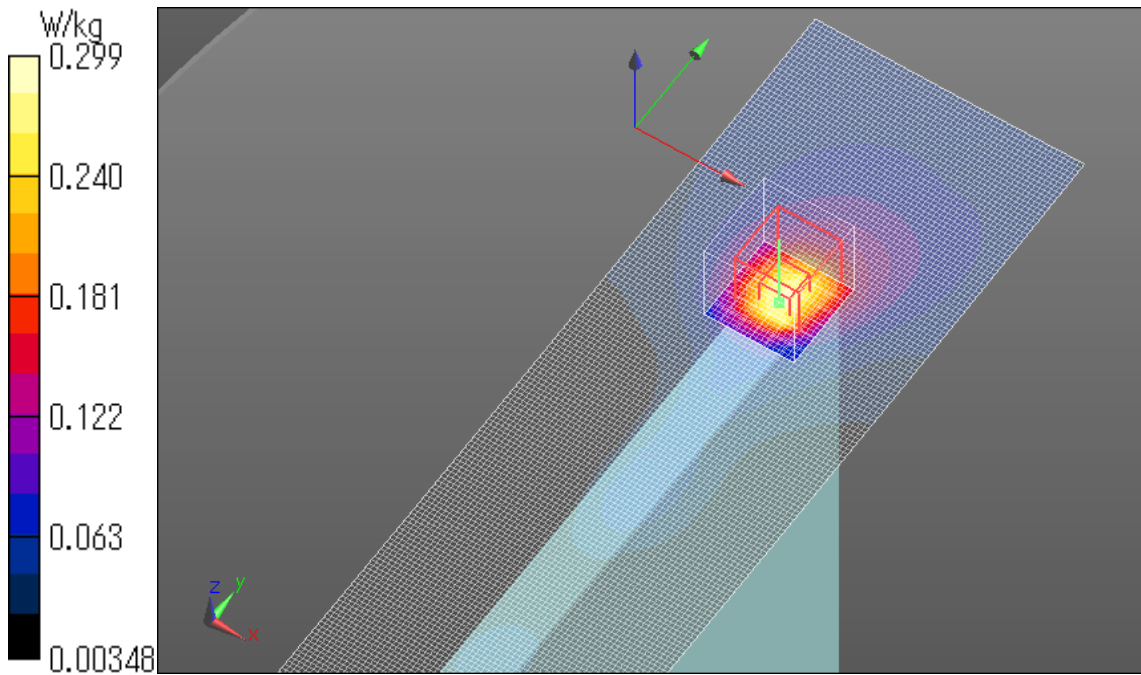

LTE Band XXV Main Ant. Edge4 0mm 50RB Full power 1905MHz

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 25, E-UTRA/FDD (1850.0 - 1915.0 MHz); Frequency: 1905 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1905$ MHz; $\sigma = 1.581$ S/m; $\epsilon_r = 52.268$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration
Probe: EX3DV4 - SN3917; ConvF(7.62, 7.62, 7.62); Calibrated: 2013/05/14;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1369; Calibrated: 2013/05/13
Phantom: ELI v5.0 SN1203; Type: QDOVA002AA; Serial: TP:1203
Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Area Scan (61x181x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.179 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 10.729 V/m; Power Drift = -0.06 dB
Peak SAR (extrapolated) = 0.226 W/kg
SAR(1 g) = 0.126 W/kg; SAR(10 g) = 0.067 W/kg
Maximum value of SAR (measured) = 0.176 W/kg

