




PCTEST ENGINEERING LABORATORY, INC.

7185 Oakland Mills Road, Columbia, MD 21046 USA

Tel. 410.290.6652 / Fax 410.290.6654

http://www.pctest.com



MEASUREMENT REPORT WCDMA

Applicant Name:

Panasonic Corporation of North America
Two Riverfront Plaza, 9th Floor
Newark, NJ 07102-5490
United States

Date of Testing:

5/1-6/18/2018

Test Site/Location:

PCTEST Lab. Columbia, MD, USA

Test Report Serial No.:

1M1804230079-02.ACJ

FCC ID:

ACJFZN1D

IC:

216A-FZN1D

APPLICANT:

Panasonic Corporation of North America

Application Type:

Certification

Model/HVIN:

FZ-N1EB

Additional Model(s)/HVIN:

FZ-N1EC

EUT Type:

Portable Handset

FCC Classification:

PCS Licensed Transmitter Held to Ear (PCE)

FCC Rule Part(s):

22 & 24

ISED Specification:


RSS-132 & RSS-133

Test Procedure(s):

ANSI C63.26-2015, ANSI/TIA-603-E-2016, KDB 971168 D01 v03r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.


Randy Ortanez
President




FCC ID: ACJFZN1D		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804230079-02.ACJ	Test Dates: 5/1-6/18/2018	EUT Type: Portable Handset		Page 1 of 46


TABLE OF CONTENTS

1.0	INTRODUCTION	4
1.1	Scope	4
1.2	PCTEST Test Location.....	4
1.3	Test Facility / Accreditations.....	4
2.0	PRODUCT INFORMATION.....	5
2.1	Equipment Description	5
2.2	Device Capabilities.....	5
2.3	Test Configuration	5
2.4	EMI Suppression Device(s)/Modifications	5
3.0	DESCRIPTION OF TESTS	6
3.1	Evaluation Procedure	6
3.2	Cellular - Base Frequency Blocks	6
3.3	Cellular - Mobile Frequency Blocks	6
3.4	PCS - Base Frequency Blocks	6
3.5	PCS - Mobile Frequency Blocks.....	7
3.6	Radiated Measurements	7
4.0	MEASUREMENT UNCERTAINTY	8
5.0	TEST EQUIPMENT CALIBRATION DATA	9
6.0	SAMPLE CALCULATIONS	10
7.0	TEST RESULTS.....	11
7.1	Summary.....	11
7.2	Occupied Bandwidth	12
7.3	Spurious and Harmonic Emissions at Antenna Terminal	14
7.4	Band Edge Emissions at Antenna Terminal	25
7.5	Peak-Average Ratio	29
7.6	Radiated Power (ERP/EIRP).....	31
7.6.1	Radiated Power (ERP/EIRP).....	34
7.7	Radiated Spurious Emissions Measurements.....	35
7.8	Radiated Spurious Emissions Measurements.....	37
7.9	Frequency Stability / Temperature Variation	41
8.0	CONCLUSION.....	46

FCC ID: ACJFZN1D		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804230079-02.ACJ	Test Dates: 5/1-6/18/2018	EUT Type: Portable Handset	Page 2 of 46	



MEASUREMENT REPORT WCDMA



Mode	FCC Rule Part	Tx Frequency (MHz)	ERP		EIRP		Emission Designator
			Max. Power (W)	Max. Power (dBm)	Max. Power (W)	Max. Power (dBm)	
WCDMA850	22H	826.4 - 846.6	0.102	20.10	0.168	22.25	4M16F9W
WCDMA1900	24E	1852.4 - 1907.6			0.460	26.63	4M16F9W

EUT Overview

FCC ID: ACJFZN1D		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804230079-02.ACJ	Test Dates: 5/1-6/18/2018	EUT Type: Portable Handset		Page 3 of 46

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.

- PCTEST is an ISO 17025-2005 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- PCTEST facility is a registered (2451B) test laboratory with the site description on file with ISED.

FCC ID: ACJFZN1D		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804230079-02.ACJ	Test Dates: 5/1-6/18/2018	EUT Type: Portable Handset	Page 4 of 46	

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Panasonic Portable Handset FCC ID: ACJFZN1D**. The test data contained in this report pertains only to the emissions due to the EUT's 2G/3G licensed transmitters.

Test Device Serial No.: 03516

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 WCDMA/HSPA, Multi-band LTE, 802.11b/g/n WLAN, 802.11a/n/ac UNII, Bluetooth (1x, EDR, LE), NFC

2.3 Test Configuration

The EUT was tested per the guidance of ANSI/TIA-603-E-2016 and KDB 971168 D01 v03r01. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: ACJFZN1D		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804230079-02.ACJ	Test Dates: 5/1-6/18/2018	EUT Type: Portable Handset	Page 5 of 46	


3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI/TIA-603-E-2016) and “Measurement Guidance for Certification of Licensed Digital Transmitters” (KDB 971168 D01 v03r01) were used in the measurement of the EUT.

Deviation from Measurement Procedure.....None

3.2 Cellular - Base Frequency Blocks

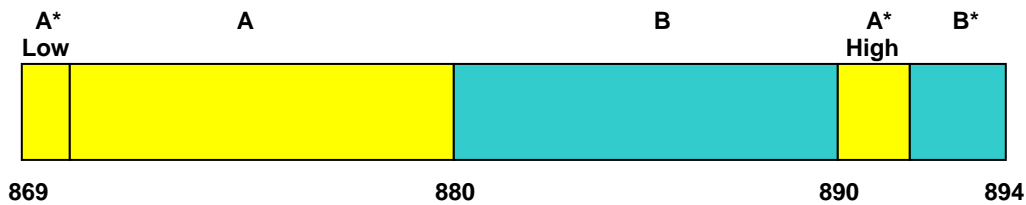


BLOCK 1: 869 – 880 MHz (A* Low + A)

BLOCK 3: 890 – 891.5 MHz (A* High)

BLOCK 2: 880 – 890 MHz (B)

BLOCK 4: 891.5 – 894 MHz (B*)

3.3 Cellular - Mobile Frequency Blocks

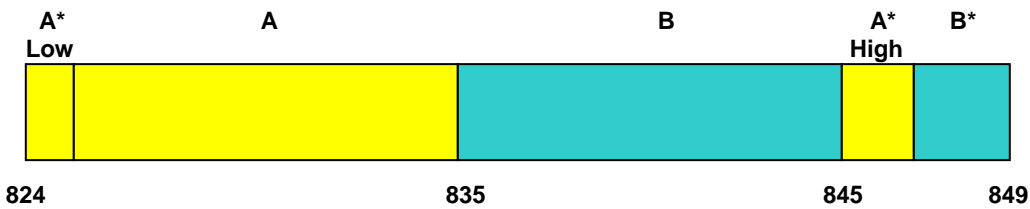


BLOCK 1: 824 – 835 MHz (A* Low + A)

BLOCK 3: 845 – 846.5 MHz (A* High)

BLOCK 2: 835 – 845 MHz (B)

BLOCK 4: 846.5 – 849 MHz (B*)

3.4 PCS - Base Frequency Blocks

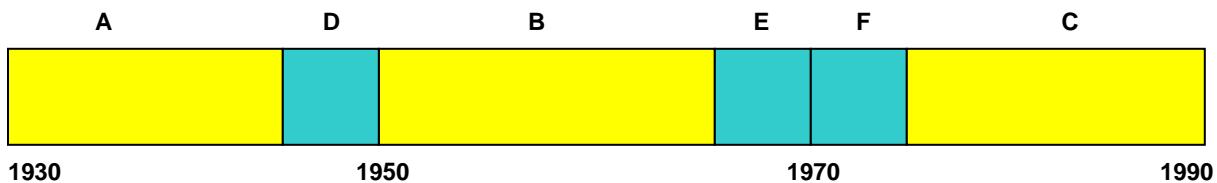

BLOCK 1: 1930 – 1945 MHz (A)

BLOCK 4: 1965 – 1970 MHz (E)

BLOCK 2: 1945 – 1950 MHz (D)

BLOCK 5: 1970 – 1975 MHz (F)

BLOCK 3: 1950 – 1965 MHz (B)

BLOCK 6: 1975 – 1990 MHz (C)

FCC ID: ACJFZN1D		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804230079-02.ACJ	Test Dates: 5/1-6/18/2018	EUT Type: Portable Handset		Page 6 of 46

4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (\pm dB)
Conducted Bench Top Measurements	1.13
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: ACJFZN1D		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804230079-02.ACJ	Test Dates: 5/1-6/18/2018	EUT Type: Portable Handset	Page 8 of 46	

5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	N9020A	MXA Signal Analyzer	1/24/2018	Annual	1/24/2019	US46470561
Emco	6502	Active Loop Antenna (10k - 30 MHz)	8/9/2016	Biennial	8/9/2018	2936
EMCO	3160-09	Small Horn (18 - 26.5GHz)	8/23/2016	Biennial	8/23/2018	135427
Espec	ESX-2CA	Environmental Chamber	3/28/2018	Annual	3/28/2019	17620
Rohde & Schwarz	CMU200	Base Station Simulator	N/A			107826
Rohde & Schwarz	TS-PR26	18-26.5 GHz Pre-Amplifier	5/11/2017	Annual	5/11/2018	100040
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	7/31/2017	Annual	7/31/2018	100348
Rohde & Schwarz	FSW67	Signal / Spectrum Analyzer	8/11/2017	Annual	8/11/2018	103200
Rohde & Schwarz	TC-TA18	Cross-Pol Antenna 400MHz-18GHz	10/30/2017	Annual	10/30/2018	101058
Rohde & Schwarz	SFUNIT-Rx	Shielded Filter Unit	7/3/2017	Annual	7/3/2018	102135
Rohde & Schwarz	SFUNIT-Rx	Shielded Filter Unit	7/3/2017	Annual	7/3/2018	102134
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	4/19/2018	Biennial	4/19/2020	A051107
Sunol	DRH-118	Horn Antenna (1-18 GHz)	8/11/2017	Biennial	8/11/2019	A042511

Table 5-1. Test Equipment

Notes:

1. For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
2. Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.

FCC ID: ACJFZN1D		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804230079-02.ACJ	Test Dates: 5/1-6/18/2018	EUT Type: Portable Handset	Page 9 of 46	

6.0 SAMPLE CALCULATIONS

WCDMA Emission Designator

Emission Designator = 4M16F9W

WCDMA BW = 4.16 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

Spurious Radiated Emission

Example: Spurious emission at 3700.40 MHz

The receive spectrum analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 3700.40 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.50 dBm so this harmonic was 25.50 dBm $- (-24.80) = 50.3$ dBc.

FCC ID: ACJFZN1D		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804230079-02.ACJ	Test Dates: 5/1-6/18/2018	EUT Type: Portable Handset	Page 10 of 46	

7.0 TEST RESULTS

7.1 Summary

Company Name: Panasonic Corporation of North America
 FCC ID: ACJFZN1D
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 Mode(s): WCDMA

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
2.1049	RSS-Gen (4.6.1) RSS-133(2.3)	Occupied Bandwidth	N/A	CONDUCTED	PASS	Section 7.2
2.1051 22.917(a) 24.238(a)	RSS-132(5.5) RSS-133(6.5)	Conducted Band Edge / Spurious Emissions	> 43 + log ₁₀ (P[Watts]) at Band Edge and for all out-of-band emissions		PASS	Sections 7.3, 7.4
24.232(d)	RSS-132(5.4) RSS-133(6.4)	Peak-Average Ratio	< 13 dB		PASS	Section 7.5
2.1046	RSS-132(5.4) RSS-133(4.1)	Transmitter Conducted Output Power	N/A		PASS	RF Exposure Report
2.1055 22.355 24.235	RSS-132(5.3) RSS-133(6.3)	Frequency Stability	< 2.5 ppm (Part 22) Emission must remain in band (Part 24)		PASS	Section 7.9
22.913(a)(5)	RSS-132(5.4)	Effective Radiated Power	< 7 Watts max. ERP	RADIATED	PASS	Section 7.6
24.232(c)	RSS-133(6.4)	Equivalent Isotropic Radiated Power	< 2 Watts max. EIRP		PASS	Section 7.6
2.1053 22.917(a) 24.238(a)	RSS-132(5.5) RSS-133(6.5)	Radiated Spurious Emissions	> 43 + log ₁₀ (P[Watts]) for all out-of-band emissions		PASS	Section 7.7

Table 7-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "2G/3G Automation," Version 3.9.

FCC ID: ACJFZN1D		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804230079-02.ACJ	Test Dates: 5/1-6/18/2018	EUT Type: Portable Handset	Page 11 of 46	

7.2 Occupied Bandwidth

Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 4.2

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


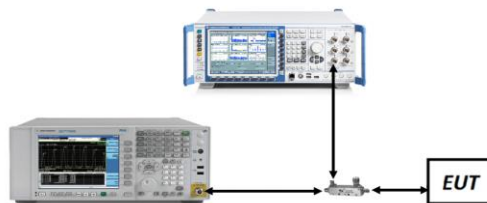


Figure 7-1. Test Instrument & Measurement Setup


Test Notes

None.

FCC ID: ACJFZN1D		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804230079-02.ACJ	Test Dates: 5/1-6/18/2018	EUT Type: Portable Handset		Page 12 of 46

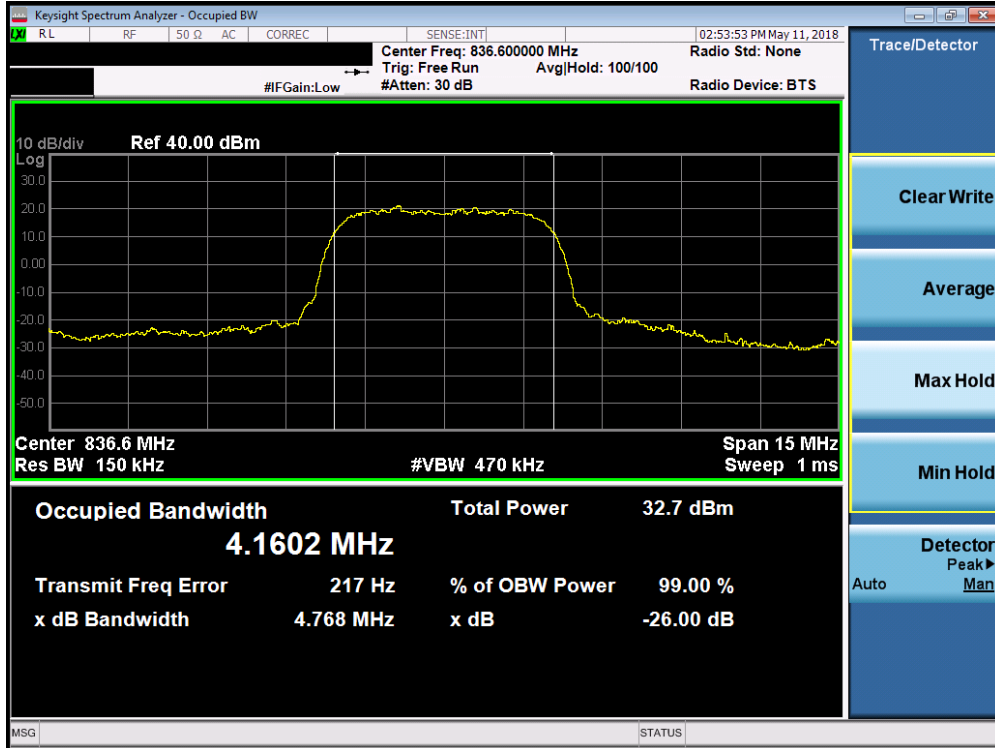

Plot 7-1. Occupied Bandwidth Plot (Cellular WCDMA Mode)

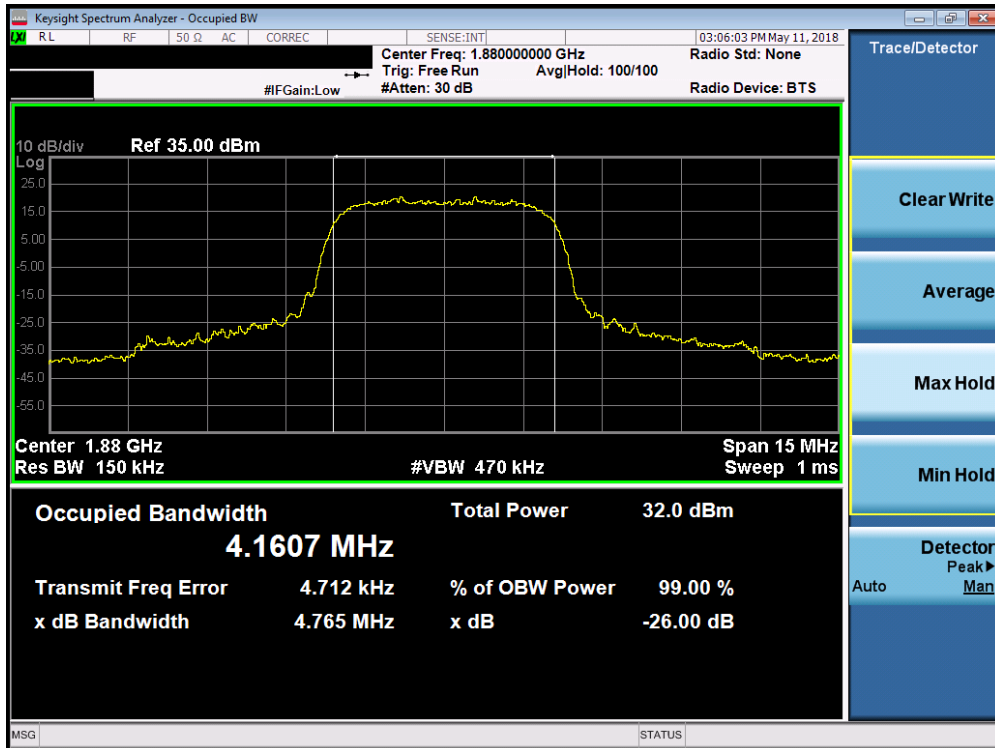

Plot 7-2. Occupied Bandwidth Plot (PCS WCDMA Mode)

FCC ID: ACJFZN1D	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Approved by: Quality Manager
Test Report S/N: 1M1804230079-02.ACJ	Test Dates: 5/1-6/18/2018	EUT Type: Portable Handset		Page 13 of 46

7.3 Spurious and Harmonic Emissions at Antenna Terminal

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P_{[Watts]})$, where P is the transmitter power in Watts.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 10GHz for Cell, 20GHz for AWS, 20GHz for PCS (separated into at least two plots per channel)
2. Detector = RMS
3. Trace mode = trace average
4. Sweep time = auto couple
5. The trace was allowed to stabilize
6. Please see test notes below for RBW and VBW settings

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

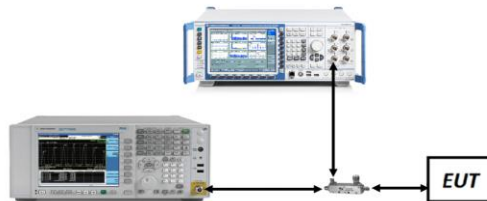



Figure 7-2. Test Instrument & Measurement Setup

Test Notes


Per 24.238(b), and RSS-133(6.5), compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth of 1MHz, and 100 kHz or greater for Part 22 and RSS-132 measurements below 1GHz. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

FCC ID: ACJFZN1D		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804230079-02.ACJ	Test Dates: 5/1-6/18/2018	EUT Type: Portable Handset	Page 14 of 46	

Cellular WCDMA Mode

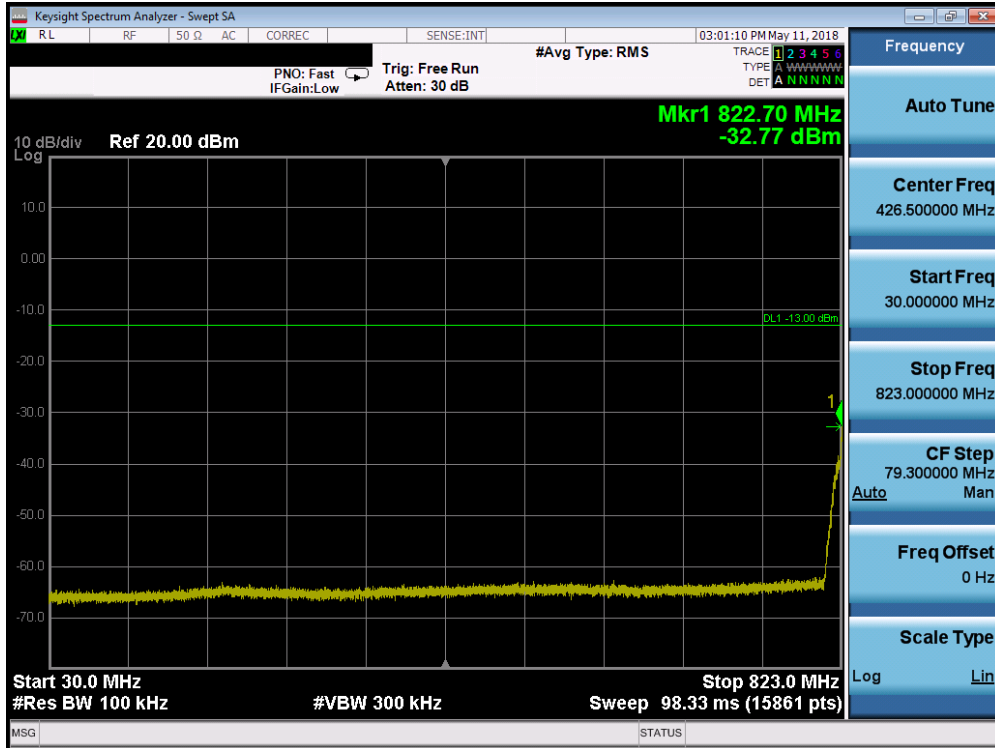


Plot 7-3. Conducted Spurious Plot (Cellular WCDMA Mode - Low Channel)

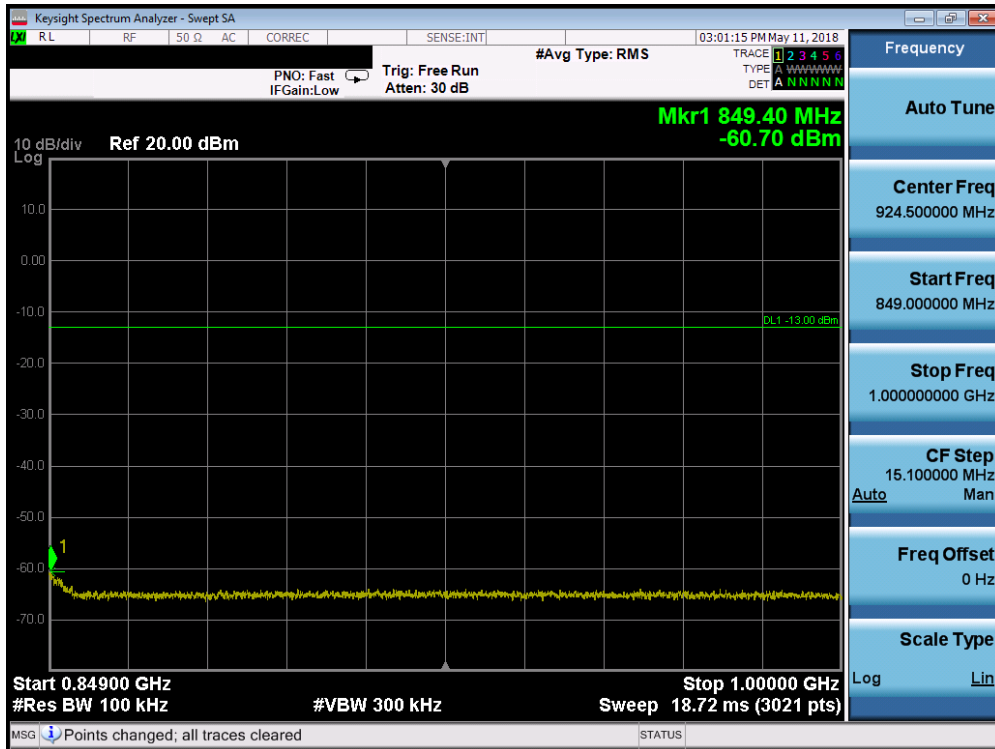


Plot 7-4. Conducted Spurious Plot (Cellular WCDMA Mode - Low Channel)

FCC ID: ACJFZN1D	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Approved by: Quality Manager
Test Report S/N: 1M1804230079-02.ACJ	Test Dates: 5/1-6/18/2018	EUT Type: Portable Handset		Page 15 of 46

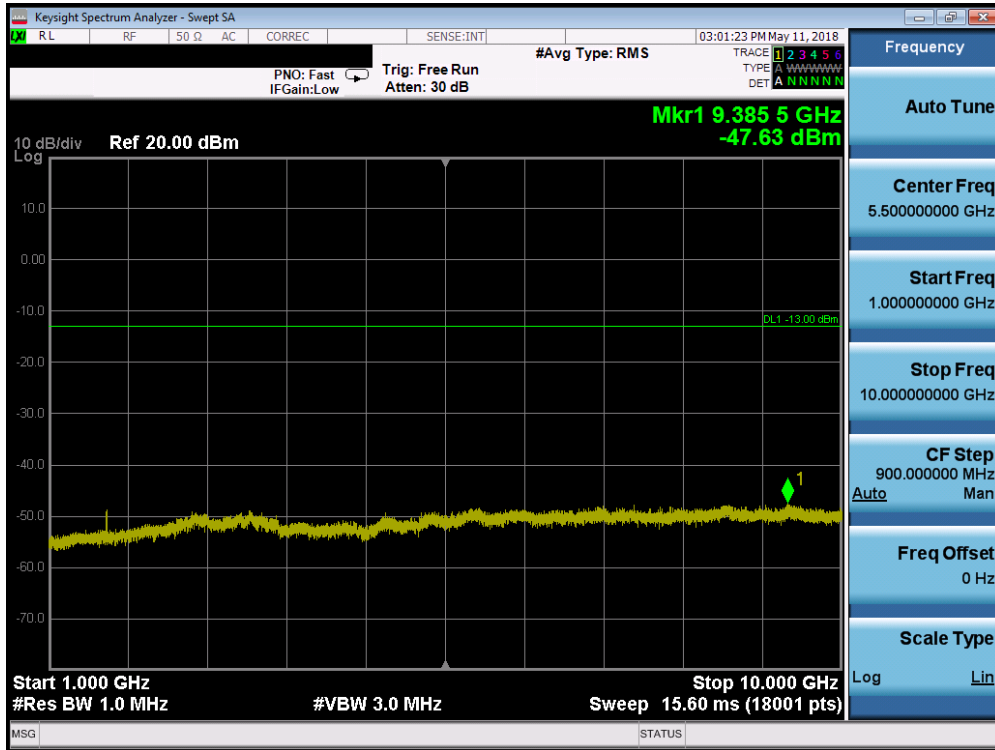


Plot 7-5. Conducted Spurious Plot (Cellular WCDMA Mode - Low Channel)

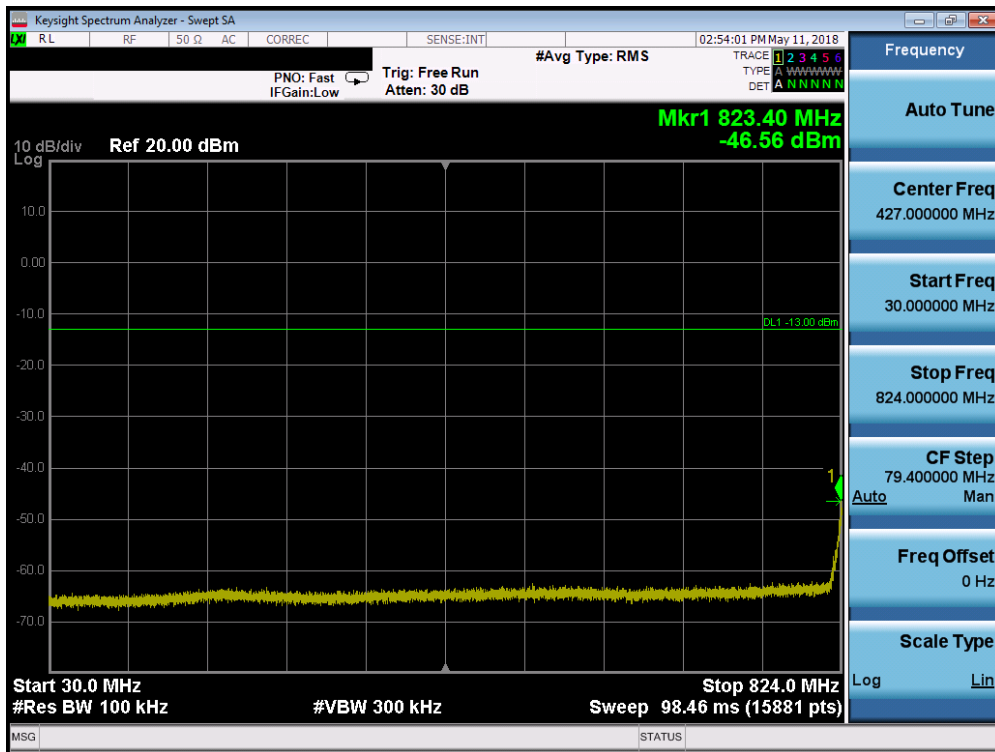


Plot 7-6. Conducted Spurious Plot (Cellular WCDMA Mode - Mid Channel)

FCC ID: ACJFZN1D	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Approved by: Quality Manager
Test Report S/N: 1M1804230079-02.ACJ	Test Dates: 5/1-6/18/2018	EUT Type: Portable Handset		Page 16 of 46

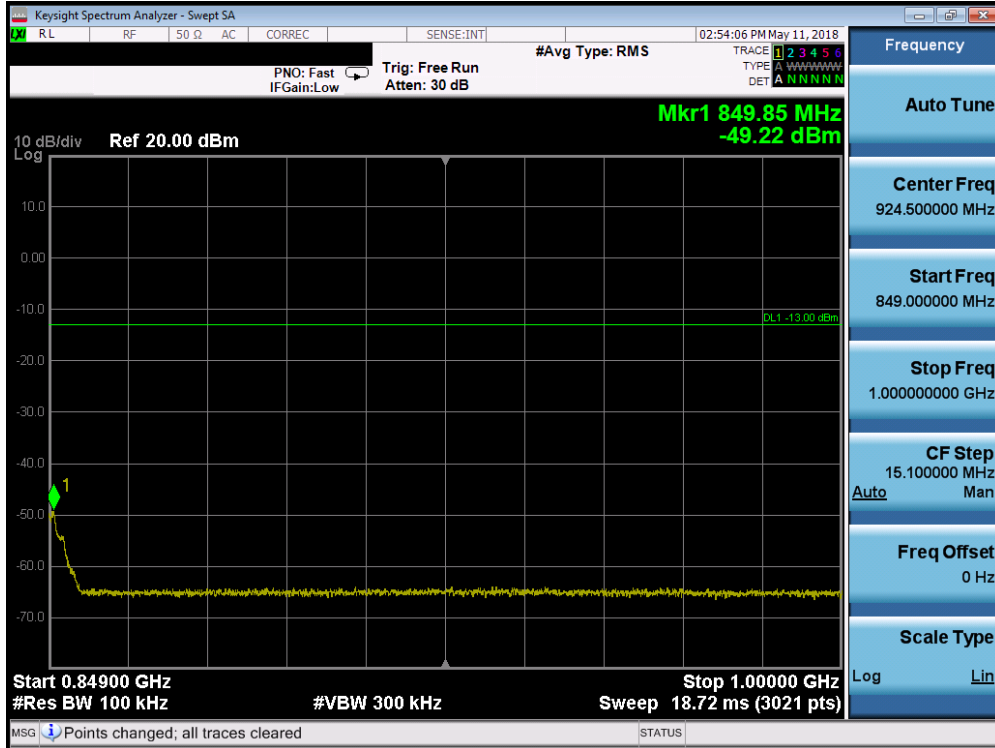


Plot 7-7. Conducted Spurious Plot (Cellular WCDMA Mode - Mid Channel)

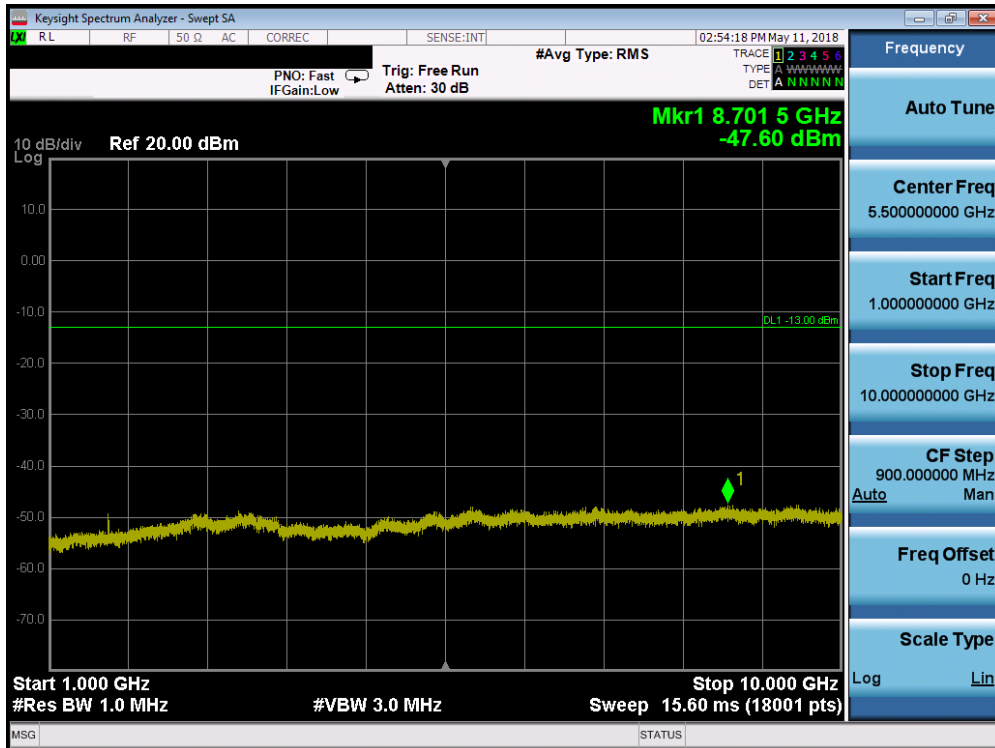


Plot 7-8. Conducted Spurious Plot (Cellular WCDMA Mode - Mid Channel)

FCC ID: ACJFZN1D	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Approved by: Quality Manager
Test Report S/N: 1M1804230079-02.ACJ	Test Dates: 5/1-6/18/2018	EUT Type: Portable Handset		Page 17 of 46

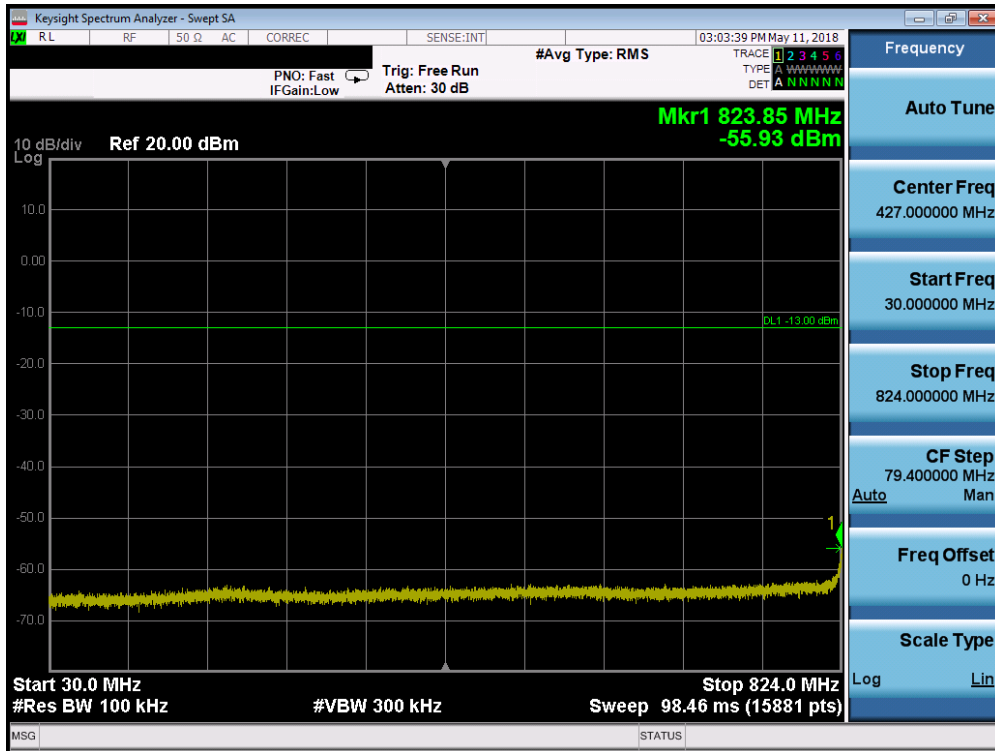


Plot 7-9. Conducted Spurious Plot (Cellular WCDMA Mode - High Channel)

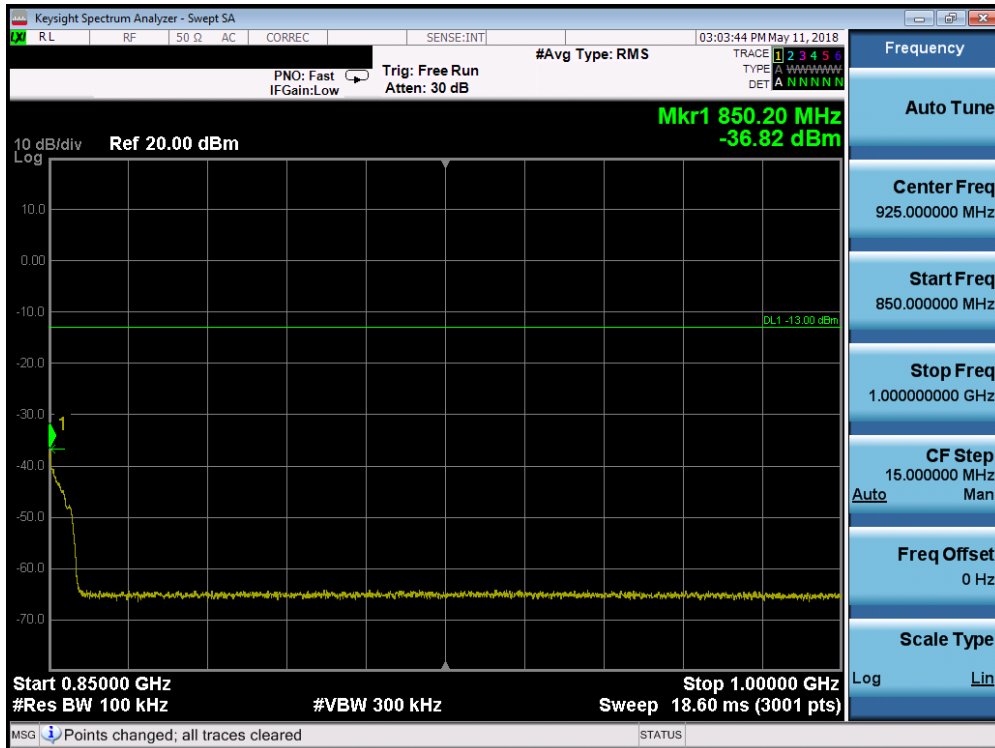

Plot 7-10. Conducted Spurious Plot (Cellular WCDMA Mode - High Channel)


FCC ID: ACJFZN1D	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Approved by: Quality Manager
Test Report S/N: 1M1804230079-02.ACJ	Test Dates: 5/1-6/18/2018	EUT Type: Portable Handset		Page 18 of 46

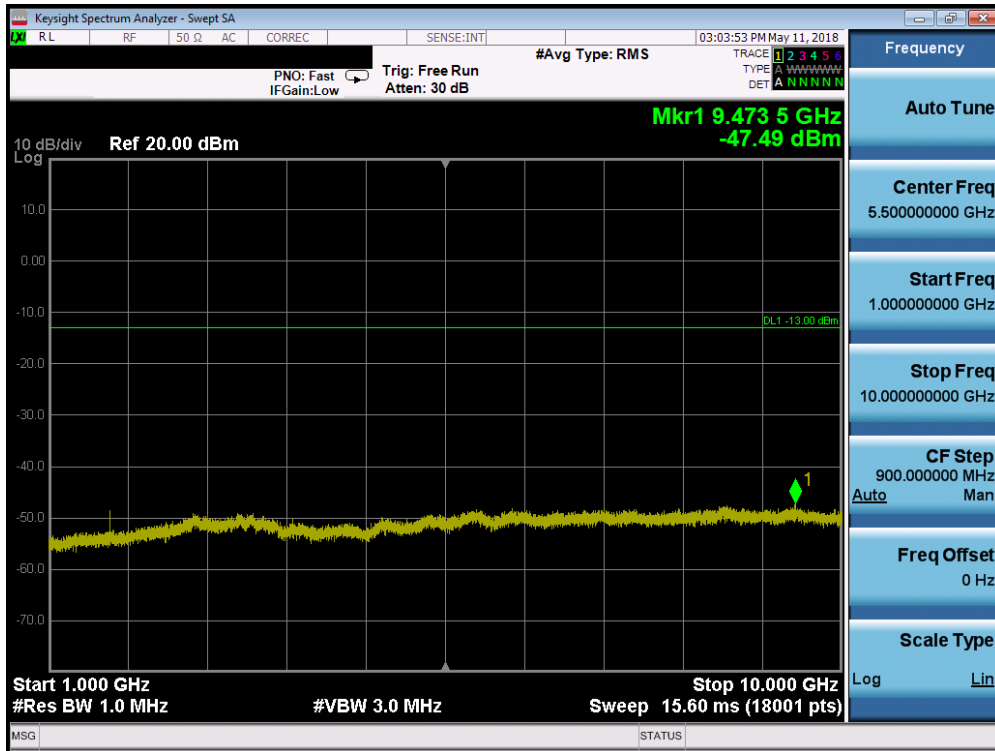


Plot 7-11. Conducted Spurious Plot (Cellular WCDMA Mode - High Channel)

FCC ID: ACJFZN1D	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Approved by: Quality Manager
Test Report S/N: 1M1804230079-02.ACJ	Test Dates: 5/1-6/18/2018	EUT Type: Portable Handset		Page 19 of 46

PCS WCDMA Mode

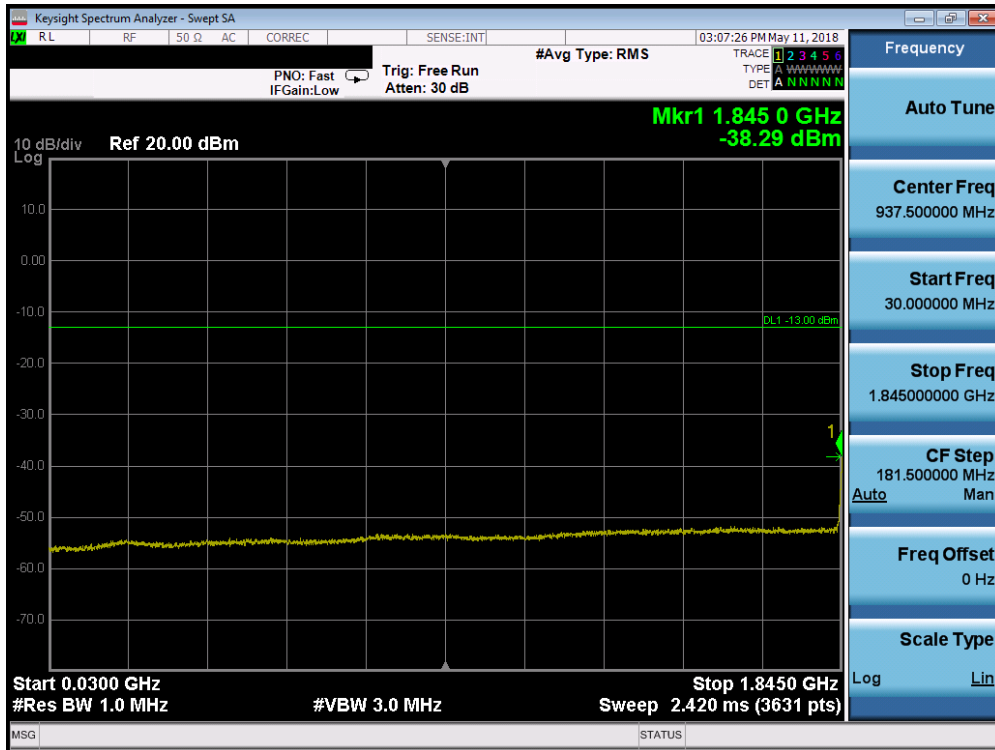


Plot 7-12. Conducted Spurious Plot (PCS WCDMA Mode - Low Channel)

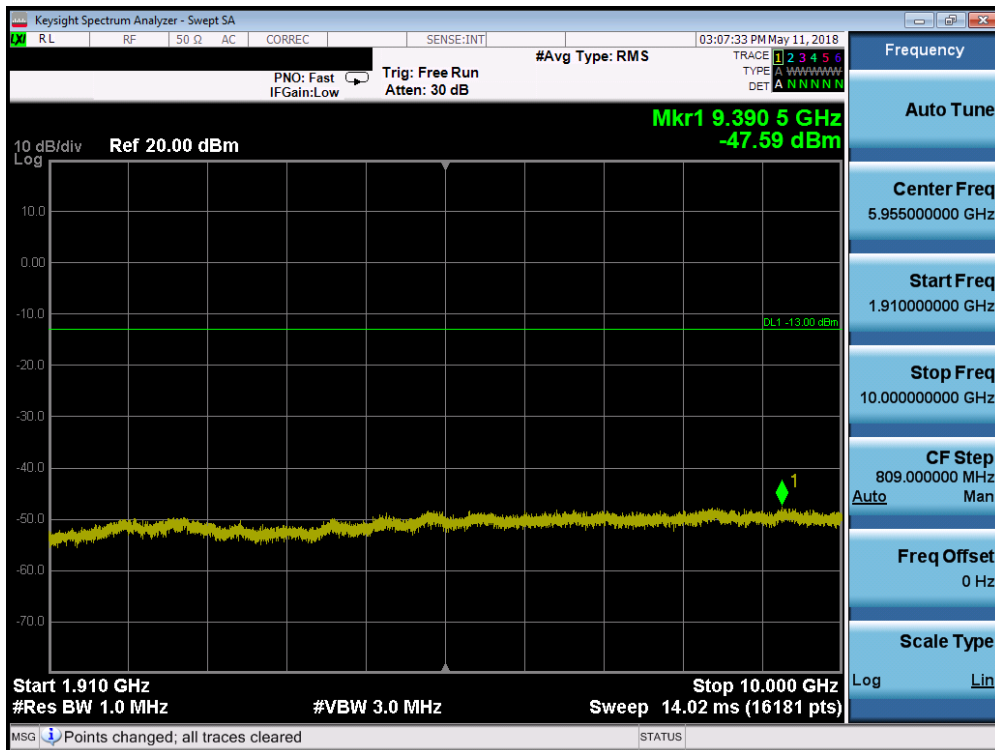


Plot 7-13. Conducted Spurious Plot (PCS WCDMA Mode - Low Channel)

FCC ID: ACJFZN1D	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Approved by: Quality Manager
Test Report S/N: 1M1804230079-02.ACJ	Test Dates: 5/1-6/18/2018	EUT Type: Portable Handset		Page 20 of 46

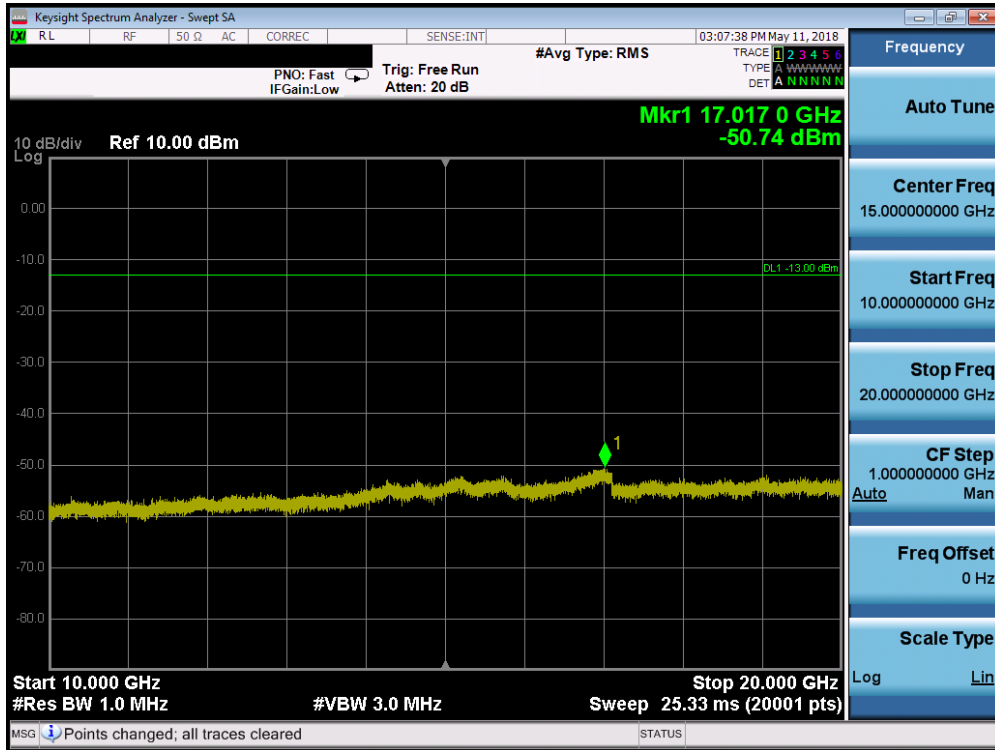


Plot 7-14. Conducted Spurious Plot (PCS WCDMA Mode - Low Channel)

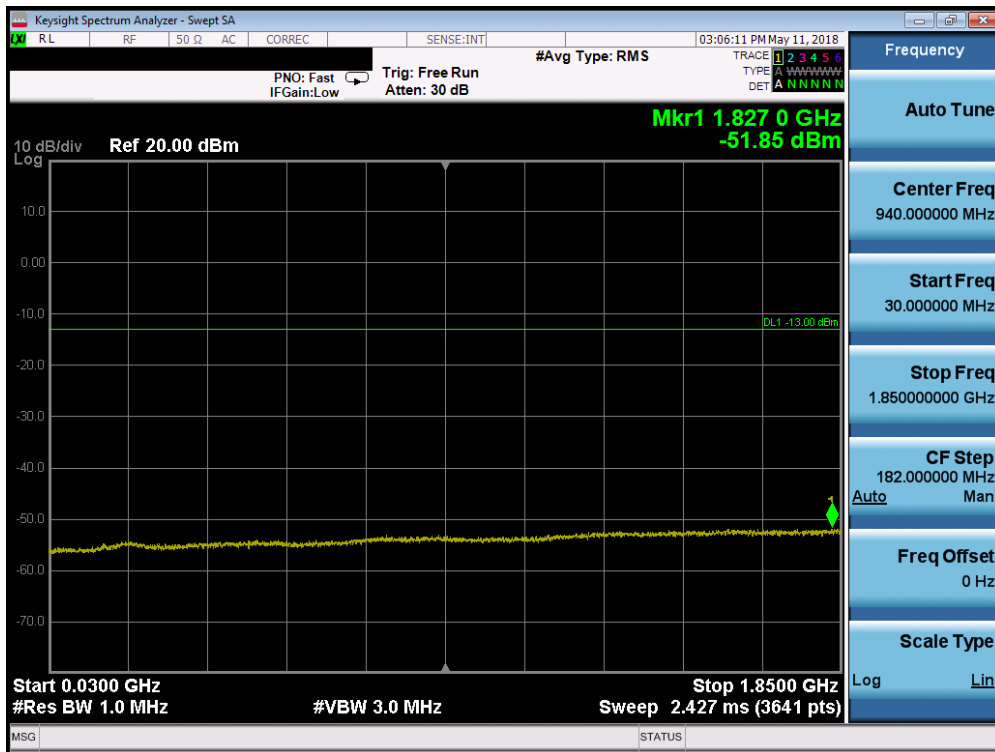


Plot 7-15. Conducted Spurious Plot (PCS WCDMA Mode - Mid Channel)

FCC ID: ACJFZN1D	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Approved by: Quality Manager
Test Report S/N: 1M1804230079-02.ACJ	Test Dates: 5/1-6/18/2018	EUT Type: Portable Handset		Page 21 of 46

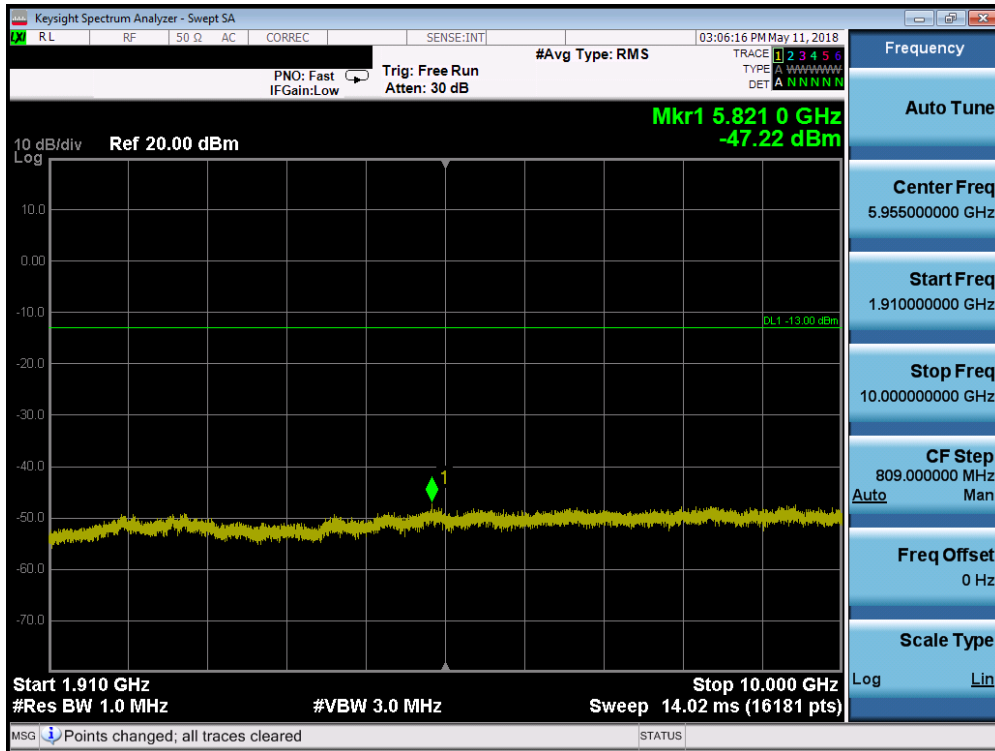


Plot 7-16. Conducted Spurious Plot (PCS WCDMA Mode - Mid Channel)

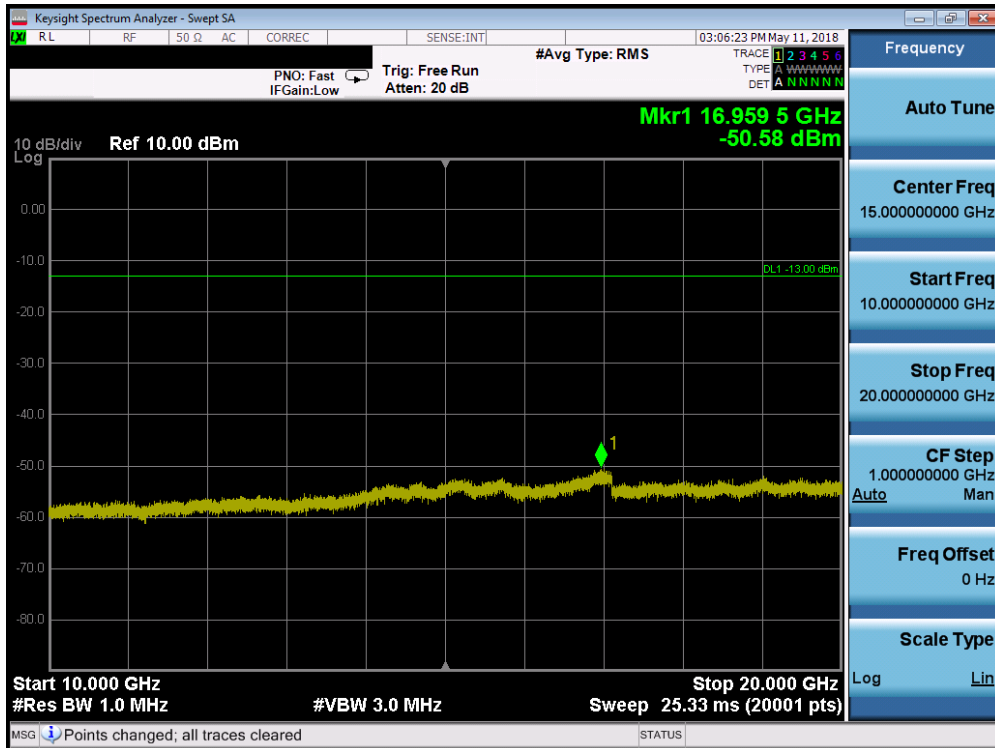


Plot 7-17. Conducted Spurious Plot (PCS WCDMA Mode - Mid Channel)

FCC ID: ACJFZN1D	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Approved by: Quality Manager
Test Report S/N: 1M1804230079-02.ACJ	Test Dates: 5/1-6/18/2018	EUT Type: Portable Handset		Page 22 of 46

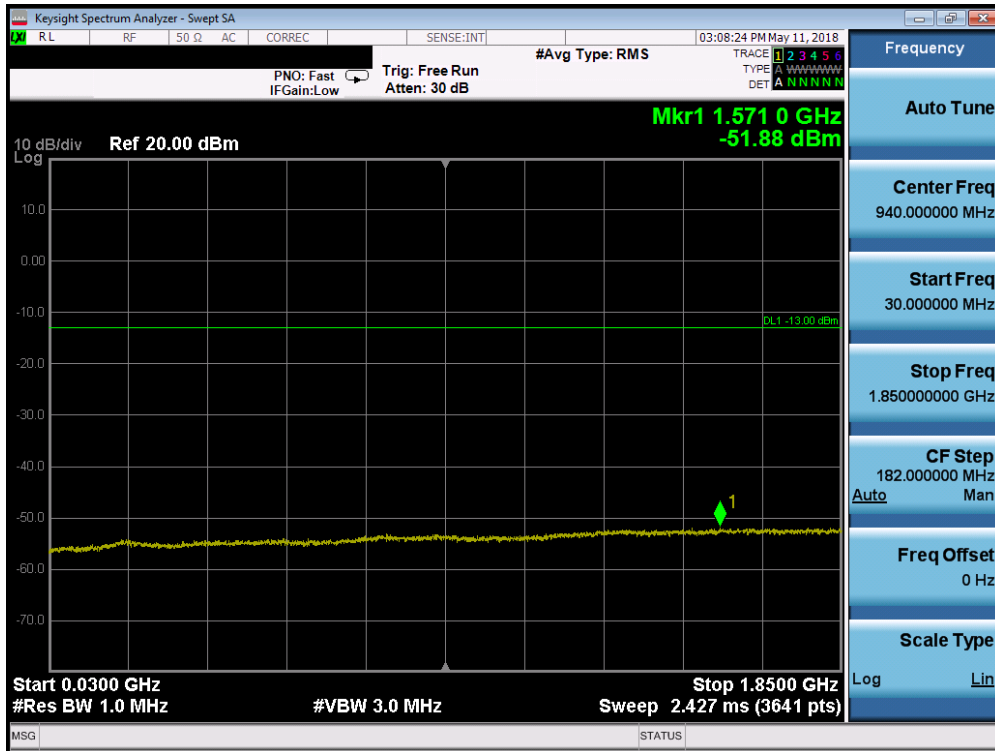


Plot 7-18. Conducted Spurious Plot (PCS WCDMA Mode - High Channel)

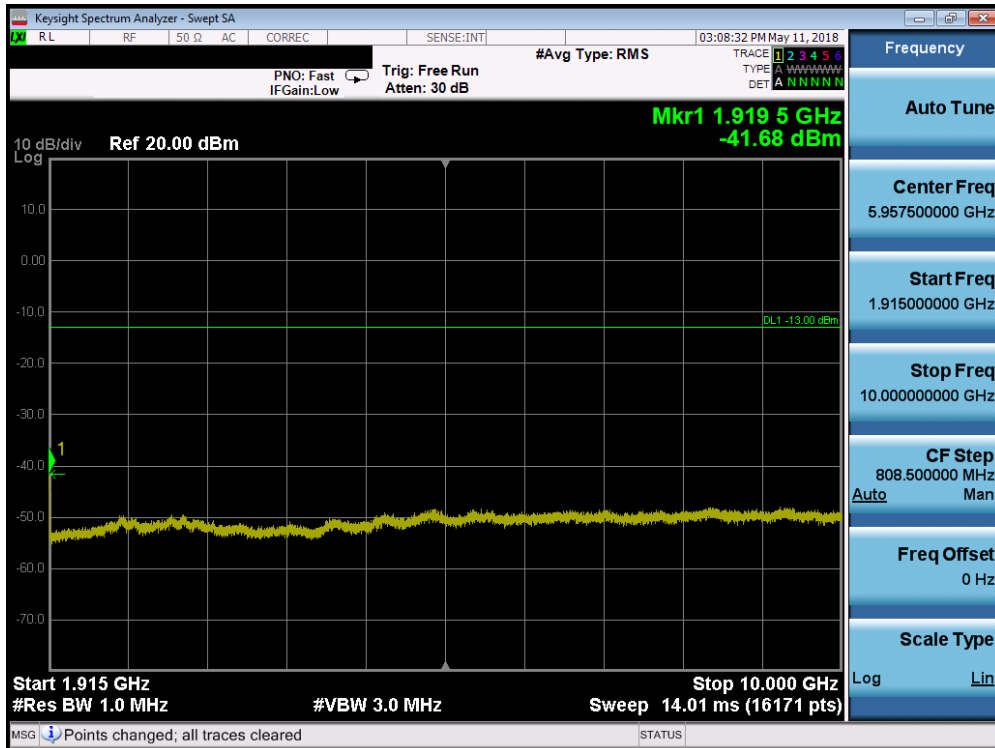

Plot 7-19. Conducted Spurious Plot (PCS WCDMA Mode - High Channel)

FCC ID: ACJFZN1D	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Approved by: Quality Manager
Test Report S/N: 1M1804230079-02.ACJ	Test Dates: 5/1-6/18/2018	EUT Type: Portable Handset		Page 23 of 46

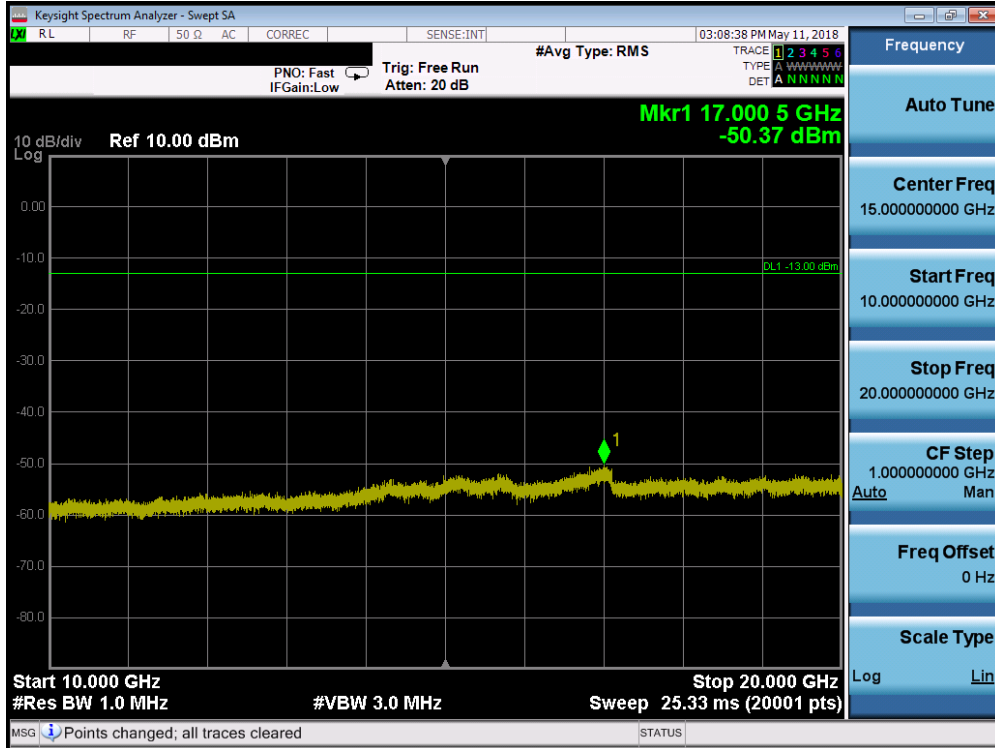

Plot 7-20. Conducted Spurious Plot (PCS WCDMA Mode - High Channel)

FCC ID: ACJFZN1D		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804230079-02.ACJ	Test Dates: 5/1-6/18/2018	EUT Type: Portable Handset	Page 24 of 46	

7.4 Band Edge Emissions at Antenna Terminal

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P_{[Watts]})$, where P is the transmitter power in Watts.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW \geq 1% of the emission bandwidth
4. VBW \geq 3 x RBW
5. Detector = RMS
6. Number of sweep points \geq 2 x Span/RBW
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

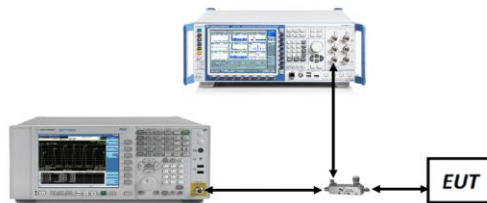



Figure 7-3. Test Instrument & Measurement Setup

Test Notes


Per 22.917(b), 24.238(b), and RSS-132(5.5), RSS-133(6.5), in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to demonstrate compliance with the out-of-band emissions limit. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

FCC ID: ACJFZN1D		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804230079-02.ACJ	Test Dates: 5/1-6/18/2018	EUT Type: Portable Handset		Page 25 of 46

PCS WCDMA Mode

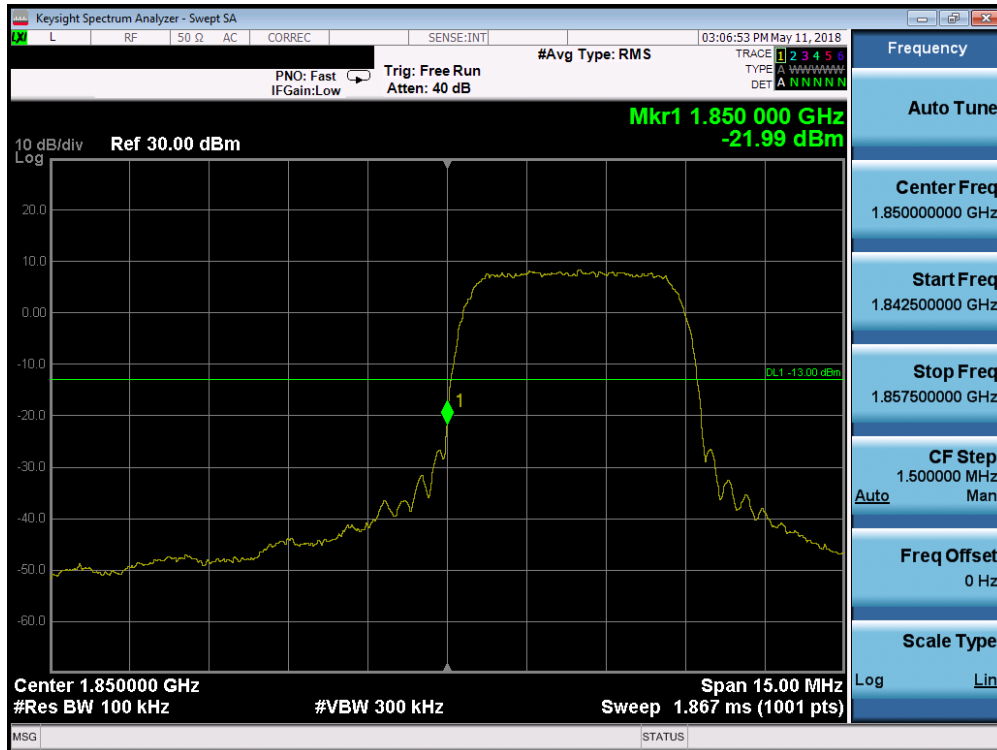

Plot 7-23. Band Edge Plot (PCS WCDMA Mode - Low Channel)

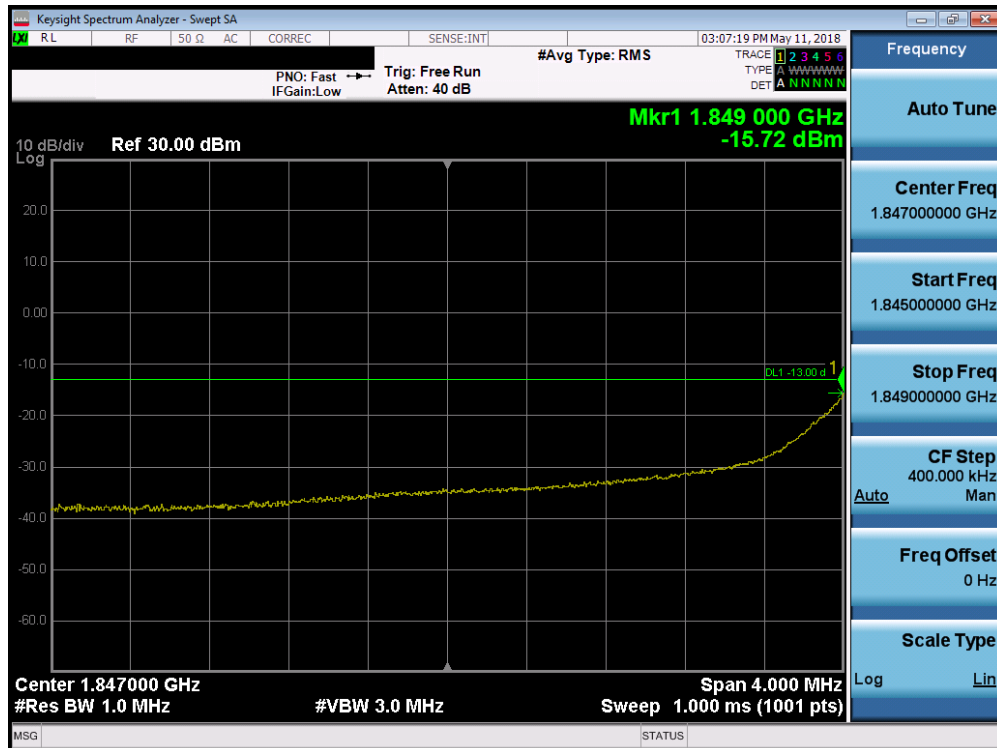

Plot 7-24. 4MHz Span Plot (PCS WCDMA Mode - Low Channel)

FCC ID: ACJFZN1D	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Approved by: Quality Manager
Test Report S/N: 1M1804230079-02.ACJ	Test Dates: 5/1-6/18/2018	EUT Type: Portable Handset		Page 27 of 46

7.5 Peak-Average Ratio

Test Overview

A peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 5.7.1

Test Settings

1. The signal analyzer’s CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW > Emission bandwidth of signal
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


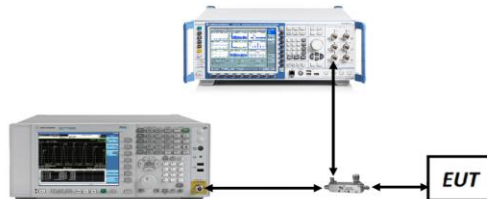


Figure 7-4. Test Instrument & Measurement Setup


Test Notes

None

FCC ID: ACJFZN1D		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804230079-02.ACJ	Test Dates: 5/1-6/18/2018	EUT Type: Portable Handset	Page 29 of 46	

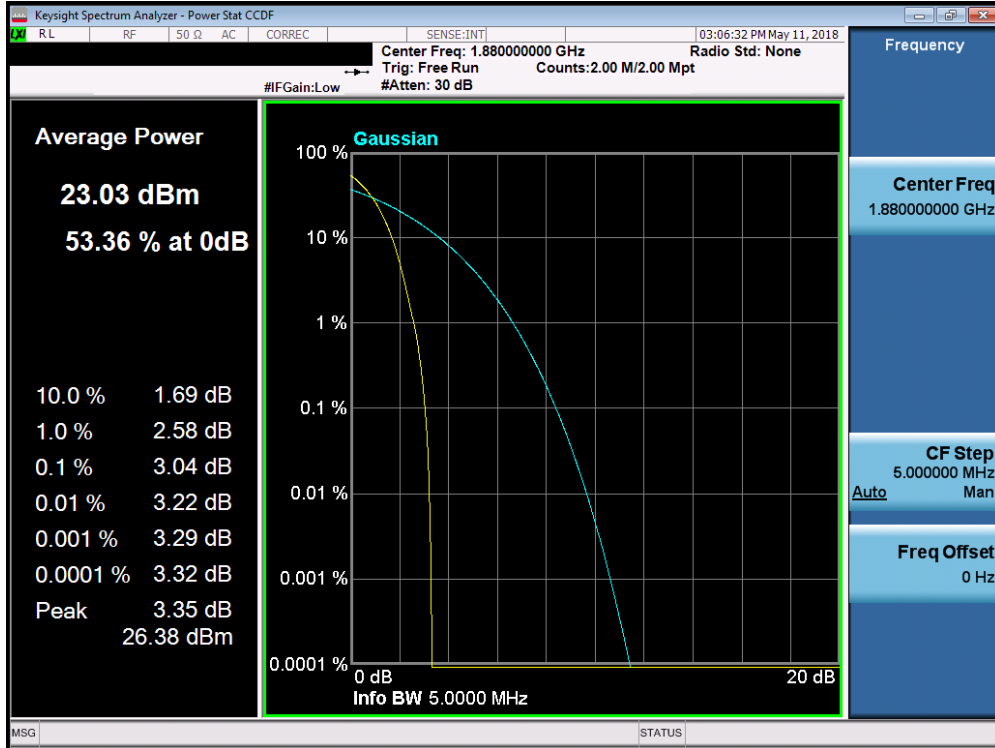

Plot 7-27. Peak-Average Ratio Plot (PCS WCDMA Mode)

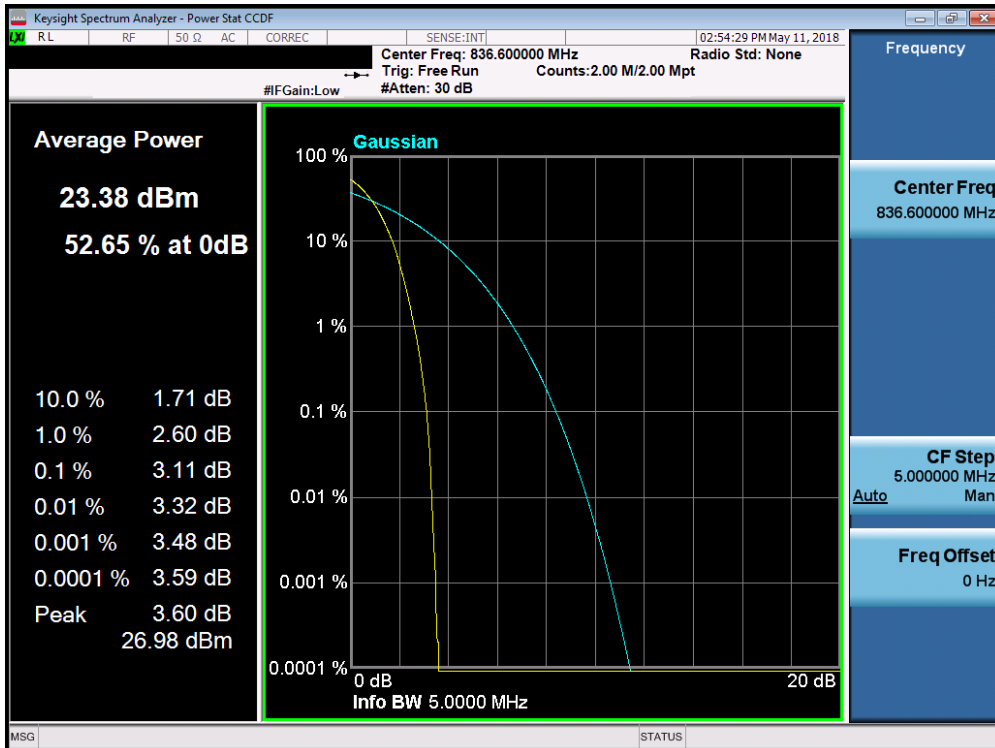

Plot 7-28. Peak-Average Ratio Plot (Cell WCDMA Mode)

FCC ID: ACJFZN1D	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Approved by: Quality Manager
Test Report S/N: 1M1804230079-02.ACJ	Test Dates: 5/1-6/18/2018	EUT Type: Portable Handset		Page 30 of 46

7.6 Radiated Power (ERP/EIRP)

Test Overview

Effective Radiated Power (ERP) and Equivalent Isotropic Radiated Power (EIRP) measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and horizontally polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as RMS average measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.2.1

ANSI/TIA-603-E-2016 – Section 2.2.17

Test Settings

1. Radiated power measurements are performed using the signal analyzer’s “channel power” measurement capability for signals with continuous operation.
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW \geq 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points \geq 2 x span / RBW
6. Detector = RMS
7. Trigger is set to “free run” for signals with continuous operation with the sweep times set to “auto”.
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

FCC ID: ACJFZN1D		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804230079-02.ACJ	Test Dates: 5/1-6/18/2018	EUT Type: Portable Handset	Page 31 of 46	

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

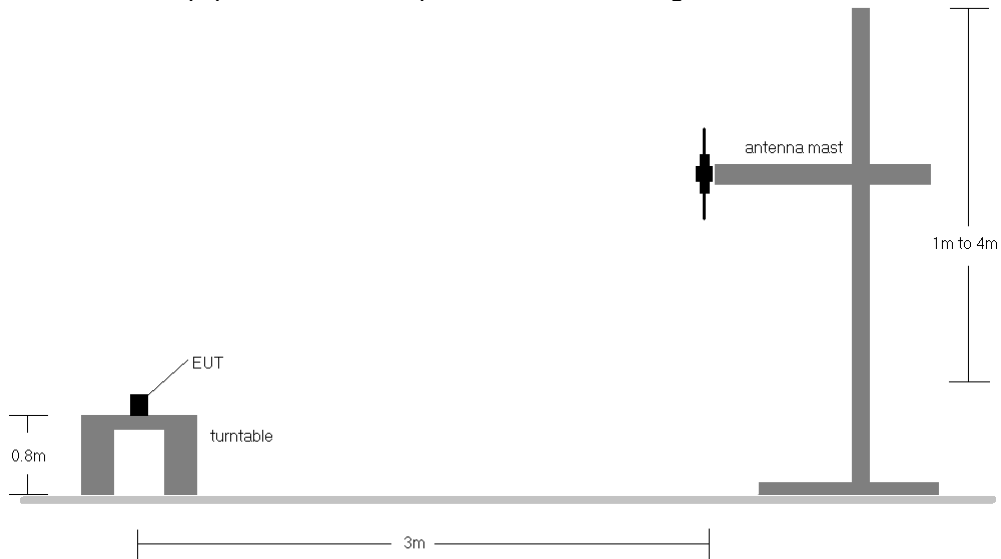


Figure 7-5. Radiated Test Setup <1GHz

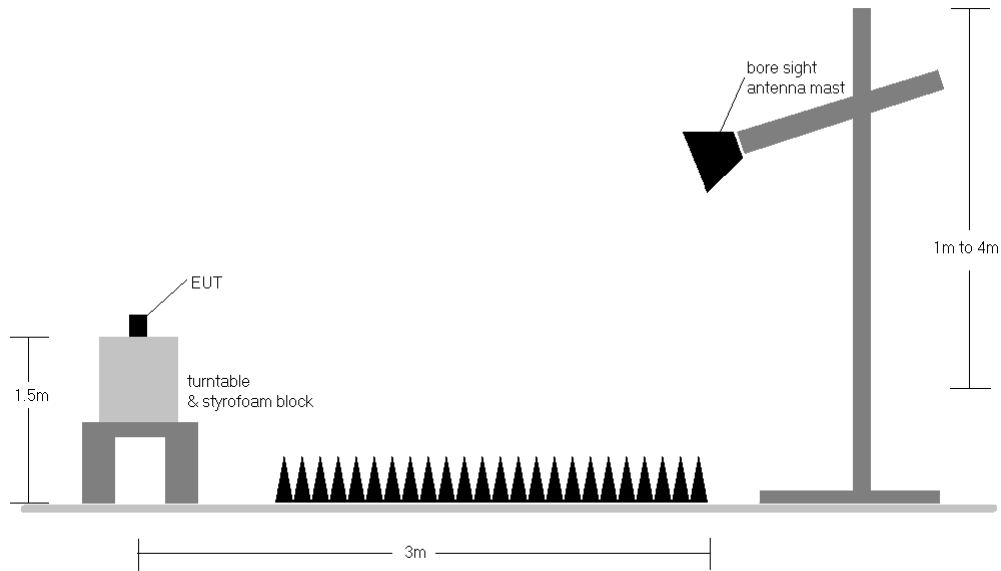


Figure 7-6. Radiated Test Setup >1GHz

FCC ID: ACJFZN1D		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804230079-02.ACJ	Test Dates: 5/1-6/18/2018	EUT Type: Portable Handset		Page 32 of 46

Test Notes

- 1) This device employs UMTS technology with WCDMA (AMR/RMC) and HSDPA capabilities. The EUT was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1."
- 2) This unit was tested with its standard battery.
- 3) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case setup is reported in the tables below.

FCC ID: ACJFZN1D		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804230079-02.ACJ	Test Dates: 5/1-6/18/2018	EUT Type: Portable Handset	Page 33 of 46	

7.6.1 Radiated Power (ERP/EIRP)

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
826.40	WCDMA850	V	150	246	20.07	1.50	19.42	0.087	38.45	-19.03	21.57	0.144	40.61	-19.04
836.60	WCDMA850	V	150	263	20.75	1.50	20.10	0.102	38.45	-18.35	22.25	0.168	40.61	-18.36
846.60	WCDMA850	V	150	249	20.39	1.50	19.74	0.094	38.45	-18.71	21.89	0.155	40.61	-18.72
836.60	WCDMA850	H	150	263	20.56	1.50	19.91	0.098	38.45	-18.54	22.06	0.161	40.61	-18.55
836.60	WCDMA850 (L-Battery)	V	150	263	19.33	1.50	18.68	0.074	38.45	-19.77	20.83	0.121	40.61	-19.78

Table 7-2. ERP/EIRP (Cellular WCDMA)

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1852.40	WCDMA1900	H	150	287	22.30	3.69	25.99	0.397	33.01	-7.02
1880.00	WCDMA1900	H	150	287	21.89	4.74	26.63	0.460	33.01	-6.38
1907.60	WCDMA1900	H	150	116	21.56	4.68	26.24	0.421	33.01	-6.77
1880.00	WCDMA1900	V	150	287	17.35	4.74	22.09	0.162	33.01	-10.92
1880.00	WCDMA1900 (L-Battery)	H	150	97	20.65	4.74	25.39	0.346	33.01	-7.62

Table 7-3. EIRP (PCS WCDMA)

FCC ID: ACJFZN1D		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804230079-02.ACJ	Test Dates: 5/1-6/18/2018	EUT Type: Portable Handset	Page 34 of 46	

7.7 Radiated Spurious Emissions Measurements

Test Overview

Radiated spurious emissions measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using horizontally and vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as peak measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.8

ANSI/TIA-603-E-2016 – Section 2.2.12

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW \geq 3 x RBW
3. Span = 1.5 times the OBW
4. No. of sweep points \geq 2 x span / RBW
5. Detector = RMS
6. Trace mode = Average (Max Hold for pulsed emissions)
7. The trace was allowed to stabilize

FCC ID: ACJFZN1D		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804230079-02.ACJ	Test Dates: 5/1-6/18/2018	EUT Type: Portable Handset	Page 35 of 46	

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

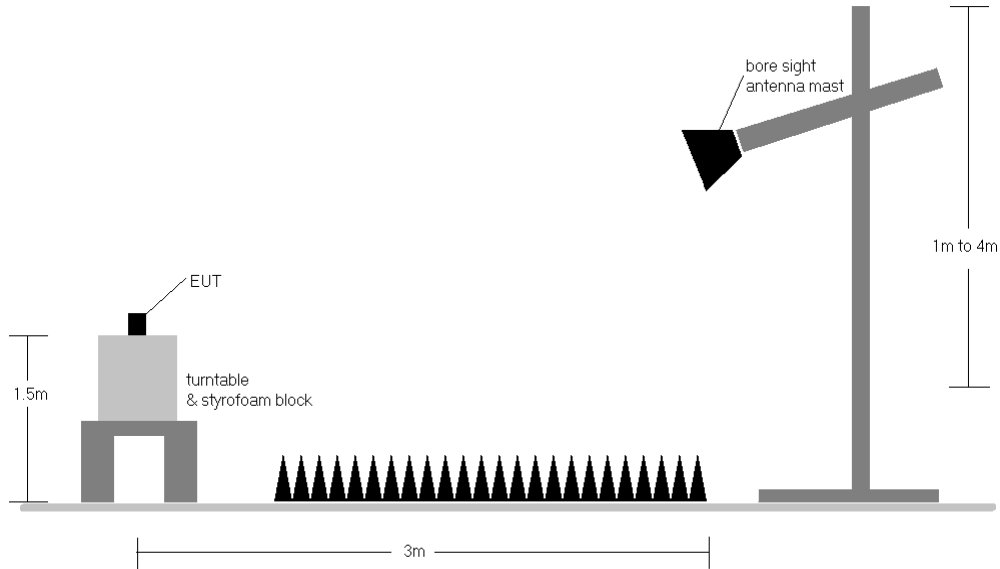


Figure 7-7. Test Instrument & Measurement Setup

Test Notes

- 1) This device employs UMTS technology with WCDMA (AMR/RMC) and HSDPA capabilities. The EUT was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1."
- 2) This unit was tested with its standard battery.
- 3) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case setup is reported in the tables below.
- 4) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 5) Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- 6) The "-" shown in the following RSE tables are used to denote a noise floor measurement.

FCC ID: ACJFZN1D		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804230079-02.ACJ	Test Dates: 5/1-6/18/2018	EUT Type: Portable Handset		Page 36 of 46

7.8 Radiated Spurious Emissions Measurements

Cellular WCDMA Mode

OPERATING FREQUENCY: 826.40 MHz
 CHANNEL: 4132
 MODULATION SIGNAL: WCDMA
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1652.80	H	-	-	-59.58	4.82	-54.76	-41.8
2479.20	H	-	-	-57.05	5.01	-52.04	-39.0

Table 7-4. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4132)

OPERATING FREQUENCY: 836.60 MHz
 CHANNEL: 4183
 MODULATION SIGNAL: WCDMA
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1673.20	H	-	-	-59.91	4.86	-55.05	-42.0
2509.80	H	-	-	-56.53	5.10	-51.43	-38.4

Table 7-5. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4183)

FCC ID: ACJFZN1D		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804230079-02.ACJ	Test Dates: 5/1-6/18/2018	EUT Type: Portable Handset		Page 37 of 46

OPERATING FREQUENCY: 846.60 MHz
 CHANNEL: 4233
 MODULATION SIGNAL: WCDMA
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1693.20	H	-	-	-60.17	4.90	-55.26	-42.3
2539.80	H	-	-	-57.50	5.25	-52.25	-39.3

Table 7-6. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4233)

FCC ID: ACJFZN1D		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804230079-02.ACJ	Test Dates: 5/1-6/18/2018	EUT Type: Portable Handset	Page 38 of 46	

PCS WCDMA Mode

OPERATING FREQUENCY: 1852.40 MHz
 CHANNEL: 9262
 MODULATION SIGNAL: WCDMA
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3704.80	H	-	-	-57.64	6.77	-50.87	-37.9
5557.20	H	-	-	-57.76	8.44	-49.32	-36.3

Table 7-7. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9262)

OPERATING FREQUENCY: 1880.00 MHz
 CHANNEL: 9400
 MODULATION SIGNAL: WCDMA
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3760.00	H	-	-	-63.56	6.84	-56.72	-43.7
5640.00	H	-	-	-62.89	8.52	-54.38	-41.4

Table 7-8. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9400)

FCC ID: ACJFZN1D		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804230079-02.ACJ	Test Dates: 5/1-6/18/2018	EUT Type: Portable Handset	Page 39 of 46	

OPERATING FREQUENCY: 1907.60 MHz
 CHANNEL: 9538
 MODULATION SIGNAL: WCDMA
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3815.20	H	-	-	-56.65	6.98	-49.66	-36.7
5722.80	H	-	-	-56.71	8.58	-48.13	-35.1

Table 7-9. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9538)

FCC ID: ACJFZN1D		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804230079-02.ACJ	Test Dates: 5/1-6/18/2018	EUT Type: Portable Handset		Page 40 of 46

7.9 Frequency Stability / Temperature Variation

Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-E-2016. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

For Part 22, RSS-132, and RSS-133, the frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency. For Part 24, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Test Procedure Used

ANSI/TIA-603-E-2016

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber.

Test Notes

None

FCC ID: ACJFZN1D		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804230079-02.ACJ	Test Dates: 5/1-6/18/2018	EUT Type: Portable Handset	Page 41 of 46	

Frequency Stability / Temperature Variation

OPERATING FREQUENCY:	836,600,000	Hz
CHANNEL:	4183	
REFERENCE VOLTAGE:	3.80	VDC
DEVIATION LIMIT:	± 0.00025 % or 2.5 ppm	

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	836,600,098	98	0.0000117
100 %		- 30	836,600,140	140	0.0000167
100 %		- 20	836,599,903	-97	-0.0000116
100 %		- 10	836,599,960	-40	-0.0000048
100 %		0	836,599,934	-66	-0.0000079
100 %		+ 10	836,599,979	-21	-0.0000025
100 %		+ 20	836,600,142	142	0.0000170
100 %		+ 30	836,600,045	45	0.0000054
100 %		+ 40	836,600,106	106	0.0000127
100 %		+ 50	836,599,985	-15	-0.0000018
BATT. ENDPOINT	3.40	+ 20	836,600,040	40	0.0000048

Table 7-10. Frequency Stability Data (Cellular WCDMA Mode – Ch. 4183)

FCC ID: ACJFZN1D		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804230079-02.ACJ	Test Dates: 5/1-6/18/2018	EUT Type: Portable Handset	Page 42 of 46	

Frequency Stability / Temperature Variation

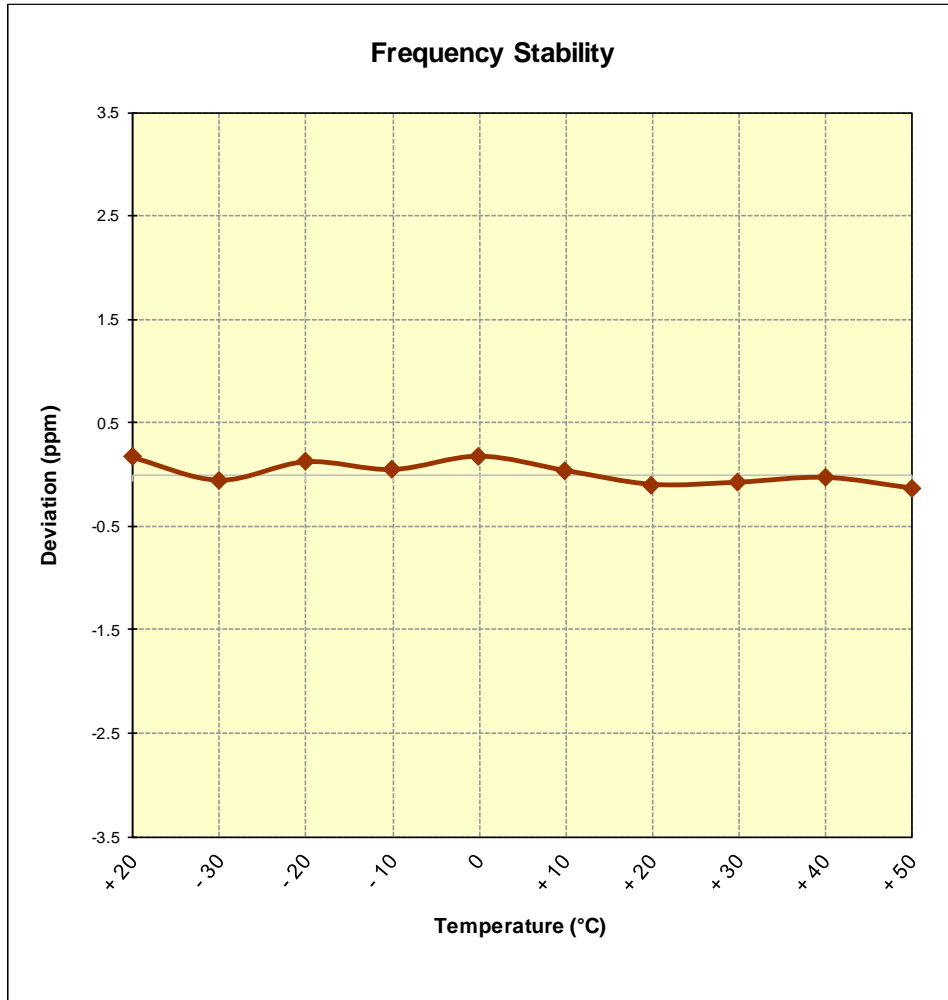


Figure 7-8. Frequency Stability Graph (Cellular WCDMA Mode – Ch. 4183)

FCC ID: ACJFZN1D	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Approved by: Quality Manager
Test Report S/N: 1M1804230079-02.ACJ	Test Dates: 5/1-6/18/2018	EUT Type: Portable Handset		Page 43 of 46

Frequency Stability / Temperature Variation

OPERATING FREQUENCY: 1,880,000,000 Hz
 CHANNEL: 9400
 REFERENCE VOLTAGE: 3.80 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	1,880,000,134	134	0.0000071
100 %		- 30	1,879,999,934	-66	-0.0000035
100 %		- 20	1,880,000,030	30	0.0000016
100 %		- 10	1,880,000,078	78	0.0000041
100 %		0	1,879,999,950	-50	-0.0000027
100 %		+ 10	1,880,000,090	90	0.0000048
100 %		+ 20	1,879,999,969	-31	-0.0000016
100 %		+ 30	1,879,999,935	-65	-0.0000035
100 %		+ 40	1,880,000,098	98	0.0000052
100 %		+ 50	1,880,000,084	84	0.0000045
BATT. ENDPOINT	3.40	+ 20	1,880,000,150	150	0.0000080

Table 7-11. Frequency Stability Data (PCS WCDMA Mode – Ch. 9400)

FCC ID: ACJFZN1D		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804230079-02.ACJ	Test Dates: 5/1-6/18/2018	EUT Type: Portable Handset	Page 44 of 46	

Frequency Stability / Temperature Variation

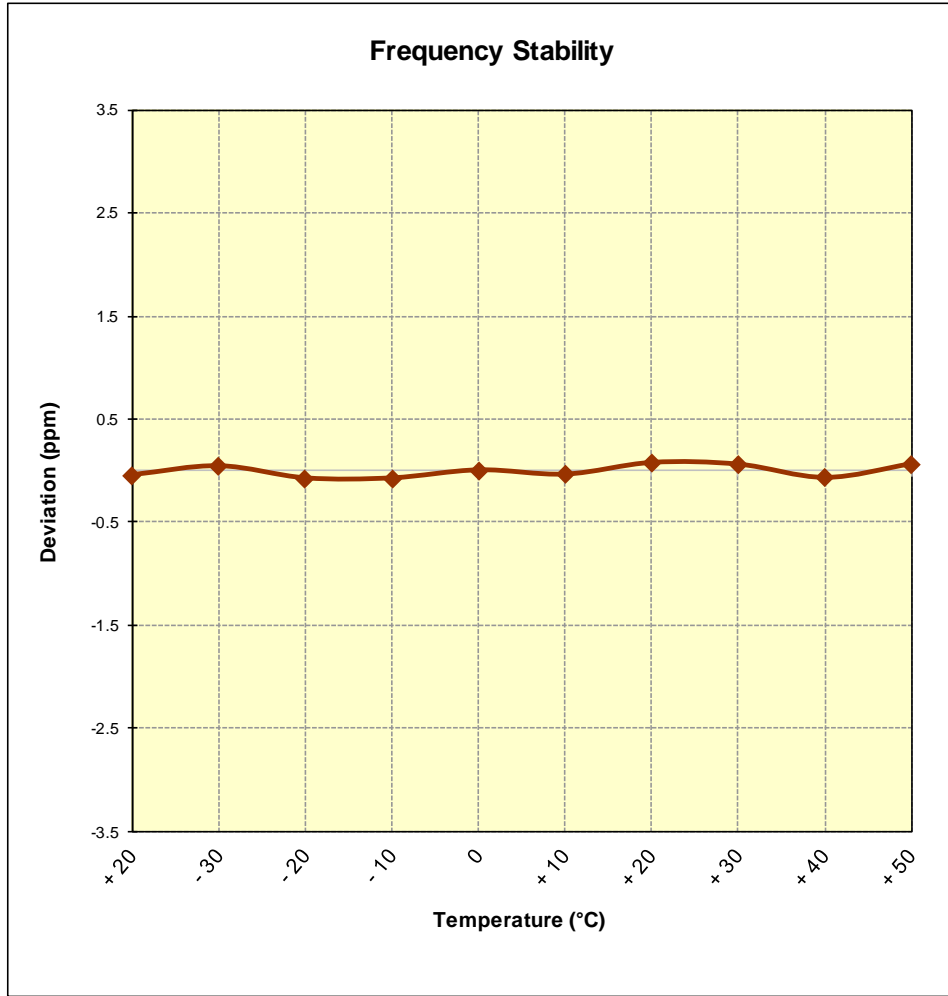


Figure 7-9. Frequency Stability Graph (PCS WCDMA Mode – Ch. 9400)

FCC ID: ACJFZN1D	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Panasonic	Approved by: Quality Manager
Test Report S/N: 1M1804230079-02.ACJ	Test Dates: 5/1-6/18/2018	EUT Type: Portable Handset		Page 45 of 46

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Panasonic Portable Handset FCC ID: ACJFZN1D** complies with all the requirements of Part 22 & 24 of the FCC Rules and RSS-132 & RSS-133 for the Innovation, Science and Economic Development Canada Rules.

FCC ID: ACJFZN1D		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804230079-02.ACJ	Test Dates: 5/1-6/18/2018	EUT Type: Portable Handset	Page 46 of 46	