



FCC PART 18

TEST REPORT

For

Panasonic Corporation of North America

Two Riverfront Plaza, Newark New Jersey USA

FCC ID: ACLAPBP21

Report Type: Amended Report	Product Type: Microwave Oven
Test Engineer: <u>Dean Zhou</u> <i>Dean Zhou</i>	
Report Number: <u>RSHD191029002-00AM1</u>	
Report Date: <u>2020-01-02</u>	
Reviewed By: <u>Oscar Ye</u> <u>EMC Manager</u>	<i>Oscar Ye</i>
Prepared By: Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road, Kunshan,Jiangsu province, China Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

REPORT REVISION.....	3
GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
TEST FACILITY	4
SYSTEM TEST CONFIGURATION.....	5
JUSTIFICATION	5
EUT EXERCISE SOFTWARE	5
SPECIAL ACCESSORIES.....	5
EQUIPMENT MODIFICATIONS	5
SUPPORT EQUIPMENT LIST AND DETAILS	5
EXTERNAL I/O CABLE.....	5
CONFIGURATION OF TEST SETUP	5
BLOCK DIAGRAM OF RADIATED TEST SETUP.....	6
CONDUCTED EMISSIONS	7
APPLICABLE STANDARD	7
MEASUREMENT UNCERTAINTY.....	7
EUT SETUP	7
EMI TEST RECEIVER SETUP.....	8
TEST PROCEDURE	8
TEST EQUIPMENT LIST AND DETAILS.....	8
FACTOR & OVER LIMIT CALCULATION.....	8
TEST RESULTS SUMMARY.....	8
TEST DATA	9
RADIATION HAZARD MEASUREMENT.....	11
APPLICABLE STANDARD	11
TEST EQUIPMENT LIST AND DETAILS.....	11
ENVIRONMENTAL CONDITIONS.....	11
RADIATION HAZARD MEASUREMENT FOR MICROWAVE	11
INPUT POWER.....	12
LOAD FOR MICROWAVE OVENS	12
RF OUTPUT POWER MEASUREMENT	12
OPERATING FREQUENCY MEASUREMENT	13
RADIATED EMISSIONS.....	16
APPLICABLE STANDARD	16
MEASUREMENT UNCERTAINTY.....	16
EUT SETUP	16
EMI TEST RECEIVER SETUP.....	17
TEST PROCEDURE	17
TEST EQUIPMENT LIST AND DETAILS.....	18
CORRECTED AMPLITUDE & MARGIN CALCULATION	18
TEST RESULTS SUMMARY.....	18
TEST DATA	19
DECLARATION LETTER.....	21

REPORT REVISION

Report Number	Report Date	Contents
RSHD191029002-00A	2019-11-25	Original Report
RSHD191029002-00AM1	2020-01-02	Amended Report

The items used black in italics in the report was revised due to typo.

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Applicant	Panasonic Corporation of North America
Manufacturer &Address	Panasonic Appliances Microwave Oven (Shanghai) Co., Ltd. 888, 898 Long Dong Road, Pu Dong, Shanghai, China
Test Model	NN-SD78LS
Product	Microwave Oven
Rate Voltage	AC 120V
Highest Operating Frequency	2450MHz

Note: The product's series model number: NN-SN76LS, NN-SN75LW, NN-SN75LB, The difference between them was explained in the attached declaration letter.

**All measurement and test data in this report was gathered from production sample serial number: 20191029002 (Assigned by BACL, Kunshan). The EUT supplied by the applicant was received on 2019-10-29.*

Objective

This report is prepared on behalf of *Panasonic Corporation of North America* in accordance with Part 2-Subpart J, and Part 18-Subparts A, B and C of the Federal Communication Commission's rules and regulations.

The objective of the manufacturer is to determine the compliance of EUT with FCC part 18 limits.

Related Submittal(s)/Grant(s)

No related submittal(s).

Test Methodology

All measurements contained in this report were conducted with MP-5, FCC Methods of Measurements of Radio Noise Emissions from ISM Equipment, February 1986. All measurements were performed at Bay Area Compliance Laboratory Corporation. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) Lab is accredited to ISO/IEC 17025 by A2LA (Lab code: 4323.01) and the FCC designation No. CN1185 under the FCC KDB 974614 D01 and CAB identifier CN0004 under the ISED requirement. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

SYSTEM TEST CONFIGURATION

Justification

The system was configured for testing in a typical fashion (as normally used by a typical user).

Test Mode: Max output Power of Microwave

EUT Exercise Software

No software was used to test.

Special Accessories

No special accessory was used.

Equipment Modifications

No modification was made to the EUT tested.


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
/	/	/	/

External I/O Cable


Cable Description	Length (m)	From/Port	To
Un-shielding Un-detachable AC Cable	1.2	EUT	Mains

Configuration of Test Setup

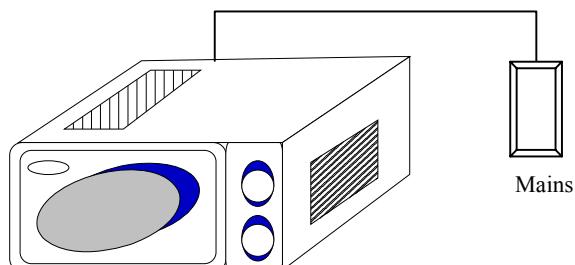

Block Diagram of Radiated Test Setup

Test mode Max output Power of Microwave

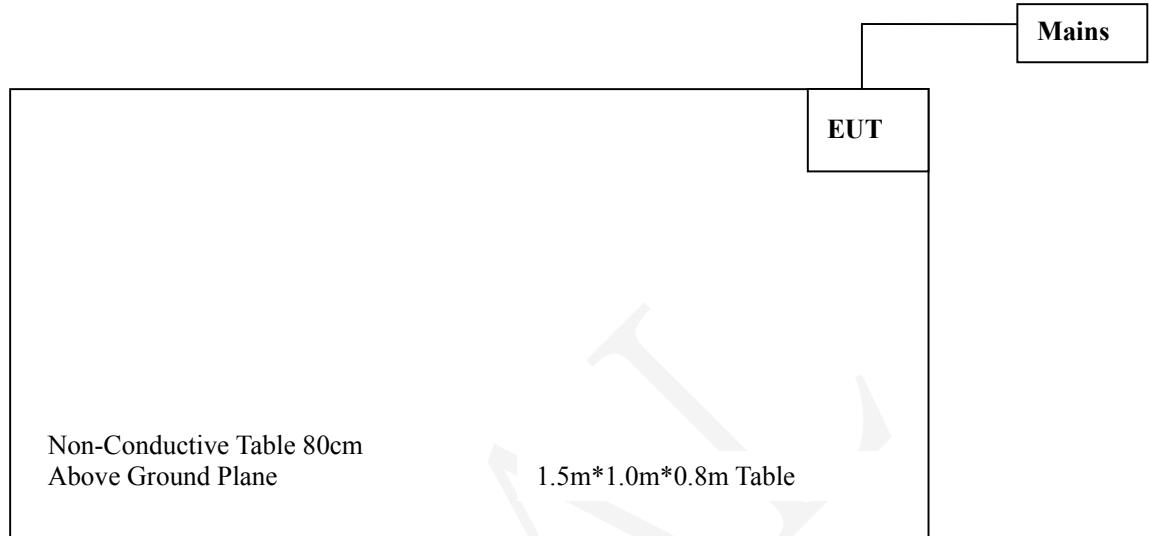

CONDUCTED EMISSIONS

Applicable Standard


FCC §18.307.

Measurement Uncertainty

Input quantities to be considered for conducted disturbance measurements maybe receiver reading, attenuation of the connection between LISN and receiver, LISN voltage division factor, LISN VDF frequency interpolation and receiver related input quantities, etc.

Item	Measurement Uncertainty	U_{cispr}
AMN	150kHz~30MHz	3.19 dB

EUT Setup

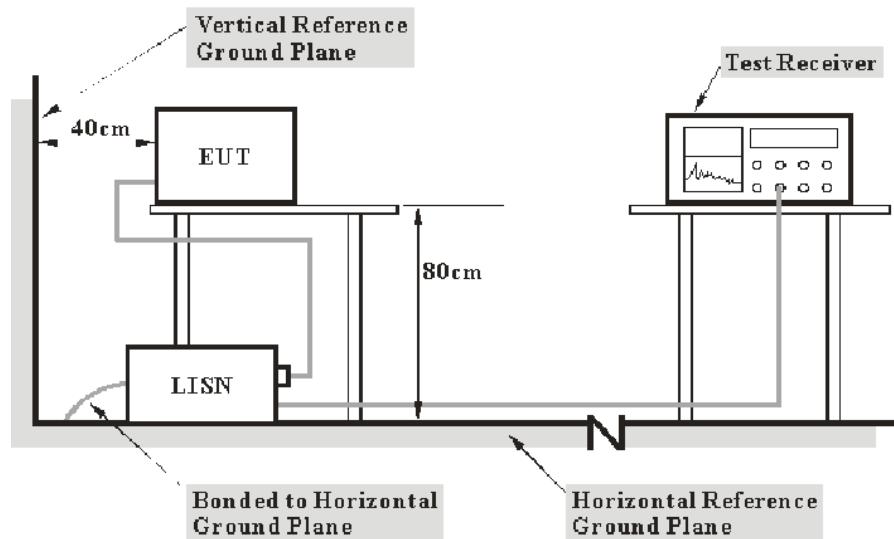

Note:

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with MP-5: 1986 measurement procedure. Specification used was with the FCC part 18 limits.

The EUT was connected to a 120 VAC/ 60Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the EUT was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCS30	1316.3003K03-101746-zn	2019-08-05	2020-08-04
Rohde & Schwarz	LISN	ENV216	3560655016	2018-11-30	2019-11-29
Audix	Test Software	e3	V9	--	--
MICRO-COAX	Coaxial Cable	Cable-6	006	2019-09-08	2020-09-07

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Factor & Over Limit Calculation

The factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Factor (dB)} = \text{LISN VDF (dB)} + \text{Cable Loss (dB)} + \text{Transient Limiter Attenuation (dB)}$$

The “**Over Limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit of 7dB means the emission is 7 dB above the limit. The equation for Over Limit calculation is as follows:

$$\text{Over Limit (dB)} = \text{Read level (dB}\mu\text{V)} + \text{Factor (dB)} - \text{Limit (dB}\mu\text{V)}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC PART 18, the worst Over Limit reading as below:

-11.37 dB at 0.171MHz in the **Line** conducted mode
-14.29dB at 0.182 MHz in the **Neutral** conducted mode

Test Data


Environmental Conditions

Temperature:	22°C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa


The testing was performed by Dean Zhou on 2019-11-11

Test Mode1:

Line:

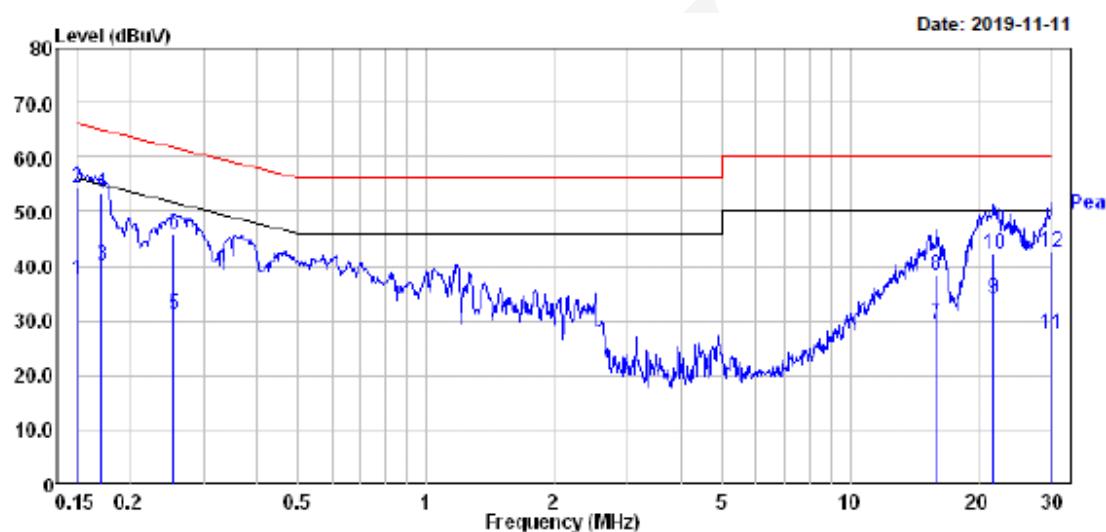

Freq	Read			Limit		Over	Remark
	MHz	dBuV	dB	dBuV	dB		
Read							
Freq	Level	Factor	Level	Line	Line	Limit	Remark
1	0.151	17.50	19.82	37.32	55.96	-18.64	Average
2	0.151	34.40	19.82	54.22	65.96	-11.74	QP
3	0.171	20.30	19.83	40.13	54.90	-14.77	Average
4	0.171	33.70	19.83	53.53	64.90	-11.37	QP
5	0.255	11.40	19.82	31.22	51.60	-20.38	Average
6	0.255	26.20	19.82	46.02	61.60	-15.58	QP
7	15.970	9.50	19.70	29.20	50.00	-20.80	Average
8	15.970	18.50	19.70	38.20	60.00	-21.80	QP
9	21.830	14.40	19.85	34.25	50.00	-15.75	Average
10	21.830	22.50	19.85	42.35	60.00	-17.65	QP
11	29.684	7.59	19.78	27.37	50.00	-22.63	Average
12	29.684	22.79	19.78	42.57	60.00	-17.43	QP

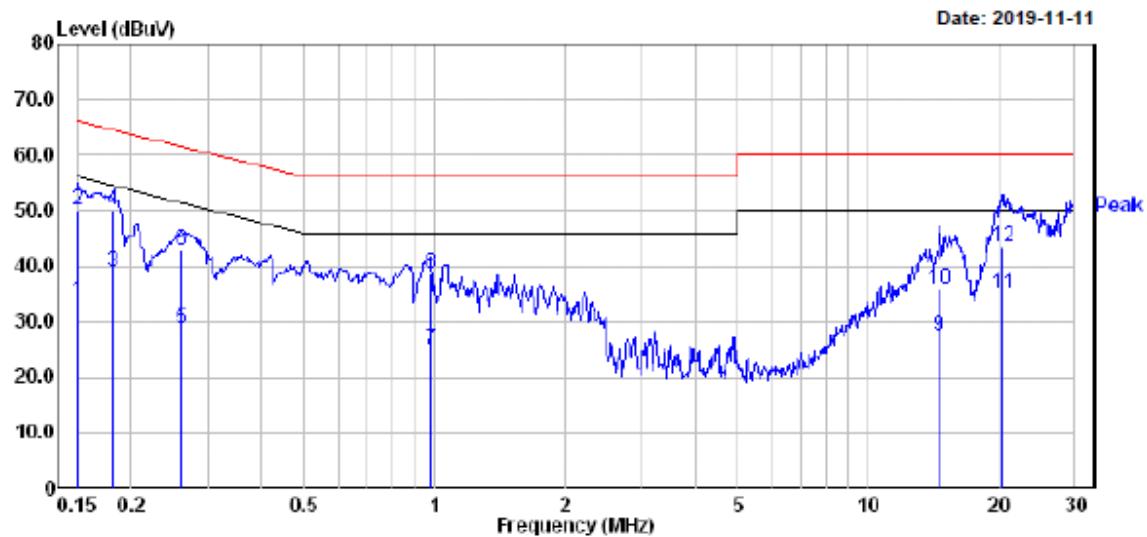Neutral:

Freq	Read			Limit Line	Over Limit	Remark	
	MHz	dBuV	dB				
				dBuV	dBuV	dB	
1	0.150	14.00	19.82	33.82	56.00	-22.18	Average
2	0.150	30.30	19.82	50.12	66.00	-15.88	QP
3	0.182	19.00	19.83	38.83	54.42	-15.59	Average
4	0.182	30.30	19.83	50.13	64.42	-14.29	QP
5	0.262	8.90	19.82	28.72	51.38	-22.66	Average
6	0.262	23.10	19.82	42.92	61.38	-18.46	QP
7	0.979	5.20	19.80	25.00	46.00	-21.00	Average
8	0.979	18.90	19.80	38.70	56.00	-17.30	QP
9	14.594	7.99	19.63	27.62	50.00	-22.38	Average
10	14.594	16.19	19.63	35.82	60.00	-24.18	QP
11	20.377	15.10	19.93	35.03	50.00	-14.97	Average
12	20.377	23.40	19.93	43.33	60.00	-16.67	QP

RADIATION HAZARD MEASUREMENT

Applicable Standard

FCC §18.301 & FCC §18.305

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	100048	2018-11-30	2019-11-29
YUANFANG	dynamometer	PF9901	G135716CA8361400	2019-05-22	2020-05-21
ETS-LINDGREN	Horn Antenna	3115	9207-3900	2017-07-15	2020-07-14
MC	Thermometer	N/A	N/A	2019-11-01	2020-10-31
ETS-LINDGREN	Microwave Survey Meter	HI1801	00066890	2018-01-15	2020-01-14

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Dean Zhou on 2019-11-22

Radiation Hazard Measurement for microwave

Radiation leakage was measured in the as-received condition with the oven door closed using a microwave leakage meter.

A 275 mL water load was placed in the center of the oven and the oven was operated at maximum output power.

There was no microwave leakage exceeding a power level of 0.1mW/cm² observed at any point 5 cm or more from the external surface of the oven.

A maximum of 1.0 mW/cm² is allowed in accordance with the applicable Federal Standards. Hence, microwave leakage in the as-received condition with the oven door closed was below the maximum allowed.

Input Power

Input power and current was measured using a power analyzer. A 1250mL water load was placed in the center of the oven and the oven was operated at maximum output power. A 1250mL water load was chosen for its compatibility with the procedure commonly used by manufacturers to determine their input ratings.

Input Voltage (V _{AC} /Hz)	Input Current (Amps)	Measured Input Power (Watts)	Rated Input Power (Watts)	Mode
120/60	12.3	1368	1460	Microwave

Based on the measured input power, the EUT was found to be operating within the intended specifications.

Load for Microwave Ovens

For all measurements, the energy developed by the oven was absorbed by a dummy load consisting of a quantity of tap water in a beaker. If the oven was provided with a shelf or other utensil support, this support was in its initial normal position. For ovens rated at 1000 watts or less power output, the beaker contained quantities of water as listed in the following subparagraphs. For ovens rated at more than 1000 watts output, each quantity was increased by 50% for each 500watts or fraction thereof in excess of 1000 watts. Additional beakers were used if necessary.

- Load for power output measurement: 1250 milliliters of water in the beaker located in the center of the oven.
- Load for frequency measurement: 1250 milliliters of water in the beaker located in the center of the oven.
- Load for measurement of radiation on second and third harmonic: Two loads, one of 875 and the other of 375 milliliters, of water are used. Each load is tested both with the beaker located in the center of the oven and with it in the right front corner.

The RF output power is rated at 1250 watts

Load used for power output measurement = 1250 milliliters of water

Load used for frequency measurement = 1250 milliliters of water

Load used for harmonic measurement = 875 & 375 milliliters of water

Load used for other measurement = 875 milliliters of water

RF Output Power Measurement

A cylindrical container of borosilicate glass is used for the test. It has a maximum thickness of 3 mm, an external diameter of approximately 190 mm and a height of approximately 90 mm. The mass of the container is determined.

At the start of the test, the oven and the empty container are at ambient temperature. Water having an initial temperature of $10\text{ }^{\circ}\text{C} \pm 1\text{ }^{\circ}\text{C}$ is used for the test. The water temperature is measured immediately before it is poured into the container.

A quantity of $1250\text{ g} \pm 5\text{ g}$ of water is added to the container and its actual mass obtained. The container is then immediately placed in the centre of the oven shelf, which is in its lowest normal position. The oven is operated and the time for the water temperature to attain $20\text{ }^{\circ}\text{C} \pm 2\text{ }^{\circ}\text{C}$ is measured. The oven is then switched off and the final water temperature is measured within 60 s.

m_w (g)	m_c (g)	T_0 (°C)	T_1 (°C)	T_2 (°C)	t (s)
1250	377	21.9	19.7	32.6	60

$$\text{RF Output Power} = (4.187 * 1250 * (32.6 - 19.7) + 0.55 * 377.0 * (32.6 - 21.9)) / 60 = 1162.2 \text{ Watts}$$

P is the microwave power output, in watts;

m_w is the mass of the water, in grams;

m_c is the mass of the container, in grams;

T_0 is the ambient temperature, in degrees Celsius;

T_1 is the initial temperature of the water, in degrees Celsius;

T_2 is the final temperature of the water, in degrees Celsius;

t is the heating time, in seconds, excluding the magnetron filament heating-up time.

The measurement output power was found to be less than 500 watts. Therefore, in accordance with Section 18.305 of Subpart-B, the measured out-of-band emissions were compared to the limit of $25 \mu\text{V}/\text{meter}$ at a 300-meter measurement distance.

The measured output power was found to exceed 500 watts. Therefore, in accordance with Section 18.305 of Subpart-B, the measured out-of-band emissions were compared with the limit calculated as following:

$$\text{LFS} = 25 * \text{SQRT}(\text{Power Output} / 500)$$

$$\text{LFS} = 25 * \text{SQRT}(1162.2 / 500)$$

$$\text{LFS} = 38.11$$

Where: LFS is the maximum allowable field strength for out-of-band emissions in $\mu\text{V}/\text{meter}$ at a 300-meter measurement distance. Power Output is the measured output power in watts.

LFS $\mu\text{V}/\text{m}@300\text{m}$	$\text{dB}\mu\text{V}/\text{m}@300\text{m}$	$\text{dB}\mu\text{V}/\text{m}@3\text{m}$
38.11	31.6	71.6

Note: Limit ($\text{dB}\mu\text{V}/\text{m}@3\text{m}$) = Limit ($\text{dB}\mu\text{V}/\text{m}@300\text{m}$) + 40(dB)

Operating Frequency Measurement


Variation in Operating Frequency with Time

The operating frequency was measured using a spectrum analyzer. Starting with the EUT at room temperature, a 1250mL water load was placed in the center of the oven and the oven was operated at maximum output power. The fundamental operating frequency was monitored until the water load was reduced to 20 percent of the original load.

The results of this test are as follows:

Low Frequency (MHz)	High Frequency (MHz)
2411.05	2456.73

Refer to data pages for details of the variation in operating frequency with time measurement.

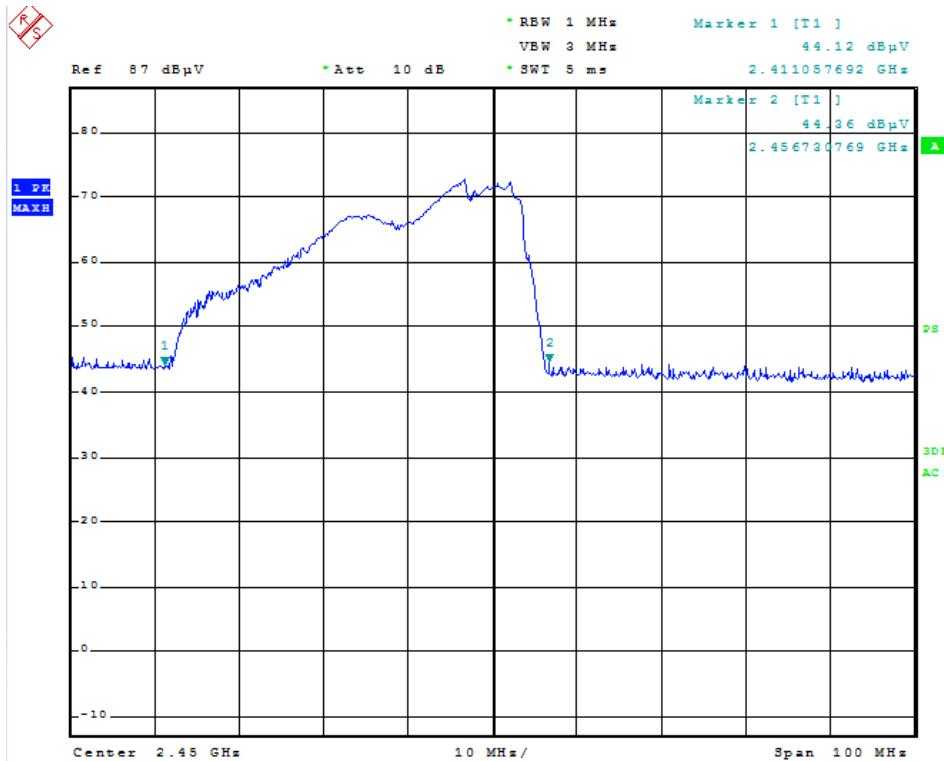

Date: 22.NOV.2019 14:30:45

Variation in Operating Frequency with Line Voltage


The EUT was operated / warmed by at least 10 minutes of use with a 1250 mL water load at room temperature at the beginning of the test. Then the operating frequency was monitored as the input voltage was varied between 80 and 125 percent of the nominal rating.

The results of this test are as follows:

Line voltage varied from 96 V_{AC} to 150 V_{AC}.

Low Frequency (MHz)	High Frequency (MHz)
2412.50	2455.76

Please refer to following pages for details of the variation in operating frequency with line voltage measurement.

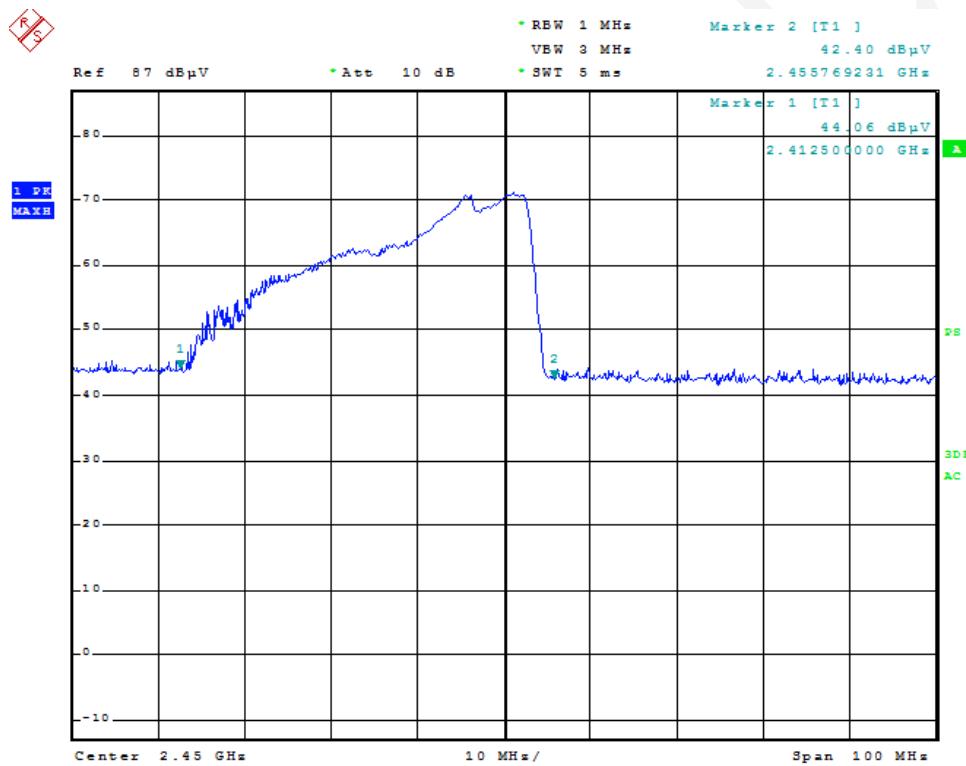

Date: 22.NOV.2019 14:31:44

RADIATED EMISSIONS

Applicable Standard

FCC §18.305, §18.309


Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.


Item		Measurement Uncertainty	U_{cisp}
Radiated Emission	30MHz~1GHz	6.11dB	6.3 dB
	1GHz~6GHz	4.45dB	5.2 dB
	6 GHz ~18 GHz	5.23dB	5.5 dB

EUT Setup

Below 1GHz:

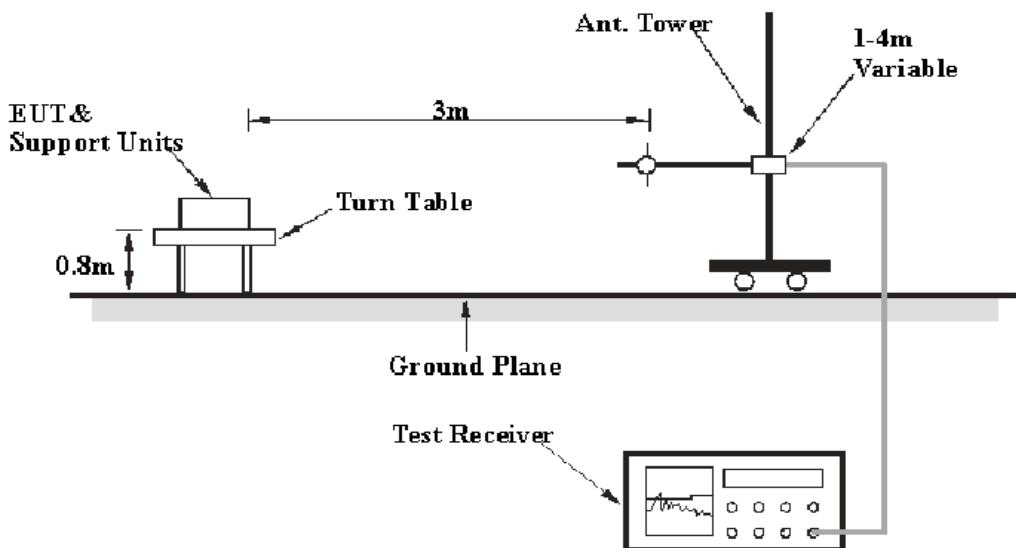

Above 1GHz:

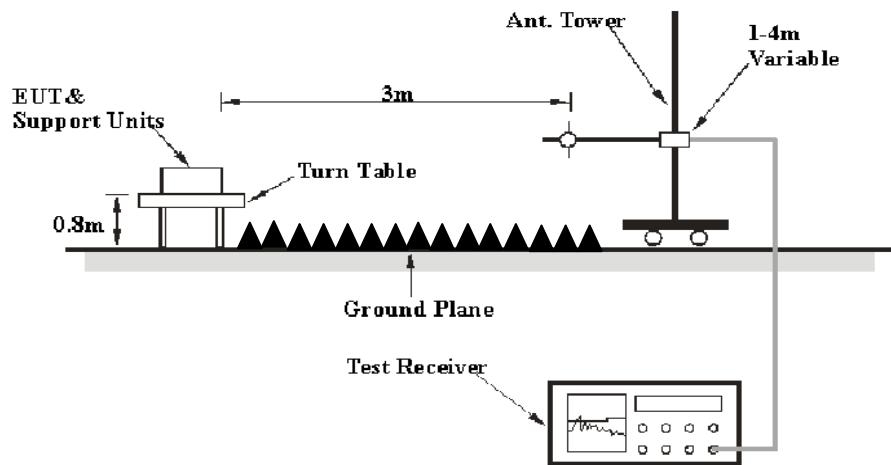

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the FCC MP - 5. The specification used was the FCC part 18 limits.

The EUT was connected to 120 VAC/60 Hz power source.

EMI Test Receiver Setup

The system was investigated from 30 MHz to 18 GHz.

During the radiated emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector Type
30MHz – 1000 MHz	120 kHz	300 kHz	120kHz	QP
Above 1 GHz	1MHz	3 MHz	/	Peak
	1MHz	3 MHz	1MHz	AVG

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All data was recorded in the Quasi-peak detector mode from 30 MHz to 1 GHz. Peak and average detection mode above 1 GHz.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sonoma Instrument	Amplifier	310N	185700	2019-08-14	2020-08-13
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2018-11-30	2019-11-29
Sunol Sciences	Broadband Antenna	JB3	A090413-1	2016-12-26	2019-12-25
Champrotek	Chamber	Chamber A	T-KSEMC049	-	-
Champrotek	Chamber	Chamber B	T-KSEMC080	-	-
R&S	Auto test Software	EMC32	100361	-	-
ETS-LINDGREN	Horn Antenna	3115	9207-3900	2017-07-15	2020-07-14
Rohde & Schwarz	EMI Receiver	ESU40	100207	2019-08-27	2020-08-26
A.H.Systems, inc	Amplifier	2641-1	491	2019-02-20	2020-02-19
MICRO-COAX	Coaxial Cable	Cable-8	008	2019-08-15	2020-08-14
MICRO-COAX	Coaxial Cable	Cable-9	009	2019-08-15	2020-08-14
MICRO-COAX	Coaxial Cable	Cable-10	010	2019-08-15	2020-08-14
MICRO-COAX	Coaxial Cable	Cable-4	004	2019-08-15	2020-08-14
MICRO-COAX	Coaxial Cable	Cable-5	005	2019-08-15	2020-08-14

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the data in the following table, the EUT complied with the FCC Part 18, the worst margin reading as below:

23.60 dB at 30.606250 MHz in the **Vertical** polarization, 30 MHz – 1 GHz
12.69 dB at 8573.500000 MHz in the **Horizontal** polarization, 1GHz – 18 GHz

Test Data


Environmental Conditions

Temperature:	22°C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Dean Zhou on 2019-11-10

Test Mode1:

1) 30MHz ~ 1GHz:

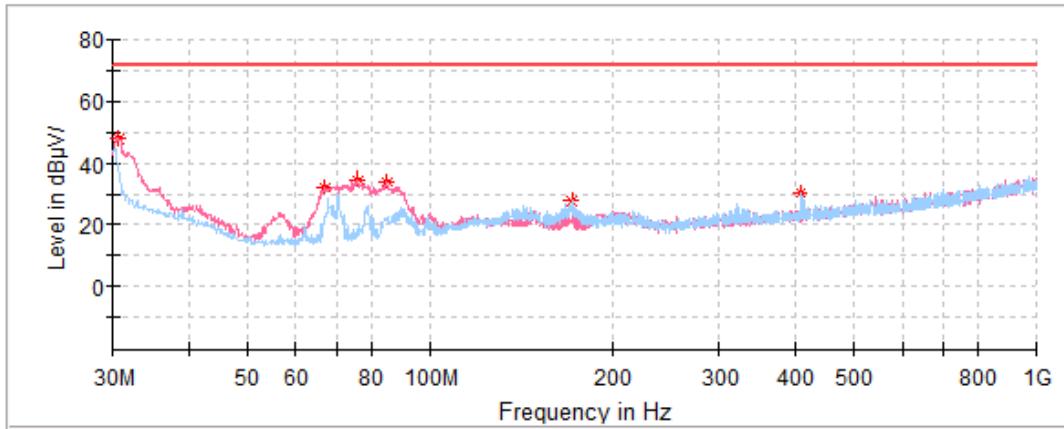

Frequency (MHz)	Quasi-Peak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
30.606250	48.00	71.60	23.60	100.0	V	132.0	-4.3
66.860000	32.18	71.60	39.42	100.0	V	209.0	-17.5
76.075000	34.74	71.60	36.86	100.0	V	194.0	-17.6
85.047500	33.94	71.60	37.66	100.0	V	194.0	-17.6
170.771250	28.10	71.60	43.50	200.0	H	148.0	-13.2
410.603750	30.14	71.60	41.46	100.0	H	299.0	-8.0

Above 1 GHz:

Frequency (MHz)	Max Peak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1872.100000	---	39.98	71.60	31.62	100.0	V	174.0	-8.7
2183.200000	---	47.65	71.60	23.95	100.0	H	46.0	-7.8
2960.100000	---	36.19	71.60	35.41	100.0	V	2.0	-4.6
6514.800000	---	50.84	71.60	20.76	100.0	H	312.0	4.4
8573.500000	---	58.91	71.60	12.69	100.0	H	296.0	6.5
11007.900000	---	58.31	71.60	13.29	100.0	V	37.0	9.8

DECLARATION LETTER

**Panasonic Appliance Company of America
Kitchen Appliances Certification Liaison**

Add: 1701 Golf Road Suite 3-106, Rolling Meadows, IL 60008
P.C: 60008 TEL: 847-637-4673
FAX: 847-637-4677

DECLARATION

Date: 10-29-2019

To:
Bay Area Compliance Laboratories Corp. (Kunshan)
No.248 Chenghu Road Kunshan,Jiangsu,China
<http://www.baclcorp.com>

Dear Sir or Madam:


We, **Panasonic Corporation of North America** hereby declare that product: Microwave Oven, model: NN-SD78LS, which has been tested by BACL.

The differences between model NN-SD78LS and NN-SN76LS, NN-SN75LW, NN-SN75LB, are appearance color and operation method.

Please contact me if there is need for any additional clarification or information.

Best Regards,

Signature:



Printed name: Jim Wang

Title: Engineering & Quality Manager

*******END OF REPORT*******