




# FCC Test Report

**Equipment** : IP wireless camera  
**Brand Name** : Dropcam  
**Model No.** : Dropcam PRO  
**FCC ID** : ADQ-HD4001  
**Standard** : 47 CFR FCC Part 15.407  
**Operating Band** : 5150 MHz – 5250 MHz  
**FCC Classification** : NII  
**Applicant** : Dropcam, Inc.  
301 Howard Street,  
4th Floor San Francisco,  
CA 94105  
**Manufacturer** : Chicony Electronics ( Mainland China II ) Co., Ltd.  
San Zhong Gong Li Qu,  
Qingxi, Dongguan,  
China

The product sample received on Jul. 26, 2013 and completely tested on Aug. 14, 2013. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2009 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:

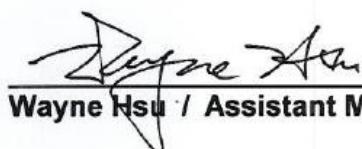  
\_\_\_\_\_  
Wayne Hsu / Assistant Manager





## Table of Contents

<b>1</b>	<b>GENERAL DESCRIPTION .....</b>	<b>5</b>
1.1	Information.....	5
1.2	Accessories and Support Equipment.....	7
1.3	Testing Applied Standards .....	7
1.4	Testing Location Information .....	7
1.5	Measurement Uncertainty .....	8
<b>2</b>	<b>TEST CONFIGURATION OF EUT .....</b>	<b>9</b>
2.1	The Worst Case Modulation Configuration .....	9
2.2	The Worst Case Power Setting Parameter .....	9
2.3	The Worst Case Measurement Configuration .....	10
2.4	Test Setup Diagram .....	11
<b>3</b>	<b>TRANSMITTER TEST RESULT .....</b>	<b>13</b>
3.1	AC Power-line Conducted Emissions .....	13
3.2	Emission Bandwidth.....	16
3.3	RF Output Power .....	19
3.4	Peak Power Spectral Density .....	22
3.5	Peak Excursion.....	25
3.6	Transmitter Radiated Bandedge Emissions .....	27
3.7	Transmitter Radiated Unwanted Emissions .....	31
3.8	Frequency Stability.....	48
<b>4</b>	<b>TEST EQUIPMENT AND CALIBRATION DATA.....</b>	<b>50</b>



## Summary of Test Result

Conformance Test Specifications					
Report Clause	Ref. Std. Clause	Description	Measured	Limit	Result
1.1.2	15.203	Antenna Requirement	Antenna connector mechanism complied	FCC 15.203	Complied
3.1	15.207	AC Power-line Conducted Emissions	[dBuV]: 0.1507970MHz 38.36 (Margin 17.60dB) - AV 54.52 (Margin 11.44dB) - QP	FCC 15.207	Complied
3.2	15.407(a)	Emission Bandwidth	Bandwidth [MHz] 20M:21.75	Information only	Complied
3.3	15.407(a)	RF Output Power (Maximum Conducted Output Power)	Power [dBm] 5150-5250MHz:11.88	Power [dBm] 5150-5250MHz:17	Complied
3.4	15.407(a)	Peak Power Spectral Density	PPSD [dBm/MHz] 5150-5250MHz:0.99	PPSD [dBm/MHz] 5150-5250MHz:4	Complied
3.5	15.407(a)	Peak Excursion	7.75 dB	13 dB	Complied
3.6	15.407(b)	Transmitter Bandedge Emissions	Restricted Bands [dBuV/m at 1m]: 5350.00MHz 81.17 (Margin 2.37dB) - PK 62.50 (Margin 1.04dB) - AV	Non-Restricted Bands: ≤ -27dBm (77.84dBuV/m@1m) Restricted Bands: FCC 15.209	Complied
3.7	15.407(b)	Transmitter Radiated Unwanted Emissions	Restricted Bands [dBuV/m at 3m]: 184.230MHz 39.62 (Margin 3.88dB) - PK	Non-Restricted Bands: ≤ -27dBm (68.3dBuV/m@3m) Restricted Bands: FCC 15.209	Complied
3.8	15.407(g)	Frequency Stability	8.7162 ppm	Signal shall remain in-band	Complied



## Revision History



## 1 General Description

### 1.1 Information

#### 1.1.1 RF General Information

RF General Information						
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N <sub>TX</sub> )	RF Output Power (dBm)	Co-location
5150-5250	a	5180-5240	36-48 [4]	1	11.88	N/A
5150-5250	n (HT20)	5180-5240	36-48 [4]	1	7.44	N/A

Note 1: RF output power specifies that Maximum Conducted Output Power.  
Note 2: 802.11a/n uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.  
Note 4: Co-location, Co-location is generally defined as simultaneously transmitting (co-transmitting) antennas within 20 cm of each other. (i.e., EUT has simultaneously co-transmitting that operating 2.4GHz and 5GHz.)

#### 1.1.2 Antenna Information

Antenna Category	
<input checked="" type="checkbox"/>	Integral antenna (antenna permanently attached)
<input type="checkbox"/>	Temporary RF connector provided
<input checked="" type="checkbox"/>	No temporary RF connector provided Transmit chains bypass antenna and soldered temporary RF connector provided for connected measurement. In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator and correct for all losses in the RF path.

Antenna General Information			
No.	Ant. Cat.	Ant. Type	Gain (dBi)
1	Integral	PIFA	5.05



### 1.1.3 Type of EUT

Identify EUT	
EUT Serial Number	N/A
Presentation of Equipment	<input checked="" type="checkbox"/> Production ; <input type="checkbox"/> Pre-Production ; <input type="checkbox"/> Prototype
Type of EUT	
<input checked="" type="checkbox"/> Stand-alone	
<input type="checkbox"/> Combined (EUT where the radio part is fully integrated within another device) Combined Equipment - Brand Name / Model No.: ...	
<input type="checkbox"/> Plug-in radio (EUT intended for a variety of host systems) Host System - Brand Name / Model No.: ...	
<input type="checkbox"/> Other:	

### 1.1.4 Test Signal Duty Cycle

Operated Mode for Worst Duty Cycle	
<input type="checkbox"/> Operated normally mode for worst duty cycle	
<input checked="" type="checkbox"/> Operated test mode for worst duty cycle	
Test Signal Duty Cycle (x)	Power Duty Factor [dB] – (10 log 1/x)
<input checked="" type="checkbox"/> 100% - IEEE 802.11a	0
<input checked="" type="checkbox"/> 100% - IEEE 802.11n (HT20)	0

### 1.1.5 EUT Operational Condition

Supply Voltage	<input checked="" type="checkbox"/> AC mains	<input checked="" type="checkbox"/> DC	<input checked="" type="checkbox"/> System
Type of DC Source	<input type="checkbox"/> Internal DC supply	<input checked="" type="checkbox"/> External DC adapter	<input type="checkbox"/> Battery



## 1.2 Accessories and Support Equipment

Accessories Information				
AC Adapter	Brand Name	dropcam	Model Name	KSAPK0110500200FU
	Power Rating	I/P: 100-240V ~ 50/60Hz 0.5A; O/P: 5.0V --- 2.0A		

Reminder: Regarding to more detail and other information, please refer to user manual.

Support Equipment				
No.	Equipment	Brand Name	Model Name	Serial No.
1	Notebook (For Operating Mode 2)	DELL	E5520	DoC
2	Test Fixture (For Radiated Emission)	--	--	--

## 1.3 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ◆ 47 CFR FCC Part 15
- ◆ ANSI C63.10-2009
- ◆ FCC KDB 789033
- ◆ FCC KDB 644545 D01
- ◆ FCC KDB 662911
- ◆ FCC KDB 412172

## 1.4 Testing Location Information

Testing Location			
<input checked="" type="checkbox"/>	HWA YA	ADD : No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.	
		TEL : 886-3-327-3456	FAX : 886-3-327-0973
Test Condition	Test Site No.	Test Engineer	Test Environment
AC Conduction	CO04-HY	Zeus	24°C / 47%
RF Conducted	TH01-HY	Wei	22.2°C / 61%
Radiated Emission	03CH03-HY	Daniel	24.5°C / 55%



## 1.5 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

Measurement Uncertainty			
Test Item	Uncertainty	Limit	
AC power-line conducted emissions	±2.26 dB	N/A	
Emission bandwidth	±1.42 %	N/A	
RF output power, conducted	±0.63 dB	N/A	
Power density, conducted	±0.81 dB	N/A	
Unwanted emissions, conducted	30 – 1000 MHz	±0.51 dB	N/A
	1 – 18 GHz	±0.67 dB	N/A
	18 – 40 GHz	±0.83 dB	N/A
	40 – 200 GHz	N/A	N/A
All emissions, radiated	30 – 1000 MHz	±2.56 dB	N/A
	1 – 18 GHz	±3.59 dB	N/A
	18 – 40 GHz	±3.82 dB	N/A
	40 – 200 GHz	N/A	N/A
Temperature	±0.8 °C	N/A	
Humidity	±3 %	N/A	
DC and low frequency voltages	±3 %	N/A	
Time	±1.42 %	N/A	
Duty Cycle	±1.42 %	N/A	



## 2 Test Configuration of EUT

### 2.1 The Worst Case Modulation Configuration

Worst Modulation Used for Conformance Testing			
Modulation Mode	Transmit Chains (N <sub>TX</sub> )	Data Rate / MCS	Worst Data Rate / MCS
11a,6-54Mbps	1	6-54Mbps	6 Mbps
HT20,M0-7	1	M0-7	MCS 0

### 2.2 The Worst Case Power Setting Parameter

The Worst Case Power Setting Parameter (5150-5250MHz band)					
Test Software Version	HyperTerminal				
Modulation Mode	N <sub>TX</sub>	Test Frequency (MHz)			
		NCB: 20MHz			
		5180	5200	5240	
11a,6-54Mbps	1	14	14	14	
HT20,M0-7	1	10	10	10	



## 2.3 The Worst Case Measurement Configuration


The Worst Case Mode for Following Conformance Tests	
<b>Tests Item</b>	AC power-line conducted emissions
<b>Condition</b>	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
<b>Operating Mode</b>	Operating Mode Description
1	EUT with AC Power test
2	EUT with Notebook via USB Cable test



For operating mode 1 is the worst case and it was record in this test report.

The Worst Case Mode for Following Conformance Tests	
<b>Tests Item</b>	RF Output Power, Peak Power Spectral Density, Emission Bandwidth, Peak Excursion
<b>Test Condition</b>	Conducted measurement at transmit chains
<b>Modulation Mode</b>	11a, HT20

The Worst Case Mode for Following Conformance Tests							
<b>Tests Item</b>	Transmitter Radiated Unwanted Emissions Transmitter Radiated Bandedge Emissions						
<b>Test Condition</b>	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.						
<b>User Position</b>	<input type="checkbox"/> EUT will be placed in fixed position. <input checked="" type="checkbox"/> EUT will be placed in mobile position and operating multiple positions. EUT shall be performed two orthogonal planes. The worst planes is Z. <input type="checkbox"/> EUT will be a hand-held or body-worn battery-powered devices and operating multiple positions. EUT shall be performed two or three orthogonal planes.						
<b>Operating Mode &lt; 1GHz</b>	<input checked="" type="checkbox"/> 1. EUT with AC Power test <input checked="" type="checkbox"/> 2. EUT with Notebook via USB Cable test For operating mode 2 is the worst case and it was record in this test report.						
<b>Operating Mode &gt; 1GHz</b>	<input checked="" type="checkbox"/> 1. EUT with AC Power test						
<b>Modulation Mode</b>	11a, HT20						
<b>Orthogonal Planes of EUT</b>	<table border="1"> <thead> <tr> <th>X Plane</th> <th>Y Plane</th> <th>Z Plane</th> </tr> </thead> <tbody> <tr> <td></td> <td></td> <td></td> </tr> </tbody> </table>	X Plane	Y Plane	Z Plane			
X Plane	Y Plane	Z Plane					

## 2.4 Test Setup Diagram

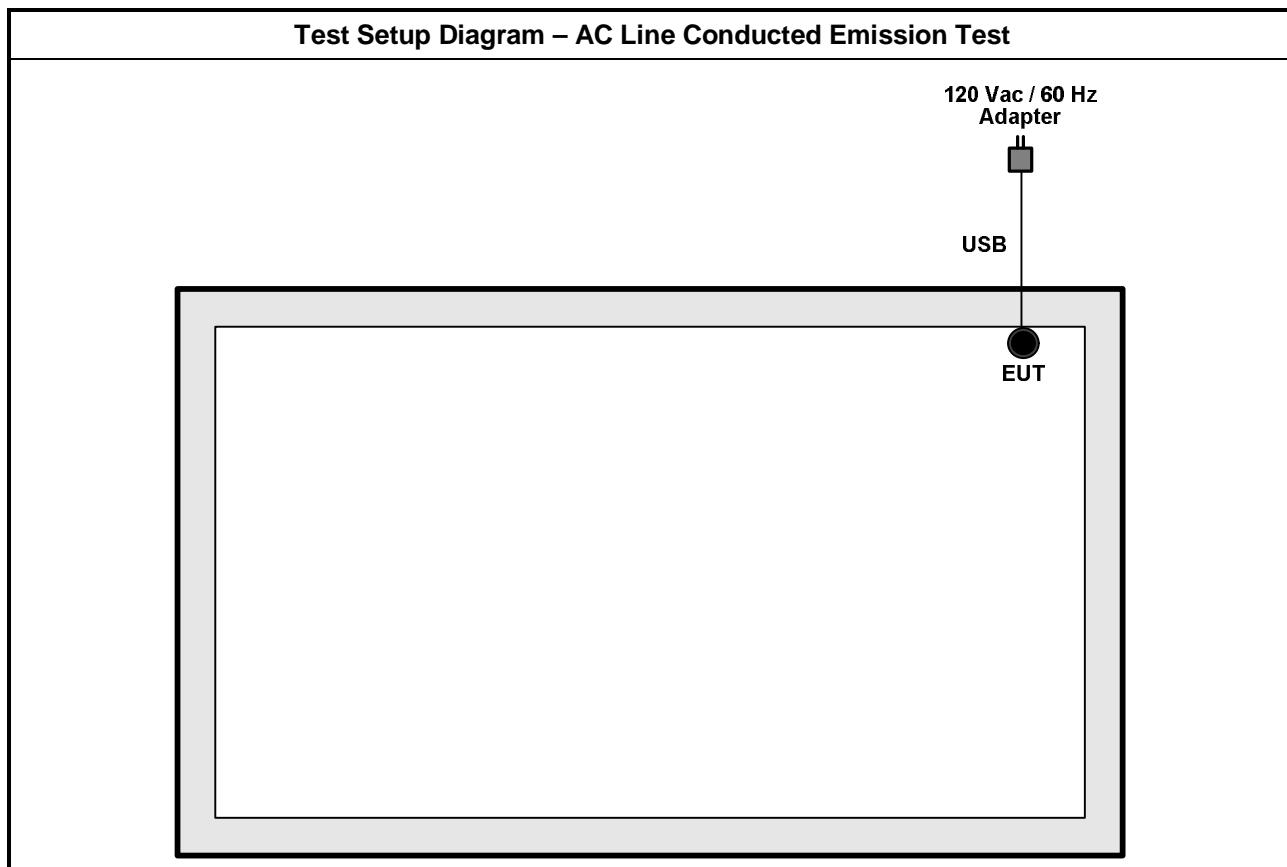

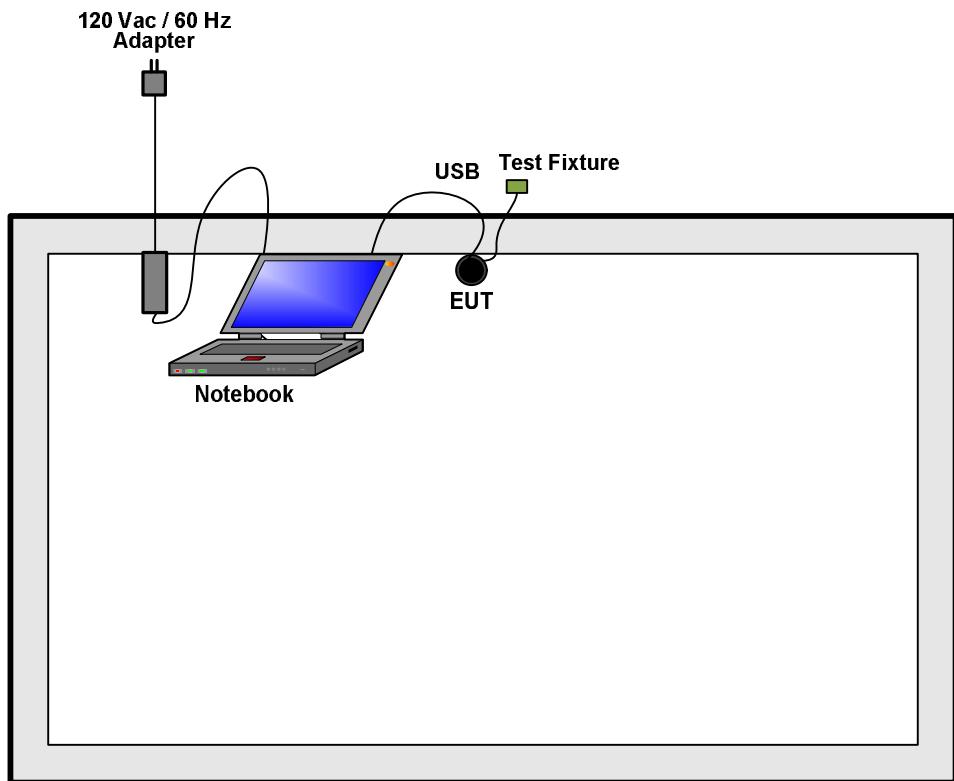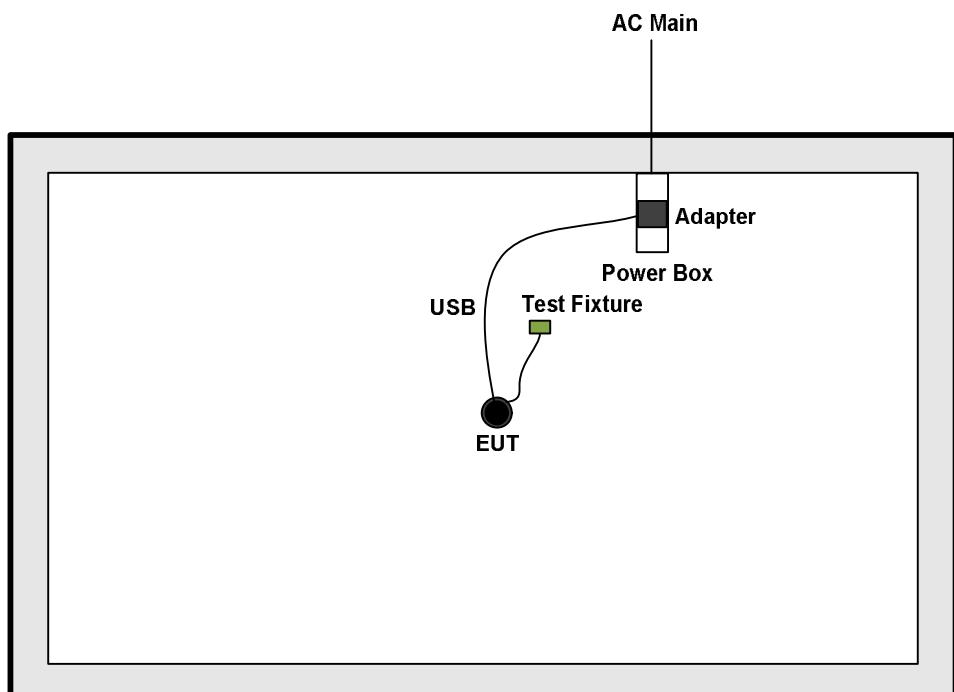**Test Setup Diagram - Radiated Test (Below 1GHz)****Test Setup Diagram - Radiated Test (Above 1GHz)**

### 3 Transmitter Test Result

#### 3.1 AC Power-line Conducted Emissions

##### 3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: \* Decreases with the logarithm of the frequency.


##### 3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

##### 3.1.3 Test Procedures

Test Method
<input checked="" type="checkbox"/> Refer as ANSI C63.10-2009, clause 6.2 for AC power-line conducted emissions.


##### 3.1.4 Test Setup

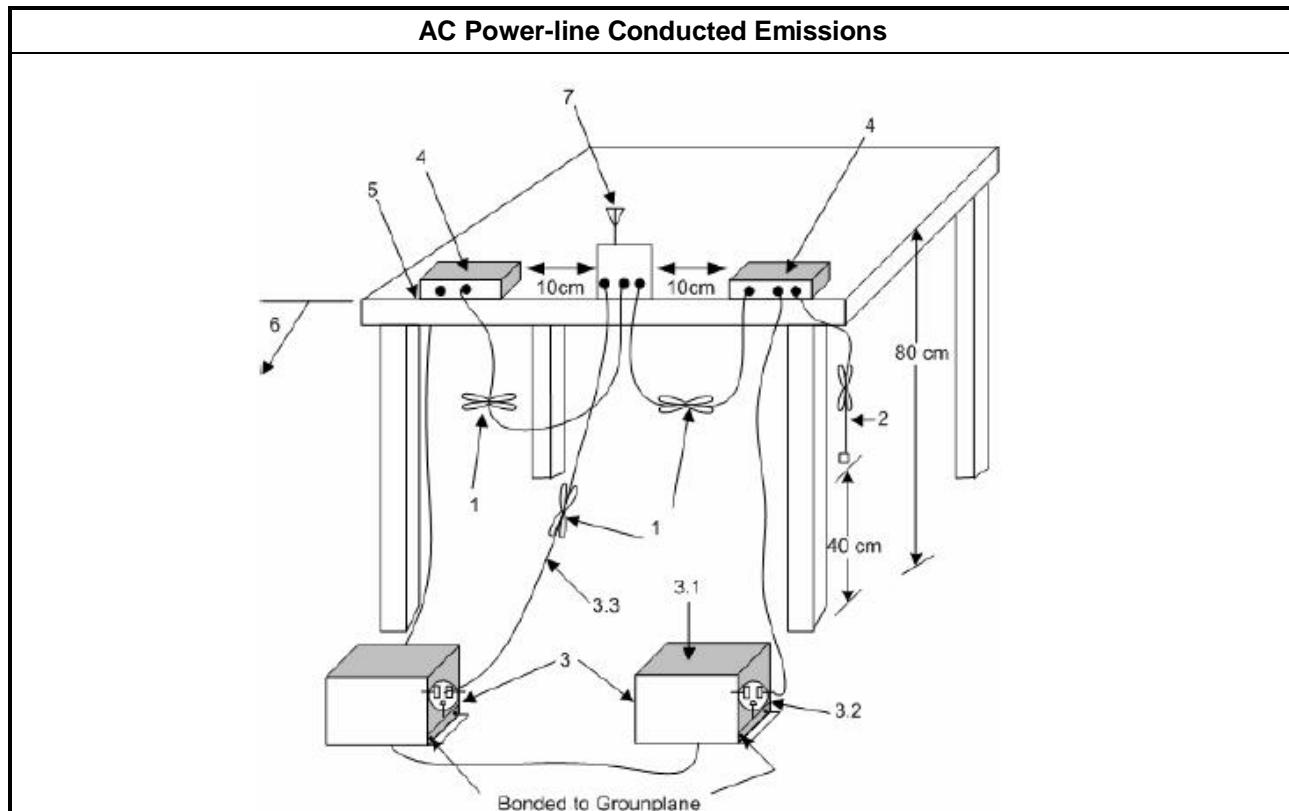



## 3.1.5 Test Result of AC Power-line Conducted Emissions

AC Power-line Conducted Emissions Result							
Operating Mode	1	Power Phase	Neutral				
Operating Function	EUT with AC Power test						
Level (dBuV)							Date: 2013-08-13
Emissions Data (dBuV)							
Freq Freq Level Over Limit Read LISN Cable							
MHz dBuV Limit Line Level Factor Loss Remark							
MHz dBuV dB dBuV dB dB dB							
1	0.1507970	54.52	-11.44	65.96	54.02	0.24	0.26 QP
2	0.1507970	38.36	-17.60	55.96	37.86	0.24	0.26 Average
3	0.1996860	50.27	-13.35	63.62	49.94	0.23	0.10 QP
4	0.1996860	34.34	-19.28	53.62	34.01	0.23	0.10 Average
5	0.2468240	46.51	-15.35	61.86	46.18	0.23	0.10 QP
6	0.2468240	30.14	-21.72	51.86	29.81	0.23	0.10 Average
7	0.5947840	35.98	-20.02	56.00	35.62	0.22	0.14 QP
8	0.5947840	19.44	-26.56	46.00	19.08	0.22	0.14 Average
9	10.340	32.43	-27.57	60.00	31.89	0.43	0.11 QP
10	10.340	22.08	-27.92	50.00	21.54	0.43	0.11 Average
11	13.560	44.37	-15.63	60.00	43.72	0.48	0.17 QP
12	13.560	30.26	-19.74	50.00	29.61	0.48	0.17 Average
Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.							
Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)							

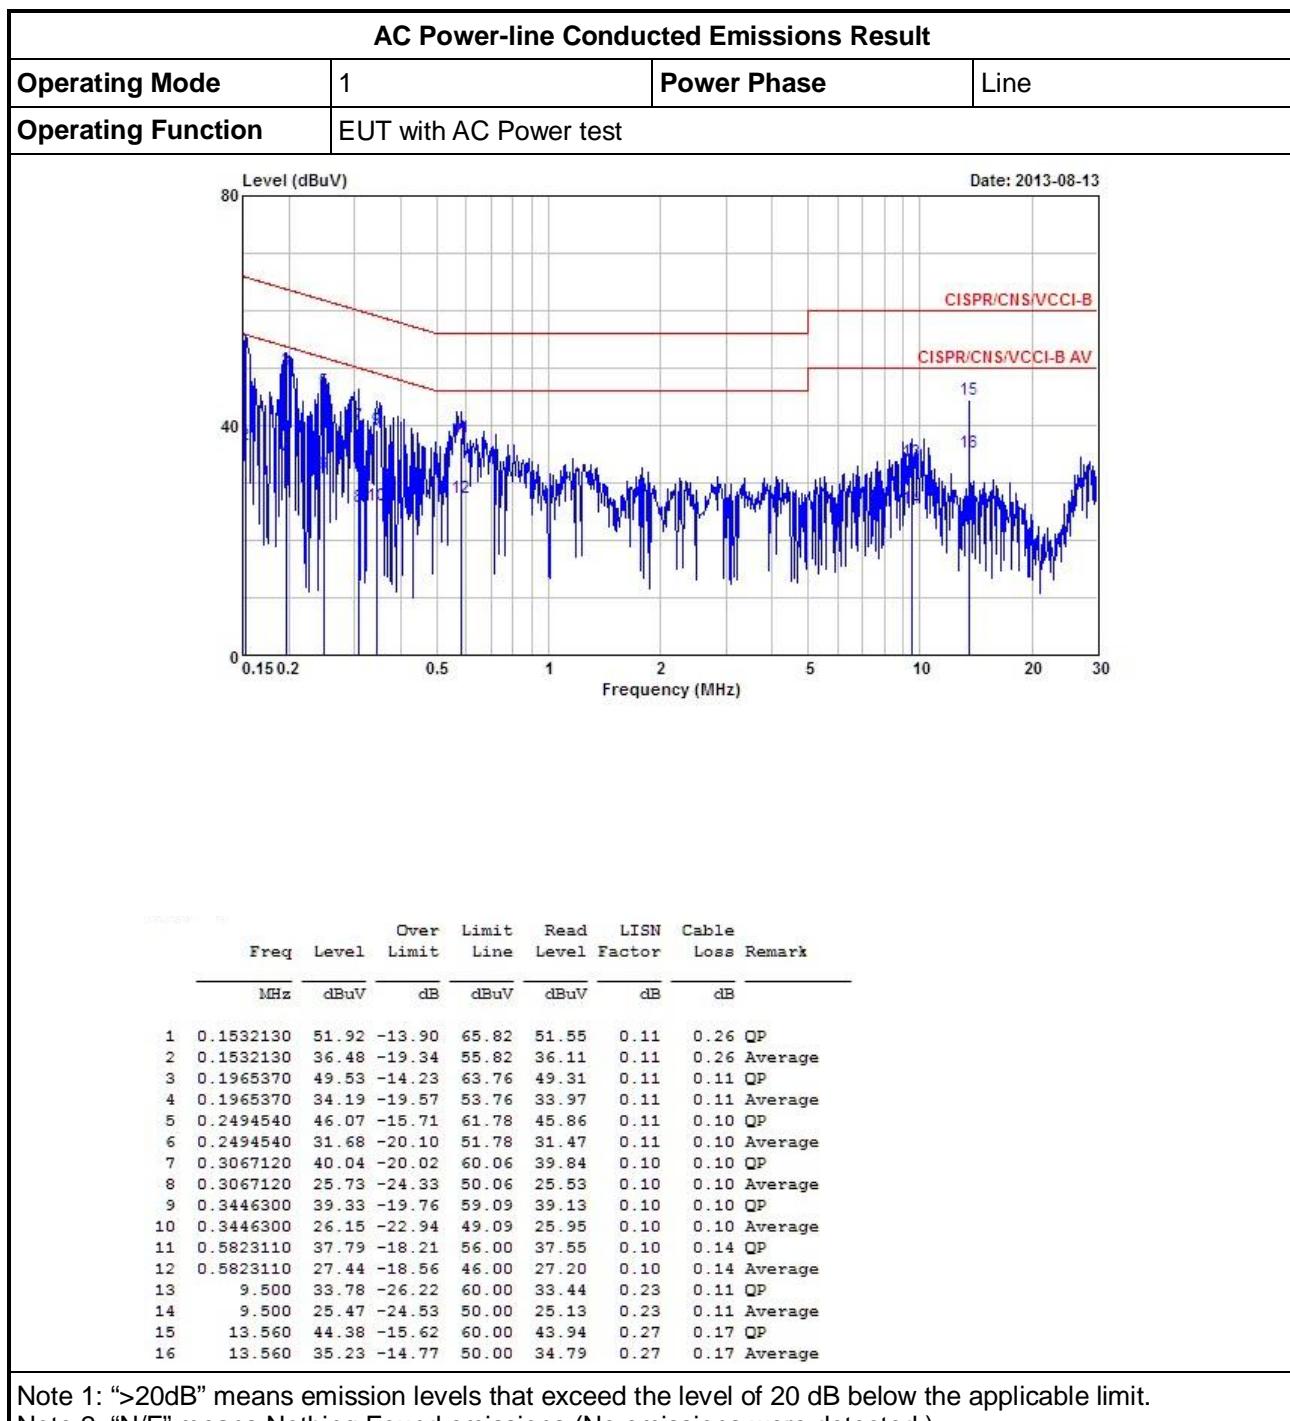



## 3.2 Emission Bandwidth

### 3.2.1 Emission Bandwidth (EBW) Limit

Emission Bandwidth (EBW) Limit	
<b>UNII Devices</b>	
<input checked="" type="checkbox"/>	For the 5.15-5.25 GHz band, the maximum conducted output power shall not exceed the lesser of 50 mW or 4 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz.
<input type="checkbox"/>	For the 5.25-5.35 GHz band, the maximum conducted output power shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz.
<input type="checkbox"/>	For the 5.47-5.725 GHz band, the maximum conducted output power shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz.
<input type="checkbox"/>	For the 5.725-5.825 GHz band, the maximum conducted output power shall not exceed the lesser of 1 W or 17 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz
<b>LE-LAN Devices</b>	
<input checked="" type="checkbox"/>	For the band 5.15-5.25 GHz, the maximum e.i.r.p. shall not exceed 200 mW or 10 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.
<input type="checkbox"/>	For the 5.25-5.35 GHz band, the maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz
<input type="checkbox"/>	For the 5.47-5.6 GHz band and 5.65-5.725 GHz band, the maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz
<input type="checkbox"/>	For the 5.725-5.825 GHz band, the maximum e.i.r.p. shall not exceed 4.0 W or 23 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.

### 3.2.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

### 3.2.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	For the emission bandwidth shall be measured using one of the options below:
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033, clause C for EBW and clause D for OBW measurement.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.
<input checked="" type="checkbox"/>	Refer as IC RSS-Gen, clause 4.6 for bandwidth testing.
<input checked="" type="checkbox"/>	For conducted measurement.
	<input checked="" type="checkbox"/> The EUT supports single transmit chain and measurements performed on this transmit chain.
	<input type="checkbox"/> The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.
	<input type="checkbox"/> The EUT supports multiple transmit chains using options given below:
	<input type="checkbox"/> Option 1: Multiple transmit chains measurements need to be performed on one of the active transmit chains (antenna outputs). All measurement had be performed on transmit chains 1.
	<input type="checkbox"/> Option 2: Multiple transmit chains measurements need to be performed on each transmit chains individually (antenna outputs). All measurement had be performed on all transmit chains.




### 3.2.4 Test Setup

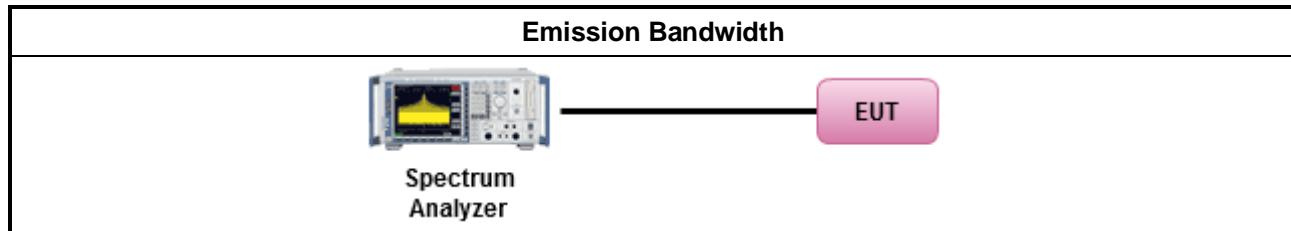

### 3.2.5 Test Result of Emission Bandwidth

UNII Emission Bandwidth Result (5150-5250MHz band)						
Condition			Emission Bandwidth (MHz)			
Modulation Mode	N <sub>TX</sub>	Freq. (MHz)	99% Bandwidth	26dB Bandwidth	Power Limit	
			Chain Port 1	Chain- Port 1	99% BW	26dB BW
11a	1	5180	16.46	20.62	16.16	17.14
11a	1	5200	16.76	20.10	16.24	17.03
11a	1	5240	16.44	19.50	16.16	16.90
HT20	1	5180	17.91	21.75	16.53	17.37
HT20	1	5200	17.69	21.37	16.48	17.30
HT20	1	5240	17.94	21.67	16.54	17.36
Result			Complied			

Note 1: N<sub>TX</sub> = Number of Transmit Chains

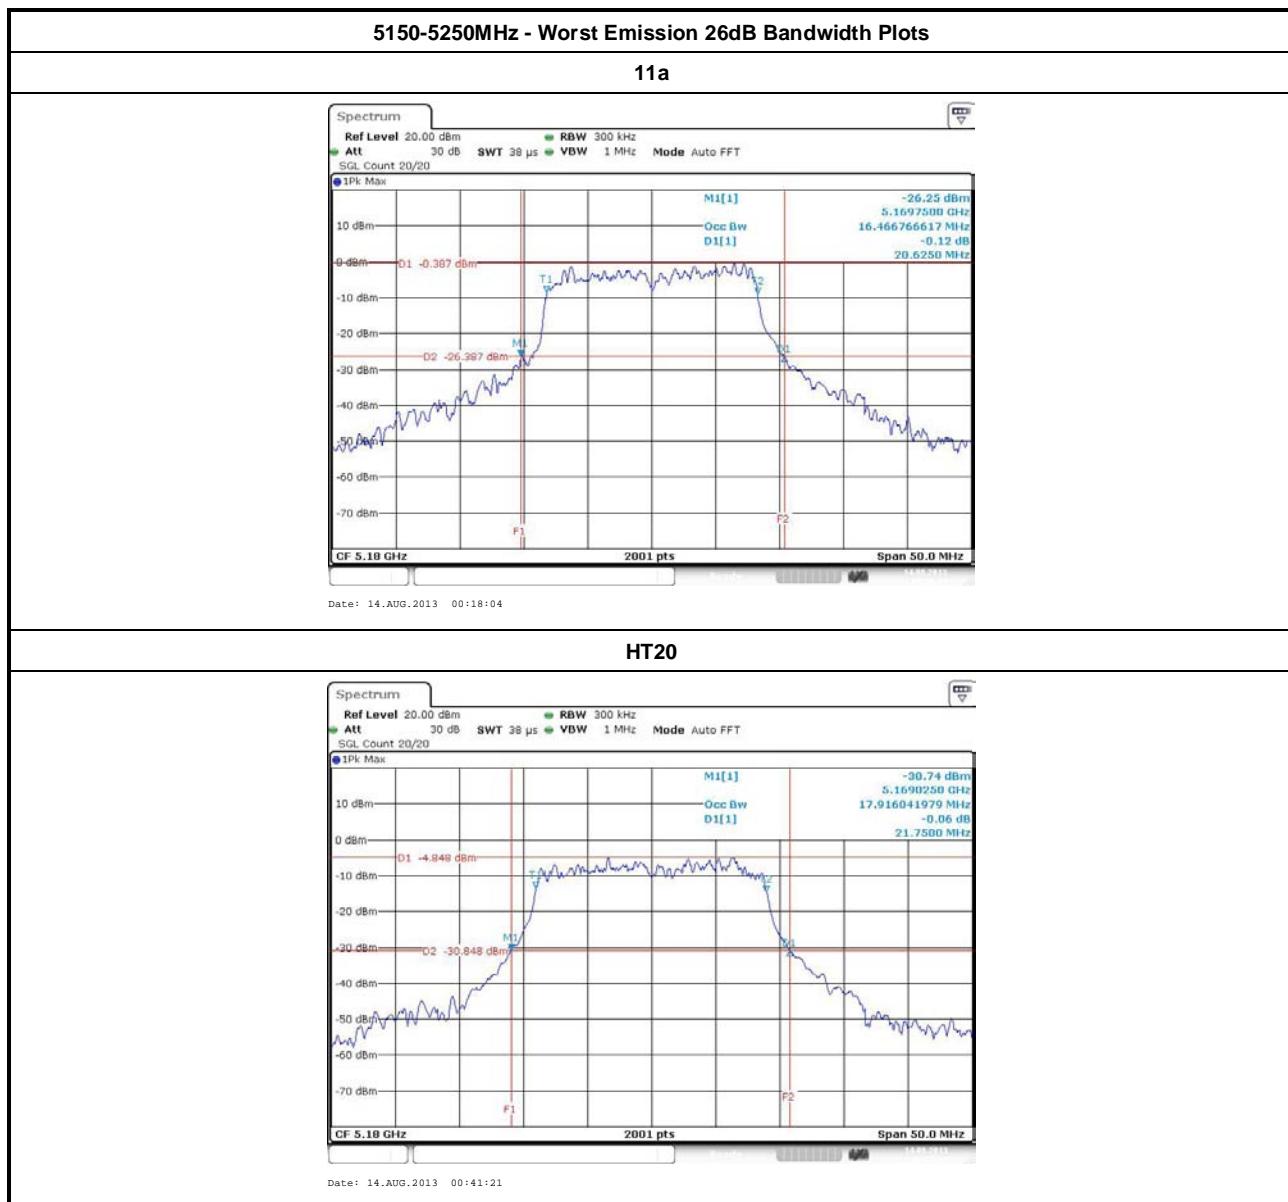



### 3.3 RF Output Power

#### 3.3.1 RF Output Power Limit

Maximum Conducted Output Power Limit	
<b>UNII Devices</b>	
<input checked="" type="checkbox"/>	For the 5.15-5.25 GHz band, the maximum conducted output power ( $P_{Out}$ ) shall not exceed the lesser of 50 mW or $4 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6 \text{ dBi}$ , then $P_{Out} = 17 - (G_{TX} - 6)$ .
<input type="checkbox"/>	For the 5.25-5.35 GHz band, the maximum conducted output power ( $P_{Out}$ ) shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6 \text{ dBi}$ , then $P_{Out} = 24 - (G_{TX} - 6)$ .
<input type="checkbox"/>	For the 5.47-5.725 GHz band, the maximum conducted output power ( $P_{Out}$ ) shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6 \text{ dBi}$ , then $P_{Out} = 24 - (G_{TX} - 6)$ .
<input type="checkbox"/>	For the 5.725-5.825 GHz band:
<input type="checkbox"/>	Point-to-multipoint systems (P2M): the maximum conducted output power ( $P_{Out}$ ) shall not exceed the lesser of 1 W or $17 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6 \text{ dBi}$ , then $P_{Out} = 30 - (G_{TX} - 6)$ .
<input type="checkbox"/>	Point-to-point systems (P2P): the maximum conducted output power ( $P_{Out}$ ) shall not exceed the lesser of 1 W or $17 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 23 \text{ dBi}$ , then $P_{Out} = 30 - (G_{TX} - 23)$ .
<b>LE-LAN Devices</b>	
<input checked="" type="checkbox"/>	For the 5.15-5.25 GHz band, the maximum e.i.r.p. shall not exceed 200 mW or $10 + 10 \log B$ , dBm, whichever power is less. B is the 99% emission bandwidth in MHz.
<input type="checkbox"/>	For the 5.25-5.35 GHz band, the maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log B$ , dBm, whichever power is less. B is the 99% emission bandwidth in MHz
<input type="checkbox"/>	For the 5.47-5.6 GHz band and 5.65-5.725 GHz band, the maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log B$ , dBm, whichever power is less. B is the 99% emission bandwidth in MHz
<input type="checkbox"/>	For the 5.725-5.825 GHz band, the maximum e.i.r.p. shall not exceed 4.0 W or $23 + 10 \log B$ , dBm, whichever power is less. B is the 99% emission bandwidth in MHz.
<input type="checkbox"/>	Point-to-multipoint systems (P2M): the maximum e.i.r.p. shall not exceed 4.0 W or $23 + 10 \log B$ , dBm, whichever power is less. B is the 99% emission bandwidth in MHz.
<input type="checkbox"/>	Point-to-point systems (P2P): the maximum e.i.r.p. shall not exceed 4.0 W or $23 + 10 \log B$ , dBm, whichever power is less. B is the 99% emission bandwidth in MHz. If e.i.r.p. > 36 dBm, $G_{TX} \leq P_{Out}$
$P_{Out}$ = maximum conducted output power in dBm, $G_{TX}$ = the maximum transmitting antenna directional gain in dBi.	


#### 3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

### 3.3.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/> Maximum Conducted Output Power	
	[duty cycle $\geq$ 98% or external video / power trigger]
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033, clause E Method SA-1 (spectral trace averaging).
<input type="checkbox"/>	Refer as FCC KDB 789033, clause E Method SA-1 Alt. (RMS detection with slow sweep speed)
	duty cycle $<$ 98% and average over on/off periods with duty factor
<input type="checkbox"/>	Refer as FCC KDB 789033, clause E Method SA-2 (spectral trace averaging).
<input type="checkbox"/>	Refer as FCC KDB 789033, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
	Wideband RF power meter and average over on/off periods with duty factor
<input type="checkbox"/>	Refer as FCC KDB 789033, clause E Method PM (using an RF average power meter).
<input checked="" type="checkbox"/> For conducted measurement.	
<input checked="" type="checkbox"/>	The EUT supports single transmit chain and measurements performed on this transmit chain.
<input type="checkbox"/>	The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.
<input type="checkbox"/>	The EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.
<input type="checkbox"/>	If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$


### 3.3.4 Test Setup

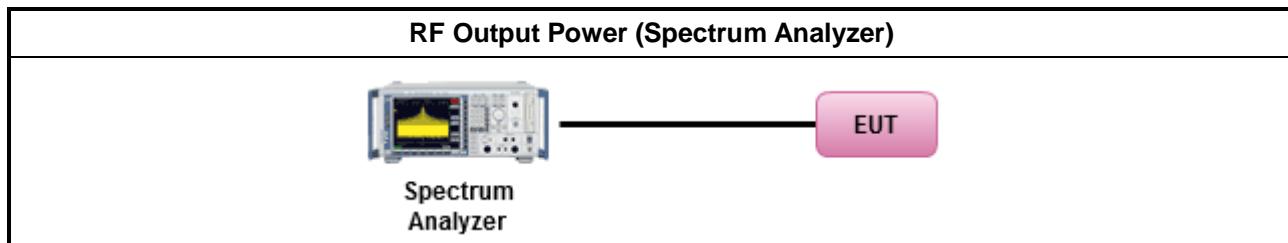



## 3.3.5 Test Result of Maximum Conducted Output Power

Maximum Conducted Output Power (5150-5250MHz band)						
Condition			RF Output Power (dBm)			
Modulation Mode	N <sub>TX</sub>	Freq. (MHz)	Chain Port 1	Power Limit	EIRP Power	EIRP Limit
11a	1	5180	11.63	17.00	16.68	22.16
11a	1	5200	11.88	17.00	16.93	22.24
11a	1	5240	10.99	16.90	16.04	22.16
HT20	1	5180	7.42	17.00	12.47	22.53
HT20	1	5200	7.44	17.00	12.49	22.48
HT20	1	5240	6.39	17.00	11.44	22.54
Result			Complied			

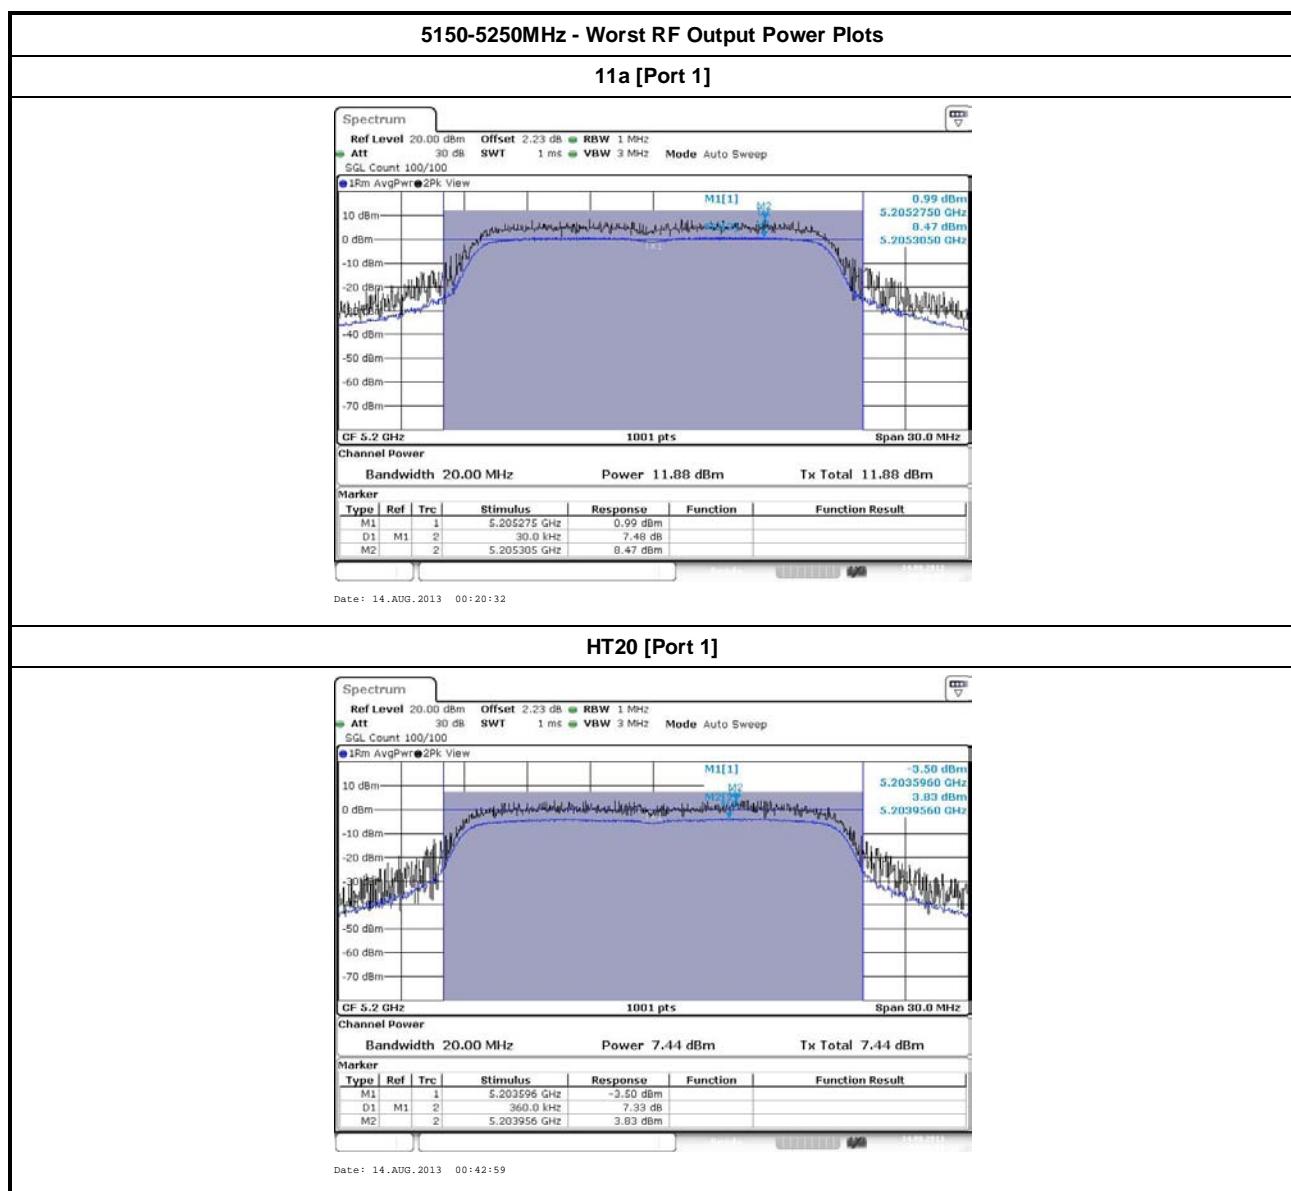



## 3.4 Peak Power Spectral Density

### 3.4.1 Peak Power Spectral Density Limit

Peak Power Spectral Density Limit	
<b>UNII Devices</b>	
<input checked="" type="checkbox"/>	For the 5.15-5.25 GHz band, the peak power spectral density (PPSD) $\leq 4$ dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 4 - (G_{TX} - 6)$ .
<input type="checkbox"/>	For the 5.25-5.35 GHz band, the peak power spectral density (PPSD) $\leq 11$ dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$ .
<input type="checkbox"/>	For the 5.47-5.725 GHz band, the peak power spectral density (PPSD) $\leq 11$ dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$ .
<input type="checkbox"/>	For the 5.725-5.825 GHz band: <ul style="list-style-type: none"><li><input type="checkbox"/> Point-to-multipoint systems (P2M): the peak power spectral density (PPSD) <math>\leq 17</math> dBm/MHz. If <math>G_{TX} &gt; 6</math> dBi, then <math>PPSD = 17 - (G_{TX} - 6)</math>.</li><li><input type="checkbox"/> Point-to-point systems (P2P): the peak power spectral density (PPSD) <math>\leq 17</math> dBm/MHz. If <math>G_{TX} &gt; 23</math> dBi, then <math>PPSD = 17 - (G_{TX} - 23)</math>.</li></ul>
<b>LE-LAN Devices</b>	
<input checked="" type="checkbox"/>	For the 5.15-5.25 GHz band, the peak power spectral density (PPSD) $\leq 4$ dBm/MHz and the e.i.r.p. peak power spectral density (PPSD) $\leq 10$ dBm/MHz.
<input type="checkbox"/>	For the 5.25-5.35 GHz band, the peak power spectral density (PPSD) $\leq 11$ dBm/MHz and the e.i.r.p. peak power spectral density (PPSD) $\leq 17$ dBm/MHz.
<input type="checkbox"/>	For the 5.47-5.6 GHz band and 5.65-5.725 GHz band, the peak power spectral density (PPSD) $\leq 11$ dBm/MHz and the e.i.r.p. peak power spectral density (PPSD) $\leq 17$ dBm/MHz.
<input type="checkbox"/>	For the 5.725-5.825 GHz band, the peak power spectral density (PPSD) $\leq 17$ dBm/MHz and the e.i.r.p. peak power spectral density (PPSD) $\leq 23$ dBm/MHz.
<b>PPSD</b> = peak power spectral density that the same method as used to determine the conducted output power shall be used to determine the power spectral density. And power spectral density in dBm/MHz <b>G<sub>TX</sub></b> = the maximum transmitting antenna directional gain in dBi.	

### 3.4.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.



### 3.4.3 Test Procedures

<b>Test Method</b>	
<input checked="" type="checkbox"/>	Peak power spectral density procedures that the same method as used to determine the conducted output power shall be used to determine the peak power spectral density and use the peak search function on the spectrum analyzer to find the peak of the spectrum. For the peak power spectral density shall be measured using below options:
<input type="checkbox"/>	Refer as FCC KDB 789033, F5) power spectral density can be measured using resolution bandwidths < 1 MHz provided that the results are integrated over 1 MHz bandwidth
	[duty cycle $\geq$ 98% or external video / power trigger]
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033, clause E Method SA-1 (spectral trace averaging).
<input type="checkbox"/>	Refer as FCC KDB 789033, clause E Method SA-1 Alt. (RMS detection with slow sweep speed)
	duty cycle < 98% and average over on/off periods with duty factor
<input type="checkbox"/>	Refer as FCC KDB 789033, clause E Method SA-2 (spectral trace averaging).
<input type="checkbox"/>	Refer as FCC KDB 789033, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
<input checked="" type="checkbox"/>	For conducted measurement.
<input checked="" type="checkbox"/>	The EUT supports single transmit chain and measurements performed on this transmit chain.
<input type="checkbox"/>	The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.
<input type="checkbox"/>	The EUT supports multiple transmit chains using options given below:
	<input type="checkbox"/> Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.
	<input type="checkbox"/> Option 2: Measure and add $10 \log(N)$ dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with $10 \log(N)$ . Or each transmit chains shall be add $10 \log(N)$ to compared with the limit.
<input type="checkbox"/>	If multiple transmit chains, EIRP PPSD calculation could be following as methods: $\text{PPSD}_{\text{total}} = \text{PPSD}_1 + \text{PPSD}_2 + \dots + \text{PPSD}_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $\text{EIRP}_{\text{total}} = \text{PPSD}_{\text{total}} + \text{DG}$
<input type="checkbox"/>	Each individually PPSD plots refer as test report clause 3.3.5 with each individually PPSD plots.


### 3.4.4 Test Setup

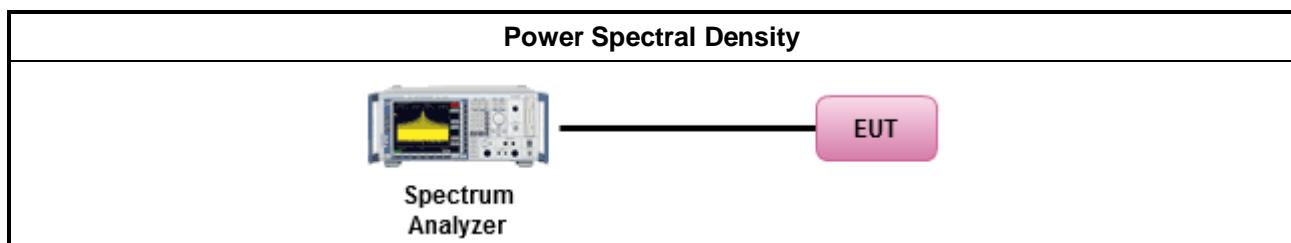



### 3.4.5 Test Result of Peak Power Spectral Density

Peak Power Spectral Density Result (5150-5250MHz band)						
Condition		Power Spectral Density				
Modulation Mode	N <sub>TX</sub>	Freq. (MHz)	Sum Chain	PSD Limit	EIRP PSD	EIRP Limit
11a	1	5180	0.72	4.00	5.77	10.00
11a	1	5200	0.99	4.00	6.04	10.00
11a	1	5240	0.11	4.00	5.16	10.00
HT20	1	5180	-3.50	4.00	1.55	10.00
HT20	1	5200	-3.50	4.00	1.55	10.00
HT20	1	5240	-4.26	4.00	0.79	10.00
Result		Complied				

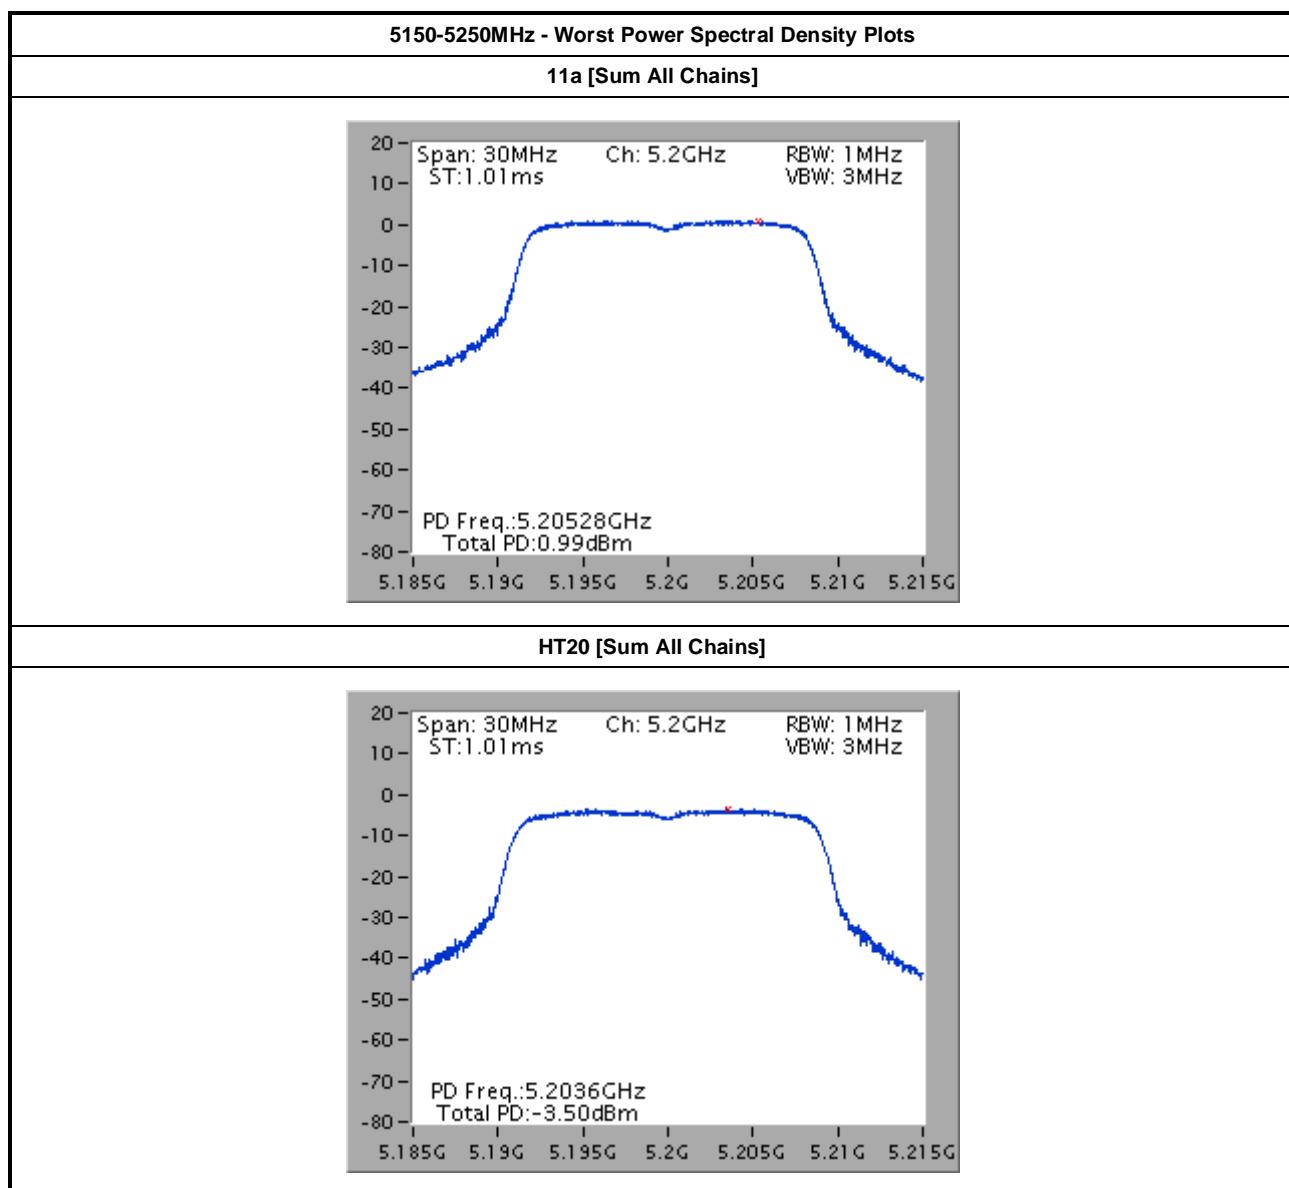

### 3.5 Peak Excursion

#### 3.5.1 Peak Excursion Limit

Peak Excursion Limit	
<b>UNII Devices</b>	
<input checked="" type="checkbox"/>	Peak excursion $\leq$ 13 dB. The ratio of the maximum of the peak-max-hold spectrum to the maximum of the average spectrum for continuous transmission does not exceed 13 dB. (Earlier procedures that required computing the ratio of the two spectra at each frequency across the emission bandwidth can lead to unintended failures at band edges and will no longer be required.)
<b>LE-LAN Devices</b>	
<input checked="" type="checkbox"/>	N/A


#### 3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 3.5.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033, clause G peak excursion method.
<input checked="" type="checkbox"/>	Testing each modulation mode on a single channel is sufficient to demonstrate compliance with the peak excursion requirement
<input checked="" type="checkbox"/>	For conducted measurement.
<input checked="" type="checkbox"/>	Testing a single output port is sufficient to demonstrate compliance with the peak excursion.


#### 3.5.4 Test Setup

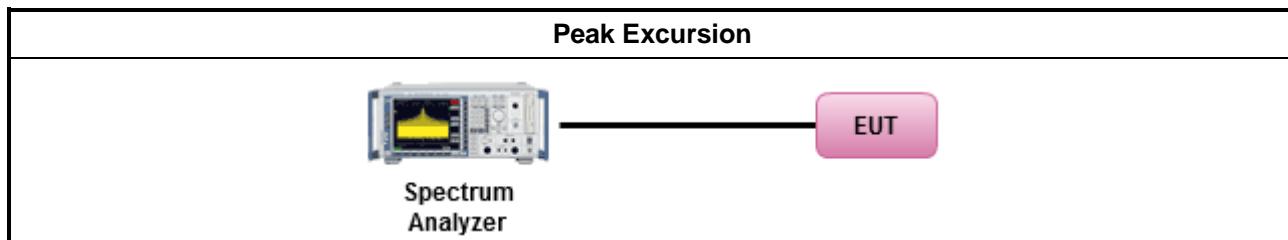




## 3.5.5 Test Result of Peak Excursion

UNII Peak Excursion Result								
Condition			Peak Excursion (dB)					
Modulation Mode	N <sub>Tx</sub>	Freq. (MHz)	BPSK	QPSK	16QAM	64QAM	256QAM	Limit
11a	1	5180	7.35	8.75	8.87	7.28	-	13.0
HT20	1	5180	7.24	7.26	8.22	7.83	-	13.0
Result			Complied					

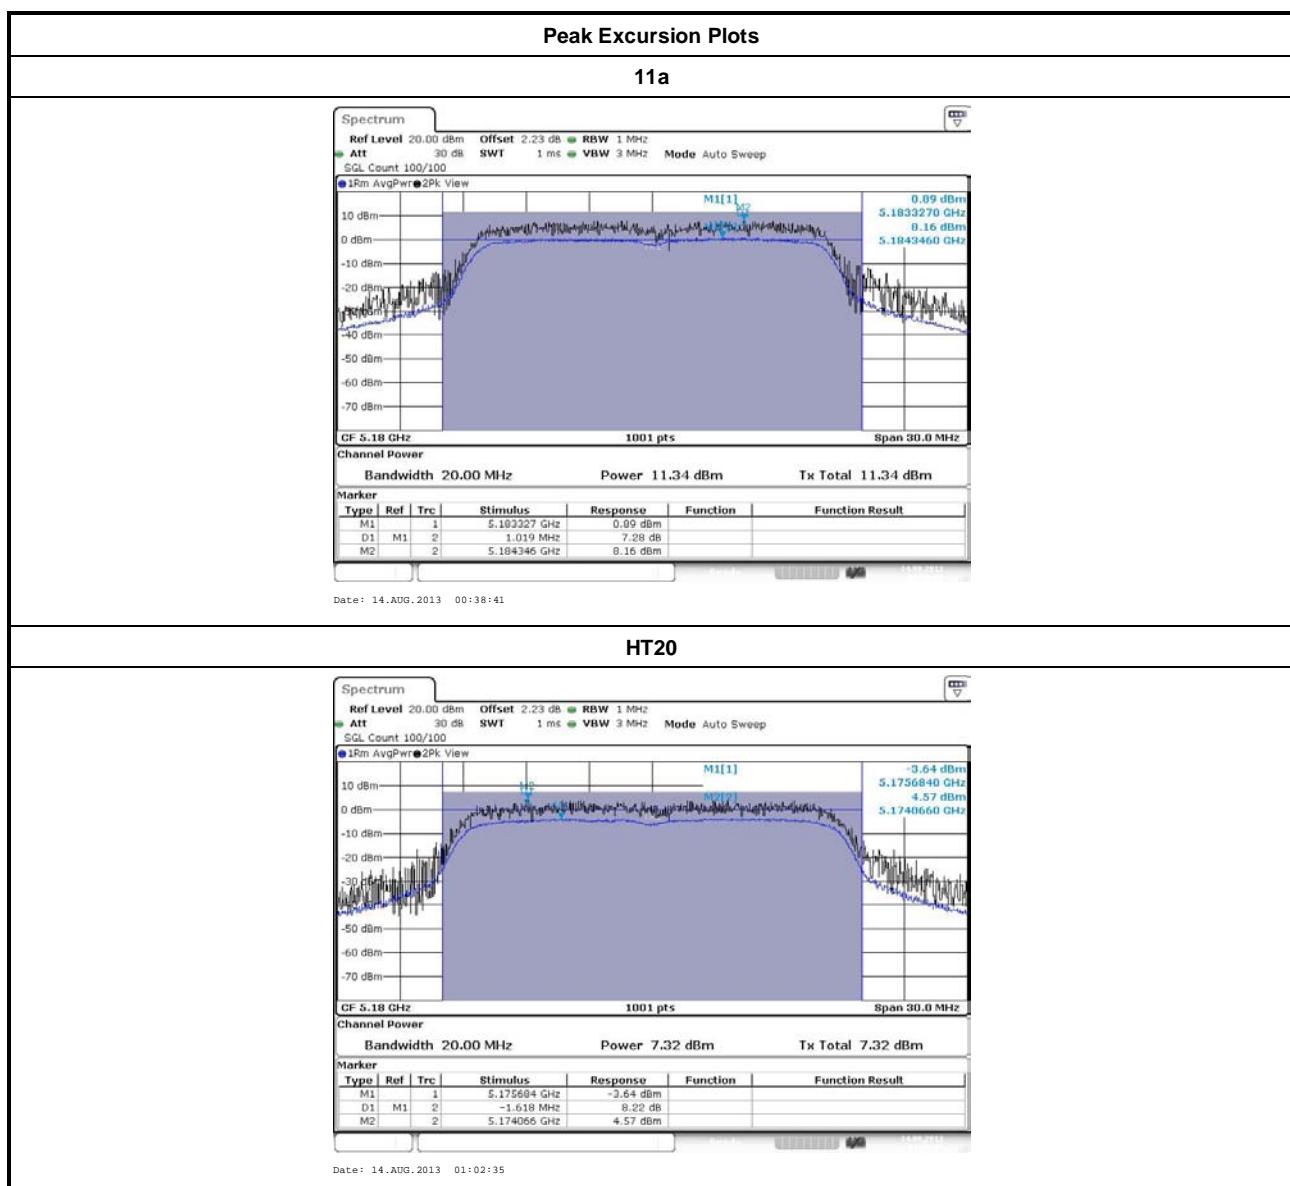

## 3.6 Transmitter Radiated Bandedge Emissions

### 3.6.1 Transmitter Radiated Bandedge Emissions Limit

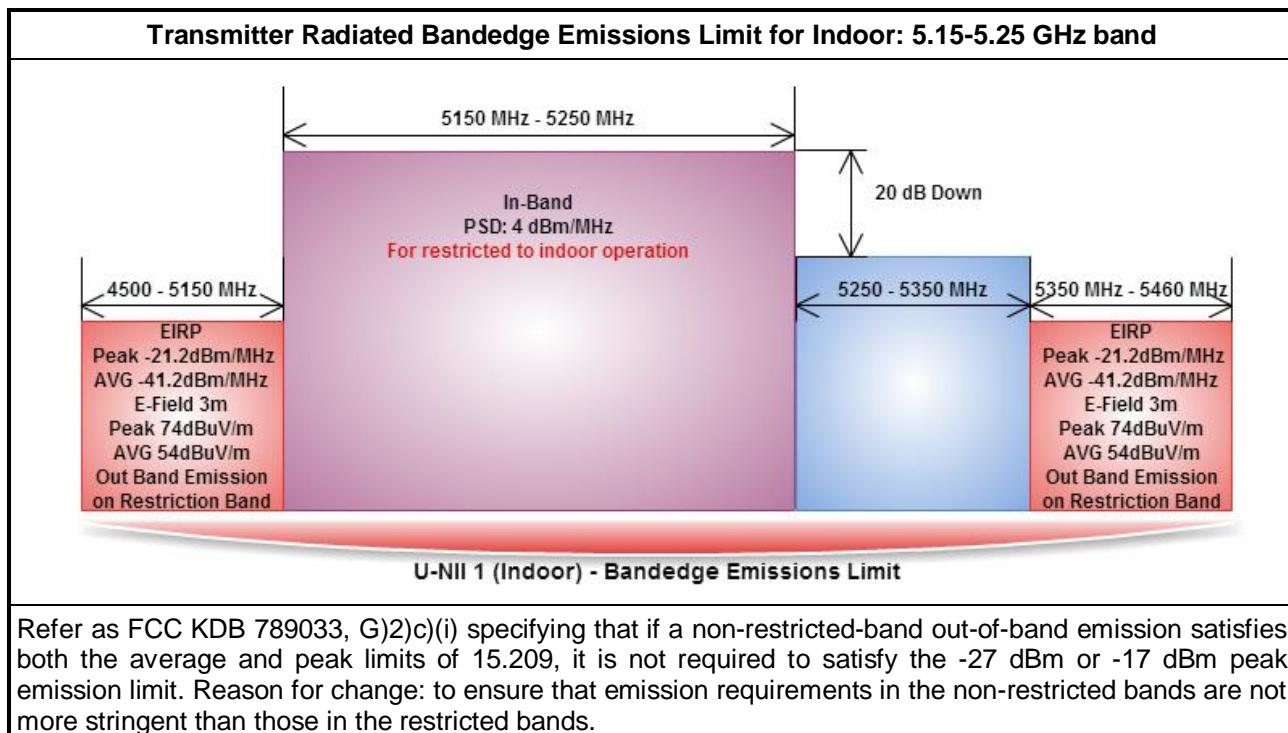

### 3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.




### 3.6.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements). Measurements in the bandedge are typically made at a closer distance 1m, because the instrumentation noise floor is typically close to the radiated emission limit.
<input checked="" type="checkbox"/>	The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.2.2 bandedge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.
<input type="checkbox"/>	If EUT operate in adjacent contiguous bands, bandedge testing performed at the lowest frequency channel at lower-band and highest frequency channel at higher-band. Transmitter in-band emissions will consist of adjacent contiguous bands (e.g., IEEE 802.11ac VHT160 The lowest frequency channel at lower-band and highest frequency channel at higher-band in-band emissions will consist of two adjacent contiguous bands.)
<input type="checkbox"/>	Operating in 5.15-5.25 GHz band (lower-band) and 5.25-5.35 GHz band (higher-band).
<input type="checkbox"/>	Operating in 5.47-5.725 GHz band (lower-band) and 5.725-5.825 GHz band (higher-band).
<input type="checkbox"/>	If EUT operate in individual non-contiguous bands, bandedge testing performed at the lowest frequency channel and highest frequency channel within lower-band and higher-band. (e.g., (e.g., IEEE 802.11ac VHT160)
<input type="checkbox"/>	Operating in 5.25-5.35 GHz band (lower-band) and 5.47-5.725 GHz band (higher-band).
<input type="checkbox"/>	Operating in 5.15-5.25 GHz band (lower-band) and 5.725-5.825 GHz band (higher-band).
<input checked="" type="checkbox"/>	For the transmitter unwanted emissions shall be measured using following options below:
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033, clause H)2) for unwanted emissions into non-restricted bands.
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033, clause H)1) for unwanted emissions into restricted bands.
<input type="checkbox"/>	Refer as FCC KDB 789033, H)6) Method AD (Trace Averaging).
<input type="checkbox"/>	Refer as FCC KDB 789033, H)6) Method VB (Reduced VBW).
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). $VBW \geq 1/T$ , where T is pulse time.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033, clause H)5) measurement procedure peak limit.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.2 measurement procedure peak limit.
<input checked="" type="checkbox"/>	For the transmitter bandedge emissions shall be measured using following options below:
<input type="checkbox"/>	Refer as FCC KDB 789033, clause H)3)d) for narrower resolution bandwidth (100kHz) using the band power and summing the spectral levels (i.e., 1 MHz).
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.2 for band-edge testing.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.3 for marker-delta method for band-edge measurements.
<input checked="" type="checkbox"/>	For radiated measurement, refer as ANSI C63.10, clause 6.5 for radiated emissions from above 1 GHz.

### 3.6.4 Test Setup

#### Transmitter Radiated Bandedge Emissions

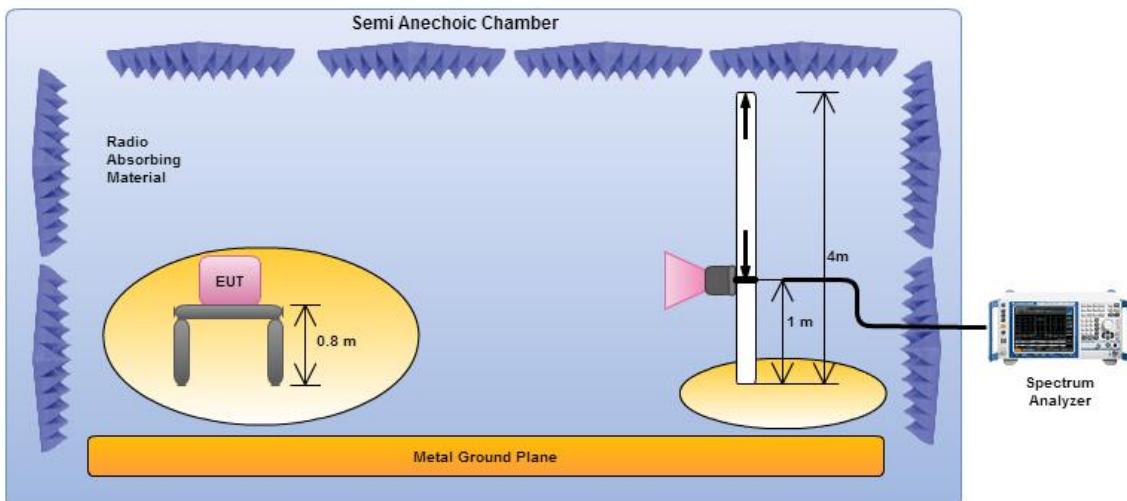

Electric field tests shall be performed in transmitter bandedge emissions using a calibrated horn antenna.



### 3.6.5 Transmitter Radiated Bandedge Emissions (with Antenna)

U-NII 5150-5250MHz Transmitter Radiated Bandedge (with Antenna)										
Modulation Mode	N <sub>TX</sub>	Freq. (MHz)	Measure Distance (m)	Freq. (MHz) PK	Level (dBuV/m) PK	Limit (dBuV/m) PK	Freq. (MHz) AV	Level (dBuV/m) AV	Limit (dBuV/m) AV	Pol.
11a	1	5180	1	5147.50	70.36	83.54	5149.90	56.82	63.54	V
11a	1	5240	1	5116.20	68.85	83.54	5122.20	55.96	63.54	V
HT20,M0-7	1	5180	1	5131.40	69.28	83.54	5148.20	56.07	63.54	V
HT20,M0-7	1	5240	1	5134.50	68.82	83.54	5148.60	55.70	63.54	V

Note 1: Measurement worst emissions of receive antenna polarization.



### 3.7 Transmitter Radiated Unwanted Emissions

#### 3.7.1 Transmitter Radiated Unwanted Emissions Limit

Unwanted emissions below 1 GHz and restricted band emissions above 1GHz limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Un-restricted band emissions above 1GHz Limit	
Operating Band	Limit
5.15 - 5.25 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.25 - 5.35 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.47 - 5.725 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.725 - 5.825 GHz	5.715 5.725 GHz: e.i.r.p. -17 dBm [78.2 dBuV/m@3m] 5.825 5.835 GHz: e.i.r.p. -17 dBm [78.2 dBuV/m@3m] Other un-restricted band: e.i.r.p. -27 dBm [68.2 dBuV/m@3m]

Note 1: Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

#### 3.7.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.




### 3.7.3 Test Procedures

Test Method
<input checked="" type="checkbox"/> Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 m for frequencies above 30 MHz, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).
<input checked="" type="checkbox"/> Measurements in the frequency range 5 GHz - 10GHz are typically made at a closer distance 1m, because the instrumentation noise floor is typically close to the radiated emission limit.
<input checked="" type="checkbox"/> Measurements in the frequency range 10 GHz - 18GHz are typically made at a closer distance 1m, because the instrumentation noise floor is typically close to the radiated emission limit.
<input checked="" type="checkbox"/> Measurements in the frequency range above 18 GHz - 40GHz are typically made at a closer distance 0.5m, because the instrumentation noise floor is typically close to the radiated emission limit.
<input checked="" type="checkbox"/> The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].
<input checked="" type="checkbox"/> For the transmitter unwanted emissions shall be measured using following options below:
<input checked="" type="checkbox"/> Refer as FCC KDB 789033, clause H)2) for unwanted emissions into non-restricted bands.
<input checked="" type="checkbox"/> Refer as FCC KDB 789033, clause H)1) for unwanted emissions into restricted bands.
<input checked="" type="checkbox"/> Refer as FCC KDB 789033, H)6) Method AD (Trace Averaging).
<input type="checkbox"/> Refer as FCC KDB 789033, H)6) Method VB (Reduced VBW).
<input type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). VBW $\geq$ 1/T, where T is pulse time.
<input type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.
<input checked="" type="checkbox"/> Refer as FCC KDB 789033, clause H)5) measurement procedure peak limit.
<input type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.2 measurement procedure peak limit.
<input checked="" type="checkbox"/> For radiated measurement.
<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 6.4 for radiated emissions from below 30 MHz.
<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 6.5 for radiated emissions from 30 MHz to 1000 MHz.
<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 6.6 for radiated emissions from above 1 GHz.

### 3.7.4 Test Setup

#### Transmitter Radiated Unwanted Emissions

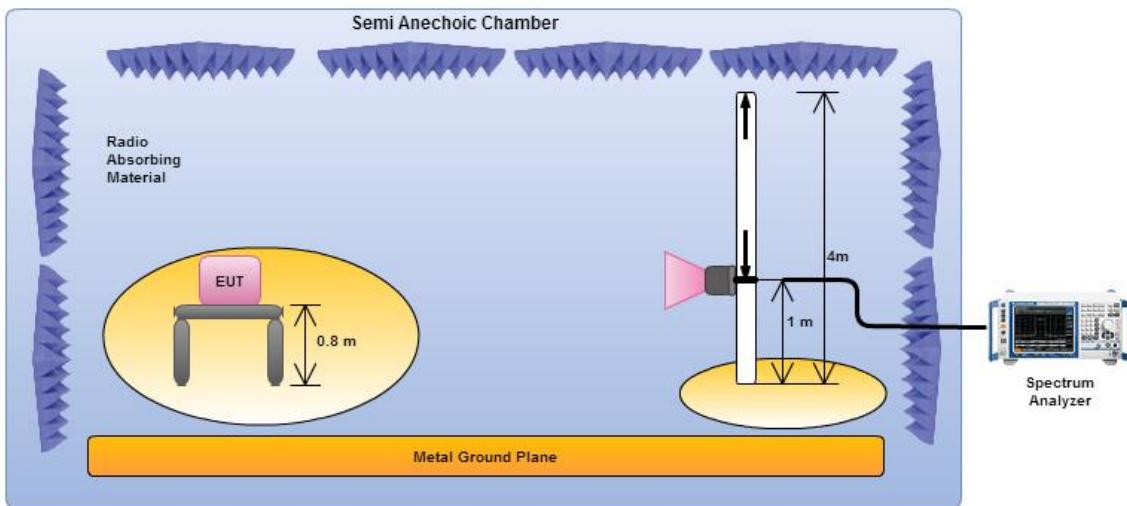

Magnetic field tests shall be performed in the frequency range of 9 kHz to 30 MHz using a calibrated loop antenna. Electric field tests shall be performed in the frequency range of 30 MHz to 1000 MHz using a calibrated bi-log antenna and the frequency range of 1 GHz to 40 GHz using a calibrated horn antenna.

### 3.7.5 Transmitter Radiated Unwanted Emissions (Below 30MHz)

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.



## 3.7.6 Transmitter Radiated Unwanted Emissions (Below 1GHz)





## Transmitter Radiated Unwanted Emissions (Below 1GHz)

Operating Mode	2	Polarization	H																																																																								
Operating Function	EUT with Notebook via USB Cable test																																																																										
Level (dBuV/m)																																																																											
Date: 2013-08-10																																																																											
			FCC CLASS-B -3dB																																																																								
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th rowspan="2">Freq MHz</th> <th colspan="2">Over Limit</th> <th rowspan="2">Read Line</th> <th rowspan="2">Antenna Level Factor</th> <th rowspan="2">Cable Loss</th> <th rowspan="2">Preamp Factor</th> <th rowspan="2">Remark</th> <th rowspan="2">Ant Pos</th> <th rowspan="2">Table Pos</th> </tr> <tr> <th>Level dBuV/m</th> <th>Limit dB</th> </tr> </thead> <tbody> <tr> <td>63.950</td> <td>25.55</td> <td>-14.45</td> <td>40.00</td> <td>45.78</td> <td>6.16</td> <td>1.13</td> <td>27.52 Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>141.550</td> <td>30.15</td> <td>-13.35</td> <td>43.50</td> <td>44.63</td> <td>10.98</td> <td>1.76</td> <td>27.22 Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>164.830</td> <td>30.73</td> <td>-12.77</td> <td>43.50</td> <td>46.21</td> <td>9.79</td> <td>1.86</td> <td>27.13 Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>233.700</td> <td>38.21</td> <td>-7.79</td> <td>46.00</td> <td>52.18</td> <td>10.67</td> <td>2.24</td> <td>26.88 Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>319.060</td> <td>40.69</td> <td>-5.31</td> <td>46.00</td> <td>51.19</td> <td>13.62</td> <td>2.66</td> <td>26.78 Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>443.220</td> <td>40.89</td> <td>-5.11</td> <td>46.00</td> <td>48.86</td> <td>16.45</td> <td>3.15</td> <td>27.57 Peak</td> <td>---</td> <td>---</td> </tr> </tbody> </table>				Freq MHz	Over Limit		Read Line	Antenna Level Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Level dBuV/m	Limit dB	63.950	25.55	-14.45	40.00	45.78	6.16	1.13	27.52 Peak	---	---	141.550	30.15	-13.35	43.50	44.63	10.98	1.76	27.22 Peak	---	---	164.830	30.73	-12.77	43.50	46.21	9.79	1.86	27.13 Peak	---	---	233.700	38.21	-7.79	46.00	52.18	10.67	2.24	26.88 Peak	---	---	319.060	40.69	-5.31	46.00	51.19	13.62	2.66	26.78 Peak	---	---	443.220	40.89	-5.11	46.00	48.86	16.45	3.15	27.57 Peak	---	---
Freq MHz	Over Limit		Read Line		Antenna Level Factor	Cable Loss								Preamp Factor	Remark	Ant Pos	Table Pos																																																										
	Level dBuV/m	Limit dB																																																																									
63.950	25.55	-14.45	40.00	45.78	6.16	1.13	27.52 Peak	---	---																																																																		
141.550	30.15	-13.35	43.50	44.63	10.98	1.76	27.22 Peak	---	---																																																																		
164.830	30.73	-12.77	43.50	46.21	9.79	1.86	27.13 Peak	---	---																																																																		
233.700	38.21	-7.79	46.00	52.18	10.67	2.24	26.88 Peak	---	---																																																																		
319.060	40.69	-5.31	46.00	51.19	13.62	2.66	26.78 Peak	---	---																																																																		
443.220	40.89	-5.11	46.00	48.86	16.45	3.15	27.57 Peak	---	---																																																																		

Note 1: "&gt;20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)



## 3.7.7 Transmitter Radiated Unwanted Emissions (Above 1GHz)

## Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5180
N <sub>TX</sub>	1	Polarization	V

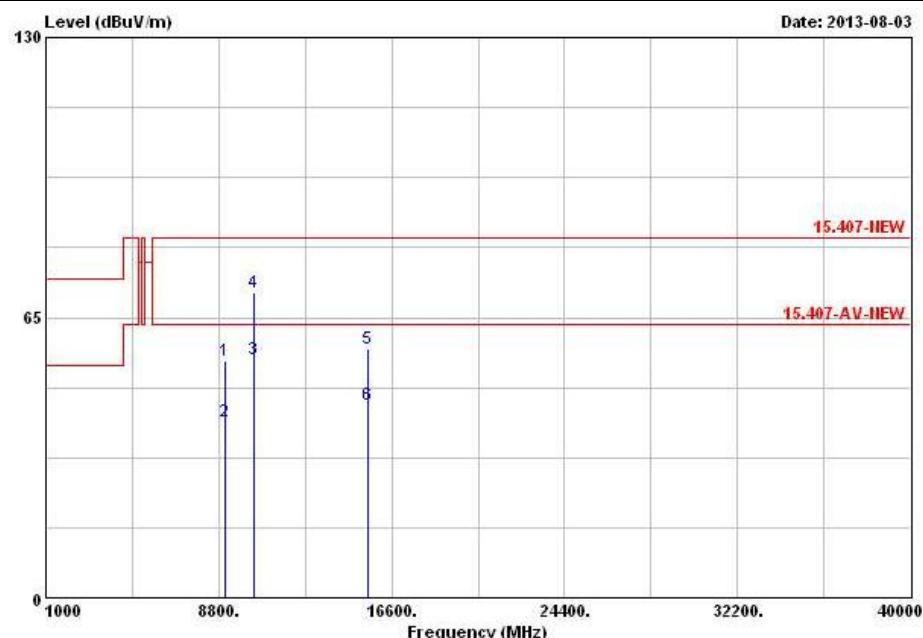

Freq	Level	Over Limit	Line	Read		Ant	Table		
				Antenna	Factor			Pos	Pos
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 9060.000	54.95	-28.59	83.54	44.69	38.18	5.28	33.20	Peak	---
2 9060.000	40.93	-22.61	63.54	30.67	38.18	5.28	33.20	Average	---
3 10360.000	55.22	-8.32	63.54	43.35	39.60	5.27	33.00	Average	---
4 10360.000	70.89	-12.65	83.54	59.02	39.60	5.27	33.00	Peak	---
5 15540.000	57.76	-25.78	83.54	44.75	38.04	7.43	32.46	Peak	---
6 15540.000	44.68	-18.86	63.54	31.67	38.04	7.43	32.46	Average	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



## Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5180
N <sub>TX</sub>	1	Polarization	H

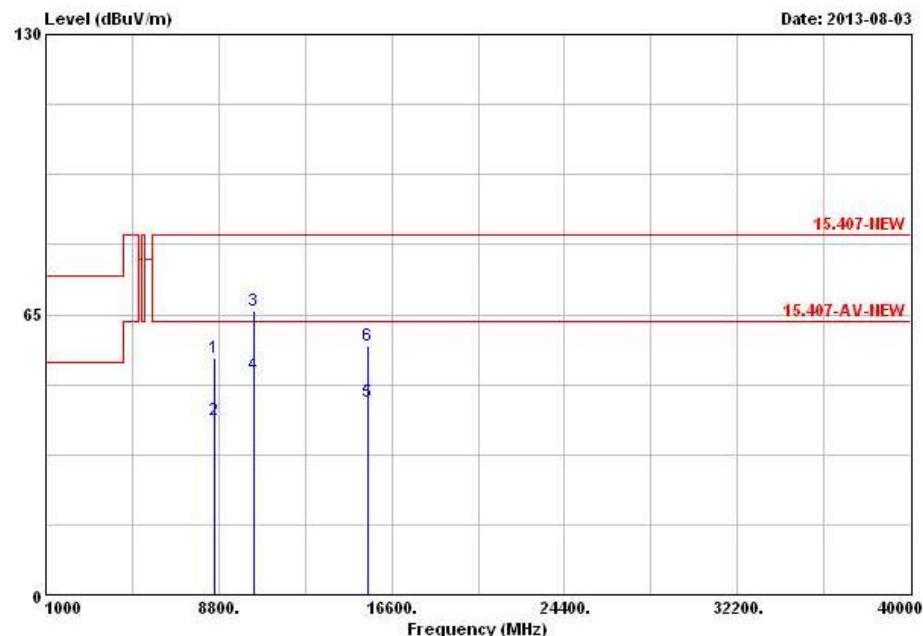

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table
		Limit	Line	Level	Factor	Cable	Preamp		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 8620.000	54.91	-28.63	83.54	45.11	38.56	4.30	33.06 Peak	---	---
2 8620.000	40.64	-22.90	63.54	30.84	38.56	4.30	33.06 Average	---	---
3 10360.000	65.79	-17.75	83.54	53.92	39.60	5.27	33.00 Peak	---	---
4 10360.000	50.91	-12.63	63.54	39.04	39.60	5.27	33.00 Average	---	---
5 15540.000	44.60	-18.94	63.54	31.59	38.04	7.43	32.46 Average	---	---
6 15540.000	57.73	-25.81	83.54	44.72	38.04	7.43	32.46 Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



## Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5200
N <sub>TX</sub>	1	Polarization	V

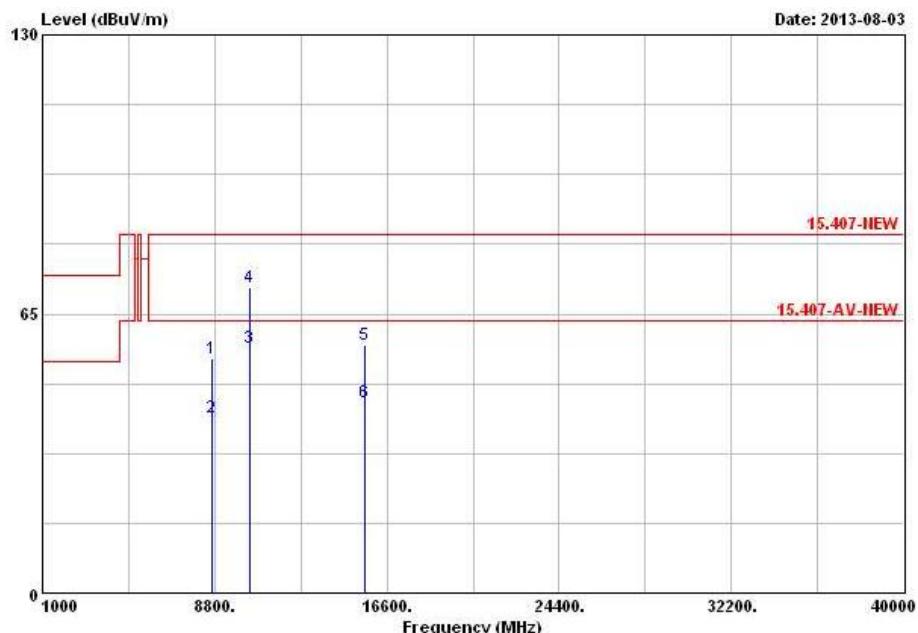

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table		
		MHz	dBuV/m	dB	Line	Level	Factor			Pos	Pos
										cm	deg
1	8710.000	54.75	-28.79	83.54	44.82	38.44	4.58	33.09	Peak	---	---
2	8710.000	40.70	-22.84	63.54	30.77	38.44	4.58	33.09	Average	---	---
3	10400.000	57.09	-6.45	63.54	45.18	39.60	5.26	32.95	Average	---	---
4	10400.000	71.08	-12.46	83.54	59.17	39.60	5.26	32.95	Peak	---	---
5	15600.000	57.64	-25.90	83.54	44.75	37.91	7.47	32.49	Peak	---	---
6	15600.000	44.40	-19.14	63.54	31.51	37.91	7.47	32.49	Average	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



## Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5200
N <sub>TX</sub>	1	Polarization	H

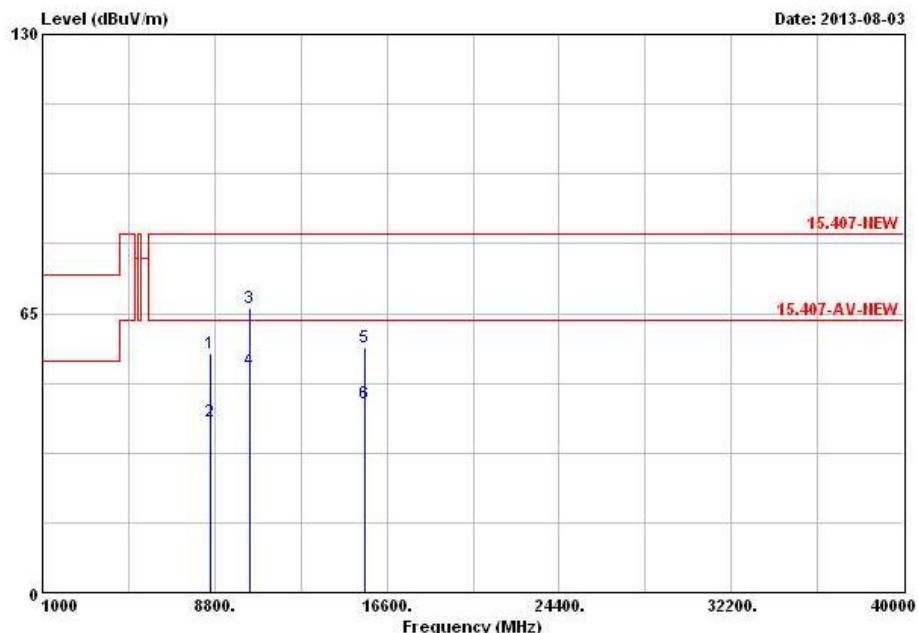

Freq	Level	Over Limit	Limit Line	Read	Antenna	Cable Loss	Preamp Factor	Remark	Ant	Table
									Pos	Pos
MHz	dBuV/m				dBuV	dB/m	dB	dB	cm	deg
1 8590.000	55.60	-27.94	83.54	45.75	38.60	4.30	33.05	Peak	---	---
2 8590.000	39.90	-23.64	63.54	30.05	38.60	4.30	33.05	Average	---	---
3 10400.000	66.35	-17.19	83.54	54.44	39.60	5.26	32.95	Peak	---	---
4 10400.000	51.95	-11.59	63.54	40.04	39.60	5.26	32.95	Average	---	---
5 15600.000	57.01	-26.53	83.54	44.12	37.91	7.47	32.49	Peak	---	---
6 15600.000	44.08	-19.46	63.54	31.19	37.91	7.47	32.49	Average	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



## Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5240
N <sub>TX</sub>	1	Polarization	V

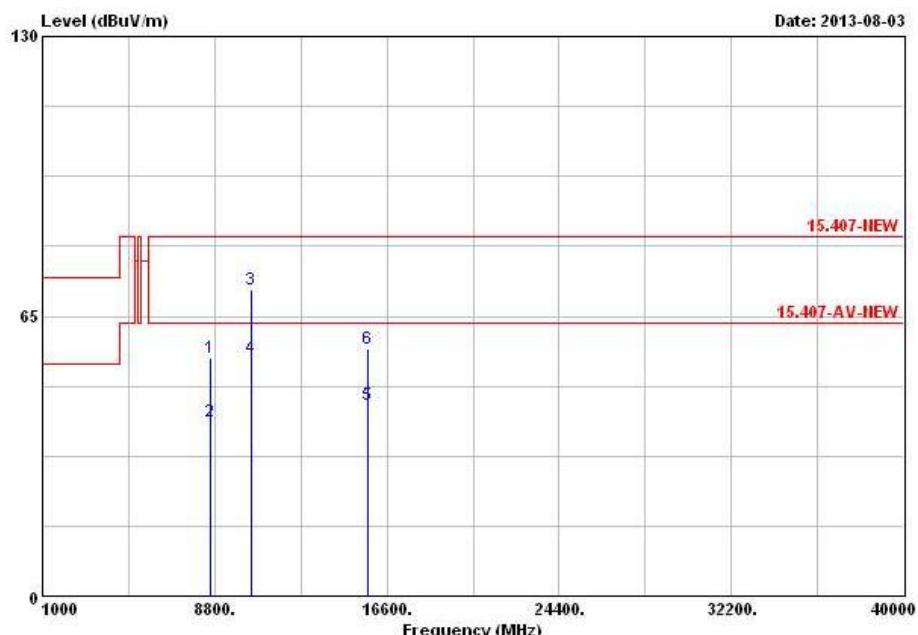

Freq	Level	Over Limit	Line	Read	Antenna	Cable	Preamp	Ant Table		
								Pos	Pos	
MHz	dBuV/m		dB	dBuV/m	dBuV	dB/m	dB	dB	cm deg	
1 8620.000	55.20	-28.34	83.54	45.40	38.56	4.30	33.06	Peak	---	---
2 8620.000	40.58	-22.96	63.54	30.78	38.56	4.30	33.06	Average	---	---
3 10480.000	71.16	-12.38	83.54	59.22	39.60	5.23	32.89	Peak	---	---
4 10480.000	55.38	-8.16	63.54	43.44	39.60	5.23	32.89	Average	---	---
5 15720.000	44.56	-18.98	63.54	31.80	37.70	7.58	32.52	Average	---	---
6 15720.000	57.40	-26.14	83.54	44.64	37.70	7.58	32.52	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



## Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5240
N <sub>TX</sub>	1	Polarization	H

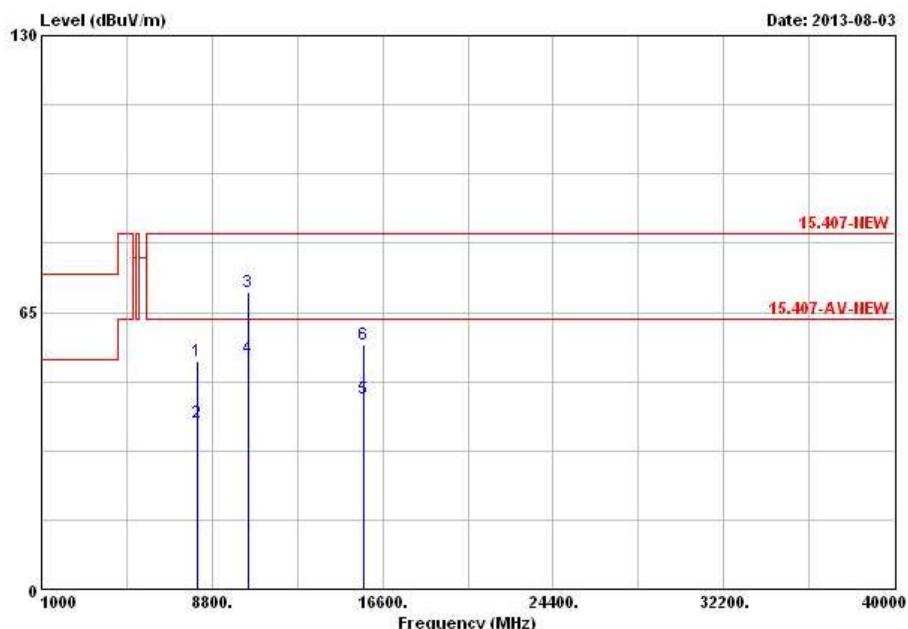


Freq	Level	Over Limit	Line	Read	Antenna	Cable	Preamp	Remark	Ant	Table
									Pos	Pos
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 8110.000	53.67	-29.87	83.54	44.90	37.99	3.79	33.01	Peak	---	---
2 8110.000	39.09	-24.45	63.54	30.32	37.99	3.79	33.01	Average	---	---
3 10480.000	69.69	-13.85	83.54	57.75	39.60	5.23	32.89	Peak	---	---
4 10480.000	54.28	-9.26	63.54	42.34	39.60	5.23	32.89	Average	---	---
5 15720.000	44.62	-18.92	63.54	31.86	37.70	7.58	32.52	Average	---	---
6 15720.000	57.30	-26.24	83.54	44.54	37.70	7.58	32.52	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

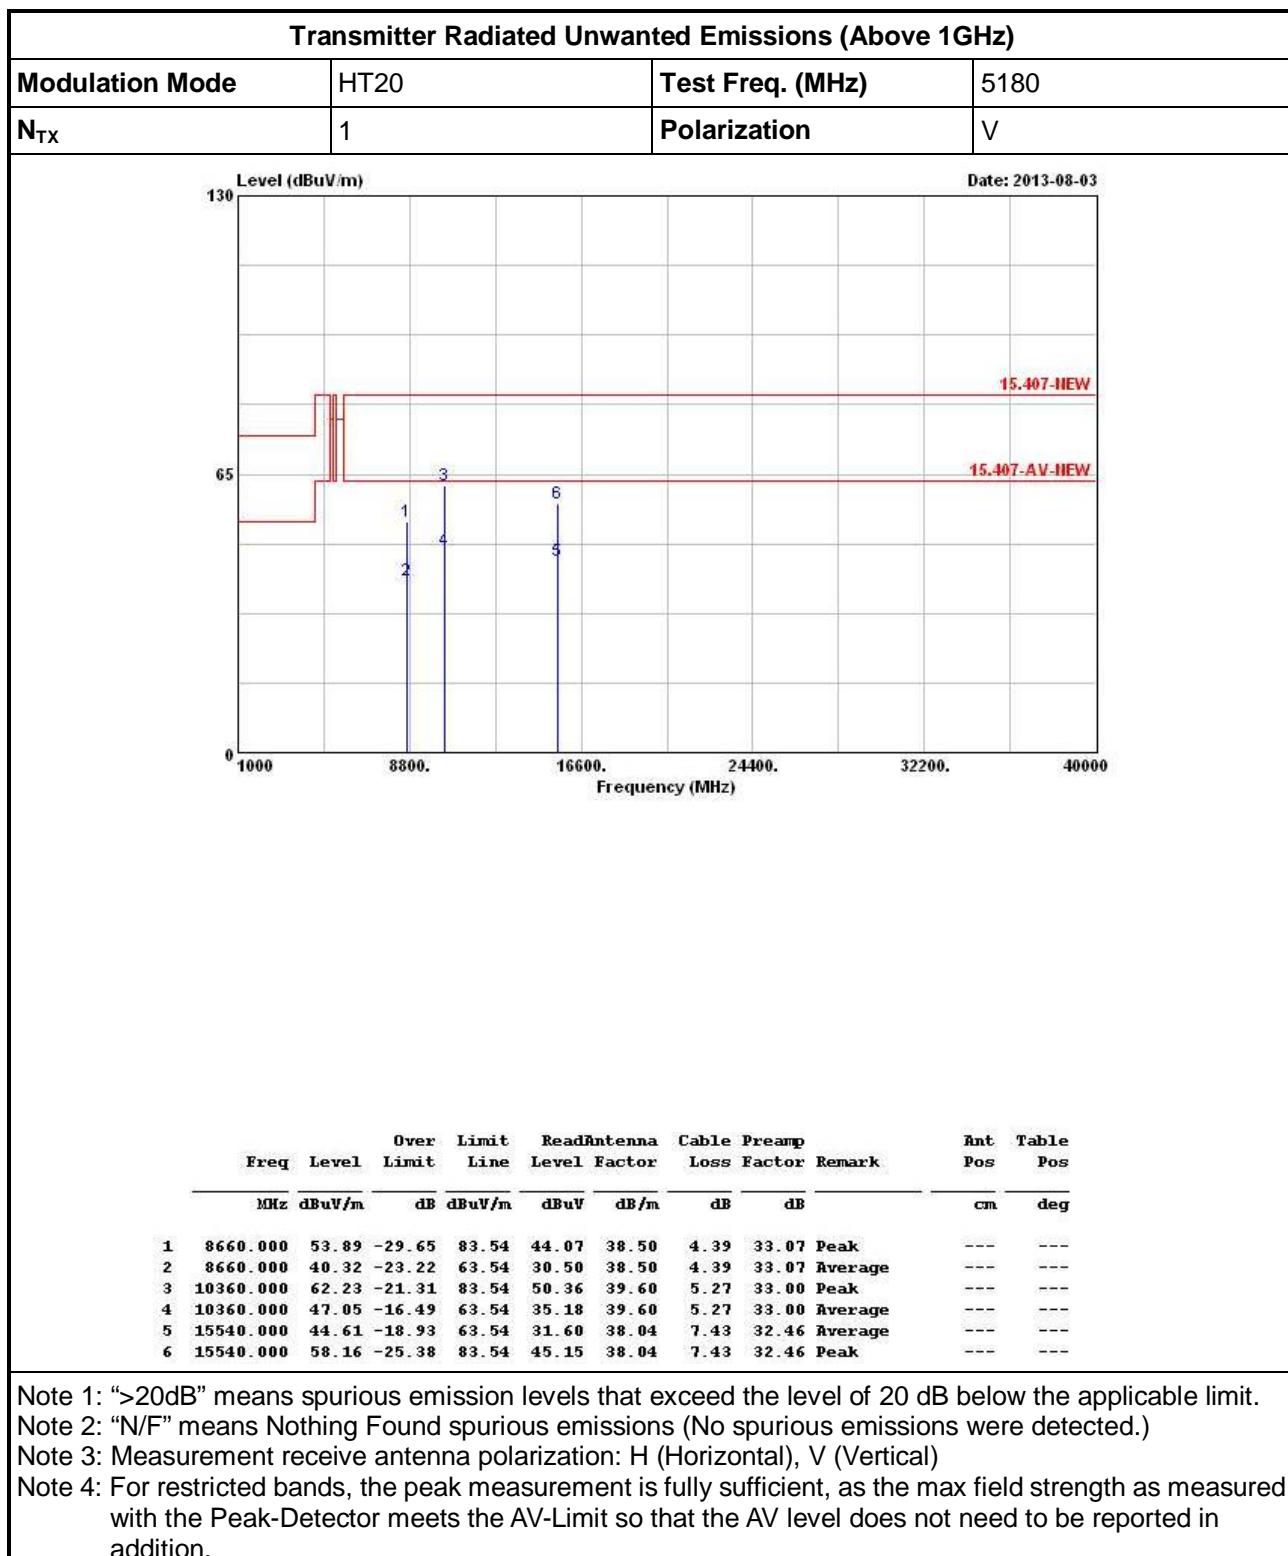



## Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5180
N <sub>TX</sub>	1	Polarization	H

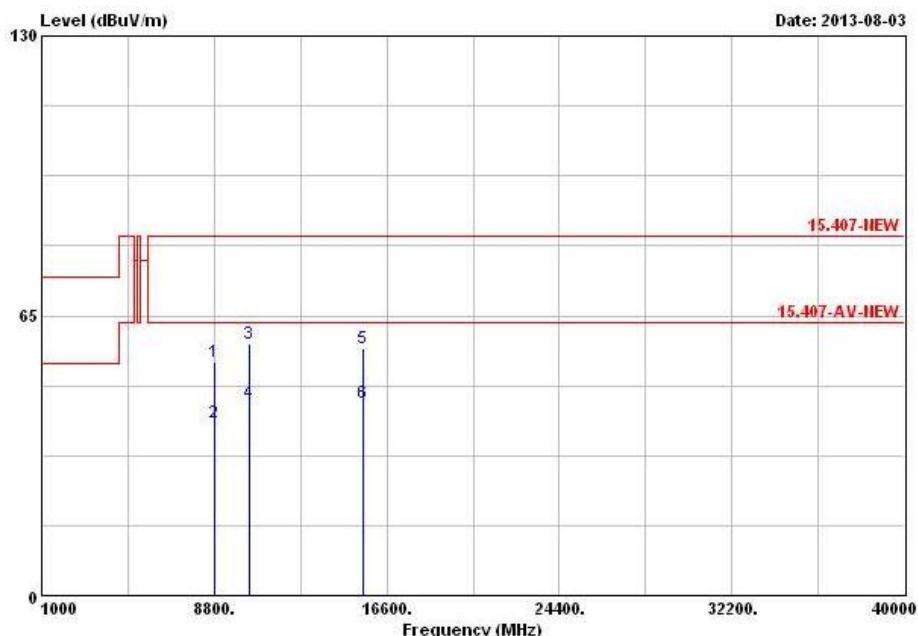

Freq	Level	Over Limit	Line	Read		Ant	Table		
				Antenna	Cable			Pos	Pos
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 8780.000	54.36	-29.18	83.54	44.44	38.36	4.67	33.11	Peak	---
2 8780.000	40.06	-23.48	63.54	30.14	38.36	4.67	33.11	Average	---
3 10360.000	58.41	-25.13	83.54	46.54	39.60	5.27	33.00	Peak	---
4 10360.000	44.64	-18.90	63.54	32.77	39.60	5.27	33.00	Average	---
5 15540.000	57.50	-26.04	83.54	44.49	38.04	7.43	32.46	Peak	---
6 15540.000	44.60	-18.94	63.54	31.59	38.04	7.43	32.46	Average	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



## Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5200
N <sub>TX</sub>	1	Polarization	V

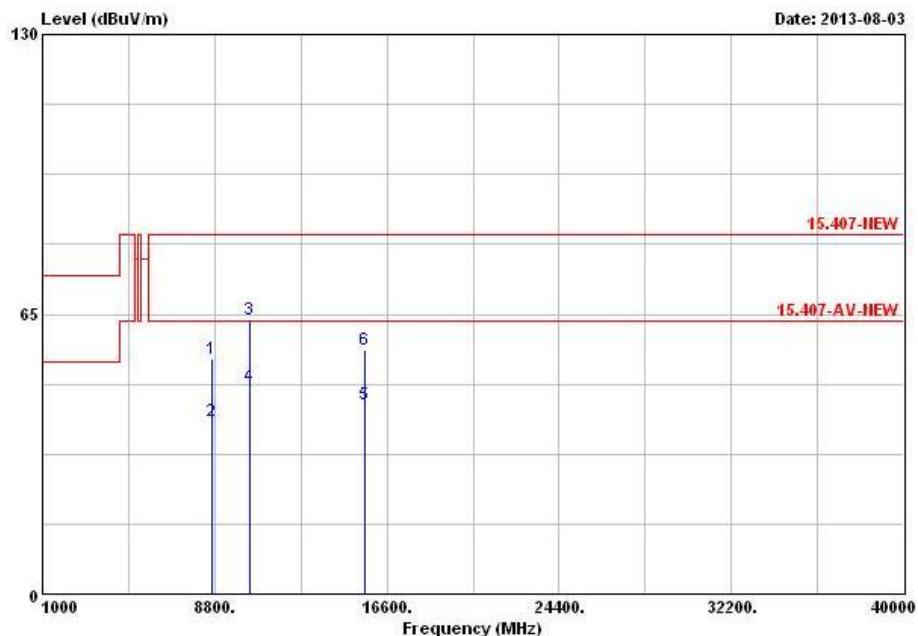

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table		
		MHz	dBuV/m	dB	Line	Level	Factor			Pos	Pos
1	8660.000	54.66	-28.88	83.54	44.84	38.50	4.39	33.07	Peak	---	---
2	8660.000	40.25	-23.29	63.54	30.43	38.50	4.39	33.07	Average	---	---
3	10400.000	63.69	-19.85	83.54	51.78	39.60	5.26	32.95	Peak	---	---
4	10400.000	48.35	-15.19	63.54	36.44	39.60	5.26	32.95	Average	---	---
5	15600.000	44.16	-19.38	63.54	31.27	37.91	7.47	32.49	Average	---	---
6	15600.000	56.68	-26.86	83.54	43.79	37.91	7.47	32.49	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



## Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5200
N <sub>TX</sub>	1	Polarization	H

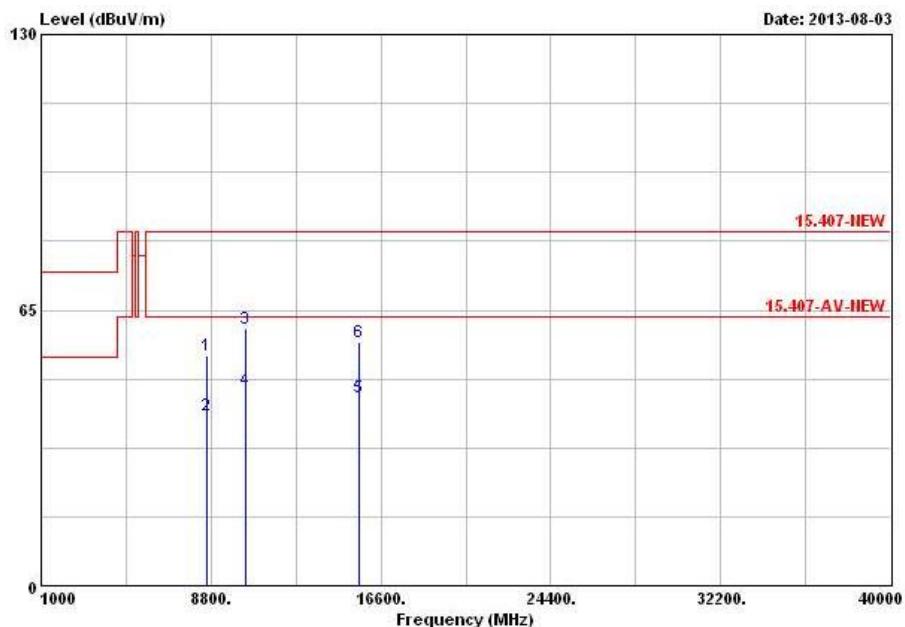


Freq	Level	Over Limit	Line	Read Antenna		Cable Preamp		Ant Pos	Table Pos
				Level	Factor	Loss	Factor		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 8620.000	54.11	-29.43	83.54	44.31	38.56	4.30	33.06	Peak	---
2 8620.000	40.29	-23.25	63.54	30.49	38.56	4.30	33.06	Average	---
3 10400.000	60.73	-22.81	83.54	48.82	39.60	5.26	32.95	Peak	---
4 10400.000	46.01	-17.53	63.54	34.10	39.60	5.26	32.95	Average	---
5 15600.000	44.27	-19.27	63.54	31.38	37.91	7.47	32.49	Average	---
6 15600.000	57.54	-26.00	83.54	44.65	37.91	7.47	32.49	Peak	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

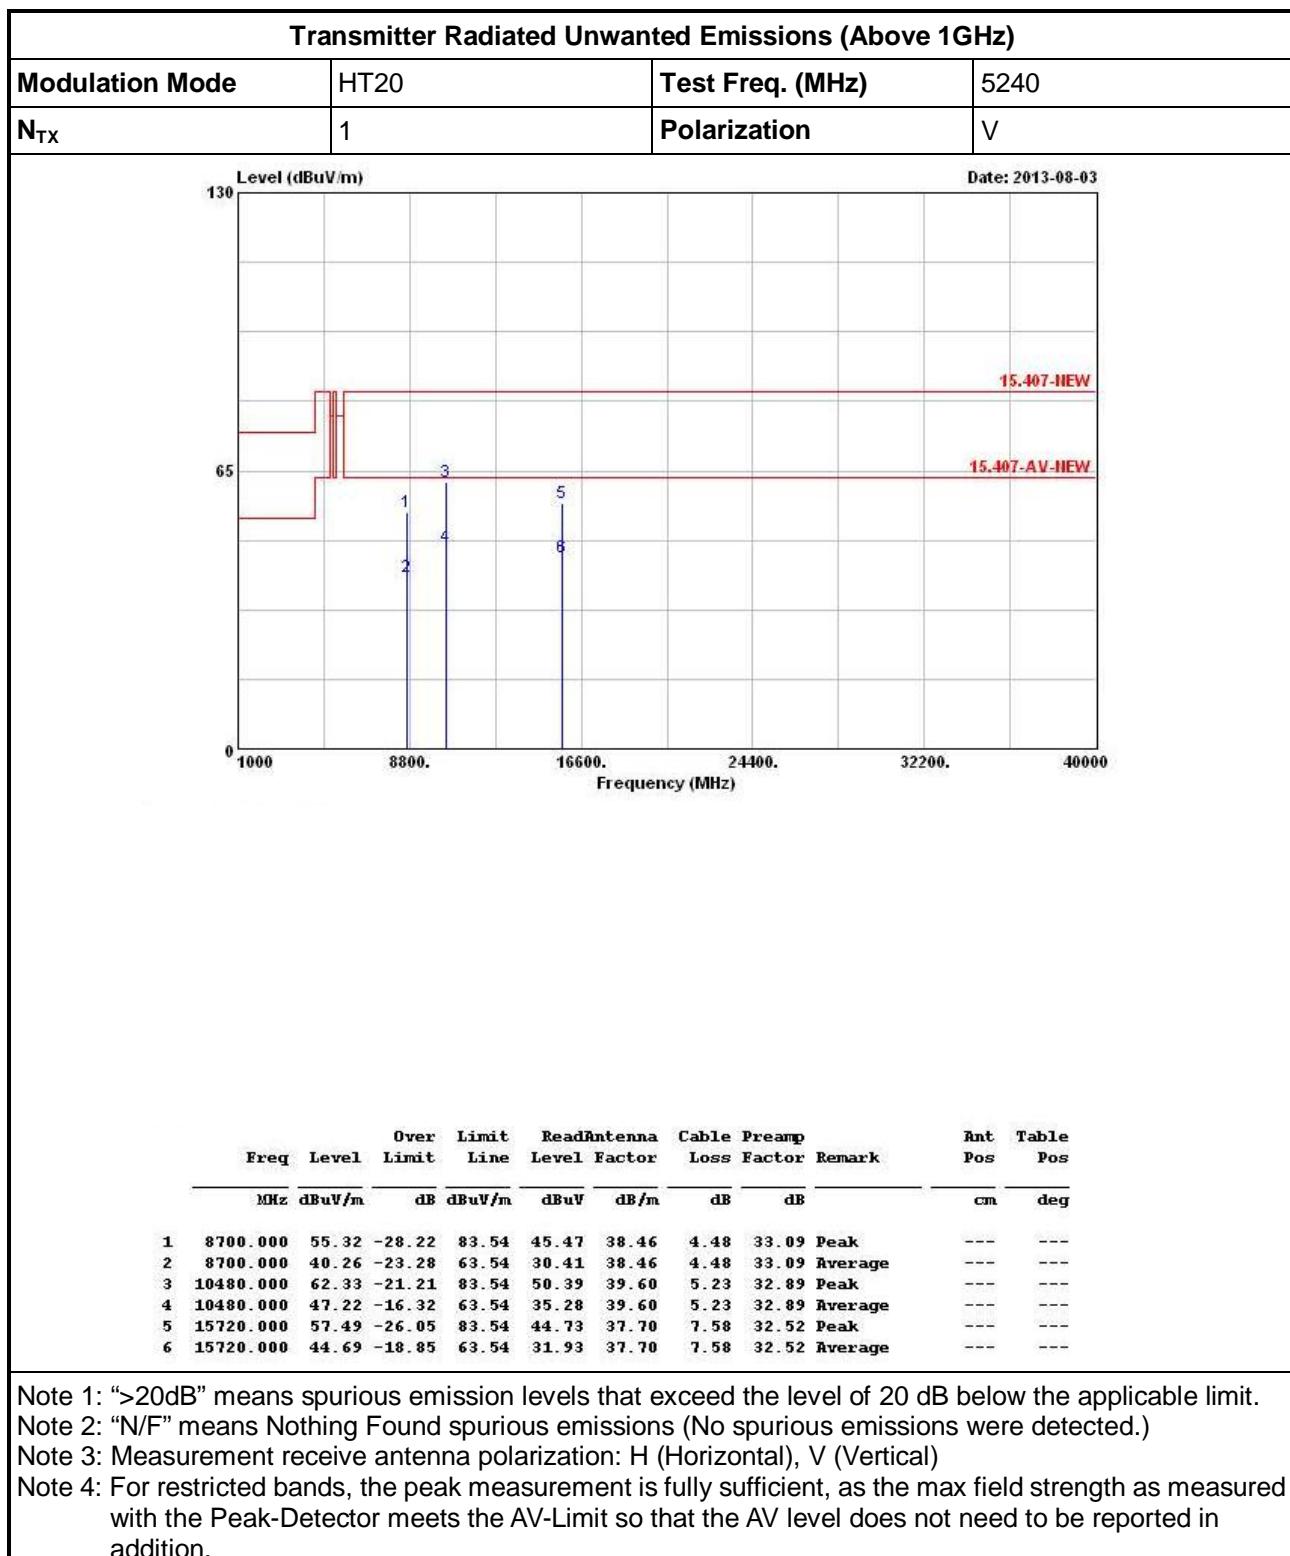



## Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	5240
N <sub>TX</sub>	1	Polarization	H

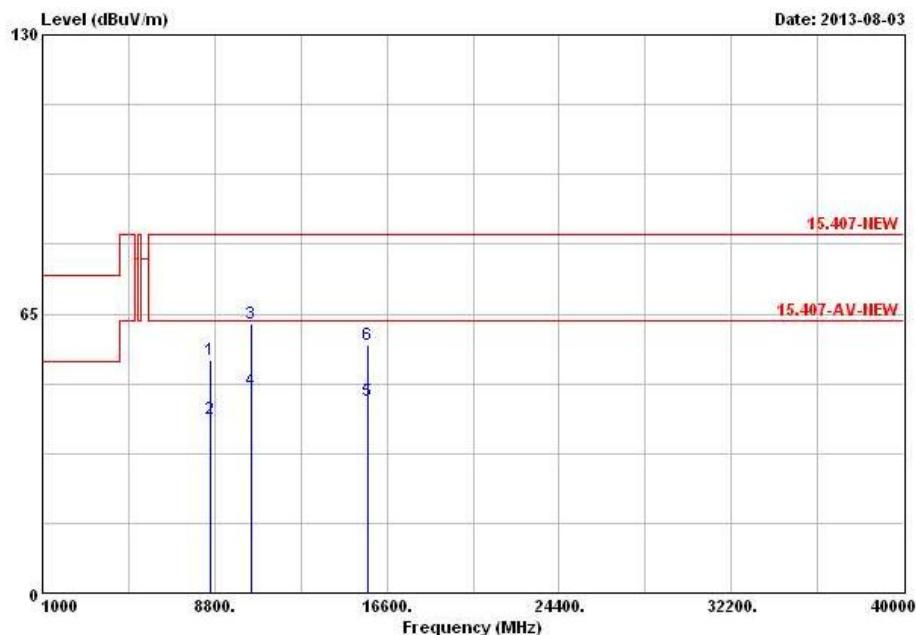

FCC ID: 2ABD9 / IC: 2ABD9 / Ringer ID: 2ABD9

DRAFT

Freq	Level	Over Limit	Limit Line	Read	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant	Table
									Pos	Pos
MHz	dBuV/m		dB	dBuV/m	dBuV	dB/n	dB	dB	cm	deg
1 8638.000	54.22	-29.32	83.54	44.36	38.54	4.39	33.07	Peak	---	---
2 8638.000	40.39	-23.15	63.54	30.53	38.54	4.39	33.07	Average	---	---
3 10480.000	62.72	-20.82	83.54	50.78	39.60	5.23	32.89	Peak	---	---
4 10480.000	47.36	-16.18	63.54	35.42	39.60	5.23	32.89	Average	---	---
5 15720.000	44.75	-18.79	63.54	31.99	37.70	7.58	32.52	Average	---	---
6 15720.000	57.78	-25.76	83.54	45.02	37.70	7.58	32.52	Peak	---	---

Note 1: "&gt;20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

## 3.8 Frequency Stability

### 3.8.1 Frequency Stability Limit

Frequency Stability Limit	
<b>UNII Devices</b>	
<input checked="" type="checkbox"/> In-band emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.	
<b>LE-LAN Devices</b>	
<input checked="" type="checkbox"/> N/A	
<b>IEEE Std. 802.11n-2009</b>	
<input checked="" type="checkbox"/> The transmitter center frequency tolerance shall be $\pm 20$ ppm maximum for the 5 GHz band and $\pm 25$ ppm maximum for the 2.4 GHz band.	


### 3.8.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

### 3.8.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.8 for frequency stability tests
<input checked="" type="checkbox"/>	Frequency stability with respect to ambient temperature
<input checked="" type="checkbox"/>	Frequency stability when varying supply voltage
<input checked="" type="checkbox"/>	For conducted measurement.
<input checked="" type="checkbox"/>	For conducted measurements on devices with multiple transmit chains: Measurements need only to be performed on one of the active transmit chains (antenna outputs)
<input type="checkbox"/>	For radiated measurement. The equipment to be measured and the test antenna shall be oriented to obtain the maximum emitted power level.

### 3.8.4 Test Setup

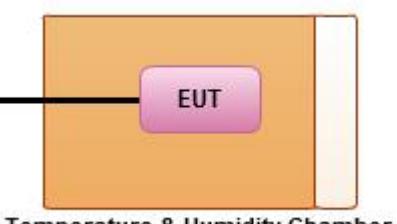Frequency Stability	
 Spectrum Analyzer	 EUT Temperature & Humidity Chamber



### 3.8.5 Test Result of Frequency Stability

Frequency Stability Result			
Mode		Frequency Stability (ppm)	
Condition	Freq. (MHz)	Test Frequency (MHz)	Frequency Stability (ppm)
T <sub>20°C</sub> Vmax	5180	5179.96223	-7.2915
T <sub>20°C</sub> Vmin	5180	5179.96223	-7.2915
T <sub>50°C</sub> Vnom	5180	5179.97091	-5.6158
T <sub>40°C</sub> Vnom	5180	5179.95745	-8.2143
T <sub>30°C</sub> Vnom	5180	5179.95485	-8.7162
T <sub>20°C</sub> Vnom	5180	5179.96223	-7.2915
T <sub>10°C</sub> Vnom	5180	5179.97438	-4.9459
T <sub>0°C</sub> Vnom	5180	5179.98828	-2.2625
T <sub>-10°C</sub> Vnom	5180	5180.00130	0.2510
T <sub>-20°C</sub> Vnom	5180	5180.00999	1.9286
Limit (ppm)		20	
Result		Complied	

Note 1: Measure at 85 % [Vmin] and 115 % [Vmax] of the nominal voltage [Vnom].  
Note 2: The nominal voltage refer test report clause 1.1.5 for EUT operational condition.



## 4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz ~ 2.75GHz	Mar. 26, 2013	Conduction (CO04-HY)
LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	8127-477	9kHz ~ 30MHz	Jan. 21, 2013	Conduction (CO04-HY)
LISN (Support Unit)	EMCO	3810/2NM	9703-1839	9kHz ~ 30MHz	Apr. 18, 2013	Conduction (CO04-HY)
RF Cable-CON	HUBER+SUHNER	RG213/U	7.61183201e+012	9kHz ~ 30MHz	Nov. 09, 2012	Conduction (CO04-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSP 40	100305	9KHz~40GHz	Mar. 20, 2013	Conducted (TH01-HY)
Temp. and Humidity Chamber	Giant Force	GTH-225-20-SP-SD	MAA1112-007	-20 ~ 100°C	Nov. 21, 2012	Conducted (TH01-HY)
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Jun. 27, 2013	Conducted (TH01-HY)
RF Cable-2m	HUBER+SUHNER	SUCOFLEX_104	SN 345675/4	1GHz ~ 26.5GHz	Dec.04, 2012	Conducted (TH01-HY)
RF Cable-3m	HUBER+SUHNER	SUCOFLEX_104	SN 345669/4	1GHz ~ 26.5GHz	Dec.04, 2012	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year.



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30MHz ~ 1GHz 3m	Dec. 01, 2012	Radiation (03CH03-HY)
Amplifier	HP	8447D	2944A08033	100kHz ~ 1.3GHz	May 03, 2013	Radiation (03CH03-HY)
Amplifier	Agilent	8449B	3008A02364	1GHz ~ 26.5GHz	May 06, 2013	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSP40	100593	9kHz ~ 40GHz	Sep. 14, 2012	Radiation (03CH03-HY)
Receiver	R&S	ESU26	1302.6005.26	20Hz ~ 26.5GHz	Apr. 02, 2013	Radiation (03CH03-HY)
Bilog Antenna	SCHAFFNER	CBL 6112D	22237	30MHz ~ 1GHz	Sep. 22, 2012	Radiation (03CH03-HY)
Horn Antenna	EMCO	3115	6741	1GHz ~ 18GHz	May 31, 2013	Radiation (03CH03-HY)
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15GHz ~ 40GHz	Jan. 08, 2013	Radiation (03CH03-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	9kHz ~ 1GHz	Jan. 17, 2013	Radiation (03CH03-HY)
RF Cable-high	SUHNER	SUCOFLEX 106	03CH03-HY	1GHz ~ 40GHz	Jan. 17, 2013	Radiation (03CH03-HY)
Turn Table	EM Electronics	EM Electronics	060615	0 ~ 360 degree	N/A	Radiation (03CH03-HY)
Antenna Mast	MF	MF-7802	MF780208179	1 ~ 4 m	N/A	Radiation (03CH03-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Magnetic Loop Antenna	Teseq GmbH	HLA 6120	31244	0.01MHz ~ 30MHz	Dec. 02, 2012	Radiation (03CH03-HY)
Amplifier	MITEQ	AMF-6F-260400	9121372	26.5GHz ~ 40GHz	Apr. 19, 2013	Radiation (03CH03-HY)

Note: Calibration Interval of instruments listed above is two year.