



SUNFLEX TECH CO., Ltd.

承認書

APPROVAL SHEET

CUSTOMER 客 戶 名 稱	:	BIONIME CORPORATION 華廣生技股份有限公司
PRODUCT DESCRIPTION 產 品 種 類	:	FLEXIBLE PRINTED CIRCUIT 軟式印刷電路板
CUSTOMER PART NO/DWG. NO 客 戶 編 號 / 圖 號	:	HT500 V2.5
SUNFLEX PART NO 旭 軟 編 號	:	LW28M11235D
DATE 日 期	:	2024/12/23
APPROVAL SHEET NO 承 認 書 編 號	:	

No. 522, Nanshang Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)

TEL : 886-3-222-0998 FAX : 886-3-222-0995



SUNFLEX TECH CO., Ltd.



CUSTOMER	BIONIME CORPORATION		SUNFLEX P/N	LW28M11235D
CUSTOMER P/N	HT500 V2.5			
Product Structure	Flexible Printed Circuit : ☐ Single Side ☐ Double Side ☒ Multilayer Board			
	GP Matching Options : ☐ RoHS ☒ RoHS2.0+Halogen Free ☐ Other_____			
Main Material (FPC)	Copper Laminated 1+2	Mfger./Type	THINFLEX	W-0505RD-CL
		Base Film	PI(Polyimide) Thk.1/2mil	
		Adhesive	-	
		Copper foil	ED Cu Thk. 1/2oz	
	Coverlay 1	Mfger./Type	APLUS	BHP025GM1 \ (Black)
		Cover Film	PI(Polyimide) Thk.1/2mil	
		Adhesive	Epoxy resin Thk.1mil	
	Coverlay 2	Mfger./Type	TAIFLEX	FHT0525(Yellow)
		Cover Film	PI(Polyimide) Thk.1/2mil	
		Adhesive	Epoxy resin Thk.1mil	
	Adhesive	-	ADVANCE	BA-25FP Thk.25μm
	Stiffener	PI	APLUS	AHIQX235XSG1N Thk.2mil(Brown)
	Stainless Sheet	Steel Sheet	CHIA FAR	SUS304 Thk.0.2mm
		Adhesive	TATSUTA	CBF-800-D60 Thk.55~65μm
	Solder Mask	-	ONSTATIC	R-500 FPMK (Black)
	Character Ink	-	AGFA	FWh01(White)
Surface Treatment	Ni Plating	Vale	Nickel Plate Rounds(鎳塊)	
	Au Plating	HONHAI	Potassium Gold Cyanide(金鹽)	
	Thickness	(化鎳)Ni : 80~200μ” ; (化金)Au : ≥2μ”		

CUSTOMER	華廣生技股份有限公司	SUNFLEX P/N	LW28M11235D
CUSTOMER P/N	HT500 V2.5		
Appearance Inspection &Characteristic Test	Test Items	Test Result	Requirement & Reference
	UL Type	-	-
	Appearance Inspection	Pass	IPC6013/ IPC 6012/TPCA
	Open/Short 100% Test	Pass	Test voltage 100~250 V ; 10~50Ω ; IR 10~20MΩ
	Plating Adhesion	Pass	JIS C5016
	Solder Float	Pass	J-STD-003B 4.2.8.4.2
	Bending Resistance	Pass	IPC-TM-650


No. 522, Nanshang Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)

桃園市龜山區南上路522號


TEL : 886-3-222-0998 FAX : 886-3-222-0995

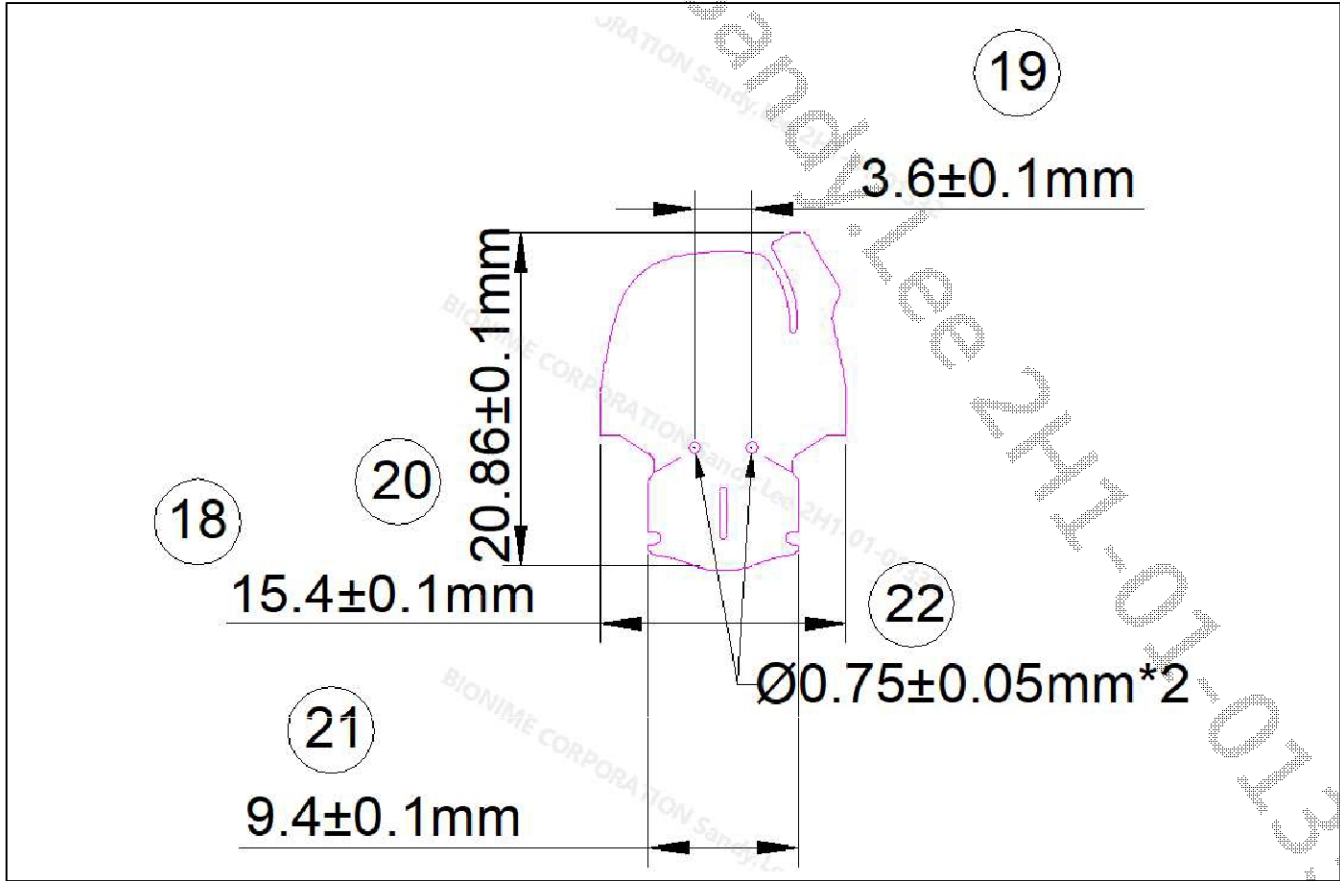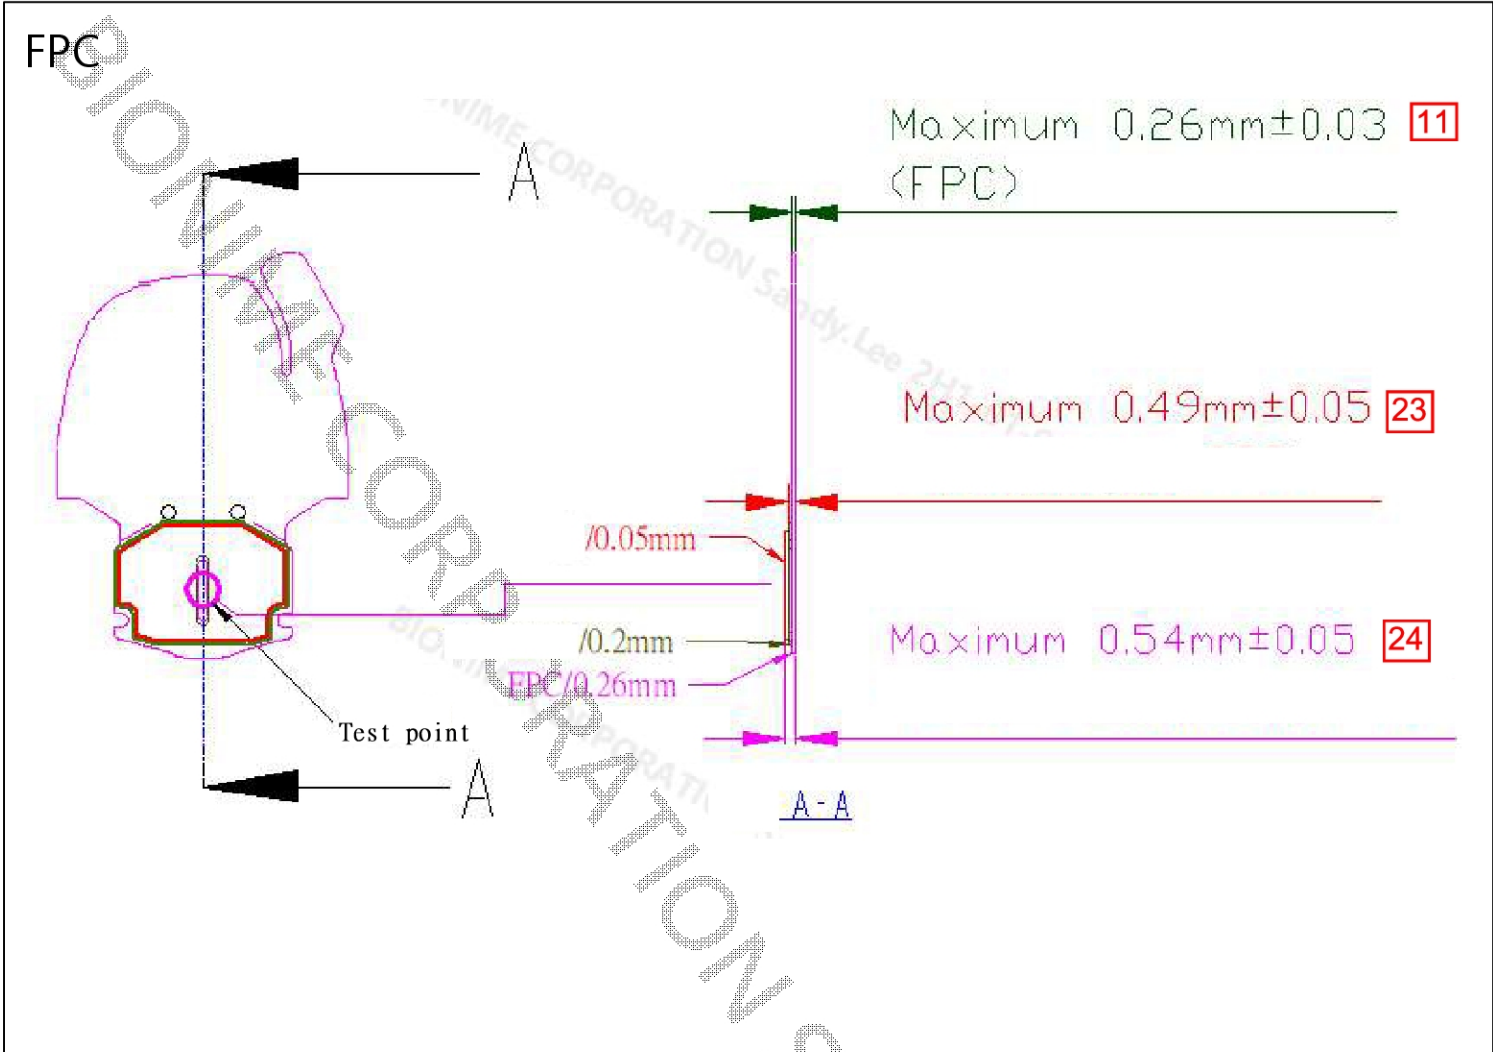




HT500 V2.5

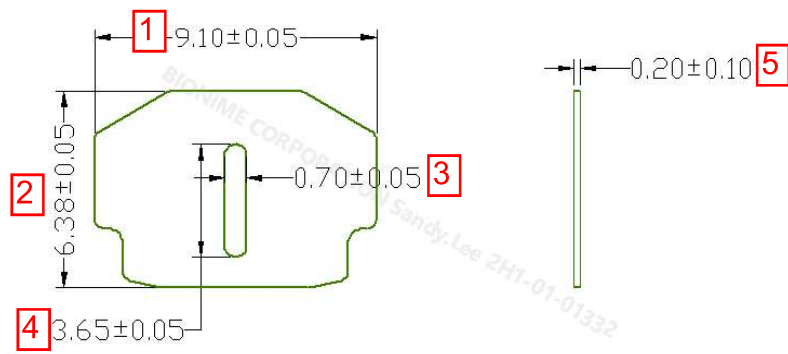


unit: mm

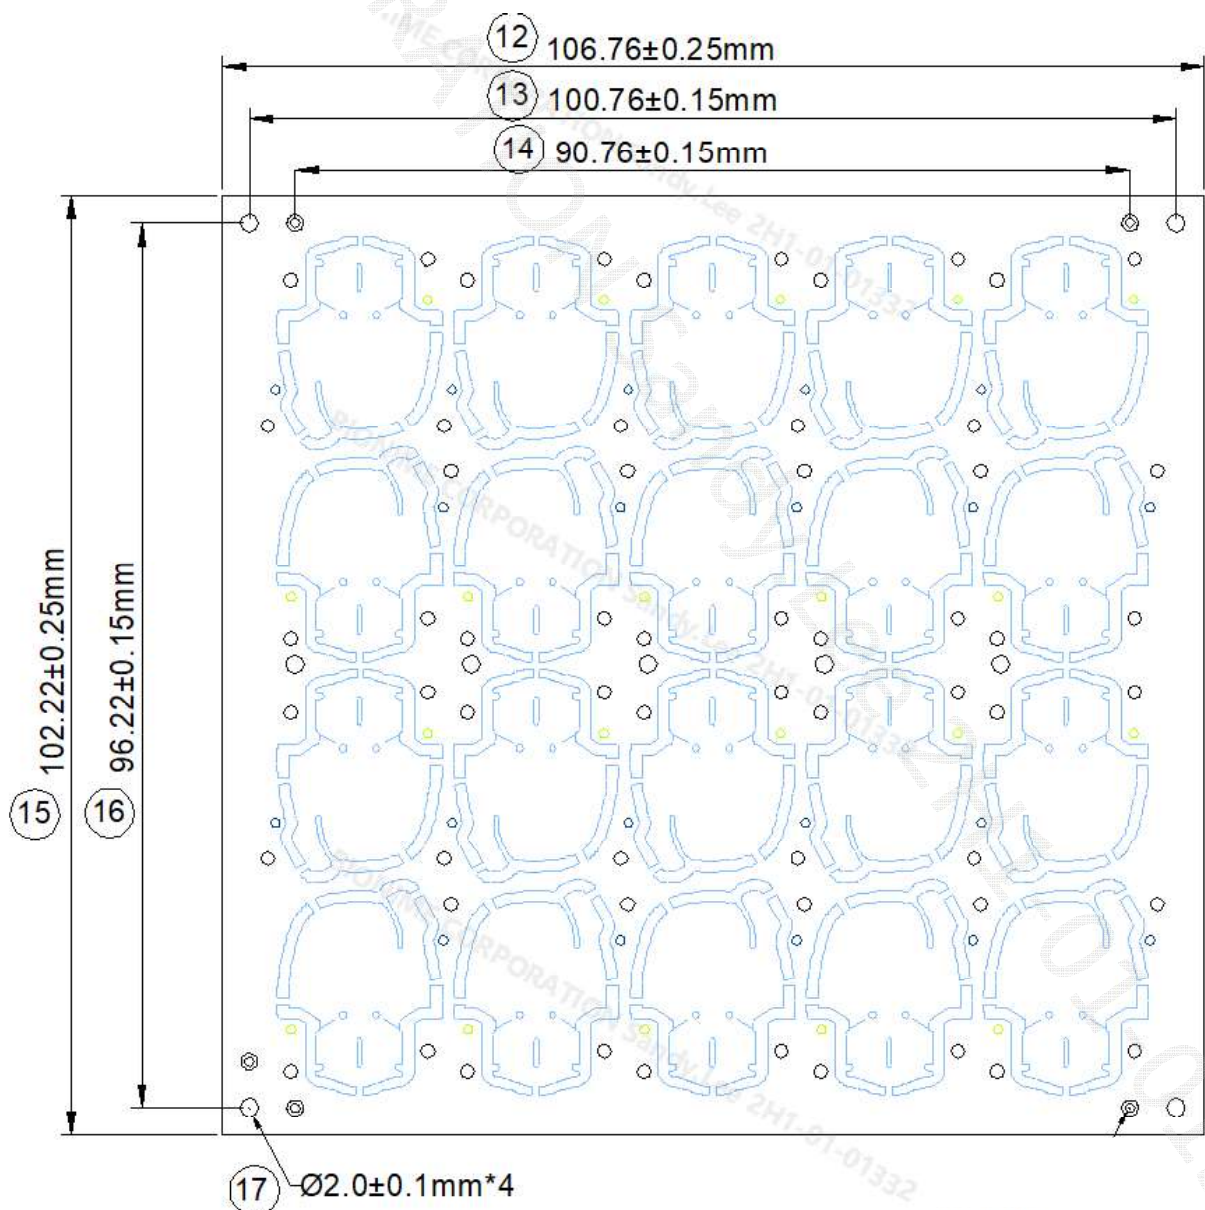

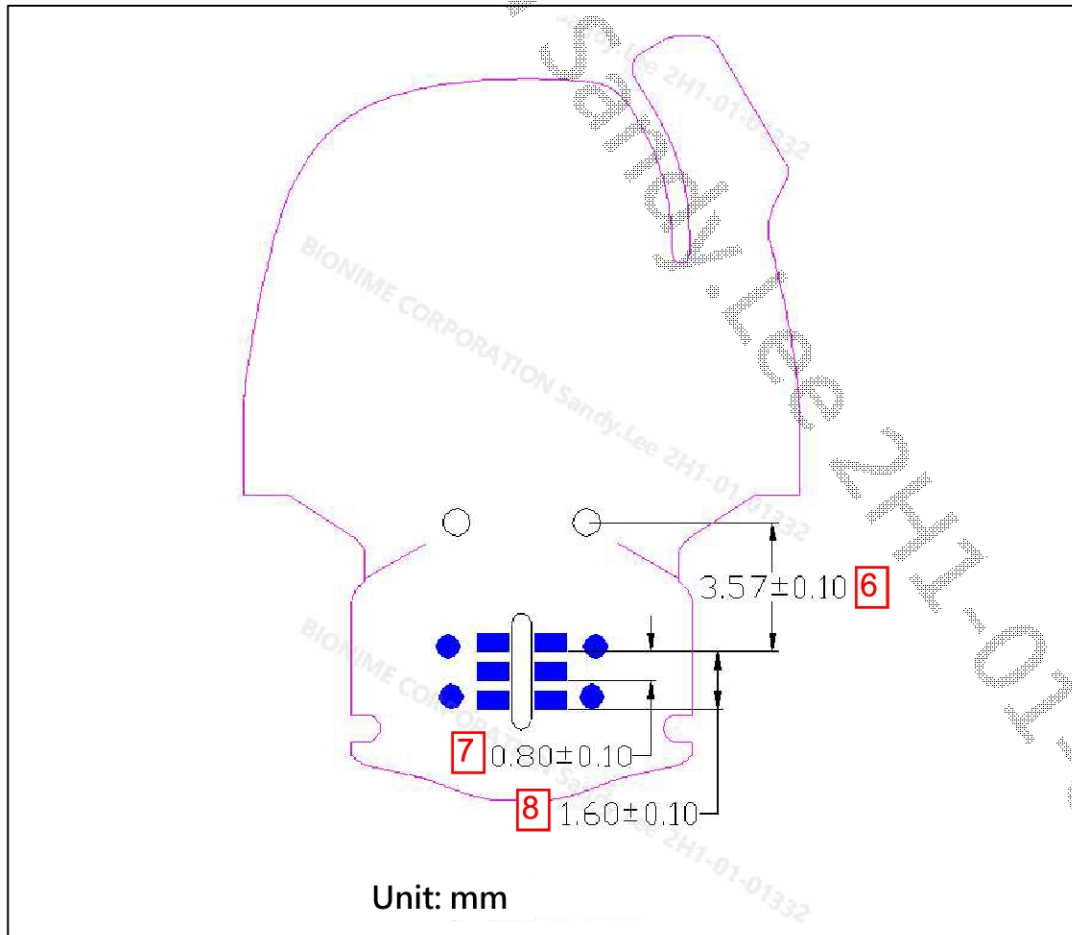


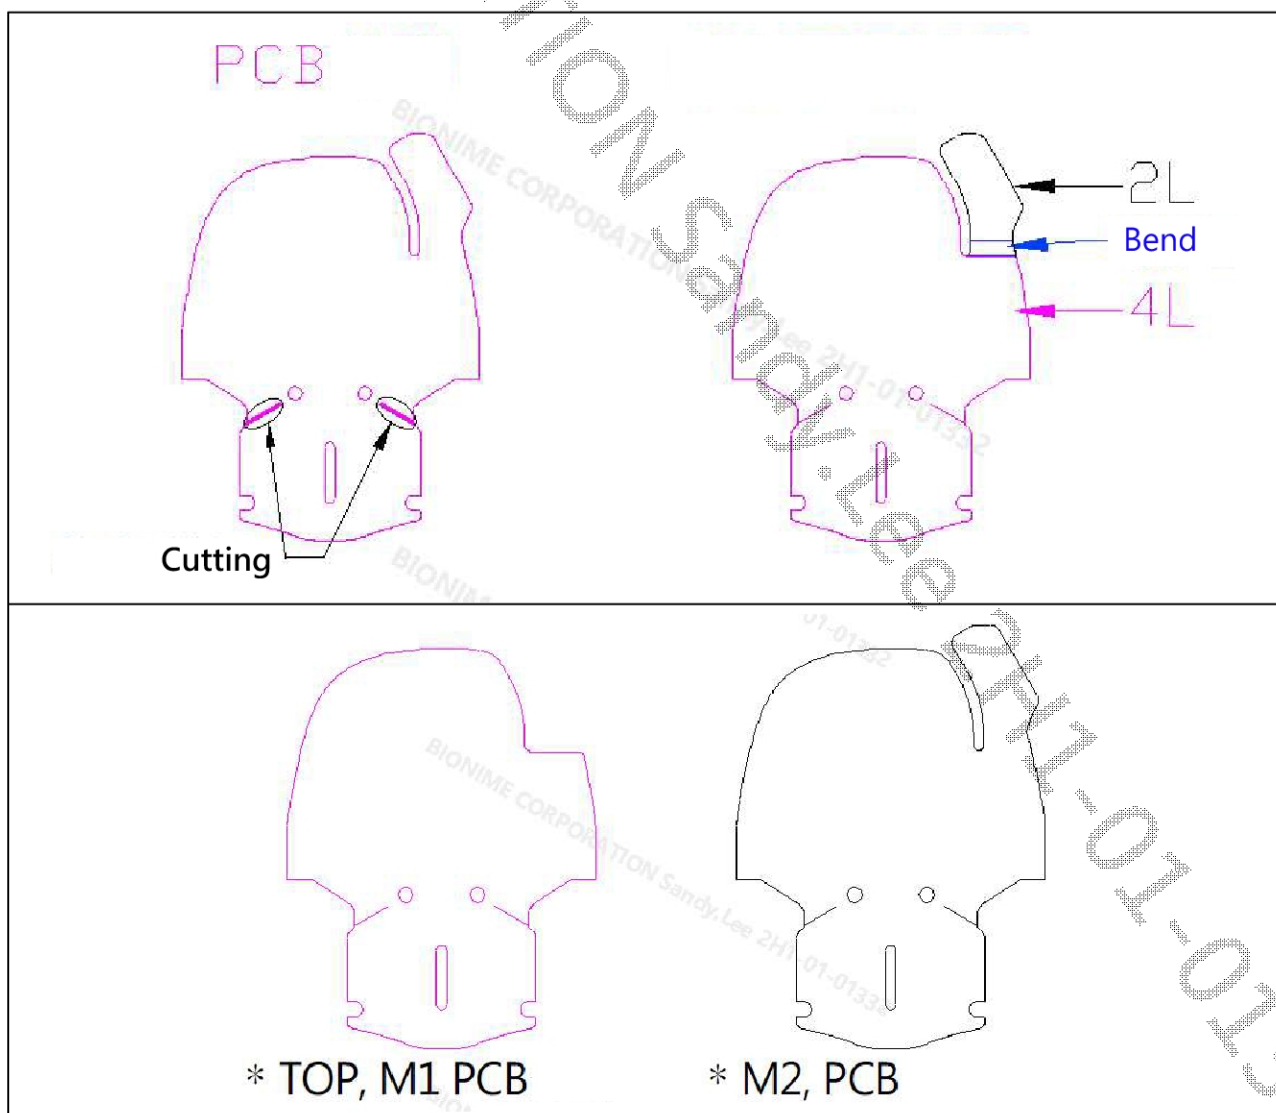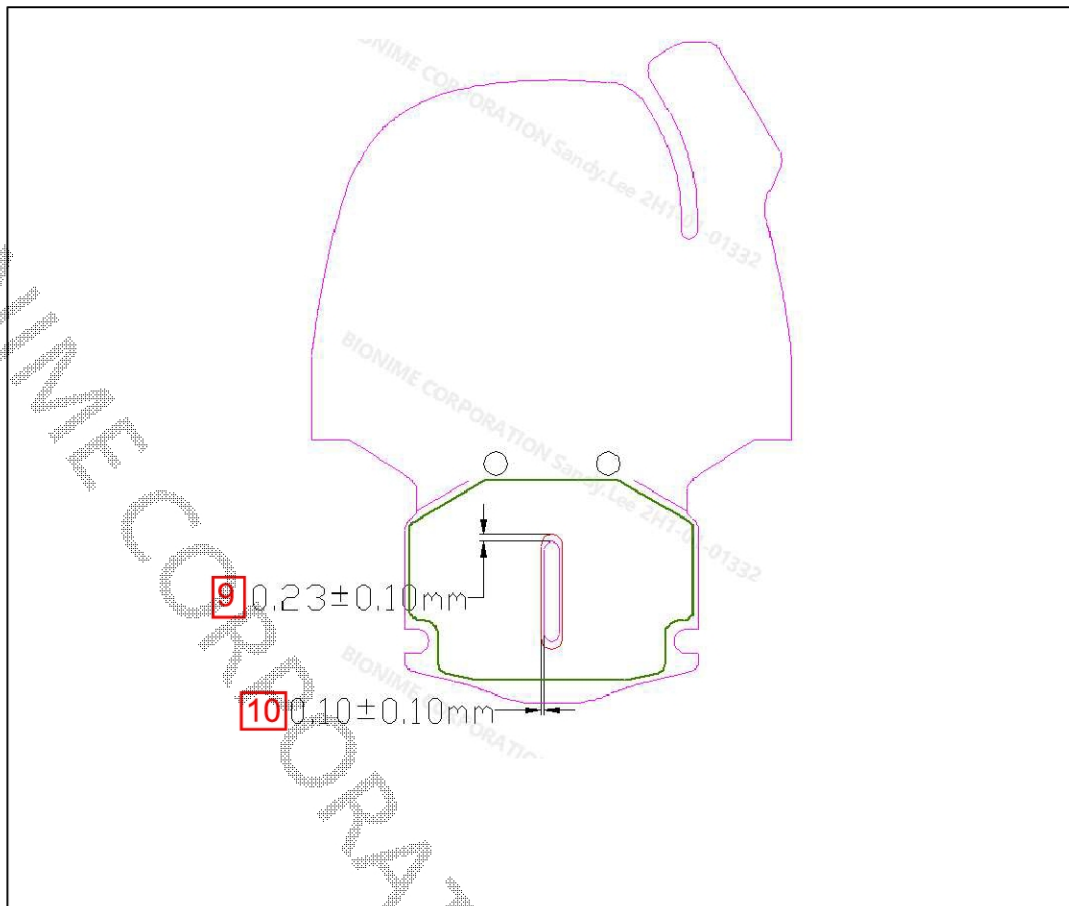


TOP

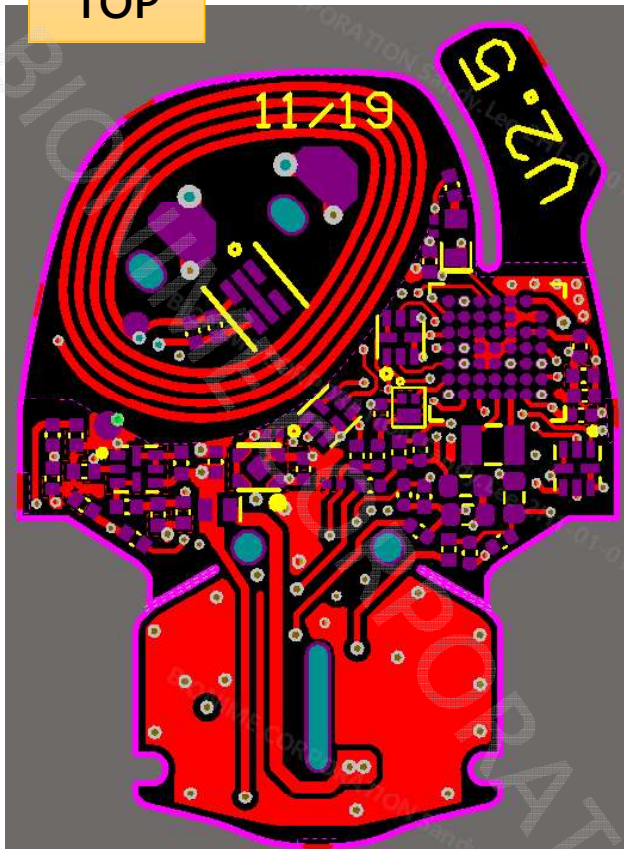


BOT

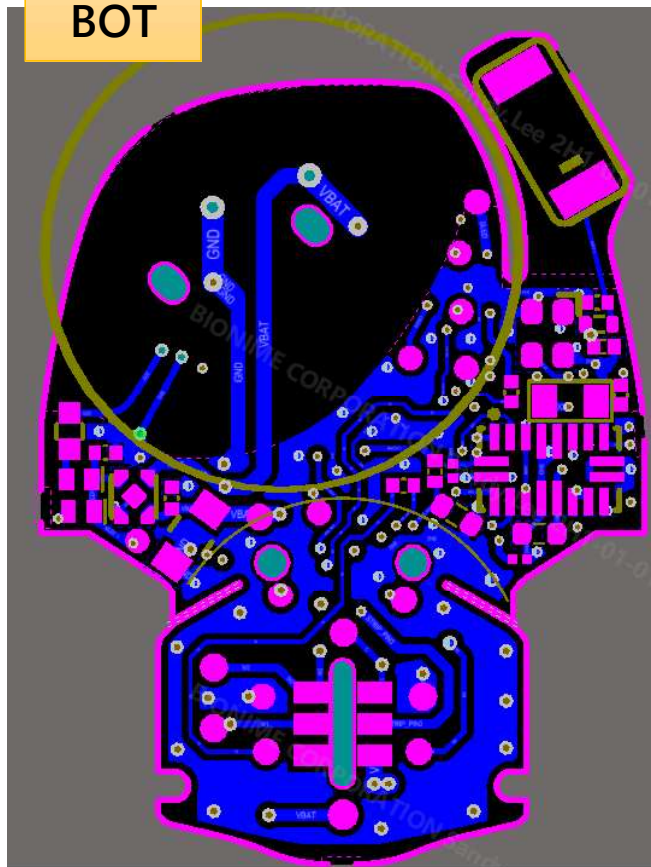


● nFC Antenna

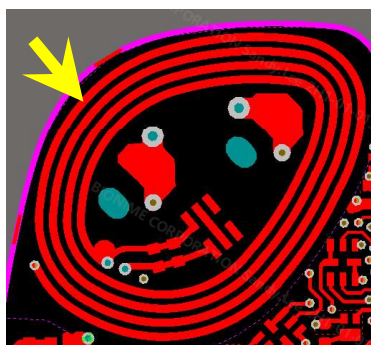

TOP

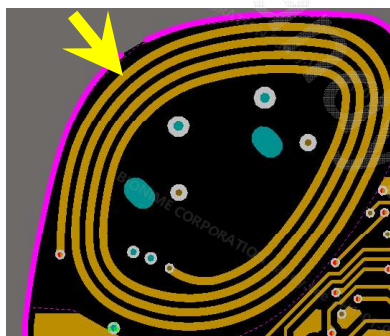

M1

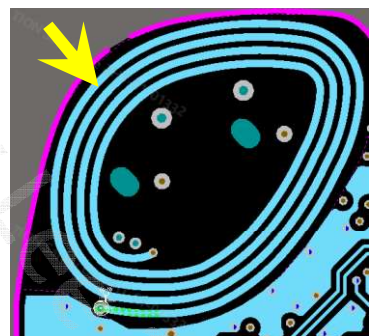

M2



CUSTOMER				華廣生技股份有限公司 BIONIME CORPORATION			
CUSTOMER P/N				HT500 V2.5			
SUNFLEX P/N				LW28M11235D			
DIMENSION (ATTACHMENT) mm							
Item	Spec.	Tolerance		Result	Difference	Status	Remarks
1	9.100	±	0.05	9.085	-0.015	OK	
2	6.380	±	0.05	6.379	-0.001	OK	
3	0.700	±	0.05	0.751	0.051	NG	2024/12/18 Based on the appearance
4	3.650	±	0.05	3.709	0.059	NG	
5	0.200	±	0.10	0.210	0.010	OK	
6	3.570	±	0.10	3.584	0.014	OK	
7	0.800	±	0.10	0.767	-0.033	OK	
8	1.600	±	0.10	1.576	-0.024	OK	
9	0.230	±	0.10	0.260	0.030	OK	
10	0.100	±	0.10	0.119	0.019	OK	
11	0.260	±	0.03	0.264	0.004	OK	
12	106.760	±	0.25	106.705	-0.055	OK	
13	100.760	±	0.15	100.804	0.044	OK	
14	90.760	±	0.15	90.734	-0.026	OK	
15	102.220	±	0.25	102.220	0.000	OK	
16	96.220	±	0.15	96.089	-0.131	OK	
17	2.000	±	0.10	1.976	-0.024	OK	
18	15.400	±	0.10	15.401	0.001	OK	
19	3.600	±	0.10	3.599	-0.001	OK	
20	21.160	±	0.10	21.153	-0.007	OK	

[illegible]

No. 522, Nanshang Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)

桃園市龜山區南上路522號

TEL : 886-3-222-0998 FAX : 886-3-222-0995

Wiring, Printed - Flexible Material Constructions - Component

COMPANY

SUNFLEX TECH CO LTD

522 Nan-Shang Rd

Kueisan Hsiang, 333 Taiwan

E203460

Type	Cond Width		Max		Report		Max		Assembly		Max		Meets		C
	Min	Cond	SS/	Area	date	Surface	Solder	Oper	Solder	Temp	Flame	UL796F			
	Min	Edge	Thk	DS/	Diam	After	Mount	Process	Process	Limits	Temp	Class			
	mm	mm	mic	DSO	mm	2022-01-01	Technology	°C	Cycles	°C	sec	°C	Class	DSR	I
Multilayer flexible materials interconnect constructions, Flammability Recognition only															
S-23	-	-	-	DS	-	No	-	-	-	280	10	-	V-0	-	-
S-5	-	-	-	DS	-	No	-	-	-	280	10	-	V-0	-	-
S-53 (ASP 1)	-	-	-	DS	-	Yes	Yes	260	3	280	10	-	V-0	-	-
S-61 (ASP 1)	-	-	-	DS	-	Yes	Yes	260	3	-	-	-	V-0	-	-
S-72 (ASP 1)	-	-	-	DS	-	Yes	Yes	260	3	-	-	-	V-0	-	-
Multilayer flexible materials interconnect constructions, Flex to Install Application															
S-51	0.04	0.05	12 Int:35	DS	50.8	No	-	-	-	280	10	105	V-0	-	-
S-52	0.04	0.05	12 Int:35	DS	50.8	No	-	-	-	280	10	105	V-0	-	-
Single layer flexible material construction printed-wiring boards for use in flexible applications															
S-1	0.25	0.25	17	DS	25.4	No	-	-	-	260	10	105	V-0	All	-
S-11	0.075	0.225	12	DS	25.4	No	-	-	-	280	10	105	V-0	-	-
Single layer flexible materials interconnect constructions, Flammability Recognition only															
S-1.a	-	-	-	DS	-	No	-	-	-	260	10	-	V-0	-	-

S-2	-	-	-	SS	-	No	-	-	-	280	15	-	V-0	-	-
S-22	-	-	-	DS	-	No	-	-	-	280	10	-	V-0	-	-
S-3	-	-	-	DS	-	No	-	-	-	280	10	-	VTM-0	-	-
S-31 (ASP 1)	-	-	-	DS	-	Yes	Yes	260	3	-	-	-	V-0	-	-
S-32 (ASP 1)	-	-	-	DS	-	Yes	Yes	260	3	-	-	-	V-0	-	-
S-71 (ASP 1)	-	-	-	DS	-	Yes	Yes	260	3	-	-	-	V-0	-	-
Single layer flexible materials interconnect constructions, Flex to Install Application															
S-12	0.14	0.42	12	DS	50.8	No	-	-	-	280	10	105	V-0	-	-
S-13	0.04	0.05	12	DS	50.8	No	-	-	-	280	10	105	V-0	-	-
S-14	0.15	0.45	12	DS	50.8	No	-	-	-	280	10	105	V-0	-	-
S-15	0.04	0.05	12	DS	50.8	No	-	-	-	280	10	105	V-0	-	-
S-16	0.06	0.2	12	SS	50.8	No	-	-	-	280	10	105	V-0	All	-
S-17	0.05	0.2	15	SS	50.8	No	-	-	-	280	10	105	V-0	-	-
S-21	0.14	0.42	9	DS	50.8	No	-	-	-	280	10	105	V-0	-	-
S-6	0.145	0.435	17.5	DS	50.8	No	-	-	-	260	10	105	V-0	All	-

(ASP 1) - Assembly solder process evaluated to IPC-TM-650, 2.6.27 Thermal Stress Assembly Simulation.

Marking: Company name or trademark  or file number and type designation. May be followed by a suffix to denote factory identification or flammability classification..

Last Updated on 2024-01-25

The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL Solutions' Follow - Up Service. Only those products bearing the UL Mark should be considered to be Certified and covered under UL Solutions' Follow - Up Service. Always look for the Mark on the product.

UL Solutions permits the reproduction of the material contained in Product iQ subject to the following conditions: 1. The Guide Information, Assemblies, Constructions, Designs, Systems, and/or Certifications (files) must be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from Product iQ with permission from UL Solutions" must appear adjacent to the extracted material. In addition, the reprinted material must include a copyright notice in the following format: "©2024 UL LLC."