

TEST REPORT

Report Number: 100284613MPK-001

Project Number: 100284613

December 29, 2010

Testing performed on the

Scanning Receiver

Model Number: ADV0602902

FCC ID: ADV0602902

to

FCC Part 15, Subpart B

Class: B

for

GRE America

Test Performed by:

Intertek
1365 Adams Court
Menlo Park, CA 94025
USA

Test Authorized by:

GRE America
425 Harbor Blvd. Suite B
Belmont, CA 94002
USA

Prepared by:


Ollie Moyrong

Date: December 29, 2010

Reviewed by:


Krishna K Vemuri

Date: December 29, 2010

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to copy or distribute this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program. This report must not be used to claim product endorsement by A2LA, NIST nor any other agency of the U.S. Government.

VERIFICATION OF COMPLIANCE

Report No. 100284613MPK-001

Verification is hereby issued to the named APPLICANT and is VALID ONLY for the equipment identified hereon for use under the rules and regulations listed below.

Equipment Under Test:	Scanning Receiver
Trade Name:	GRE America
Model No.:	ADV0602902
Serial No.	000015
Applicant:	GRE America
Contact:	Mr. Raj Gounder
Address:	425 Harbor Blvd. Suite B Belmont, CA 94002
Country	USA
Tel. number:	650-591-1400
Fax number:	650-591-2001
Applicable Regulation:	FCC Part 15, Subpart B
Equipment Class:	Class B
Date of Test:	December 20, 2010

We attest to the accuracy of this report:



Ollie Moyrong
Engineering Manager



Krishna Vemuri
Senior Staff EMC Engineer

TABLE OF CONTENTS

1.0	General Description	4
1.1	Product Description	4
1.2	Related Submittal(s) Grants	4
1.3	Test Methodology	4
1.4	Test Facility	4
1.5	Summary of Test Results	5
2.0	System Test Configuration	6
2.1	Justification	6
2.2	EUT Exercising Software	6
2.3	Mode of Operation	6
2.4	Support Equipment List and Description	7
2.5	Equipment Setup Block Diagram	7
2.6	Equipment Modification	7
3.0	Emission Test Results	8
3.1	Field Strength Calculation	9
3.2	Radiated Emission Data	10
3.3	AC Line Conducted Emission Data	14
3.4	Antenna Conducted Emission Data	15
4.0	List of Test Equipment	18
	Appendix A – Local Oscillator Frequency Calculation	19
	Appendix B – ADV0602902 Specification	20



1.0 General Description

1.1 Product Description

The Equipment Under Test (EUT) is a Digital Scanning Receiver, model ADV0602902.

Refer to the attached specifications sheets in Appendix B for more details.

A production version of the sample was received on December 19, 2010 in good condition. As declared by the Applicant, it is identical to production units.

1.2 Related Submittal(s) Grants

This is a single application for certification of a scanning receiver.

1.3 Test Methodology

Both conducted (if applicable) and radiated emission measurements were performed according to the procedures in ANSI C63.4. All radiated measurements were performed in a semi-anechoic chamber. Radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the **"Data Section"** of this Application.

1.4 Test Facility

The test site and conducted measurement facility used to collect the radiated data is Site 1, a 10 meter semi-anechoic chamber. This test facility and site measurement data have been fully placed on file with the FCC and A2LA accredited.

1.5 Summary of Test Results

Model: ADV0602902
FCC ID: ADV0602902

TEST	REFERENCE	RESULTS
Radiated Emission	15.109	Complies
AC Line Conducted Emission	15.107	Not Applicable ¹
Antenna Conducted Emission	15.111	Complies
FCC Part 15.121 Requirement	15.121	Complies ²

¹ Not Applicable. The equipment is battery powered and does not contain an external power port.

² Refer to file: GRE ADV0602902 REPORT FOR FCC RULE PART 15.121

2.0 System Test Configuration

2.1 Justification

The tests were performed according to the test procedure as outlined in CFR47 Part 15.31 and in ANSI C63.4.

For emission testing, the equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). During testing, all cables were manipulated to produce worst-case emissions.

For the measurements, the EUT is placed on top of a non-conductive table. If the EUT attaches to peripherals, they are connected and operational (as typical as possible).

For radiated emission measurements, the signal is maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters. Radiated emissions are taken at three meters unless the signal level is too low for measurement at that distance. If necessary, a pre-amplifier is used and/or the test is conducted at a closer distance. All readings are extrapolated back to the equivalent three-meter reading using inverse scaling with distance if measured at a closer distance.

2.2 EUT Exercising Software

The unit was setup to receive continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing.

2.3 Mode of Operation

The EUT was tested in two modes:


Test Mode 1: The EUT was set to constantly receive at the low, middle and high channels of each band.

Test Mode 2: The EUT was set to constantly scan all bands.

2.4 Support Equipment List and Description

Item #	Description	Model No.	Serial No.
1	Compaq Laptop Computer	Evo N620C	6060A0113002 CM-2 S99
2	Headphones	Not Labeled	Not Labeled

2.5 Equipment Setup Block Diagram

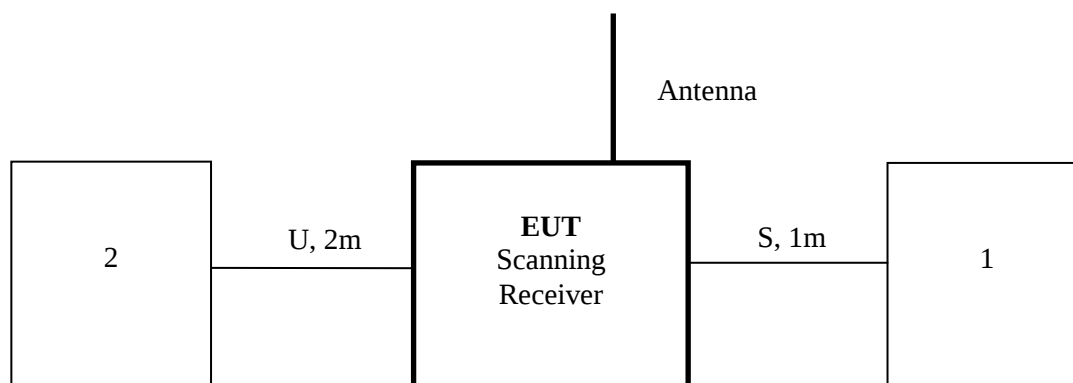

U: Unshielded

S: Shielded

m: meter

2.6 Equipment Modification

Intertek Testing Services installed no modifications.

3.0 Emission Test Results

AC line conducted emission measurements were performed from 0.15 MHz to 30 MHz. Analyzer resolution is 10 kHz or greater.

Radiated emission measurements and antenna conducted emission measurements were performed from 30 MHz to 10,000 MHz. Analyzer resolution is 100 kHz or greater for frequencies from 30 MHz to 1000 MHz, 1 MHz - for frequencies above 1000 MHz.

Preliminary tests were performed to determine the worst-case emission with the EUT tuned to the low, middle and high channels of each band. From these preliminary measurements the EUT was tuned to the frequency with the highest emission and the final scan was performed using the automated test software.

The same procedure was used to determine the worst-case emission level with the EUT setup in scanning mode for each band.

The final recorded data reflects the worst-case result.

A sample calculation and data tables of the emissions are included.

All measurements were performed with peak detection unless otherwise specified.

3.1 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG + DF$$

Where FS = Field Strength in dB(μ V/m)

RA = Receiver Amplitude (including preamplifier) in dB(μ V)

CF = Cable Attenuation Factor in dB

AF = Antenna Factor in dB(1/m)

AG = Amplifier Gain in dB

DF = Distance Factor in dB

Assume a receiver reading of 52.0 dB(μ V) is obtained. The antennas factor of 7.4 dB(1/m) and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted, giving field strength of 32 dB(μ V/m). This value in dB(μ V/m) was converted to its corresponding level in μ V/m.

$$RA = 52.0 \text{ dB}(\mu\text{V})$$

$$AF = 7.4 \text{ dB}(1/\text{m})$$

$$CF = 1.6 \text{ dB}$$

$$AG = 29.0 \text{ dB}$$

$$DF = 0 \text{ dB}$$

$$FS = 52 + 7.4 + 1.6 - 29.0 + 0 = 32 \text{ dB}(\mu\text{V}/\text{m})$$

$$\text{Level in } \mu\text{V}/\text{m} = \text{Common Antilogarithm } [(32 \text{ dB}(\mu\text{V}/\text{m})/20] = 39.8 \mu\text{V}/\text{m}$$

3.2 Radiated Emission Data

Tested By:	Olie Moyrong
Test Date:	December 20, 2010

The results on the following page(s) were obtained when the device was tested in the condition described in Section 2.

Results:	Complies
-----------------	-----------------

3.2 Test Data (Continued)

FCC Part 15.109 Class B Radiated Emissions Data

Intertek

Radiated Emissions 30 MHz - 1000 MHz

FCC Part 15 Class B (QP-Vertical)

Operator: OM

Model Number:ADV0602902

03:30:28 PM, Monday, December 20, 2010

Company: GRE


Tuned Frequency	Measured Frequency	Quasi Pk FS	Limit@3m	RA	AG	CF	AF	Margin
MHz	Hz	dB(uV/m)	dB(uV/m)	dB(uV)	dB	dB	dB(1/m)	dB
764.0	3.832E+08	24.5	46.0	39.0	31.8	1.5	15.8	-21.5
25.0	4.058E+08	25.4	46.0	39.6	31.9	1.6	16.0	-20.6
41.0	4.218E+08	25.1	46.0	38.7	31.9	1.6	16.6	-20.9
806.0	4.252E+08	27.2	46.0	40.8	31.9	1.6	16.7	-18.8
54.0	4.348E+08	28.0	46.0	42.1	31.9	1.6	16.1	-18.0
860.0	4.792E+08	22.4	46.0	35.1	31.9	1.7	17.5	-23.6
108.0	4.888E+08	24.0	46.0	36.6	31.9	1.7	17.6	-22.0
124.0	5.048E+08	23.5	46.0	35.9	31.9	1.8	17.8	-22.5
136.0	5.168E+08	25.2	46.0	37.3	32.0	1.8	18.0	-20.8
137.0	5.178E+08	25.8	46.0	37.9	32.0	1.8	18.1	-20.2
154.1	5.349E+08	28.7	46.0	40.4	32.0	1.8	18.4	-17.3
174.0	5.548E+08	27.5	46.0	39.3	32.0	1.9	18.3	-18.5
960.0	5.792E+08	24.4	46.0	35.5	32.0	1.9	19.0	-21.6
216.0	5.968E+08	29.9	46.0	40.9	32.0	2.0	19.0	-16.1
225.0	6.058E+08	29.6	46.0	40.6	32.0	2.0	19.0	-16.4
310.0	6.908E+08	37.1	46.0	46.9	32.1	2.1	20.2	-8.9
406.0	7.868E+08	28.2	46.0	36.5	32.0	2.3	21.5	-17.8
450.0	8.308E+08	35.1	46.0	42.8	31.9	2.3	21.8	-10.9
1240.0	8.592E+08	37.1	46.0	44.7	31.8	2.4	21.8	-8.9
1270.0	8.892E+08	37.5	46.0	44.3	31.6	2.5	22.4	-8.5
512.0	8.928E+08	38.1	46.0	44.8	31.6	2.5	22.5	-7.9
1300.0	9.192E+08	38.5	46.0	44.6	31.5	2.5	22.9	-7.5

Test Mode: Tuned Frequency

Temp: 21.6C

Humidity: 41.8%

3.2 Test Data (Continued)

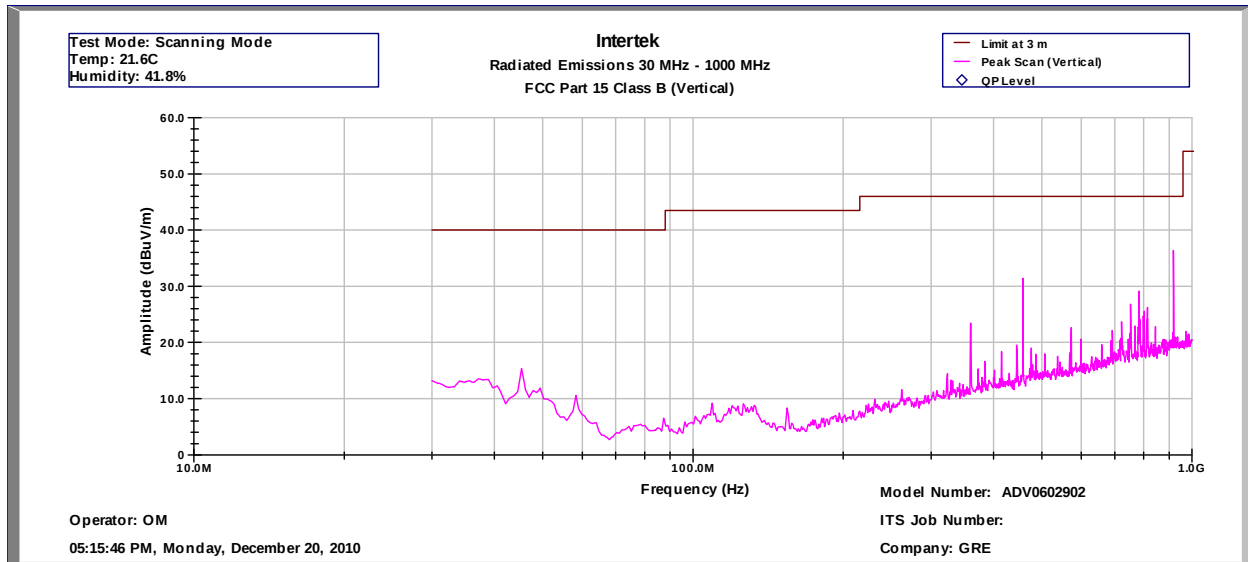

Intertek
Radiated Emissions 30 MHz- 1000 MHz
FCC Part 15 Class B (Pk-Vertical)

Operator: OM

Model Number: ADV0602902


Current Time - 05:34:41 PM, Monday, December 20, 2010

Company: GRE

Frequency (Hz)	Peak FS dB(uV/m)	Limit@3m dB(uV/m)	Margin dB	RA dB(uV)	AG dB	CF dB	AF dB(1/m)
3.606E+08	23.4	46.0	-22.6	38.6	31.8	1.5	15.1
4.584E+08	31.4	46.0	-14.6	44.4	31.9	1.7	17.2
5.732E+08	22.6	46.0	-23.4	34.0	32.0	1.9	18.7
5.991E+08	20.6	46.0	-25.4	31.7	32.0	2.0	18.9
7.227E+08	23.7	46.0	-22.3	32.5	32.1	2.2	21.1
7.535E+08	26.8	46.0	-19.2	35.9	32.0	2.2	20.7
7.834E+08	29.1	46.0	-16.9	37.5	32.0	2.3	21.3
8.028E+08	25.5	46.0	-20.5	33.5	32.0	2.3	21.7
8.141E+08	26.2	46.0	-19.8	33.9	31.9	2.3	21.9
9.184E+08	36.4	46.0	-9.6	42.4	31.5	2.5	22.9

Test Mode: Scanning Mode
Temp: 21.6C
Humidity: 41.8%

3.2 Test Data (Continued)

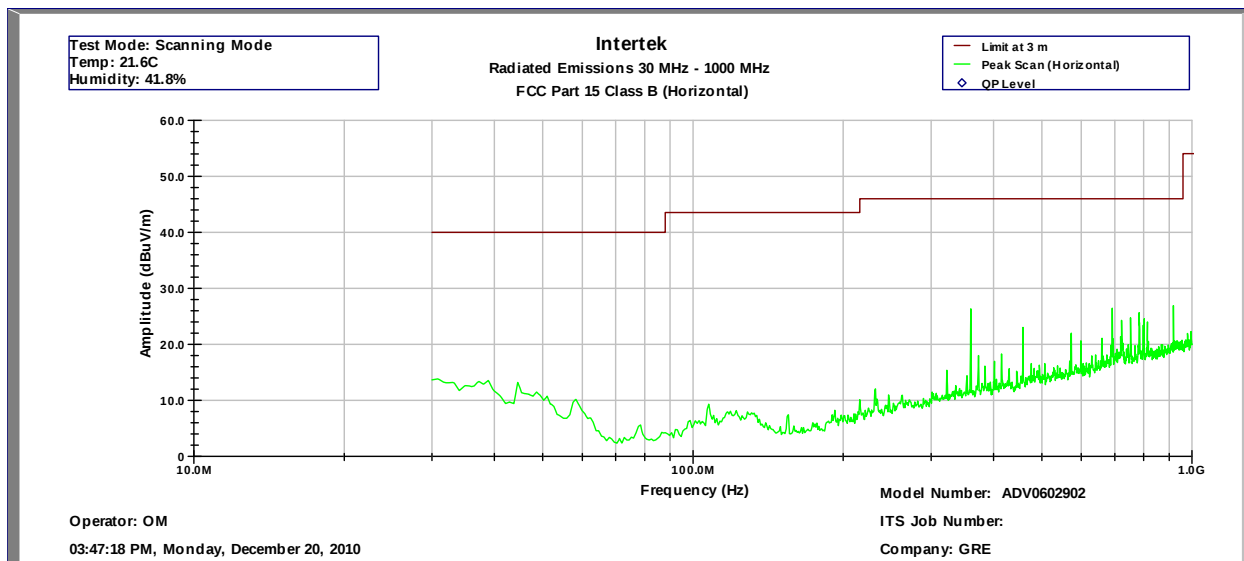

Intertek
Radiated Emissions 30 MHz - 1000 MHz
FCC Part 15 Class B (Pk-Horizontal)

Operator: OM
Model Number: ADV0602902

Current Time - 05:35:10 PM, Monday, December 20, 2010
Company: GRE

Frequency (Hz)	Pk FS dB(uV/m)	Limit@3m dB(uV/m)	Margin dB	RA dB(uV)	PA dB	CF dB	AF dB(1/m)
3.606E+08	26.3	46.0	-19.7	41.5	31.8	1.5	15.1
4.584E+08	23.0	46.0	-23.0	36.1	31.9	1.7	17.2
5.732E+08	22.0	46.0	-24.0	33.4	32.0	1.9	18.7
6.920E+08	26.5	46.0	-19.5	36.2	32.1	2.1	20.2
7.227E+08	24.3	46.0	-21.7	33.0	32.1	2.2	21.1
7.535E+08	24.7	46.0	-21.3	33.8	32.0	2.2	20.7
7.834E+08	25.6	46.0	-20.4	34.0	32.0	2.3	21.3
8.020E+08	24.6	46.0	-21.4	32.5	32.0	2.3	21.8
8.141E+08	23.9	46.0	-22.1	31.7	31.9	2.3	21.9
9.184E+08	26.9	46.0	-19.1	33.0	31.5	2.5	22.9

Test Mode: Scanning Mode
Temp: 21.6C
Humidity: 41.8%

Note: Frequency range of investigation was 30 MHz to 10 GHz. Emissions above 1 GHz were at least 20 dB below the limit.

3.3 AC Line Conducted Emission Data

Not Applicable. The equipment is battery powered and does not contain an external power port.


3.4 Antenna Conducted Emission Data


Tested By:	Ollie Moyrong
Test Date:	December 20, 2010

The results on the following page(s) were obtained when the device was tested in the condition described in Section 2.

Results:	Complies
-----------------	-----------------

Note: Tests were performed with the EUT operating in the low, middle and high channels. The worst-case emissions were detected in the low channel and are presented in this report.

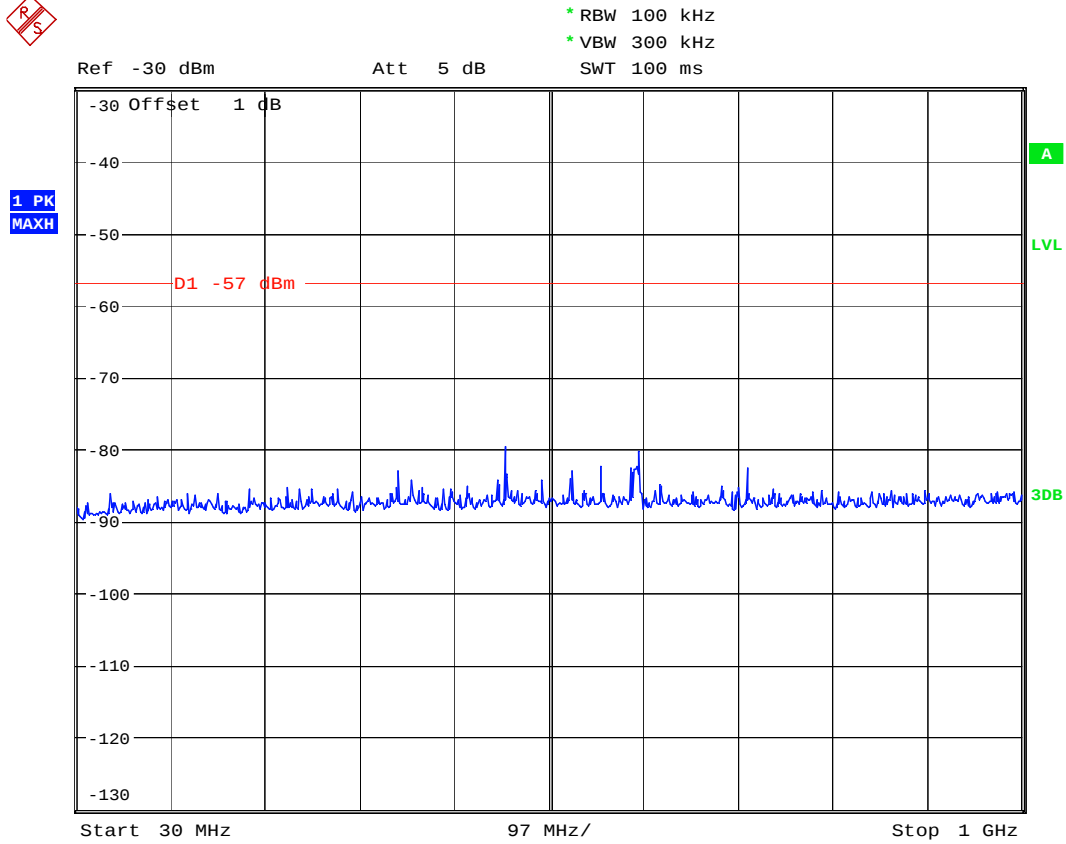

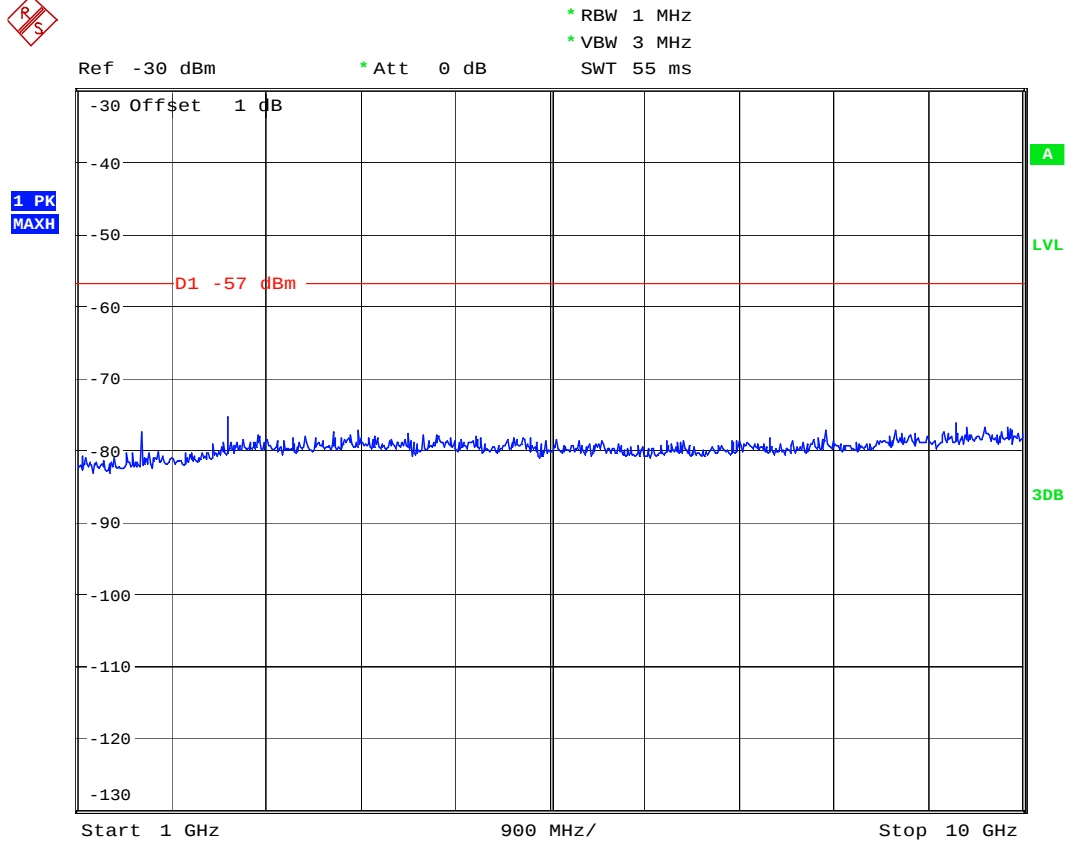

4.0 List of Test Equipment

Measurement equipment used for emission compliance testing utilized the equipment on the following list.

Equipment	Manufacturer	Model/Type	Serial #	Cal Int	Cal Due
RF Filter Section	Hewlett Packard	85460A	3448A00267	12	12/08/11
EMI Receiver	Hewlett Packard	8546A	3710A00373	12	12/08/11
BI-Log Antenna	ARA	LPB-2513/A	1154	12	06/29/11
Pre-Amplifier	Sonoma	310N	293620	12	11/02/11

FCC ID: ADV0602902

-1 FCC ID: ADV0602902 formula for 1st, 2nd and 3rd Local oscillation frequencies are as follow :

EMC Report for General Research of Electronics, Inc. on the model ADV0602902
100284613MPK-001



Appendix B – ADV0602902 Specification

See attached document: [ADV0602902 Specification](#).