



# PCTEST ENGINEERING LABORATORY, INC.

6660-B Dobbin Road, Columbia, MD 21045 USA

Tel. 410.290.6652 / Fax 410.290.6554

<http://www.pctestlab.com>



## CERTIFICATE OF COMPLIANCE FCC Part 22 & 24 Class II Permissive Change

**Applicant Name:**  
Sanyo Fisher Company  
21605 Plummer Street  
Chatsworth, CA 91311  
USA

**Date of Testing:**  
November 04, 2008 and January 12, 2009  
**Test Site/Location:**  
PCTEST Lab., Columbia, MD, USA  
**Test Report Serial No.:**  
0810281582.AEZ

**FCC ID:**

**AEZSCP-PRO200**

**APPLICANT:**

**SANYO FISHER COMPANY**

**Application Type:** Class II Permissive Change  
**FCC Classification:** PCS Licensed Transmitter Held to Ear (PCE)  
**FCC Rule Part(s):** §2; §22(H), §24(E)  
**EUT Type:** Cellular/PCS CDMA Phone with Bluetooth and EvDO  
**Model(s):** SCP-PRO200  
**Tx Frequency Range:** 824.70 - 848.31MHz (Cell. CDMA) / 1851.25 - 1908.75MHz (PCS CDMA)  
**Max. RF Output Power:**  
0.288 W ERP Cell. CDMA (24.59 dBm)  
0.469 W EIRP PCS CDMA (26.71 dBm)  
**Emission Designator(s):** 1M27F9W (CDMA) / 1M27F9W (PCS)  
**Test Device Serial No.:** *identical prototype* [S/N: A0000012 FED46B]  
**Class II Permissive Change:** See change document.  
**Original Grant Date:** February 22, 2008

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

**Grant Conditions:** Power output listed is ERP for Part 22 and EIRP for Part 24.

*PCTEST certifies that no party to this application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 862.*



Randy Ortanez  
President




FCC ID: AEZSCP-PRO200	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 CDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	 <b>SANYO</b>	Reviewed by: Quality Manager
Test Report S/N: 0810281582.AEZ	Test Dates: 11/4/08 & 1/12/09	EUT Type: Cellular/PCS CDMA Phone with Bluetooth and EvDO		Page 1 of 36

## T A B L E   O F   C O N T E N T S

---


FCC PART 22 & 24 MEASUREMENT REPORT.....	3
1.0 INTRODUCTION .....	4
1.1 SCOPE .....	4
1.2 TESTING FACILITY.....	4
2.0 PRODUCT INFORMATION.....	5
2.1 EQUIPMENT DESCRIPTION .....	5
2.2 EMI SUPPRESSION DEVICE(S)/MODIFICATIONS .....	5
2.3 LABELING REQUIREMENTS.....	5
3.0 DESCRIPTION OF TESTS .....	6
3.1 MEASUREMENT PROCEDURE .....	6
3.2 OCCUPIED BANDWIDTH EMISSION LIMITS .....	6
3.3 CELLULAR - BASE FREQUENCY BLOCKS.....	6
3.4 CELLULAR - MOBILE FREQUENCY BLOCKS.....	7
3.5 PCS - BASE FREQUENCY BLOCKS.....	7
3.6 PCS - MOBILE FREQUENCY BLOCKS.....	7
3.7 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.....	7
3.8 RADIATED SPURIOUS AND HARMONIC EMISSIONS .....	8
3.9 PEAK-AVERAGE RATIO.....	8
3.10 FREQUENCY STABILITY / TEMPERATURE VARIATION .....	8
4.0 TEST EQUIPMENT CALIBRATION DATA .....	9
5.0 SAMPLE CALCULATIONS .....	10
6.0 TEST RESULTS.....	11
6.1 SUMMARY.....	11
6.2 EFFECTIVE RADIATED POWER OUTPUT DATA .....	12
6.3 EQUIVALENT ISOTROPIC RADIATED POWER OUTPUT DATA.....	13
6.4 CELLULAR CDMA RADIATED MEASUREMENTS.....	14
6.5 PCS CDMA RADIATED MEASUREMENTS.....	17
6.6 CELLULAR CDMA FREQUENCY STABILITY MEASUREMENTS .....	20
6.7 PCS CDMA FREQUENCY STABILITY MEASUREMENTS.....	22
7.0 PLOT(S) OF EMISSIONS .....	24
8.0 CONCLUSION.....	36

FCC ID: AEZSCP-PRO200	 FCC Pt. 22/24 CDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0810281582.AEZ	Test Dates: 11/4/08 & 1/12/09	EUT Type: Cellular/PCS CDMA Phone with Bluetooth and EvDO	Page 2 of 36



## MEASUREMENT REPORT

### FCC Part 22 & 24




#### §2.1033 General Information

**APPLICANT:** Sanyo Fisher Company  
**APPLICANT ADDRESS:** 21605 Plummer Street  
**Chatsworth, CA 91311**  
**TEST SITE:** PCTEST ENGINEERING LABORATORY, INC.  
**TEST SITE ADDRESS:** 6660-B Dobbin Road, Columbia, MD 21045 USA  
**FCC RULE PART(S):** §2; §22(H), §24(E)  
**BASE MODEL:** SCP-PRO200  
**FCC ID:** AEZSCP-PRO200  
**FCC CLASSIFICATION:** PCS Licensed Transmitter Held to Ear (PCE)  
**EMISSION DESIGNATOR(S):** 1M27F9W (CDMA) / 1M27F9W (PCS)  
**MODE:** CDMA  
**FREQUENCY TOLERANCE:** ±0.00025 % (2.5 ppm)  
**Test Device Serial No.:** A0000012 FED46B  Production  Pre-Production  Engineering  
**DATE(S) OF TEST:** November 04, 2008 and January 12, 2009  
**TEST REPORT S/N:** 0810281582.AEZ

#### Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab. located in Columbia, MD 21045, U.S.A.



- PCTEST facility is an FCC registered (PCTEST Reg. No. 90864) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (IC-2451).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (IC-2451) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EVDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.



FCC ID: AEZSCP-PRO200	FCC Pt. 22/24 CDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0810281582.AEZ	Test Dates: 11/4/08 & 1/12/09	EUT Type: Cellular/PCS CDMA Phone with Bluetooth and EVDO	Page 3 of 36

## 1.0 INTRODUCTION


### 1.1 Scope

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission.

### 1.2 Testing Facility

The map below shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity are, the Baltimore-Washington Intert'l (BWI) airport, the city of Baltimore and the Washington, DC area. (see *Figure 1-1*).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility in New Concept Business Park, Guilford Industrial Park, Columbia, Maryland. The site address is 6660-B Dobbin Road, Columbia, MD 21045. The test site is one of the highest points in the Columbia area with an elevation of 390 feet above mean sea level. The site coordinates are 39° 11'15" N latitude and 76° 49'38" W longitude. The facility is 1.5 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. There are no FM or TV transmitters within 15 miles of the site. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2003 on January 27, 2006 and Industry Canada.

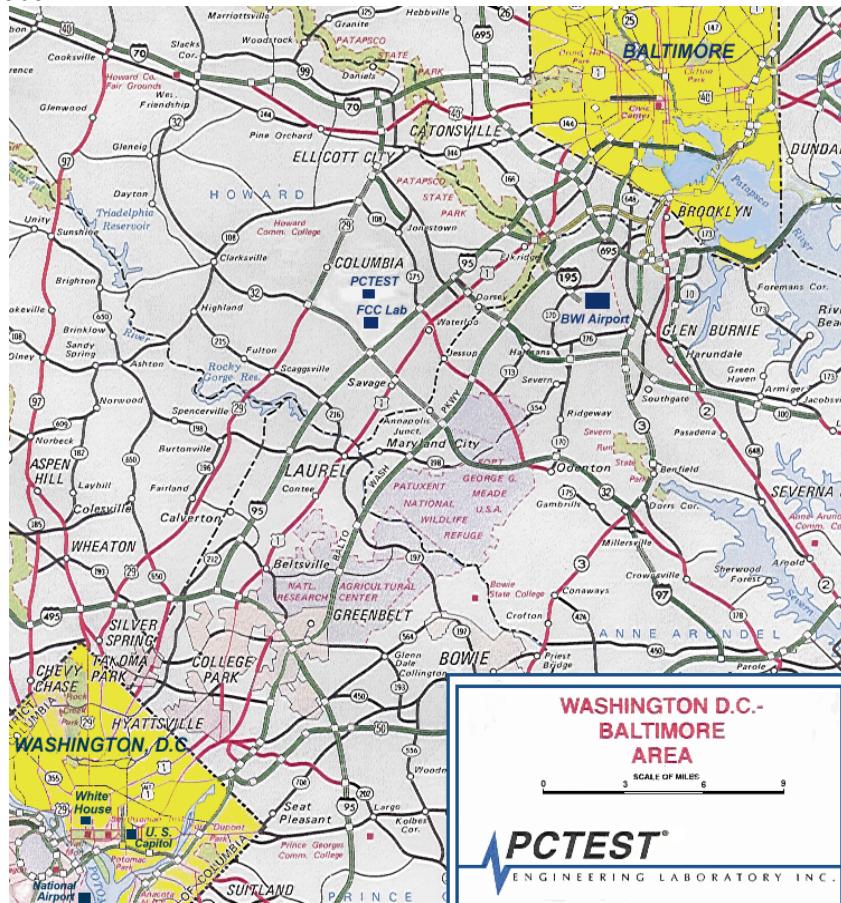

**Figure 1-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area**

FCC ID: AEZSCP-PRO200	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 CDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	 <b>SANYO</b>	Reviewed by: Quality Manager
Test Report S/N: 0810281582.AEZ	Test Dates: 11/4/08 & 1/12/09	EUT Type: Cellular/PCS CDMA Phone with Bluetooth and EvDO		Page 4 of 36

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **Sanyo Cellular/PCS CDMA Phone with Bluetooth and EvDO** **FCC ID: AEZSCP-PRO200**. The EUT consisted of the following component(s):

Trade Name / Base Model	FCC ID	Description
Sanyo / Model: SCP-PRO200	AEZSCP-PRO200	Cellular/PCS CDMA Phone with Bluetooth and EvDO

Table 2-1. EUT Equipment Description

### 2.2 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

### 2.3 Labeling Requirements

Per 2.925

The FCC identifier shall be permanently affixed to the equipment and shall be readily visible to the purchaser at the time of purchase.

Per 15.19; Docket 95-19

In addition to this requirement, a device subject to certification shall be labeled as follows:

*This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.*

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the trade name and FCC ID must be displayed on the device per Section 15.19(b)(2).

Please see attachment for FCC ID label and label location.


FCC ID: AEZSCP-PRO200	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 CDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	 <b>SANYO</b>	Reviewed by: Quality Manager
Test Report S/N: 0810281582.AEZ	Test Dates: 11/4/08 & 1/12/09	EUT Type: Cellular/PCS CDMA Phone with Bluetooth and EvDO		Page 5 of 36

## 3.0 DESCRIPTION OF TESTS

### 3.1 Measurement Procedure

The radiated spurious measurements were made outdoors at a 3-meter test range (see Figure 3-1). The equipment under test is placed on a wooden turntable 3-meters from the receive antenna. The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.

**Deviation from Measurement Procedure.....None**




**Figure 3-1. Diagram of 3-meter outdoor test range**

### 3.2 Occupied Bandwidth Emission Limits

§2.1049, 22.917(a), 24.238(a)

- On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB.
- Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.
- When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges, both upper and lower, as the design permits.
- The measurement of emission power can be expressed in peak or average values, provided they are expressed in the same parameters as the transmitter power.

### 3.3 Cellular - Base Frequency Blocks

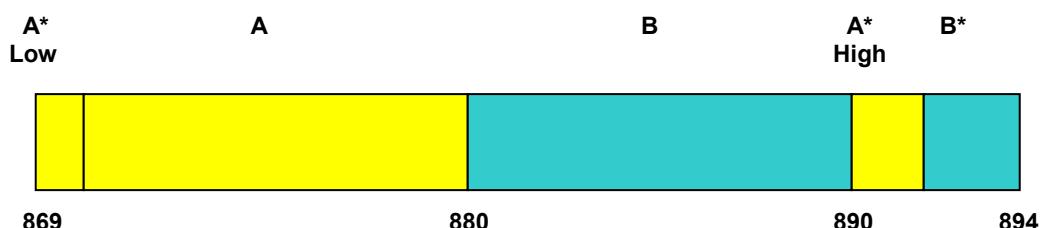

**BLOCK 1: 869 – 880 MHz (A\* Low + A)**


**BLOCK 3: 890 – 891.5 MHz (A\* High)**

**BLOCK 2: 880 – 890 MHz (B)**

**BLOCK 4: 891.5 – 894 MHz (B\*)**

FCC ID: AEZSCP-PRO200	PCTEST Engineering Laboratory, Inc.		FCC Pt. 22/24 CDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	Reviewed by: Quality Manager
Test Report S/N: 0810281582.AEZ	Test Dates: 11/4/08 & 1/12/09	EUT Type: Cellular/PCS CDMA Phone with Bluetooth and EvDO		Page 6 of 36

### 3.4 Cellular - Mobile Frequency Blocks

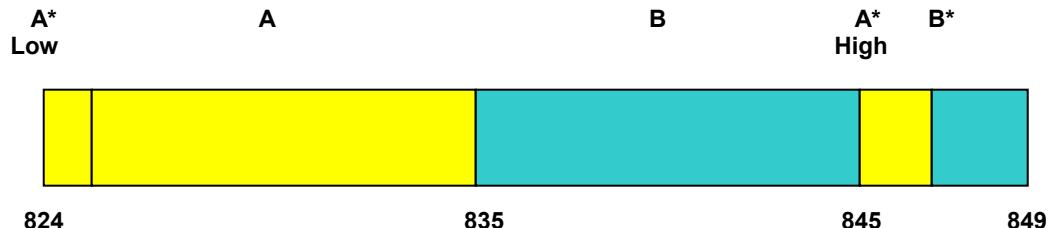


**BLOCK 1: 824 – 835 MHz (A\* Low + A)**

**BLOCK 3: 845 – 846.5 MHz (A\* High)**

**BLOCK 2: 835 – 845 MHz (B)**

**BLOCK 4: 846.5 – 849 MHz (B\*)**

### 3.5 PCS - Base Frequency Blocks

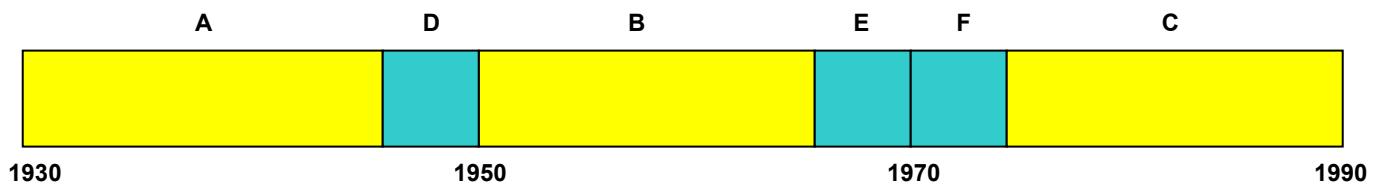

**BLOCK 1: 1930 – 1945 MHz (A)**

**BLOCK 4: 1965 – 1970 MHz (E)**


**BLOCK 2: 1945 – 1950 MHz (D)**

**BLOCK 5: 1970 – 1975 MHz (F)**

**BLOCK 3: 1950 – 1965 MHz (B)**

**BLOCK 6: 1975 – 1990 MHz (C)**

### 3.6 PCS - Mobile Frequency Blocks

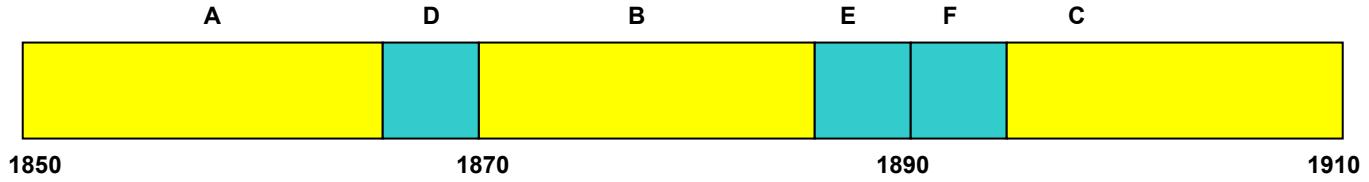

**BLOCK 1: 1850 – 1865 MHz (A)**

**BLOCK 4: 1885 – 1890 MHz (E)**

**BLOCK 2: 1865 – 1870 MHz (D)**

**BLOCK 5: 1890 – 1895 MHz (F)**

**BLOCK 3: 1870 – 1885 MHz (B)**

**BLOCK 6: 1895 – 1910 MHz (C)**

### 3.7 Spurious and Harmonic Emissions at Antenna Terminal

**§2.1051, 22.917(a), 24.238(a)**

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10<sup>th</sup> harmonic.

FCC ID: AEZSCP-PRO200	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 CDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	 <b>SANYO</b>	Reviewed by: Quality Manager
Test Report S/N: 0810281582.AEZ	Test Dates: 11/4/08 & 1/12/09	EUT Type: Cellular/PCS CDMA Phone with Bluetooth and EVDO		Page 7 of 36

## 4.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	263-10dB	(DC-18GHz) 10 dB Attenuator	N/A		N/A	N/A
-	No.165	(30MHz - 1000MHz) RG58 Coax Cable	N/A		N/A	N/A
-	No.166	(1000-2650MHz) Microwave RF Cable	N/A		N/A	N/A
-	No.167	(100KHz - 100MHz) RG58 Coax Cable	N/A		N/A	N/A
Agilent	11713A	Attenuation/Switch Driver	12/4/2008	Annual	12/4/2009	3439A02645
Agilent	8449B	(1-26.5GHz) Pre-Amplifier	12/4/2008	Annual	12/4/2009	3008A00985
Agilent	8495A	(0-70dB) DC-4GHz Attenuator	N/A		N/A	N/A
Agilent	85650A	Quasi-Peak Adapter	3/13/2008	Annual	3/13/2009	2043A00301
Agilent	8566B	(100Hz-22GHz) Spectrum Analyzer	12/5/2008	Annual	12/5/2009	3638A08713
Agilent	8566B	Opt. 462 Impulse Bandwidth	12/5/2008	Annual	12/5/2009	3701A22204
Agilent	8591A	(9kHz-1.8GHz) Spectrum Analyzer	8/19/2008	Annual	8/19/2009	3144A02458
Agilent	8648D	(9kHz-4GHz) Signal Generator	10/11/2007	Biennial	10/11/2009	3613A00315
Agilent	8901A	Modulation Analyzer	8/18/2008	Annual	8/18/2009	2432A03467
Agilent	8903B	Audio Analyzer	8/18/2008	Annual	8/18/2009	3011A09025
Agilent	E4407B	ESA Spectrum Analyzer	3/13/2008	Annual	3/13/2009	US39210313
Agilent	E4432B	ESG-D Series Signal Generator	8/18/2008	Annual	8/18/2009	US40053896
Agilent	E4448A	(3Hz-50GHz) Spectrum Analyzer	12/5/2008	Annual	12/5/2009	US42510244
Agilent	E5515C	Wireless Communications Test Set	6/8/2007	Biennial	6/8/2009	GB46110872
Agilent	E5515C	Wireless Communications Test Set	6/8/2007	Biennial	6/8/2009	GB46310798
Agilent	E5515C	Wireless Communications Test Set	9/10/2008	Biennial	9/10/2010	GB41450275
Agilent	E8257D	(250kHz-20GHz) Signal Generator	3/8/2007	Biennial	3/8/2009	MY45470194
Compliance Design	Roberts	Dipole Set	11/9/2007	Biennial	11/9/2009	146
Compliance Design	Roberts	Dipole Set	11/9/2007	Biennial	11/9/2009	147
Emco	3115	Horn Antenna (1-18GHz)	9/24/2007	Biennial	9/24/2009	9704-5182
Emco	3115	Horn Antenna (1-18GHz)	10/4/2007	Biennial	10/4/2009	9205-3874
Emco	3121C-DB4	Dipole Antenna	1/23/2007	Biennial	1/23/2009	23951
Espec	ESX-2CA	Environmental Chamber	3/12/2008	Annual	3/12/2009	17620
Gigatronics	80701A	(0.05-18GHz) Power Sensor	8/18/2008	Annual	8/18/2009	1833460
Gigatronics	8651A	Universal Power Meter	8/18/2008	Annual	8/18/2009	1835299
Gigatronics	8651A	Universal Power Meter	8/18/2008	Annual	8/18/2009	8650319
K & L	11SH10	Band Pass Filter	N/A	Annual	N/A	1300/4000
K & L	11SH10	Band Pass Filter	N/A	Annual	N/A	4000/12000
MiniCircuits	VHF-1300+	High Pass Filter	N/A		N/A	30716
MiniCircuits	VHF-3100+	High Pass Filter	N/A		N/A	30721
Pasternack	PE2208-6	Bidirectional Coupler	N/A		N/A	N/A
Rohde & Schwarz	CMU200	Base Station Simulator	5/29/2008	Annual	5/29/2009	836371/0079
Rohde & Schwarz	CMU200	Base Station Simulator	7/23/2008	Annual	7/23/2009	109892
Rohde & Schwarz	NRVD	Dual Channel Power Meter	8/20/2008	Biennial	8/20/2010	101695
Rohde & Schwarz	NRVS	Single Channel Power Meter	7/3/2007	Biennial	7/3/2009	835360/0079
Rohde & Schwarz	NRV-Z32	Peak Power Sensor (100uW-2W)	12/5/2008	Biennial	12/5/2010	100155
Rohde & Schwarz	NRV-Z33	Peak Power Sensor (1mW-20W)	12/5/2008	Biennial	12/5/2010	100004
Rohde & Schwarz	NRV-Z53	Power Sensor	7/3/2007	Biennial	7/3/2009	846076/0007
Schwarzbeck	UHA9105	Dipole Antenna (400 - 1GHz) Rx	6/19/2007	Biennial	6/18/2009	9105-2404
Schwarzbeck	UHA9105	Dipole Antenna (400 - 1GHz) Tx	6/19/2007	Biennial	6/18/2009	9105-2403
Solar Electronics	8012-50-R-24-BNC	LISN	11/8/2007	Biennial	11/8/2009	310233
Sunol	DRH-118	Horn Antenna (1 - 18GHz)	5/9/2007	Biennial	5/9/2009	A050307

Table 4-1. Test Equipment

FCC ID: AEZSCP-PRO200	 FCC Pt. 22/24 CDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	 Reviewed by: Quality Manager
Test Report S/N: 0810281582.AEZ	Test Dates: 11/4/08 & 1/12/09	EUT Type: Cellular/PCS CDMA Phone with Bluetooth and EvDO

### 3.8 Radiated Spurious and Harmonic Emissions

§2.1053, 22.917(a), 24.238(a)

Spurious and harmonic radiated emissions are measured outdoors at our 3-meter test range. The equipment under test is placed on a wooden turntable 3-meters from the receive antenna. The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10<sup>th</sup> harmonic. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer reading. This level is recorded. For readings above 1 GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration. This device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits.

### 3.9 Peak-Average Ratio

§24.232(d)

A peak to average ratio measurement is performed at the conducted port of the EUT. For CDMA and WCDMA signals, the spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level. For GSM signals, an average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a bandwidth greater than the emission bandwidth.

### 3.10 Frequency Stability / Temperature Variation

§2.1055, 22.355, 24.235

The frequency stability of the transmitter is measured by:

- Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

*Specification – The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5 ppm) of the center frequency.*

#### Time Period and Procedure:

- The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
- The equipment is turned on in a "standby" condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
- Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A sufficient stabilization period at each temperature shall be used prior to each frequency requirement.

FCC ID: AEZSCP-PRO200	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 CDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	<b>SANYO</b> Reviewed by: Quality Manager
Test Report S/N: 0810281582.AEZ	Test Dates: 11/4/08 & 1/12/09	EUT Type: Cellular/PCS CDMA Phone with Bluetooth and EVDO	Page 8 of 36

## 5.0 SAMPLE CALCULATIONS

### Emission Designator

**Emission Designator = 1M25F9W**

CDMA BW = 1.25 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data) (Measured at the 99.75% power bandwidth)

### Spurious Radiated Emission - PCS Band

**Example: Channel 25 PCS Mode 2<sup>nd</sup> Harmonic (3702.50 MHz)**

The receive analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the receive analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 3702.50 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.501 dBm so this harmonic was  $25.501 \text{ dBm} - (-24.80) = 50.3 \text{ dBc}$ .

FCC ID: AEZSCP-PRO200	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 CDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	 <b>SANYO</b>	Reviewed by: Quality Manager
Test Report S/N: 0810281582.AEZ	Test Dates: 11/4/08 & 1/12/09	EUT Type: Cellular/PCS CDMA Phone with Bluetooth and EVDO		Page 10 of 36

## 6.0 TEST RESULTS

### 6.1 Summary

Company Name: Sanyo Fisher Company  
 FCC ID: AEZSCP-PRO200  
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)  
 Mode(s): CDMA

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
<b>TRANSMITTER MODE (TX)</b>					
2.1049, 22.917(a), 24.238(a)	Occupied Bandwidth	N/A	CONDUCTED	PASS	Section 7.0
2.1051, 22.917(a), 24.238(a)	Band Edge / Conducted Spurious Emissions	< 43 + 10log <sub>10</sub> (P[Watts]) at Band Edge and for all out-of-band emissions		PASS	Section 7.0
24.232(d)	Peak-Average Ratio	< 13 dB		PASS	Section 7.0
SAR Measurement Procedures for 3G Devices, June '06	Conducted Power Measurements for 3G Devices	N/A		PASS	FCC 3G Power Table
22.913(a)(2)	Effective Radiated Power	< 7 Watts max. ERP	RADIATED	PASS	Section 6.2
24.232(c)	Equivalent Isotropic Radiated Power	< 2 Watts max. EIRP		PASS	Section 6.3
2.1053, 22.917(a), 24.238(a)	Undesirable Emissions	< 43 + 10log <sub>10</sub> (P[Watts]) for all out-of-band emissions		PASS	Sections 6.4, 6.5
2.1055, 22.355, 24.235	Frequency Stability	< 2.5 ppm		PASS	Sections 6.6, 6.7
<b>RECEIVER MODE (RX) / DIGITAL EMISSIONS</b>					
15.107	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.107 limits	LINE CONDUCTED	PASS	Pt. 15B Test Report
15.109	General Field Strength Limits (Restricted Bands and Radiated Emissions Limits)	< FCC 15.109 limits	RADIATED (30MHz-1GHz) (1-25 GHz)	PASS	Pt. 15B Test Report
<b>RF EXPOSURE</b>					
2.1091 / 2.1093	SAR Test	1.6 W/kg (SAR Limit)	SAR	PASS	SAR Report

**Table 6-1. Summary of Test Results**

**Note: Conducted tests were performed on January 12, 2009.**

FCC ID: AEZSCP-PRO200	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 CDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	<b>SANYO</b>	Reviewed by: Quality Manager
Test Report S/N: 0810281582.AEZ	Test Dates: 11/4/08 & 1/12/09	EUT Type: Cellular/PCS CDMA Phone with Bluetooth and EvDO		Page 11 of 36

## 6.2 Effective Radiated Power Output Data

§22.913(a)(2)

**POWER: "All Up" Bits (Cellular CDMA Mode)**

Frequency [MHz]	Measured Level [dBm]	Substitute Level [dBm]	Antenna Gain [dBi]	Pol [H/V]	ERP [dBm]	ERP [Watts]	Battery Type
824.70	-14.900	23.70	0.00	V	23.70	0.234	Standard
836.52	-14.340	24.26	0.00	V	24.26	0.267	Standard
848.31	-14.010	24.59	0.00	V	24.59	0.288	Standard
848.31	-14.220	24.38	0.00	V	24.38	0.274	Extended

**Table 6-2. Effective Radiated Power Output Data**

**NOTES:**

Effective Radiated Power Output Measurements by Substitution Method  
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the dipole is measured. The ERP is recorded.

This device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits. This unit was tested with its standard battery and emissions were investigated with the unit powered by an extended battery.

FCC ID: AEZSCP-PRO200	 FCC Pt. 22/24 CDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	 Reviewed by: Quality Manager
Test Report S/N: 0810281582.AEZ	Test Dates: 11/4/08 & 1/12/09	EUT Type: Cellular/PCS CDMA Phone with Bluetooth and EvDO

### 6.3 Equivalent Isotropic Radiated Power Output Data

§24.232(c)

POWER: "All Up" Bits (PCS CDMA Mode)

Frequency [MHz]	Measured Level [dBm]	Substitute Level [dBm]	Antenna Gain [dBi]	Pol [H/V]	EIRP [dBm]	EIRP [Watts]	Battery Type
1851.25	-16.110	18.49	8.00	H	26.49	0.446	Standard
1880.00	-16.320	18.28	8.00	H	26.28	0.425	Standard
1908.75	-15.890	18.71	8.00	H	26.71	0.469	Standard
1908.75	-16.070	18.53	8.00	H	26.53	0.450	Extended

Table 6-3. Equivalent Isotropic Radiated Power Output Data

**NOTES:**

Equivalent Isotropic Radiated Power Measurements by Substitution Method  
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A Horn antenna was substituted in place of the EUT. This Horn antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the Horn antenna is measured. The difference between the gain of the horn and an isotropic antenna is taken into consideration and the EIRP is recorded.

This device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits. This unit was tested with its standard battery and emissions were investigated with the unit powered by an extended battery.

FCC ID: AEZSCP-PRO200	 FCC Pt. 22/24 CDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	 Reviewed by: Quality Manager
Test Report S/N: 0810281582.AEZ	Test Dates: 11/4/08 & 1/12/09	EUT Type: Cellular/PCS CDMA Phone with Bluetooth and EvDO

## 6.4 Cellular CDMA Radiated Measurements

§2.1053, 22.917(a)

### Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 824.70 MHz  
 CHANNEL: 1013  
 MEASURED OUTPUT POWER: 24.590 dBm = 0.288 W  
 MODULATION SIGNAL: CDMA (Internal)  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  37.59 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
1649.40	-64.15	6.08	-58.07	V	82.7
2474.10	-70.15	6.08	-64.07	V	88.7
3298.80	-67.50	6.53	-60.97	V	85.6
4123.50	-94.05	6.87	-87.18	V	111.8
4948.20	-91.89	7.21	-84.68	V	109.3

Table 6-4. Radiated Spurious Data (Cellular CDMA Mode – Ch. 1013)

#### NOTES:

Radiated Spurious Emission Measurements by Substitution Method  
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits. This unit was tested with its standard battery and emissions were investigated with the unit powered by an extended battery.

FCC ID: AEZSCP-PRO200	 FCC Pt. 22/24 CDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	 Reviewed by: Quality Manager
Test Report S/N: 0810281582.AEZ	Test Dates: 11/4/08 & 1/12/09	EUT Type: Cellular/PCS CDMA Phone with Bluetooth and EvDO

## Cellular CDMA Radiated Measurements (Cont'd)

§2.1053, 22.917(a)

### Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 836.52 MHz  
 CHANNEL: 384  
 MEASURED OUTPUT POWER: 24.590 dBm = 0.288 W  
 MODULATION SIGNAL: CDMA (Internal)  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  37.59 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBD)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
1673.04	-70.33	6.09	-64.24	V	88.8
2509.56	-68.73	6.55	-62.17	V	86.8
3346.08	-65.34	6.89	-58.45	V	83.0
4182.60	-92.09	7.43	-84.66	V	109.3
5019.12	-90.81	8.35	-82.46	V	107.1

Table 6-5. Radiated Spurious Data (Cellular CDMA Mode – Ch. 384)

#### NOTES:

Radiated Spurious Emission Measurements by Substitution Method  
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits. This unit was tested with its standard battery and emissions were investigated with the unit powered by an extended battery.

FCC ID: AEZSCP-PRO200	 FCC Pt. 22/24 CDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	 Reviewed by: Quality Manager
Test Report S/N: 0810281582.AEZ	Test Dates: 11/4/08 & 1/12/09	EUT Type: Cellular/PCS CDMA Phone with Bluetooth and EvDO

## Cellular CDMA Radiated Measurements (Cont'd)

§2.1053, 22.917(a)

### Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 848.31 MHz  
 CHANNEL: 777  
 MEASURED OUTPUT POWER: 24.590 dBm = 0.288 W  
 MODULATION SIGNAL: CDMA (Internal)  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  37.59 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
1696.62	-64.10	6.09	-58.01	V	82.6
2544.93	-66.18	6.57	-59.61	V	84.2
3393.24	-64.61	6.91	-57.70	V	82.3
4241.55	-92.29	7.65	-84.65	V	109.2
5089.86	-90.48	8.33	-82.15	V	106.7

Table 6-6. Radiated Spurious Data (Cellular CDMA Mode – Ch. 777)

#### NOTES:

Radiated Spurious Emission Measurements by Substitution Method  
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits. This unit was tested with its standard battery and emissions were investigated with the unit powered by an extended battery.

FCC ID: AEZSCP-PRO200	 FCC Pt. 22/24 CDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	 Reviewed by: Quality Manager
Test Report S/N: 0810281582.AEZ	Test Dates: 11/4/08 & 1/12/09	EUT Type: Cellular/PCS CDMA Phone with Bluetooth and EvDO

## 6.5 PCS CDMA Radiated Measurements

§2.1053, 24.238(a)

### Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1851.25 MHz  
 CHANNEL: 25  
 MEASURED OUTPUT POWER: 26.710 dBm = 0.469 W  
 MODULATION SIGNAL: CDMA (Internal)  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  39.71 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
3702.50	-60.10	9.02	-51.08	H	77.8
5553.75	-59.96	10.40	-49.56	H	76.3
7405.00	-85.97	10.51	-75.46	H	102.2
9256.25	-84.97	11.84	-73.13	H	99.8
11107.50	-82.59	12.76	-69.83	H	96.5

Table 6-7. Radiated Spurious Data (PCS CDMA Mode – Ch. 25)

#### NOTES:

Radiated Spurious Emission Measurements by Substitution Method  
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits. This unit was tested with its standard battery and emissions were investigated with the unit powered by an extended battery.

FCC ID: AEZSCP-PRO200	 FCC Pt. 22/24 CDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	 Reviewed by: Quality Manager
Test Report S/N: 0810281582.AEZ	Test Dates: 11/4/08 & 1/12/09	EUT Type: Cellular/PCS CDMA Phone with Bluetooth and EvDO

## PCS CDMA Radiated Measurements (Cont'd)

§2.1053, 24.238(a)

### Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1880.00 MHz  
 CHANNEL: 600  
 MEASURED OUTPUT POWER: 26.710 dBm = 0.469 W  
 MODULATION SIGNAL: CDMA (Internal)  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  39.71 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
3760.00	-59.84	8.99	-50.85	H	77.6
5640.00	-61.13	10.40	-50.73	H	77.4
7520.00	-85.96	10.62	-75.34	H	102.1
9400.00	-84.74	11.70	-73.04	H	99.7
11280.00	-81.89	12.69	-69.20	H	95.9

Table 6-8. Radiated Spurious Data (PCS CDMA Mode – Ch. 600)

#### NOTES:

Radiated Spurious Emission Measurements by Substitution Method  
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits. This unit was tested with its standard battery and emissions were investigated with the unit powered by an extended battery.

FCC ID: AEZSCP-PRO200	 FCC Pt. 22/24 CDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	 Reviewed by: Quality Manager
Test Report S/N: 0810281582.AEZ	Test Dates: 11/4/08 & 1/12/09	EUT Type: Cellular/PCS CDMA Phone with Bluetooth and EvDO

## PCS CDMA Radiated Measurements (Cont'd)

§2.1053, 24.238(a)

### Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1908.75 MHz  
 CHANNEL: 1175  
 MEASURED OUTPUT POWER: 26.710 dBm = 0.469 W  
 MODULATION SIGNAL: CDMA (Internal)  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  39.71 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
3817.50	-51.19	8.97	-42.22	H	68.9
5726.25	-58.71	10.40	-48.31	H	75.0
7635.00	-85.85	10.71	-75.14	H	101.8
9543.75	-84.53	11.64	-72.89	H	99.6
11452.50	-81.20	12.62	-68.58	H	95.3

Table 6-9. Radiated Spurious Data (PCS CDMA Mode – Ch. 1175)

#### NOTES:

Radiated Spurious Emission Measurements by Substitution Method  
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits. This unit was tested with its standard battery and emissions were investigated with the unit powered by an extended battery.

FCC ID: AEZSCP-PRO200	 FCC Pt. 22/24 CDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	 Reviewed by: Quality Manager
Test Report S/N: 0810281582.AEZ	Test Dates: 11/4/08 & 1/12/09	EUT Type: Cellular/PCS CDMA Phone with Bluetooth and EvDO

## 6.6 Cellular CDMA Frequency Stability Measurements

§2.1055, 22.355


OPERATING FREQUENCY: 836,520,000 Hz  
 CHANNEL: 384  
 REFERENCE VOLTAGE: 3.7 VDC  
 DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.70	+ 20 (Ref)	836,519,986	-14	-0.000002
100 %		- 30	836,519,991	-9	-0.000001
100 %		- 20	836,520,012	12	0.000001
100 %		- 10	836,519,982	-18	-0.000002
100 %		0	836,520,016	16	0.000002
100 %		+ 10	836,519,981	-19	-0.000002
100 %		+ 20	836,519,986	-14	-0.000002
100 %		+ 30	836,519,982	-18	-0.000002
100 %		+ 40	836,519,984	-16	-0.000002
100 %		+ 50	836,519,979	-21	-0.000003
115 %		+ 20	836,519,978	-22	-0.000003
BATT. ENDPOINT	3.38	+ 20	836,519,972	-28	-0.000003

Table 6-10. Frequency Stability Data (Cellular CDMA Mode – Ch. 384)

FCC ID: AEZSCP-PRO200	 PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 CDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	 Reviewed by: Quality Manager
Test Report S/N: 0810281582.AEZ	Test Dates: 11/4/08 & 1/12/09	EUT Type: Cellular/PCS CDMA Phone with Bluetooth and EvDO	Page 20 of 36

**Cellular CDMA Frequency Stability Measurements (Cont'd)**  
§2.1055, 22.355

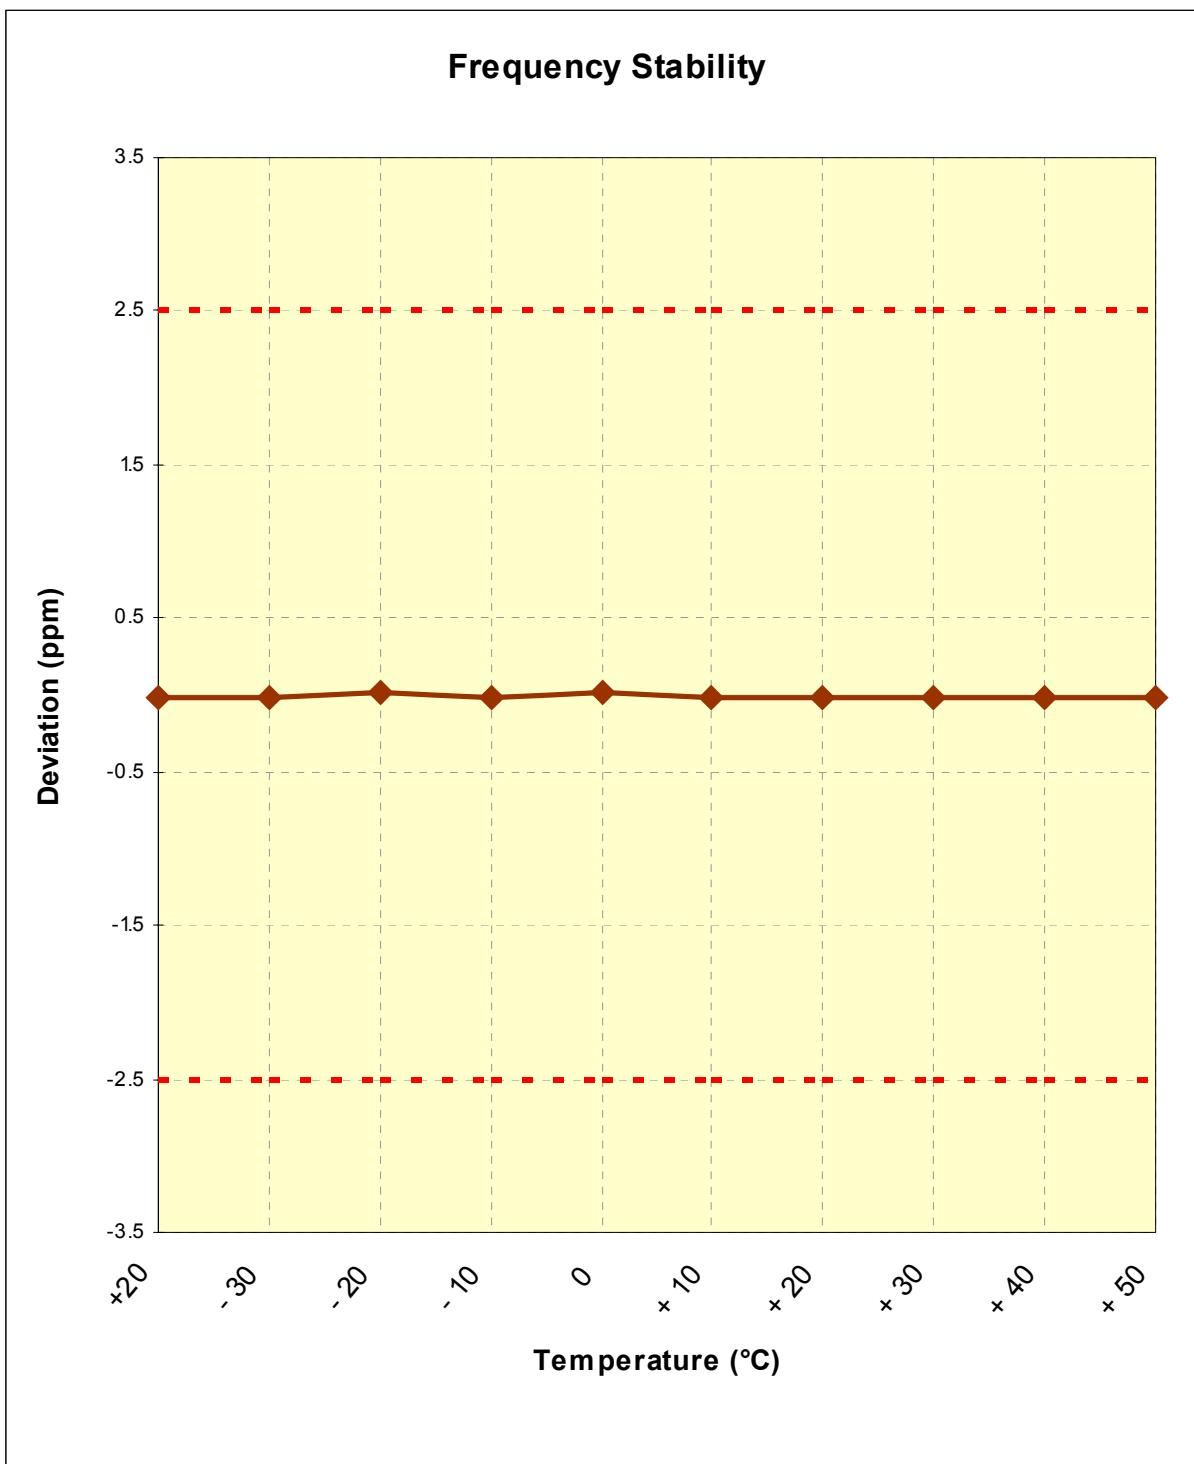

**Figure 6-1. Frequency Stability Graph (Cellular CDMA Mode – Ch. 384)**

FCC ID: AEZSCP-PRO200	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 CDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	<b>SANYO</b>	Reviewed by: Quality Manager
Test Report S/N: 0810281582.AEZ	Test Dates: 11/4/08 & 1/12/09	EUT Type: Cellular/PCS CDMA Phone with Bluetooth and EvDO		Page 21 of 36

## 6.7 PCS CDMA Frequency Stability Measurements

§2.1055, 24.235


OPERATING FREQUENCY: 1,880,000,000 Hz  
 CHANNEL: 600  
 REFERENCE VOLTAGE: 3.7 VDC  
 DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.70	+ 20 (Ref)	1,879,999,981	-19	-0.000001
100 %		- 30	1,880,000,021	21	0.000001
100 %		- 20	1,880,000,018	18	0.000001
100 %		- 10	1,880,000,015	15	0.000001
100 %		0	1,879,999,981	-19	-0.000001
100 %		+ 10	1,880,000,014	14	0.000001
100 %		+ 20	1,879,999,981	-19	-0.000001
100 %		+ 30	1,879,999,979	-21	-0.000001
100 %		+ 40	1,879,999,988	-12	-0.000001
100 %		+ 50	1,879,999,984	-16	-0.000001
115 %		+ 20	1,879,999,979	-21	-0.000001
BATT. ENDPOINT	3.38	+ 20	1,879,999,968	-32	-0.000002

Table 6-11. Frequency Stability Data (PCS CDMA Mode – Ch. 600)

FCC ID: AEZSCP-PRO200	 FCC Pt. 22/24 CDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	 Reviewed by: Quality Manager
Test Report S/N: 0810281582.AEZ	Test Dates: 11/4/08 & 1/12/09	EUT Type: Cellular/PCS CDMA Phone with Bluetooth and EvDO


**PCS CDMA Frequency Stability Measurements (Cont'd)**  
§2.1055, 24.235

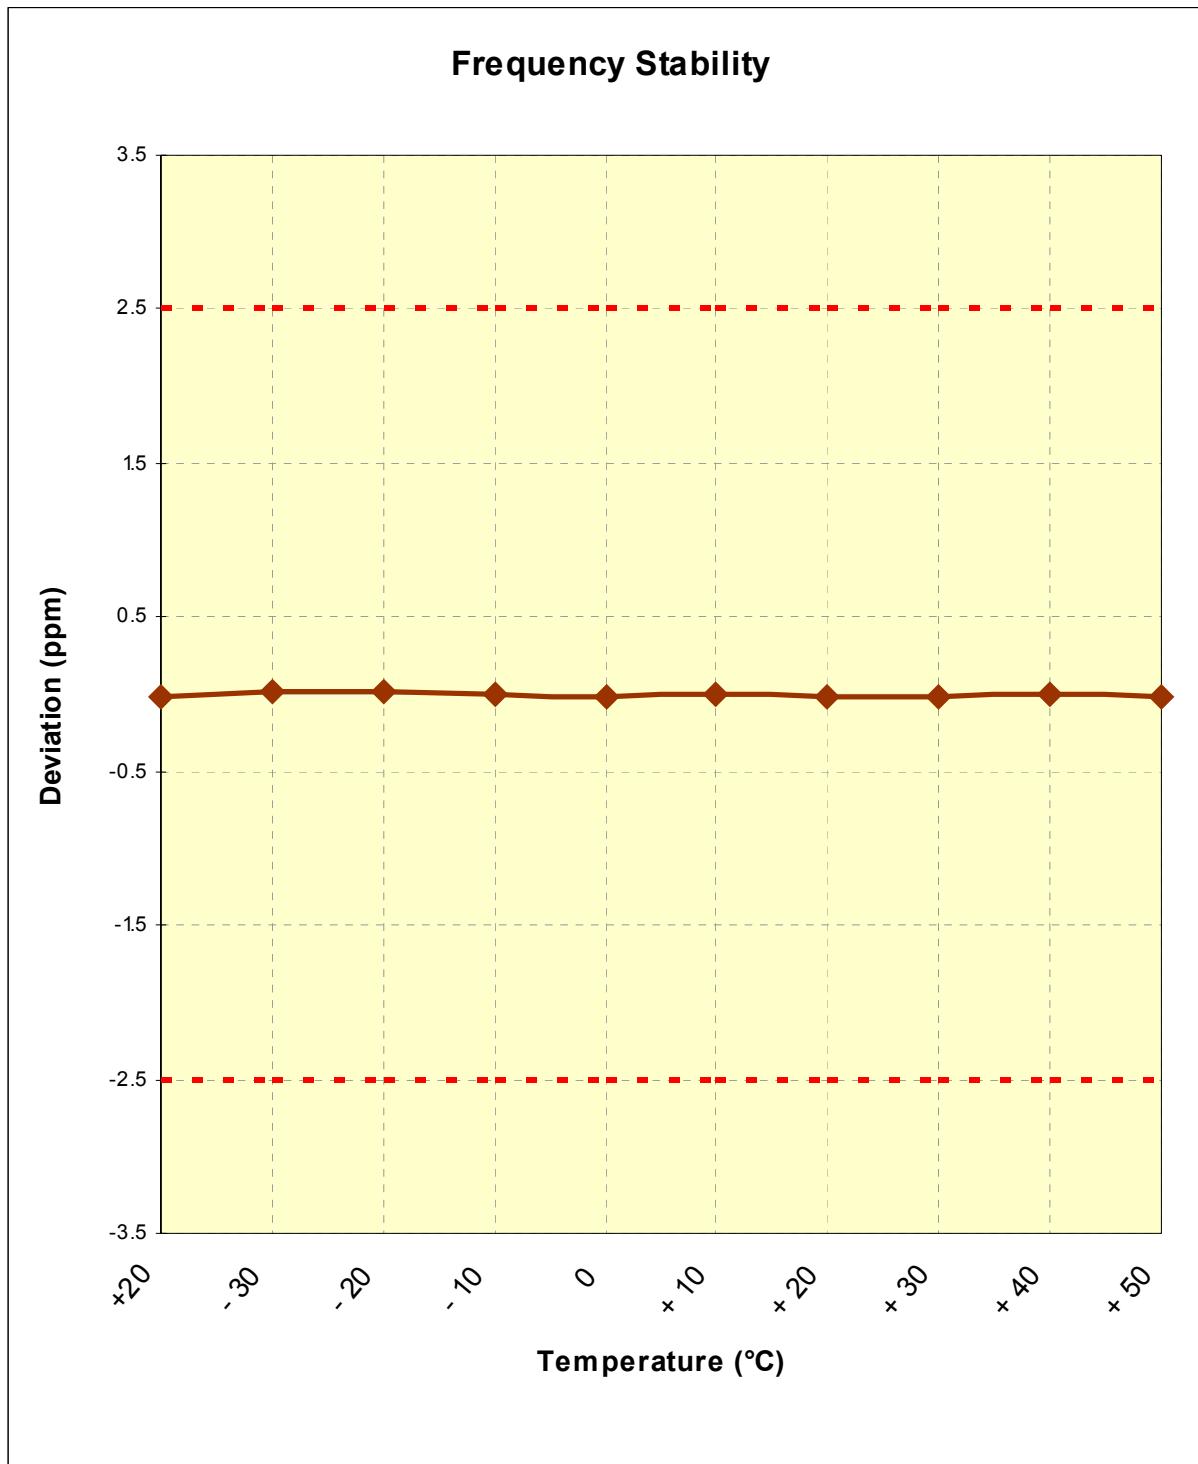


**Figure 6-2. Frequency Stability Graph (PCS CDMA Mode – Ch. 600)**

FCC ID: AEZSCP-PRO200	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 CDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	<b>SANYO</b>	Reviewed by: Quality Manager
Test Report S/N: 0810281582.AEZ	Test Dates: 11/4/08 & 1/12/09	EUT Type: Cellular/PCS CDMA Phone with Bluetooth and EvDO		Page 23 of 36

## 7.0 PLOT(S) OF EMISSIONS

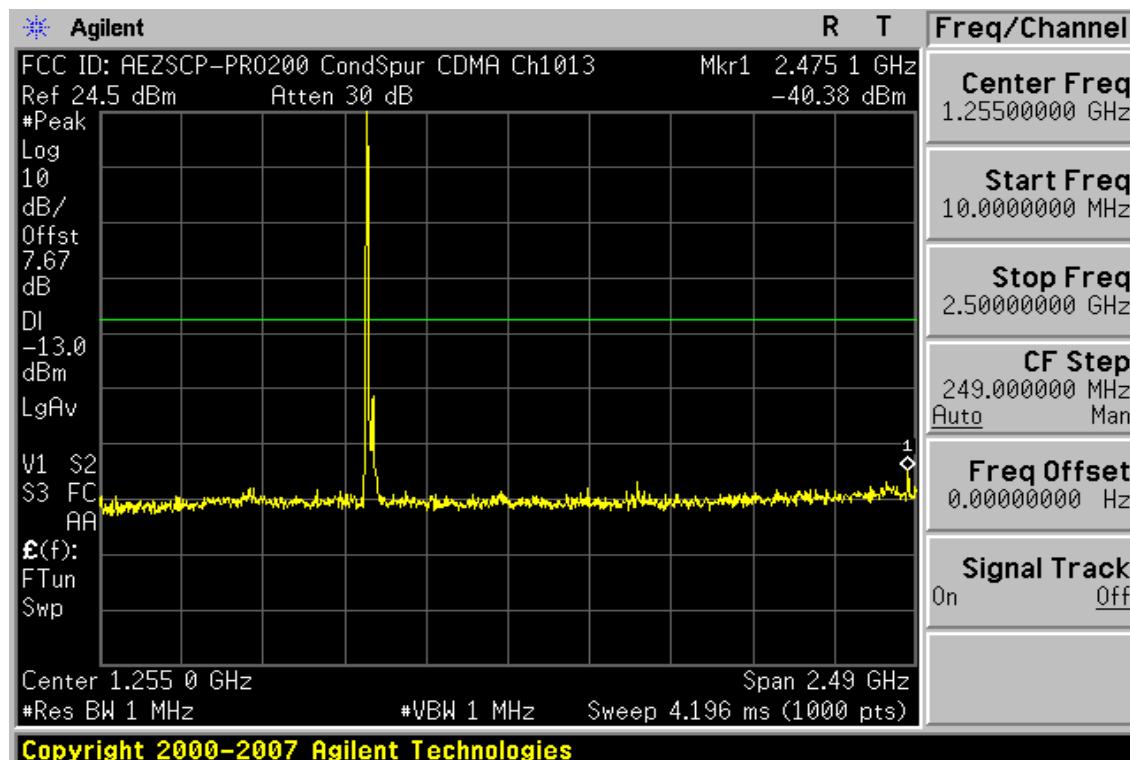


Plot 7-1. Conducted Spurious Plot (Cellular CDMA Mode – Ch. 1013)

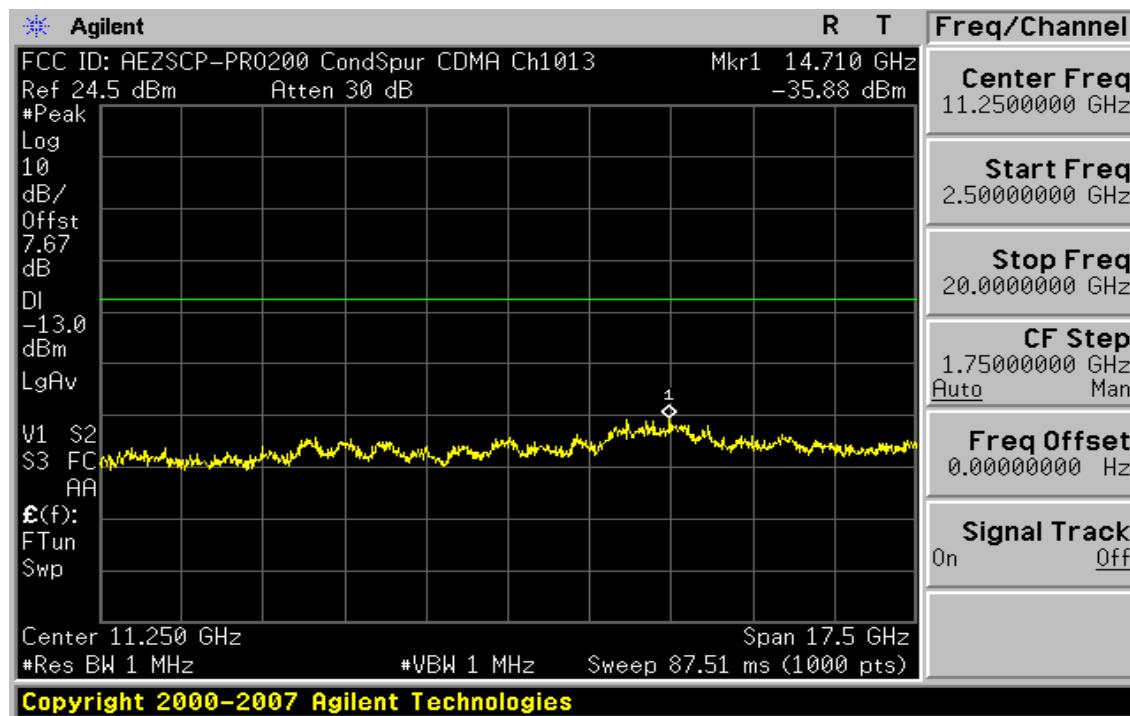

Plot 7-2. Conducted Spurious Plot (Cellular CDMA Mode – Ch. 1013)

FCC ID: AEZSCP-PRO200	FCC Pt. 22/24 CDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0810281582.AEZ	Test Dates: 11/4/08 & 1/12/09	EUT Type: Cellular/PCS CDMA Phone with Bluetooth and EVDO	Page 24 of 36

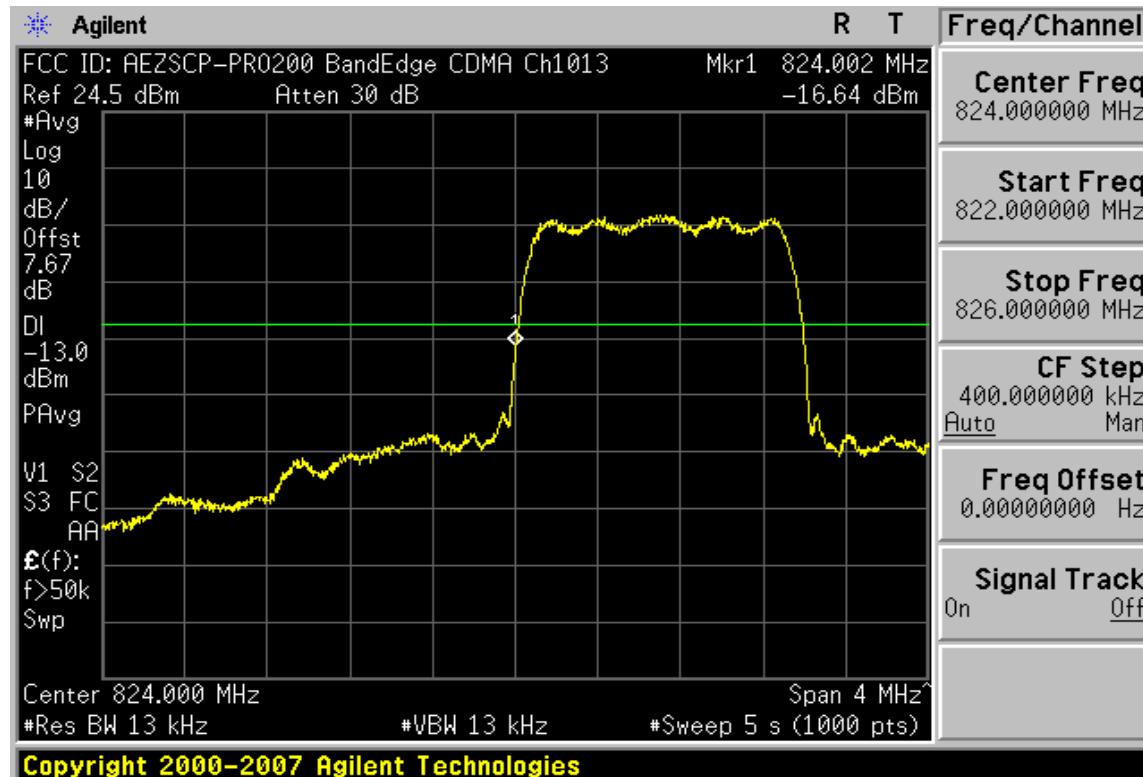


Plot 7-3. Band Edge Plot (Cellular CDMA Mode – Ch. 1013)




Plot 7-4. 4MHz Span Plot (Cellular CDMA Mode – Ch. 1013)

FCC ID: AEZSCP-PRO200	 <b>PCTEST</b> <small>ENGINEERING LABORATORY, INC.</small>		FCC Pt. 22/24 CDMA MEASUREMENT REPORT <small>(CLASS II PERMISSIVE CHANGE)</small>	Reviewed by: <b>SANYO</b> <small>Quality Manager</small>
Test Report S/N: 0810281582.AEZ	Test Dates: 11/4/08 & 1/12/09	EUT Type: Cellular/PCS CDMA Phone with Bluetooth and EVDO		Page 25 of 36

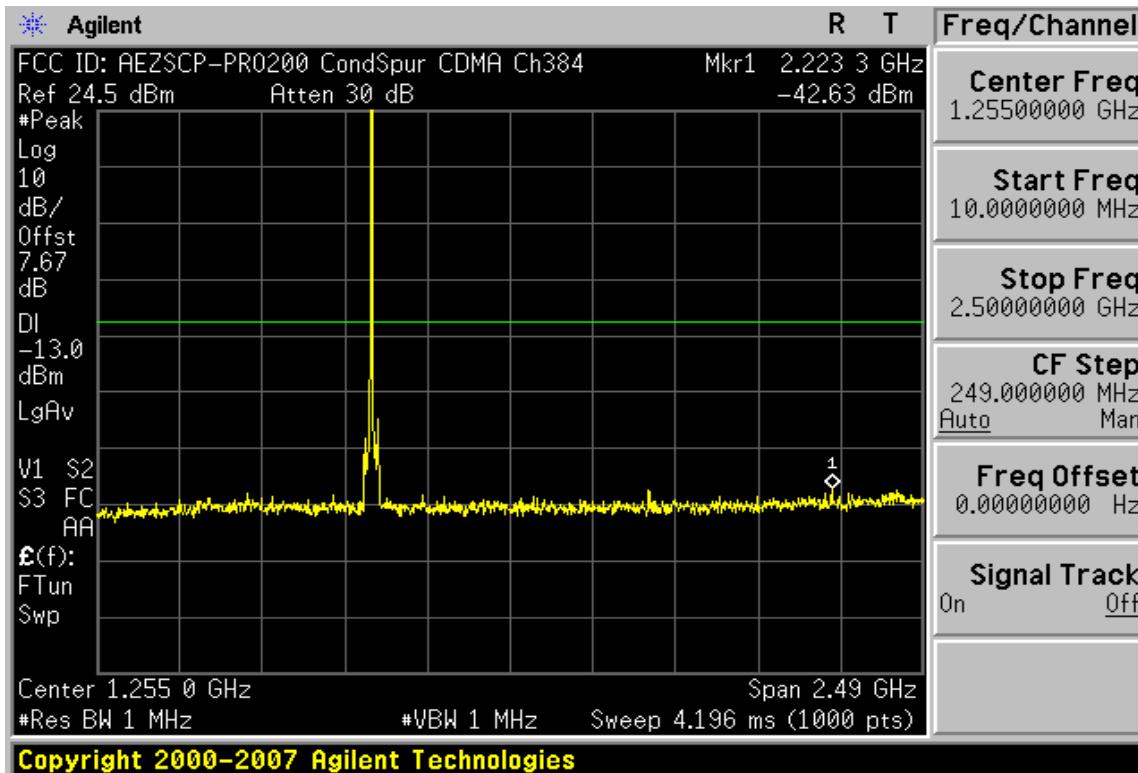


Plot 7-5. Conducted Spurious Plot (Cellular CDMA Mode – Ch. 384)

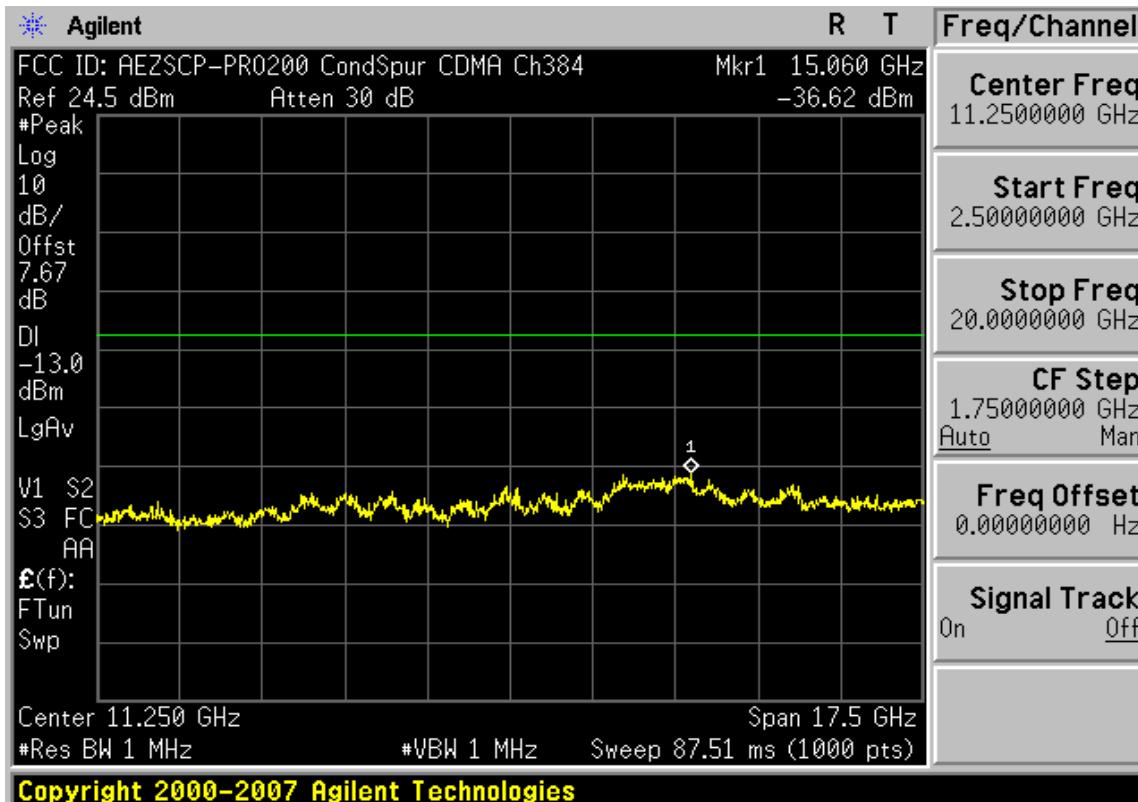


Plot 7-6. Conducted Spurious Plot (Cellular CDMA Mode – Ch. 384)

FCC ID: AEZSCP-PRO200	FCC Pt. 22/24 CDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: <b>SANYO</b> Quality Manager
Test Report S/N: 0810281582.AEZ	Test Dates: 11/4/08 & 1/12/09	EUT Type: Cellular/PCS CDMA Phone with Bluetooth and EVDO	Page 26 of 36

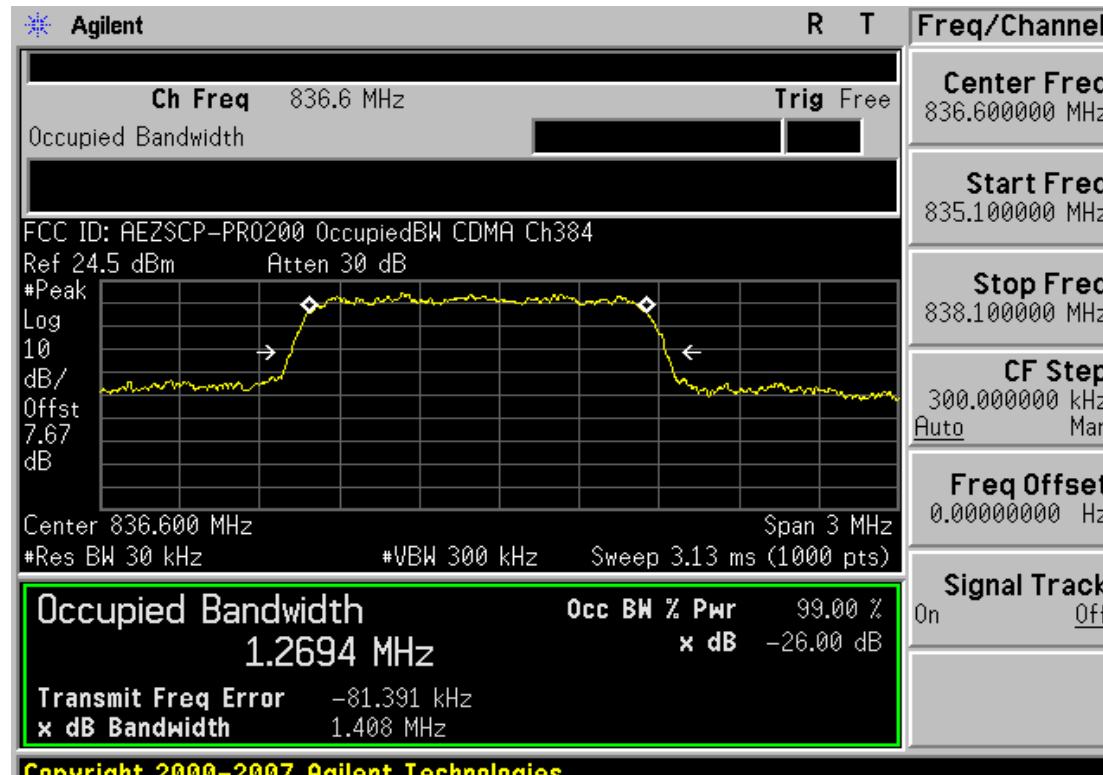


Plot 7-7. Occupied Bandwidth Plot (Cellular CDMA Mode – Ch. 384)

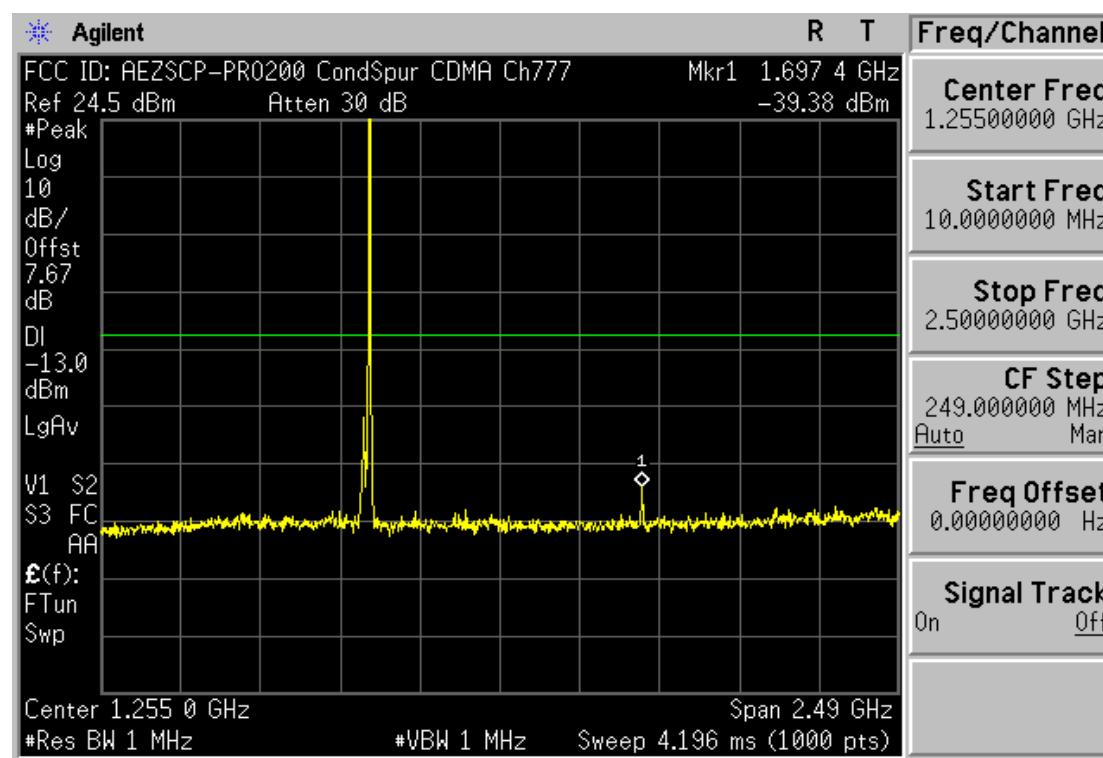


Plot 7-8. Conducted Spurious Plot (Cellular CDMA Mode – Ch. 777)

FCC ID: AEZSCP-PRO200	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 CDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	<b>SANYO</b>	Reviewed by: Quality Manager
Test Report S/N: 0810281582.AEZ	Test Dates: 11/4/08 & 1/12/09	EUT Type: Cellular/PCS CDMA Phone with Bluetooth and EVDO		Page 27 of 36

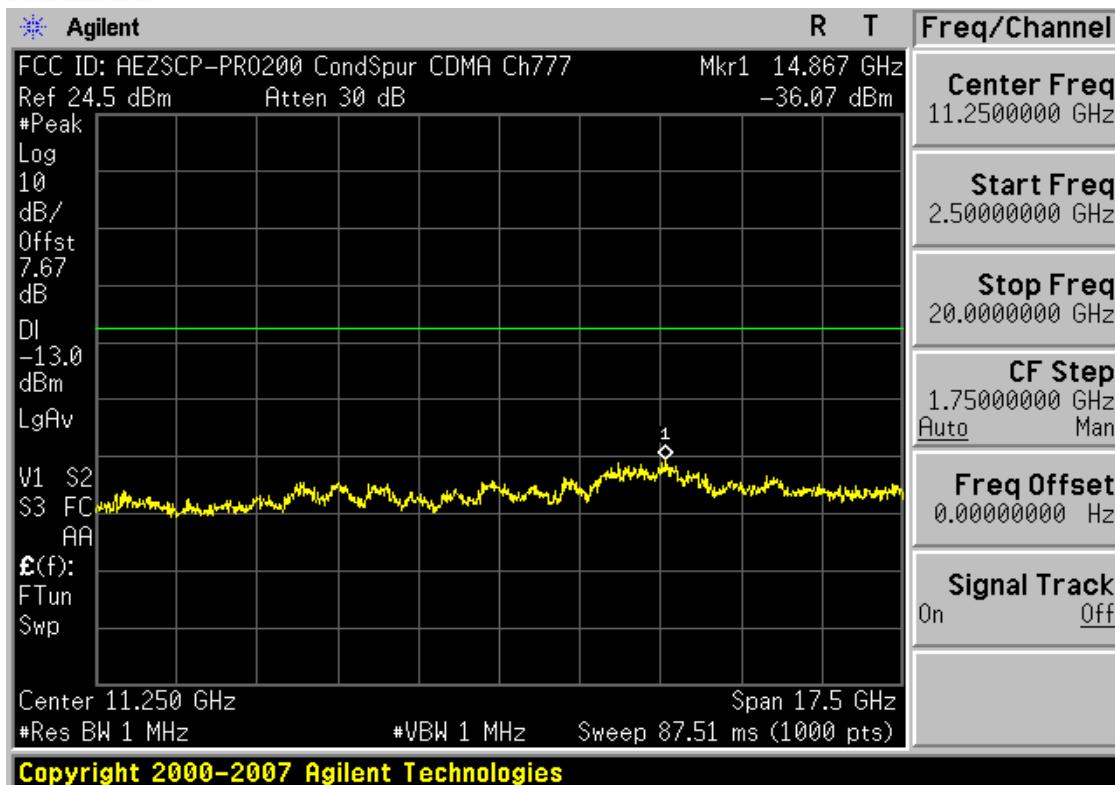


Plot 7-9. Conducted Spurious Plot (Cellular CDMA Mode – Ch. 777)

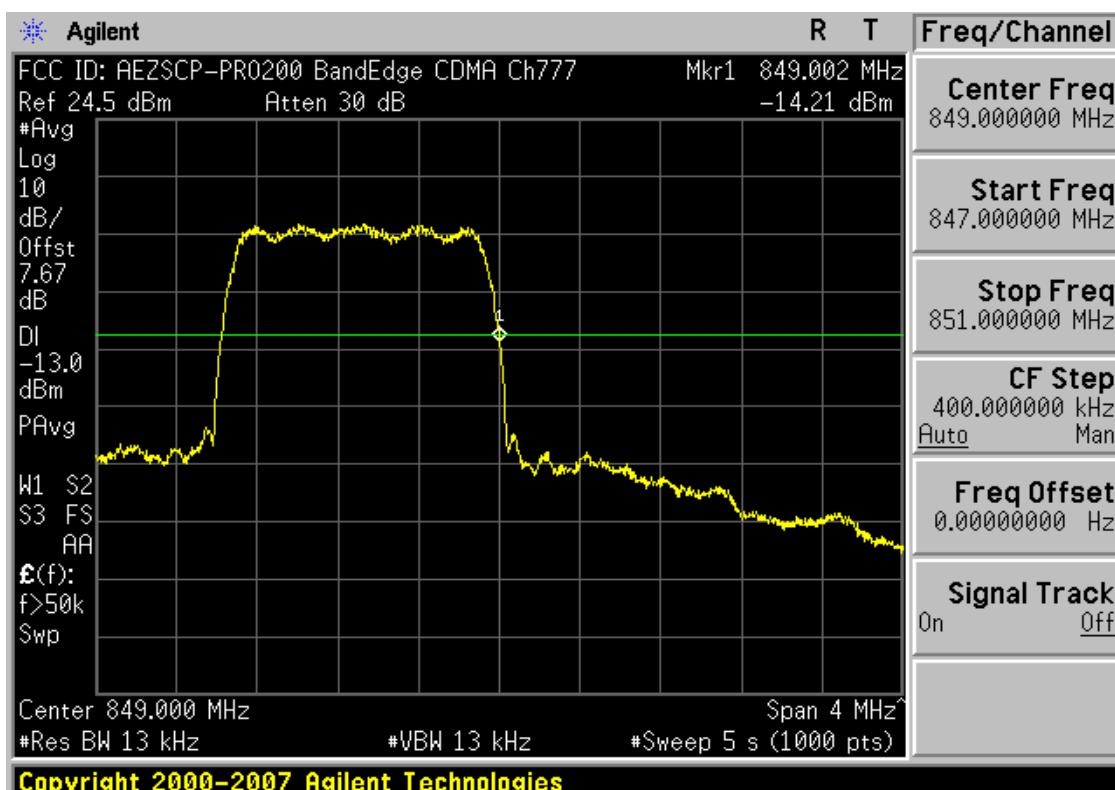


Plot 7-10. Band Edge Plot (Cellular CDMA Mode – Ch. 777)

FCC ID: AEZSCP-PRO200	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 CDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	Reviewed by: <b>SANYO</b> Quality Manager
Test Report S/N: 0810281582.AEZ	Test Dates: 11/4/08 & 1/12/09	EUT Type: Cellular/PCS CDMA Phone with Bluetooth and EVDO	Page 28 of 36

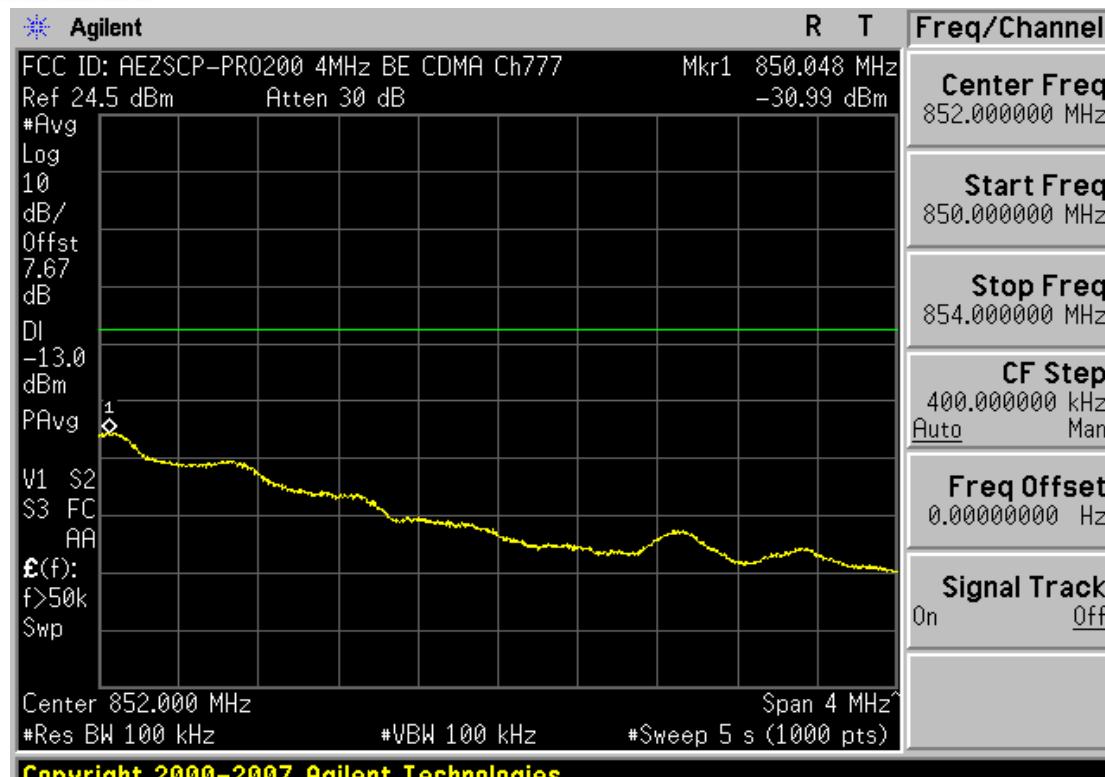


Plot 7-11. 4MHz Span Plot (Cellular CDMA Mode – Ch. 777)

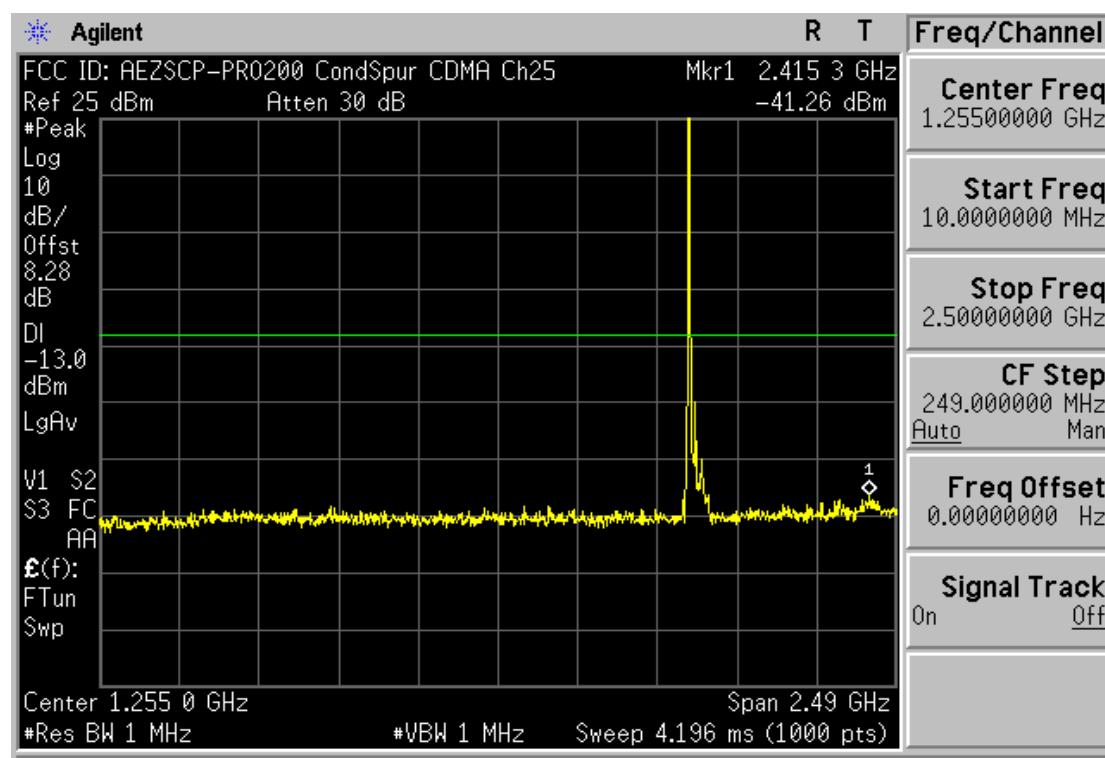


Plot 7-12. Conducted Spurious Plot (PCS CDMA Mode – Ch. 25)

FCC ID: AEZSCP-PRO200	FCC Pt. 22/24 CDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: <b>SANYO</b> Quality Manager
Test Report S/N: 0810281582.AEZ	Test Dates: 11/4/08 & 1/12/09	EUT Type: Cellular/PCS CDMA Phone with Bluetooth and EVDO	Page 29 of 36

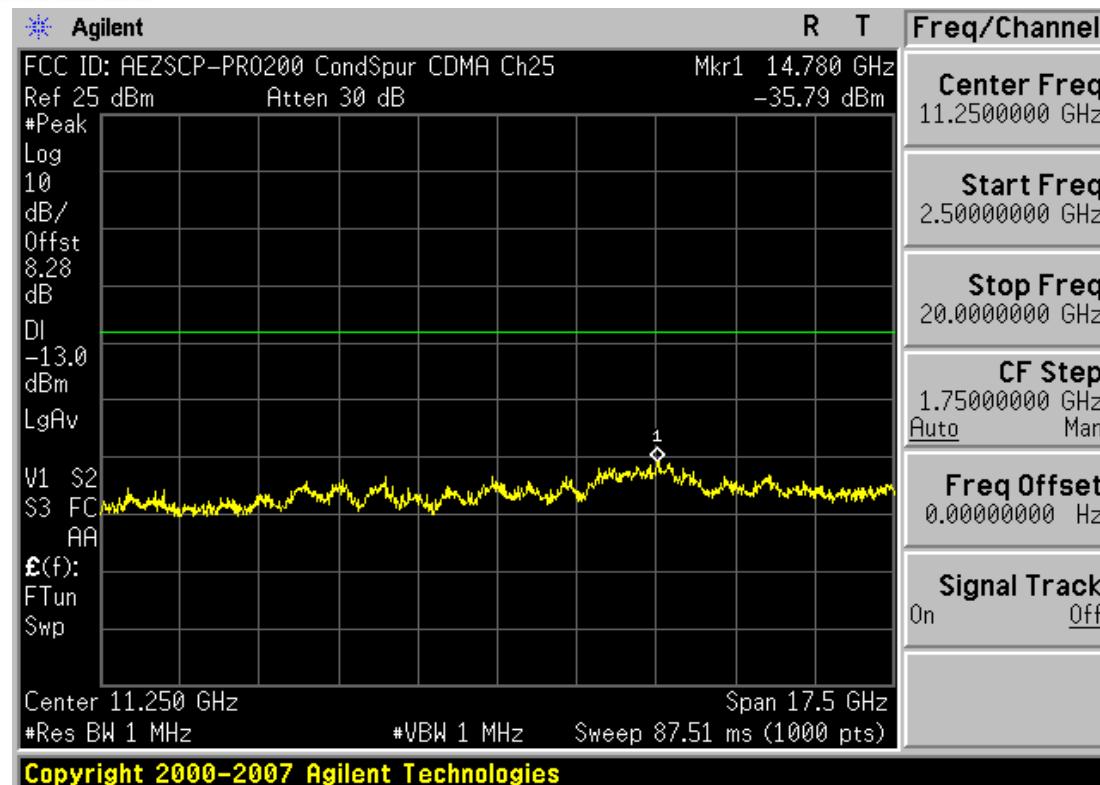


Plot 7-13. Conducted Spurious Plot (PCS CDMA Mode – Ch. 25)

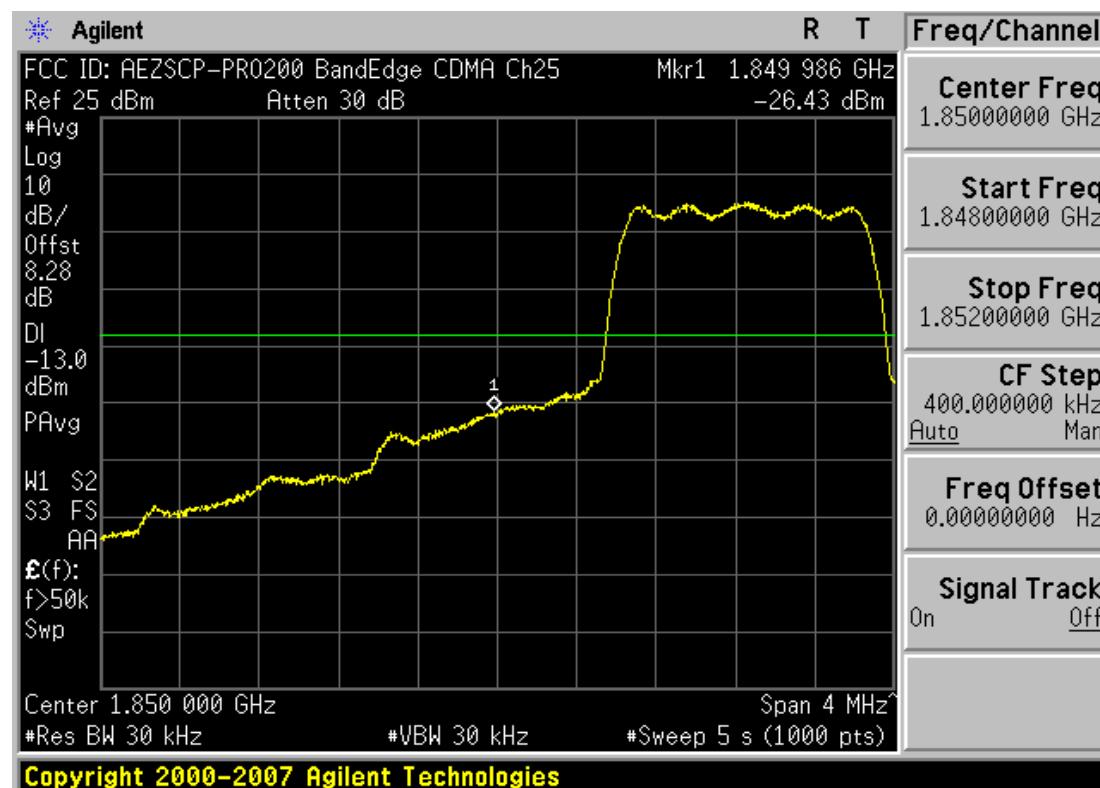


Plot 7-14. Band Edge Plot (PCS CDMA Mode – Ch. 25)

FCC ID: AEZSCP-PRO200	FCC Pt. 22/24 CDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: <b>SANYO</b> Quality Manager
Test Report S/N: 0810281582.AEZ	Test Dates: 11/4/08 & 1/12/09	EUT Type: Cellular/PCS CDMA Phone with Bluetooth and EVDO	Page 30 of 36

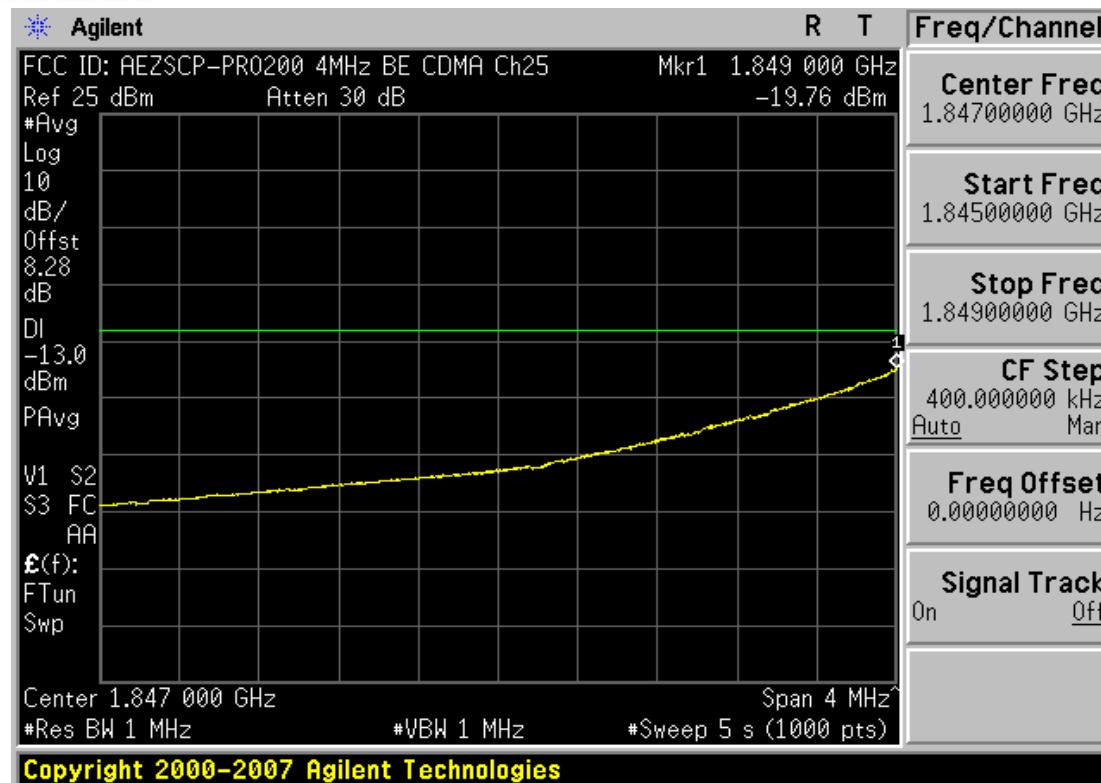


Plot 7-15. 4MHz Span Plot (PCS CDMA Mode – Ch. 25)

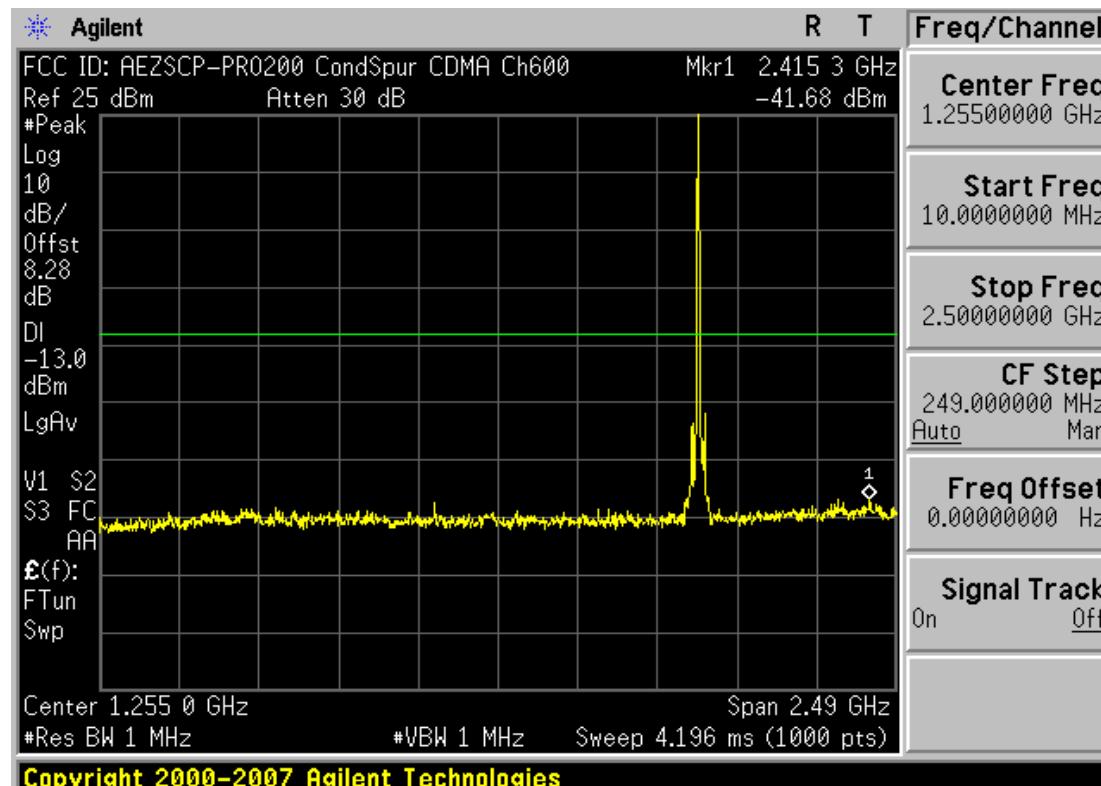

Plot 7-16. Conducted Spurious Plot (PCS CDMA Mode – Ch. 600)

FCC ID: AEZSCP-PRO200	FCC Pt. 22/24 CDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: <b>SANYO</b> Quality Manager
Test Report S/N: 0810281582.AEZ	Test Dates: 11/4/08 & 1/12/09	EUT Type: Cellular/PCS CDMA Phone with Bluetooth and EvDO	Page 31 of 36

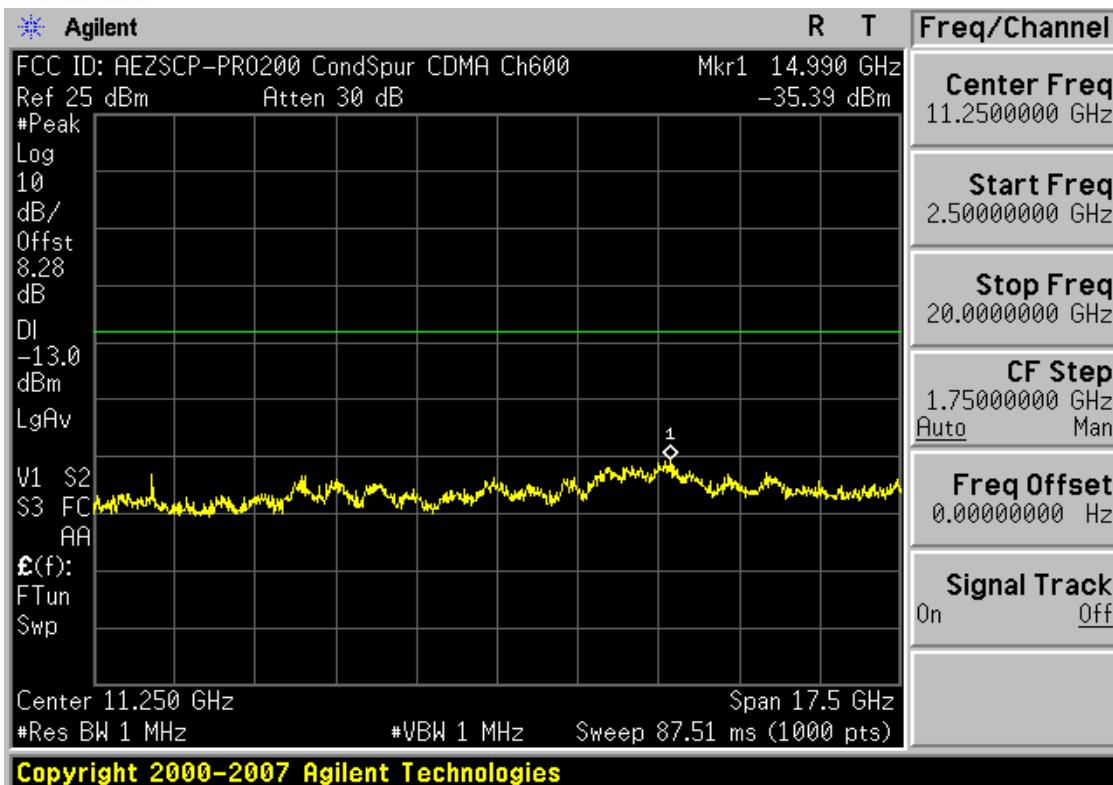


Plot 7-17. Conducted Spurious Plot (PCS CDMA Mode – Ch. 600)




Plot 7-18. Occupied Bandwidth Plot (PCS CDMA Mode – Ch. 600)

FCC ID: AEZSCP-PRO200	FCC Pt. 22/24 CDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: <b>SANYO</b> Quality Manager
Test Report S/N: 0810281582.AEZ	Test Dates: 11/4/08 & 1/12/09	EUT Type: Cellular/PCS CDMA Phone with Bluetooth and EVDO	Page 32 of 36

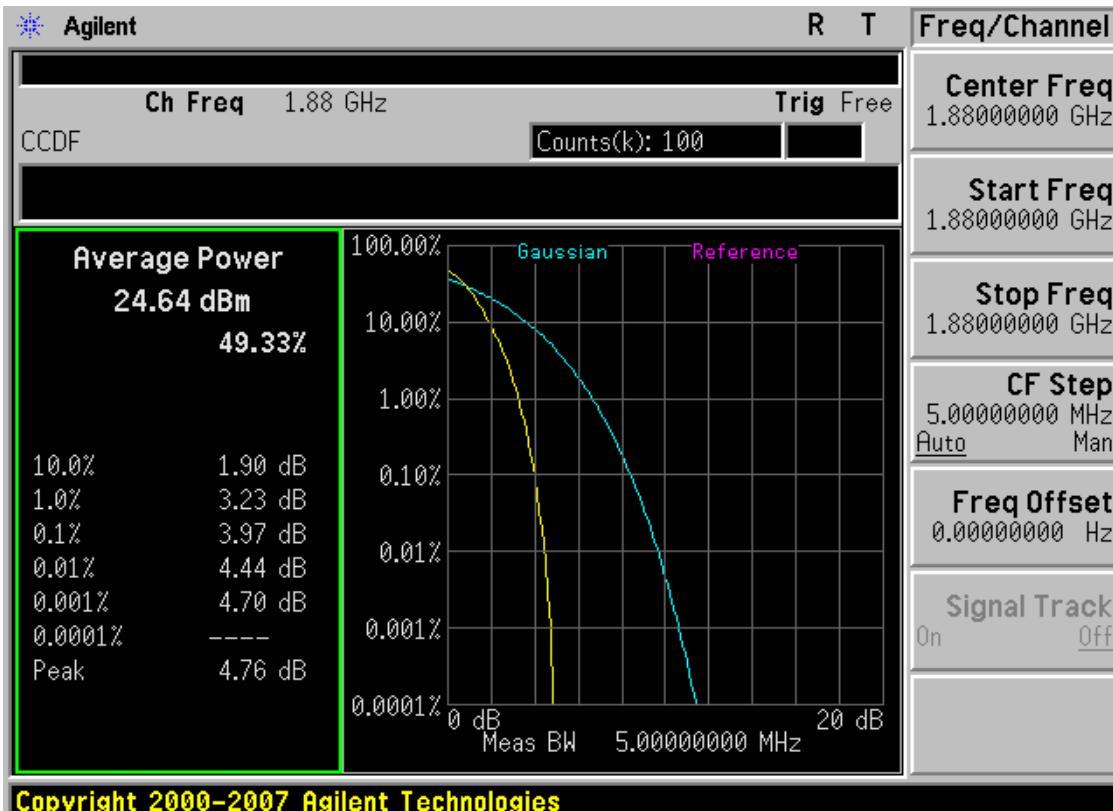


Plot 7-19. Peak-Average Ratio Plot (PCS CDMA Mode – Ch. 600)

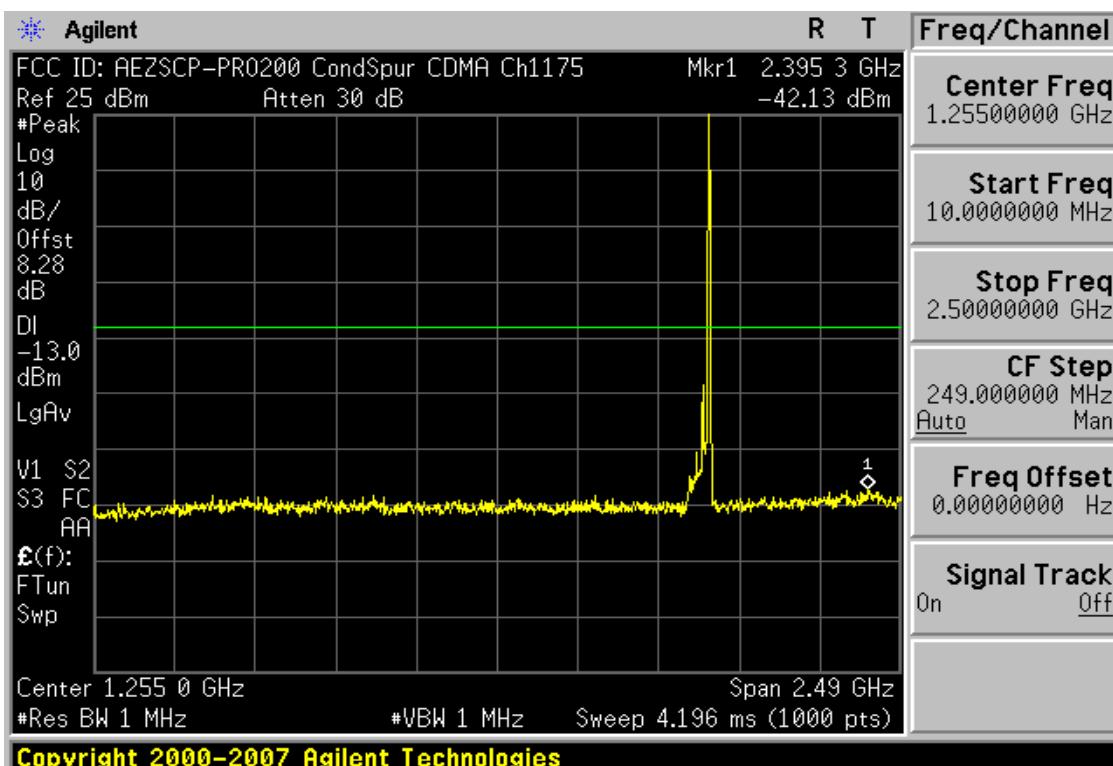


Plot 7-20. Conducted Spurious Plot (PCS CDMA Mode – Ch. 1175)

FCC ID: AEZSCP-PRO200	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 CDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	<b>SANYO</b>	Reviewed by: Quality Manager
Test Report S/N: 0810281582.AEZ	Test Dates: 11/4/08 & 1/12/09	EUT Type: Cellular/PCS CDMA Phone with Bluetooth and EvDO		Page 33 of 36

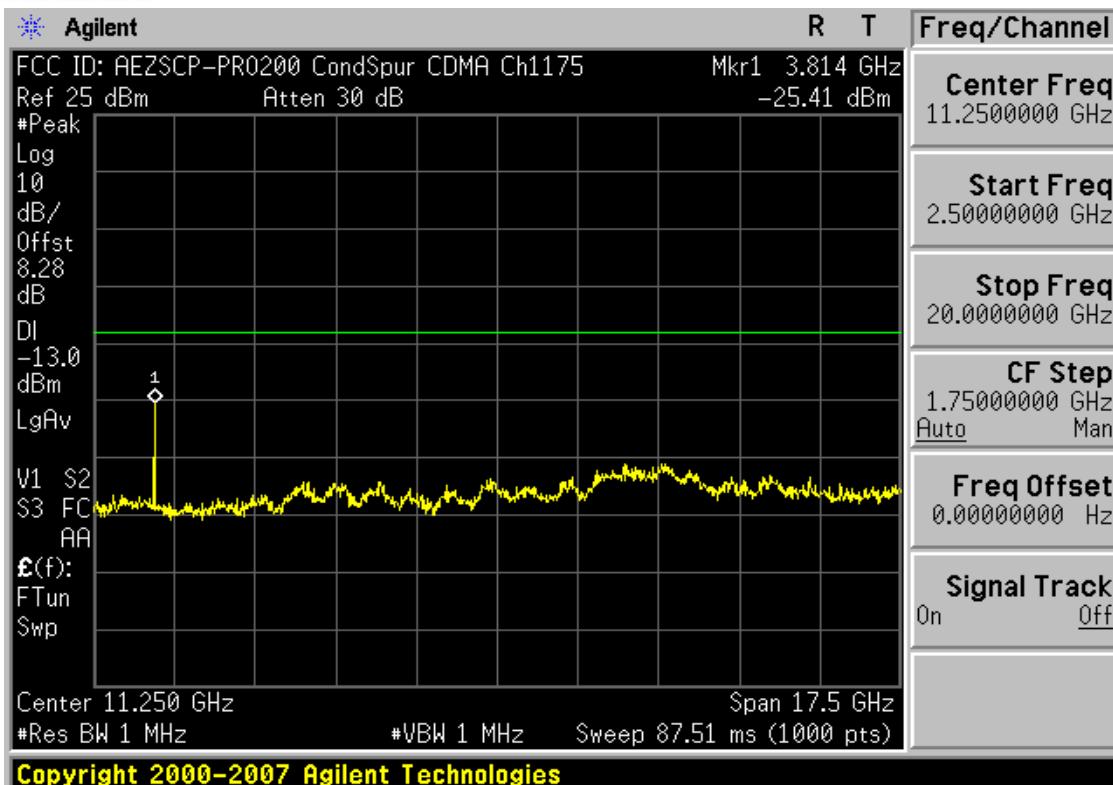


Plot 7-21. Conducted Spurious Plot (PCS CDMA Mode – Ch. 1175)

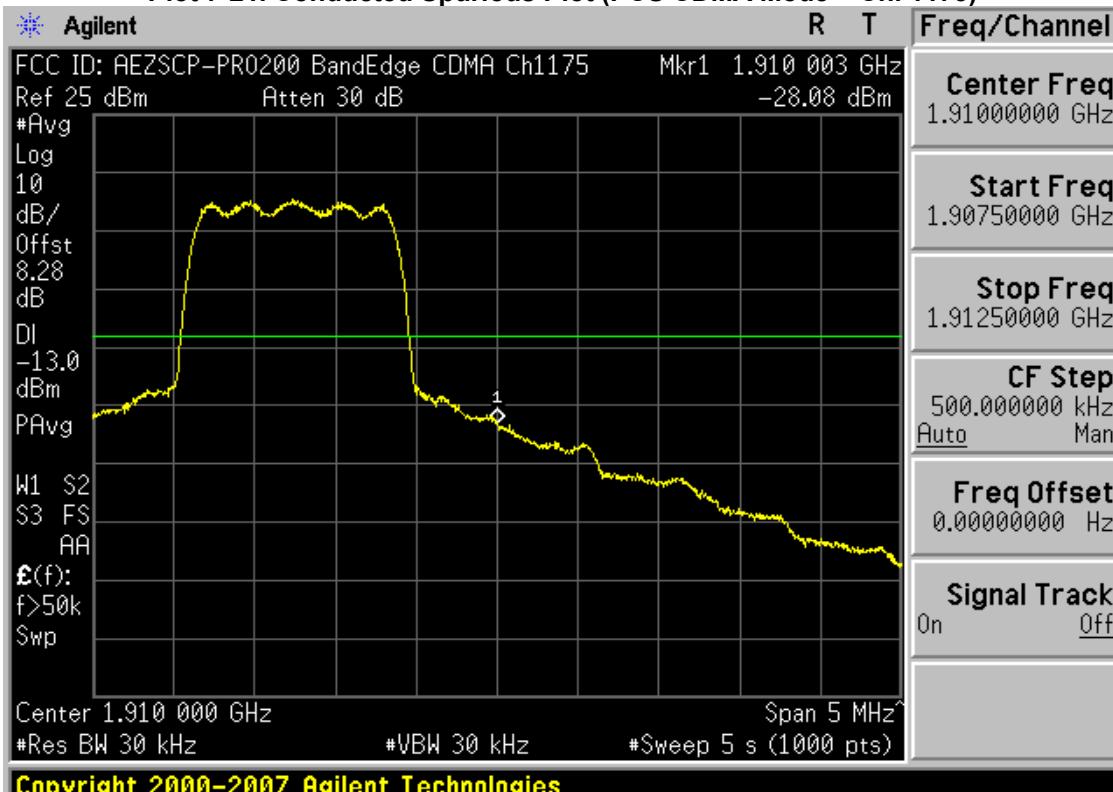

Plot 7-22. Band Edge Plot (PCS CDMA Mode – Ch. 1175)

FCC ID: AEZSCP-PRO200	FCC Pt. 22/24 CDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: <b>SANYO</b> Quality Manager
Test Report S/N: 0810281582.AEZ	Test Dates: 11/4/08 & 1/12/09	EUT Type: Cellular/PCS CDMA Phone with Bluetooth and EvDO	Page 34 of 36

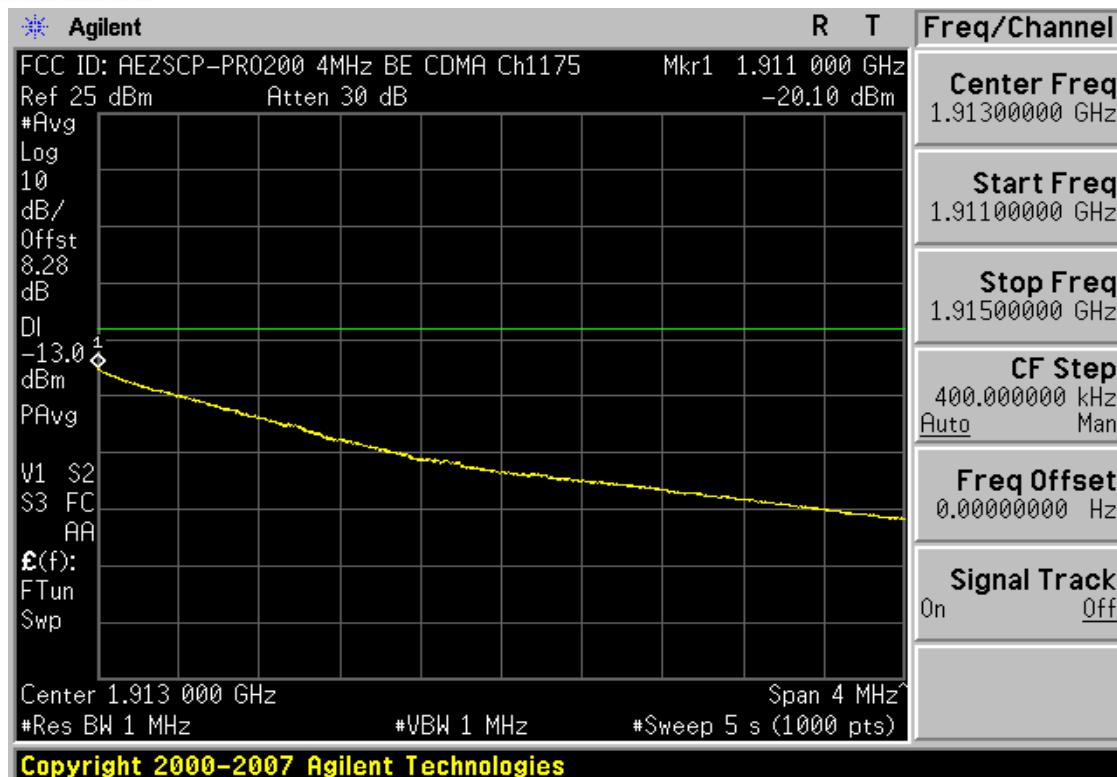

Plot 7-23. 4MHz Span Plot (PCS CDMA Mode – Ch. 1175)

FCC ID: AEZSCP-PRO200	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 CDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	<b>SANYO</b>	Reviewed by: Quality Manager
Test Report S/N: 0810281582.AEZ	Test Dates: 11/4/08 & 1/12/09	EUT Type: Cellular/PCS CDMA Phone with Bluetooth and EvDO		Page 35 of 36

## 8.0 CONCLUSION

The data collected show that the **Sanyo Cellular/PCS CDMA Phone with Bluetooth and EvDO** FCC ID: **AEZSCP-PRO200** complies with all the requirements of Parts 2, 22, and 24 of the FCC rules.

FCC ID: AEZSCP-PRO200	 <b>PCTEST</b> <sup>®</sup> ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 CDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	 <b>SANYO</b>	Reviewed by: Quality Manager
Test Report S/N: 0810281582.AEZ	Test Dates: 11/4/08 & 1/12/09	EUT Type: Cellular/PCS CDMA Phone with Bluetooth and EvDO		Page 36 of 36