


# ENGINEERING TEST REPORT



## COMMUNICATION RECEIVER Model No.: IC-R9500

**FCC ID: AFJ284401**

*Applicant:*

**ICOM Incorporated**  
1-1-32, Kamiminami  
Hirano-ku, Osaka  
Japan, 547-003

**Tested in Accordance With**

**Federal Communications Commission (FCC)  
47 CFR, Part 15, Subpart B  
Scanning Receivers operating in the  
Frequency Bands 0.005 - 3335 MHz**

**UltraTech's File No.: ICOM-145\_FCC15R**

This Test report is Issued under the Authority of  
Tri M. Luu, Professional Engineer,  
Vice President of Engineering  
UltraTech Group of Labs

Date: February 16, 2007



Report Prepared by: Dharmajit Solanki

Tested by: Wayne Wu, EMI/RFI Technician

Issued Date: February 16, 2007

Test Dates: Jan. 25 to Feb 05, 2007

- *The results in this Test Report apply only to the sample(s) tested, and the sample tested is randomly selected.*
- *This report must not be used by the client to claim product endorsement by NVLAP or any agency of the US Government.*

## UltraTech

3000 Bristol Circle, Oakville, Ontario, Canada, L6H 6G4  
Tel.: (905) 829-1570 Fax.: (905) 829-8050  
Website: [www.ultratech-labs.com](http://www.ultratech-labs.com), Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Email: [tri@ultratech-labs.com](mailto:tri@ultratech-labs.com)



0685



31040/SIT



C-1376



46390-2049



200093-0



SL2-IN-E-1119R

## TABLE OF CONTENTS

<b>EXHIBIT 1. INTRODUCTION</b> .....	<b>3</b>
1.1. SCOPE.....	3
1.2. RELATED SUBMITTAL(S)/GRANT(S) .....	3
1.3. NORMATIVE REFERENCES .....	3
<b>EXHIBIT 2. PERFORMANCE ASSESSMENT</b> .....	<b>4</b>
2.1. CLIENT INFORMATION .....	4
2.2. EQUIPMENT UNDER TEST (EUT) INFORMATION .....	4
2.3. EUT'S TECHNICAL SPECIFICATIONS .....	5
2.4. ANCILLARY EQUIPMENT .....	5
2.5. BLOCK DIAGRAM OF TEST SETUP.....	6
<b>EXHIBIT 3. EUT OPERATING CONDITIONS AND CONFIGURATIONS DURING TESTS</b> .....	<b>7</b>
3.1. CLIMATE TEST CONDITIONS .....	7
3.2. OPERATIONAL TEST CONDITIONS & ARRANGEMENT FOR TEST SIGNALS.....	7
<b>EXHIBIT 4. SUMMARY OF TEST RESULTS</b> .....	<b>8</b>
4.1. LOCATION OF TESTS.....	8
4.2. APPLICABILITY & SUMMARY OF EMC EMISSION TEST RESULTS .....	8
4.3. MODIFICATIONS REQUIRED FOR COMPLIANCE.....	8
<b>EXHIBIT 5. MEASUREMENTS, EXAMINATIONS &amp; TEST DATA FOR EMC EMISSIONS</b> .....	<b>9</b>
5.1. TEST PROCEDURES.....	9
5.2. MEASUREMENT UNCERTAINTIES .....	9
5.3. MEASUREMENT EQUIPMENT USED .....	9
5.4. ESSENTIAL/PRIMARY FUNCTIONS AS DECLARED BY THE MANUFACTURER.....	9
5.5. AC POWER LINE CONDUCTED EMISSIONS [47 CFR 15.107(A)].....	10
5.6. RECEIVER ANTENNA POWER SPURIOUS/HARMONIC CONDUCTED EMISSIONS [47 CFR 15.111(A)].	13
5.7. RECEIVER SPURIOUS/HARMONIC RADIATED EMISSIONS [47 CFR 15.109(A)] .....	31
5.8. RADIATED EMISSIONS FROM CLASS B UNINTENTIONAL RADIATION (DIGITAL DEVICE) [47 CFR 15.109 (B)] .....	33
<b>EXHIBIT 6. MEASUREMENT UNCERTAINTY</b> .....	<b>36</b>
6.1. LINE CONDUCTED EMISSION MEASUREMENT UNCERTAINTY .....	36
6.2. RADIATED EMISSION MEASUREMENT UNCERTAINTY .....	37
<b>EXHIBIT 7. MEASUREMENT METHODS</b> .....	<b>38</b>
7.1. GENERAL TEST CONDITIONS .....	38

## EXHIBIT 1. INTRODUCTION

### 1.1. SCOPE

<b>Reference:</b>	FCC Part 15, Subpart B, Sections 15.107, 15.109, 15.111 & 15.121
<b>Title:</b>	Telecommunication - Code of Federal Regulations, CFR 47, Part 15
<b>Purpose of Test:</b>	To gain FCC Certification Testing for Scanning Receivers operating in 0.005-3335 MHz
<b>Test Procedures:</b>	Both conducted and radiated emissions measurements were conducted in accordance with American National Standards Institute ANSI C63.4 - American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
<b>Environmental Classification:</b>	Commercial, industrial or business environment.

### 1.2. RELATED SUBMITTAL(S)/GRANT(S)

None

### 1.3. NORMATIVE REFERENCES

Publication	Year	Title
FCC CFR Parts 0-19	2006	Code of Federal Regulations – Telecommunication
ANSI C63.4	2003	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
CISPR 22 & EN 55022	2003 2003	Limits and Methods of Measurements of Radio Disturbance Characteristics of Information Technology Equipment
CISPR 16-1-1	2003	Specification for radio disturbance and immunity measuring apparatus and methods. Part 1-1: Measuring Apparatus
CISPR 16-2-1	2004	Specification for radio disturbance and immunity measuring apparatus and methods. Part 2-1: Conducted disturbance measurement

## EXHIBIT 2. PERFORMANCE ASSESSMENT

### 2.1. CLIENT INFORMATION

APPLICANT	
<b>Name:</b>	ICOM Incorporated
<b>Address:</b>	1-1-32, Kamiminami Hirano-ku, Osaka Japan, 547-003
<b>Contact Person:</b>	Mr. Takashi Aoki Phone #: +81-66-793-5302 Fax #: +81-66-793-0013 Email Address: export@icom.co.jp

MANUFACTURER	
<b>Name:</b>	ICOM Incorporated
<b>Address:</b>	1-1-32, Kamiminami Hirano-ku, Osaka Japan, 547-0003
<b>Contact Person:</b>	Mr. Takashi Aoki Phone #: +81-66-793-5302 Fax #: +81-66-793-0013 Email Address: export@icom.co.jp

### 2.2. EQUIPMENT UNDER TEST (EUT) INFORMATION

The following information (with the exception of the Date of Receipt) has been supplied by the applicant.

<b>Brand Name:</b>	ICOM Incorporated
<b>Product Name:</b>	Communication Receiver
<b>Model Name or Number:</b>	IC-R9500
<b>Serial Number:</b>	0000001
<b>Type of Equipment:</b>	Scanning Receiver
<b>Power input source:</b>	100 -120 V AC


### 2.3. EUT'S TECHNICAL SPECIFICATIONS

RECEIVER	
Equipment Type:	Base Unit
Power Supply Requirement:	100 -120 V AC
Operating Frequency Range:	0.005 - 3335 MHz
RF Input Impedance:	50 Ohms

### 2.4. ANCILLARY EQUIPMENT

None

## 2.5. BLOCK DIAGRAM OF TEST SETUP

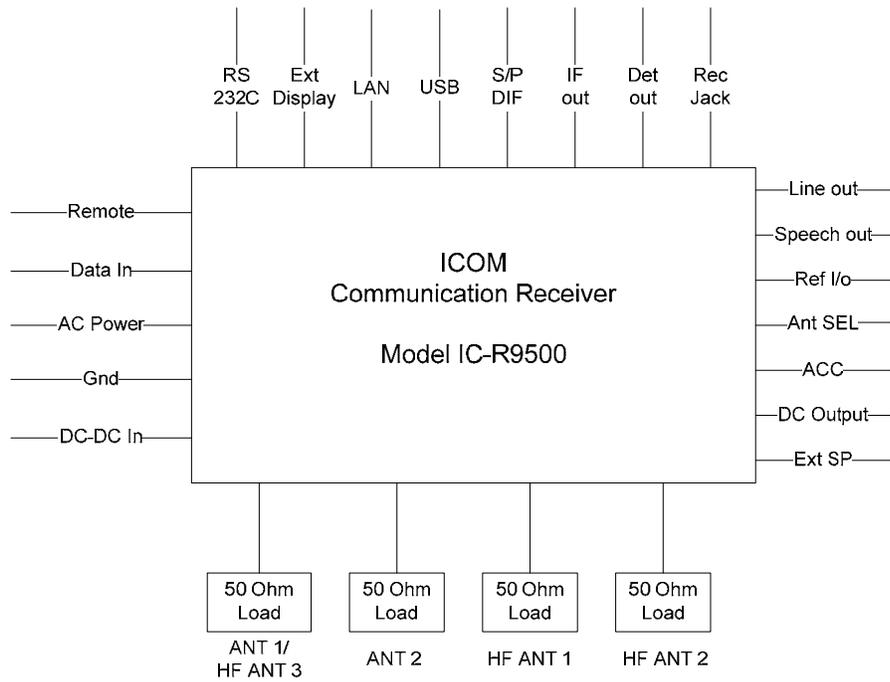

## EXHIBIT 3. EUT OPERATING CONDITIONS AND CONFIGURATIONS DURING TESTS

### 3.1. CLIMATE TEST CONDITIONS

The climate conditions of the test environment are as follows:

Temperature:	22°C
Humidity:	53%
Pressure:	102 kPa
Power input source:	110V AC

### 3.2. OPERATIONAL TEST CONDITIONS & ARRANGEMENT FOR TEST SIGNALS

<b>Operating Modes:</b>	The receiver was operated in its normal intended mode during testing
<b>Special Test Software:</b>	None
<b>Special Hardware Used:</b>	None
<b>Receiver Test Antenna:</b>	Receiver antennas were terminated to a 50 Ohm load.

Receiver Test Signals	
<b>Frequency Band(s):</b>	0.005-3335 MHz
<b>Test Frequency(ies):</b> (Near lowest, near middle & near highest frequencies in the frequency range of operation.)	5 kHz, 1667.5 and 3335 MHz

## EXHIBIT 4. SUMMARY OF TEST RESULTS

### 4.1. LOCATION OF TESTS

All of the measurements described in this report were performed at Ultratech Group of Labs located in the city of Oakville, Province of Ontario, Canada.

- AC Powerline Conducted Emissions were performed in UltraTech's shielded room, 16'(L) by 12'(W) by 12'(H).
- Radiated Emissions were performed at the Ultratech's 3-10 TDK Semi-Anechoic Chamber situated in the Town of Oakville, province of Ontario. This test site been calibrated in accordance with ANSI C63.4, and found to be in compliance with the requirements of Sec. 2.948 of the FCC Rules. The descriptions and site measurement data of the Oakville 3-10 TDK Semi-Anechoic Chamber has been filed with FCC office (FCC File No.: 31040/SIT 1300B3) and Industry Canada office (Industry Canada File No.: IC2049-1). Last Date of Site Calibration: June 20, 2006.

### 4.2. APPLICABILITY & SUMMARY OF EMC EMISSION TEST RESULTS

FCC Part 15, Subpart B	Test Requirements	Margin Below (-)/Above (+) Limits	Compliance (Yes/No)
15.107(a), Class B	AC Power Line Conducted Emissions Measurements	-11.3 dB @ 0.235 MHz	Yes
15.111(a)	Receiver Antenna Power Conducted Emissions for Non-Integral Antenna Port	-14.7 dB @ 9.0 kHz	Yes
15.109(a)	Receiver Spurious Radiated Emissions	More than 20 dB below the limit	Yes
15.109(b)	Radiated Emissions from Class B Unintentional Radiators	-8.0 dB @ 1.033 GHz	Yes

### 4.3. MODIFICATIONS REQUIRED FOR COMPLIANCE

None.

---

## **EXHIBIT 5. MEASUREMENTS, EXAMINATIONS & TEST DATA FOR EMC EMISSIONS**

### **5.1. TEST PROCEDURES**

This section contains test results only. Details of test methods and procedures can be found in Exhibit 8 of this report.

### **5.2. MEASUREMENT UNCERTAINTIES**

The measurement uncertainties stated were calculated in accordance with requirements of UKAS Document NIS 81 with a confidence level of 95%. Please refer to Exhibit 7 for Measurement Uncertainties.

### **5.3. MEASUREMENT EQUIPMENT USED**

The measurement equipment used complied with the requirements of the Standards referenced in the Methods & Procedures ANSI C63.4:1992, CISPR 22 and CISPR 16-1.

### **5.4. ESSENTIAL/PRIMARY FUNCTIONS AS DECLARED BY THE MANUFACTURER**

The Scanning Receivers was operated as its normal intended mode during testing.

## 5.5. AC POWER LINE CONDUCTED EMISSIONS [47 CFR 15.107(a)]

### 5.5.1. Limits

The equipment shall meet the limits of the following table:

Test Frequency Range(MHz)	CLASS B LIMITS		Measuring Bandwidth
	Quasi-Peak (dB $\mu$ V)	Average (dB $\mu$ V)	
0.15 to 0.5	66 to 56*	56 to 46*	RBW = 9 kHz VBW $\geq$ 9 kHz for QP VBW = 1 Hz for Average
0.5 to 5	56	46	RBW = 9 kHz VBW $\geq$ 9 kHz for QP VBW = 1 Hz for Average
5 to 30	60	50	RBW = 9 kHz VBW $\geq$ 9 kHz for QP VBW = 1 Hz for Average

\* Decreasing linearly with logarithm of frequency

### 5.5.2. Method of Measurements

Refer to Ultratech Test Procedures ULTR-P001-2004 & ANSI C63.4 for method of measurements.

### 5.5.3. Test Equipment List

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range
EMI Receiver System / Spectrum Analyzer	Hewlett Packard	HP 8546A	3520A00248	9KHz-5.6GHz, 50 Ohms
Transient Limiter	Hewlett Packard	11947A	310701998	9 kHz – 200 MHz 10 dB attenuation
L.I.S.N.	EMCO	3825/2	89071531	9 kHz – 200 MHz 50 Ohms / 50 $\mu$ H
12'x16'x12' RF Shielded Chamber	RF Shielding	...	..	...

5.5.4. Test Data


<b>UltraTech Group of Labs</b>	
Applicant:	ICOM America
Product:	Communications Receiver
Model:	IC-R9500

<b>AC POWER LINE CONDUCTED EMISSIONS MEASUREMENT PLOT</b>			
Detector: <input checked="" type="checkbox"/> PEAK <input checked="" type="checkbox"/> QUASI-PEAK <input checked="" type="checkbox"/> AVERAGE		Temp: 22°C	Humidity: 22%
Line Tested: L1	Line Voltage: 110Vac	Test Tech: Wayne	Test Date: Jan 29/07
Standard: FCC15 Class B	Comments: Positive		

14: 12: 01 JAN 29, 2007

Signal	Freq (MHz)	PK Amp	QP Amp	AV Amp	QP $\Delta$ L1
1	0.234975	52.5	51.0	37.7	-11.3

ACTV DET: PEAK  
 MEAS DET: PEAK QP AVG  
 MKR 230 kHz  
 48.19 dB $\mu$ V

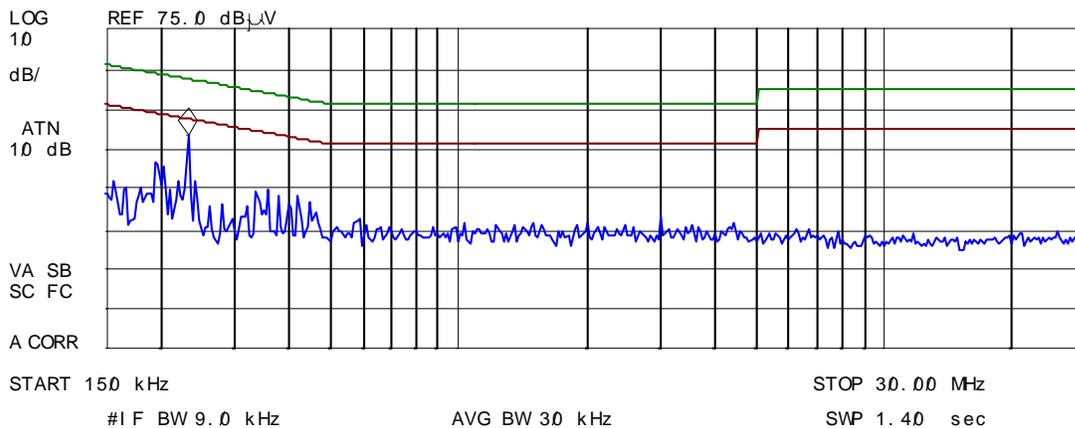


<b>UltraTech Group of Labs</b>	
Applicant:	ICOM America
Product:	Communications Receiver
Model:	IC-R9500

<b>AC POWER LINE CONDUCTED EMISSIONS MEASUREMENT PLOT</b>			
Detector: [ X ] PEAK [ X ] QUASI-PEAK [ X ] AVERAGE		Temp: 22°C	Humidity: 22%
Line Tested: L2	Line Voltage: 110Vac	Test Tech: Wayne	Test Date: Jan 29/07
Standard: FCC15 Class B	Comments: Neutral		

14:03:50 JAN 29, 2007

Signal	Freq (MHz)	PK Amp	QP Amp	AV Amp	QP $\Delta$ L1
1	0.234694	50.6	49.2	34.0	-13.2

ACTV DET: PEAK  
 MEAS DET: PEAK QP AVG  
 MKR 230 kHz  
 45.37 dB $\mu$ V

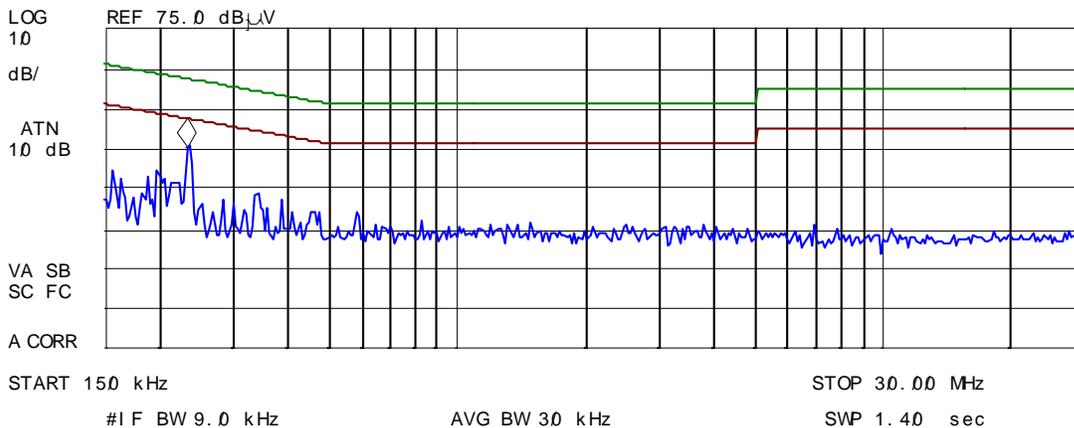

## 5.6. RECEIVER ANTENNA POWER SPURIOUS/HARMONIC CONDUCTED EMISSIONS [47 CFR 15.111(a)]

### 5.6.1. Limits

Receivers that operate (tune) in the frequency range 30 to 960 MHz and CB receivers that provides terminals for the connection of an external antenna may be tested to demonstrate compliance with the provisions of §15.109 with the antenna terminals shielded and terminated with a resistive termination equal to the impedance specified for the antenna, provided these receivers also comply with the following: ***With the receiver antenna terminal connected to a resistive termination equal to the impedance specified or employed for the antenna, the power at the antenna terminal at frequency within the range from 30 Mhz to 5<sup>th</sup> harmonic of the highest frequency shall not exceed 2.0 nanowatts (or -57 dBm @ 50 Ohm).***


### 5.6.2. Method of Measurements

TIA-603-B

### 5.6.3. Test Equipment List

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range
Spectrum Analyzer	Rohde & Schwarz	FSEK20/B4/B21	834157/005	9 kHz – 40 GHz


### 5.6.4. Test Arrangement




### 5.6.5. Test Data


Conform. The RF emissions were scanned from 9 kHz to 30 MHz at antenna ports; HF ANT 1, 2 & 3 and from 30 MHz to 1 GHz at antenna ports 1 & 2; see the following plots (# 1-14) for measurement details.

**Plot 1: Receiver Antenna Power Conducted Emissions @ HF Antenna 1**  
Configuration: Rx Frequency, 5KHz. HF ANT 1 (VHF)

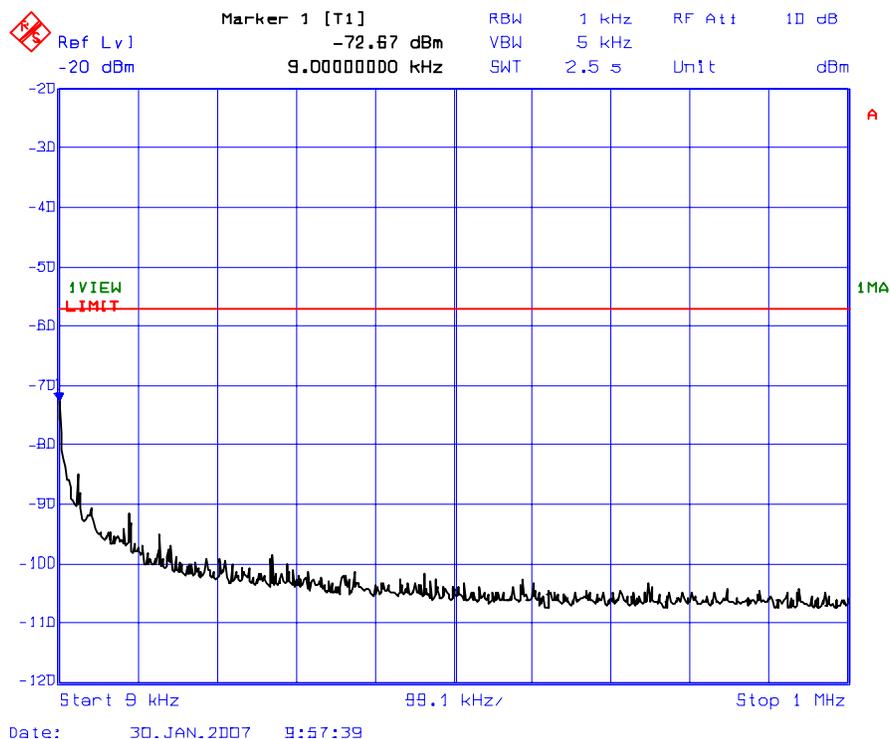


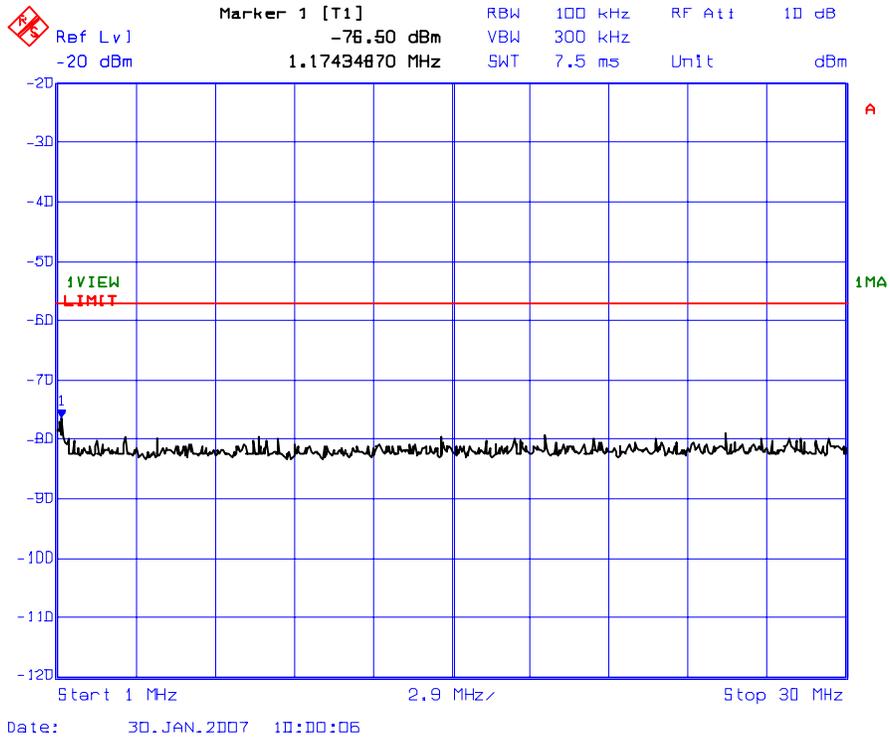


**Plot 2: Receiver Antenna Power Conducted Emissions @ HF Antenna 1**  
Configuration: Rx Frequency, 15MHz. HF ANT 1 (VHF).

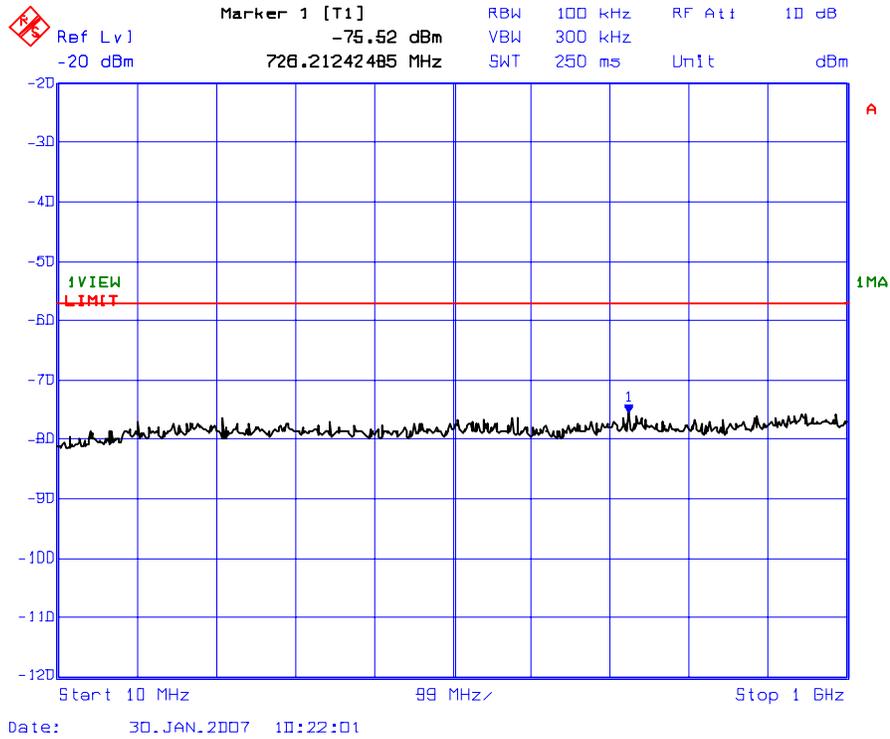


**Plot 3: Receiver Antenna Power Conducted Emissions @ HF Antenna 1**  
Configuration: Rx Frequency, 29.999MHz. HF ANT 1 (VHF)

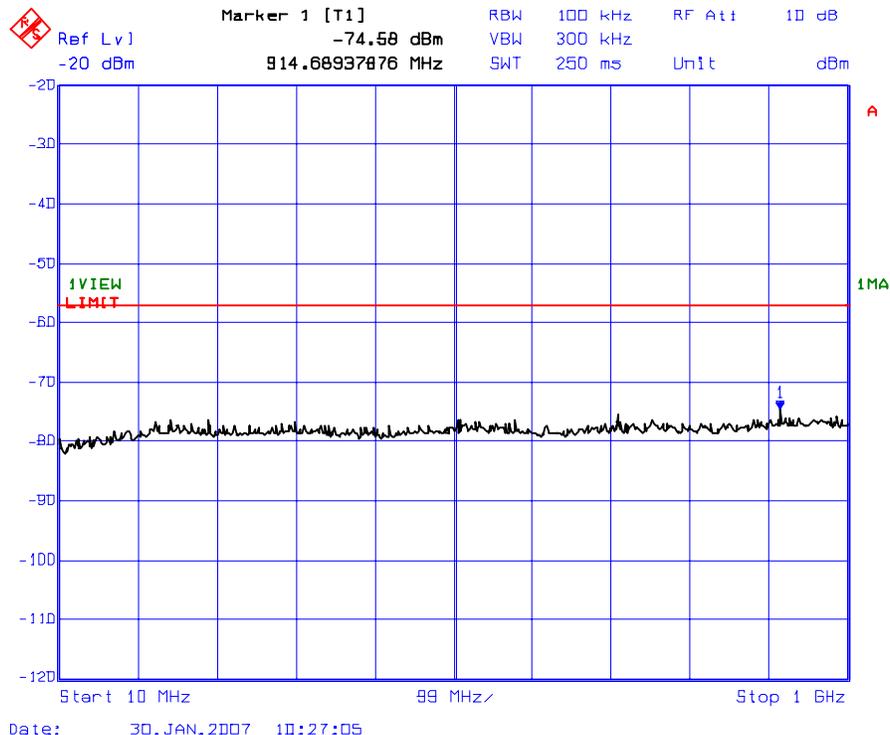


**Plot 4: Receiver Antenna Power Conducted Emissions @ HF Antenna 2**  
Configuration: Rx Frequency, 5KHz. HF ANT 1 (RCA)

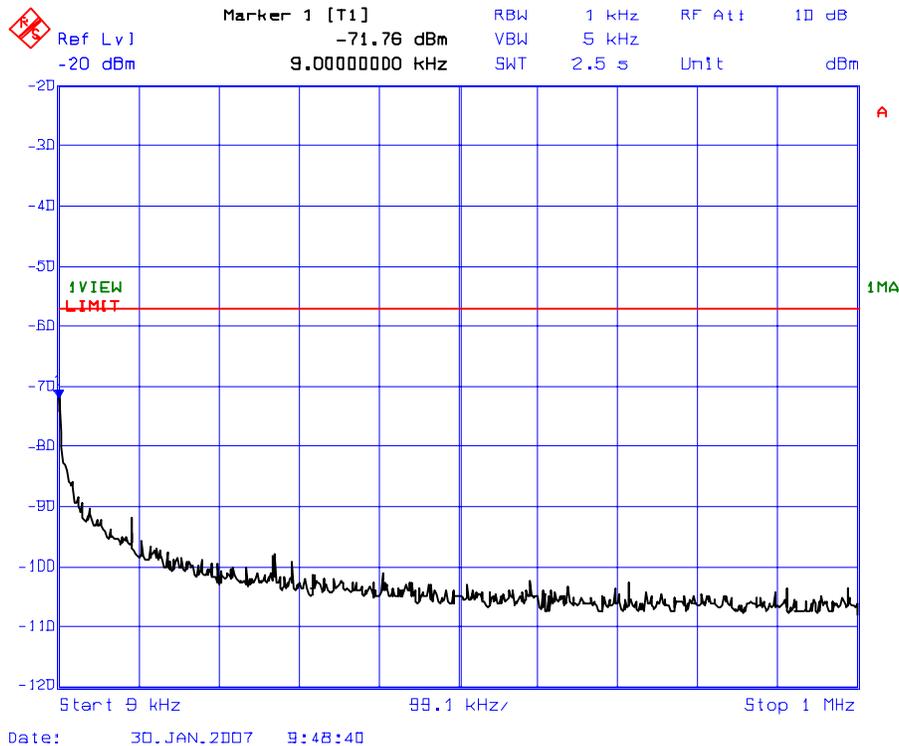


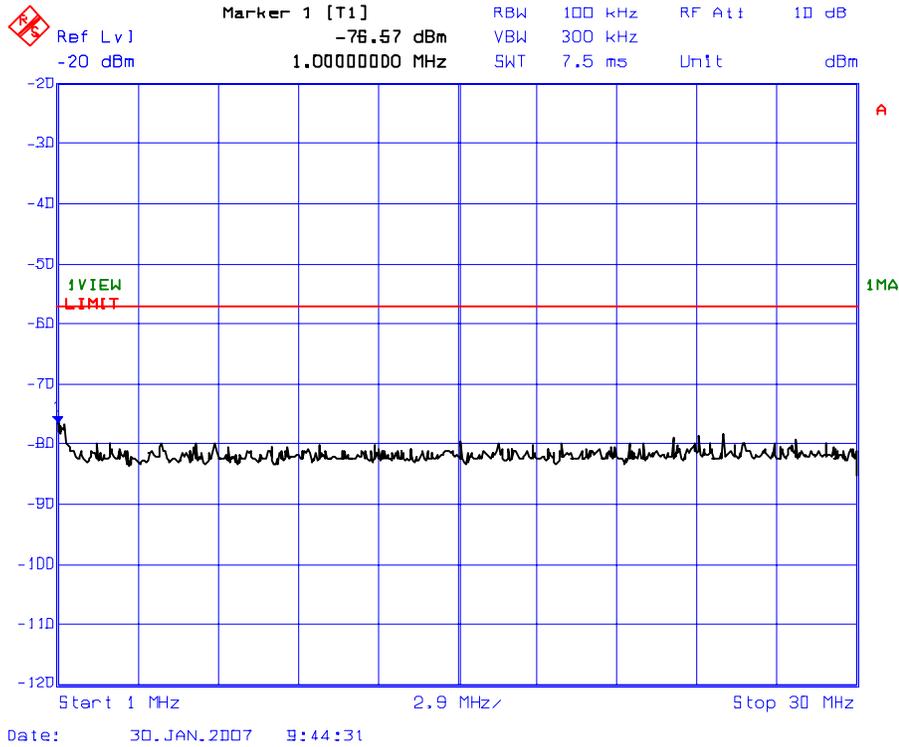


**Plot 5: Receiver Antenna Power Conducted Emissions @ HF Antenna 2**  
Configuration: Rx Frequency, 15MHz. HF ANT 1 (RCA)

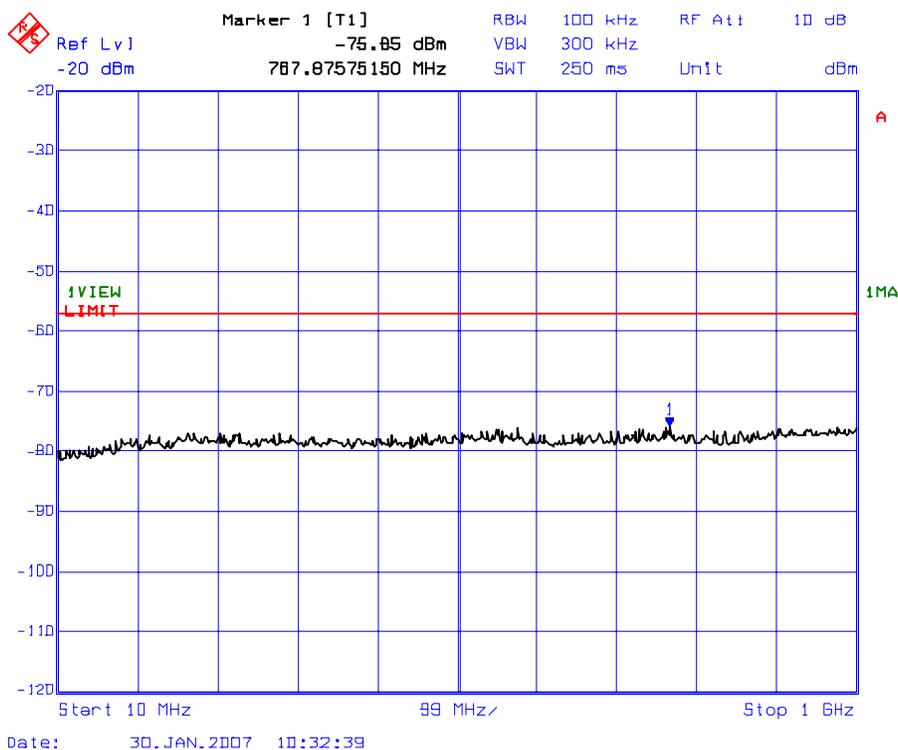


**Plot 6: Receiver Antenna Power Conducted Emissions @ HF Antenna 2**  
Configuration: Rx Frequency, 29.999MHz. HF ANT 1 (RCA)

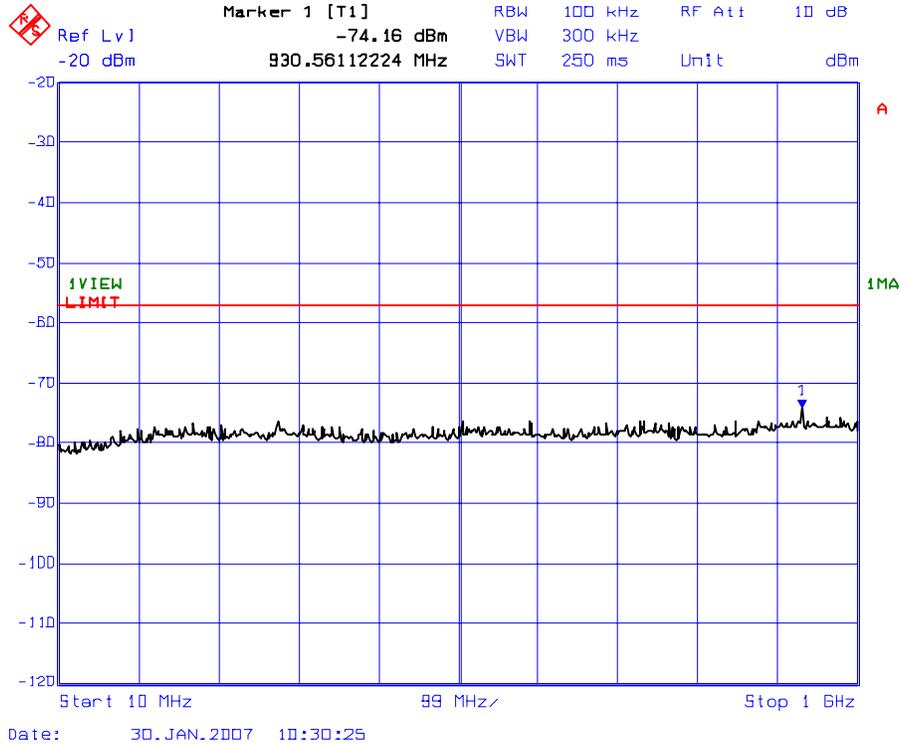


**Plot 7: Receiver Antenna Power Conducted Emissions @ HF Antenna 3 & Antenna 1**  
Configuration: Rx Frequency, 5KHz. HF ANT 3 & ANT 1 (N type)

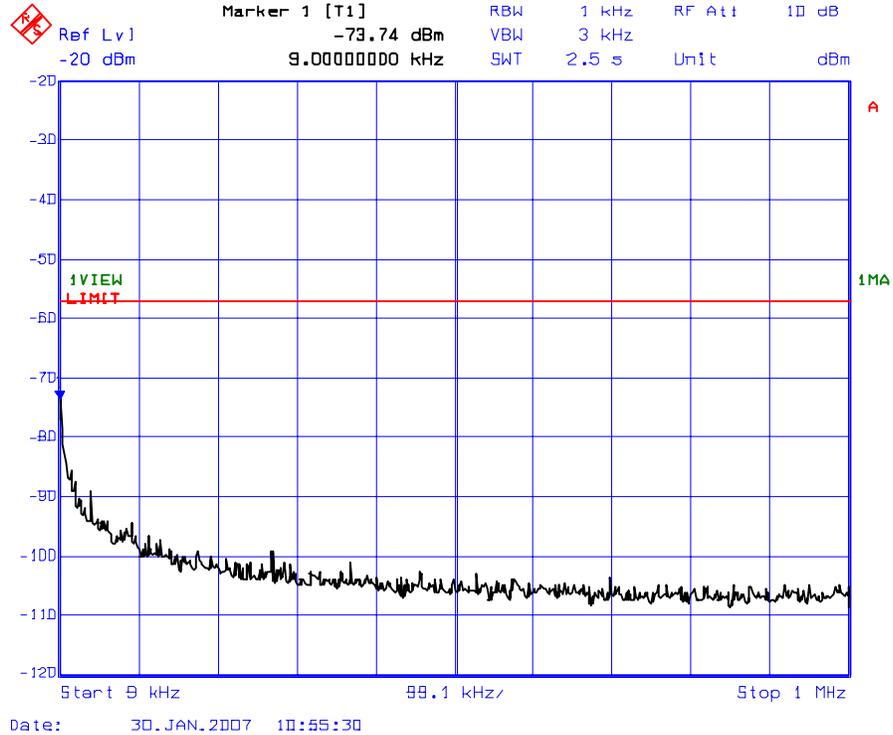


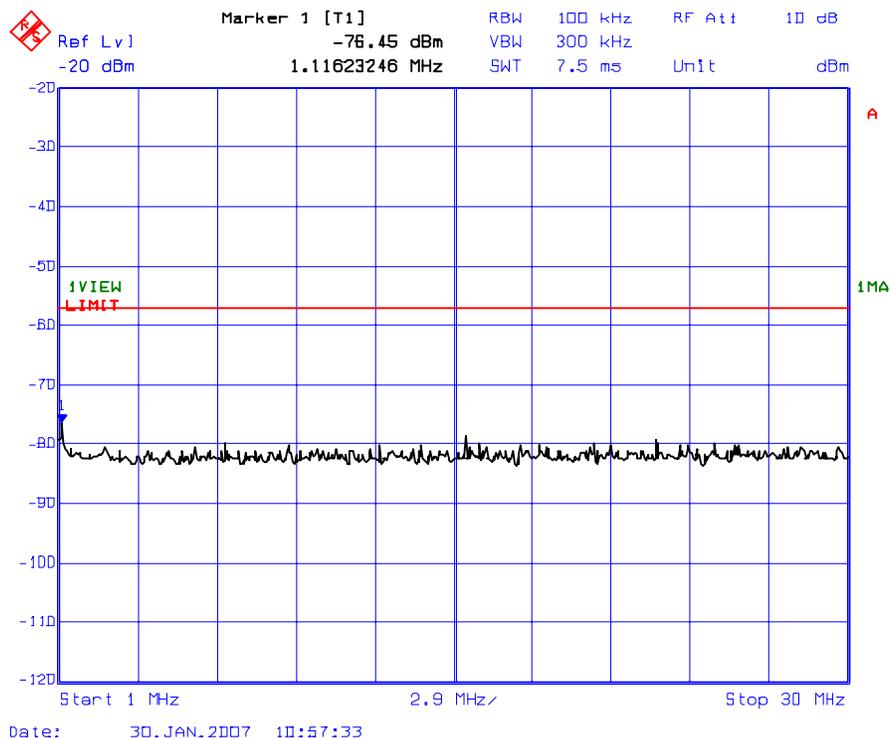


**Plot 8: Receiver Antenna Power Conducted Emissions @ HF Antenna 3 & Antenna 1**  
Configuration: Rx Frequency, 29.999 MHz. HF ANT 3 & ANT 1 (N type)

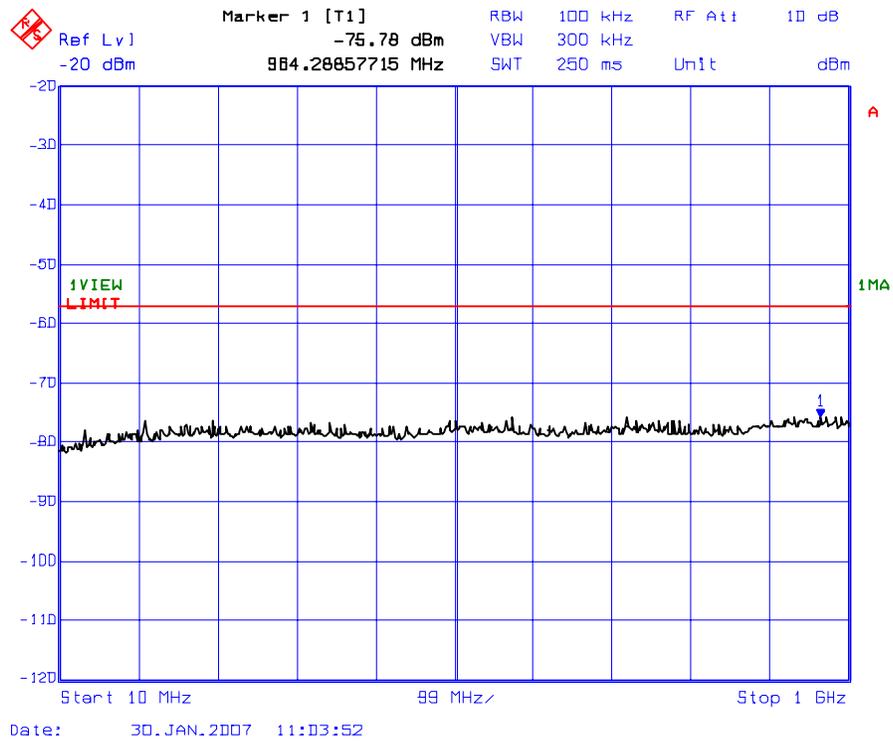


**Plot 9: Receiver Antenna Power Conducted Emissions @ HF Antenna 3 & Antenna 1**  
Configuration: Rx Frequency, 30.0 MHz. HF ANT 3 & ANT 1 (N type)

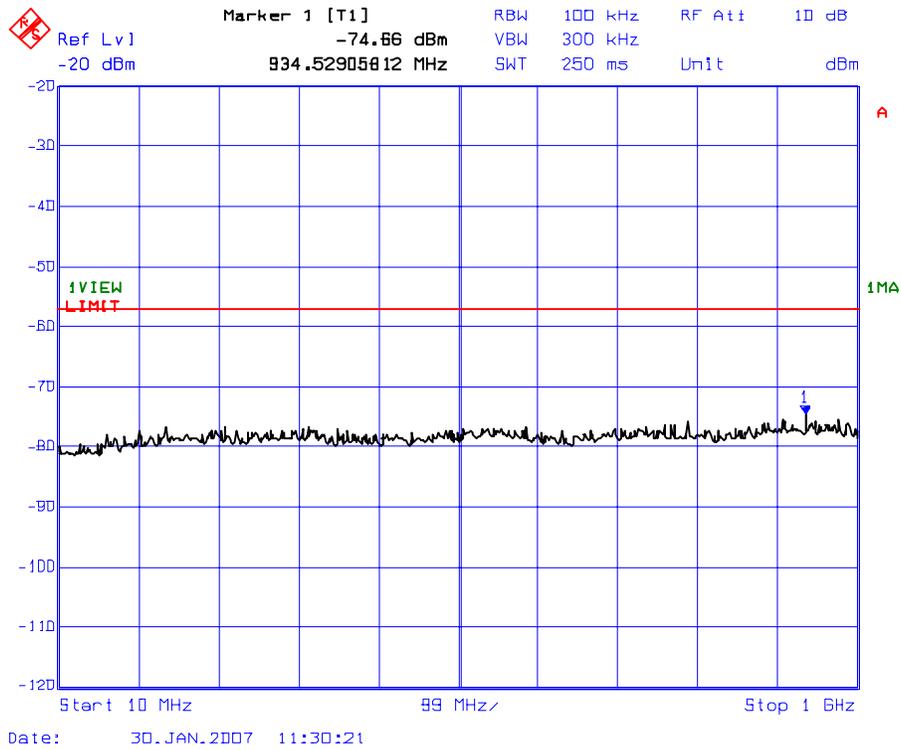


**Plot 10: Receiver Antenna Power Conducted Emissions @ HF Antenna 3 & Antenna 1**  
Configuration: Rx Frequency, 590 MHz. HF ANT 3 & ANT 1 (N type)

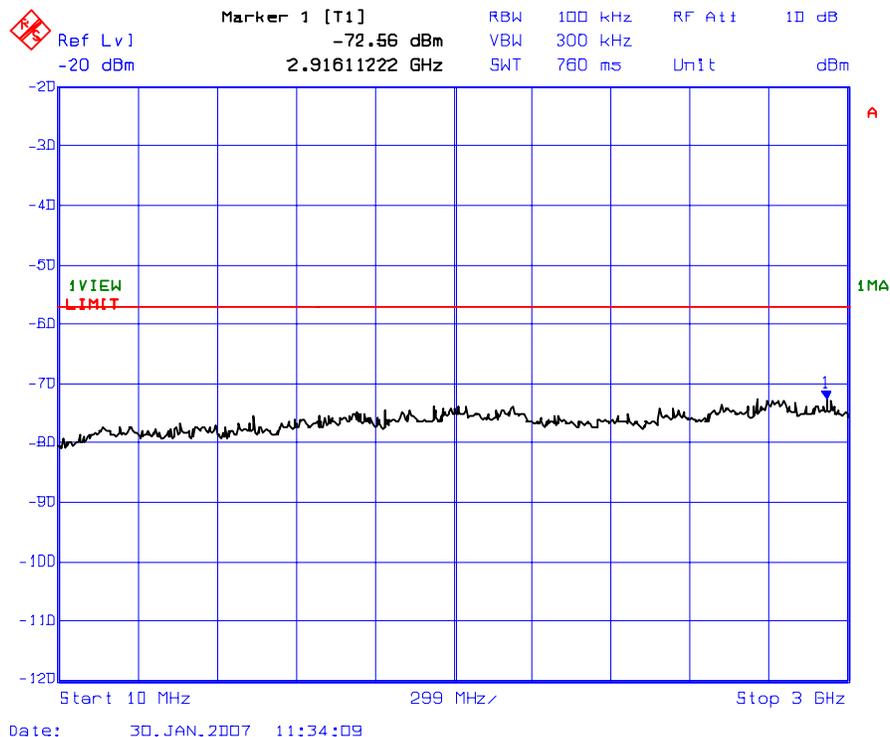


**Plot 11: Receiver Antenna Power Conducted Emissions @ HF Antenna 3 & Antenna 1**  
Configuration: Rx Frequency, 1149.999 MHz. HF ANT 3 & ANT 1 (N type)

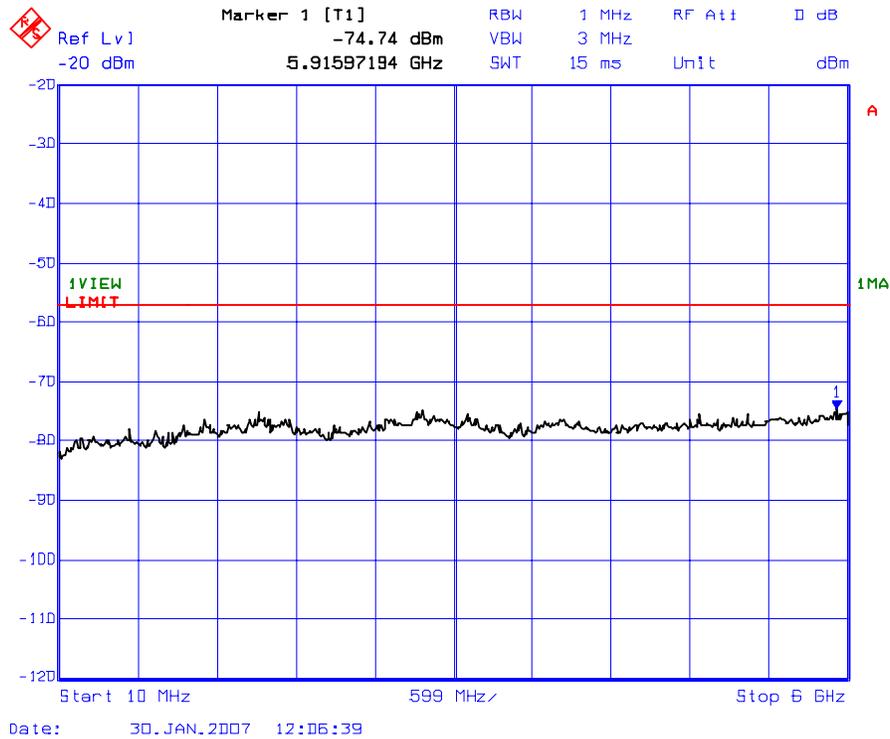


**Plot 12: Receiver Antenna Power Conducted Emissions @ Antenna 2**  
Configuration: Rx Frequency, 1150MHz. ANT 2 (N type)

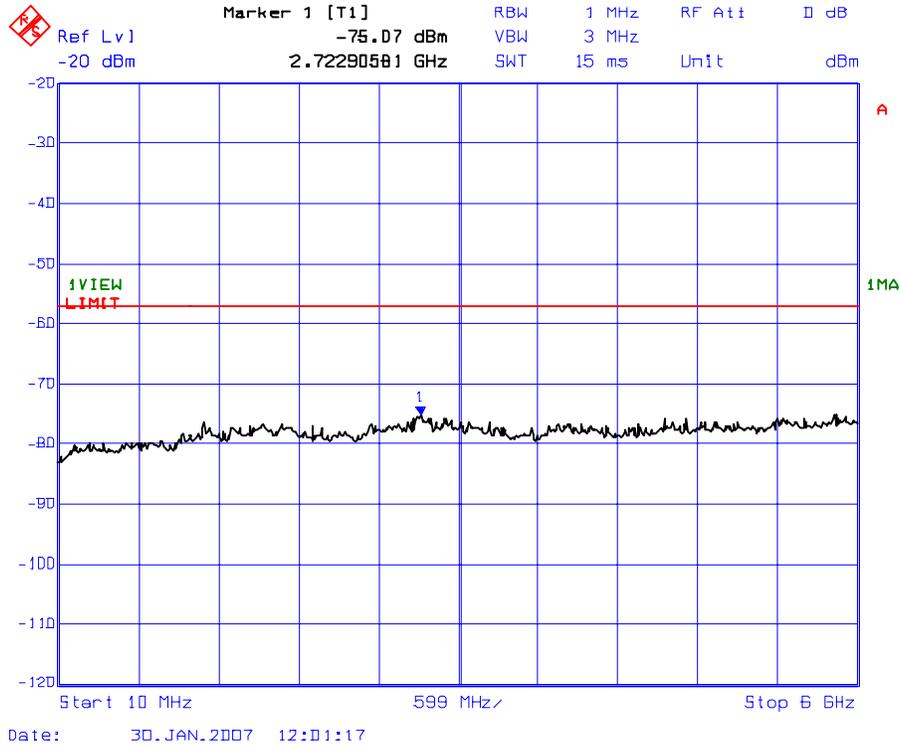

**Plot 13: Receiver Antenna Power Conducted Emissions @ Antenna 2**  
Configuration: Rx Frequency, 2242.5 MHz. ANT 2 (N type)

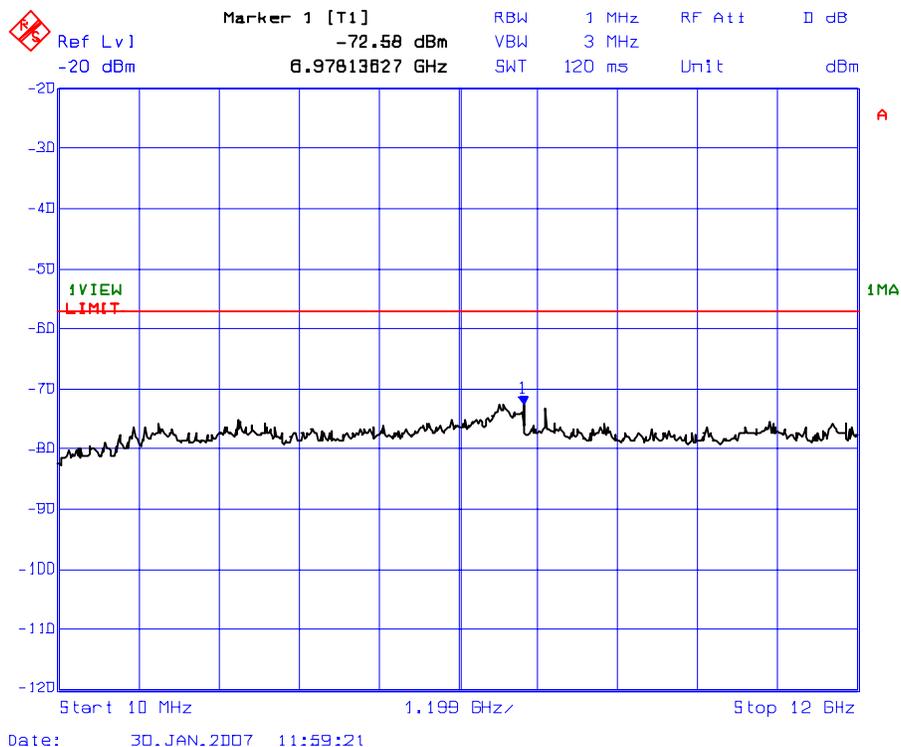

**Plot 14: Receiver Antenna Power Conducted Emissions @ Antenna 2**  
Configuration: Rx Frequency, 3335MHz. ANT 2 (N type)

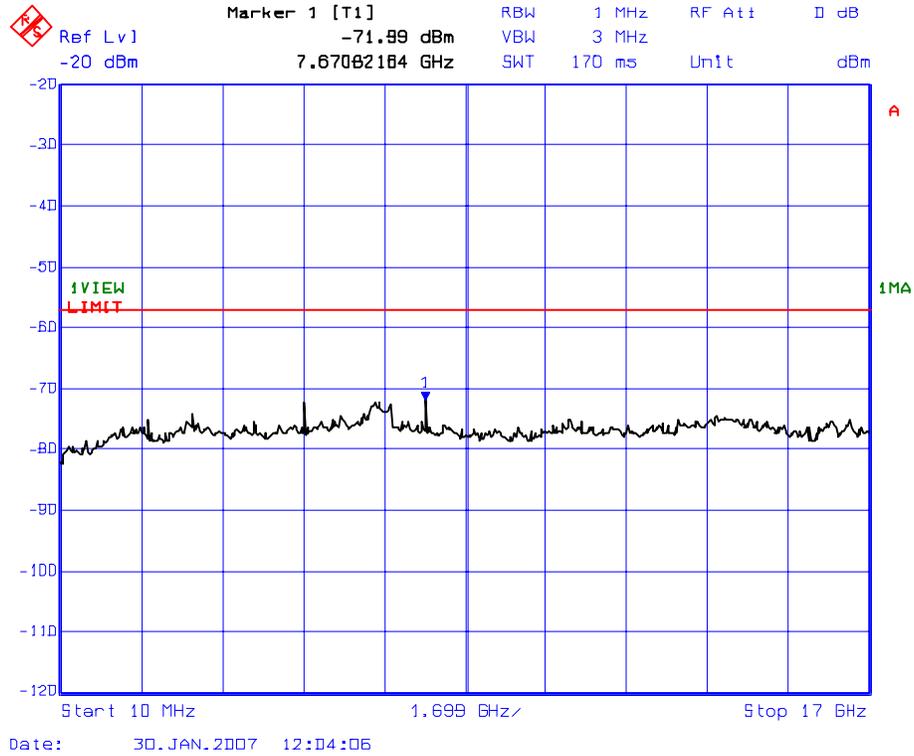

## 5.7. RECEIVER SPURIOUS/HARMONIC RADIATED EMISSIONS [47 CFR 15.109(a)]

### 5.7.1. Limits

The equipment shall meet the limits of the following table:

Test Frequency Range (MHz)	Limits @ 3 m (dB $\mu$ V/m)	EMI Detector Used	Measuring Bandwidth (kHz)
30 – 88	40.0	Quasi-Peak	RBW = 120 kHz, VBW $\geq$ 120 kHz
88 – 216	43.5	Quasi-Peak	RBW = 120 kHz, VBW $\geq$ 120 kHz
216 – 960	46.0	Quasi-Peak	RBW = 120 kHz, VBW $\geq$ 120 kHz
Above 960	54.0	Average	RBW = 1 MHz, VBW $\geq$ 1 Hz

### 5.7.2. Method of Measurements

Please refer to the Exhibit 8 of this test report and ANSI C63-4:1992 for radiated emissions test method.

The EUT shall be scanned from 30 MHz to the 5<sup>th</sup> harmonic of the highest oscillator frequency in the Scanning Receivers or 1 GHz whichever is higher.

### 5.7.3. Test Equipment List

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range
Spectrum Analyzer	Rohde & Schwarz	FSEK20/B4/B21	834157/005	9 kHz – 40 GHz
Microwave Amplifier	Hewlett Packard	HP 83017A	3116A00661	1 GHz to 26.5 GHz
Active Loop Antenna	EMCO	6507	8906-1167	1 kHz – 30 MHz
Biconilog Antenna	EMCO	3143	1029	20 MHz to 2 GHz
Horn Antenna	EMCO	3155	9701-5061	1 GHz – 18 GHz
Horn Antenna with Mixer	EMCO	3160-09	1007	18 GHz – 26.5 GHz
Horn Antenna with Mixer	EMCO	3160-10	1001	26.5 GHz – 40 GHz

#### **5.7.4. Test Data**

##### **5.7.4.1. Radiated Emissions from the Receiver @ 5 KHz**

The emissions were scanned from 5 KHz to 16 GHz at 3 meters distance; all spurious emissions were more than 20 dB below the limit.

##### **5.7.4.2. Radiated Emissions from the Receiver @ 1667.5 MHz**

The emissions were scanned from 5 KHz to 16 GHz at 3 meters distance; all spurious emissions were more than 20 dB below the limit.

##### **5.7.4.3. Radiated Emissions from the Receiver @ 3335 MHz**

The emissions were scanned from 5 KHz to 16 GHz at 3 meters distance; all spurious emissions were more than 20 dB below the limit.

.

## 5.8. RADIATED EMISSIONS FROM CLASS B UNINTENTIONAL RADIATION (DIGITAL DEVICE) [47 CFR 15.109 (b)]

### 5.8.1. Limits

The equipment shall meet the limits of the following table:

Test Frequency Range (MHz)	Class B Limits @ 3 m (dB $\mu$ V/m)	EMI Detector Used	Measuring Bandwidth (kHz)
30 – 88	40.0	Quasi-Peak	RBW = 120 kHz, VBW $\geq$ 120 kHz
88 – 216	43.5	Quasi-Peak	RBW = 120 kHz, VBW $\geq$ 120 kHz
216 – 960	46.0	Quasi-Peak	RBW = 120 kHz, VBW $\geq$ 120 kHz
Above 960	54.0	Average	RBW = 1 MHz, VBW $\geq$ 1 Hz

### 5.8.2. Method of Measurements

Please refer to the Exhibit 5 of this test report and ANSI C63-4:2003 for radiated emissions test method.

The EUT shall be scanned from 30 MHz to the 5<sup>th</sup> harmonic of the highest oscillator frequency in the Scanning Receivers or 1 GHz whichever is higher.

### 5.8.3. Test Equipment List

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range
Spectrum Analyzer	Rohde & Schwarz	FSEK20/B4/B21	834157/005	9 kHz – 40 GHz
Microwave Amplifier	Hewlett Packard	HP 83017A	3116A0066 1	1 GHz to 26.5 GHz
Active Loop Antenna	EMCO	6507	8906-1167	1 kHz – 30 MHz
Biconilog Antenna	EMCO	3143	1029	20 MHz to 2 GHz
Horn Antenna	EMCO	3155	9701-5061	1 GHz – 18 GHz
Horn Antenna with Mixer	EMCO	3160-09	1007	18 GHz – 26.5 GHz
Horn Antenna with Mixer	EMCO	3160-10	1001	26.5 GHz – 40 GHz

5.8.4. Test Data


FREQUENCY (MHz)	RF LEVEL @ 3M (dBuV/m)	DETECTOR USED (Peak/QP/AV)	ANTENNA PLANE (H/V)	LIMIT @ 3M (dBuV/m)	MARGIN (dB)	PASS/ FAIL
119.38	23.13	Peak	V	43.5	-20.4	Pass
119.38	23.89	Peak	H	43.5	-19.6	Pass
159.13	24.14	Peak	V	43.5	-19.4	Pass
159.13	29.67	Peak	H	43.5	-13.8	Pass
198.88	28.93	Peak	V	43.5	-14.6	Pass
198.88	34.31	Peak	H	43.5	-9.2	Pass
265.20	28.70	Peak	V	46.0	-17.3	Pass
265.20	29.98	Peak	H	46.0	-16.0	Pass
278.55	29.27	Peak	V	46.0	-16.7	Pass
278.55	31.01	Peak	H	46.0	-15.0	Pass
298.35	28.57	Peak	V	46.0	-17.4	Pass
298.35	30.32	Peak	H	46.0	-15.7	Pass
318.40	24.71	Peak	V	46.0	-21.3	Pass
318.40	32.68	Peak	H	46.0	-13.3	Pass
358.00	31.95	Peak	V	46.0	-14.1	Pass
358.00	32.97	Peak	H	46.0	-13.0	Pass
397.90	35.49	Peak	V	46.0	-10.5	Pass
397.90	35.56	Peak	H	46.0	-10.4	Pass
437.50	34.42	Peak	V	46.0	-11.6	Pass
437.50	33.29	Peak	H	46.0	-12.7	Pass
477.50	33.05	Peak	V	46.0	-13.0	Pass
477.50	34.99	Peak	H	46.0	-11.0	Pass
516.80	33.04	Peak	V	46.0	-13.0	Pass
516.80	29.68	Peak	H	46.0	-16.3	Pass
556.80	30.84	Peak	V	46.0	-15.2	Pass
556.80	29.34	Peak	H	46.0	-16.7	Pass
596.50	32.72	Peak	V	46.0	-13.3	Pass
596.50	31.91	Peak	H	46.0	-14.1	Pass
636.30	36.73	Peak	V	46.0	-9.3	Pass
636.30	33.26	Peak	H	46.0	-12.7	Pass
676.00	32.79	Peak	V	46.0	-13.2	Pass
676.00	33.27	Peak	H	46.0	-12.7	Pass
715.80	30.82	Peak	V	46.0	-15.2	Pass
715.80	33.12	Peak	H	46.0	-12.9	Pass
795.30	29.48	Peak	V	46.0	-16.5	Pass
795.30	32.62	Peak	H	46.0	-13.4	Pass
874.80	31.63	Peak	V	46.0	-14.4	Pass
874.80	29.46	Peak	H	46.0	-16.5	Pass
954.30	30.26	Peak	V	46.0	-15.7	Pass
954.30	29.48	Peak	H	46.0	-16.5	Pass
1033.34	43.80	Peak	V	54.0	-10.2	Pass
1033.34	45.97	Peak	H	54.0	-8.0	Pass

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
 Tel.: 905-829-1570, Fax.: 905-829-8050

File #: ICOM-145\_FCC15R  
 February 16, 2007

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

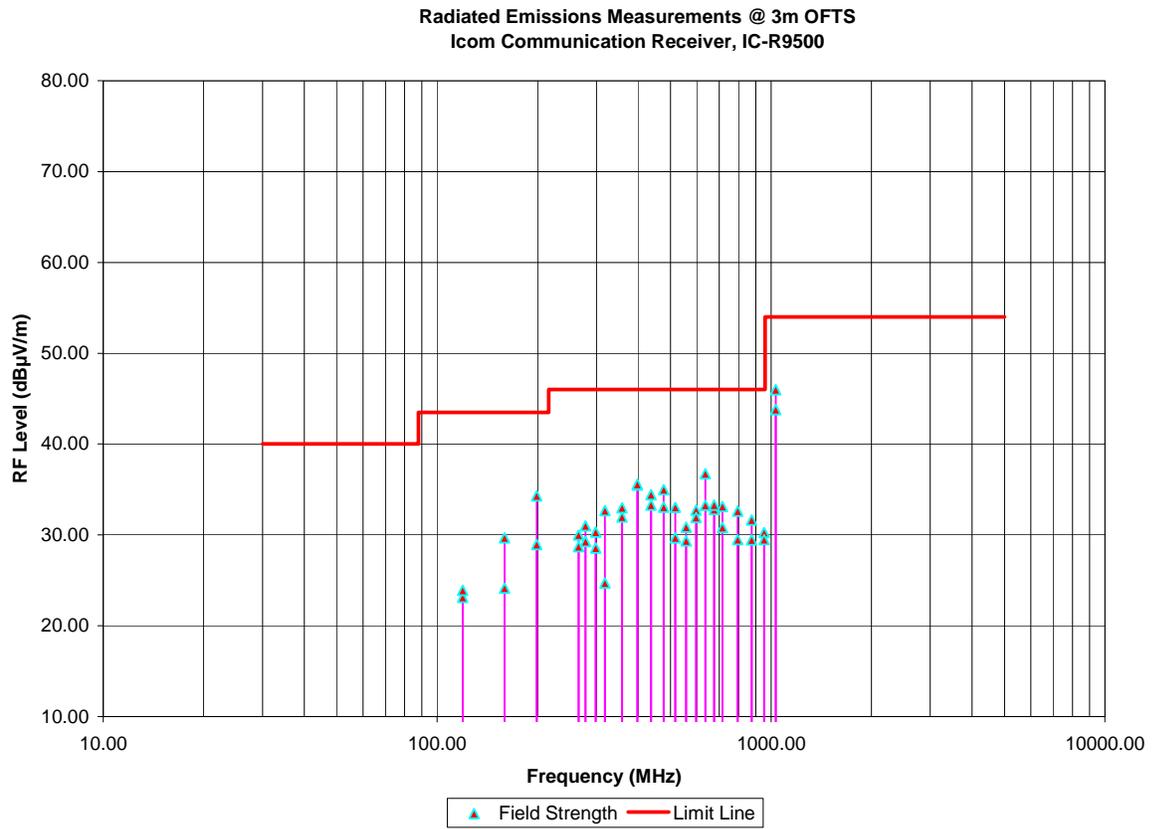

## EXHIBIT 6. MEASUREMENT UNCERTAINTY

The measurement uncertainties stated were calculated in accordance with the requirements of NIST Technical Note 1297 and NIS 81 (1994).

### 6.1. LINE CONDUCTED EMISSION MEASUREMENT UNCERTAINTY

CONTRIBUTION (Line Conducted)	PROBABILITY DISTRIBUTION	UNCERTAINTY (dB)	
		9-150 kHz	0.15-30 MHz
EMI Receiver specification	Rectangular	$\pm 1.5$	$\pm 1.5$
LISN coupling specification	Rectangular	$\pm 1.5$	$\pm 1.5$
Cable and Input Transient Limiter calibration	Normal (k=2)	$\pm 0.3$	$\pm 0.5$
Mismatch: Receiver VRC $\Gamma_1 = 0.03$ LISN VRC $\Gamma_R = 0.8(9 \text{ kHz}) 0.2 (30 \text{ MHz})$ Uncertainty limits $20\text{Log}(1+\Gamma_1\Gamma_R)$	U-Shaped	$\pm 0.2$	$\pm 0.3$
System repeatability	Std. deviation	$\pm 0.2$	$\pm 0.05$
Repeatability of EUT	--	--	--
Combined standard uncertainty	Normal	$\pm 1.25$	$\pm 1.30$
Expanded uncertainty U	Normal (k=2)	$\pm 2.50$	$\pm 2.60$

Sample Calculation for Measurement Accuracy in 150 kHz to 30 MHz Band:

$$u_c(y) = \sqrt{\sum_{i=1}^m u_i^2(y)} = \pm \sqrt{(1.5^2 + 1.5^2)/3 + (0.5/2)^2 + (0.05/2)^2 + 0.35^2} = \pm 1.30 \text{ dB}$$

$$U = 2u_c(y) = \pm 2.6 \text{ dB}$$

## 6.2. RADIATED EMISSION MEASUREMENT UNCERTAINTY

CONTRIBUTION (Radiated Emissions)	PROBABILITY DISTRIBUTION	UNCERTAINTY (+ dB)	
		3 m	10 m
Antenna Factor Calibration	Normal (k=2)	$\pm 1.0$	$\pm 1.0$
Cable Loss Calibration	Normal (k=2)	$\pm 0.3$	$\pm 0.5$
EMI Receiver specification	Rectangular	$\pm 1.5$	$\pm 1.5$
Antenna Directivit	Rectangular	+0.5	+0.5
Antenna factor variation with height	Rectangular	$\pm 2.0$	$\pm 0.5$
Antenna phase center variation	Rectangular	0.0	$\pm 0.2$
Antenna factor frequency interpolation	Rectangular	$\pm 0.25$	$\pm 0.25$
Measurement distance variation	Rectangular	$\pm 0.6$	$\pm 0.4$
Site imperfections	Rectangular	$\pm 2.0$	$\pm 2.0$
Mismatch: Receiver VRC $\Gamma_1 = 0.2$ Antenna VRC $\Gamma_R = 0.67(Bi) 0.3 (Lp)$ Uncertainty limits $20\text{Log}(1 \pm \Gamma_1 \Gamma_R)$	U-Shaped	+1.1 -1.25	$\pm 0.5$
System repeatability	Std. Deviation	$\pm 0.5$	$\pm 0.5$
Repeatability of EUT		-	-
Combined standard uncertainty	Normal	+2.19 / -2.21	+1.74 / -1.72
Expanded uncertainty U	Normal (k=2)	+4.38 / -4.42	+3.48 / -3.44

Calculation for maximum uncertainty when 3m biconical antenna including a factor of k = 2 is used:

$$U = 2u_c(y) = 2x(+2.19) = +4.38 \text{ dB} \quad \text{And} \quad U = 2u_c(y) = 2x(-2.21) = -4.42 \text{ dB}$$

## EXHIBIT 7. MEASUREMENT METHODS

### 7.1. GENERAL TEST CONDITIONS

#### 7.1.1. Test Conditions

- The measurement shall be made in the operational mode producing the largest emission in the frequency band being investigated consistent with normal applications.
- An attempt shall be made to maximize the detected radiated emissions, for example moving cables of the equipment, rotating the equipment by 360° and moving the measuring receiving antenna up and down within 1 to 4 meters high.
- Where appropriate, a single tone or a bit stream shall be used to modulate the receiver. The manufacturer shall define the modulation with the highest emission in transmit mode.

#### 7.1.2. Method of Measurements - AC Mains Conducted Emissions

- AC Mains conducted emissions measurements were performed in accordance with the standard against appropriate limits for each detector function.
- The test was performed in the shielded room, 16'(L) by 16'(W) by 12'(H).
- The test was performed were made over the frequency range from 150 kHz to 30 MHz to determine the line-to-ground radio noise voltage which was conducted from the EUT power-input terminals that were directly connected to a public power network.
- The EUT normally received power from another device that connects to the public utility ac power lines, measurements would be made on that device with the EUT in operation to ensure that the device continues to comply with the appropriate limits while providing the EUT with power.
- If the EUT operates only from internal or dedicated batteries, with no provisions for connection to the public utility ac power lines, AC Mains conducted measurements are not required.
- Table-top devices were placed on a platform of nominal size 1 m by 1.5m raised 80 cm above the conducting ground plane.
- The EUT current-carrying power lead, except the ground (safety) lead, was individually connected through a LISN to the power source. All unused 50-Ohm connectors of the LISN was terminated in 50-ohm when not connected to the measuring instruments.
- The line cord of the EUT connected to one LISN which was connected to the measuring instrument. Those power cords for the units of devices not under measurement were connected to a separate multiple ac outlet. Drawings and photographs of typically conducted emission test setups were shown in the Test Report. Each current-carrying conductor of the EUT shall be individually tested.
- The EUT was normally operated with a ground (safety) connection, the EUT was connected to the ground at the LISN through a conductor provided in the lead from the ac power mains to the LISN.
- The excess length of the power cord was folded back and forth in an 8-shape on a wooden strip with a vertical prong located on the top of the LISN case.
- The EUT was set-up in its typical configuration and operated in its various modes as described in this test report.
- A preliminary scan was made by using spectrum analyzer system with the detector function set to PEAK mode (9 KHz RBW, VBW > RBW), frequency span 150KHz - 30MHz.

- The maximum conducted emission for a given mode of operation was found by using the following step-by-step procedure:
  - Step 1. Monitor the frequency range of interest at a fixed EUT azimuth.
  - Step 2. Manipulate the system cables and peripheral devices to produce highest amplitude signal relative to the limit. Note the amplitude and frequency of the suspect signal.
  - Step 3. The effects of various modes of operation is examined. This is done by varying equipment operation modes as step 2 is being performed.
  - Step 4. After completing step 1 through 3, record EUT and peripheral device configuration, mode of operation, cable configuration, signal levels and frequencies for final test.
- Each highest signal level at the maximized test configuration was zoomed in a small frequency span on the spectrum analyzer's display (the manipulation of cables and peripheral devices and EUT operation modes might have to be repeated to obtain the highest signal level with the spectrum analyzer set to PEAK detector mode 9 KHz RBW and VBW > RBW). The spectrum analyzer was then set to CISPR QUASI-PEAK detector mode (10 KHz RBW, 1 MHz VBW) and AVERAGE detector mode (9 kHz RBW, 1 Hz VBW). The final highest RF signal levels and frequencies were record.

### 7.1.3. Method of Measurements - Electric Field Radiated Disturbance

- The radiated emission measurements were performed at the UltraTech's 3 Meter Open Field Test Site (OFTS) situated in the Town of Oakville, province of Ontario. The Attenuation Characteristics of OFTS have been filed to FCC, Industry Canada, ACA/Austel, NVLap and ITI.
- Radiated emissions measurements were made using the following test instruments:
  1. Calibrated EMCO BiconiLog antenna in the frequency range from 30 MHz to 2000 MHz.
  2. Calibrated Emco Horn antennas in the frequency range above 1000 MHz (1GHz - 40 GHz).
  3. Calibrated Advantest spectrum analyzer and pre-selector. In general, the spectrum analyzer would be used as follows:
    - The rf electric field levels were measured with the spectrum analyzer set to PEAK detector (120 KHz VBW and VBW  $\geq$  RBW).
    - If any rf emission was observed to be a broadband noise, the spectrum analyzer's CISPR QUASI-PEAK detector (120 KHz RBW and VBW  $\geq$  RBW) was then set to measure the signal level.
    - If the signal being measured was narrowband and the ambient field was broadband, the bandwidth of the spectrum analyzer was reduced.
- The EUT was set-up in its typical configuration and operated in its various modes as described in this test report.
- The frequencies of emissions was first detected. Then the amplitude of the emissions was measured at the specified measurement distance using required antenna height, polarization, and detector characteristics.
- During this process, cables and peripheral devices were manipulated within the range of likely configuration.

- For each mode of operation required to be tested, the frequency spectrum was monitored. Variations in antenna heights (from 1 meter to 4 meters above the ground plane), antenna polarization (horizontal plane and vertical plane), cable placement and peripheral placement were explored to produce the highest amplitude signal relative to the limit.

The maximum radiated emission for a given mode of operation was found by using the following step-by-step procedure:

- Step 1: Monitor the frequency range of interest at a fixed antenna height and EUT azimuth.
- Step 2: Manipulate the system cables to produce highest amplitude signal relative to the limit. Note the amplitude and frequency of the suspect signal.
- Step 3: Rotate the EUT 360 degrees to maximize the suspected highest amplitude signal. If the signal or another at a different frequency is observed to exceed the previously noted highest amplitude signal by 1 dB or more, go back to the azimuth and repeat Step 2. Otherwise, orient the EUT azimuth to repeat the highest amplitude observation and proceed.
- Step 4: Move the antenna over its full allowed range of travel (1 to 4 meters) to maximize the suspected highest amplitude signal. If the signal or another at a different frequency is observed to exceed the previously noted highest amplitude signal by 1 dB or more, return to Step 2 with the highest amplitude observation and proceed.
- Step 5: Change the polarization of the antenna and repeat Step 2 through 4. Compare the resulting suspected highest amplitude signal with that found for the other polarization. Select and note the higher of the two signals. This signal is termed the highest observed signal with respect to the limit for this EUT operational mode.
- Step 6: The effects of various modes of operation is examined. This is done by varying the equipment modes as steps 2 through 5 are being performed.
- Step 7: After completing steps 1 through 6, record the final highest emission level, frequency, antenna polarization and detector mode of the measuring instrument.

**Calculation of Field Strength:**

The field strength is calculated by adding the calibrated antenna factor and cable factor, and subtracting the Amplifier gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG$$

Where FS = Field Strength  
RA = Receiver/Analyzer Reading  
AF = Antenna Factor  
CF = Cable Attenuation Factor  
AG = Amplifier Gain

Example: If a receiver reading of 60.0 dB $\mu$ V is obtained, the antenna factor of 7.0 dB/m and cable factor of 1.0 dB are added, and the amplifier gain of 30 dB is subtracted. The actual field strength will be:

Field Level = 60 + 7.0 + 1.0 - 30 = 38.0 dB $\mu$ V/m.

Field Level = 10<sup>(38/20)</sup> = 79.43  $\mu$ V/m.