


RF TEST REPORT



Report No.: FCC IC_RF_SL17090601-SEV-051
Supersede Report No.: None

FCC Applicant	:	Icom Incorporated
IC Applicant	:	Icom Canada Inc
Product Name	:	Battery charger
Model No.	:	375000-01 (BC-218)
Test Standard	:	47 CFR 15.247 RSS 247 Iss 2: Feb 2017
Test Method	:	ANSI C63.10: 2013 RSS Gen Iss 4: Nov 2014 558074 D01 DTS Meas Guidance v04
FCC ID	:	AFJ375000
IC ID	:	202D-375000
Dates of test	:	10/14/2017
Issue Date	:	10/20/2017
Test Result	:	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail
Equipment complied with the specification [X] Equipment did not comply with the specification []		

This Test Report is Issued Under the Authority of:

	
Anish Kumar	Gary Chou
Test Engineer	Engineer Reviewer

Issued By:
SIEMIC Laboratories
775 Montague Expressway, Milpitas, 95035 CA



775 Montague Expressway, Milpitas, CA 95035, USA • Phone: (+1) 408 526 1188 • Facsimile (+1) 408 526 1088

Visit us at: www.siemic.com; Follow us at:    

Laboratory Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Accreditation Body	Scope
USA	FCC, A2LA	EMC, RF/Wireless, Telecom
Canada	IC, A2LA, NIST	EMC, RF/Wireless, Telecom
Taiwan	BSMI, NCC, NIST	EMC, RF, Telecom, Safety
Hong Kong	OFTA, NIST	RF/Wireless, Telecom
Australia	NATA, NIST	EMC, RF, Telecom, Safety
Korea	KCC/RRA, NIST	EMI, EMS, RF, Telecom, Safety
Japan	VCCI, JATE, TELEC, RFT	EMI, RF/Wireless, Telecom
Mexico	NOM, COFETEL, Caniety	Safety, EMC, RF/Wireless, Telecom
Europe	A2LA, NIST	EMC, RF, Telecom, Safety
Israel	MOC, NIST	EMC, RF, Telecom, Safety

Accreditations for Product Certifications

Country	Accreditation Body	Scope
USA	FCC TCB, NIST	EMC, RF, Telecom
Canada	IC FCB, NIST	EMC, RF, Telecom
Singapore	iDA, NIST	EMC, RF, Telecom
EU	NB	EMC & R&TTE Directive
Japan	MIC (RCB 208)	RF, Telecom
Hong Kong	OFTA (US002)	RF, Telecom

CONTENTS

1	REPORT REVISION HISTORY.....	4
2	EXECUTIVE SUMMARY	5
3	CUSTOMER INFORMATION	5
4	TEST SITE INFORMATION.....	5
5	MODIFICATION.....	5
6	EUT INFORMATION.....	6
6.1	EUT Description	6
6.2	Radio Description	6
6.3	EUT Photos External.....	7
6.4	EUT Photos Internal.....	8
6.5	EUT Test Setup Photos	9
7	SUPPORTING EQUIPMENT/SOFTWARE AND CABLING DESCRIPTION	10
7.1	Supporting Equipment	10
7.2	Cabling Description.....	10
7.3	Test Software Description	10
8	TEST SUMMARY	11
9	MEASUREMENT UNCERTAINTY	12
9.1	Radiated Emissions (30MHz to 1GHz)	12
9.2	Radiated Emissions (1GHz to 40GHz)	12
9.3	RF conducted measurement	13
10	MEASUREMENTS, EXAMINATION AND DERIVED RESULTS.....	14
10.1	Radiated Spurious Emissions in restricted band.....	14
10.2	Radiated Spurious Emissions below 1GHz.....	16
10.3	Radiated Spurious Emissions between 1GHz – 26.5GHz	19
	ANNEX A. TEST INSTRUMENT	22
	ANNEX B. SIEMIC ACCREDITATION	23

1 Report Revision History

Report No.	Report Version	Description	Issue Date
FCC IC_RF_SL17090601-SEV-051	None	Original	10/20/2017

2 Executive Summary

The purpose of this test program was to demonstrate compliance of following product

Company: Icom
Product: Battery Charger
Model: 375000-01 (BC-218)

against the current Stipulated Standards. The specified model product stated above has demonstrated compliance with the Stipulated Standard listed on 1st page.

3 Customer information

FCC

Applicant Name	:	Icom Incorporated
Applicant Address	:	1-1-32 Kamiminami Hirano-ku, Osaka Japan 547-0003 Japan
Manufacturer Name	:	Icom Incorporated
Manufacturer Address	:	1-1-32 Kamiminami Hirano-ku, Osaka Japan 547-0003 Japan

IC

Applicant Name	:	Icom Canada Inc
Applicant Address	:	Delta, BC, V4K5B8 150-6165 Hwy 17A
Manufacturer Name	:	Icom Canada Inc
Manufacturer Address	:	Delta, BC, V4K5B8 150-6165 Hwy 17A

4 Test site information

Lab performing tests	SIEMIC Laboratories
Lab Address	775 Montague Expressway, Milpitas, CA 95035
FCC Test Site No.	881796
IC Test Site No.	4842D-2
VCCI Test Site No.	A0133

5 Modification

Index	Item	Description	Note
-	-	-	-

6 EUT Information

6.1 EUT Description

Product Name	Battery Charger
Model No.	BC-218
Trade Name	Icom
Serial No.	01001380
Host Model No.	N/A
Input Power	12 Vdc
Power Adapter Manu/Model	I.T.E / SA142D-12U
Date of EUT received	10/02/2017
Equipment Class/ Category	DTS
Clock Frequencies	N/A
Port/Connectors	MicroUSB

6.2 Radio Description

Bluetooth :

Radio Type	Bluetooth (Ver4.1)
Operating Frequency	2402MHz-2480MHz
Modulation	GFSK, $\pi/4$ DPSK, 8DPSK
Channel Spacing	1 MHz
Antenna Type	Multilayer Monopole Antenna
Antenna Gain	2.7 dBi
Antenna Connector Type	N/A
Note	N/A

6.3 EUT Photos | External



EUT - View 1



EUT - View 2



EUT - View 3




Adaptor - View 1



Adaptor - View 2

6.4 EUT Photos | Internal

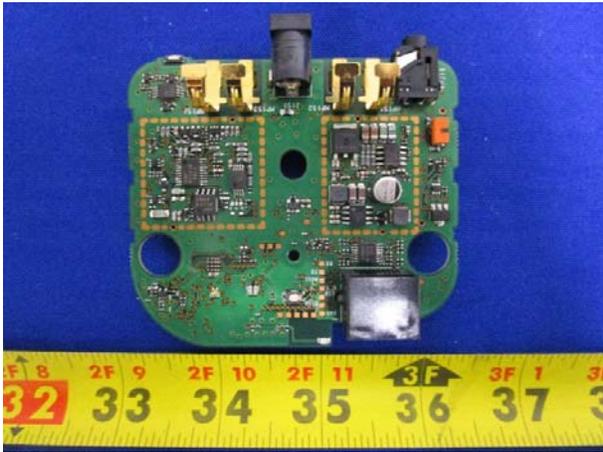

Main Board - Top View




Main Board - Bottom View

6.5 EUT Test Setup Photos



Radiated Emissions 30-1000MHz - Front View

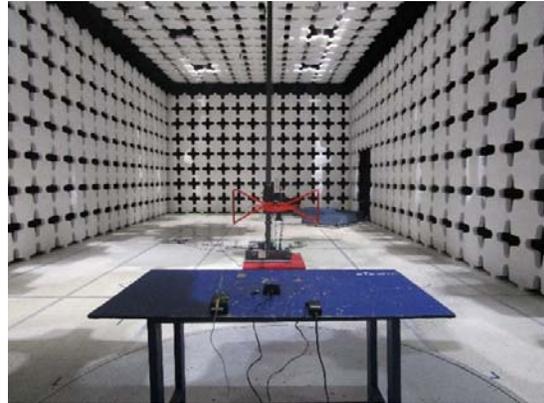

Radiated Emissions 30-1000MHz- Rear View



Radiated Emissions Above 1GHz - Front View



Radiated Emissions Above 1GHz - Rear View

7 Supporting Equipment/Software and cabling Description

7.1 Supporting Equipment

Item	Supporting Equipment Description	Model	Serial Number	Manufacturer	Note
1	Laptop	HP Stream	N/A	HP	-
2	Fixture	N/A	N/A	N/A	-

7.2 Cabling Description

Name	Connection Start		Connection Stop		Length / shielding Info		Note
	From	I/O Port	To	I/O Port	Length (m)	Shielding	
USB	EUT	USB	Fixture	Laptop	1	YES	-

7.3 Test Software Description

Test Item	Software	Description
RF Testing	BLUE TEST 3	Control Bluetooth Module

8 Test Summary

Test Item	Test standard		Test Method/Procedure		Pass / Fail
Restricted Band of Operation	FCC	15.205	FCC	ANSI C63.10:2013 558074 D01 DTS Meas Guidance v04	<input type="checkbox"/> Pass
	IC	RSS Gen 8.10	IC		<input checked="" type="checkbox"/> N/A
AC Conducted Emissions	FCC	15.207(a)	FCC	ANSI C63.10:2013	<input type="checkbox"/> Pass
	IC	RSS Gen 8.8	IC	RSS Gen Issue 4: 2014	<input checked="" type="checkbox"/> N/A

DTS Band Requirement

Test Item	Test standard		Test Method/Procedure		Pass / Fail
99% Occupied Bandwidth	-	-	-	-	<input type="checkbox"/> Pass
	IC	RSS Gen 6.6	IC	RSS Gen Issue 4: 2014 -	<input checked="" type="checkbox"/> N/A
6dB Bandwidth	FCC	15.247(a)(2)	FCC	558074 D01 DTS Meas Guidance v04	<input type="checkbox"/> Pass
	IC	RSS247 (5.2.1)	IC		<input checked="" type="checkbox"/> N/A
Band Edge and Radiated Spurious Emissions	FCC	15.247(d)	FCC	ANSI C63.10:2013 558074 D01 DTS Meas Guidance v04	<input checked="" type="checkbox"/> Pass
	IC	RSS247 (5.5)	IC		<input type="checkbox"/> N/A
Output Power	FCC	15.247(b)	FCC	558074 D01 DTS Meas Guidance v04	<input type="checkbox"/> Pass
	IC	RSS247 (5.4.4)	IC		<input checked="" type="checkbox"/> N/A
Receiver Spurious Emissions	IC	RSS Gen (4.8)	IC	RSS Gen Issue 4: 2014	<input type="checkbox"/> Pass <input checked="" type="checkbox"/> N/A
Antenna Gain > 6 dBi	FCC	15.247(e)	FCC	-	<input type="checkbox"/> Pass
	IC	-	IC	-	<input checked="" type="checkbox"/> N/A
Power Spectral Density	FCC	15.247(e)	FCC	558074 D01 DTS Meas Guidance v04	<input type="checkbox"/> Pass
	IC	RSS247 (5.2.2)	IC		<input checked="" type="checkbox"/> N/A
RF Exposure requirement	FCC	15.247(i)	FCC	-	<input type="checkbox"/> Pass
	IC	RSS Gen(5.5)	IC	RSS Gen Issue 4: 2014	<input checked="" type="checkbox"/> N/A

Remark	<ol style="list-style-type: none"> All measurement uncertainties do not take into consideration for all presented test results. The applicant shall ensure frequency stability by showing that an emission is maintained within the band of operation under all normal operating conditions as specified in the user's manual.
--------	--

9 Measurement Uncertainty

9.1 Radiated Emissions (30MHz to 1GHz)

The test is to measure the radiated emissions of the EUT.

Some error sources that can contribute to the total uncertainty:

- Uncertainty of the receiver
- Uncertainty of the antenna
- Uncertainty of cables
- Uncertainty due to the mismatches
- NSA Calibration
- Etc., details see the below table

Source of Uncertainty	Value (dB)	Probability Distribution	Division	Sensitivity Coefficient	Expanded Uncertainty
Receiver Reading	0.12	Rectangular	1.732	1	0.069284
Cable Insertion Loss	0.21	Normal	2	1	0.105
Filter Insertion Loss	0.25	Normal	2	1	0.125
Antenna Factor	0.65	Normal	2	1	0.325
Receiver CW accuracy	0.5	Rectangular	1.732	1	0.2886836
Pulse Amplitude Response	1.5	Rectangular	1.732	1	0.86605081
PRF Response	1.5	Rectangular	1.732	1	0.86605081
Mismatch Filter - Receiver	0.25	U-Shape	1.414	1	0.1768033
NSA Calibration	4.0	U-Shape	1.414	1	2.8288543
Combined Standard Uncertainty					3.0059131
Expanded Uncertainty (K=2)					6.0118262

The total derived measurement uncertainty is +/- 6.00 dB.

9.2 Radiated Emissions (1GHz to 40GHz)

The test is to measure the radiated emissions of the EUT.

Some error sources that can contribute to the total uncertainty:

- Uncertainty of the receiver
- Uncertainty of the antenna
- Uncertainty of cables
- Uncertainty due to the mismatches
- VSWR Calibration
- Etc., details see the below table

Source of Uncertainty	Value (dB)	Probability Distribution	Division	Sensitivity Coefficient	Expanded Uncertainty
Receiver Reading	0.12	Rectangular	1.732	1	0.0692840
Cable Insertion Loss	0.21	Normal	2	1	0.1050000
Filter Insertion Loss	0.25	Normal	2	1	0.1250000
Antenna Factor	0.65	Normal	2	1	0.3250000
Receiver CW accuracy	0.5	Rectangular	1.732	1	0.2886836
Pulse Amplitude Response	1.5	Rectangular	1.732	1	0.8660508
PRF Response	1.5	Rectangular	1.732	1	0.8660508
Mismatch Filter - Receiver	0.25	U-Shape	1.414	1	0.1768033
VSWR Calibration	2.0	U-Shape	1.414	1	1.4144272
Combined Standard Uncertainty					4.2363
Expanded Uncertainty (K=2)					8.4726

The total derived measurement uncertainty is +/- 8.47 dB.

9.3 RF conducted measurement

The test is to measure the RF output power from the EUT.

Some error sources that can contribute to the total uncertainty:

- Uncertainty of the Reference Level Uncertainty
- Uncertainty of variable attenuators
- Uncertainty of cables
- Uncertainty due to the mismatches


Source of Uncertainty	Value (dB)	Probability Distribution	Division	Sensitivity Coefficient	Expanded Uncertainty
Reference Level	0.12	Rectangular	1.732	1	0.069284
Cable Insertion Loss	0.21	Normal	2	1	0.105
Attenuator	0.25	Normal	2	1	0.125
Mismatch	0.25	U-Shape	1.414	1	0.1768033
Combined Standard Uncertainty					0.476087
Expanded Uncertainty (K=2)					0.952174

The total derived measurement uncertainty is +/- 0.95 dB.

10 Measurements, Examination and Derived Results

10.1 Radiated Spurious Emissions in restricted band

Requirement(s):

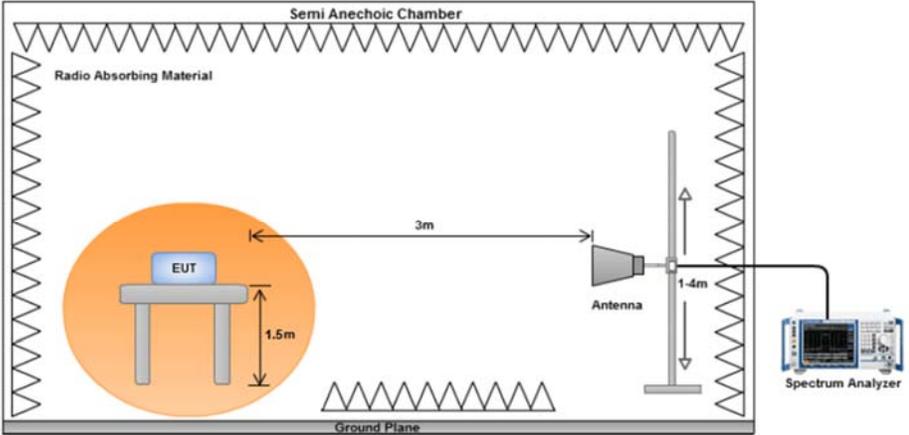
Spec	Item	Requirement	Applicable
47CFR§15.247(d), RSS210(A8.5)	a)	For non-restricted band, In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB or 30dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, determined by the measurement method on output power to be used. Attenuation below the general limits specified in § 15.209(a) is not required <input type="checkbox"/> 20 dB down <input checked="" type="checkbox"/> 30 dB down	<input checked="" type="checkbox"/>
	b)	or restricted band, emission must also comply with the radiated emission limits specified in 15.209	<input checked="" type="checkbox"/>
Test Setup			
Procedure	<ol style="list-style-type: none"> The EUT was switched on and allowed to warm up to its normal operating condition. The test was carried out at the selected frequency points obtained from the EUT characterisation. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: <ol style="list-style-type: none"> Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen. The EUT was then rotated to the direction that gave the maximum emission. Finally, the antenna height was adjusted to the height that gave the maximum emission. An average measurement was then made for that frequency point. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured. 		
Remark	The EUT was scanned up to 40GHz. Both horizontal and vertical polarities were investigated. The results show only the worst case. Radiated measurement was measured with antenna port terminated, there isn't outstanding emission found at the edge of restricted frequency, within x dB margin		
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Test Data Yes (See below) N/A

Test Plot Yes (See below) N/A


Test was done by Anish Kumar at 10m chamber.

Restricted Band Measurement Plots:

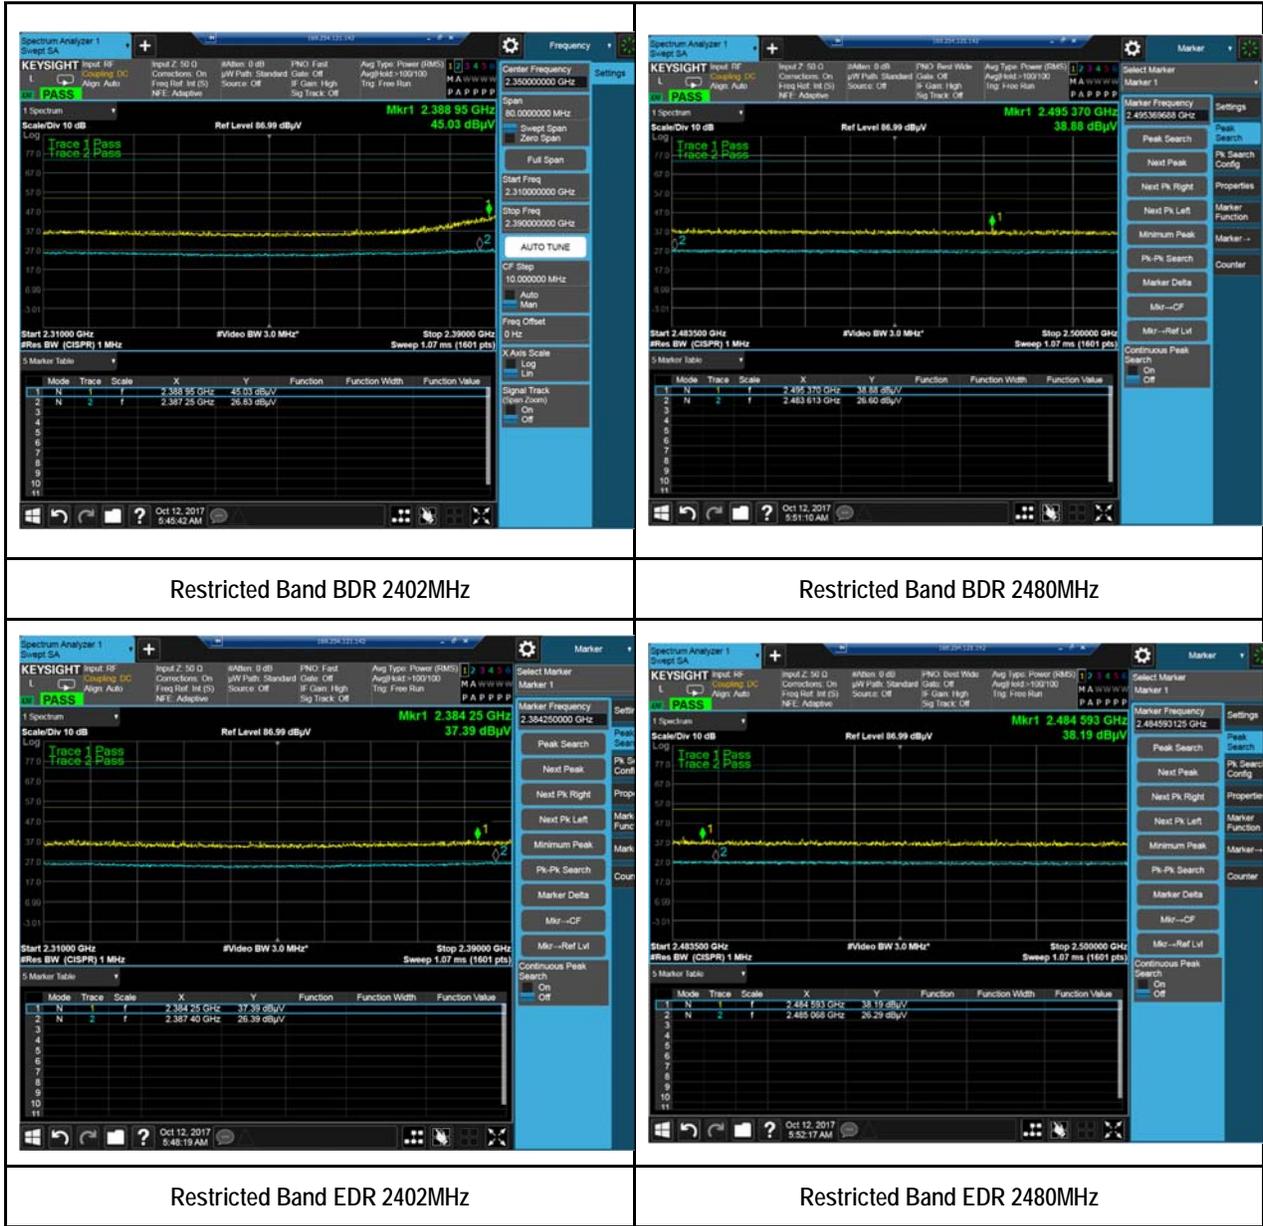

10.2 Radiated Spurious Emissions below 1GHz

Requirement(s):

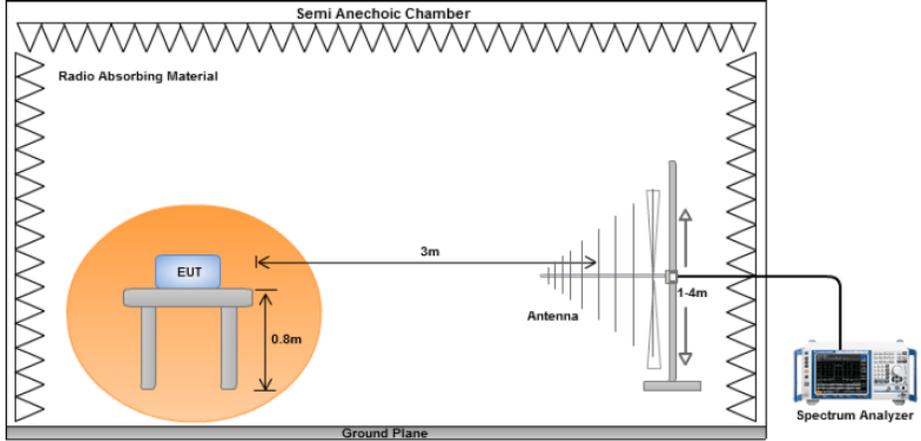Spec	Item	Requirement	Applicable										
47CFR§15.247(d) RSS247 (5.5)	a)	<p>Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges</p> <table border="1"> <thead> <tr> <th>Frequency range (MHz)</th> <th>Field Strength (uV/m)</th> </tr> </thead> <tbody> <tr> <td>30 – 88</td> <td>100</td> </tr> <tr> <td>88 – 216</td> <td>150</td> </tr> <tr> <td>216 960</td> <td>200</td> </tr> <tr> <td>Above 960</td> <td>500</td> </tr> </tbody> </table>	Frequency range (MHz)	Field Strength (uV/m)	30 – 88	100	88 – 216	150	216 960	200	Above 960	500	☒
Frequency range (MHz)	Field Strength (uV/m)												
30 – 88	100												
88 – 216	150												
216 960	200												
Above 960	500												
Test Setup													
Procedure	<ol style="list-style-type: none"> The EUT was switched on and allowed to warm up to its normal operating condition. The test was carried out at the selected frequency points obtained from the EUT characterisation. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: <ol style="list-style-type: none"> Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen. The EUT was then rotated to the direction that gave the maximum emission. Finally, the antenna height was adjusted to the height that gave the maximum emission. A Quasi-peak measurement was then made for that frequency point. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured. 												
Remark	The EUT was scanned up to 1GHz. Both horizontal and vertical polarities were investigated. The results show only the worst case.												
Result	☒ Pass ☐ Fail												


Test Data ☒ Yes (See below) ☐ N/A

Test Plot ☒ Yes (See below) ☐ N/A

Test was done by Anish Kumar at 10m chamber.

Radiated Emission Test Results (Below 1GHz)


Test specification	below 1GHz			Result	Pass
Environmental Conditions:	Temp (°C):	26.1			
	Humidity (%)	47.5			
	Atmospheric (mbar):	1020			
Mains Power:	120VAC, 60Hz				
Tested by:	Anish Kumar				
Test Date:	10/13/2017				
Remarks:	TX MODE DH5 2402 MHz				

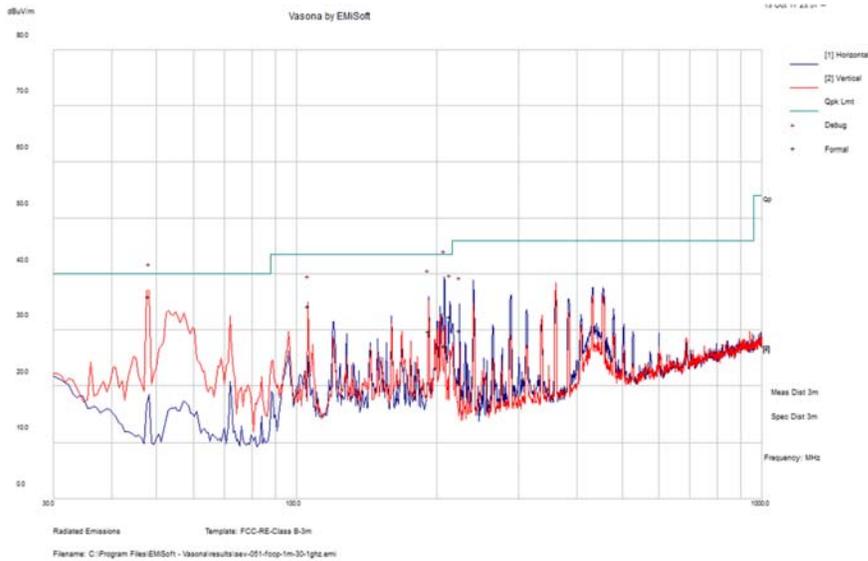

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
207.43	39.05	12.9	-24.81	27.13	Quasi Max	H	136	356	43.50	-16.37	Pass
47.95	51.02	11.56	-26.63	35.95	Quasi Max	V	101	151	40.00	-4.05	Pass
191.99	42.5	12.78	-25.52	29.76	Quasi Max	H	150	323	43.50	-13.74	Pass
213.31	45.08	12.94	-25.71	32.3	Quasi Max	H	161	356	43.50	-11.20	Pass
105.65	47.11	12.07	-24.96	34.23	Quasi Max	V	382	12	43.50	-9.27	Pass
224.00	42.36	13.03	-25.5	29.89	Quasi Max	H	176	36	46.00	-16.11	Pass

Note: Both horizontal and vertical polarities were investigated. The results above show only the worst case.

Test specification	below 1GHz			Result	Pass
Environmental Conditions:	Temp (°C):	26.1			
	Humidity (%)	47.5			
	Atmospheric (mbar):	1020			
Mains Power:	120VAC, 60Hz				
Tested by:	Anish Kumar				
Test Date:	10/13/2017				
Remarks:	TX MODE 3DH5 2437 MHz				

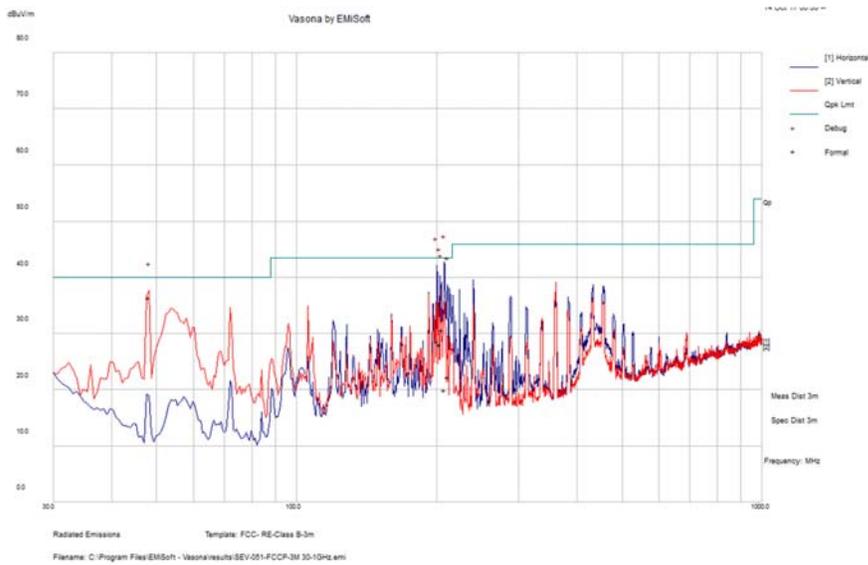


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
207.41	31.88	12.9	-24.81	19.97	Quasi Max	H	329	21	43.50	-23.53	Pass
199.95	40.27	12.85	-24.54	28.58	Quasi Max	H	237	347	43.50	-14.92	Pass
47.99	51.48	11.56	-26.65	36.39	Quasi Max	V	102	110	40.00	-3.61	Pass
202.75	39.45	12.87	-24.33	27.99	Quasi Max	H	181	174	43.50	-15.51	Pass
204.81	41.96	12.88	-24.18	30.66	Quasi Max	H	182	176	43.50	-12.84	Pass
210.87	34.94	12.92	-25.55	22.31	Quasi Max	H	100	147	43.50	-21.19	Pass

Note: Both horizontal and vertical polarities were investigated. The results above show only the worst case.

10.3 Radiated Spurious Emissions between 1GHz – 26.5GHz

Requirement(s):

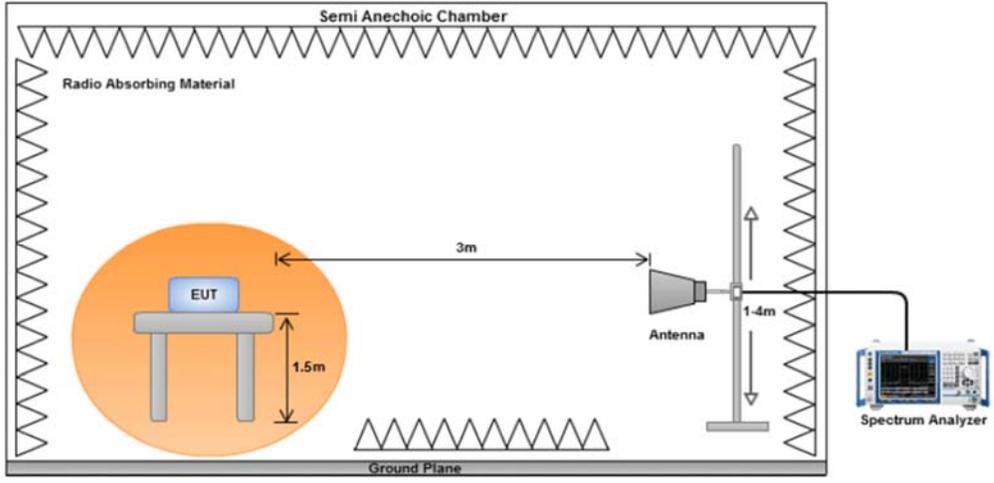Spec	Item	Requirement	Applicable
47CFR§15.247(d), RSS210(A8.5)	a)	For non-restricted band, In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB or 30dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, determined by the measurement method on output power to be used. Attenuation below the general limits specified in § 15.209(a) is not required <input type="checkbox"/> 20 dB down <input checked="" type="checkbox"/> 30 dB down	<input checked="" type="checkbox"/>
	b)	or restricted band, emission must also comply with the radiated emission limits specified in 15.209	<input checked="" type="checkbox"/>
Test Setup			
Procedure	<ol style="list-style-type: none"> 1. The EUT was switched on and allowed to warm up to its normal operating condition. 2. The test was carried out at the selected frequency points obtained from the EUT characterisation. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: <ol style="list-style-type: none"> a. Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen. b. The EUT was then rotated to the direction that gave the maximum emission. c. Finally, the antenna height was adjusted to the height that gave the maximum emission. 3. An average measurement was then made for that frequency point. 4. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured. 		
Remark	The EUT was scanned up to 40GHz. Both horizontal and vertical polarities were investigated. The results show only the worst case. There isn't outstanding emission found at the edge of restricted frequency.		
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Test Data Yes (See below) N/A

Test Plot Yes (See below) N/A

Test was done by Anish Kumar at 10m chamber.

Radiated Emission Test Results (Above 1GHz)

Bluetooth BDR – 2402MHz

Frequency (MHz)	Raw (dBuV)	Cable Loss (dB)	AF (dB)	Level (dBuV/m)	Measurement Type	Pol (V/H)	Hgt (cm)	Azt (Deg)	Limit (dBuV/m)	Margin (dB)	Pass /Fail
7202.74	40.13	7.36	-11.59	35.9	Peak Max	V	202	267	74	-38.1	Pass
9607.57	39.81	7.89	-10.42	37.28	Peak Max	H	163	227	74	-36.72	Pass
4803.41	39.97	7.04	-17.29	29.71	Peak Max	H	190	0	74	-44.29	Pass
7202.74	27.76	7.36	-11.59	23.54	Average Max	V	202	267	54	-30.46	Pass
9607.57	28.19	7.89	-10.42	25.66	Average Max	H	163	227	54	-28.34	Pass
4803.41	27.47	7.04	-17.29	17.21	Average Max	H	190	0	54	-36.79	Pass

Bluetooth BDR – 2441MHz

Frequency (MHz)	Raw (dBuV)	Cable Loss (dB)	AF (dB)	Level (dBuV/m)	Measurement Type	Pol (V/H)	Hgt (cm)	Azt (Deg)	Limit (dBuV/m)	Margin (dB)	Pass /Fail
7324.23	39.86	7.34	-11.53	35.66	Peak Max	V	161	146	74	-38.34	Pass
9766.40	39.58	7.95	-10.3	37.24	Peak Max	V	99	210	74	-36.76	Pass
4881.08	40.34	7.06	-17.07	30.33	Peak Max	H	167	248	74	-43.67	Pass
7324.23	27.6	7.34	-11.53	23.4	Average Max	V	161	146	54	-30.6	Pass
9766.40	27.19	7.95	-10.3	24.85	Average Max	V	99	210	54	-29.16	Pass
4881.08	27.74	7.06	-17.07	17.72	Average Max	H	167	248	54	-36.28	Pass

Bluetooth BDR – 2480MHz

Frequency (MHz)	Raw (dBuV)	Cable Loss (dB)	AF (dB)	Level (dBuV/m)	Measurement Type	Pol (V/H)	Hgt (cm)	Azt (Deg)	Limit (dBuV/m)	Margin (dB)	Pass /Fail
7440.37	39.88	7.32	-11.44	35.76	Peak Max	H	217	81	74	-38.24	Pass
9922.34	39.84	8.02	-10.16	37.7	Peak Max	V	102	177	74	-36.3	Pass
4959.89	39.74	7.08	-16.89	29.93	Peak Max	H	182	145	74	-44.07	Pass
7440.37	27.64	7.32	-11.44	23.51	Average Max	H	217	81	54	-30.49	Pass
9922.34	27.66	8.02	-10.16	25.52	Average Max	H	178	8	54	-28.48	Pass
4959.89	27.99	7.08	-16.89	18.18	Average Max	H	182	145	54	-35.82	Pass

EDR – 2402MHz

Frequency (MHz)	Raw (dBuV)	Cable Loss (dB)	AF (dB)	Level (dBuV/m)	Measurement Type	Pol (V/H)	Hgt (cm)	Azt (Deg)	Limit (dBuV/m)	Margin (dB)	Pass /Fail
9606.07	39.27	7.89	-10.42	36.73	Peak Max	H	101	194	74	-37.27	Pass
7203.22	39.34	7.36	-11.59	35.11	Peak Max	V	210	164	74	-38.89	Pass
4803.48	39.39	7.04	-17.29	29.13	Peak Max	H	165	274	74	-44.87	Pass
9606.07	27.78	7.89	-10.42	25.24	Average Max	H	101	194	54	-28.76	Pass
7203.22	27.61	7.36	-11.59	23.39	Average Max	V	210	164	54	-30.61	Pass
4803.48	27.23	7.04	-17.29	16.97	Average Max	H	165	274	54	-37.03	Pass

EDR – 2441MHz

Frequency (MHz)	Raw (dBuV)	Cable Loss (dB)	AF (dB)	Level (dBuV/m)	Measurement Type	Pol (V/H)	Hgt (cm)	Azt (Deg)	Limit (dBuV/m)	Margin (dB)	Pass /Fail
9766.80	39.7	7.95	-10.3	37.36	Peak Max	V	167	290	74	-36.64	Pass
7322.86	39.31	7.34	-11.53	35.12	Peak Max	V	156	124	74	-38.88	Pass
4881.92	40.31	7.06	-17.07	30.29	Peak Max	H	203	105	74	-43.71	Pass
9766.80	27.42	7.95	-10.3	25.08	Average Max	V	167	290	54	-28.92	Pass
7322.86	27.54	7.34	-11.53	23.35	Average Max	V	156	124	54	-30.65	Pass
4881.92	27.71	7.06	-17.07	17.7	Average Max	H	203	105	54	-36.3	Pass

EDR – 2480MHz

Frequency (MHz)	Raw (dBuV)	Cable Loss (dB)	AF (dB)	Level (dBuV/m)	Measurement Type	Pol (V/H)	Hgt (cm)	Azt (Deg)	Limit (dBuV/m)	Margin (dB)	Pass /Fail
9921.94	39.67	8.02	-10.16	37.53	Peak Max	V	196	260	74	-36.47	Pass
7440.64	39.24	7.32	-11.44	35.12	Peak Max	H	178	290	74	-38.88	Pass
4958.64	38.7	7.08	-16.89	28.89	Peak Max	H	244	177	74	-45.11	Pass
9921.94	27.67	8.02	-10.16	25.53	Average Max	V	196	260	54	-28.47	Pass
7440.64	27.53	7.32	-11.44	23.41	Average Max	H	178	290	54	-30.59	Pass
4958.64	26.47	7.08	-16.89	16.66	Average Max	H	244	177	54	-37.35	Pass

Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Cycle	Cal Due	In use
Conducted Emissions						
R & S Receiver	ESIB 40	100179	06/08/2017	1 Year	06/08/2018	<input type="checkbox"/>
CHASE LISN	MN2050B	1018	08/07/2016	1 Year	08/07/2017	<input type="checkbox"/>
Radiated Emissions						
Spectrum Analyzer	N9010A	10SL0219	08/20/2016	1 Year	08/20/2018	<input checked="" type="checkbox"/>
RF Preampifier	LPA-6-30	11140711	02/19/2017	1 Year	02/19/2018	<input checked="" type="checkbox"/>
Bi-Log antenna (30MHz~2GHz)	JB1	A030702	08/12/2016	1 Year	08/12/2018	<input checked="" type="checkbox"/>
Horn Antenna (1GHz~26GHz)	3115	100059	08/25/2016	1 Year	08/25/2018	<input checked="" type="checkbox"/>
10 Meters SAC	10M	N/A	09/05/2016	1 Year	09/05/2018	<input checked="" type="checkbox"/>
RF Conducted Measurement						
Spectrum Analyzer	N9010A	10SL0219	08/20/2016	1 Year	08/20/2017	<input type="checkbox"/>

Annex B. SIEMIC Accreditation

Accreditations	Document	Scope / Remark
ISO 17025 (A2LA)		Please see the documents for the detailed scope
ISO Guide 65 (A2LA)		Please see the documents for the detailed scope
TCB Designation		A1 , A2 , A3 , A4 , B1 , B2 , B3 , B4 , C
FCC DoC Accreditation		FCC Declaration of Conformity Accreditation
FCC Site Registration		3 meter site
FCC Site Registration		10 meter site
IC Site Registration		3 meter site
IC Site Registration		10 meter site
EU NB		Radio & Telecommunications Terminal Equipment: EN45001 – EN ISO/IEC 17025
		Electromagnetic Compatibility: EN45001 – EN ISO/IEC 17025
Singapore iDA CB(Certification Body)	 	Phase I , Phase II
Vietnam MIC CAB Accreditation		Please see the document for the detailed scope
Hong Kong OFCA		(Phase II) OFCA Foreign Certification Body for Radio and Telecom
		(Phase I) Conformity Assessment Body for Radio and Telecom
Industry Canada CAB		Radio: Scope A – All Radio Standard Specification in Category I
		Telecom: CS-03 Part I, II, V, VI, VII, VIII

Japan Recognized Certification Body Designation		Radio: A1. Terminal equipment for purpose of calling Telecom: B1. Specified radio equipment specified in Article 38-2, Paragraph 1, Item 1 of the Radio Law
Korea CAB Accreditation		EMI: KCC Notice 2008-39, RRL Notice 2008-3: CA Procedures for EMI KN22: Test Method for EMI EMS: KCC Notice 2008-38, RRL Notice 2008-4: CA Procedures for EMS KN24, KN61000-4-2, -4-3, -4-4, -4-5, -4-6, -4-8, -4-11: Test Method for EMS
		Radio: RRL Notice 2008-26, RRL Notice 2008-2, RRL Notice 2008-10, RRL Notice 2007-49, RRL Notice 2007-20, RRL Notice 2007-21, RRL Notice 2007-80, RRL Notice 2004-68 Telecom: President Notice 20664, RRL Notice 2007-30, RRL Notice 2008-7 with attachments 1, 3, 5, 6; President Notice 20664, RRL Notice 2008-7 with attachment 4
Taiwan NCC CAB Recognition		LP0002, PSTN01, ADSL01, ID0002, IS6100, CNS14336, PLMN07, PLMN01, PLMN08
Taiwan BSMI CAB Recognition		CNS 13438
Japan VCCI		R-3083: Radiation 3 meter site C-3421: Main Ports Conducted Interference Measurement T-1597: Telecommunication Ports Conducted Interference Measurement
Australia CAB Recognition		EMC: AS/NZS CISPR 11, AS/NZS CISPR 14.1, AS/NZS CISPR22, AS/NZS 61000.6.3, AS/NZS 61000.6.4 Radio communications: AS/NZS 4281, AS/NZS 4268, AS/NZS 4280.1, AS/NZS 4280.2, AS/NZS 4295, AS/NZS 4582, AS/NZS 4583, AS/NZS 4769.1, AS/NZS 4769.2, AS/NZS 4770, AS/NZS 4771
		Telecommunications: AS/ACIF S002:05, AS/ACIF S003:06, AS/ACIF S004:06, AS/ACIF S006:01, AS/ACIF S016:01, AS/ACIF S031:01, AS/ACIF S038:01, AS/ACIF S040:01, AS/ACIF S041:05, AS/ACIF S043.2:06, AS/ACIF S60950.1
Australia NATA Recognition		AS/ACIF S002, AS/ACIF S003, AS/ACIF S004, AS/ACIF S006, AS/ACIF S016, AS/ACIF S031, AS/ACIF S038, AS/ACIF S040, AS/ACIF S041, AS/ACIF S043.2