



BASIC MANUAL

HF/50 MHz TRANSCEIVER

IC-7760



Icom Inc.

Thank you for choosing this Icom product. This product is designed and built with Icom's state of the art technology and craftsmanship. With proper care, this product should provide you with years of trouble-free operation.

IMPORTANT


READ ALL INSTRUCTIONS carefully and completely before using the transceiver.

SAVE THIS INSTRUCTION MANUAL— This instruction manual contains basic operating instructions for the IC-7760. For advanced operating instructions, see the Advanced manual for details. The Advanced manual is available at the following internet address:
<https://www.icomjapan.com/support/>


FEATURES

- **RF Direct Sampling System**
The IC-7760 employs an RF direct sampling system. RF signals are directly converted to digital data in the ADC, and then processed in the FPGA. This system is a leading technology, marking an epoch in amateur radio.
- **The separate configuration**
The IC-7760 consists of the controller and the RF deck.
- **2 identical receivers and speakers**
The IC-7760 has 2 independent receiver circuits and speakers for the Main and Sub bands.
- **A built-in DIGI-SEL unit**
Both the Main and Sub receivers have built-in DIGI-SEL (digital preselector) units. These reject interfering signals.
- **Real-Time Spectrum Scope**
Displays the Main and Sub band conditions. It provides class-leading performance in resolution, sweep speed and provides a **100 dB** dynamic range.
- **2 touch panel color displays**
- **A built-in automatic antenna tuner**
- **Multi-function control for easy settings**
- **Digital Pre-Distortion (DPD) function that reduces the distortion of the SSB and AM mode signals**
- **I/Q baseband signal output port**
- **IP remote control capability with the optional RS-BA1 Version 2 IP REMOTE CONTROL SOFTWARE**
- **Remote encoder capability with the optional RC-28 REMOTE ENCODER**
- **Dualwatch operation**


SUPPLIED ACCESSORIES




Desktop stand



Power adapter for Controller
(1.8 m: 5.9 ft)



Assembled screws
(M3 × 12 mm)



Power cable for RF deck
(2 m: 6.6 ft)




CW key plugs
(3.5 mm: 1/8 inch stereo)



ACC plug
(7-pin)



ACC plug
(8-pin)



Control cable
(3 m: 9.8 feet)

① Some accessories are not supplied, or the shape is different, depending on the transceiver version.

TRADEMARKS

Icom and the Icom logo are registered trademarks of Icom Incorporated (Japan) in Japan, the United States, the United Kingdom, Germany, France, Spain, Russia, Australia, New Zealand, and/or other countries.

All other products or brands are registered trademarks or trademarks of their respective holders.

This product includes RTOS "RTX" software, and is licensed according to the software license.

This product includes "zlib" open source software, and is licensed according to the open source software license.

This product includes "libpng" open source software, and is licensed according to the open source software license.

This product includes "mbed TLS" open source software, and is licensed according to the open source software license.

Refer to the "About the Licenses" page at the end of the manual in English for information on the open source software being used in this product.

About weld lines

This product's surfaces may have streaks called "weld lines," that occur during the molding process, and are not cracks or flaws.

EXPLICIT DEFINITIONS

WORD	DEFINITION
⚠ DANGER!	Personal death, serious injury or an explosion may occur.
⚠ WARNING!	Personal injury, fire hazard or electric shock may occur.
CAUTION	Equipment damage may occur.
NOTE	Recommended for optimum use. No risk of personal injury, fire or electric shock.

Icom is not responsible for the destruction, damage to, or performance of any Icom or non-Icom equipment, if the malfunction is because of:

- Force majeure, including, but not limited to, fires, earthquakes, storms, floods, lightning, or other natural disasters, disturbances, riots, war, or radioactive contamination.
- The use of Icom transceivers with any equipment that is not manufactured or approved by Icom.

DISPOSAL



The crossed-out wheeled-bin symbol on your product, literature, or packaging reminds you that in the European Union, all electrical and electronic products, batteries, and accumulators (rechargeable batteries) must be taken

to designated collection locations at the end of their working life. Do not dispose of these products as unsorted municipal waste.

Dispose of them according to the laws in your area.

ABOUT CE AND DOC



Hereby, Icom Inc. declares that the versions of **IC-7760** which have the "CE" symbol on the product, comply with the essential requirements of the Radio Equipment Directive, 2014/53/EU, and the restriction of the use of certain hazardous substances in electrical and electronic equipment Directive, 2011/65/EU. The full text of the EU declaration of conformity is available at the following internet address:

<https://www.icomjapan.com/support/>

These versions also comply with the essential requirements of the Battery Regulation, (EU) 2023/1542.

ABOUT UKCA DOC

To obtain the UKCA Declaration of Conformity, please contact Icom UK Limited by email at info@icomuk.co.uk or alternatively call + 44(0) 1227 741741.

FCC INFORMATION

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

CAUTION: Changes or modifications to this device, not expressly approved by Icom Inc., could void your authority to operate this device under FCC regulations.

This device complies with part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference.

WARNING: MODIFICATION OF THIS DEVICE TO RECEIVE CELLULAR RADIOTELEPHONE SERVICE SIGNALS IS PROHIBITED UNDER FCC RULES AND FEDERAL LAW.

For Canada:

This device contains licence-exempt transmitter(s)/ receiver(s) that comply with Innovation, Science and Economic Development Canada (ISED)'s licence-exempt RSS(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

ABOUT SPURIOUS SIGNALS

Spurious signals may be received on some frequencies. These are made in the internal circuit and does not indicate a transceiver malfunction.

ABOUT THE TOUCH SCREEN

◇ Touch operation

In the Advanced manual and the Basic manual, the touch operation is described as shown below, with the beep tone ON.



Touch

If the display is touched briefly, one short beep sounds.



Touch for 1 second

If the display is touched for 1 second, one short and one long beep sound.

◇ Touch screen precautions

- The touch screen may not properly work when the LCD protection film or sheet is attached.
- Touching the screen with your finger nails, sharp topped object and so on, or touching the screen hard may damage it.
- Tablet PC operations such as flick, pinch in, and pinch out cannot be performed on this touch screen.

◇ Touch screen maintenance

- If the touch screen becomes dusty or dirty, wipe it clean with a soft, dry cloth.
- When you wipe the touch screen, be careful not to push it too hard or scratch it with your finger nails. Otherwise you may damage the screen.

ABOUT THE MANUALS

You can use the following manuals to understand and operate this transceiver. (As of October 2024)

TIP: You can download each manual and guide from the Icom website.
<https://www.icomjapan.com/support/>
Enter "IC-7760" into the Search box in the site.

- **Basic manual (This manual)**
Instructions for basic operations.
- **Advanced manual (PDF type)**
Instructions for advanced operations in English.
- **CI-V Reference guide (PDF type)**
Describes the control commands used in remote control operation (serial communication with CI-V) in English.
- **I/Q Port Reference guide (PDF type)**
Describes the I/Q data and control commands used in remote control operation in English.
- **Information for the HDSDR application (PDF type)**
Describes how to use the IC-7760 with the HDSDR application in English.

For Reference

- **HAM Radio Terms (PDF type)**
A glossary of HAM radio terms in English.

ABOUT THE INSTRUCTIONS

The Advanced and Basic manuals are described in the following manner.

“ ” (Quotation marks):

Used to indicate icons, setting items, and screen titles displayed on the screen.

The screen titles are also written in uppercase letters. (Example: FUNCTION screen)

[] (brackets):

Used to indicate keys.

Routes to the Set modes and Setting screens

Routes to the Set mode, Setting screens and the setting items are described in the following manner.

MENU » SET > Time Set > Date/Time > **Date**

Instruction example:

◇ **Setting the date**


1. Open the “Date” screen.

MENU » SET > Time Set > Date/Time > **Date**

2. Touch [+] or [-] to set the date.

Detailed instruction:


1. Push **MENU**.

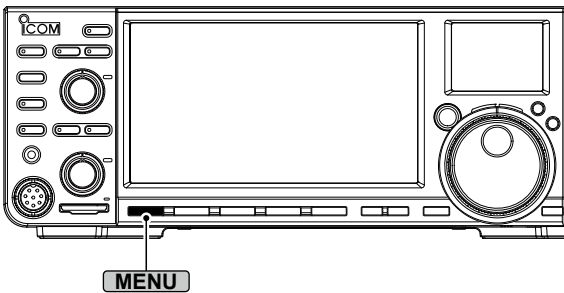

2. Touch [SET].



3. Touch “Time Set.”

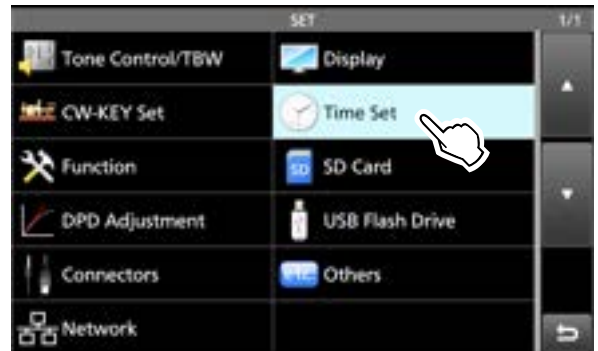

4. Touch “Date/Time.”

- Opens the DATE/TIME screen.

5. Touch “Date.”



- Opens the “Date” screen.

6. Touch [+] and [-] to set the date.

7. Touch [SET] to set the date.



- Returns to the previous screen.

- ① To cancel the editing, touch **ESC**.

KEYBOARD ENTERING AND EDITING



Keyboard types:

You can select the Full Keyboard or the Tenkey pad in "Screen Keyboard Type" on the FUNCTION screen.

(p. X-X)

MENU » **SET > Function > Screen Keyboard Type**


① You can also temporarily switch the type in the QUICK MENU screen by pushing **QUICK**.

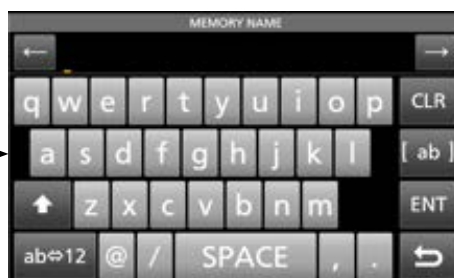

① You can select the full keyboard layout in "Screen Full Keyboard Layout" on the FUNCTION screen. (p. X-X)

MENU » **SET > Function > Screen Full Keyboard Layout**

Entering and editing:

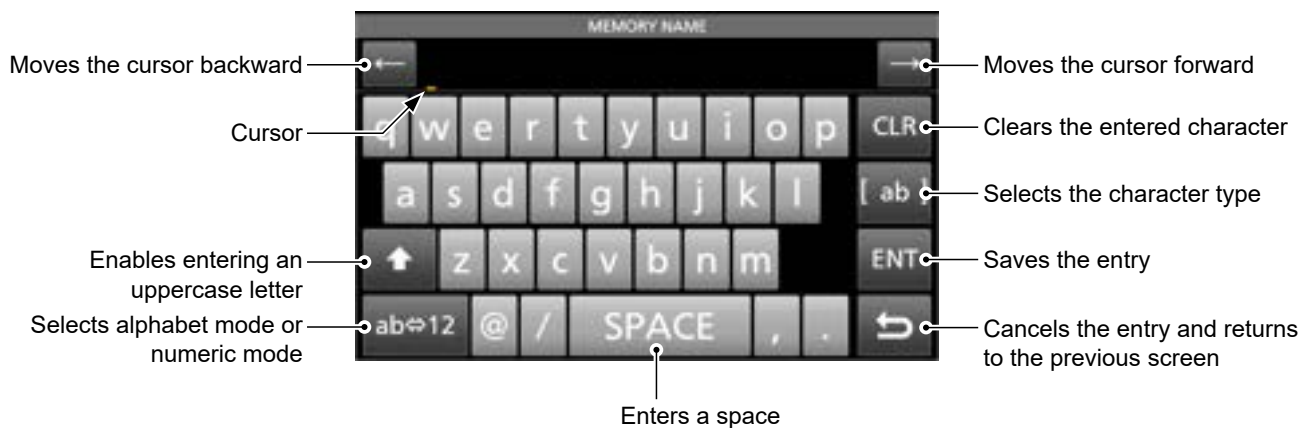

USABLE CHARACTERS

You can enter and edit the items in the following table.

Menu	Item	Selectable characters	Maximum characters
SET	Network Name	A to Z, 0 to 9, ! " # \$ % & () + , - . ; = @ [] ^	15
	Network User 1/2 ID	[AB] [ab] [12] [!"#]	16
	Network User 1/2 Password	• Illegal characters: \ (space)	16*
	Network Radio Name		16
	My Call	A to Z, 0 to 9, / @ - .	10
	NTP Server Address	A to Z, a to z, 0 to 9, - .	64
	CLOCK2 NAME	[AB] [ab] [12] [!"#]	3
	Save Setting	[AB] [ab] [12] [!"#] • Illegal characters: / : ; * < > \	23
SCAN	NAME	[AB] [ab] [12] [!"#]	16
KEYER	Keyer Memory	A to Z, 0 to 9, (space), / ? ^ . , @ • " *" (asterisk) has its own unique use.	70
DECODE	RTTY Memory	A to Z, 0 to 9, (space), ! \$ & ? " ' - / . , ; () _ • " *" (asterisk) has its own unique use.	70
	PSK Memory	[AB] [ab] [12] [!"#]	70
VOICE	VOICE TX RECORD	[AB] [ab] [12] [!"#]	16
MEMORY	MEMORY NAME	[AB] [ab] [12] [!"#]	10
PRESET	Preset Name	[AB] [ab] [12] [!"#]	16

[AB]: A to Z, (space)

[ab]: a to z, (space)

[12]: 0 to 9, (space)

[!"#]: ! " # \$ % & ' () * + , - . / : ; < = > ? @ [\] ^ _ ` { | } ~
(space)

* Minimum of 8 characters

TABLE OF CONTENTS

PRECAUTIONS

⚠ **DANGER HIGH RF VOLTAGE! NEVER** touch an antenna, an antenna connector, or a ground terminal while transmitting. This could cause an electrical shock or burn.

⚠ **DANGER! NEVER** operate the transceiver near unshielded electrical blasting caps or in an explosive atmosphere. This could cause an explosion and death.

⚠ **WARNING RF EXPOSURE!** This transceiver emits Radio Frequency (RF) energy. Extreme caution should be observed when operating this transceiver. If you have any questions regarding RF exposure and safety standards please refer to the Federal Communications Commission Office of Engineering and Technology's report on Evaluating Compliance with FCC Guidelines for Human Radio Frequency Electromagnetic Fields (OET Bulletin 65).

⚠ **WARNING! NEVER** operate the transceiver with earphone, a headset, or other audio accessories at high volume levels. If you experience a ringing in your ears, reduce the volume or discontinue use.

⚠ **WARNING! NEVER** let metal, wire or other objects contact the inside of the transceiver, or make incorrect contact with connectors. This could cause an electric shock or damage the transceiver.

⚠ **WARNING! NEVER** operate or touch the transceiver with wet hands. This could cause an electric shock or damage to the transceiver.

⚠ **WARNING! NEVER** operate the equipment if you notice an abnormal odor, sound or smoke. Immediately turn OFF the power and/or remove the power cables. Contact your Icom dealer or distributor for advice.

⚠ **WARNING! NEVER** put the transceiver on an unstable place where the transceiver may suddenly move or fall. This could cause an injury or damage the transceiver.

⚠ **WARNING! NEVER** operate the transceiver during a lightning storm. It may result in an electric shock, cause a fire or damage the transceiver. Always disconnect the power cables and antenna before a storm.

CAUTION: DO NOT expose the transceiver to rain, snow or any liquids. They could damage the transceiver.

CAUTION: DO NOT operate the transceiver unless the antenna and cables are securely attached to the transceiver, and that the antenna and cables are dry before attachment. Exposing the inside of the transceiver to dust or water will result in serious damage to the transceiver.

CAUTION: DO NOT change the internal settings of the transceiver. This could reduce transceiver performance and/or damage to the transceiver. The transceiver warranty does not cover any problems caused by unauthorized internal adjustments.

CAUTION: DO NOT install or place the transceiver in a place without adequate ventilation, or block any cooling vents on the top, rear, sides or bottom of the transceiver or the cooling fan. Heat dissipation may be reduced and damage the transceiver.

CAUTION: DO NOT use harsh solvents such as Benzine or alcohol when cleaning. This could damage the transceiver surfaces. If the surface becomes dusty or dirty, wipe it clean with a soft, dry cloth.

CAUTION: DO NOT use or leave the transceiver in areas with temperatures below 0°C (32°F) or above 50°C (122°F).

CAUTION: DO NOT place the transceiver in excessively dusty environments. This could damage the transceiver.

CAUTION: DO NOT place the transceiver against walls or putting anything around the transceiver. This may overheat the transceiver.

CAUTION: DO NOT set the transceiver's RF output power to more than a connected linear amplifier's maximum input level. Otherwise, the linear amplifier will be damaged.

CAUTION: DO NOT use non-Icom microphones. Other microphones have different pin assignments, and may damage the transceiver.

CAUTION: The RF deck weighs approximately 15.8 kg (35 lb). Always have 2 people carry, lift or turn over the RF deck.

DO NOT push PTT unless you actually intend to transmit.

NEVER leave the transceiver in an insecure place to avoid use by unauthorized persons.

Turn OFF the transceiver's power and disconnect the power cables from the AC outlet when you will not use the transceiver for long period of time.

The LCD display may have cosmetic imperfections that appear as small dark or light spots. This is not a malfunction or defect, but a normal characteristic of LCD displays.

Operate the transceiver that complies with your local laws and regulations.

Depending on countries and/or regions, transceiver's output power and/or operations on specific frequencies may be restricted to avoid interferences with existing radio stations or services.

INSTALLATION NOTES

For amateur base station installations it is recommended that the forward clearance in front of the antenna array is calculated relative to the EIRP (Effective Isotropic Radiated Power). The clearance height below the antenna array can be determined in most cases from the RF power at the antenna input terminals.

As different exposure limits have been recommended for different frequencies, a relative table shows a guideline for installation considerations.

Below 30 MHz, the recommended limits are specified in terms of V/m or A/m fields as they are likely to fall within the near-field region. Similarly, the antennas may be physically short in terms of electrical length and that the installation will require some antenna matching device which can create local, high intensity magnetic fields. Analysis of such MF installations is best considered in association with published guidance notes such as the FCC OET Bulletin 65 Edition 97-01 and its annexes relative to amateur transmitter installations. The EC recommended limits are almost identical to the FCC specified 'uncontrolled' limits and tables exist that show pre-calculated safe distances for different antenna types for different frequency bands. Further information can be found at <http://www.arrl.org/>.

• Typical amateur radio installation

Exposure distance assumes that the predominant radiation pattern is forward and that radiation vertically downwards is at unity gain (sidelobe suppression is equal to main lobe gain). This is true of almost every gain antenna today. Exposed persons are assumed to be beneath the antenna array and have a typical height of 1.8 m.

The figures assume the worst case emission of a constant carrier.

For the bands 10 MHz and higher the following power density limits have been recommended:

10–50 MHz 2 W/sq m

Vertical clearance by EIRP output

1 Watts	2.1 m
10 Watts	2.8 m
25 Watts	3.4 m
100 Watts	5 m
1000 Watts	12 m

Forward clearance by EIRP output


100 Watts	2 m
1000 Watts	6.5 m
10,000 Watts	20 m
100,000 Watts	65 m

In all cases any possible risk depends on the transmitter being activated for long periods. (actual recommendation limits are specified as an average during 6 minutes) Normally the transmitter is not active for long periods of time. Some radio licenses will require that a timer circuit automatically cuts the transmitter after 1–2 minutes etc.

Similarly some types of emission, i.e., SSB, CW, AM etc. have a lower 'average' output power and the assessed risk is even lower.

Front panel (Controller/RF deck)

Controller

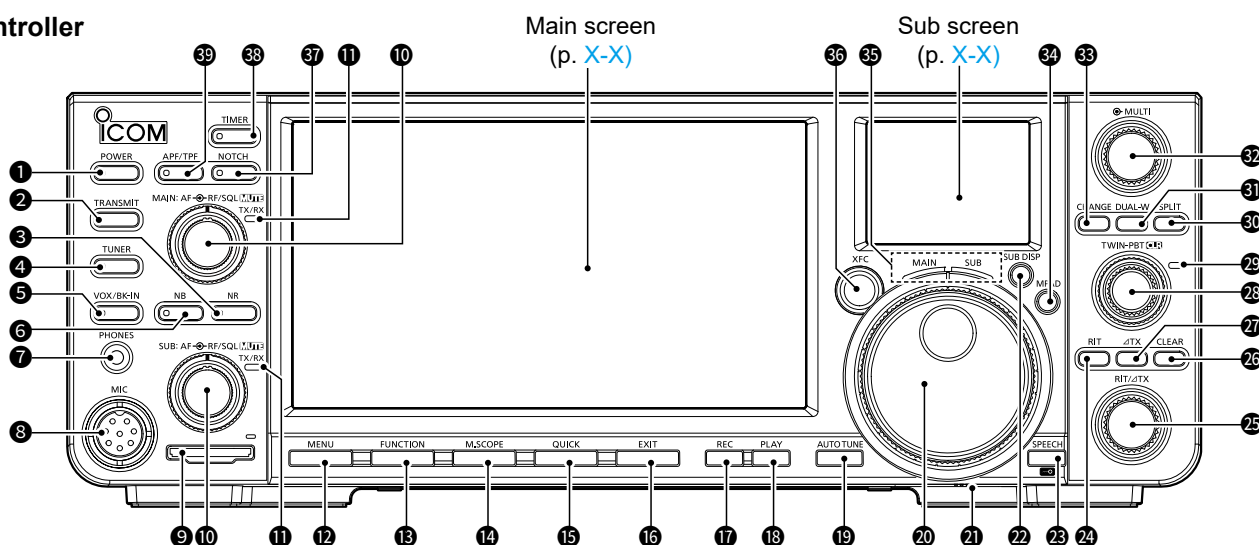**1 POWER KEY [POWER] (p. X-X)**

- Push to turn ON the controller.
- Hold down for 1 second to turn OFF the controller.

2 TRANSMIT KEY [TRANSMIT]

Push to toggle between transmit and receive.

3 NOISE REDUCTION KEY [NR] (p. X-X)

Push to turn the Noise Reduction function ON or OFF.

4 ANTENNA TUNER KEY [TUNER] (p. X-X)

Push to turn the antenna tuner ON or OFF, or activate the tuner.

5 VOX/BREAK-IN KEY [VOX/BK-IN]

Push to turn the VOX function and the Break-in function in the CW mode (p. X-X) ON or OFF.

6 NOISE BLANKER KEY [NB] (p. X-X)

Push to turn the Noise Blanker function ON or OFF.

7 HEADPHONE JACK [PHONES] (p. X-X)

Connect standard stereo headphones.

8 MICROPHONE CONNECTOR [MIC] (p. X-X)

Connect a microphone (user supplied).

9 SD CARD SLOT [SD CARD] (p. X-X)

Insert an SD card (user supplied).

- The indicator lights while an SD card is inserted, and blinks while accessing the card.

10 VOLUME CONTROL/MUTE KEY [AF→RF/SQ/L / MUTE] (p. X-X)

① The upper control is for the Main band, and the lower is for the Sub band.

- Rotate to adjust the audio output level.
- Push to turn the Mute function ON or OFF.
 - The TX/RX indicator lights orange when the Mute function is ON.

RF GAIN/SQUELCH CONTROL [AF→RF/SQ/L] (p. X-X)

Rotate to adjust the RF gain and squelch threshold levels.

11 TX/RX INDICATOR (p. X-X)

① The upper indicator is for the Main band, and the lower is for the Sub band.

- Lights red while transmitting.
- Lights green while receiving.

12 MENU KEY [MENU] (p. X-X)

Push to open the MENU screen.

13 FUNCTION KEY [FUNCTION] (p. X-X)

Push to open the FUNCTION screen.

14 MINI SCOPE KEY [M.SCOPE] (p. X-X)

- Push to display the Mini scope screen.
- Hold down for 1 second to display the Spectrum scope screen.

15 QUICK KEY [QUICK] (p. X-X)

Push to open the QUICK MENU screen.

16 EXIT KEY [EXIT]

Push to exit a setting screen or return to the previous screen.

Front panel (Controller/RF deck)

17 VOICE MEMORY RECORD KEY **REC**

- Push to save the previously received signal for the preset time period set in REC Time using the Instant Replay function.
- Hold down for 1 second to start recording a QSO audio onto an SD card.

18 VOICE MEMORY PLAY BACK KEY **PLAY**

- Push to play back the last 5 seconds of the Instant Replay memory.
- Hold down to play back all of the Instant Replay memory.

19 AUTO TUNE KEY **AUTO TUNE**

In the AM or CW mode, push to automatically tune the operating frequency to a close-by signal. (p. X-X)

20 MAIN DIAL **MAIN DIAL**

Rotate to change the operating frequency.

21 FRICTION ADJUSTER

Slide to adjust the friction of **MAIN DIAL**.

22 SUB DISPLAY KEY **SUB DISP** (p. X-X)

Push to change the information displayed on the Sub screen.

23 SPEECH/LOCK KEY **SPEECH**

- Push to announce the operating frequency or mode.
- Hold down for 1 second to electronically lock **MAIN DIAL**. (p. X-X)

24 RIT KEY **RIT** (p. X-X)

Push to turn the Receiver Incremental Tuning (RIT) function ON or OFF.

25 RIT/ Δ TX CONTROL **RIT/ Δ TX**

Rotate to shift the receive or transmit frequency up to ± 9.99 kHz without changing the transmit or receive frequency.

26 CLEAR KEY **CLEAR**

Push to clear the RIT or Δ TX shift frequency.

27 Δ TX KEY **Δ TX**

Push to turn the Δ TX function ON or OFF.

28 TWIN PASSBAND TUNING CONTROL

TWIN PBT CLR (p. X-X)

- Rotate to adjust the IF filter's passband width.
- Hold down for 1 second to clear the PBT settings.

29 TWIN PBT INDICATOR

Lights white when you change the IF passband width.

30 SPLIT KEY **SPLIT**

Push to turn the Split function ON or OFF.

31 DUALWATCH KEY **DUAL-W**

Push to turn the Dualwatch function ON or OFF.

32 MULTI-FUNCTION CONTROL **MULTI**

- Push to open the Multi-function menu for various adjustments. (p. X-X)
- Rotate to adjust the value that is assigned to **MULTI**. (p. X-X)

33 MAIN/SUB CHANGE KEY **CHANGE**

Push to toggle the frequency, mode, and selected memory channel between the Main and Sub band.

34 MEMO PAD KEY **MPAD**

- Push to sequentially call up the contents in the Memo Pads.
- Hold down for 1 second to save the displayed contents into the Memo Pad.

35 MAIN/SUB INDICATOR

The indicator of the selected band lights white.

36 TRANSMIT FREQUENCY CHECK KEY **XFC**

- Hold down to temporally open the squelch and cancel the noise reduction and RIT function.
- While the Split or Δ TX function is ON, or using a repeater, hold down to monitor the transmit frequency.

37 NOTCH KEY **NOTCH**

Push to select the Notch function type.


38 TIMER KEY **TIMER**

Push to turn the Sleep Timer or Daily Timer function ON or OFF.

39 AUDIO PEAK FILTER/TWIN PEAK FILTER KEY **APF/TPF**


- In the CW mode, push to turn the Audio Peak Filter ON or OFF.
- In the RTTY mode, push to turn the Twin Peak Filter ON or OFF.

RF deck

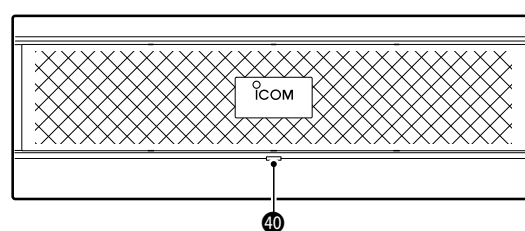**40 POWER INDICATOR**

- Lights orange while the internal power supply is ON and in the standby mode.
- Lights blue while the RF deck is working.

Rear panel (Controller)

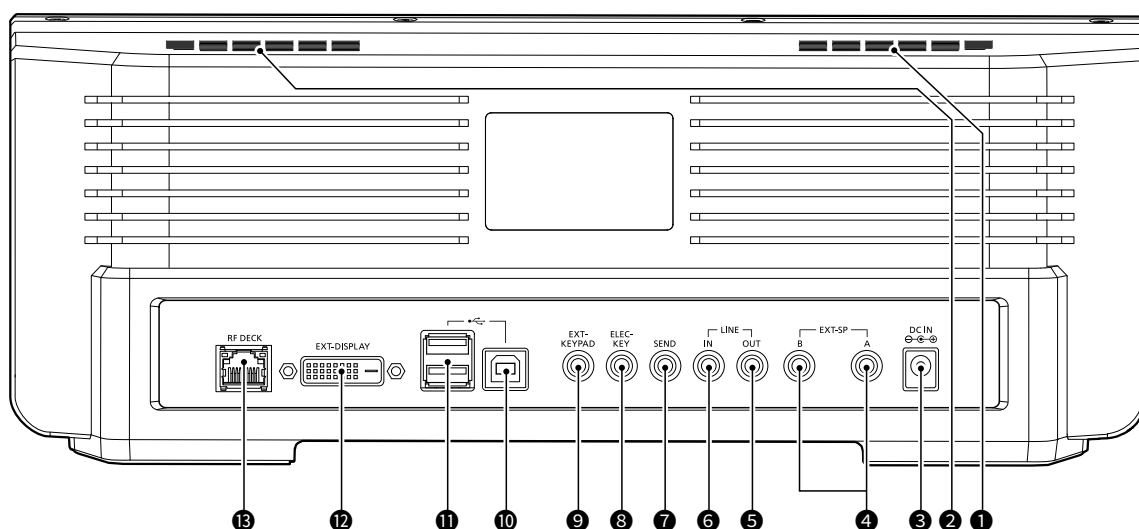

1 INTERNAL SPEAKER L (p. X-X)

Outputs the audio from the Main band.

- ① When "Speaker MAIN/SUB Mix" is set to "ON," outputs the audio from both Main and Sub bands.

2 INTERNAL SPEAKER R (p. X-X)

- When Dualwatch is OFF, outputs the audio from the Main band.
- When Dualwatch is ON, outputs the audio from the Sub band.

- ① When "Speaker MAIN/SUB Mix" is set to "ON," outputs the audio from both Main and Sub band.

3 DC POWER JACK [DC IN] (p. X-X)

Connect the supplied power cable to an AC receptacle.

4 EXTERNAL SPEAKER JACK [EXT-SP A]/[EXT-SP B] (p. X-X)

Connect a 4 ~ 8 Ω external speaker with a 3.5 mm (1/8 inch) stereo plug.

5 LINE OUT JACK [LINE OUT] (p. X-X)

Outputs the demodulated AF signal or 12 kHz IF signal.

6 LINE IN JACK [LINE IN] (p. X-X)

Input the audio signal to the internal modulator circuit.

7 SEND JACK [SEND] (p. X-X)

Connect to control transmit with non-Icom external units.

8 KEY JACK [ELEC-KEY] (p. X-X)

Connect to a CW paddle with a 3.5 mm (1/8 inch) stereo plug.

9 EXTERNAL KEYPAD JACK [EXT-KEYPAD] (p. X-X)

Connect to an external keypad for direct Voice Memory, Keyer Memory, RTTY Memory, or PSK Memory transmission.

10 USB PORT (TYPE-B) [USB B] (p. X-X)

Connect to a PC.

11 USB PORT (TYPE-A) [USB A] (p. X-X)

Insert a USB flash drive, or connect a keyboard, mouse, RC-28 REMOTE ENCODER, or hub.

12 EXTERNAL DISPLAY CONNECTOR [EXT-DISPLAY] (p. X-X)

Connect to an external display monitor.

13 RF DECK CONNECTOR [RF DECK] (p. X-X)


Connect to the RF deck with the supplied control cable or through a LAN.

- ① When connecting the controller and RF deck directly, operation cannot be guaranteed if you use other than the specified cable or a network switch.

- ① Confirm the Network settings before connect to a network.

NOTE: Confirm that the transceiver is OFF before connecting or disconnecting optional equipment.

Rear panel (RF deck)

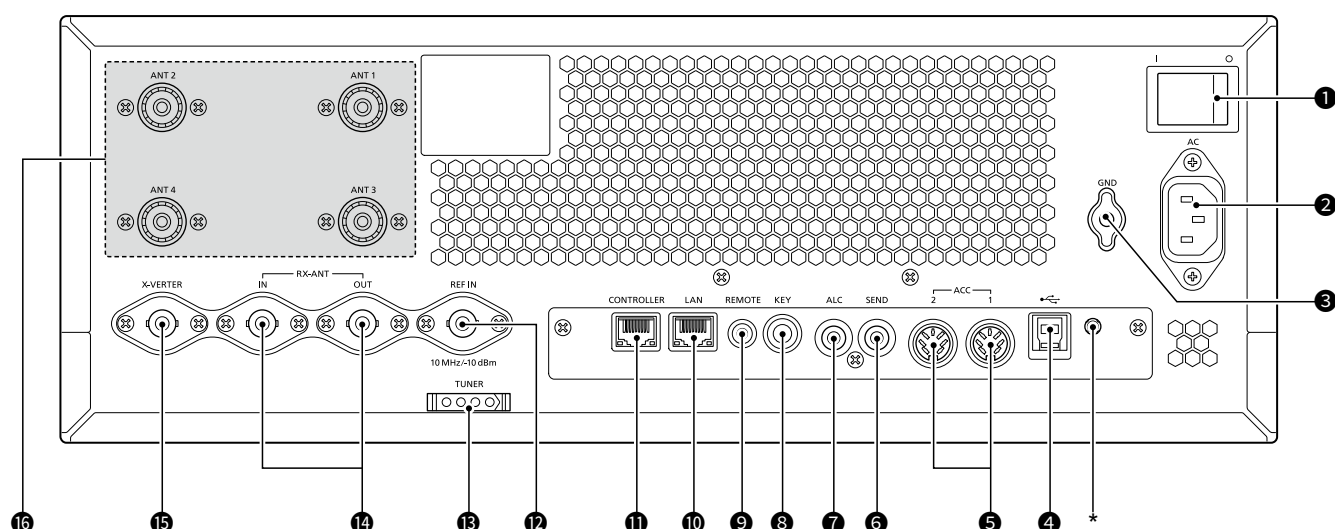

* The switch is not used.

① MAIN POWER SUPPLY SWITCH [I/O]

Toggle to turn the internal power supply ON or OFF.

② AC POWER SOCKET [AC] (p. X-X)

Connect the supplied power cable to an AC receptacle.

③ GROUND TERMINAL [GND]

Connect to ground to prevent electrical shocks, TVI, BCI, and other problems.

④ USB PORT (TYPE-B) [USB] (p. X-X)

For digital data input or output.

⑤ ACC SOCKET [ACC 1]/[ACC 2] (p. X-X)

Connect to devices to control an external unit or to control the transceiver.

⑥ SEND JACK [SEND] (p. X-X)

Connect to control transmit with non-Icom external units.

⑦ ALC JACK [ALC] (p. X-X)

Connect to the ALC output jack of a non-Icom linear amplifier.

⑧ STRAIGHT KEY JACK [KEY]

Connect to a straight key or external electronic keyer with a 6.35 mm (1/4 inch) standard plug.

⑨ REMOTE CONTROL JACK [REMOTE]

Connect to a PC or other transceiver for remote control.

⑩ ETHERNET CONNECTOR [LAN] (p. X-X)

Connect to a PC network through a LAN.

① Confirm the Network settings before connecting to a network.

⑪ CONTROLLER CONNECTOR [CONTROLLER] (p. X-X)

Connect to the controller with the supplied control cable.

① Operation cannot be guaranteed if you use other than the specified cable or a network switch.

⑫ REFERENCE SIGNAL INPUT [REF IN]

Input for a 10 MHz reference signal through the BNC connector.

⑬ TUNER CONTROL SOCKET [TUNER]

Accepts the control cable from an optional AH-730 AUTOMATIC ANTENNA TUNER.

⑭ RECEIVE ANTENNA [RX-ANT IN]/[RX-ANT OUT]

Connect to an external unit, such as preamplifier or RF filter, using BNC connectors.

① This is located between the transmit/receive switching circuit and receiver's RF stage.


⑮ TRANSVERTER CONNECTOR [X-VERTER]

Connect to an external transverter for input/output.

⑯ ANTENNA CONNECTOR [ANT 1] ~ [ANT 4] (p. X-X)

Connect a 50 Ω antenna.

Touch screen display (Main screen)

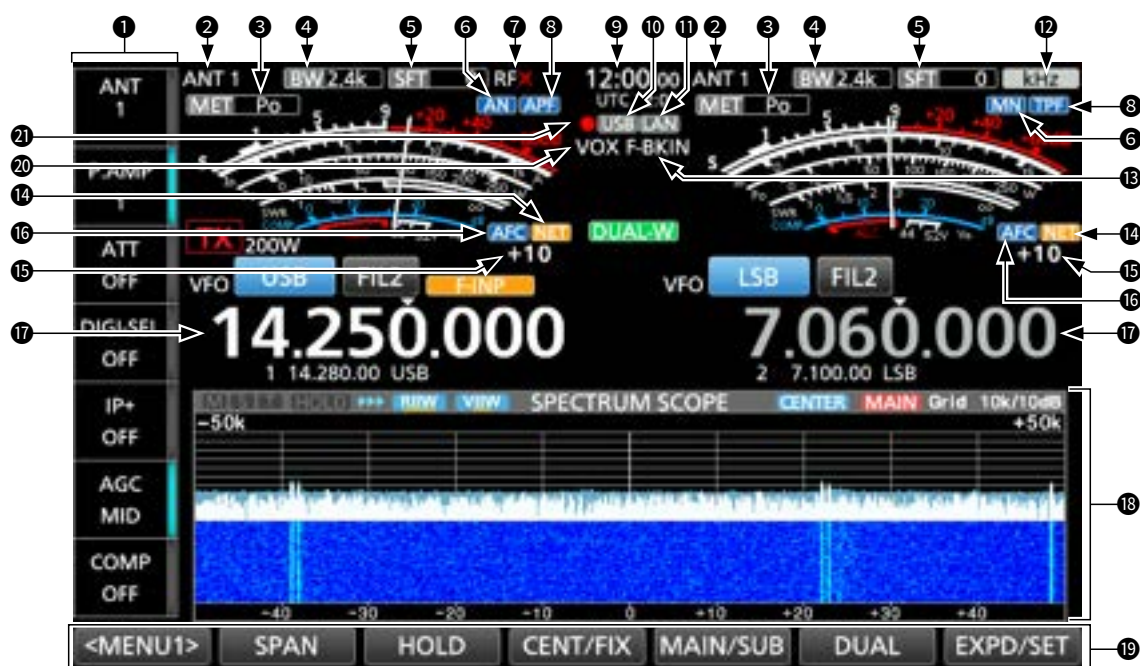**1 MULTI-FUNCTION KEY GROUP (p. X-X)**

Displays the Multi-function keys.

① Touch to turn the function ON or OFF.

2 ANTENNA INDICATOR (p. X-X)

Displays the selected antenna connector between ANT 1, ANT 2, ANT 3, and ANT 4.

3 METER TYPE INDICATOR (p. X-X)

Displays the selected transmit parameter type between Po, SWR, ALC, COMP, Vd, and Id.

4 BANDWIDTH INDICATOR (p. X-X)

Displays the passband width of the IF filter.

5 SHIFT VALUE INDICATOR (p. X-X)

Displays the shift value of the IF filter.

6 NOTCH INDICATOR (p. X-X)

Displayed when the Auto Notch (AN) or Manual Notch (MN) function is ON.

7 CONNECTION ERROR INDICATOR

Blinks while the RF deck is not connected to the controller.

8 AUDIO PEAK FILTER/TWIN PEAK FILTER INDICATORS (p. X-X)

Displayed when the Audio Peak Filter (APF) or Twin Peak Filter (TPF) is ON.

9 CLOCK READOUT (p. X-X)

Displays the time (2 types) set on the TIME SET screen.

10 USB INDICATOR (p. X-X)

Displayed while a USB flash drive is inserted.

11 NETWORK CONTROL ICON

Displayed while accessing the transceiver using the optional RS-BA1, for Remote control operation.

12 FUNCTION INDICATOR FOR MULTI-FUNCTION CONTROL (p. X-X)

Displays the function that is assigned to **(MULTI)**.

13 BK-IN/F-BKIN INDICATORS (p. X-X)

Displayed when the Semi Break-in (BK-IN) or Full Break-in (F-BKIN) function is ON.

14 NET FUNCTION INDICATOR (p. X-X)

Displayed when the NET function is ON in the PSK mode.

15 FREQUENCY OFFSET READOUT/TONE SQUELCH ICON

- Displays the offset value between the PSK signal and the operating frequency, while a PSK signal is received.
- Displays "TONE" or "TSQ" when the tone squelch function is ON in the FM mode.

16 AFC ICON (p. X-X)

Displayed while the Auto Frequency Control (AFC) function is ON in the PSK mode.

17 FREQUENCY READOUT (p. X-X)

Displays the operating frequency.
① The non-selected band's frequency readout (Main or Sub) is displayed in gray.

18 FUNCTION DISPLAY

Displayed when an item that has a function display is selected. (Example: Spectrum Scope)

19 FUNCTION KEYS (p. X-X)

Displays the function keys.
① Touch to operate the function display (18).


20 VOX INDICATORS (p. X-X)

Displayed when the VOX function is ON.

21 VOICE RECORDER ICONS ●/||

Displayed while recording or pausing using the Voice recorder.

Touch screen display (Main screen)

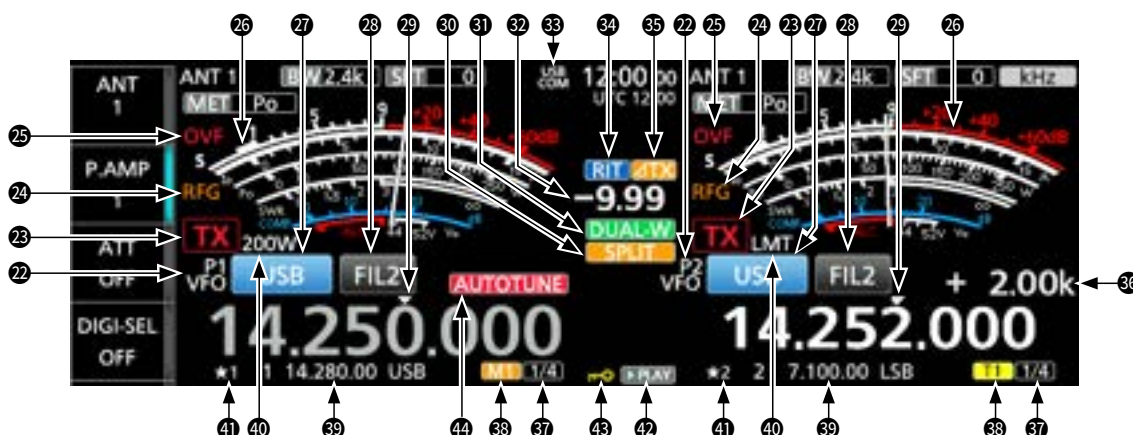**22 VFO/MEMORY ICONS (p. X-X)**

Displays “VFO” when the VFO mode is selected, and displays the selected memory channel number when the Memory mode is selected.

23 TX STATUS INDICATOR

Displays the transmit status.

- **TX** is displayed on the band used for transmit.
- **TX** is displayed while transmitting.
- **TX** (with a dotted line) is displayed when the selected frequency is outside of the band edge frequency range. (p. X-X)
- **TX** (Grayed out) is displayed when transmission is inhibited.

24 RF GAIN ICON (p. X-X)

Displayed when **AF◀RF/SQ** (outer) is set counterclockwise from the 11 o'clock position to decrease the RF gain.

25 OVF ICON (p. X-X)

Displayed when an excessively strong signal is received.

26 METER INDICATOR (p. X-X)

Displays the S, Id, Po, SWR, COMP, ALC, and Vd meters.

27 MODE INDICATOR (p. X-X)

Displays the selected operating mode.

28 IF FILTER INDICATOR (p. X-X)

Displays the selected IF filter number.

- ① A dot “.” is displayed on the IF Filter Indicator when you change the IF passband width.

29 QUICK TUNING ICON (p. X-X)

Displayed when the Quick Tuning Step function is ON.

30 SPLIT ICON

Displayed when the Split function is ON.

31 DUALWATCH ICON (p. X-X)

Displayed when the Dualwatch function is ON.

32 RIT/ΔTX FREQUENCY READOUT

Displays the shift offset frequency for the RIT or ΔTX functions.

33 USB CONNECTION INDICATOR

Displayed when an external USB Host device, such as a PC, is connected to [USB B] on the controller.

34 RIT ICON (p. X-X)

Displayed when the Receive Increment Tuning (RIT) function is ON.

35 ΔTX ICON

Displayed when the ΔTX function is ON.

36 FREQUENCY OFFSET READOUT

Displays the frequency offset between transmit and receive when the split function is ON and monitoring the transmit frequency.

37 1/4 ICON (p. X-X)

Displayed while the 1/4 Tuning function is ON.

38 M1~M8/T1~T8 ICONS

- “M1” ~ “M8” is displayed while the Keyer memory transmission using an external keypad or keyboard is enabled, and transmitting the memory contents.
- “T1” ~ “T8” is displayed while the Voice TX memory transmission using an external keypad or keyboard is enabled, and transmitting the Voice TX memory contents.

39 MEMORY CHANNEL/VFO READOUT (p. X-X)

Displays the selected memory channel contents in the VFO mode, and displays the VFO contents in the Memory mode.

40 RF POWER INDICATOR/LMT ICON/INH ICON

Displays the transmit output power.

- ① “LMT” is displayed if the power amplifier temperature becomes extremely high, and the Protection function is activated after transmitting continuously for a long period of time.

- ① “INH” is displayed while the Transmitter Lockout function is activated.

41 SELECT MEMORY CHANNEL ICON

Indicates that the displayed memory channel is assigned as a Select Memory channel (★1~★3).

42 PLAY ICON

Displayed while playing the recorded voice audio.

43 DIAL LOCK INDICATOR (p. X-X)

Displayed while the Lock function is ON.

44 AUTO TUNE ICON (p. X-X)

Displayed when the Auto Tuning function is ON.

1 PANEL DESCRIPTION

Touch screen display (Main screen)

◇ MENU screen



- Push **MENU** to open the MENU screen in the selected mode.
① To close the MENU screen, push **EXIT**.

◇ QUICK MENU



- Push **QUICK** to open the QUICK MENU screen.

◇ FUNCTION screen



Function name
Status
Lights blue when in use

- Push **FUNCTION** to open the FUNCTION screen in the selected mode.
① To close the FUNCTION screen, push **EXIT**.
① You cannot use keys displayed in gray.

FUNCTION screen items

* Touch for 1 second to open its Multi-function menu.

APF*	TPF	NOTCH*	NB*
OFF	OFF	OFF	OFF
ON	ON	AN	ON
		MN	
NR*	TRACKING	VOX*	BKIN*
OFF	OFF	OFF	OFF
ON	ON	ON	BKIN
			F-BKIN
TBW	MONI*	DPD	
WIDE	OFF	OFF	
MID	ON	ON	
NAR			

Touch screen display (Main screen)

◇ Multi-function menus



- Open the Multi-function menu by pushing **[MULTI]** (Multi-function control).
 - ① You can open other menus by holding down **[NB]**, **[NR]**, **[NOTCH]**, **[APF/TPF]**, or **[VOX/BK-IN]** for 1 second, or touching key on the FUNCTION screen.
- While the Multi-function menu is open, touch the desired item and rotate **[MULTI]** to set the desired value.

Multi-function menu items

*1 Touch the item for 1 second to adjust by rotating **[MULTI]**, even when the Multi-function menu is closed.

*2 Touch the edge to turn the function ON or OFF, or to adjust the selected item.

SSB	SSB-D	CW	RTTY/PSK
RF POWER*1	RF POWER*1	RF POWER*1	RF POWER*1
MIC GAIN*1	MIC GAIN*1	KEY SPEED*1	
COMP*1*2		CW PITCH*1	
DIGI-SEL*1*2	DIGI-SEL*1*2	DIGI-SEL*1*2	DIGI-SEL*1*2
MONITOR*1*2	MONITOR*1*2	SIDETONE*1	MONITOR*1*2
AM/AM-D	FM/FM-D	NB	NR
RF POWER*1	RF POWER*1	LEVEL*1	LEVEL*1
MIC GAIN*1	MIC GAIN*1	DEPTH*1	
DIGI-SEL*1*2	DIGI-SEL*1*2	WIDTH*1	
MONITOR*1*2	MONITOR*1*2		
NOTCH	APF	ATT	VOX
POSITION*1	POSITION*1	LEVEL*1	GAIN*1
WIDTH*2	WIDTH*2		ANTI VOX*1
	TYPE*2		DELAY*1
	AF LEVEL*1		VOICE DELAY*2
BK-IN			
DELAY*1			

◇ Multi-function key group



- Touch a key to turn the function ON or OFF.
- Touching “ATT,” “DIGI-SEL,” or “COMP” for 1 second opens the Multi-function menu.
- Touching “AGC” or “TONE” for 1 second opens the AGC or TONE menu.

Multi-function key group items

	SSB	SSB-D	CW/ RTTY/ PSK	AM/ AM-D	FM/ FM-D
ANT	✓	✓	✓	✓	✓
P.AMP	✓	✓	✓	✓	✓
ATT	✓	✓	✓	✓	✓
DIGI-SEL	✓	✓	✓	✓	✓
IP+	✓	✓	✓	✓	✓
AGC	✓	✓	✓	✓	✓
COMP	✓				
1/4		✓	✓		
TONE					✓

Multi-function dial

When the Multi-function menu is closed, the **MULTI** control can be enabled to adjust functions. The function is displayed in the upper right corner of the screen.



Function indicator for **MULTI**

- To assign the function to the **MULTI** control, touch the item for 1 second on the Multi-function menus.

Assignable key functions

* Touch the function indicator, or hold down **MULTI** for 1 second to assign the function to the **MULTI** control.


Indicator	Action
kHz*	Changes the operating frequency in kHz steps. (VFO mode only)
M-CH*	Selects Memory channels. (Memory mode only)
RF PWR	Adjusts the transmit output power.
MIC G	Adjusts the microphone gain.
COMP	Adjusts the Speech Compressor level.
D-SEL	Adjusts the center frequency of the automatic preselector using the Digital Selector function.
MONI	Adjusts the audio level for the Monitor function.
SPEED	Adjusts the Keying speed.
PITCH	Adjusts the CW pitch.
S TONE	Adjusts the CW side tone output level.
NB LEV	Adjusts the Noise Blanker level.
NB DEP	Adjusts the DEPTH (Noise attenuation level).
NB WID	Adjusts the WIDTH (Blanking duration time).
NR LEV	Adjusts the Noise Reduction level.
APF	Adjusts the peak frequency of the APF.
APF LV	Adjusts the audio level of the APF.
NOTCH	Adjusts the Notch filter frequency.
VOX G	Adjusts the VOX gain.
A-VOX	Adjusts the ANTI VOX level
VOX D	Adjusts the VOX delay time.
BKIN D	Adjusts the Break-in delay time.
DRIV G	Adjusts the transmitter level at the driver stage.
ATT	Adjusts the attenuator level of up to 45 dB (in 3 dB steps).

Touch screen display (Sub screen)

You can display one of the following screens on the Sub screen for your convenience.

- Filter Effect screen
- Keypad screen
- Meter screen


- Push **SUB DISP** to select the screen.

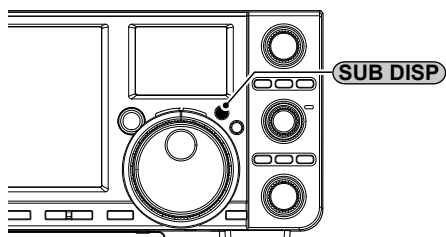

◇ Filter Effect screen

Displays the received signals and the filter passband width. You can check the filter (Digital Twin PBT, IF filter, or Notch Filter) removes the signals that are out of the passband.

- ① When using the Dualwatch or Split function, displays only the selected band (Main/Sub).



- ① Main/Sub band icon
- ② Passband width
- ③ Shift value
- ④ FFT scope zone
(FFT: Fast Fourier Transform)
- ⑤ Waterfall zone
- ⑥ Edge (Upper frequency)
- ⑦ Passband center frequency
- ⑧ Edge (Lower frequency)
- ⑨ Passband

◇ Keypad screen

You can select the operating band by pushing once, or call up other stacked frequencies by pushing the same key several times.

- ① The Band Stacking Register provides 3 memories for each band key to store frequencies and operating modes. To display the Band Stacking Register contents, touch the band key for 1 second.
- ② To directly enter the frequency using the Tenkey pad, touch [F-INP].



Band keypad

Tenkey pad

◇ Meter screen

Displays the meter indicator of the Main band.

- ① When the Split function is ON, displays the meter indicator of the Sub band.
- ② To select the displayed parameter, touch the meter.
- ③ To change the displayed meter type, touch the meter for 1 second.



Normal

Multi-function meter

Selecting a location

CAUTION: Always have 2 people carry, lift, or turn over the RF deck.


Select a location for the transceiver that allows adequate air circulation, free from extreme heat, cold, or vibration, and other electromagnetic sources.

Never place the transceiver in areas such as:

- Out of the specified temperature range for the transceiver (0°C ~ 50°C, 32°F ~ 122°F).
- An unstable place that slopes or vibrates.
- In direct sunlight.
- High humidity and temperature environments.
- Dusty environments.
- Noisy environments.

Attaching the desktop stand

Use the 4 supplied screws to attach the desktop stand to the controller, as illustrated below.

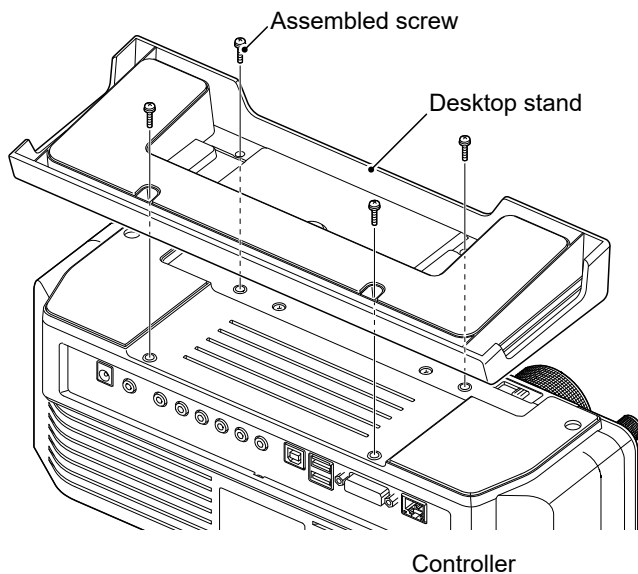

Heat dissipation


- **NEVER** install the transceiver in a place without adequate ventilation. Heat dissipation may be reduced, and the transceiver may be damaged.
- **DO NOT** place the transceiver against walls or put anything around the transceiver. This may block airflow and overheat the transceiver.
- **DO NOT** touch the RF deck after transmitting continuously for long periods of time. The panel may become hot.

Grounding

To prevent electrical shock, television interference (TVI), broadcast interference (BCI), and other problems, ground the RF deck using the ground terminal [GND] on the rear panel.

For best results, connect a heavy gauge wire or strap to a long ground rod. Make the distance between the [GND] terminal and ground as short as possible.

⚠ WARNING! NEVER connect the [GND] terminal to a gas or electric pipe, since the connection could cause an explosion or electric shock.

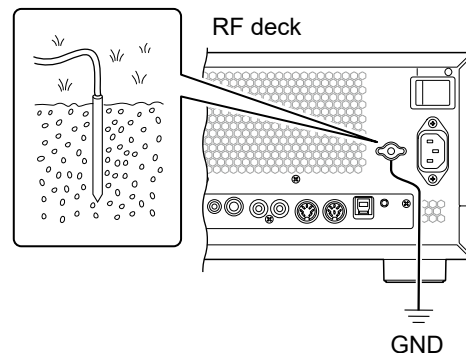


Before using the transceiver

Before using the transceiver for the first time, or after performing an All reset, directly connect the controller and the RF deck with a supplied control cable.

After turning ON the transceiver, the controller is automatically paired with the RF deck.

- ① See the next page for details about how to connect.
- ① If the controller and RF deck are not paired, "The RF deck is not detected." is displayed.

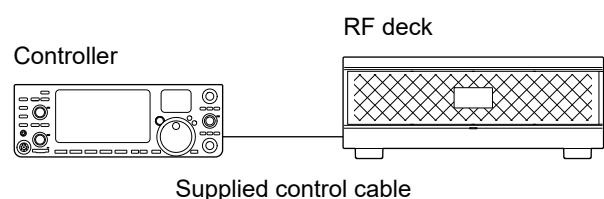


Connecting the controller and RF deck

Confirm that the controller and RF deck are OFF before connecting cables.

NOTE:

- Operation cannot be guaranteed if:
 - You use a cable other than the specified one.
 - You connect the controller's [RF DECK] port and RF deck's [CONTROLLER] port through a network switch.
- Only the power cable supplied with the EUR version can be used to connect to a 180 ~ 264 V AC power source. For other versions, use a power cable that matches the power source to connect to a 180 ~ 264 V AC power source.

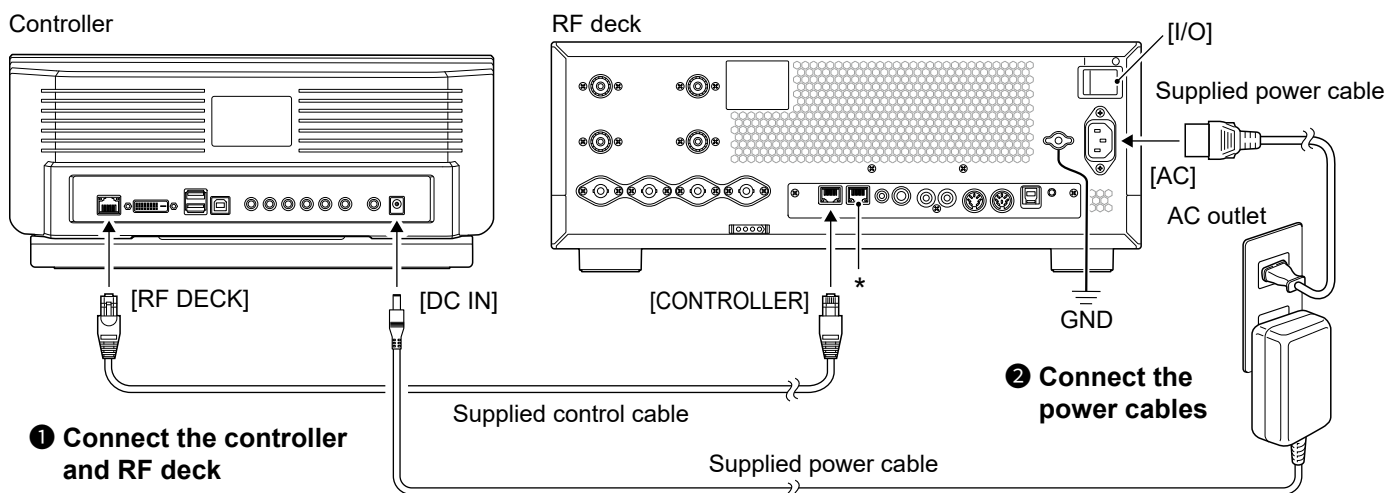

* **DO NOT** connect the controller's [RF DECK] port to the RF deck's [LAN] port with the supplied control cable.

① The RF deck's [LAN] port is used to connect the IC-7760 to a network (LAN or Internet).

See the Advanced manual for details about how to connect the controller and RF deck through a network.

Connecting the AH-730

The AH-730 ANTENNA TUNER provides reliable matching from 1.8 to 54 MHz when using at least a 7 m (23 ft) antenna.

① While the AH-730 is connected, the internal antenna tuner is deactivated.


NOTE:

- Before connecting, be sure to turn OFF the transceiver.
- Set "External Antenna Tuner Connection" to the antenna connector to which the AH-730 optional antenna tuner is connected. The maximum output power from selected connector is limited to 100 W. (Default: ANT 1)

MENU » **ANTENNA > TYPE > External Antenna Tuner Connection**

If you connect the AH-730 to another connector, the maximum 200 W voltage is input to the tuner, and could damage the tuner.

① Confirm the setting again after performing a Partial reset or an All reset.

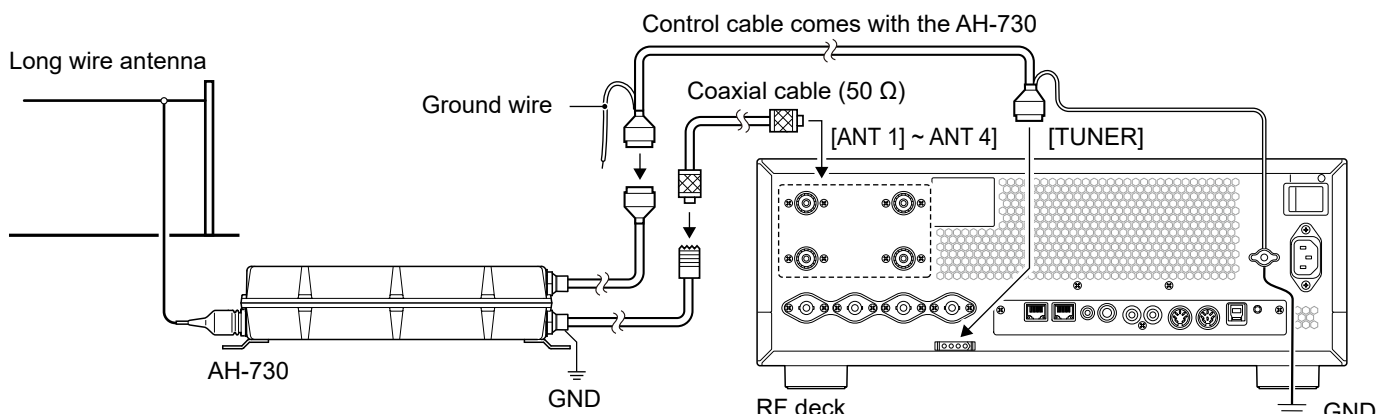

Connecting a linear amplifier


◇ Connecting the IC-PW2

See the illustration below to connect the optional IC-PW2.

Refer to the amplifier's instruction manual for operation.

⚠ WARNING! When using a linear amplifier such as the IC-PW2, set the RF POWER in the Multi-function menu to keep the ALC meter in the red zone. (pp. X-X, X-X)

When connecting the IC-7760 to either [INPUT 1] or [INPUT 2]

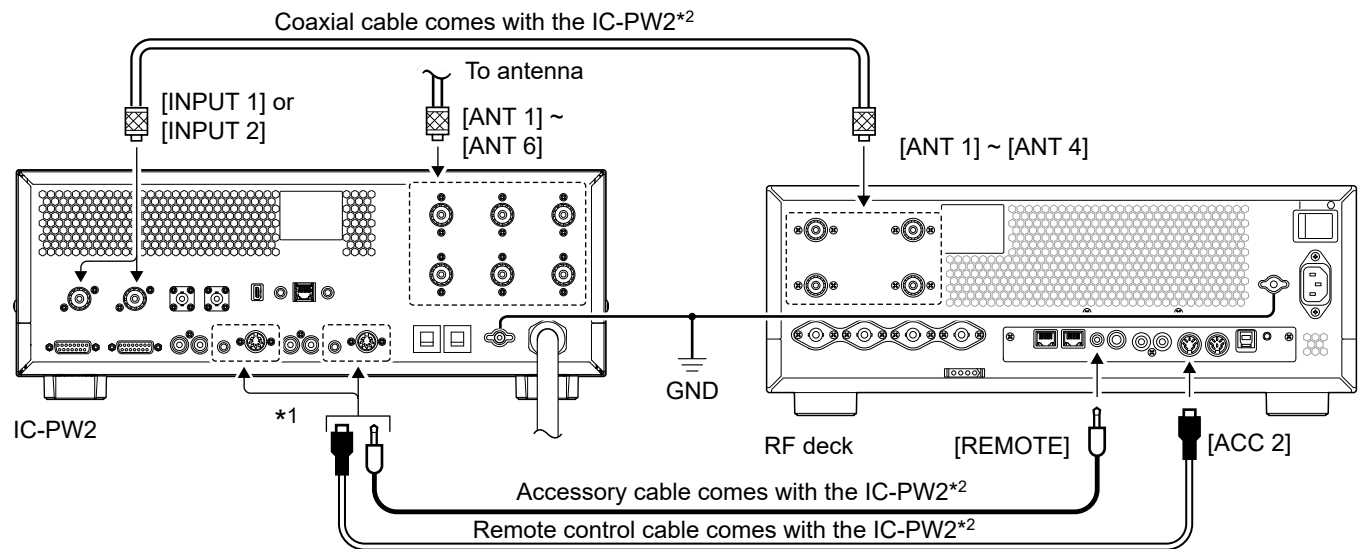

*1 When you connect a coaxial cable to [INPUT 1], connect to [REMOTE 1] and [ACC 1].

When you connect a coaxial cable to [INPUT 2], connect to [REMOTE 2] and [ACC 2].


*2 To connect the second Icom exciter, use the optional OPK-5 CABLE KIT.

When connecting the IC-7760 to both [INPUT 1] and [INPUT 2]

To operate the amplifier in synchronization with the IC-7760's frequency data, disconnect the AH-730, and then set "IC-PW2 Dual Connection Mode" to "ON."

MENU » SET > function > **IC-PW2 Dual Connection Mode**

① When "IC-PW2 Dual Connection Mode" is set to "ON," maximum output power is not limited. Therefore maximum 200 W voltage is input to the AH-730, and could damage the AH-730.

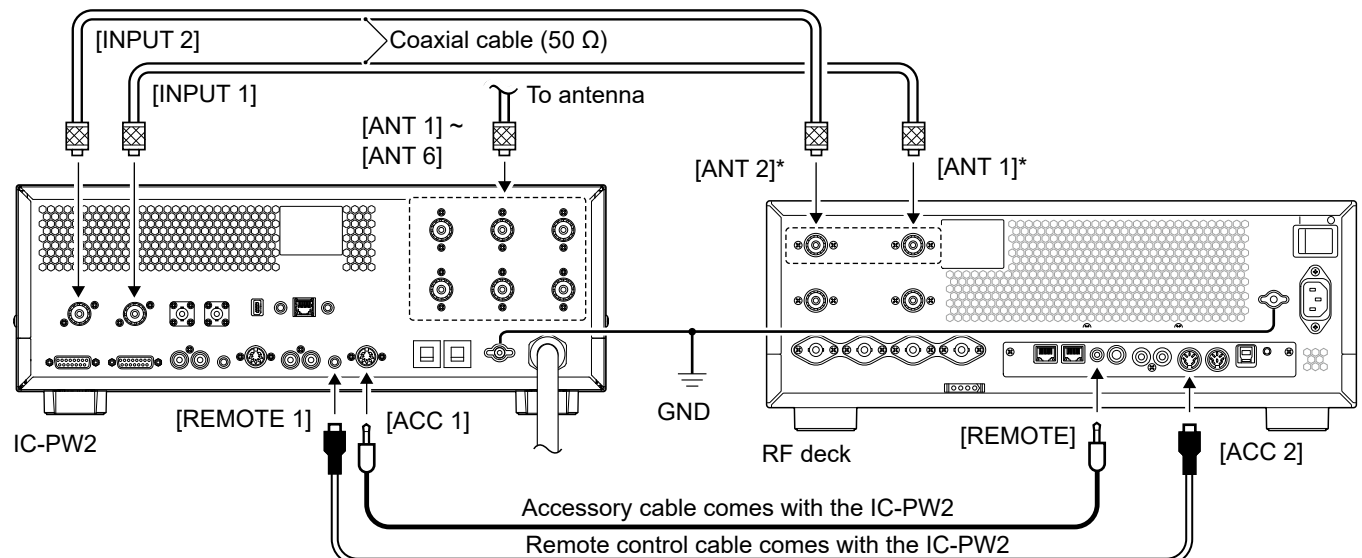


* The IC-PW2 is designed to work by connecting a coaxial cable to the transceiver's [ANT 1] and [ANT 2].

Connecting a linear amplifier

◇ Connecting a non-Icom linear amplifier

See the illustration below to connect a non-Icom linear amplifier.

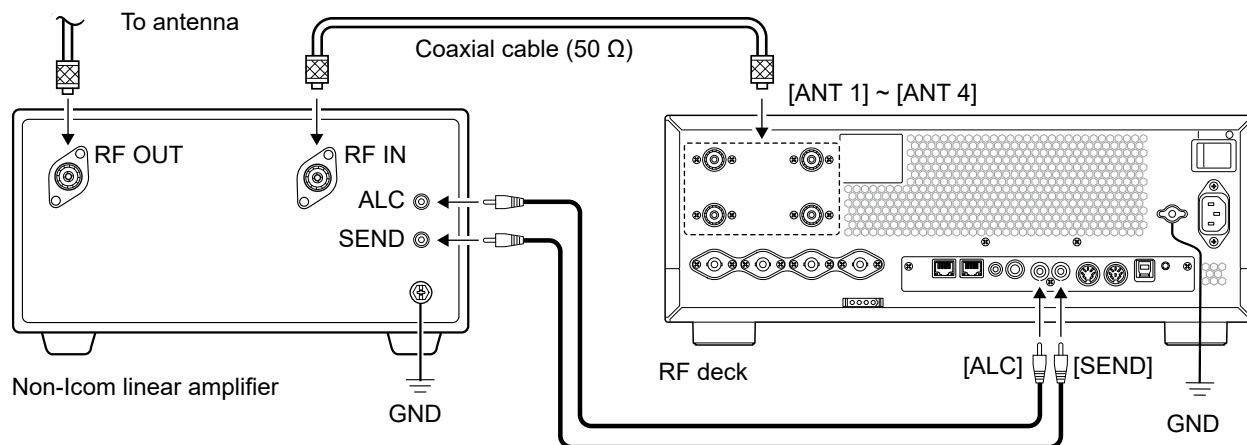

⚠ WARNING!

- The maximum signal level of the [SEND] jack is 16 V/0.5 A DC with the “Reed” setting, and 250 V/200 mA with the “MOSFET” setting. Use an external unit if your non-Icom linear amplifier requires a control voltage and/or current greater than specified.

MENU » SET > Connectors > **SEND Relay Type**

- The ALC input level must be in the range 0 to −4 V. The transceiver does not accept a positive voltage. Non-matched ALC and RF power settings could overheat or damage the linear amplifier.
- When using a linear amplifier that has a time delay between receiving and transmitting, a high SWR might cause the linear amplifier to malfunction. To prevent this, set “TX Delay.”


MENU » SET > function > **TX Delay**

Connecting a Transverter

When you use a non-Icom transverter unit, connect it as described below.

① Confirm that the transceiver and transverter are OFF before connecting them.

① You may need to connect to [ALC], depending on the transverter.

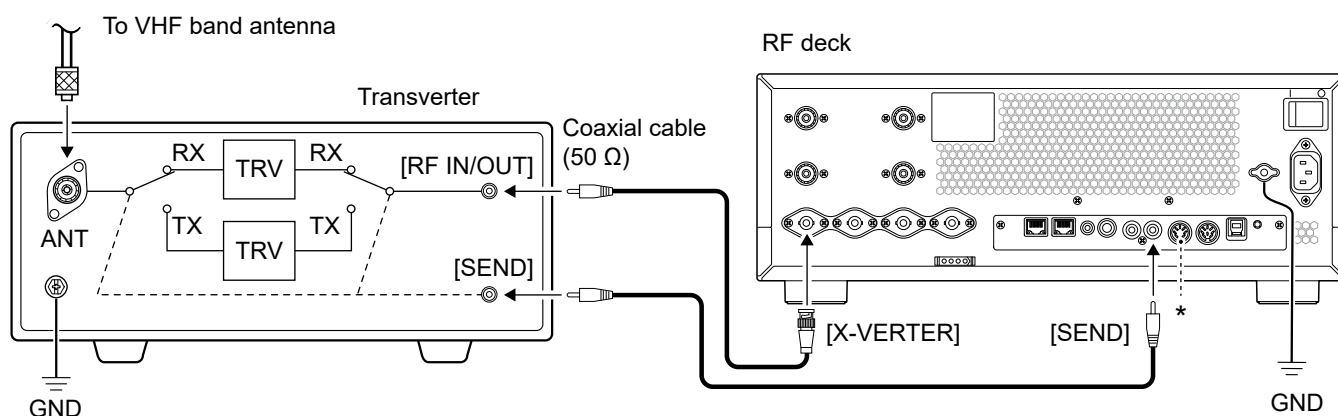

- To use the transverter operating mode, set “Transverter Function” to “ON.”

* You can also use the transverter operating mode by connecting a DC voltage to [ACC 2 (6: TRV)].

MENU » SET > Function > **Transverter Function**


- Set the offset frequency for the transverter operation.

MENU » SET > Function > **Transverter Offset**

When first applying power

Before turning ON your transceiver for the first time, make sure all connections are correctly made.

After all connections are made, set the dials to the positions described below.

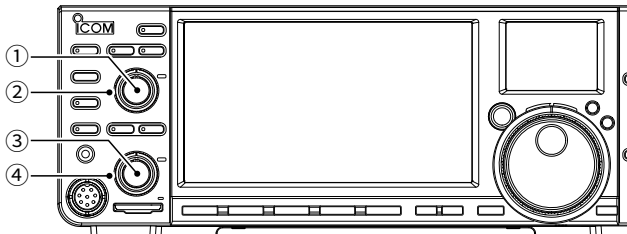


- ① MAIN (AF-RF/SQL) (inner): Fully counterclockwise
- ② MAIN (AF-RF/SQL) (outer): 12 o'clock
- ③ SUB (AF-RF/SQL) (inner): Fully counterclockwise
- ④ SUB (AF-RF/SQL) (outer): 12 o'clock

TIP: When you turn OFF the transceiver, it memorizes the current settings. Therefore, when you turn ON the transceiver again, it restarts with the same settings.

Turning power ON or OFF


◆ Turning ON the RF deck

- To turn ON the RF deck, push [I/O] on the rear panel.
 - The [POWER] indicator on the front panel lights orange.
 - ① If the controller is already ON, the [POWER] indicator lights blue after the connection is successful.
- To turn OFF the RF deck, turn OFF the controller, and then push [I/O].



◆ Turning ON the controller

- To turn ON the controller, push **POWER**.
 - ① The [POWER] indicator on the RF deck's front panel lights blue after the connection is successful.
- To turn OFF the controller, hold down **POWER** for 1 second until "POWER OFF..." is displayed.



NOTE: We recommend you set the time before operating. See Section 9 for details.

Adjusting the volume level

Rotate (AF-RF/SQL) (inner) to adjust the volume level.

Selecting the mode

VFO mode

Set the desired frequency by rotating (MAIN DIAL).



VFO indicator

Memory mode

Enter contents into the desired channel in the MEMORY list.



Memory channel number

Selecting the VFO or Memory mode

1. Touch the VFO/MEMORY icon.



- Opens the VFO/MEMORY screen.
- ① You can also select the mode by touching "VFO/MEMORY" on the QUICK MENU screen.

2. Touch [VFO] or [MEMORY].



3. To close the VFO/MEMORY screen, push **EXIT**.

Selecting the Main and Sub bands

The IC-7760 has 2 identical receivers, Main and Sub. The Main band is displayed on the left side of the screen, and the Sub band is displayed on the right side. Some functions can only be applied to the selected band, and you can transmit on only the Main band (except in Split Frequency operation).

- To select the Main band or Sub band, touch the frequency readout.

The Main band is selected.




The Sub band is selected.



- The selected band's frequency readout is displayed clearly, and the frequency of the non-selected band is grayed.
- The selected band's indicator lights as shown below.
- When the Filter Effect screen is displayed on the Sub screen, the Sub screen's displayed band is also changed.

Example: When the Sub band is selected, the MAIN/ SUB indicator lights on the Sub band side.

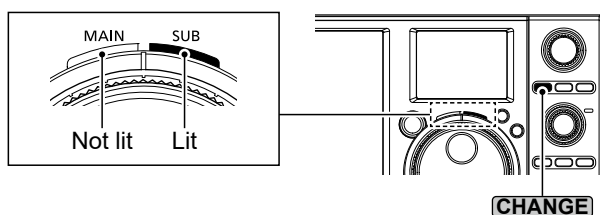

◇ Switching the Main band and Sub band

You can switch the Main band and Sub band settings, such as the operating frequency, mode, and so on.

- Push **CHANGE**.
 - The Main and Sub band settings are switched.
 - ① To copy the Main band settings to the Sub band, hold down **CHANGE** for 1 second.



Dualwatch operation

Dualwatch simultaneously monitors two frequencies. The IC-7760 has 2 independent receiver circuits, the Main and Sub bands, so that you can use Dualwatch with no compromises, even on different bands and modes.

1. Push **DUAL-W** briefly to start the Dualwatch operation.
 - "DUAL-W" is displayed.
 - ① To equalize the Sub band frequency and mode to those of the Main band, hold down **DUAL-W** for 1 second. You can select whether to turn this Quick Dualwatch function ON or OFF in the following setting. (p. X-X)


MENU » **SET > Function > Quick Dualwatch**



Displayed

2. Touch the frequency readout of the band you want to set the frequency.
 - The selected band's frequency readout is displayed clearly, and the frequency of the non-selected band is grayed.
 - The selected band's indicator lights as shown below.
 - When the Filter Effect screen is displayed on the Sub screen, the Sub screen's displayed band is also changed.


Example: When the Main band is selected, the MAIN/ SUB indicator lights on the Main band side.

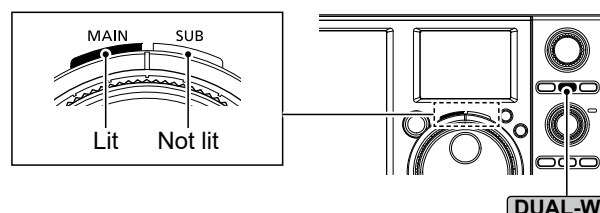

Selecting the operating band

◇ Selecting the operating band on the Sub screen

1. Push **SUB DISP** several times to display the Keypad screen.
2. Touch a band keypad. (Example: 14)
 - Displays a 14 MHz frequency.

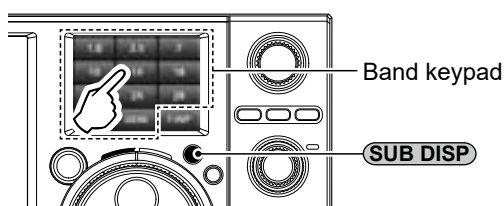

Main screen



◇ Selecting the operating band on the Main screen

1. Touch the MHz digits. (Example: 21)



- Opens the BAND STACKING REGISTER screen.
2. Touch a band key. (Example: 14)
 - Displays a 14 MHz frequency.



TIP: About the Band Stacking Register

The Band Stacking Register provides 3 memories for each band. When you change the operating band or the Register, the previously operated frequency and mode are stored.



To display the Band Stacking Register contents:

- Touch the band key for 1 second.
 - Touch the MHz digits for 1 second on the standby screen.
- ① Touch **B** to return to the previous screen.

Selecting the operating mode

You can select between the SSB (LSB/USB), SSB data (LSB-D/USB-D), CW, CW reverse, RTTY, RTTY reverse, PSK, PSK reverse, AM, AM data (AM-D), FM, and FM data (FM-D) modes.

1. Touch the mode icon (Example: USB).



- Opens the MODE screen.

2. On the MODE screen, touch the desired mode key. (Example: CW)



- ① In the SSB, AM, or FM modes, the [DATA] key is displayed.

Operating mode selection list

- ① Touch the mode key to select the operating mode.

Mode key	Operating mode	
[SSB]	USB	LSB
[CW]	CW	CW-R
[RTTY]	RTTY	RTTY-R
[PSK]	PSK	PSK-R
[AM]	AM	
[FM]	FM	
[DATA]	LSB	LSB-D*
	USB	USB-D*
	AM	AM-D*
	FM	FM-D*

* Touching [DATA] for 1 second selects DATA1, DATA2, or DATA3.

Selecting the Data mode

You can operate data communications (SSTV, RTTY (AFSK), PSK31, JT65B, and FT8).

- ① You can select the connector(s) to input the modulation signal when the data mode is selected.

MENU » **SET > Connectors > MOD Input > DATA1 MOD ~ DATA3 MOD**

- ① In the PRESET menu, you can save the combination of the settings for the data mode to quickly change the settings, depending on your operating needs. See the Advanced manual for details.

Setting the frequency

◇ Using the Main Dial

1. Select the desired operating band. (p. 3-3)
2. Rotate **(MAIN DIAL)**.
 - The frequency changes according to the selected Tuning Step.
 - ① **TX** is displayed when you select an amateur radio frequency, and **TX** (with a dotted line) is displayed when you select a frequency outside the Ham band, or outside your set Band Edges.

◇ About the Tuning Step function

You can set the **(MAIN DIAL)**'s tuning step for each operating mode.

- Touch the kHz digits to turn the Tuning Step function ON or OFF.
 - The Tuning Step function's icon "▼" is displayed above the 1 kHz digit.



The Tuning Step function is ON.

◇ Changing the Tuning Step

When the Tuning Step function is ON, you can change the tuning steps for each operating mode.

1. Select the desired operating mode. (p. 3-4)
(Example: USB)
2. Touch the kHz digit for 1 second.



- Opens the TS (USB) screen.

3. Touch the desired tuning step. (Example: 0.1 k)




- The tuning step is set, and returns to the previous screen.

◇ About the 1 Hz step Fine Tuning function

You can use the minimum tuning step of 1 Hz for fine tuning.

- Touch the Hz digits for 1 second to turn the Fine Tuning function ON or OFF.
 - ① When using the [UP]/[DN] keys on the microphone, the frequency changes in 50 Hz steps with the Fine Tuning function ON or OFF.



The 1 Hz digit is displayed.

◇ About the 1/4 Tuning function

SSB-D, CW, RTTY, and PSK modes

With the Tuning Function OFF, turn ON the 1/4 Tuning function to reduce the tuning speed to 1/4 of the normal speed, for finer tuning.

- Touch [1/4] to turn the 1/4 Tuning function ON or OFF.



1/4 Tuning function is ON.

◇ About the Auto Tuning Step function

The tuning step automatically changes, depending on the rotation speed of **(MAIN DIAL)**.

- ① You can change the Auto Tuning Step function settings in the following setting. (p. X-X)

MENU » **SET > Function > MAIN DIAL Auto TS**


Setting the frequency

◇ Directly entering a frequency

You can set the frequency without rotating **(MAIN DIAL)** by directly entering it using the keypad.

Entering the operating frequency on the Sub screen


1. Push **(SUB DISP)** several times to display the Keypad screen.
2. Touch **[F-INP]**.

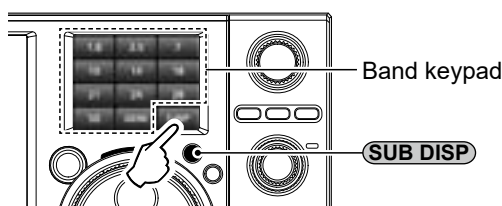

- Opens the Tenkey pad.

3. Start entry with the most significant digit.

Sub screen



Main screen



- ① To clear the entry, touch **[CE]**.

- ① To clear the entry and return to the previous screen, push **(SUB DISP)**.

4. Touch **[ENT]** to set the entered frequency.
 - Returns to the Band keypad.

- ① If you touch **[ENT]** when the digits under 100 kHz are not entered, "0" will be automatically entered into the digits that are blank.

Entering the operating frequency on the Main screen

1. Touch the MHz digits. (Example: 21)
 - Opens the BAND STACKING REGISTER screen.
2. Touch **[F-INP]**.



- Opens the F-INP screen.

3. Start entry with the most significant digit.



- ① To clear the entry, touch **[CE]**.

- ① To clear the entry and return to the previous screen, push **(EXIT)**.

4. Touch **[ENT]** to set the entered frequency.
 - Closes the F-INP screen.

- ① If you touch **[ENT]** when the digits under 100 kHz are not entered, "0" will be automatically entered into the digits that are blank.

Entry examples

- 14.025 MHz: [1], [4], [$\bullet(-)$], [0], [2], [5], [ENT]
- 18.0725 MHz: [1], [8], [$\bullet(-)$], [0], [7], [2], [5], [ENT]
- 730 kHz: [0], [$\bullet(-)$], [7], [3], [ENT]
- 5.1 MHz: [5], [$\bullet(-)$], [1], [ENT]
- 7 MHz: [7], [ENT]

- Changing from 21.28 MHz to 21.245 MHz:
[$\bullet(-)$], [2], [4], [5], [ENT]

- ① Touching [$\bullet(-)$] first enters the same MHz digits as the operating frequency.


3 BASIC OPERATION

Setting the frequency


◇ Directly entering a frequency

Entering the Split Frequency Offset on the Main screen

1. Touch the MHz digits. (Example: 14)
 - Opens the BAND STACKING REGISTER screen.
2. Touch [F-INP].

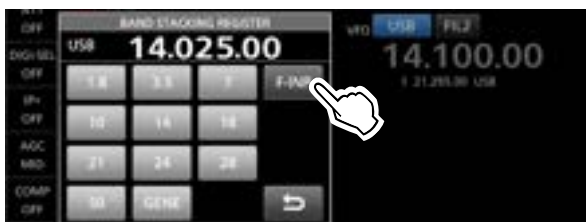


- Opens the F-INP screen.
3. Enter the Split Frequency Offset.

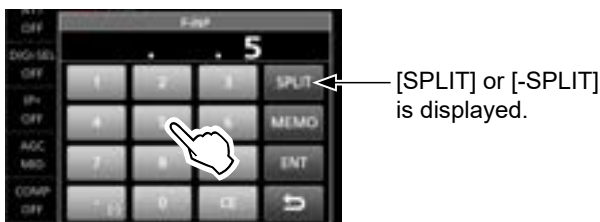


① Information

- If you want the minus shift direction, touch [•(-)].
 - Enter the offset between -9.999 MHz and +9.999 MHz (1 kHz steps).
 - To clear the entry, touch [CE].
 - To clear the entry and return to the previous screen, touch [EXIT].
4. To save the entry, touch [SPLIT] or [-SPLIT].
 - Closes the F-INP screen.
 - The Split function is automatically turned ON.

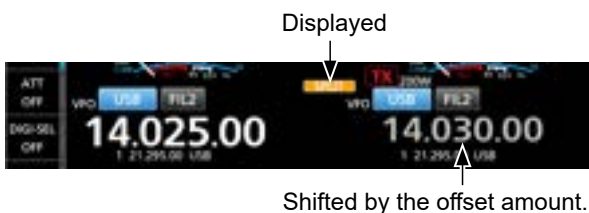


Entering the Split Frequency Offset on the Sub screen

1. Push **[SUB DISP]** several times to display the Keypad screen.
2. Touch [F-INP].

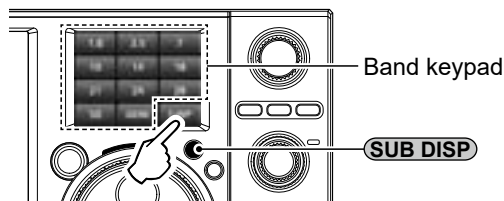

- Opens the Tenkey pad.
3. Enter the Split Frequency Offset.

Sub screen




Main screen



4. To save the entry, push **[SPLIT]**.
 - Returns to the Band keypad.
 - The Split function is automatically turned ON.

Main screen

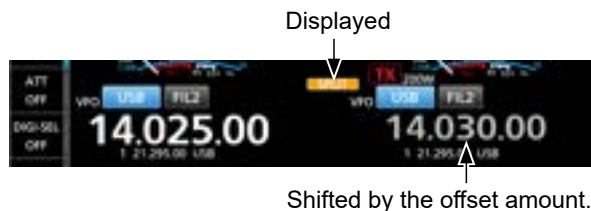

Entry examples

- 5 kHz: [5], [SPLIT]

- -10 kHz: [•(-)], [1], [0], [-SPLIT]

NOTE: If the entered operating frequency is out of an amateur band's frequency range, the transmit frequency is automatically set to the band edge frequency.

Setting the frequency

◇ Directly entering a frequency

Selecting a Memory channel by number


1. Select the Memory mode. (p. 3-1)
2. Touch the MHz digits. (Example: 21)

Memory mode




• Opens the BAND STACKING REGISTER screen.

3. Touch [F-INP].

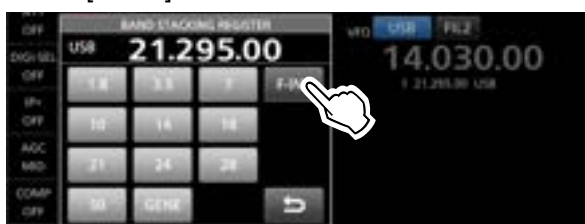

• Opens the F-INP screen.

4. Enter a Memory channel number. (Example: 3)

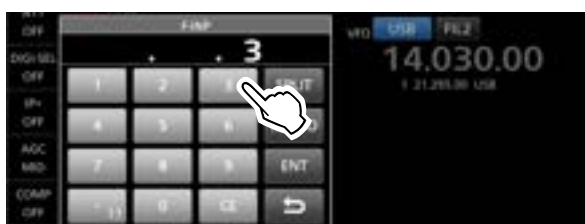

① If you want to set a Program Channel number (P1 or P2), enter "100" for P1 or "101" for P2.


5. Touch [MEMO] to set the memory channel of the entered number.

• Closes the F-INP screen.
• The selected memory channel contents are displayed.

RF gain and SQL level

Rotate **(AF)RF/SQL** (outer) to adjust the RF gain and SQL level.

By default, rotating to the left (when set to the 12 o'clock position) adjusts the RF gain, and rotating to the right adjusts the squelch level, as described below.

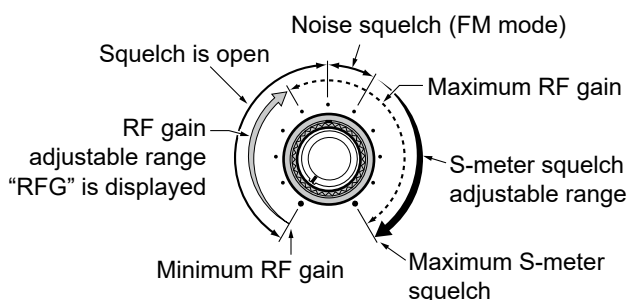

RF gain

You can adjust the receive sensitivity.

If a strong interfering signal is received, rotate **(AF)RF/SQL** (outer) counterclockwise to reduce the RF gain.

① "RFG" is displayed when the RF gain is reduced.

① If a strong signal is received and "OVF" (Overflow) is displayed, reduce the RF gain until "OVF" disappears.

Squelch (SQL) level

There are 2 types of SQL levels, depending on the operating mode.

• Noise squelch

Rotate **(AF)RF/SQL** (outer) until the noise just disappears and the TX/RX indicator goes OFF.

① Activates only in the FM mode.

• S-meter squelch


The S-meter squelch disables the audio output from the speaker or headphones when the received signal is weaker than the specified S-meter squelch level.

Rotate **(AF)RF/SQL** (outer) clockwise from the 12 o'clock position to increase the S-meter threshold level.

① You can change the **(AF)RF/SQL** (outer) control type in the following setting. (p. X-X)

MENU » **SET > Function > RF/SQL Control**

① When the Meter type is set to "Bar" or on the MULTI-FUNCTION METER screen, "▼" indicates the S-meter squelch level.



S-meter squelch level


Selecting the antenna connector

Set the antenna connector to between “ANT 1” and “ANT 4,” and turn the receive antenna connector ON or OFF.

1. Select the Main band or Sub band.
2. Select the operating band.
3. Touch [ANT] in the Multi-function key group to set to between “ANT 1” and “ANT 4.”



- ① Touching [ANT] changes the antenna connector between “ANT 1,” “ANT 2,” “ANT 3,” and “ANT 4.”
- ① Touch [ANT] for 1 second to set the antenna that is connected to the selected antenna connector for transmitting, and the antenna connected to [RX-ANT IN] for receiving.

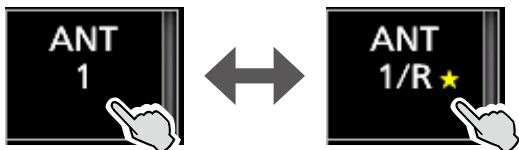

- ① “★” is displayed if you temporarily select an antenna that is different from the one that is saved in memory.
- Touch [ANT MW] for 1 second to save the temporary selection into memory, then “★” disappears.

MENU » **ANTENNA > ANT MW**

- ① When the antenna selection mode ([ANT] SW) is set to “Manual,” each antenna connector is selected according to the saved settings.

MENU » **ANTENNA > [ANT] SW**

When not using the [RX-ANT] connector:

Set to between “ANT 1” and “ANT 4.”

- ① When “ANT 1/R” ~ “ANT 4/R” is selected, the signal is switched to the [RX-ANT IN] connector, and then reception in [ANT 1] ~ [ANT 4] is disconnected.

When an optional antenna tuner is connected:

When an optional antenna tuner is connected to the antenna connector set to “External Antenna Tuner Connection,” “(EXT)” is displayed.



Dial Lock function

The Dial Lock function prevents frequency changes caused by accidentally moving (MAIN DIAL).


- ① This function electronically locks the dial.

- Hold down **SPEECH** for 1 second to turn the Dial Lock function ON or OFF.

- is displayed while the function is ON.

- ① You can select the Dial lock or Panel lock. (p. X-X)

MENU » **SET > Function > Lock Function**



Hold down **SPEECH** for 1 second.

Basic transmission

1. Hold down [PTT] (or push **TRANSMIT**) to transmit.
 - The TX/RX indicator lights red, and **TX** is displayed.
2. Release [PTT] (or push **TRANSMIT** again).
 - Returns to receive.

Adjusting the microphone gain

1. Set the operating band and mode to SSB, AM, or FM. (p. 3-3)
2. Push **MULTI** to open the Multi-function menu.
3. Hold down [PTT] on the microphone.
 - The TX/RX indicator lights red, and **TX** is displayed.
4. Touch [MIC GAIN], and rotate **MULTI** to adjust the microphone gain.



① Information

- Hold the microphone 5 to 10 cm (2 to 4 inches) from your mouth, then hold down [PTT] on the microphone and speak at your normal voice level.
 - In the SSB mode, display the ALC meter, and rotate to adjust the microphone gain until the meter reading swings between 30 to 50% of the ALC scale.
 - In the AM or FM mode, check the audio clarity with another station, or use the Monitor function (p. X-X).
5. Release [PTT].
 - Returns to receive.

Adjusting the transmit output power

Before transmitting, monitor your selected operating frequency to make sure you do not cause interference to other stations on the same frequency. It is good amateur practice to listen first, and then, even if nothing is heard, ask if the frequency is in use once or twice, before you start operating.

1. Select the operating mode. (p. 3-4)
(Example: RTTY)
2. Touch the meter, and then touch [Po] to display the Po meter. (p. 3-11)

Po meter



3. Push **[MULTI]** to open the Multi-function menu.
4. Hold down **[PTT]** on the microphone.
 - The TX/RX indicator lights red, and **TX** is displayed.
 - The Po meter level changes according to your voice level in the SSB mode. It becomes the S-meter while receiving.
5. Touch **[RF POWER]**, and rotate **[MULTI]** to adjust the transmit output power between 2 W and 200 W, or "< 2 W."



① In the AM mode, the maximum transmit output power is a quarter of the other mode's output.

① The transmit output power is limited to the maximum transmit output power.

6. Release **[PTT]**.
 - Returns to receive.

Transmit Power Limit function

The Transmit Power Limit function limits the output power to the preset level for each band.

1. Open the TX POWER LIMIT screen.
[MENU] » **[SET > Function > TX Power Limit]**
2. Touch the desired band to limit the output power.
(Example: 3.5M)



3. Touch **[+]** or **[-]** to set the maximum transmit power. (Example: 50 W)
4. Touch **[SAVE]** to save the maximum transmit power.



• Returns to the previous screen.

5. To close the TX POWER LIMIT screen, push **[EXIT]** several times.



Set transmit power

Limited transmit power

① Even when set RF POWER exceeds the TX POWER LIMIT setting, the actual output power is limited to this value.

Meter display on the Main screen

◇ Selecting the Meter display

You can display one of the 6 different transmit parameters (Po, SWR, ALC, COMP, Vd, and Id) for your convenience.

① See "Touch screen display (Sub screen)" for details about the Meter display on the Sub screen.

1. To select the displayed parameter, touch the meter.




2. Touch the key to display one of the meters. (Example: ALC)



① Touching [Multi-function] displays the Multi-function meter.

① You can also select the displayed parameter on the QUICK MENU screen.

The selected meter's icon is displayed.

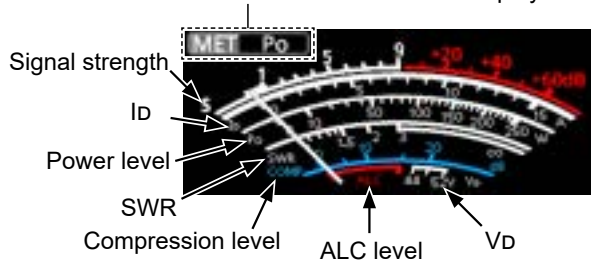


◇ Selecting the Meter type


You can select the Meter type in the following setting.

MENU » **SET > Display > Meter Type (Normal Screen)**

When selecting "Edgewise"



When selecting "Bar"



◇ Multi-function meter

You can simultaneously display all the parameters.

① The TEMP meter is also displayed on the Multi-function meter.

- Touch the currently displayed parameter for 1 second to display the Multi-function meter.
① To close the MULTI-FUNCTION METER screen, push **EXIT**.
- While the Multi-function meter is displayed, touch [P-HOLD] to turn the Peak Level Hold function ON or OFF.



Displayed when Peak Hold function is ON.



Displays the temperature of the final amplifier MOS-FETs.

- S:** Displays the receiving signal strength level.
- Po:** Displays the relative RF output power.
- SWR:** Displays the SWR of the antenna at the selected frequency.
- ALC:** Displays the ALC level. When the meter movement shows the input signal level exceeds the allowed level, the ALC limits the RF power. In such case, decrease the microphone gain level.
- COMP:** Displays the compression level when the speech compressor is used.
- Vd:** Displays the drain voltage of the final amplifier MOS-FETs.
- Id:** Displays the drain current of the final amplifier MOS-FETs.
- TEMP:** Displays the temperature of the final amplifier MOS-FETs.

Preamplifiers

The preamp amplifies received signals in the receiver front end to improve the signal-to-noise ratio and sensitivity. A preamp is used when receiving weak signals.

① Each band memorizes the Preamplifier setting.

● Touch [P.AMP].

① Touching [P.AMP] selects “P.AMP 1,” “P.AMP 2,” and “P.AMP OFF.”



P.AMP 1	Wide dynamic range preamplifier. It is most effective for the HF low bands. • Gain is approximately 12 dB.
P.AMP 2	High-gain preamplifier. It is most effective for the higher bands. • Gain is approximately 20 dB.

NOTE: When you use the preamp while receiving strong signals, the receiving signal may be distorted. In such case, turn OFF the preamp.

Attenuator

The Attenuator prevents a desired signal from becoming distorted when a very strong signal is near the frequency, or when a very strong electric field, such as from a broadcasting station, is near your location.

① Each band memorizes the Attenuator setting.

● Touch [ATT] to set the Attenuator up to 18 dB in 6 dB steps.



You can also set the Attenuator in 3 dB steps:

1. Touch [ATT] for 1 second.



2. Rotate **[MULTI]** to adjust the Attenuator level of up to 45 dB.

① If a strong signal is received and “OVF” (Overflow) is displayed, turn ON the Attenuator or Digital Selector function, or decrease the RF gain until “OVF” disappears.

RIT function

The Receiver Incremental Tuning (RIT) function compensates for differences in frequencies of other stations.

The function shifts your receive frequency up to ± 9.99 kHz without shifting the transmit frequency.

1. Push **[RIT]**.

• The RIT function turns ON.

① While using the Fine Tuning function (p. X-X), the RIT frequency is displayed in 4 digits, instead of 3.

① Pushing **[RIT]** turns the RIT function ON or OFF.




RIT frequency (3 digits)

2. Rotate **[RIT/ΔTX]** to set the RIT frequency to match the received station's transmit frequency.

① You can reset the RIT frequency to “0.00” by holding down **[CLEAR]** for 1 second.

3. After communicating, push **[RIT]** to turn OFF the RIT function.

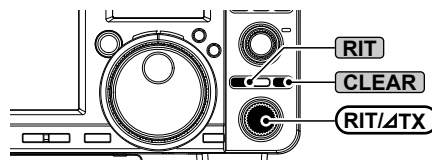

① You can change the **[CLEAR]** operation.

[MENU] » **[SET > Function > Quick RIT/ΔTX Clear]**


① When the Tracking function is ON, the RIT function shifts the receive frequency on both the Main and Sub bands.

◇ RIT monitor function

When the RIT function is ON, you can directly monitor the operating frequency by holding down **[XFC]**.

① While monitoring:

- The RIT function is temporarily turned OFF.
- The Noise Reduction, Notch filter, and Twin PBT settings are temporarily turned OFF.

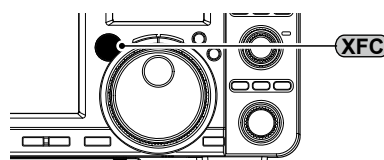

AGC function control

SSB, CW, RTTY, PSK, and AM modes

The Automatic Gain Control (AGC) function controls receiver gain to produce a constant audio output level, even when the received signal strength greatly varies.

① Each mode memorizes the AGC setting.

◇ Selecting the AGC time constant preset value

The transceiver has FAST, MID, and SLOW preset AGC settings for all modes, except in the FM mode.

1. Select the operating band and mode.
(Example: SSB, 14 MHz band)
2. Touch [AGC] to select the desired time constant.
① Touching [AGC] selects FAST, MID, or SLOW.
② For the FM mode, FAST is fixed.



◇ Setting the AGC time constant

You can set the preset AGC time constant to a desired value.

1. Select the operating band and mode.
(Example: SSB, 14 MHz band)
2. Touch [AGC] for 1 second.



- Opens the AGC screen.
3. Touch FAST, MID, or SLOW. (Example: MID)
 4. Rotate (MAIN DIAL) to set the time constant.
① You can also select "OFF."
See the table described below on adjustable time constants.



You can reset to the default setting by touching this key for 1 second.

5. To close the AGC screen, push [EXIT].

Selectable AGC Time constant (unit: seconds)

Mode	Default	Adjustable time constant
SSB	0.3 (FAST)	OFF, 0.1, 0.2, 0.3, 0.5, 0.8, 1.2, 1.6, 2.0, 2.5, 3.0, 4.0, 5.0, or 6.0
	2.0 (MID)	
	6.0 (SLOW)	
CW RTTY PSK	0.1 (FAST)	OFF, 0.1, 0.2, 0.3, 0.5, 0.8, 1.2, 1.6, 2.0, 2.5, 3.0, 4.0, 5.0, or 6.0
	0.5 (MID)	
	1.2 (SLOW)	
AM	3.0 (FAST)	OFF, 0.3, 0.5, 0.8, 1.2, 1.6, 2.0, 2.5, 3.0, 4.0, 5.0, 6.0, 7.0, or 8.0
	5.0 (MID)	
	7.0 (SLOW)	
FM	0.1 (FAST)	Fixed

NOTE: While you are receiving weak signals, and a strong signal is momentarily received, the AGC function quickly decreases the receiver gain. When that signal disappears, the transceiver may not receive weak signals because of the AGC action. In that case, select FAST, or touch [AGC] for 1 second to open the AGC screen, and then set the time constant to "OFF."

Setting the Speech Compressor


SSB mode

The Speech Compressor increases the average RF output power, improving readability at the receiving station. This function compresses the transmitter audio input to increase the average audio output level.

① The function is effective for long-distance communication, or when propagation conditions are poor.

◇ Setting before using the Speech Compressor function

1. Select the SSB mode. (Example: USB)
2. Be sure the Speech Compressor is OFF.
① If it is ON, touch [COMP] to turn it OFF.

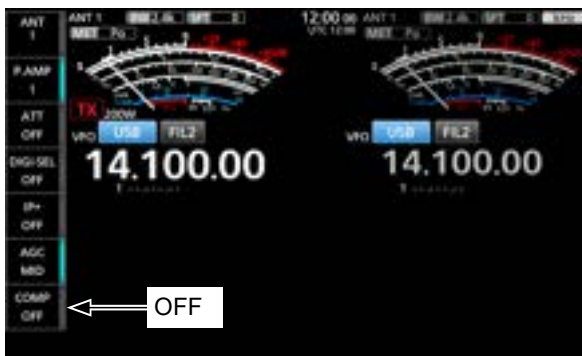

3. Touch the meter, and then touch [ALC] to display the ALC meter.




4. Push **[MULTI]** to open the Multi-function menu.
5. Touch [MIC GAIN], and then rotate **[MULTI]** to adjust it by speaking into the microphone to where the ALC meter reads within the 30 to 50% range of the ALC zone.




◇ Using the Speech Compressor function

1. Touch the meter, and then touch [COMP] to display the COMP meter.
2. Touch [COMP] for 1 second.
• Turns ON the Speech Compressor function and opens the Multi-function menu.

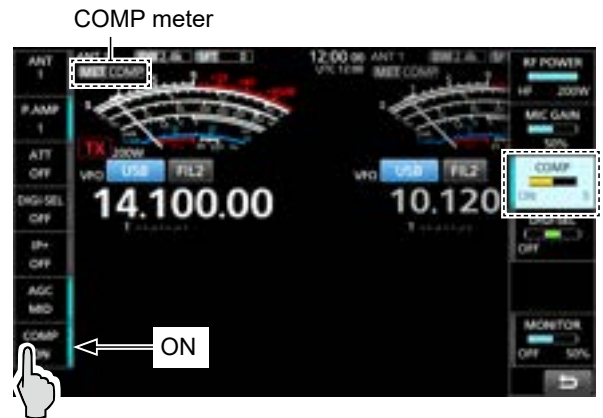

3. While speaking into the microphone at your normal voice level, rotate **[MULTI]** to adjust the Speech Compressor level to where the COMP meter reads within the COMP zone (10 to 20 dB range).
① If the COMP meter peaks exceed the COMP zone, your transmitted voice may be distorted.

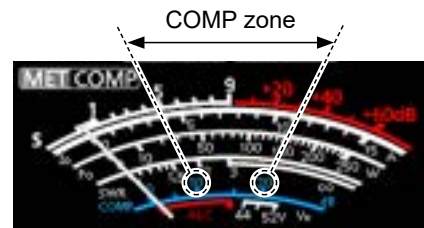

4. To close the Multi-function menu, push **[MULTI]**.

Using the Digital Twin PBT

SSB, CW, RTTY, PSK, and AM modes

To reject interference, the Digital Twin Passband Tuning (PBT) narrows the IF passband width by electronically shifting the IF frequency to slightly above or below the IF center frequency. The IC-7760 uses the digital function using the FPGA (Field Programmable Gate Array) filtering method.

① Each band memorizes the PBT setting.


- Rotate **TWIN PBT CLR** inner (PBT1) and outer (PBT2) to adjust the shift value.

- The passband width and shift value are displayed.

- The indicator to the left of

TWIN PBT CLR lights white when you use the Digital Twin PBT to change the IF passband width.

① Hold down **TWIN PBT CLR** for 1 second to clear the PBT setting.

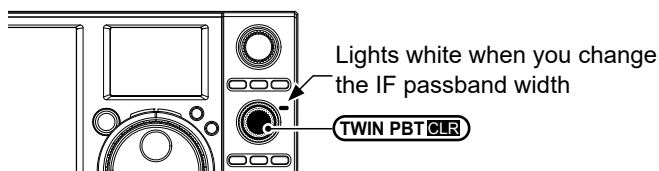

Lights white when you change the IF passband width

TWIN PBT CLR


① Information

- To narrow the IF passband width, shift "PBT1" and "PBT2" in the opposite direction from each other, to narrow the overlapped area.
- To use as the IF Shift function, set "PBT1" and "PBT2" to the same value.
- The PBT is adjustable in 50 Hz steps in the SSB, CW, RTTY, and PSK modes, and 200 Hz in the AM mode. The center shift value changes in 25 Hz steps in the SSB, CW, RTTY, and PSK modes, and 100 Hz in the AM mode.

NOTE: While rotating **TWIN PBT CLR**, you may hear some noise. This comes from the FPGA and does not indicate an equipment malfunction.

TIP:


- A dot "." is displayed on the IF Filter indicator when you change the IF passband width, using the Digital Twin PBT.

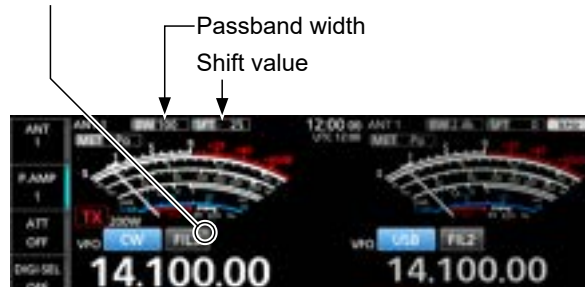

Passband width

Shift value


- Touch the IF Filter indicator for 1 second to display the current passband width and shift value. Opens the FILTER screen.

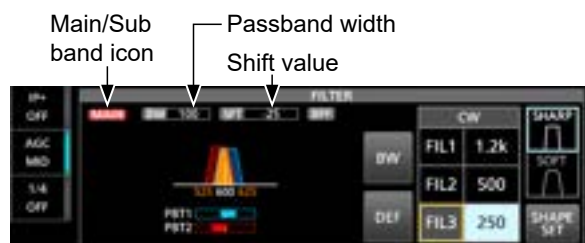

Main/Sub band icon

Passband width

Shift value

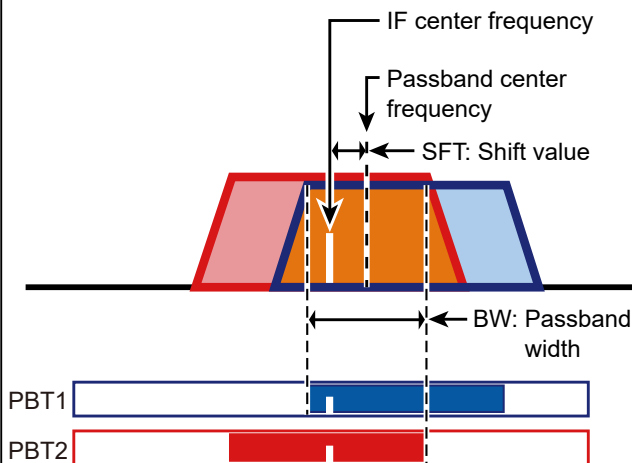


◇ Using the Filter Effect screen

Displayed when you change the IF passband width.




To display the keys, touch the screen.

Default value




Interference Interference
IF center frequency

Cutting lower passband



Passband Interference
IF center frequency

Cutting both higher and lower passbands



Desired signal
IF center frequency

Selecting the IF filter

SSB, CW, RTTY, PSK, and AM modes

The IC-7760 has 3 IF filter passband widths for each mode, and you can select them on the FILTER screen.

You can set the IF filter to wide (FIL 1), mid (FIL 2), or narrow (FIL 3).

1. Select the operating mode. (Example: CW)
2. Touch the IF Filter indicator for 1 second.



- Opens the FILTER screen.
3. Touch the IF Filter indicator several times to select FIL 1 (wide), FIL 2 (mid), or FIL 3 (narrow).
 4. Touch [BW].
 - Selects the passband width mode.



You can reset to the default settings by touching this key for 1 second.

5. Rotate **(MAIN DIAL)** to select the passband width.
 - ① You cannot change the passband width in the FM or FM-D mode.
 - ① When you change the passband width, the Digital Twin PBT setting value is reset to the center position.
 - ① "BPF" is displayed when a band width is set to 500 Hz or less in the SSB, CW, RTTY, or PSK mode.
6. To close the FILTER screen, push **[EXIT]**.

TIP: When you set the IF filter to FIL2 or FIL3 in the FM mode, the transceiver will transmit in the FM narrow mode.

Mode	IF filter	Selectable range (steps)
SSB	FIL 1 (3.0 kHz)	50 Hz to 500 Hz (50 Hz)/ 600 Hz to 3.6 kHz (100 Hz)
	FIL 2 (2.4 kHz)	
	FIL 3 (1.8 kHz)	
SSB-D	FIL 1 (3.0 kHz)	50 Hz to 500 Hz (50 Hz)/ 600 Hz to 3.6 kHz (100 Hz)
	FIL 2 (1.2 kHz)	
	FIL 3 (500 Hz)	
CW PSK	FIL 1 (1.2 kHz)	50 Hz to 500 Hz (50 Hz)/ 600 Hz to 3.6 kHz (100 Hz)
	FIL 2 (500 Hz)	
	FIL 3 (250 Hz)	
RTTY	FIL 1 (2.4 kHz)	50 Hz to 500 Hz (50 Hz) 600 Hz to 2.7 kHz (100 Hz)
	FIL 2 (500 Hz)	
	FIL 3 (250 Hz)	
AM AM-D	FIL 1 (9.0 kHz)	200 Hz to 10.0 kHz (200 Hz)
	FIL 2 (6.0 kHz)	
	FIL 3 (3.0 kHz)	
FM FM-D	FIL 1 (15 kHz)	Fixed
	FIL 2 (10 kHz)	
	FIL 3 (7.0 kHz)	

Selecting the IF filter shape

SSB and CW modes

You can set the IF filter shape for each mode.

1. Select the operating mode. (Example: CW)
2. Touch the filter icon for 1 second.
 - Opens the FILTER screen.
3. Touch **[SHARP]** or **[SOFT]**.



① Touching **[SHAPE SET]** opens the FILTER SHAPE SET screen.

4. To close the FILTER screen, push **[EXIT]**.

• SHARP

This selection is to emphasize the passband width of the filter. The filter has an almost ideal shape factor. Signals that are out of the passband are extremely filtered out, and it gives you better audio quality.

• SOFT

The filter shoulders are roundly formed as in analog filters. This decreases noise components in the high and low frequencies of the filter passband, and increases the S/N of the target signal. These characteristics play an effective role in picking up very weak signals. The shape factor is retained, and the sharpness of the bandpass is excellent.

Notch Filter


The IC-7760 has Auto Notch and Manual Notch functions.

Auto Notch automatically attenuates beat tones, tuning signals, and so on. It can be used in the SSB, AM, and FM modes.

Manual Notch attenuates beat tones, tuning signals, and so on by manually adjusting the filtering frequency. It can be used in the SSB, CW, RTTY, PSK, and AM modes.

◇ Selecting the Notch filter type

- Push **[NOTCH]**.

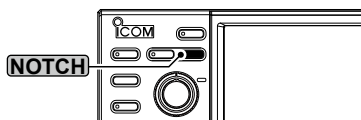

- The Notch Filter indicator on **[NOTCH]** lights.
- ① Pushing **[NOTCH]** changes between “AN (Auto Notch),” “MN (Manual Notch),” and OFF.
- ① You can also select the Notch filter type on the FUNCTION screen.



Displayed when Auto Notch is selected.

◇ Setting the Manual Notch filter

When Manual Notch is selected, adjust the filtered frequency.

1. Hold down **[NOTCH]** for 1 second.
 - Opens the NOTCH menu.
 - The Manual Notch is automatically selected, and “MN” is displayed.
2. Touch **[WIDTH]** several times to set the Manual Notch filter width to “WIDE,” “MID,” or “NAR.”




3. Rotate **[◀MULTI▶]** slowly, to manually attenuate the frequency.
4. To close the NOTCH menu, push **[◀MULTI▶]**.

NOTE: While adjusting, noise may be heard. This comes from the FPGA and does not indicate an equipment malfunction.

◇ Using the Filter Effect screen


When Manual Notch is selected, you can visually check that the Notch function removes the set frequency and filter width from the signal.

When the Notch function is OFF

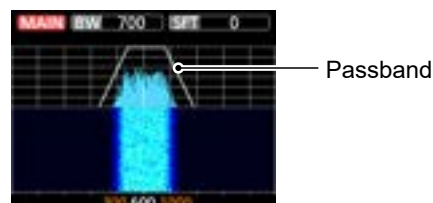


Passband

When the Notch function is ON

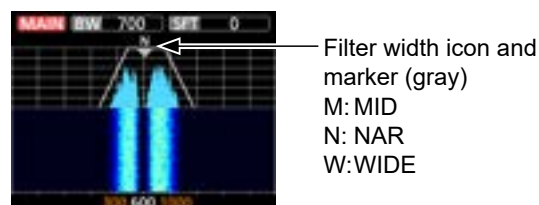

Filter width icon and marker (gray)
M: MID
N: NAR
W: WIDE


While adjusting the filtered frequency

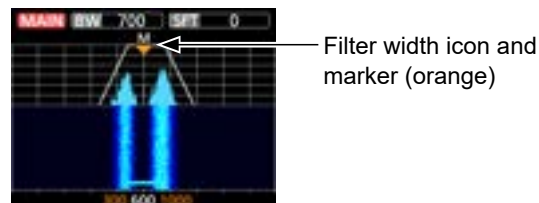

Filter width icon and marker (orange)

- ① When the marker moves outside the upper or lower Edge frequency, “<<” or “>>” is displayed in the upper side corners of the Filter Effect screen.
- <<: The marker is outside the lower edge.
- >>: The marker is outside the higher edge.

TIP: Touching the Sub screen displays the function keys.

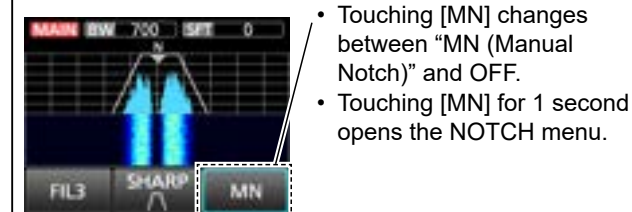

- Touching **[MN]** changes between “MN (Manual Notch)” and OFF.
- Touching **[MN]** for 1 second opens the NOTCH menu.

Noise Blanker

SSB, CW, RTTY, PSK, and AM modes

The Noise Blanker eliminates pulse-type noise, such as the noise from car ignitions.

- Push **NB**.
 - The Noise Blanker indicator on **NB** lights.
 - ① Pushing **NB** turns this function ON or OFF.
 - ① You can also turn the Noise Blanker ON or OFF on the FUNCTION screen.

NOTE: When using the Noise Blanker, received signals may be distorted if they are excessively strong, or the noise is other than a pulse type. In that case, turn OFF the Noise Blanker, or shallow the DEPTH on the NB menu. See the description below for details.

◇ Adjusting the NB level and time

To deal with various types of noise, you can adjust the attenuation level and blanking depth and width in the NB menu.

1. Hold down **NB** for 1 second.
 - Turns ON the Noise Blanker and opens the NB menu.
2. Touch the item to adjust. (Example: DEPTH)



3. Rotate **⊖MULTI** to adjust the item. (Example: 8)
4. To close the NB menu, push **⊖MULTI**.

LEVEL (Default: 50%)

Adjusts the level where the Noise Blanker activates between 0 and 100%.


DEPTH (Default: 8)

Adjusts the noise attenuation level to between 1 and 10.


WIDTH (Default: 50)

Adjusts the blanking duration time to between 1 and 100.


NB is OFF




NB is ON (Effective)



NB is ON (DEPTH is too short)



NB is ON (WIDTH is too wide)



Portion of desired signal is also removed.

Noise Reduction

The Noise Reduction function reduces random noise components and enhances signal audio.

- Push **NR**.
 - The Noise Reduction indicator on **NR** lights.
 - ① Pushing **NR** turns this function ON or OFF.
 - ① You can also turn the Noise Reduction ON or OFF on the FUNCTION screen.

◇ Adjusting the Noise Reduction level

Adjust the Noise Reduction level to where noise is reduced but the received signal is not distorted.


1. Hold down **NR** for 1 second.
 - Turns ON the Noise Reduction function and opens the NR menu.
2. Rotate **⊖MULTI** to adjust the Noise Reduction level to between 0 and 15.



- ① Adjust to a higher level to increase the reduction level, and a lower level to decrease it.
3. To close the NR menu, push **⊖MULTI**.


NR is OFF NR level 0

Noise components



NR is ON NR level 4

Desired signal (CW)



Setting the transmit filter width

SSB mode

The transmit filter width for the SSB and SSB-D modes can be set. WIDE (wide), MID (mid), or NAR (narrow) can be selected only in the SSB mode.

- ① The filter settings are memorized for both the ON and OFF states of the Compressor function.

To change the filter width in the SSB mode:

1. Set the operating mode to USB or LSB.
2. Push **[FUNCTION]**.
 - Opens the FUNCTION screen.
3. Touch **[TBW]**.



- ① Touching **[TBW]** changes the filter width between WIDE, MID, and NAR.

The transmit filter widths are set to the following values by default.

- SSB (WIDE): 100 Hz to 2900 Hz
- SSB (MID): 300 Hz to 2700 Hz
- SSB (NAR): 500 Hz to 2500 Hz
- SSB-D: 300 Hz to 2700 Hz

- ① You can change the filter width values in the following settings.

[MENU] » SET > Tone Control/TBW > TX > SSB > **TBW (WIDE)**

[MENU] » SET > Tone Control/TBW > TX > SSB > **TBW (MID)**

[MENU] » SET > Tone Control/TBW > TX > SSB > **TBW (NAR)**

[MENU] » SET > Tone Control/TBW > TX > SSB-D > **TBW**

Monitor function

SSB, RTTY, PSK, AM, and FM modes

The Monitor function enables you to monitor your transmit audio. Use this function to check the voice characteristics while adjusting transmit audio parameters.

- ① You can hear the CW sidetone regardless of the Monitor function setting.

1. Select the operating mode that you want to monitor. (Example: SSB)
2. Push **[FUNCTION]**.
 - Opens the FUNCTION screen.
3. Touch **[MONI]** to turn ON the Monitor function.



- ① Touching **[MONI]** turns the Monitor function ON or OFF.

4. If you want to adjust the monitor audio output, touch **[MONI]** for 1 second.



5. Rotate **[MULTI]** to adjust MONITOR to the clearest audio output between 0% and 100%, while speaking at your normal voice level.



6. To close the Multi-function menu, push **[MULTI]**.

NOTE: When using the VOX function, turn OFF the Monitor function. Otherwise, the transmitted audio will echo.

DPD function

SSB and AM modes

The Digital Pre-Distortion (DPD) function reduces the distortion of the SSB, SSB-D, AM, or AM-D mode signals transmitted by the transceiver.

When the transceiver is used as an exciter for the IC-PW2, the distortion generated by the RF power amplifier is also reduced.

There are 2 ways to use the DPD function.

Use the DPD function only with the transceiver:

The DPD single adjustment* (Adjustment only with the transceiver) is made at the factory. The DPD function can be used without the adjustment.

* By adjusting the ALC circuit voltage and gain in the FPGA, sudden changes in the gain of the ALC circuit behind the FPGA can be minimized, enabling optimal distortion correction.

① This also applies when the IC-PW2 is connected, but the linear amplifier circuit is OFF.

① When the linked adjustment cannot be performed, make the single adjustment. See the Advanced manual for details.

Use when operating the transceiver as an exciter for the IC-PW2:

The DPD linked adjustment (Adjustment linked with the IC-PW2) for each operating band is required.

① See the Advanced manual for details.

◇ Turning the DPD function ON or OFF

1. Select the operating mode. (Example: USB)
2. Push **[FUNCTION]**.
3. Touch **[DPD]**.



① Touching **[DPD]** turns the DPD function ON or OFF.

Digital Selector

You can manually adjust the center frequency of the automatic preselector using the Digital Selector function.

The automatic preselector adds to reduce intermodulation distortion from nearby strong signals. The automatic preselector tracks the frequency tuning by changing its resonant frequency in discrete steps. The function is used for only 1.500000 MHz ~ 29.999999 MHz.

① Each band memorizes the Digital Selector function setting.

① When the preamplifier is OFF, the automatic preselector adds to the 1st step that the high frequency signals pass to fully demonstrate the filter effect.

When the preamplifier is ON, the automatic preselector adds behind the preamplifier to demonstrate the filter effect without the loss of sensitivity.

● Touch **[DIGI-SEL]**.

① Touching **[DIGI-SEL]** turns the Digital Selector function ON or OFF.



◇ Adjusting the center frequency

1. Touch **[DIGI-SEL]** for 1 second.
 - Opens the Multi-function menu.



2. Rotate **[MULTI]** to adjust the center frequency.
3. To close the Multi-function menu, push **[MULTI]**.

NOTE:

- The Digital Selector function is automatically turned OFF while scanning.
- When you rotate **[MAIN DIAL]** while the Digital Selector is ON, mechanical noise may be heard due to the switching noise from internal relays.

Split frequency operation

Split frequency operation enables you to transmit and receive on different frequencies on the Main and the Sub bands.

There are 2 ways to use Split frequency operation.


- Use the Quick Split function.
- Use the receive and transmit frequencies set to the Main and Sub bands.

The other station		Your station	
Transmit frequency	USB mode 21.29000 MHz	Main band Receive frequency	
Receive frequency	USB mode 21.29500 MHz	Sub band Transmit frequency	

◇ Using the Quick Split function

The Quick Split function enables you to automatically equalize the frequency and mode of the Main band to the Sub band, and activate the Split function.

1. Set the Main band's receive frequency and operating mode.
(Example: 21.29000 MHz in the USB mode)
2. Hold down **[SPLIT]** for 1 second.
 - The Quick Split function is turned ON, and the Main band settings are set to Sub band.

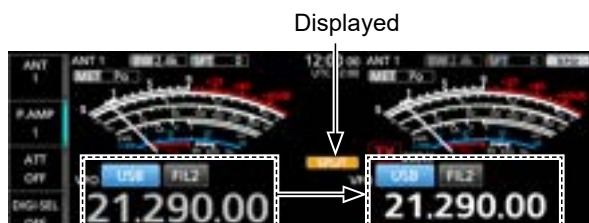

3. Rotate **(MAIN DIAL)** to set the Sub band's transmit frequency.
(Example: 21.29500 MHz in the USB mode)



TIP: You can select whether or not to display the F-INP screen when turning ON the Quick Split function.

[MENU] » SET > Function > SPLIT >
Display Keypad on Quick SPLIT

◇ Using the receive and transmit frequencies set to Main and Sub bands

1. Set the Main band's receive frequency and operating mode.
(Example: 21.29000 MHz in the USB mode)
2. Touch the Sub band's frequency readout to select the Sub band, and then set the receive frequency and the operating mode.
(Example: 21.29500 MHz in the USB mode)



3. Push **[SPLIT]**.
 - ① Pushing **[SPLIT]** turns the Split function ON or OFF.



4. Touch the Main band's frequency readout to return to receive on the Main band.
 - ① The Split frequency operation is ready.

Split Lock function

To prevent accidentally changing the receive frequency by releasing (XFC) while rotating (MAIN DIAL), use the Split Lock function. Using both this function and the Dial Lock function enables you to change only the transmit frequency.

1. Turn ON the Split Lock function.
(MENU) » [SET > Function > SPLIT > SPLIT LOCK]
2. Turn ON the Split function.
3. Hold down (SPEECH) for 1 second to turn ON the Dial Lock function.
4. While holding down (XFC), set the transmit frequency.



Displayed when the Dial Lock function is ON.

Auto Tuning function

CW and AM modes

You can tune in a signal you are receiving using the Auto Tuning function. You can automatically tune the signal in the IF passband width in the CW mode, or within a ± 5 kHz range in the AM mode.

1. Select the AM or CW mode.
2. Push (AUTOTUNE) to start the Auto Tuning.
① While using the RIT function, the RIT frequency is automatically tuned by this function.



Displayed while tuning

NOTE: When receiving a weak signal, or receiving a signal with interference, the Auto Tuning function may tune the receiver to an undesired signal, or may not start to tune. In such case, a warning beep sounds.

Operating CW

◇ Setting the CW pitch control

You can set the received CW audio pitch and the CW side tone to suit your preference, without changing the operating frequency.

1. Select the CW mode.
2. Push (MULTI) to open the Multi-function menu.
3. Touch [CW PITCH].



4. Rotate (MULTI) to set the CW pitch to between 300 and 900 Hz (in 5 Hz steps).
5. To close the Multi-function menu, push (MULTI).

TIP: To graphically display the CW pitch, open the FILTER screen by touching the IF Filter indicator for 1 second.



CW pitch frequency


When the selected IF filter is:

- Below 500 Hz, the CW pitch frequency is graphically changed in 5 Hz steps.
- Above 600 Hz, the CW pitch frequency is graphically changed in 25 Hz steps.

◇ Setting the key speed

You can set the keying speed of the internal electronic keyer.

1. Select the CW mode.
2. Push (MULTI) to open the Multi-function menu.
3. Touch [KEY SPEED].

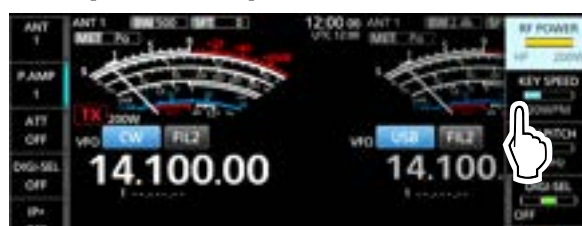

4. Rotate (MULTI) to set the key speed to between 6 and 48 Words Per Minute (WPM).
5. To close the Multi-function menu, push (MULTI).

Operating CW

◇ Using the Break-in function

Use the Break-in function in the CW mode to automatically switch between transmit and receive when keying. The IC-7760 is capable of operating in the Semi Break-in and Full break-in modes.


TIP: “Key Type” is set to “Paddle” by default. You can select the keyer type in the following item.

MENU » **SET > CW-KEY SET > Key Type**

Semi Break-in operation

In the Semi Break-in mode, the transceiver transmits when keying, and then automatically returns to receive after a preset time after you stop keying.

1. Select the CW mode.
2. Push **VOX/BK-IN** several times to select “BKIN.”

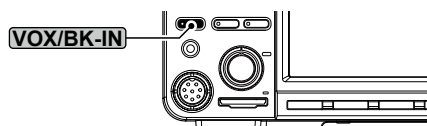

- The “BKIN” icon is displayed, and the BK-IN indicator on **VOX/BK-IN** lights.
- ① Pushing **VOX/BK-IN** selects “BKIN (Semi Break-in),” “F-BKIN (Full Break-in),” or OFF (no indication).
- 3. To adjust the Break-in delay time, hold down **VOX/BK-IN** for 1 second.
 - Opens the BKIN menu.
- 4. Rotate **ⓂMULTI** to set to where the transceiver returns to receive after the desired delay time after you stop keying.



The selected mode (Semi Break-in) is displayed.

- ① When using a paddle, push **ⓂMULTI** to open the Multi-function menu, and then adjust the KEY SPEED (p. X-X) while operating the paddle.
- 5. To close the BKIN menu, push **ⓂMULTI**.

Full Break-in operation

In the Full Break-in mode, the transceiver automatically transmits while keying down, and then immediately returns to receive after keying up.

1. Select the CW mode.
2. Push **VOX/BK-IN** several times to display “F-BKIN.”
 - The “F-BKIN” icon is displayed, and the BK-IN indicator on **VOX/BK-IN** lights.
 - ① Pushing **VOX/BK-IN** selects “BKIN (Semi Break-in),” “F-BKIN (Full Break-in),” or OFF (no indication).



The selected mode (Full Break-in) is displayed.

3. Use a straight key or paddle.
 - ① In the Full break-in mode, the transceiver automatically returns to receive immediately after you key up. The transceiver receives while keying up.

◇ Monitoring the CW side tone

When the transceiver is in standby and the Break-In function is OFF, you can listen to the CW side tone without actually transmitting.

① Information

- This enables you to match your transmit frequency exactly to another station's by matching the audio tone.
- You can also use the CW side tone (make sure the Break-in function is OFF) to practice CW sending.
- You can adjust the CW side tone level in the following item.


MENU » **SET > CW-KEY SET > Side Tone Level**

Operating CW

◇ Audio Peak Filter (APF) operation

The APF enables you to set excellent selectivity in the CW mode. You can set the selectivity to between the 3 APF passband widths.

1. Select the CW mode.
2. Push **[APF/TPF]** to turn ON the Audio Peak Filter.




- The APF icon is displayed, and the APF indicator on **[APF/TPF]** lights.
- The selected passband width is displayed under the APF icon for 1 second.

① Pushing **[APF/TPF]** turns the function ON or OFF.

① You can also turn the function ON or OFF on the FUNCTION screen.

3. Hold down **[APF/TPF]** for 1 second.
 - Opens the APF menu.

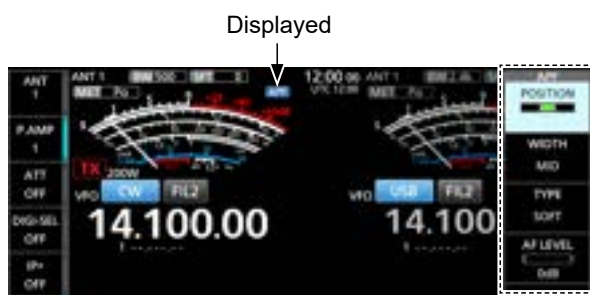

4. Touch to select the item, and then set the audio filter position, passband width, and the audio level.
5. To close the APF menu, push **[MULTI]**.

POSITION

Shifts the peak frequency of the APF. This function enables you to avoid interference from adjacent frequencies.

WIDTH (Default: WIDE)

Selects the APF passband width.

- When "TYPE" is set to "SOFT," select WIDE, MID, or NAR.
- When "TYPE" is set to "SHARP," select 320 Hz, 160 Hz, or 80 Hz.

TYPE (Default: SOFT)

Selects the audio filter type (soft sound or sharp sound).

AF LEVEL (Default: 0 dB)

Sets the audio level between 0 dB and +6 dB in 1 dB steps.

◇ About the electronic Keyer function

You can set the Memory Keyer function settings, paddle polarity settings, and so on of the Electronic Keyer.

1. Select the CW mode.
2. Open the KEYER screen.


[MENU] » **[KEYER]**

3. Touch **[EDIT/SET]**.



- Opens the EDIT/SET screen.

4. Select the desired item to set.

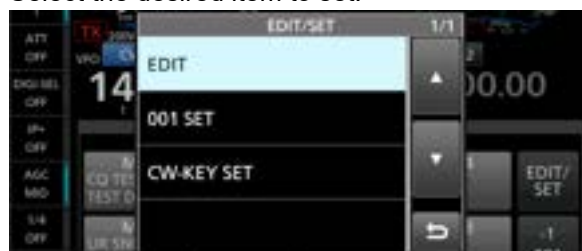• **EDIT:**

Opens the KEYER MEMORY edit menu, and you can edit the Keyer memories M1 to M8.

• **001 SET:**

Opens the KEYER 001 Contest Number menu, and you can set the following items.

- Number Style
- Count Up Trigger
- Present Number

• **CW-KEY SET:**

Opens the CW-KEY SET menu, and you can set the following items.

- Side Tone Level
- Side Tone Level Limit
- Keyer Repeat Time
- Dot/Dash Ratio
- Rise Time
- Paddle Polarity
- Key Type
- MIC Up/Down Keyer

① You can also set the same items in the SET mode.

[MENU] » **[SET > CW-KEY SET]**


5. To close the KEYER screen, push **[EXIT]** several times.

Spectrum scope screen


The spectrum scope enables you to display the activity on the selected band, as well as the relative strengths of various signals in that band.

The transceiver has three spectrum scope modes, the Center mode, the Fixed mode, and the Scroll mode. You can also turn the Waterfall display ON or OFF. In addition, you can select the Mini scope to display the scope in a smaller size on the screen.


• Center mode screen

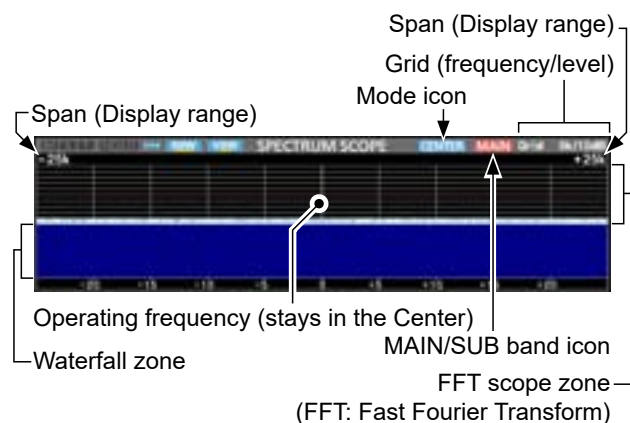

• Fixed mode screen

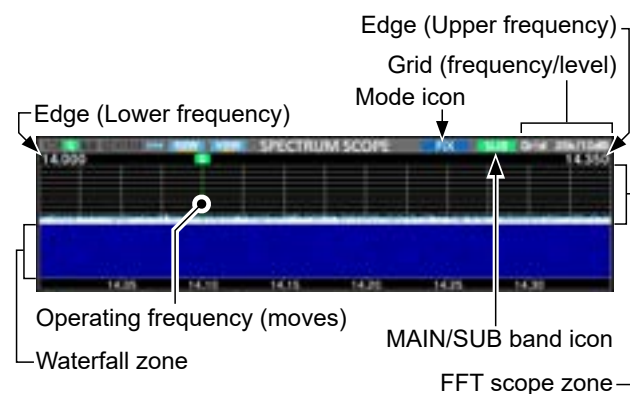

• Scroll mode screen

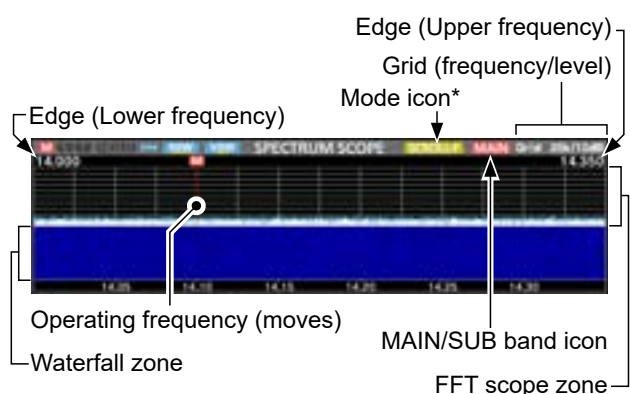

* When in the SCROLL-C mode, **SCROLL-C** is displayed.

◇ Using the Spectrum Scope

Display the SPECTRUM SCOPE screen.

[MENU] » **[SCOPE]**

MENU 1: Center/Scroll-C mode



MENU 1: Fix/Scroll-F mode



MENU 2: Center/Fix/Scroll-C/Scroll-F mode



Key	Action	
<MENU1> <MENU2>	Selects the Function menus.	
SPAN	Touch	In the Center or Scroll-C mode, selects the scope span. • Spans: ± 2.5 , 5.0, 10, 25, 50, 100, 250, and 500 kHz
	Touch for 1 second	Resets to the ± 2.5 kHz span.
EDGE	In the Fixed or Scroll-F mode, selects the Edge frequencies. ① You can set the upper and lower Edge frequencies in "Fixed Edges" on the SCOPE SET screen by touching [EXPD/SET] for 1 second.	
HOLD	Touch	Turns the Hold function ON or OFF. • [HOLD] and the Marker are displayed. Freezes the current spectrum.
	Touch for 1 second	Clears the Peak Hold level.
CENT/FIX	Touch	Selects the Center or Fixed mode.
	Touch for 1 second	Selects the Scroll mode.
MAIN/SUB	Selects the Main or Sub band.	
DUAL	Selects the Dual or Single scope.	
EXPD/SET	Touch	Selects the Expanded or Normal screen.
	Touch for 1 second	Displays the SCOPE SET screen. ① See the Advanced manual for details.
REF	Opens the "REF Level" window. ① Rotate (MAIN DIAL) to adjust the Reference level. ① Touch again to close the window.	
SPEED	Selects the sweep speed. • "▶▶▶" (FAST), "▶▶" (MID), or "▶" (SLOW).	
RBW	Selects the Resolution Band Width from NAR (narrow), MID, and WIDE. ① This selection is for the filter that visually separates the spectrum. ① When "NAR" is selected, the signals are finely separated.	
VBW	Selects the Video Band Width from NAR (narrow) and WIDE. ① When "Wide" is selected, the line drawn on the receive spectrum becomes wide. However, the small edge cannot be drawn.	
MARKER	Selects various Markers.	

Spectrum scope screen

◇ Marker

The Marker displays the operating frequency for both the Main and Sub bands in the SPECTRUM SCOPE screen.



M: The Main band marker

- Marks the Main band frequency.

S: The Sub band marker

- Marks the Sub band frequency.

T: The TX marker

- Marks the transmit frequency.

• About Main and Sub Marker

In the Fixed or Scroll mode, the Main and Sub band Marker displays the operating frequency within a specified frequency range. So, the transceiver always displays the Main or Sub band marker in the Scope screen.

In the Center mode, the operating frequency stays in the center of the screen. Thus, the transceiver does not display either the Main band marker on the Main scope, or the Sub band marker on the Sub scope.

① When the Hold function is ON, the RX Marker is displayed to indicate the operating frequency's location.

◇ Mini scope screen

The Mini scope screen can be simultaneously displayed with another function displays, such as the RTTY DECODE screen and the AUDIO SCOPE screen or the FUNCTION screen.

Push **[M.SCOPE]** to turn the Mini scope screen ON or OFF.

① Hold down **[M.SCOPE]** for 1 second to display the SPECTRUM SCOPE screen.




Example: Displaying the Mini scope screen while the ANTENNA screen is displayed.

Audio scope screen

This audio scope enables you to display the received signal's frequency component on the FFT scope, and its waveform components on the Oscilloscope. The FFT scope also has a waterfall.

• AUDIO SCOPE screen

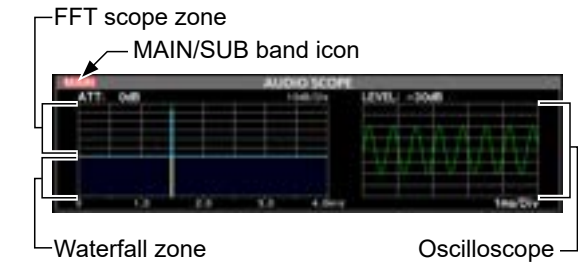

FFT scope zone

MAIN/SUB band icon


Waterfall zone

Oscilloscope

◇ Using the Audio Scope

Display the AUDIO SCOPE screen.

[MENU] » **AUDIO**

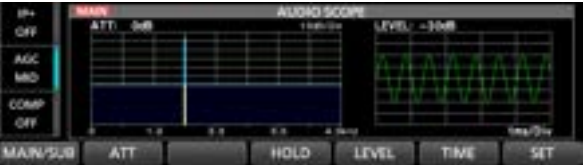

Key	Action	
MAIN/SUB	Selects the Main or Sub band.	
ATT	Touch	Selects the attenuator for the FFT scope. • 0 (OFF), 10, 20, or 30 dB
	Touch for 1 second	Turns OFF the attenuator. (0 dB)
HOLD	Turns the Hold function ON or OFF. • [HOLD] is displayed and freezes the current audio spectrum.	
LEVEL	Selects the Oscilloscope level. • 0, -10, -20, or -30 dB	
TIME	Selects the Oscilloscope sweep time. • 1, 3, 10, 30, 100, or 300 ms/Div	
SET	Displays the AUDIO SCOPE SET screen. ① See the Advanced manual for details.	

The SD cards, SDHC cards, and USB flash drive are user supplied.

TIP: Icom recommends that you save the transceiver's factory default data for backup.

About the SD cards

You can use an SD card of up to 2 GB, or an SDHC of up to 32 GB. Icom has checked the compatibility of the following cards.

(As of October 2024)

Brand	Type	Memory size
SanDisk®	SD	2 GB
	SDHC	4/8/16/32 GB

- ① The above list does not guarantee the card's performance.
- ① Throughout the rest of this document, the SD cards and SDHC cards are simply called the SD card or the card.

About the USB flash drive

Use the USB flash drive that supports the interface 1.1 or 2.0.

- ① These do not guarantee the USB flash drive's performance.
- ① Throughout the rest of this document, the USB flash drives are called the USB flash drive or the flash drive.

NOTE:

- Before using the SD card or USB flash drive, thoroughly read their instructions.
- If any of the following occur, the card's or flash drive's data may be corrupted or deleted.
 - You remove the card or flash drive from the transceiver while it is still accessing the card.
 - A power failure occurs, or the power cable is disconnected, while accessing the card.
 - You drop, impact, or vibrate the card or flash drive.
- **DO NOT** touch the contacts of the card or flash drive.
- The transceiver may take a longer time to recognize a high capacity card or flash drive.
- The card or flash drive has a certain lifetime, so data reading or writing may not be possible after using it for a long period of time. In that case, use a new one. We recommend you to make a backup of the data onto another device.
- Icom will not be responsible for any damage caused by data corruption on a card or flash drive.
- If you transfer or dispose of your SD card or USB flash drive, avoid leaking its data.

Saving data

You can save the following data onto the card or USB flash drive.

SD Card

- The transceiver's settings
- Communication/receive log and contents
- Voice audio for the Voice TX function
- RTTY and PSK decode log
- Captured screens



USB flash drive

- The transceiver's settings
- Captured screens

Inserting

Insert the SD card or USB flash drive as shown below.

- ① Insert the SD card into the slot until it locks in place, and makes a 'click' sound.
- ① Be sure to check the card or flash drive orientation before inserting.

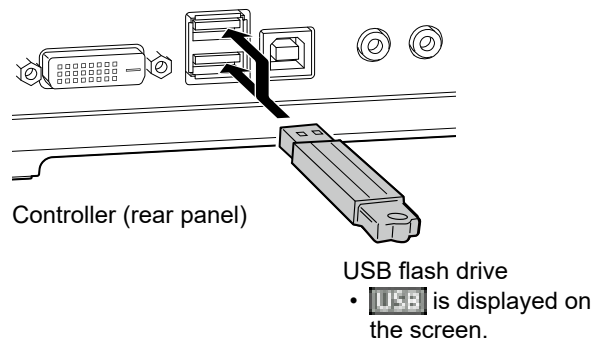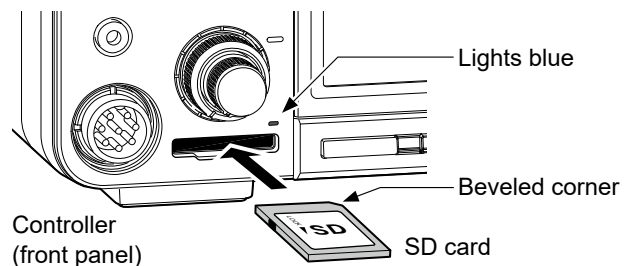

NOTE:

Before using an SD card or USB flash drive for the first time, format it in the transceiver.

- Formatting a card or flash drive erases all its data. Before formatting any used card or flash drive, back up its data onto another device.
- After inserting or formatting, a special folder on the card or flash drive that you need for operations like updating the firmware is created on the card or flash drive.

IMPORTANT: Even if you have formatted an SD card or flash drive, some data may remain in it. When you dispose the card or flash drive, be sure to physically destroy it to avoid unauthorized access to any data that remains.

Formatting

Before using an SD card or USB flash drive, format it to be used with the transceiver by doing the following steps.

1. Open the SD CARD or USB FLASH DRIVE screen.


MENU » **SET > SD Card**

MENU » **SET > USB Flash Drive**

2. Touch "Format." (Example: SD CARD)



3. Touch [YES] to start formatting.

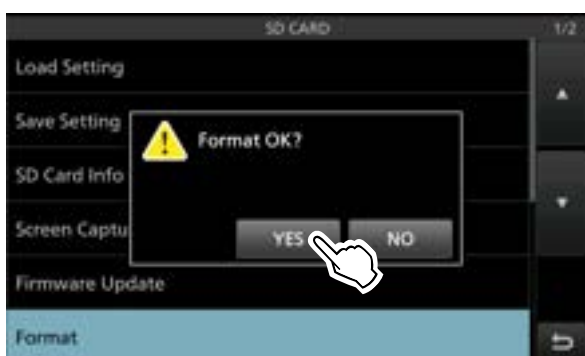

- After formatting, returns to the SD CARD or USB FLASH DRIVE screen.

① To cancel formatting, touch [NO].

4. To close the SD CARD or USB FLASH DRIVE screen, push **EXIT** several times.

Unmounting

Before you remove a card when the transceiver is ON, be sure to electrically unmount it, as shown below. Otherwise, the data may be corrupted or deleted.

1. Open the SD CARD or USB FLASH DRIVE screen.


MENU » **SET > SD Card**

MENU » **SET > USB Flash Drive**

2. Touch "Unmount." (Example: SD CARD)



3. Touch [YES] to unmount.


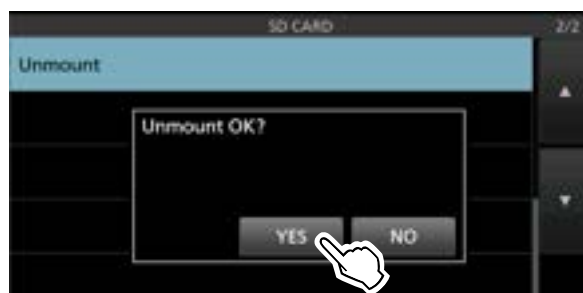


- After unmounting, returns to the SD CARD or USB FLASH DRIVE screen.

① To cancel unmounting, touch [NO].

4. Remove the card from the controller.

- Push in the card until a 'click' sounds to unlock the card, and then pull it out.

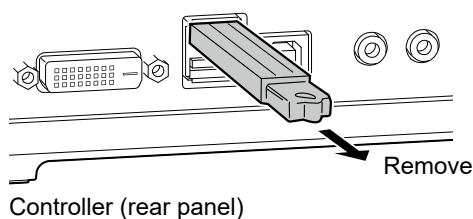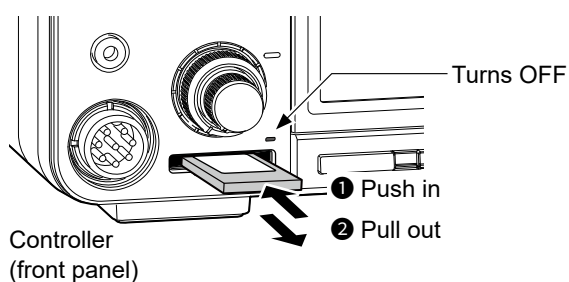

5. To close the SD CARD or USB FLASH DRIVE screen, push **EXIT** several times.

When the transceiver is OFF

You can remove the card starting from step 4 of the steps described above.

About the Antenna memory settings


This function saves antenna connector settings for each frequency band. You can set antenna connectors ANT1 ~ ANT4, ANT1/R ~ ANT4/R, or ANT1  ~ ANT4  to selected bands.

① ANT1 is set to all frequency bands as the default.

◆ The Antenna memory screen

The Antenna memories are set on the ANTENNA screen.

MENU » **ANTENNA**

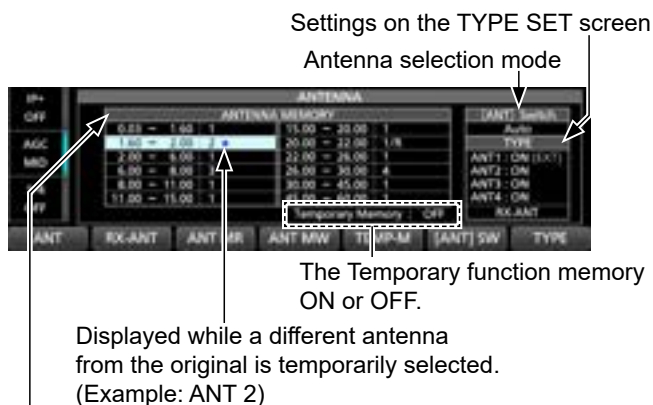

An example of antenna connector settings for each frequency band.

Key	Action
ANT	Selects [ANT1] ~ [ANT4]. • “★” is displayed if you temporarily select an antenna that is different from the one that is saved in the memory.
RX-ANT	Selects [ANT1/R] ~ [ANT4/R]. ① This key is displayed when “RX-ANT Connectors” is set to “Connect Receive Antenna” on the TYPE SET screen.
RX-I/O	Selects [ANT1 ] ~ [ANT4 ]. ① This key is displayed when “RX-ANT Connectors” is set to “Connect External RX Device” on the TYPE SET screen.
ANT MR	Recalls the originally saved antenna setting in the memory. ① This key can be used when [[ANT] SW] is set to “Auto.”
ANT MW	Touch for 1 second Saves the current antenna connector setting in the antenna memory.
TEMP-M	Turns the Temporary memory function ON or OFF. ① This function temporarily memorizes the antenna that is manually selected.
[ANT] SW	Sets the Antenna selection mode to “Auto,” “Manual,” or “OFF.” • Auto: Uses the Antenna memory. • Manual: Selects each antenna connector according to the saved settings.
TYPE	Displays the TYPE SET screen.

TIP:

- You cannot select an antenna connector that is turned OFF on the TYPE SET screen by touching [ANT].
- When in the Transverter operation, you cannot use the [ANT], [RX-ANT], and [RX-I/O] keys.

◆ Saving an antenna connector setting

Example: Assigning ANT2 to the 10 MHz band.

- Open the ANTENNA screen.

MENU » **ANTENNA**

- Select the 10 MHz band.



- Touch [ANT] and select “2 (ANT2).”

“2 ★” is displayed.



- You can recall the originally saved antenna setting (Example: ANT1), touch [ANT MR].

- Touch [ANT MW] for 1 second to save “2 (ANT2)” to the 10 MHz band.
• “★” disappears.



- To close the ANTENNA screen after saving, push **EXIT**.

NOTE: Before transmitting with a selected antenna, be sure that the selected antenna suits the operating frequency by using the antenna tuner (p. X-X). Otherwise the transceiver may be damaged.

About the Antenna memory settings


◇ Setting the antenna type

On this screen, you can set the type of antenna to use.

1. Open the ANTENNA screen.
MENU » **ANTENNA**
2. Touch [TYPE].
 • The TYPE SET screen is displayed.
3. Touch "RX-ANT Connectors."



4. Select an option.
 (Example: Connect External RX Device)

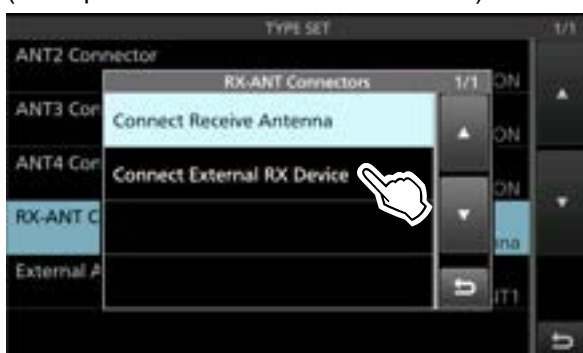

5. To close the TYPE SET screen, push **EXIT** several times.

ANT2 Connector (Default: ON)
ANT3 Connector (Default: ON)
ANT4 Connector (Default: ON)

Selects whether or not to enable use of the antenna connector.

- OFF: You cannot select the antenna connector.
- ON: You can select the antenna connector.

① An external antenna tuner or antenna does not activate if you connect it to the antenna connector that is set to "OFF."

① You cannot set the ANT1 connector to OFF.

RX-ANT Connectors

(Default: Connect Receive Antenna)

Selects a device connected to [RX-ANT IN] and [RX-ANT OUT].

- Connect Receive Antenna:
 Select this option to connect a receive antenna to [RX-ANT IN].
 "R" is displayed next to the antenna number when [RX-ANT] is touched.
- Connect External RX Device:
 Select this option to connect an external receive device, such as a filter or preamplifier to [RX-ANT OUT] and [RX-ANT IN].
 [R] is displayed next to the antenna number when [RX-I/O] is touched.

External Antenna Tuner Connection

(Default: ANT1)

Selects an antenna connector to which the AH-730 optional antenna tuner is connected. The maximum output power from the selected connector is limited to 100 W.

- Set to ANT1, ANT2, ANT3, or ANT4.

NOTE: If you connect the AH-730 to another connector, the maximum 200 W voltage is input to the tuner, and could damage the tuner.

① Confirm the setting again after performing a Partial reset or an All reset.

About the internal antenna tuner

The internal automatic antenna tuner automatically matches the transceiver to the antenna within the range of 16.7 ~ 150 Ω (SWR of less than 1:3).

After the tuner matches an antenna, the latching relay combinations are memorized as a preset point for each frequency range (100 kHz steps). Therefore, when you change the frequency range, the latching relay combinations are automatically preset to the memorized point for fast tuning.

- ① When you install a new antenna, or you want to change the antenna settings, you can clear the all of the internal antenna tuner preset points with the “<<Preset Memory Clear>>” item on the TUNER set screen. (p. X-X)

MENU » **SET > Function > Tuner > <<Preset Memory Clear>>**

NOTE: When the transceiver receives a strong physical shock, the internal latching relays may be returned to an unlatched condition. In that case, push **TUNER** to turn OFF the tuner, then turn it ON again to reset all latching relays.

◇ Using the Internal antenna tuner

1. Push **TUNER** to turn ON the internal antenna tuner.
 - The indicator on **TUNER** lights.
2. Match the antenna.
 - ① To match the antenna, see “Manual tuning” or “PTT Tuner start” below.

◇ Manual tuning

You can manually match the antenna before transmitting for the first time.

1. Hold down **TUNER** for 1 second to start manual tuning.
 - The indicator on **TUNER** blinks red.
 - ① The tuning normally takes 2~3 seconds.
2. After matching, the indicator on **TUNER** lights white, and the internal antenna tuner stays ON.
 - ① If the tuner cannot tune, the indicator on **TUNER** goes out, and the tuning circuit is automatically bypassed.

◇ PTT Tuner start

The tuner is always activated when [PTT] is pushed after the frequency is changed (more than 1% from the last-tuned frequency). This function matches the antenna for the first transmission on a new frequency.

- ① You can turn OFF this function in the “PTT Start” item on the TUNER screen. (p. X-X)

MENU » **SET > Function > Tuner > PTT Start**

NOTE: If the SWR is higher than about 1.5:1 when tuning more than 100 kHz from an antenna's preset point, hold down **TUNER** for 1 second to start manual tuning.

TIP: If the tuner cannot match the antenna

Even if the tuner cannot match the antenna on the first attempt, it may succeed by repeating the tuning several times.

About the external antenna tuner

The optional AH-730 antenna tuner matches the IC-7760 to a long wire antenna more than 7 m/23 ft long (1.8 MHz to 54 MHz).

⚠ DANGER HIGH VOLTAGE! NEVER touch the antenna element while tuning or transmitting. Always install it in a secure place.

NEVER operate the AH-730 without an antenna connected. The tuner and transceiver will be damaged.

◇ Using the AH-730

1. Turn ON the transceiver.
2. Push **TUNER** to start tuning.
 - The tuner reduces the SWR to less than 2:1 after 2~3 seconds.
 - ① While tuning, a side tone is heard and the indicator on **TUNER** blinks red.
 - ① If the tuner cannot reduce the SWR to less than 2:1 after 15 seconds of tuning, the indicator goes out.
3. After matching, the indicator stops blinking and lights white.
 - ① When the long wire antenna cannot be matched, the indicator goes out. In that case, the AH-730 is bypassed and the wire is directly connected.
4. To start manual tuning while the indicator lights white, hold down **TUNER** for 1 second.
5. To turn OFF (bypassed) the AH-730, push **TUNER**.

NOTE: When the wire antenna cannot be matched, check the wire length and connection. Note that the AH-730 cannot match a wire that is a $\frac{1}{2}\lambda$ long or on a multiple of that frequency.

◇ Using the IC-PW2

When you use the internal antenna tuner of the IC-PW2, be sure to turn OFF the IC-7760's internal antenna tuner before connecting it.

To tune at the desired operating frequency, do manual tuning on the IC-PW2.

- With the linked manual tuning function, the IC-7760 automatically starts transmitting at the same time.
- ① While tuning, you can select the displayed meter.
- ① To cancel the tuning, push **TUNER** on the IC-7760.
- ① See the IC-PW2 instruction manual for details.

◇ Using an external antenna tuner

When you use a non-Icom external antenna tuner, be sure to turn OFF the internal antenna tuner before connecting it.

Otherwise, the tuning may fail because both antenna tuners (internal and external) will simultaneously start tuning.

See the antenna tuner's instruction manual for details.


NOTE: Be sure not to connect the antenna tuner without an antenna connected. This could damage the transceiver or external antenna tuner.

TIP: If the SWR is not reduced to 2:1 after retuning, see "If the tuner cannot match the antenna" for details. (p. X-X)

Set mode description

You can use the Set mode to set infrequently changed values or function settings.


1. Push **MENU**.

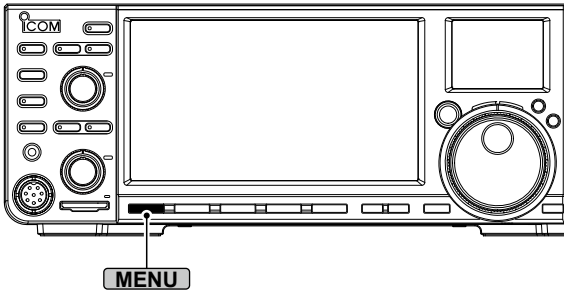


2. Touch [SET].



3. Touch the category that you want to select.

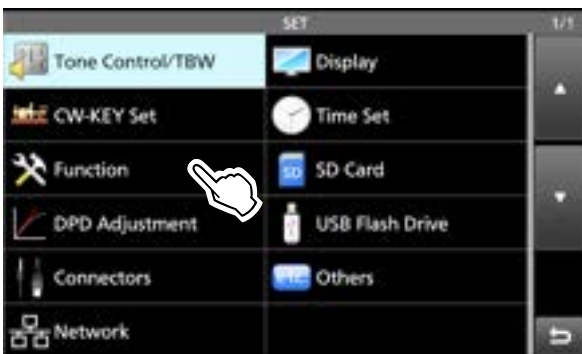


4. Touch [▲] or [▼] to scroll through the items.

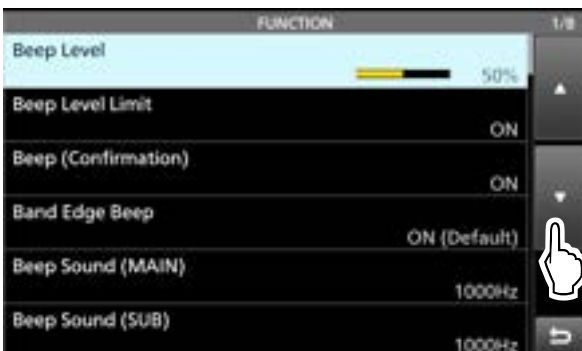

- ① You can also rotate **ⓂMULTI** to scroll through the items.

TIP: The Set mode is constructed in a tree structure. You can go to the next tree level, or go back a level, depending on the selected item.

5. Touch the item to open its setting screen, or to open its next tree level.

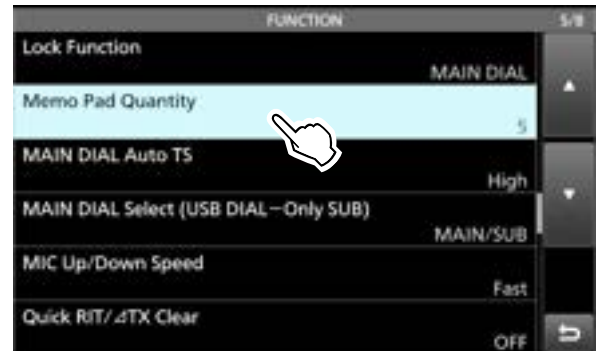

- ① Repeat steps 4 and 5 to open the desired item's setting screen.

- ① To go back a tree level, push **EXIT**.

6. Touch to select or to set the option.



- The selected option is saved, and returns to the previous screen.

7. To close the SET screen, push **EXIT** several times.

TIP: Resetting to the default setting

1. Push **QUICK** to display the QUICK MENU screen.
2. Touch "Default" to reset to the default setting.



- ① To close the QUICK MENU screen, push **EXIT**.

NOTE: The default settings shown below are for the USA transceiver version. The default settings may differ, depending on your transceiver version.

Tone Control/TBW

MENU » **SET > Tone Control/TBW > RX**

SSB, AM, FM, CW, RTTY, PSK

RX HPF/LPF (Default: -----)

SSB, AM, FM

RX Bass (Default: 0)

RX Treble (Default: 0)

MENU » **SET > Tone Control/TBW > TX**

SSB, AM, FM

TX Bass (Default: 0)

TX Treble (Default: 0)

SSB

TBW (WIDE) (Default: 100 – 2900)

TBW (MID) (Default: 300 – 2700)

TBW (NAR) (Default: 500 – 2500)

SSB-D

TBW (Default: 300 – 2700)

CW-KEY Set

MENU » **SET > CW-KEY Set**

Side Tone Level (Default: 50%)

Side Tone Level Limit (Default: ON)

Keyer Repeat Time (Default: 2sec)

Dot/Dash Ratio (Default: 1:1:3.0)

Rise Time (Default: 4ms)

Paddle Polarity (Default: Normal)

Key Type (Default: Paddle)

MIC Up/Down Keyer (Default: OFF)

Function

MENU » **SET > Function**

Beep Level (Default: 50%)

Beep Level Limit (Default: ON)

Beep (Confirmation) (Default: ON)

Band Edge Beep (Default: ON (Default))

Beep Sound (MAIN) (Default: 1000Hz)

Beep Sound (SUB) (Default: 1000Hz)

Speaker MAIN/SUB Mix (Default: OFF)

RF/SQL Control (Default: RF+SQL)

Cancel CI-V Remote Set Levels
(Default: All Volume Levels)

MENU » **SET > Function > TX Power Limit**

1.8M (Default: 200W (AM: 50W))

1.8M (DATA) (Default: 200W (AM: 50W))

3.5M (Default: 200W (AM: 50W))

3.5M (DATA) (Default: 200W (AM: 50W))

5M (Default: 200W (AM: 50W))

5M (DATA) (Default: 200W (AM: 50W))

7M (Default: 200W (AM: 50W))

7M (DATA) (Default: 200W (AM: 50W))

10M (Default: 200W (AM: 50W))

10M (DATA) (Default: 200W (AM: 50W))

14M (Default: 200W (AM: 50W))

14M (DATA) (Default: 200W (AM: 50W))

18M (Default: 200W (AM: 50W))

18M (DATA) (Default: 200W (AM: 50W))

21M (Default: 200W (AM: 50W))

21M (DATA) (Default: 200W (AM: 50W))

24M (Default: 200W (AM: 50W))

24M (DATA) (Default: 200W (AM: 50W))

28M (Default: 200W (AM: 50W))

28M (DATA) (Default: 200W (AM: 50W))

50M (Default: 200W (AM: 50W))

50M (DATA) (Default: 200W (AM: 50W))

MENU » **SET > Function > TX Delay**

HF (Default: OFF)

50M (Default: OFF)

MENU » **SET > Function**

Time-Out Timer (CI-V) (Default: OFF)

Quick Dualwatch (Default: ON)

MENU » **SET > Function > SPLIT****Quick SPLIT** (Default: ON)**Display Keypad on Quick SPLIT** (Default: OFF)**FM SPLIT Offset (HF)** (Default: -0.100 MHz)**FM SPLIT Offset (50M)** (Default: -0.500 MHz)**SPLIT LOCK** (Default: OFF)**MENU** » **SET > Function > Tuner****PTT Start** (Default: OFF)

<<Preset Memory Clear>>

MENU » **SET > Function****Transverter Function** (Default: Auto)**Transverter Offset** (Default: 16.000 MHz)**IC-PW2 Dual Connection Mode** (Default: OFF)**RTTY Mark Frequency** (Default: 2125)**RTTY Shift Width** (Default: 170)**RTTY Keying Polarity** (Default: Normal)**PSK Tone Frequency** (Default: 1500)**MENU** » **SET > Function > SPEECH****SPEECH Language** (Default: English)**SPEECH Speed** (Default: Fast)**S-Level SPEECH** (Default: ON)**MODE SPEECH** (Default: OFF)**SPEECH Level** (Default: 50%)**MENU** » **SET > Function****[SPEECH/LOCK] Switch** (Default: SPEECH/LOCK)**Lock Function** (Default: MAIN DIAL)**Memo Pad Quantity** (Default: 5)**MAIN DIAL Auto TS** (Default: High)**MAIN DIAL Select (USB DIAL - SUB Only)**

(Default: MAIN/SUB)

MIC Up/Down Speed (Default: Fast)**Quick RIT/ΔTX Clear** (Default: OFF)**[NOTCH] Switch (SSB)** (Default: Auto/Manual)**[NOTCH] Switch (AM)** (Default: Auto/Manual)**FILTER Screen MAIN/SUB Select**

(Default: Auto (by FILTER, PBT Operation))

SSB/CW Synchronous Tuning (Default: OFF)**CW Normal Side** (Default: LSB)**MENU** » **SET > Function > Front Key Customize****[VOX/BK-IN]** (Default: VOX/BK-IN)**[AUTOTUNE]** (Default: AUTOTUNE)**MENU** » **SET > Function > MIC Key Customize****[UP]** (Default: UP (VFO: kHz))**[DN]** (Default: DOWN (VFO: kHz))**MENU** » **SET > Function****Screen Keyboard Type** (Default: Full Keyboard)**Screen Full Keyboard Layout** (Default: English)**Screen Capture [POWER] Switch** (Default: OFF)**Screen Capture Keyboard [Print Screen]**

(Default: OFF)

Screen Capture Storage Media (Default: SD Card)**Screen Capture File Type** (Default: PNG)**Calibration Marker** (Default: OFF)**REF Adjust****NOTE:** The default setting of "REF Adjust" may differ slightly, depending on the transceiver's version.

DPD Adjustment

MENU » SET > DPD Adjustment

IC-7760 Single Adjustment

IC-PW2 Linked Adjustment (200V)

IC-PW2 Linked Adjustment (100V)

Connectors

MENU » SET > Connectors > Phones

Level (Default: 0)

L/R Mix (Default: ON)

L/R Mix Level (Default: 70%)

MENU » SET > Connectors > USB AF/IF Output

Output Select (Default: AF)

AF/IF XFC Output (SPLIT ON) (Default: SUB)

AF Output Level (Default: 50%)

AF SQL (Default: OFF (Open))

AF Beep/Speech... Output (Default: OFF)

IF Output Level (Default: 50%)

MENU » SET > Connectors > LINE-OUT AF/IF Output

AF Output Select (Default: MAIN)

Output Select (Default: AF)

AF/IF XFC Output (SPLIT ON) (Default: MAIN)

AF Output Level (Default: 50%)

AF SQL (Default: OFF (Open))

AF Beep/Speech... Output (Default: OFF)

IF Output Level (Default: 50%)

MENU » SET > Connectors > ACC AF/IF Output

AF/SQL Output Select (Default: MAIN)

Output Select (Default: AF)

AF/IF XFC Output (SPLIT ON) (Default: MAIN)

AF Output Level (Default: 50%)

AF SQL (Default: OFF (Open))

AF Beep/Speech... Output (Default: OFF)

IF Output Level (Default: 50%)

MENU » SET > Connectors > LAN AF/IF Output

Output Select (Default: AF)

AF SQL (Default: ON)

MENU » SET > Connectors > MOD Input

USB MOD Level (Default: 50%)

LINE-IN MOD Level (Default: 50%)

ACC MOD Level (Default: 50%)

LAN MOD Level (Default: 50%)

DATA OFF MOD (Default: MIC,USB,ACC)

DATA1 MOD (Default: USB)

DATA2 MOD (Default: LINE-IN)

DATA3 MOD (Default: ACC)

MENU » SET > Connectors > USB SEND/Keying

USB SEND (Default: OFF)

USB Keying (CW) (Default: OFF)

USB Keying (RTTY) (Default: OFF)

MENU » SET > Connectors > External Keypad

VOICE (Default: OFF)

KEYER (Default: OFF)

RTTY (Default: OFF)

PSK (Default: OFF)

MENU » SET > Connectors > Keyboard/Mouse

Keyboard [F1]-[F8] (VOICE) (Default: OFF)

Keyboard [F1]-[F8] (KEYER) (Default: OFF)

Keyboard Type (Default: English)

8 SET MODE

Keyboard Repeat Delay (Default: 250ms)

Keyboard Repeat Rate (Default: 10.9cps)

Mouse Pointer Speed (Default: MID)

Mouse Pointer Acceleration (Default: ON)

MENU » **SET > Connectors > USB DIAL**

USB DIAL Select (Default: Only SUB)

USB DIAL Auto TS (Default: High)

USB DIAL [TRANSMIT] Switch
(Default: Push to toggle)

MENU » **SET > Connectors > CI-V**

CI-V Baud Rate (Default: Auto)

CI-V Address (Default: B2h)

CI-V Transceive (Default: ON)

CI-V USB/LAN→REMOTE Transceive Address
(Default: 00h)

CI-V Output (for ANT) (Default: OFF)

CI-V USB (A) Echo Back (Default: OFF)

CI-V USB (B) Echo Back (Default: OFF)

MENU » **SET > Connectors**

USB (B) Function (Default: RTTY/PSK Decode)

SEND Relay Type (Default: MOS-FET)

ACC BAND Voltage Output (Default: TX)

MIC Input DC Bias (Default: ON)

PTT Port Function (Default: PTT Input)

REF IN (Default: OFF)

Network

* This setting is valid after restarting the transceiver.

MENU » SET > Network

DHCP* (Default: ON)

IP Address (LAN)* (Default: 192.168.0.10)

IP Address (Controller)* (Default: 192.168.0.11)

IP Address (RF Deck)* (Default: 192.168.0.12)

Subnet Mask* (Default: 255.255.255.0(24 bit))

Default Gateway* (Default:)

Primary DNS Server* (Default:)

Secondary DNS Server* (Default:)

Audio Buffer Size (via LAN)* (Default: Mid)

Connection from Different Segment* (Default: OFF)

MENU » SET > Network > Different Segment Settings

① Displayed only when “Connection from Different Segment” is set to “ON.”

IP Address (RF Deck)* (Default: 192.168.100.10)

Subnet Mask (RF Deck)* (Default: 255.255.255.0(24 bit))

Default Gateway (RF Deck)* (Default: 192.168.100.1)

Audio Buffer Size* (Default: Mid)

MENU » SET > Network

Network Name

MENU » SET > Network > Remote Settings

Network Control* (Default: OFF)

Power OFF Setting (for Remote Control) (Default: Shutdown only)

Control Port (UDP)* (Default: 50001)

Serial Port (UDP)* (Default: 50002)

Audio Port (UDP)* (Default: 50003)

Internet Access Line* (Default: FTTH)

MENU » SET > Network > Remote Settings > Network User1

MENU » SET > Network > Remote Settings > Network User2

Network User1 ID
Network User2 ID

Network User1 Password
Network User2 Password

Network User1 Administrator (Default: NO)
Network User2 Administrator (Default: NO)

MENU » SET > Network > Remote Settings

Network Radio Name (Default: IC-7760)

Display

MENU » **SET > Display**

LCD Backlight (Default: 50%)

LED Bright (Default: 80%)

Display Font (Default: Round)

Meter Response (Standard, Edgewise)
(Default: Mid)

Meter Type (Normal Screen) (Default: Standard)
Meter Type (Expand Screen) (Default: Bar)

Meter Peak Hold (Bar) (Default: ON)

Memory Name (Default: ON)

MENU » **SET > Display > Filter Effect Screen**

Waveform Type (Default: Fill)

Waveform Color (Default: (R) 51 (G) 153 (B) 255)

MENU » **SET > Display**

Screen Saver (Default: 60min)

External Display (Default: OFF)

External Display Resolution (Default: 800x480)

Opening Message (Default: ON)

My Call

Display Language (Default: English)

Time Set

MENU » **SET > Time Set > Date/Time**

Date

Time

<<NTP TIME SYNC>>

NTP Function (Default: ON)

NTP Server Address (Default: time.nist.gov)

MENU » **SET > Time Set**

UTC Offset (Default: ±0:00)

CLOCK2 Function (Default: ON)

CLOCK2 UTC Offset (Default: ±0:00)

CLOCK2 Name (Default: UTC)

SD Card

MENU » SET > SD Card

- Load Setting
- Save Setting
- SD Card Info
- Screen Capture View
- Firmware Update
- Format
- Unmount

USB Flash Drive

MENU » SET > USB Flash Drive

- Load Setting
- Save Setting
- USB Flash Drive Info
- Screen Capture View
- Firmware Update
- Format
- Unmount

Others

MENU » SET > Others > Information

- Version
- MAC Address (LAN)
- MAC Address (Controller)
- MAC Address (RF Deck)
- SERIAL NO. (Controller)
- SERIAL NO. (RF Deck)

MENU » SET > Others

- Touch Screen Calibration
- MENU » SET > Others > Reset
- Partial Reset
- All Reset

Setting the date and time

◇ Setting the date

1. Open the "Date" screen.

MENU » **SET > Time Set > Date/Time > Date**

2. Touch [+] or [-] to set the date.
3. Touch [SET] to save the date.



- Returns to the previous screen.

① To cancel the editing, touch **ESC**.

4. To close the DATE/TIME screen, push **EXIT** several times.

◇ Setting the current time

1. Open the "Time" screen.

MENU » **SET > Time Set > Date/Time > Time**

2. Touch [+] or [-] to set the current time.
3. Touch [SET] to save the time.



- Returns to the previous screen.

① To cancel the editing, touch **ESC**.

4. To close the DATE/TIME screen, push **EXIT** several times.

NOTE: The backup battery for the internal clock

The IC-7760 has a lithium backup battery (CR2032) for the internal clock and timer functions.

When the backup battery is exhausted, the transceiver normally works but cannot retain the current time.

See page X-X for the battery replacement.

◇ Setting the UTC offset

1. Open the "UTC Offset" screen.

MENU » **SET > Time Set > UTC Offset**

2. Touch [+] or [-] to set the UTC offset.
3. Touch **ESC** to save the UTC offset.



- Returns to the previous screen.

4. To close the TIME SET screen, push **EXIT** several times.

TIP: UTC time is displayed under the current time display on the operating screen, only when "CLOCK2 Function" is set to "ON" (default).

◇ Displaying CLOCK2

You can display a different time, such as UTC, or other location. This is convenient when you make QSOs with non-local-time stations.

Set the CLOCK2 function ON to display the time on the operating screen. (Default: ON)

1. Open the "CLOCK2 Function" screen.

MENU » **SET > Time Set > CLOCK2 Function**

2. Touch ON or OFF.
 - ON: CLOCK2's time is displayed under the current time.
 - OFF: CLOCK2's time is not displayed.



- Returns to the previous screen.

Setting the date and time

◇ Setting the CLOCK2 UTC offset

Set the time offset for CLOCK2 to the same as the current time.

1. Open the "CLOCK2 UTC Offset" screen.
MENU » **SET > Time Set > CLOCK2 UTC Offset**

2. Touch [+] or [-] to set the UTC offset.
3. Touch **ENT** to save the UTC offset.




- Returns to the previous screen.
4. To close the TIME SET screen, push **EXIT** several times.

◇ Editing the CLOCK2 name

You can edit CLOCK2's 3 character name. The default name is "UTC."

1. Open the "CLOCK2 Name" screen.
MENU » **SET > Time Set > CLOCK2 Name**

2. Touch [CLR] several times to clear the default name, and then enter the name.
3. Touch [ENT] to set the name.

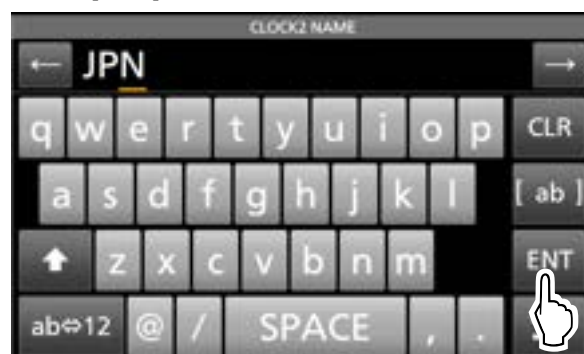

- Returns to the previous screen.
4. To close the TIME SET screen, push **EXIT** several times.

TIP: CLOCK2's time and name are displayed under the current time, only when "CLOCK2 Function" is set to "ON" (default).

Cleaning



DO NOT use harsh solvents such as benzine or alcohol when cleaning, because they will damage the transceiver surfaces.



If the transceiver becomes dusty or dirty, wipe it clean with a dry, soft cloth.

Resetting

Occasionally, erroneous information may be displayed. This may be caused by static electricity or by other factors. If this problem occurs, turn OFF the transceiver. After waiting a few seconds, turn ON the transceiver again.

If the problem still exists, perform a **Partial reset**, as described to the right.

If the problem still exists after a Partial reset, perform an **All reset**, also described to the right.

NOTE: An All reset clears all data and returns all settings to their factory defaults. Save memory channel content, setting status, and so on, onto an SD card or USB flash drive before an All reset. (p. X-X)

After performing a Partial reset

A Partial reset resets operating settings to their default values (VFO frequency, VFO settings, menu contents) without clearing the items listed below:

- Pairing information of the controller and RF deck
- Memory channel/Keyer memory/RTTY memory/PSK memory/Preset memory contents
- Network settings
- REF Adjust
- MY Call
- User Band Edges
- Fixed Edges

After performing an All reset

An All reset clears all data and returns all settings to their factory defaults. Memory channel contents, filter settings, and so on will all be cleared, so you will need to directly connect the controller and the RF deck with a supplied control cable to pair them, and then rewrite your operating settings unless you have a backup.

① The internal antenna tuner preset points are not cleared.

You can clear them in the following item.

MENU » **SET > Function > Tuner > <<Preset Memory Clear>>**

When you cannot enter the Set mode

If a touch screen operation error or an unexpected operation occurs, you cannot enter the Set mode. In this case, perform an All reset, as described below:

1. Turn OFF the transceiver.
 2. While holding down **(SUB DISP)** and **(MPAD)**, push **(POWER)**.
- ① If you cannot turn the transceiver ON or OFF by using **(POWER)**, perform an All reset by connecting an external power source while holding down **(SUB DISP)** and **(MPAD)**.

◇ Partial reset

1. Open the RESET screen.

MENU » **SET > Others > Reset**

2. Touch “Partial Reset.”



3. Touch [YES].



① After resetting, the default VFO mode screen is displayed.

◇ All reset

1. Open the RESET screen.

MENU » **SET > Others > Reset**

2. Touch “All Reset.”



3. Touch [NEXT].



4. After carefully reading the displayed message, touch [YES] to perform the All reset.



① After resetting, the default VFO mode screen is displayed.

Troubleshooting

The following chart is designed to help you solve problems that are not equipment malfunctions.

If you are unable to locate the cause of a problem or solve it through the use of this chart, contact your nearest Icom Dealer or Service Center.

① “AM” indicates the PDF type Advanced manual.

Problem	Possible cause	Solution	REF.
The RF deck's power does not turn ON. (The indicator on the front panel does not light.)	The power cable is not properly connected.	Properly reconnect the power cable.	p. X-X
	The internal power supply is turned OFF.	Turn ON by pushing [I/O] on the rear panel.	p. X-X
The controller's power does not turn ON when POWER is pushed.	The power cable is not properly connected.	Properly reconnect the power cable.	p. X-X
The RF deck's [POWER] indicator lights orange, but does not change to blue.	The controller and RF deck are not paired.	First, connect the controller's [RF DECK] and RF deck's [CONTROLLER] with the supplied control cable.	
	The controller's [RF DECK] and RF deck's [LAN] are connected with the supplied control cable.		
	The controller's power is turned OFF.	Turn ON the controller.	
The controller and RF deck cannot be paired.	A user supplied cable is used to connect.	Connect with the supplied control cable.	
	The controller's [RF DECK] and RF deck's [LAN] are connected with the supplied control cable.	Connect the controller's [RF DECK] and RF deck's [CONTROLLER] with the supplied control cable.	
After turning ON the controller, "The RF deck is not detected." is displayed and RFX blinks.	The controller and RF deck are not paired because of the first time using, or performing an All reset.	Pair the controller and RF deck.	
No sound is heard from the speaker.	The audio level is too low.	Rotate (AF→RF/SQL) (inner) clockwise to obtain a suitable listening level.	p. X-X
	The squelch is closed.	Rotate (AF→RF/SQL) (outer) to the 12 o'clock position to open the squelch.	p. X-X
	If no sound is heard only from the Sub band, the Dualwatch function is OFF.	Turn ON the Dualwatch function.	p. X-X
	Headphones are connected.	Disconnect the headphones.	—
	A monaural plug is connected to [EXT-KEYPAD].	Disconnected the plug, or use a stereo plug.	—
	The Mute function is ON.	Push (AF→RF/SQL) to turn OFF the Mute function on whichever band is selected (Main or Sub).	p. X-X
Sensitivity is too low, and only strong signals are heard.	The Attenuator is activated.	Turn OFF the Attenuator.	p. X-X
	RF gain control is set too low. ("RFG" is displayed.)	Set the RF gain higher until "RFG" just goes off.	p. X-X
	The squelch is closed.	Rotate (AF→RF/SQL) (outer) to the 12 o'clock position to open the squelch.	p. X-X
	The antenna is defective, or the coaxial cable is defective.	Repair the problem and then reconnect the antenna.	—
	You are using an antenna that is not suitable for the band you have selected.	Connect an antenna suitable for the operating band.	p. 13-5
	An antenna for another band is selected.	Select an antenna suitable for the operating frequency.	
Some antenna connectors cannot be selected.	The antenna connector is set to "OFF" in the ANT2 ~ ANT4 setting.	Set to "ON."	

Troubleshooting

Problem	Possible cause	Solution	REF.
A receive antenna cannot be select.	"RX-ANT Connectors" is set to "Connect External RX Device."	Set to "Connect Receive Antenna" (default).	
The MAIN/SUB indicator blinks blue.	The Tracking function is ON.	Turn OFF the function.	
The transceiver automatically switches to transmit while receiving.	The VOX function is ON.	Push VOX/BK-IN to turn OFF the VOX function.	AM
	The VOX gain is set too high.	Adjust the VOX gain.	
	The transceiver receives the SEND signal from the software on the PC.	Confirm the "USB SEND" setting.	p. X-X
The transceiver cannot switch to transmit.	The operating frequency is outside a ham band.	Set the frequency to a ham band.	p. X-X
	In the CW mode, the Break-in function is turned OFF.	Turn ON the function before starting keying.	p. X-X
No power output or the output power is too low.	The transmit output power is set too low.	Adjust the RF POWER in the Multi-function menu.	p. X-X
	The modulation input signal level is set too low.	Adjust the MIC GAIN level in the Multi-function menu.	p. X-X
	The microphone is bad, or the [MIC] jack is shorted or defective.	Test the microphone and check the [MIC] jack.	p. 13-1
	The antenna SWR is more than 3:1.	Adjust the antenna for an SWR of less than 3:1.	AM
	The antenna is not properly tuned.	Hold down TUNER for 1 second to tune the antenna.	
The transmit signal is unclear or distorted in the SSB mode.	The transceiver's microphone gain is too high.	Adjust the MIC GAIN level so that the meter reading swings between 30 and 50% of the ALC scale.	p. X-X
Under modulation occurs.	In the AM or FM mode, the transceiver's microphone gain is too low.	Adjust the MIC GAIN level in the Multi-function menu.	p. X-X
	In the AM mode, the transceiver's Drive Gain level is too high.	Adjust the Drive Gain level.	AM
The received audio in the SSB mode is unclear or distorted.	The incorrect sideband is selected.	Toggle between USB and LSB.	p. X-X
	The PBT function is activated.	Hold down TWIN PBT CLR for 1 second to clear the PBT settings.	p. X-X
Cannot contact with another station, even if receiving and transmitting seem normal.	The Split function is ON, and the transmit and receive frequencies differ. (SPLIT is displayed.)	Push SPLIT to turn OFF the Split function.	p. X-X
	The RIT or ΔTX function is ON, and the transmit and receive frequencies differ. ("RIT" or "ΔTX" is displayed.)	Push RIT or ΔTX to turn OFF the function.	p. X-X
The frequency is not properly changed by rotating RIT/ΔTX .	The RIT or ΔTX function is OFF.	Push RIT or ΔTX to turn ON the function.	p. X-X
The operating frequency does not change when rotating MAIN DIAL .	The Dial Lock function is ON.	Hold down SPEECH to turn OFF the Dial Lock function.	p. X-X
The display turns OFF.	The Screen Saver function is ON. (The indicator on NR blinks white.)	Operate something (push key, and so on) to reset the screen saver startup time.	p. X-X
A Programmed scan does not start.	The VFO mode is not selected.	Select the VFO mode.	p. X-X
	The same frequencies have been set in the scan edge memory channels P1 and P2.	Set different frequencies in scan edge memory channels P1 and P2.	AM

Troubleshooting

Problem	Possible cause	Solution	REF.
A Memory scan does not start.	The Memory mode is not selected.	Select the Memory mode.	p. X-X
	No, or only 1 memory channel is set.	Set at least 2 memory channels.	AM
A Select memory scan does not start.	No, or only 1 memory channel is assigned as a Select channel.	Assign at least 2 memory channels as Select channels for the scan.	AM
While operating in the Memory mode, you changed the operating frequency, mode, and so on, but a selected memory channel contents are not changed.	They were not overwritten already in the selected memory.	When you want to save the changed settings, touch [MW] for 1 second to write them into the memory channel on the VFO/MEMORY screen.	AM
Cannot hear the speech after pushing SPEECH  .	The speech level is too low.	Adjust "SPEECH Level" in the Speech setting.	p. X-X
"OVF" is displayed.	An excessively strong signal is being received.	Set the RF gain lower. ("RFG" is displayed.)	p. X-X
		Turn ON the Attenuator.	p. X-X
		Turn ON the Digital Selector function.	p. X-X
		Turn OFF the Preamplifier.	p. X-X
The spectrum scope's sensitivity is too low, and no signal or only strong signals are displayed.	The reference level is too low.	Set the reference level to a higher level.	p. X-X
	When the Dualwatch is OFF, the spectrum scope of the Sub band is displayed.	Touch [MAIN/SUB] to display the spectrum scope of the Main band.	p. X-X
Cannot transmit voice memories.	"DATA OFF MOD" is set to "USB," "LINE-IN," "ACC," or "LAN" by control from an external device, and so on.	Set "DATA OFF MOD" to "MIC,USB,ACC" (default).	p. X-X
The antenna SWR is too high.	The antenna is not properly tuned.	Adjust the antenna SWR. The antenna SWR should be less than 3.	
	The coaxial cable is not suitable.	Use a coaxial cable whose characteristic impedance is 50 Ω.	
	An antenna for another band is selected.	Select an antenna suitable for the operating frequency. ① When using an external antenna tuner, set "External Antenna Tuner Connection" to the antenna connector connected to the antenna tuner.	
The indicator on VOX/BK-IN does not light.	Other than "VOX/BK-IN" is assigned to VOX/BK-IN .	Set "[VOX/BK-IN]" to "VOX/BK-IN."	
"No SD Card is found." is displayed.	An SD card is not recognized.	Confirm that an SD card is inserted.	p. X-X
		Reinsert an SD card.	
		Exchange with a new SD card.	
"No USB Flash Drive is found." is displayed.	A USB flash drive is not recognized.	Confirm that a USB flash drive is inserted.	
		Reinsert a USB flash drive.	
		Exchange with a new USB flash drive.	
Cannot save TX/RX histories or sound data.	An SD card is not inserted.	Insert an SD card. ① You cannot save TX/RX histories or sound data onto a USB flash drive.	p. X-X

Troubleshooting

Problem	Possible cause	Solution	REF.
Not the voice memory data, but the Instant Replay memory data is played back.	You push PLAY to play back an audio.	To play back the voice memory data, open the VOICE PLAYER screen.	AM
“– No File –” is displayed on the FIRMWARE UPDATE screen.	The firmware file is in an incorrect folder.	Copy the firmware file into the IC-7760 folder.	AM
	The firmware file name is different.	Download the firmware file again.	
	The SD card or USB flash drive is not formatted.	Format the SD card or USB flash drive.	p. X-X
The touch screen is not working correctly.	The touched point and the detected point may be different.	Calibrate the touch screen on the OTHERS screen.	AM
The current time is reset.	The lithium backup battery in the controller is exhausted.	Replace the lithium backup battery.	AM
Even when turning ON the NTP function, the clock is not automatically set.	The transceiver is not connected to the Internet.	Connect an ethernet cable to the RF deck's [LAN] port.	
		Confirm the network settings.	p. X-X
	The transceiver IP address is incorrect.	Turn ON the DHCP function to automatically get the IP address, or set the correct IP address.	p. X-X
The Timer function does not work.	The Timer function is OFF. (The indicator on TIMER does not light.)	Push TIMER to turn ON the function.	AM
	The Timer settings is not set.	Set the Timer settings.	AM
	“Timer Status” is set to “OFF.”	Set to “ON.”	AM
The Daily Timer function does not work.	The current time is reset.	Set the current time.	
“The IP address settings are incorrect” is displayed, and “Error” is displayed to the left of the IP address setting.	The IP address settings are duplicated.	Set different IP addresses to each IP address setting.	
	The network part of the IP addresses are different between each setting.	Set the same network part to all IP address settings.	
The audio is intermittent.	The controller and RF deck are directly connected with a user supplied cable.	Connect with the supplied control cable.	
	When the controller and RF deck are connected through a network, a network switch or Ethernet cable is not compatible with Gigabit Ethernet.	Use a network switch and Ethernet cable that is compatible with Gigabit Ethernet.	
	When the controller and RF deck are connected through a network, the audio buffer's capacity is not enough.	Change the “Audio Buffer Size (via LAN)” setting. When the controller and RF deck are on different segments, change the “Audio Buffer Size” setting in the “Different Segment Settings” menu.	
	The internal reference frequency has shifted.	Adjust the internal reference frequency.	AM
Another network part cannot be set to “IP Address (RF Deck).”	“Connection from Different Segment” is set to “OFF.”	Set this item to “ON,” and then set the items in the “Different Segment Settings” menu.	AM
The controller and RF deck cannot be connected between different segments.	The network switch settings are incorrect.	Check the network switch settings. ① They cannot be connected through the Internet.	AM
“The connection to the RF deck has been lost” is repeatedly displayed.	–	Contact your nearest Icom Dealer or Service Center.	–

◇ General

- Frequency coverage (unit: MHz):

Receiver	0.030000 ~ 60.000000
Transmitter	0.135700 ~ 0.137800 (Only in the European version)
	1.800000 ~ 1.999999*
	3.500000 ~ 3.999999*
	5.255000 ~ 5.405000 (Only in the USA version)
	7.000000 ~ 7.300000*
	10.100000 ~ 10.150000
	14.000000 ~ 14.350000
	18.068000 ~ 18.168000
	21.000000 ~ 21.450000
	24.890000 ~ 24.990000
	28.000000 ~ 29.700000
	50.000000 ~ 54.000000*

* The frequency coverage and guaranteed ranges differ, according to the transceiver version.
- Operating modes: USB/LSB (J3E), CW (A1A), RTTY (F1B), PSK (G1B), AM (A3E), and FM (F3E)
- Number of memory channels: 101 channels (including 2 scan edges)
- Antenna impedance: 50 Ω unbalanced (When the antenna tuner is OFF)
- Antenna connector: SO-239 (50 Ω) $\times$ 4 (for the HF/50 MHz band)
BNC $\times$ 1 (for the HF/50 MHz band, RX only)
- Power source requirement:

RF deck	90 ~ 264 V AC (50 Hz/60 Hz)
Controller	15.0 V DC $\pm$ 0.75 V (Polarity: $\ominus$ — $\oplus$)
- Operating temperature range: 0°C ~ 50°C, 32°F ~ 122°F
- Frequency stability: $\pm$ 0.5 ppm or less (0°C ~ 50°C, 32°F ~ 122°F)
- Frequency resolution: 1 Hz (minimum)
- Power consumption:

Receive	Standby	150 VA (typical)
	Maximum audio	150 VA (typical)
Transmit	Maximum power	800 VA (maximum)

① Includes the controller (Receive Maximum audio: 3 A (maximum, at 15 V DC))
- Dimensions (projections not included):

RF deck	425 (W) $\times$ 149 (H) $\times$ 442 (D) mm, 16.7 (W) $\times$ 5.9 (H) $\times$ 17.4 (D) in
Controller	340 (W) $\times$ 118 (H) $\times$ 103.5 (D) mm, 13.4 (W) $\times$ 4.6 (H) $\times$ 4.1 (D) in
- Weight (approximate, without the supplied accessories):

RF deck	15.8 kg, 35 lb
Controller	2.3 kg, 5 lb

◇ Transmitter

- Transmit output power:

SSB/CW/FM/RTTY/PSK	1 ~ 200 W
AM	0.25 ~ 50 W
- Modulation system:

SSB	Digital PSN modulation
FM	Digital Reactance modulation
AM	Digital Low power modulation
- Spurious emission:

Unwanted emission	More than 50 dB (HF band)
	More than 66 dB (50 MHz band)
Out-of-band emission	More than 40 dB (HF band)
	More than 60 dB (50 MHz band)
- Carrier suppression: More than 50 dB
- Unwanted sideband suppression: More than 50 dB
- Microphone impedance: 600 Ω

11 SPECIFICATIONS

◇ Receiver

- Receive system: RF Direct Sampling Super Heterodyne
- Intermediate frequency: 1st 12 kHz
- Sensitivity:
 - SSB/CW (BW=2.4 kHz, at 10 dB S/N)
 - 0.100000 ~ 1.799999 MHz –6 dBμV (0.5 μV) typical (P.AMP1 ON)
 - 1.800000~ 29.999999 MHz –16 dBμV (0.16 μV) typical (P.AMP1 ON)
 - 50 MHz band –18 dBμV (0.13 μV) typical (P.AMP2 ON)
 - AM (BW=6 kHz, at 10 dB S/N)
 - 0.100000 ~ 1.799999 MHz +16 dBμV (6.3 μV) typical (P.AMP1 ON)
 - 1.800000~ 29.999999 MHz +6 dBμV (2.0 μV) typical (P.AMP1 ON)
 - 50 MHz band 0 dBμV (1.0 μV) typical (P.AMP2 ON)
 - FM (BW=15 kHz, at 12 dB SINAD)
 - 28.000000 ~ 29.700000 MHz –6 dBμV (0.5 μV) typical (P.AMP1 ON)
 - 50 MHz band –10 dBμV (0.32 μV) typical (P.AMP2 ON)
- Sensitivity for the European version:
 - SSB/CW (BW=2.4 kHz, Filter: SOFT, at 12 dB SINAD)
 - 1.800000 ~ 2.999999 MHz Less than +10 dBμV emf
 - 3.000000~ 29.999999 MHz Less than 0 dBμV emf
 - 50 MHz band Less than –6 dBμV emf
 - AM (BW=4 kHz, 60% Modulation, at 12 dB SINAD)
 - 1.800000 ~ 2.999999 MHz Less than +16 dBμV emf
 - 3.000000~ 29.999999 MHz Less than +6 dBμV emf
 - 50 MHz band Less than 0 dBμV emf
 - FM (BW=7 kHz, 60% Modulation, at 12 dB SINAD)
 - 3.000000~ 29.999999 MHz Less than 0 dBμV emf
 - 50 MHz band Less than –6 dBμV emf
- ① P.AMP1 is ON in the HF band, and P.AMP2 is ON in the 50 MHz band.
- Selectivity (Filter: SHARP):
 - SSB (BW=2.4 kHz)
 - More than 2.4 kHz/–6 dB
 - Less than 3.6 kHz/–60 dB
 - CW (BW=500 Hz)
 - More than 500 Hz/–6 dB
 - Less than 700 Hz/–60 dB
 - RTTY (BW=500 Hz)
 - More than 500 Hz/–6 dB
 - Less than 700 Hz/–60 dB
 - AM (BW=6 kHz)
 - More than 6.0 kHz/–6 dB
 - Less than 15.0 kHz/–60 dB
 - FM (BW=15 kHz)
 - More than 12.0 kHz/–6 dB
 - Less than 20.0 kHz/–60 dB
- Spurious and image rejection:
 - SSB/CW/AM/FM
 - HF band More than 70 dB
 - 50 MHz band More than 70 dB (except for ADC aliasing:
122.880 MHz – RX frequency)
- Audio output power: More than 2.0 W (8 Ω load, 10% distortion)
- AF output impedance: 8 Ω
- RIT variable range: ±9.999 kHz
- ANF attenuation: More than 30 dB (with 1 kHz single tone)
- NR attenuation: More than 6 dB (noise rejection in SSB)

◇ Antenna tuner

- Tunable impedance range: 16.7 ~ 150 Ω (unbalanced) (1:3 VSWR or less)
- Tuning accuracy: 1:1.5 VSWR or less
- Tuning time (approximate):
 - 2 ~ 3 seconds (average)
 - 15 seconds (maximum)

① All stated specifications are typical and subject to change without notice or obligation.

Options

(As of October 2024)

IC-PW2
LINEAR AMPLIFIER



SP-41
EXTERNAL SPEAKER



HM-219
MICROPHONE



SM-30
DESKTOP MICROPHONE



Desktop microphone with a low frequency cut function.

SM-50
DESKTOP MICROPHONE



Dynamic microphone with [UP]/[DOWN] switches.

AH-730
AUTOMATIC ANTENNA TUNER



Set “External Antenna Tuner Connection” to the antenna connector to which the AH-730 is connected.

RC-28
REMOTE ENCODER



For operating the RS-BA1 (version 1.3 or later) or using as a sub dial to operate the transceiver.

SP-33 EXTERNAL SPEAKER

BC-267A/BC-267E POWER ADAPTER
The same as supplied.

RS-BA1 Version 2 IP REMOTE CONTROL SOFTWARE


NOTE: To remotely control transceivers using the RS-BA1 software, **BE SURE** to comply with your local regulations.


13 CONNECTOR INFORMATION

RF Deck

◇ ACC sockets


Connects to devices to control an external unit or to control the transceiver.

ACC 1	Pin No.	Name	Description	Specifications
 8-pin Rear panel view	1	RTTY	Controls RTTY keying.	High level: More than 2.4 V Low level: Less than 0.6 V Output current: Less than 2 mA
	2	GND	Connects to ground. Connected in parallel with ACC 2 pin 2.	
	3	SEND	Input/output pin. Connected in parallel with ACC 2 pin 3. An external unit controls the transceiver. When this pin goes to ground, the transceiver transmits. The pin goes low when the transceiver transmits.	Input voltage (RX): 2.0 ~ 20.0 V Input voltage (TX): -0.5 ~ +0.8 V Current flow: Less than 20 mA Output voltage (TX): Less than 0.1 V Current flow: Less than 200 mA
	4	MOD	Modulator input. Connects to the internal modulator circuit.	Input impedance: 10 kΩ Output level: 100 mV rms*2
	5	AF/IF 12k*3	Fixed AF detector or receive IF (12 kHz) signal output.	Output impedance: 4.7 kΩ Output level: 100 ~ 300 mV rms*4
	6	SQL S	Squelch output. Grounded when the squelch opens.	SQL open: Less than 0.3 V/5 mA SQL closed: More than 6.0 V/100 μA
	7	15 V	15 V output when power is ON. Connected in parallel with ACC 2 pin 7.	Output current: Less than 1A
	8	ALC	ALC voltage input. Connected in parallel with ACC 2 pin 5.	Input impedance: 10 kΩ Input level: -4 ~ 0 V

ACC 2	Pin No.	Name	Description	Specifications
 7-pin Rear panel view	1	8 V	Regulated 8 V output.	Output voltage: 8 V ±0.3 V Output current: Less than 10 mA
	2	GND	Connects to ground. Connected in parallel with ACC 1 pin 2.	
	3	SEND*1	Same as ACC 1 pin 3.	
	4	BAND	Band voltage output. (Varies with the selected amateur band)	Output voltage: 0 ~ 8.0 V
	5	ALC	Same as ACC 1 pin 8.	
	6	TRV	Activates [X-VERTER] input/output when "HIGH" voltage is applied.	Input impedance: More than 10 kΩ Input voltage: 2 ~ 15 V
	7	15 V	Same as ACC 1 pin 7.	

*1 When the SEND terminal controls an inductive load, such as a relay, a counter-electromotive force can malfunction or damage the transceiver. To prevent this, we recommend adding a switching diode, such as a 1SS133, on the load side of the circuit to absorb the counter-electromotive force.
① When the diode is added, a delay in relay switching may occur. Be sure to check its switching action before operating.

Example: ACC 1/2 socket

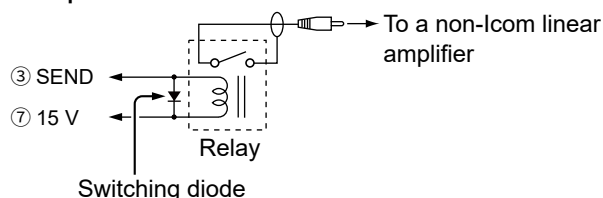

*2 You can change the MOD input level.
① 100 mV rms is at 50% as the default.

MENU » SET > Connectors > MOD Level > **ACC MOD Level**

*3 You can change the AF/IF (IF=12 kHz) settings to output a 12 kHz IF signal. In that case, you can listen to DRM communication with the application software receiver that is installed onto your PC.

MENU » SET > Connectors > ACC AF/IF Output > **Output Select**


*4 You can change the AF/IF (IF=12 kHz) output level.
① Approximately 200 mV rms is at 50% as the default.

MENU » SET > Connectors > **ACC AF/IF Output**

RF Deck

◇ [ANT 1]/[ANT 2]/[ANT 3]/[ANT 4]

Connect an antenna for the HF and 50 MHz bands.

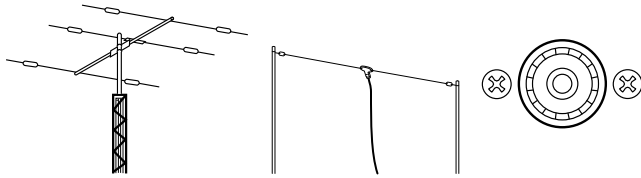


- Input/Output impedance: 50 Ω (unbalanced)
- Connector type: SO-239

① When using an external antenna tuner, set “External Antenna Tuner Connection” to the antenna connector connected to the antenna tuner.

MENU » **ANTENNA > TYPE > External Antenna Tuner Connection**

◇ [X-VERTER]

Outputs HF frequency signals for Transverter operation.



- Input/Output impedance: 50 Ω (unbalanced)
- Output signal level: More than -20 dBm
- Connector type: BNC

① Set the following item to “ON” to use the transverter operating mode.

MENU » **SET > Function > Transverter Function**


- You cannot select the antenna or use the internal antenna tuner while the Transverter function is ON.

① Set the offset frequency for the transverter operation.

MENU » **SET > Function > Transverter Offset**

◇ [REF IN]

Inputs a 10 MHz signal as a reference frequency signal.



- Input frequency: 10 MHz
- Impedance: 50 Ω (unbalanced)
- Input level: -10 dBm (approximate)
- Connector type: BNC

① Select the transceiver’s reference signal source.


MENU » **SET > Connectors > REF IN**

① You can adjust the internal reference frequency.

MENU » **SET > Function > REF Adjust**

◇ [RX-ANT IN]/[RX-ANT OUT]

Connect a receive antenna to [RX-ANT IN], and a receiver to [RX-ANT OUT].

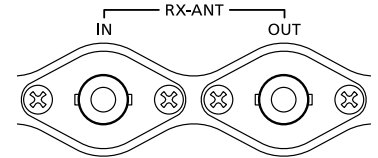


- Input/Output impedance: 50 Ω (unbalanced)
- Connector type: BNC

Signal is directly received through [RX-ANT IN], instead of the antenna connector.

You can also connect an external preamp or filter, as shown below.

① In this case, set the antenna connector to between “ANT 1/R” and “ANT 4/R.” (p. X-X)


Example

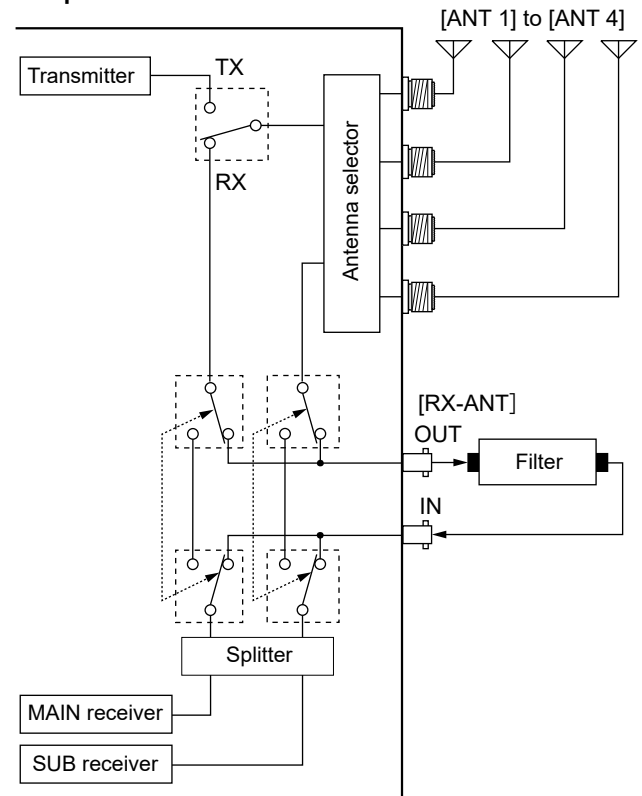

◇ [REMOTE]

Connect to an external equipment for remote control.


3.5 mm (1/8 inch)



RF Deck

◇ [TUNER]

Connects the control cable to an optional AH-730 automatic antenna tuner. (p. X-X)



AH-730 (option)

◇ [CONTROLLER]

Connects to the controller with the supplied control cable.


- ① **DO NOT** connect to 2 or more controllers, or other devices.

About the LED indication

① LINK/ACT

- Lights green when a cable is connected.
- Does not light when a cable is not connected.
- Blinks green while communicating.

- ②
- Lights green when a cable is connected.
 - Does not light when a cable is not connected.



◇ [LAN]

- Connect to the controller through a network.
- Time synchronization by an NTP server.
- Outputting the demodulated AF signal or 12 kHz IF signal.
- Remotely controlling using optional RS-BA1 software.

- ① You can select the output signal from AF and IF signals.

MENU » SET > Connectors > LAN AF/IF Output


About the LED indication

① LINK/ACT

- Lights green when a cable is connected.
- Does not light when a cable is not connected.
- Blinks green while communicating.


② Speed

- Lights green while communicating in 100BASE-TX.
- Does not light while communicating in 10BASE-T/100BASE-T, or when a cable is not connected.



◇ [KEY]


Connect to a straight key or external electronic keyer.

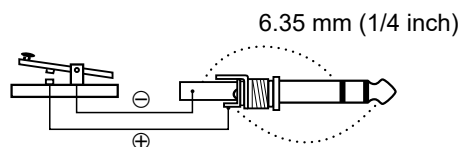

◇ [ALC]

Inputs ALC voltage to the jack when operating with a non-Icom linear amplifier.

- ALC voltage: -4 ~ 0 V




◇ [SEND]

This terminal is used to control an external equipment such as a non-Icom linear amplifier.

The terminal goes low when the transceiver transmits.

- ① The T/R switching relay type can be changed on the following item.

MENU » SET > Connectors > SEND Relay Type



◇ [USB] (for I/Q output)

Use the USB (3.0/3.1/3.2) Type-B port to output the Phase/Quadrature data which is processed by the FPGA.



Connect a PC's USB port, to demodulate the DRM broadcast or Software Defined Radio SDR.

- ① Icom does not provide any support regarding SDR technology and related software, except the inspection for the normality of output signal.

- ① You can download the IQ driver and instruction guide from the Icom website.


<https://www.icomjapan.com/support/>

◇ [AC]

Connect the supplied power cable to an AC receptacle.


- Power source requirement:
90 ~ 264 V AC
(Single-phase, 50 Hz/60 Hz)

- ① When the RF deck is connected to a 180 ~ 264 V AC power source, use a power cable that matches the power source.



Controller

◇ [MIC]

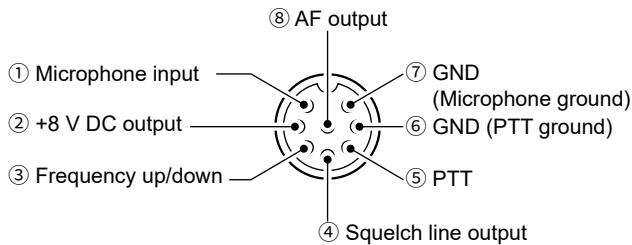

NOTE: Pin 1 outputs 8 V DC power for Icom microphones.

- ① You can turn OFF the DC power when you use non-Icom microphones the following item.

MENU » **SET > Connectors > MIC Input DC Bias**

Pin No.	Description
①	Microphone input
②	+8 V DC output (Maximum 10 mA)
③	Frequency up/down
④	Grounded when squelch opens.
⑤	PTT*
⑥	PTT ground
⑦	Microphone ground
⑧	AF output (varies with the AF control.)

* To output SEND signal from the PTT pin, set "PTT Port Function" to "PTT Input + SEND Output."


By connecting an external keypad to [MIC] with a circuit as shown below, you can send the content from one of 4 memories. You can send the content from a CW Keyer Memory (M1 ~ M4), SSB/AM/FM Voice Memory (T1 ~ T4), RTTY Memory (RT1 ~ RT4), or PSK Memory (PT1 ~ PT4) to be transmitted.

- Push a switch to send the memory content.
- Hold down the switch for 1 second to repeatedly send the memory content.

- ① To use the external keypad, turn ON the following item.

MENU » **SET > Connectors > External Keypad**

- ① The external keypad shown below is not supplied by Icom.

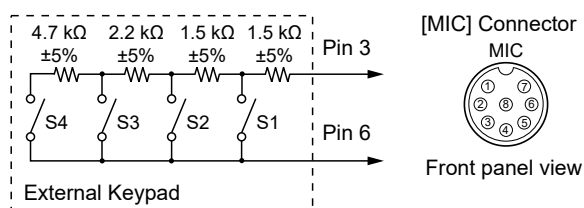


◇ [PHONES]

Connects to standard stereo headphones:

- Output impedance: 8 ~ 16 Ω
- Output level: More than 5 mW (8 Ω load)

3.5 mm (1/8 inch)




- ① While headphones are connected, both the internal and external speakers are deactivated.
- ① If you use headphones with high impedance, the output audio may be too loud.
- ① You can change the output setting in the following item.

MENU » **SET > Connectors > Phones**

◇ [RF DECK]

Connects to the RF deck with the supplied control cable or through a LAN.



About the LED indication

- When connecting to [CONTROLLER] on the RF deck:

① LINK/ACT

- Lights green when a cable is connected.
- Does not light when a cable is not connected.
- Blinks green while communicating.

②

- Lights green when a cable is connected.
- Does not light when a cable is not connected.

- When connecting to a network:

① LINK/ACT

- Lights green when a cable is connected.
- Does not light when a cable is not connected.
- Blinks green while communicating.


② Speed

- Lights green while communicating in 100BASE-TX.
- Does not light while communicating in 10BASE-T/100BASE-T, or when a cable is not connected.

◇ [EXT-DISPLAY]

Connects to an external display monitor.

Outputs the digital RGB signal.



- ① Set the external display settings in the following item.

MENU » **SET > Display > External Display**

Controller

◇ [USB A]

Use the USB (1.1/2.0) Type-A port for connecting a USB Type-A keyboard, RC-28 REMOTE ENCODER, USB flash drive, mouse, or hub.

- ① Turn OFF the transceiver when connecting or disconnecting.



NOTE:

- **DO NOT** connect a multimedia adapter, memory card reader, USB HDD, or Bluetooth keyboard or mouse, as these are not supported by Icom.
- **DO NOT** connect two or more of the same USB devices. (Example: Two USB hubs or two USB mice)

- ① Connect a PC keyboard for the RTTY and PSK operations.

By connecting a PC keyboard to [USB], you can send the content from one of 4 memories. You can send the content from a CW Keyer Memory (M1 ~ M8), SSB/AM/FM Voice Memory (T1 ~ T8), RTTY Memory (RT1 ~ RT8), or PSK Memory (PT1 ~ PT8) to be transmitted.

- ① To use this function, turn ON the following items.

MENU » SET > Connectors > Keyboard/Mouse > **Keyboard [F1]-[F8] (VOICE)**

MENU » SET > Connectors > Keyboard/Mouse > **Keyboard [F1]-[F8] (KEYER)**

◇ [USB B]

Use the USB (1.1/2.0) Type-B port for:

- Outputting decoded RTTY data.
- Outputting a demodulated AF signal or 12 kHz IF signal.
- Inputting an AF modulation signal.
- Interface for remote control using CI-V commands.
- Remotely controlling using optional RS-BA1 software.



- ① You can change the signal output type and output level.

MENU » SET > Connectors > **USB AF/IF Output**

- ① You can download the USB driver and installation guide from the Icom website.

<https://www.icomjapan.com/support/>

◇ [EXT-KEYPAD]

By connecting an external keypad to [EXT-KEYPAD] with a circuit as shown below, you can send the content from one of the 8 memories. You can send the content from a CW Keyer Memory (M1 ~ M8), SSB/AM/FM Voice Memory (T1 ~ T8), RTTY Memory (RT1 ~ RT8), or PSK Memory (PT1 ~ PT8) to be transmitted.


- Push a switch to send the memory content.
- Hold down the switch for 1 second to repeatedly send the memory content.

- ① To use the external keypad, turn ON the following item.

MENU » SET > Connectors > **External Keypad**

- ① The external keypad shown below is not supplied by Icom.

Mute switch: Mutes both transmission and reception when the switch is turned ON.

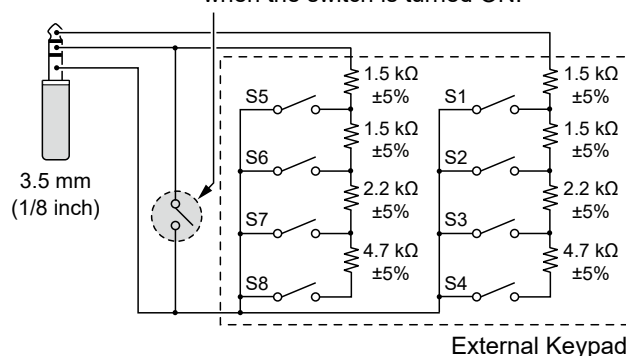


◇ [ELEC-KEY]

Connect a Paddle key to activate the internal electronic keyer for CW operation.

- ① You can select the key type.

MENU » SET > CW-KEY SET > **Key Type**

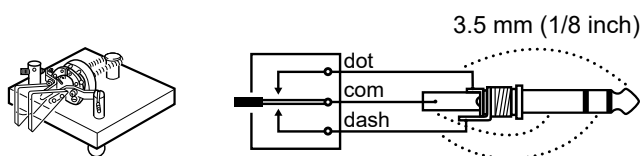

Controller

◇ [SEND]

An external unit controls the transceiver. When the SEND pin goes to ground, the transceiver transmits.



- Input voltage (RX): 2.0 to 20.0 V
- Input voltage (TX): -0.5 to +0.8 V
- Current flow: Maximum 20 mA

The pin goes low when the transceiver transmits.

- Output voltage (TX): Less than 0.1 V
- Current flow: Maximum 200 mA


① You can also use ACC 1 and ACC 2 pin 3 on the RF deck to control the transceiver using an external unit.

When the SEND terminal controls an inductive load, such as a relay, a counter-electromotive force can malfunction or damage the transceiver. To prevent this, we recommend adding a switching diode, such as a 1SS133, on the load side of the circuit to absorb the counter-electromotive force.

① When the diode is added, a delay in relay switching may occur. Be sure to check its switching action before operating.

① Be sure to connect the Negative terminal of the Power source for Relay to the [SEND] jack's GND terminal.

Example: [SEND] jack

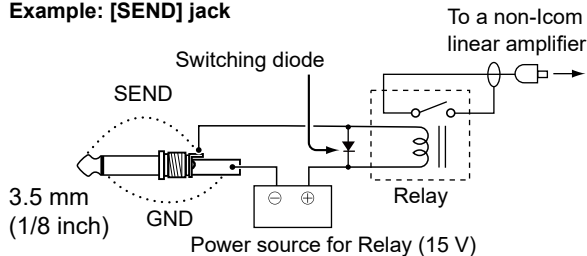

◇ [LINE IN]/[LINE OUT]

[LINE IN]


Inputs the audio signal to the internal modulator circuit. (3.5 mm (1/8 inch))

- Impedance: 10 kΩ
- Output level: 100 mV rms*1

*1 You can change the MOD input level.

① 100 mV rms is at 50% as the default.

MENU » SET > Connectors > MOD Input > **LINE-IN MOD Level**



① You can also use ACC 1 pin 4 on the RF deck to input the audio signal.

[LINE OUT]

Outputs the demodulated AF signal or 12 kHz IF signal. (3.5 mm (1/8 inch))

- Output impedance: 4.7 kΩ
- Output level: 100 ~ 300 mV rms*2

*2 You can change the AF/IF (IF=12 kHz) output level.

① Approximately 200 mV rms is at the 50% as the default.

MENU » SET > Connectors > **LINE-OUT AF/IF Output**

① You can change the AF/IF (IF=12 kHz) settings to output a 12 kHz IF signal. In that case, you can listen to DRM communication with the application software receiver that is installed onto your PC.

MENU » SET > Connectors > LINE-OUT AF/IF Output > **Output Select**


① You can also use ACC 1 pin 5 on the RF deck to output the demodulated AF signal or 12 kHz IF signal.

Controller

◇ [EXT-SP A]/[EXT-SP B]

Connects to external speakers.
(3.5 mm (1/8 inch))

- Output impedance: 4 ~ 8 Ω
- Output level: More than 2 W
(8 Ω load, 10% distortion)



◇ [DC IN]

Connect the supplied power cable to an AC receptacle.



About audio output settings

(When [PHONES] is not in use)

Speaker MAIN/SUB Mix: OFF				
Output Connection	Output from the internal speaker		Output from the external speaker	
	L	R	EXT-SP A	EXT-SP B
Internal speaker only	MIX*	MIX*	N/C	N/C
External speaker (A + B)	OFF	OFF	MAIN	SUB
External speaker (A)	OFF	SUB	MAIN	N/C
External speaker (B)	MAIN	OFF	N/C	SUB

Speaker MAIN/SUB Mix: ON				
Output Connection	Output from the internal speaker		Output from the external speaker	
	L	R	EXT-SP A	EXT-SP B
Internal speaker only	MIX	MIX	N/C	N/C
External speaker (A + B)	OFF	OFF	MIX	MIX
External speaker (A)	OFF	OFF	MIX	N/C
External speaker (B)	MIX	OFF	N/C	MIX

MIX: Outputs the audio from both Main and Sub bands.

① You can change the setting in the following item.

MENU » **SET > Function > Speaker MAIN/SUB Mix**

- * When Dualwatch is ON, the internal speaker L outputs the audio from the Main band, and R outputs the audio from the Sub band.



