



TIMER

HF/50MHz TRANSCEIVER

TUNE PBT

POWER

TRANSMIT



ICOM IC-756PRO

PHONES

TUNER MONITOR NB NR

ELEC-KEY

AF-RF/SQL BAL-NR

MIC

F-1 F-2 F-3 F-4 F-5

SPEECH

LOCK

MIC GAIN RF POWER COMP KEY SPEED BR-G DISPLAY

SSB CW/RTTY AM/FM FILTER EXIT

RIT ATX CLEAR

RIT/ATX

PBT CLR NOTCH

NOTCH-BW PITCH

LOCK

XFC

TS

MCX

TSW

V

A

MCW

MCN

MCES

MCES

MCES

MCES

MCES

MCES

MCES

MCES

SSB

CW/RTTY

AM/FM

FILTER

EXIT



ICOM CORPORATION
1000 WEST 10TH AVENUE
DENVER, COLORADO 80202
U.S.A.
SERIAL NO. 00016

ICOM AC 2000S
SERIAL NO. 00016
POWER REAR TUNING ACCY. ALL OFF KEY SWR LIT UP S.C. 2000S














This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

WARNING: Modification of this device to receive cellular radiotelephone service signals is prohibited under FCC and Federal law.

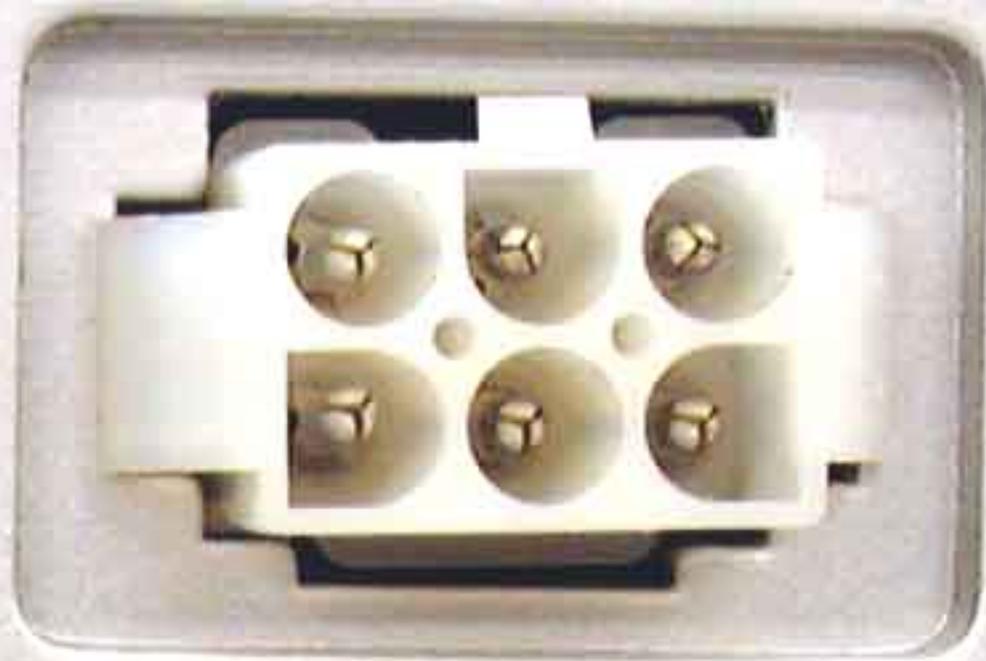

| | | | | | | | | | | | |
|-----------------|--------|-------|-----------------------|---------|-----|--------|----------------------------|-----|------|----------|--|
| GND ANT 2 ANT 1 | | | ICOM | | | | IC-756PRO | | | DC 13.8V | |
| | | | | | | | | | | | |
| | | | FCC ID: AFJ IC-756PRO | | | | Icom Inc. MADE IN JAPAN | | | | |
| | | | SERIAL NO. 00016 | | | | | | | | |
| X-VERTER | RX ANT | TUNER | ACC (1) | ACC (2) | KEY | REMOTE | EXT SP | ALC | SEND | | |
| | | | | | | | | | | | |