

MFA **M. Flom Associates, Inc. - Global Compliance Center**
3356 North San Marcos Place, Suite 107, Chandler, Arizona 85225-7176
www.mflom.com general@mflom.com (480) 926-3100, FAX: 926-3598

Date: May 21, 1999

Federal Communications Commission
EQUIPMENT APPROVAL SERVICES
P.O. Box 358315
Pittsburgh, PA 15251-5315

Attention: Authorization & Evaluation Division

Applicant: Icom Incorporated
Equipment: IC-M45A
FCC ID: AFJIC-M45A
FCC Rules: 80

Gentlemen:

On behalf of the Applicant, enclosed please find Application Form 731, Engineering Test Report and all pertinent documentation, the whole for approval of the referenced equipment as shown.

Filing fees are attached.

We trust the same is in order. Should you need any further information, kindly contact the writer who is authorized to act as agent.

Sincerely yours,



William H. Graff

enclosure(s)
CERTIFIED MAIL, R.R.R.

cc: Applicant
WHG/cvr

MFA **M. Flom Associates, Inc. - Global Compliance Center**
3356 North San Marcos Place, Suite 107, Chandler, Arizona 85225-7176
www.mflom.com general@mflom.com (480) 926-3100, FAX: 926-3598

Date: May 21, 1999

Federal Communications Commission
EQUIPMENT APPROVAL SERVICES
P.O. Box 358315
Pittsburgh, PA 15251-5315

Attention: Authorization & Evaluation Division

Applicant: Icom Incorporated
FCC ID: AFJIC-M45A
Equipment: IC-M45A
Subject: Electronically Filed FORM 731
Confirmation:

Gentlemen:

As per instructions received, enclosed herewith please find completed Remittance Advice Form 159 for the referenced equipment, bearing original signature, and the application having been electronically filed.

Sincerely yours,



William H. Graff

enclosure(s)
CERTIFIED MAIL, R.R.R.
cc: Visa
cc: File
WHG/cvr

LIST OF EXHIBITS
(FCC **CERTIFICATION** (TRANSMITTERS) - REVISED 9/28/98)

APPLICANT: Icom Incorporated

FCC ID: AFJIC-M45A

BY APPLICANT:

1. LETTER OF AUTHORIZATION
2. IDENTIFICATION DRAWINGS, 2.1033(c)(11)
 - LABEL
 - LOCATION OF LABEL
 - COMPLIANCE STATEMENT
 - LOCATION OF COMPLIANCE STATEMENT
3. PHOTOGRAPHS, 2.1033(c)(12)
4. DOCUMENTATION: 2.1033(c)
 - (3) USER MANUAL
 - (9) TUNE-UP/ALIGNMENT PROCEDURE
 - (10) SCHEMATIC DIAGRAM
 - (10) OPERATIONAL DESCRIPTION

BY M.F.A. INC.

- A. TESTIMONIAL & STATEMENT OF CERTIFICATION
- B. STATEMENT OF QUALIFICATIONS

MFA **M. Flom Associates, Inc. - Global Compliance Center**
3356 North San Marcos Place, Suite 107, Chandler, Arizona 85225-7176
www.mflom.com general@mflom.com (480) 926-3100, FAX: 926-3598

Sub-part
2.1033(c):

EQUIPMENT IDENTIFICATION

FCC ID: AFJIC-M45A

NAMEPLATE DRAWING

ATTACHED, EXHIBIT 1.

LOCATION

AS PER LABEL DRAWING(S)

DATE OF REPORT

May 21, 1999

SUPERVISED BY:


William H. Graff

THE APPLICANT HAS BEEN CAUTIONED AS TO THE FOLLOWING:

15.21 INFORMATION TO USER.

The users manual or instruction manual for an intentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

15.27(a) SPECIAL ACCESSORIES.

Equipment marketed to a consumer must be capable of complying with the necessary regulations in the configuration in which the equipment is marketed. Where special accessories, such as shielded cables and/or special connectors are required to enable an unintentional or intentional radiator to comply with the emission limits in this part, the equipment must be marketed with, i.e. shipped and sold with, those special accessories. However, in lieu of shipping or packaging the special accessories with the unintentional or intentional radiator, the responsible party may employ other methods of ensuring that the special accessories are provided to the consumer, without additional charge.

Information detailing any alternative method used to supply the special accessories for a grant of equipment authorization or retained in the verification records, as appropriate. The party responsible for the equipment, as detailed in § 2.909 of this chapter, shall ensure that these special accessories are provided with the equipment. The instruction manual for such devices shall include appropriate instructions on the first page of text concerned with the installation of the device that these special accessories must be used with the device. It is the responsibility of the user to use the needed special accessories supplied with the equipment.

TABLE OF CONTENTS

RULE	DESCRIPTION	PAGE
	Test Report	1
2.1033(c)	General Information Required	2
2.1033(c)(14)	Rule Summary	5
	Standard Test Conditions and Engineering Practices	6
2.1046(a)	P.F. Power Output	7
2.1047(a)	Audio Frequency Response	9
2.1047(a)	Audio Low Pass Filter (Voice Input)	12
2.1047(b), 80.211, 80.213		
	Modulation Limiting	14
2.1049(c)(1)	Emission Masks (Occupied Bandwidth)	16
2.1051	Spurious Emissions at Antenna Terminals)	21
2.1053(a)	Field Strength of Spurious Radiation	24
2.1055(a)(1)	Frequency Stability (Temperature Variation)	28
2.1055(b)(1)	Frequency Stability (Voltage Variation)	31
80.203(b)	User Controls	32
80.203(c)	Automatic Deactivation (Time-Out Timer)	33
80.959(c)(1)(2) & (3)		
	Power Output Over Time	34
80.956(a) & (b) Subpart T - G3E Emissions		36
80.956(a) & (b) Subpart T - G3E Emissions		37
80.961(a) & (b) Subpart T - G3E Emissions		38
2.202(g)	Necessary Bandwidth and Emission Bandwidth	39

PAGE NO. 1 of 39.

Required information per ISO/IEC Guide 25-1990, paragraph 13.2:

- a) TEST REPORT
- b) Laboratory: M. Flom Associates, Inc.
 (FCC: 31040/SIT) 3356 N. San Marcos Place, Suite 107
 (Canada: IC 2044) Chandler, AZ 85225
- c) Report Number: d9950042
- d) Client: Icom America, Inc.
 2380 - 116th Ave. N. E.
 P.O. C-90029
 Bellevue, Washington 98009-9029
- e) Identification: IC-M45A
 FCC ID: AFJIC-M45A
 Description: VHF-FM Marine Transceiver
- f) EUT Condition: Not required unless specified in individual tests.
- g) Report Date: May 21, 1999
 EUT Received: May 12, 1999
- h, j, k): As indicated in individual tests.
- i) Sampling method: No sampling procedure used.
- l) Uncertainty: In accordance with MFA internal quality manual.
- m) Supervised by:
- 

William H. Graff
- n) Results: The results presented in this report relate only to the item tested.
- o) Reproduction: This report must not be reproduced, except in full, without written permission from this laboratory.

PAGE NO. 2 of 39.

LIST OF GENERAL INFORMATION REQUIRED FOR CERTIFICATIONIN ACCORDANCE WITH FCC RULES AND REGULATIONS,
VOLUME II, PART 2 AND TO

80

Sub-part 2.1033(c)(1): NAME AND ADDRESS OF APPLICANT:Icom Incorporated
1-6-19 Kamikurazukuri
Hirano-ku
Osaka, Japan 547MANUFACTURER:

Applicant

(c)(2): FCC ID: AFJIC-M45AMODEL NO: IC-M45A(c)(3): INSTRUCTION MANUAL(S):

PLEASE SEE ATTACHED EXHIBITS

(c)(4): TYPE OF EMISSION: 16K0G3E(c)(5): FREQUENCY RANGE, MHz: 156.025 to 157.425(c)(6): POWER RATING, Watts: 1 to 25
x Switchable Variable N/A(c)(7): MAXIMUM POWER RATING, Watts: 25

PAGE NO. 3 of 39.

Subpart 2.1033 (continued)

(c)(8): VOLTAGES & CURRENTS IN ALL ELEMENTS IN FINAL R. F. STAGE, INCLUDING FINAL TRANSISTOR OR SOLID STATE DEVICE:

COLLECTOR CURRENT, A = per manual
 COLLECTOR VOLTAGE, Vdc = per manual
 SUPPLY VOLTAGE, Vdc = 13.8

(c)(9): TUNE-UP PROCEDURE:

PLEASE SEE ATTACHED EXHIBITS

(c)(10): CIRCUIT DIAGRAM/CIRCUIT DESCRIPTION:

Including description of circuitry & devices provided for determining and stabilizing frequency, for suppression of spurious radiation, for limiting modulation and limiting power.

PLEASE SEE ATTACHED EXHIBITS

(c)(11): LABEL INFORMATION:

PLEASE SEE ATTACHED EXHIBITS

(c)(12): PHOTOGRAPHS:

PLEASE SEE ATTACHED EXHIBITS

(c)(13): DIGITAL MODULATION DESCRIPTION:

 ATTACHED EXHIBITS
 x N/A

(c)(14): TEST AND MEASUREMENT DATA:

FOLLOWS

M. Flom Associates, Inc. is accredited by the American Association for Laboratory Association (A2LA) as shown in the scope below.



THE AMERICAN ASSOCIATION FOR LABORATORY ACCREDITATION

ACCREDITED LABORATORY

A2LA has accredited

M. FLOM ASSOCIATES, INC.
Chandler, AZ

for technical competence in the field of

Electrical (EMC) Testing

The accreditation covers the specific tests and types of tests listed on the agreed scope of accreditation. This laboratory meets the requirements of ISO/IEC Guide 25-1990 "General Requirements for the Competence of Calibration and Testing Laboratories" (equivalent to relevant requirements of the ISO 9000 series of standards) and any additional program requirements in the identified field of testing.

Presented this 24th day of November, 1998.



Peter Almy
President
For the Accreditation Council
Certificate Number 1008.01
Valid to December 31, 2000

For tests or types of tests to which this accreditation applies, please refer to the laboratory's Electrical (EMC) Scope of Accreditation



American Association for Laboratory Accreditation

SCOPE OF ACCREDITATION TO ISO/IEC GUIDE 25:1990 AND EN 45001

M. FLOM ASSOCIATES, INC.
Electronic Testing Laboratory
3356 North San Marcos Place, Suite 107
Chandler, AZ 85224-1571
Morton Flom Phone: 602 926 3100

ELECTRICAL (EMC)

Valid to: December 31, 2000 Certificate Number: 1008-01

In recognition of the successful completion of the A2LA evaluation process, accreditation is granted to this laboratory to perform the following **electromagnetic compatibility tests**:

Tests	Standard(s)
RF Emissions	FCC Part 15 (Subparts B and C) using ANSI C63.4-1992; CISPR 11; CISPR 13; CISPR 14; CISPR 22; EN 55011; EN 55013; EN 55014; EN 55022; EN 50081-1; EN 50081-2; FCC Part 18; ICES-003; AS/NZS 1044; AS/NZS 1053; AS/NZS 3548; AS/NZS 4251.1
RF Immunity	EN 50082-1; EN 50082-2; AS/NZS 4251.1
Radiated Susceptibility	EN 61000-4-3; ENV 50140; ENV 50204; IEC 1000-4-3; IEC 801-3
ESD	EN 61000-4-2; IEC 1000-4-2; IEC 801-2
EFT	EN 61000-4-4; IEC 1000-4-4; IEC 801-4
Surge	EN 61000-4-5; ENV 50142; IEC 1000-4-5; IEC 801-5
47 CFR (FCC)	2, 21, 22, 23, 24, 74, 80, 87, 90, 95, 97

Peter Almy

5301 Buckeystown Pike, Suite 350 • Frederick, MD 21704-8307 • Phone: 301 644 3200 • Fax: 301 662 2974

"This laboratory is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this report have been determined in accordance with the laboratory's terms of accreditation unless stated otherwise in the report."

Should this report contain any data for tests for which we are not accredited, or which have been undertaken by a subcontractor that is not A2LA accredited, such data would not covered by this laboratory's A2LA accreditation.

PAGE NO.

5 of 39.

Sub-part
2.1033(c)(14):TEST AND MEASUREMENT DATA

All tests and measurement data shown were performed in accordance with FCC Rules and Regulations, Volume II; Part 2, Sub-part J, Sections 2.947, 2.1033(c), 2.1041, 2.1046, 2.1047, 2.1079, 2.1051, 2.1053, 2.1055, 2.1057 and the following individual Parts:

- 21 - Domestic Public Fixed Radio Services
- 22 - Public Mobile Services
- 22 Subpart H - Cellular Radiotelephone Service
- 22.901(d) - Alternative technologies and auxiliary services
- 23 - International Fixed Public Radiocommunication services
- 24 - Personal Communications Services
- 74 Subpart H - Low Power Auxiliary Stations
- 80 - Stations in the Maritime Services
- 80 Subpart E - General Technical Standards
- 80 Subpart F - Equipment Authorization for Compulsory Ships
- 80 Subpart K - Private Coast Stations and Marine Utility Stations
- 80 Subpart S - Compulsory Radiotelephone Installations for Small Passenger Boats
- 80 Subpart T - Radiotelephone Installation Required for Vessels on the Great Lakes
- 80 Subpart U - Radiotelephone Installations Required by the Bridge-to-Bridge Act
- 80 Subpart V - Emergency Position Indicating Radiobeacons (EPIRB'S)
- 80 Subpart W - Global Maritime Distress and Safety System (GMDSS)
- 80 Subpart X - Voluntary Radio Installations
- 87 - Aviation Services
- 90 - Private Land Mobile Radio Services
- 94 - Private Operational-Fixed Microwave Service
- 95 Subpart A - General Mobile Radio Service (GMRS)
- 95 Subpart C - Radio Control (R/C) Radio Service
- 95 Subpart D - Citizens Band (CB) Radio Service
- 95 Subpart E - Family Radio Service
- 95 Subpart F - Interactive Video and Data Service (IVDS)
- 101 - Fixed Microwave Services

PAGE NO.

6 of 39.

STANDARD TEST CONDITIONS
and
ENGINEERING PRACTICES

Except as noted herein, the following conditions and procedures were observed during the testing:

In accordance with ANSI C63.4-1992, section 6.1.9, and unless otherwise indicated in the specific measurement results, the ambient temperature of the actual EUT was maintained within the range of 10° to 40°C (50° to 104 °F) unless the particular equipment requirements specify testing over a different temperature range. Also, unless otherwise indicated, the humidity levels were in the range of 10% to 90% relative humidity.

Prior to testing, the EUT was tuned up in accordance with the manufacturer's alignment procedures. All external gain controls were maintained at the position of maximum and/or optimum gain throughout the testing.

Measurement results, unless otherwise noted, are worst case measurements.

PAGE NO. 7 of 39.
NAME OF TEST: R.F. Power Output
SPECIFICATION: 47 CFR 2.1046(a)
GUIDE: TIA/EIA 603-1993
TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE

1. The EUT was connected to a resistive coaxial attenuator of normal load impedance, and the unmodulated output power was measured by means of an R. F. Power Meter.
2. Measurement accuracy is $\pm 3\%$.

MEASUREMENT RESULTS

NOMINAL, MHz	CHANNEL	R. F. POWER, WATTS	
		LO	HI
156.300	06	1	25
156.550	11	1	25
156.600	12	1	25
156.650	13* Mobile Only	1	**1/25
156.700	14	1	25
156.750	15	1	25
156.800	16	1	25
156.850	17* Mobile Only	1	**1/25
156.875	67* Mobile Only	1	**1/25

*Automatic switching to low power.


**High power with manual over-ride, see attached manual.

SUPERVISED BY:


 William H. Graff

TRANSMITTER POWER CONDUCTED MEASUREMENTS

TEST 1: R. F. POWER OUTPUT
 TEST 2: FREQUENCY STABILITY

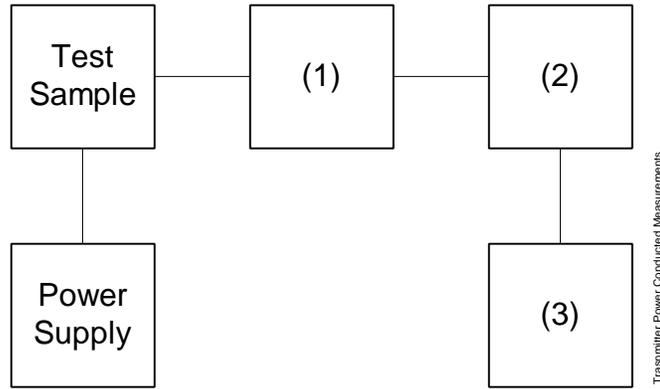

Asset	Description	s/n
(1)	<u>COAXIAL ATTENUATOR</u>	
_____	i00122 Narda 766-10	7802
_____	i00123 Narda 766-10	7802A
_____	i00069 Bird 8329 (30 dB)	1006
<u>x</u>	i00113 Sierra 661A-3D	1059
(2)	<u>POWER METERS</u>	
_____	i00014 HP 435A	1733A05836
<u>x</u>	i00039 HP 436A	2709A26776
<u>x</u>	i00020 HP 8901A POWER MODE	2105A01087
(3)	<u>FREQUENCY COUNTER</u>	
_____	i00042 HP 5383A	1628A00959
<u>x</u>	i00019 HP 5334B	2704A00347
<u>x</u>	i00020 HP 8901A FREQUENCY MODE	2105A01087


PAGE NO. 9 of 39.
NAME OF TEST: Audio Frequency Response
SPECIFICATION: 47 CFR 2.1047(a)
GUIDE: TIA/EIA 603-1993
TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE

1. The EUT and test equipment were set up as shown on the following page.
2. The audio signal generator was connected to the audio input circuit/microphone of the EUT.
3. The audio signal input was adjusted to obtain 50% modulation at 1 kHz, and this point was taken as the 0 dB reference level.
4. With input levels held constant and below limiting at all frequencies, the audio signal generator was varied from 100 Hz to 50 kHz.
5. The response in dB relative to 1 kHz was then measured, using the HP 8901A Modulation Analyzer.
6. MEASUREMENT RESULTS: ATTACHED

TRANSMITTER TEST SET-UP


- TEST A. MODULATION CAPABILITY/DISTORTION
- TEST B. AUDIO FREQUENCY RESPONSE
- TEST C. HUM AND NOISE LEVEL
- TEST D. RESPONSE OF LOW PASS FILTER
- TEST E. MODULATION LIMITING

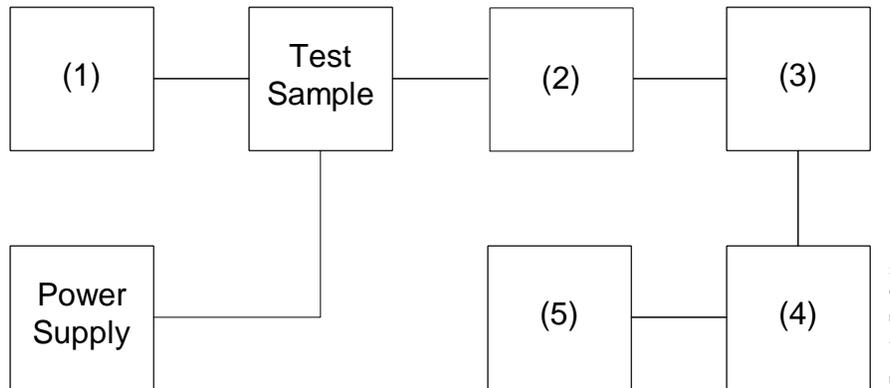

Asset	Description	s/n
(1)	<u>AUDIO OSCILLATOR</u>	
_____	i00010 HP 204D	1105A04683
<u>x</u>	i00017 HP 8903A	2216A01753
<u>x</u>	i00118 HP 33120A	US36002064
(2)	<u>COAXIAL ATTENUATOR</u>	
_____	i00122 NARDA 766-10	7802
_____	i00123 NARDA 766-10	7802A
<u>x</u>	i00113 SIERRA 661A-3D	1059
_____	i00069 BIRD 8329 (30 dB)	10066
(3)	<u>MODULATION ANALYZER</u>	
<u>x</u>	i00020 HP 8901A	2105A01087
(4)	<u>AUDIO ANALYZER</u>	
<u>x</u>	i00017 HP 8903A	2216A01753
(5)	<u>SCOPE</u>	
_____	i00058 HP 1741A	2215A09356
_____	i00071 Tektronix 935	1935-B011343

PAGE NO. 11 of 39.

NAME OF TEST: Audio Frequency Response
 g9950171: 1999-May-20 Thu 07:41:00
 STATE: 0:General

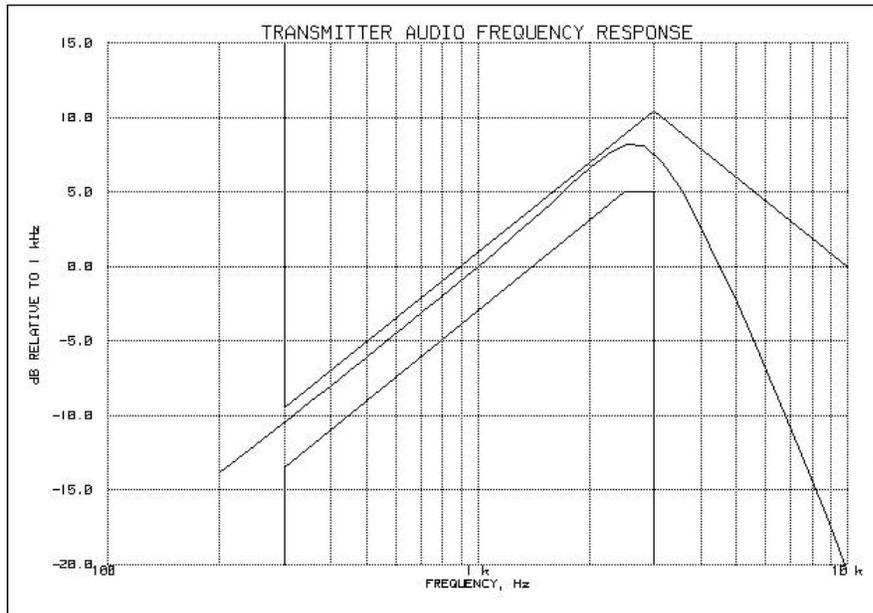

Additional points:

FREQUENCY, Hz	LEVEL, dB
300	-10.43
20000	-32.47
30000	-32.57
50000	-33.07

SUPERVISED BY:

William H. Graff
 William H. Graff


PAGE NO. 12 of 39.
NAME OF TEST: Audio Low Pass Filter (Voice Input)
SPECIFICATION: 47 CFR 2.1047(a)
GUIDE: TIA/EIA 603-1993
TEST EQUIPMENT: As per previous page

MEASUREMENT PROCEDURE

1. The EUT and test equipment were set up such that the audio input was connected at the input to the modulation limiter, and the modulated stage.
2. The audio output was connected at the output to the modulated stage.
3. MEASUREMENT RESULTS: ATTACHED

PAGE NO. 13 of 39.

NAME OF TEST: Audio Low Pass Filter (Voice Input)
g9950170: 1999-May-20 Thu 07:37:00
STATE: 0:General

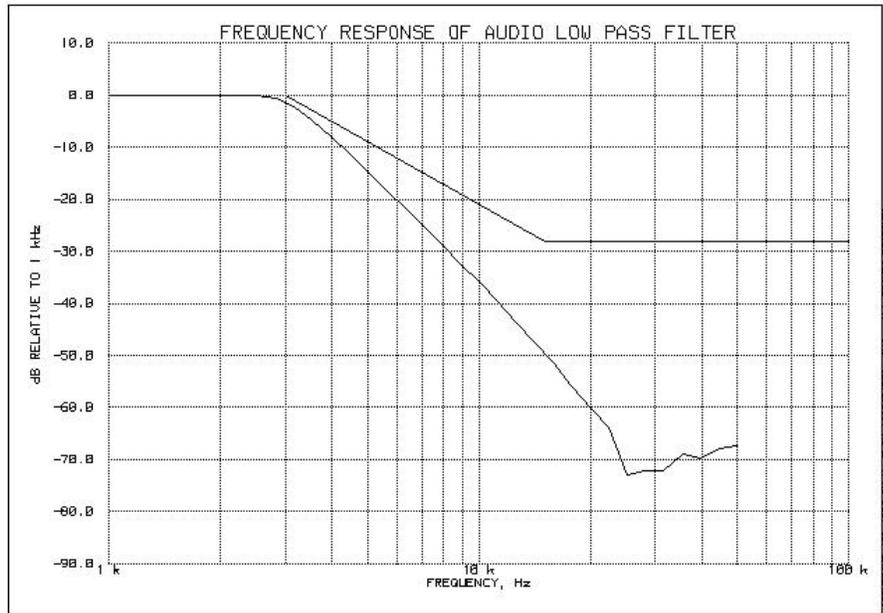

SUPERVISED BY:


William H. Graff

PAGE NO. 14 of 39.
NAME OF TEST: Modulation Limiting
SPECIFICATION: 47 CFR 2.1047(b), 80.211, 80.213
GUIDE: TIA/EIA 603-1993
TEST EQUIPMENT: As per previous page


MEASUREMENT PROCEDURE

1. The signal generator was connected to the input of the EUT as for "Frequency Response of the Modulating Circuit."
2. The modulation response was measured for each of three frequencies (one of which was the frequency of maximum response), and the input voltage was varied and was observed on an HP 8901A Modulation Analyzer.
3. The input level was varied from 30% modulation (± 1.5 kHz deviation) to at least 20 dB higher than the saturation point.
4. Measurements were performed for both negative and positive modulation and the respective results were recorded.
5. MEASUREMENT RESULTS: ATTACHED


PAGE NO. 15 of 39.

NAME OF TEST: Modulation Limiting
g9950175: 1999-May-20 Thu 07:58:00
STATE: 0:General

Positive
Peaks:

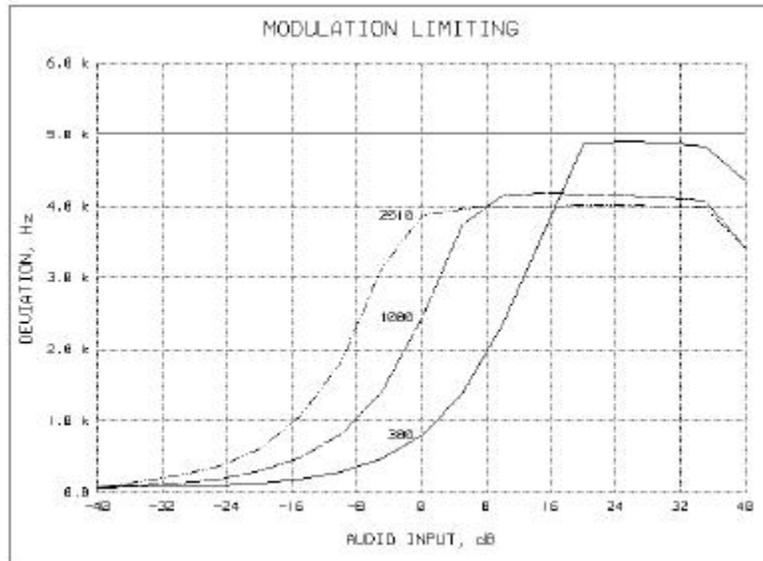

Negative
Peaks:

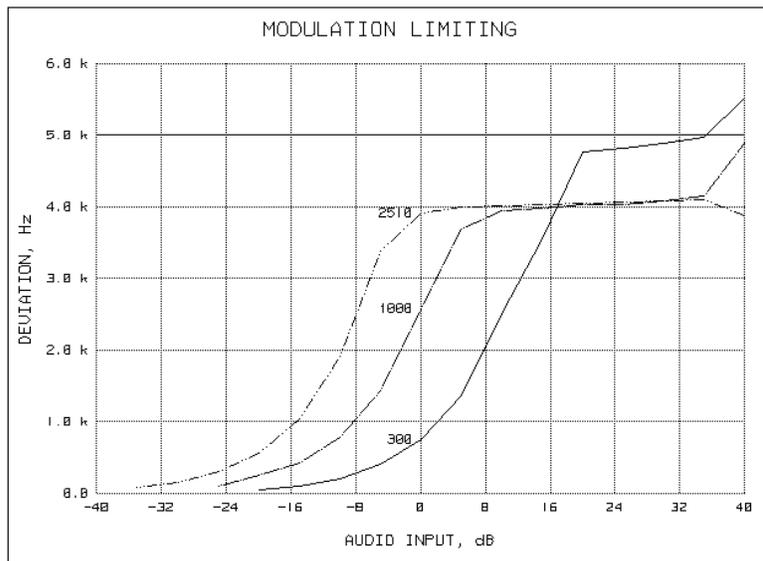

SUPERVISED BY:


William H. Graff


PAGE NO. 16 of 39.
NAME OF TEST: Emission Masks (Occupied Bandwidth)
SPECIFICATION: 47 CFR 2.1049(c)(1)
GUIDE: TIA/EIA 603-1993
TEST EQUIPMENT: As per previous page

MEASUREMENT PROCEDURE

1. The EUT and test equipment were set up as shown on the following page, with the Spectrum Analyzer connected.
2. For EUTs supporting audio modulation, the audio signal generator was adjusted to the frequency of maximum response and with output level set for ± 2.5 kHz deviation (or 50% modulation). With level constant, the signal level was increased 16 dB.
3. For EUTs supporting digital modulation, the digital modulation mode was operated to its maximum extent.
4. The Occupied Bandwidth was measured with the Spectrum Analyzer controls set as shown on the test results.
5. MEASUREMENT RESULTS: ATTACHED

PAGE NO. 17 of 39.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
g9950188: 1999-May-20 Thu 08:41:00
STATE: 1:Low Power

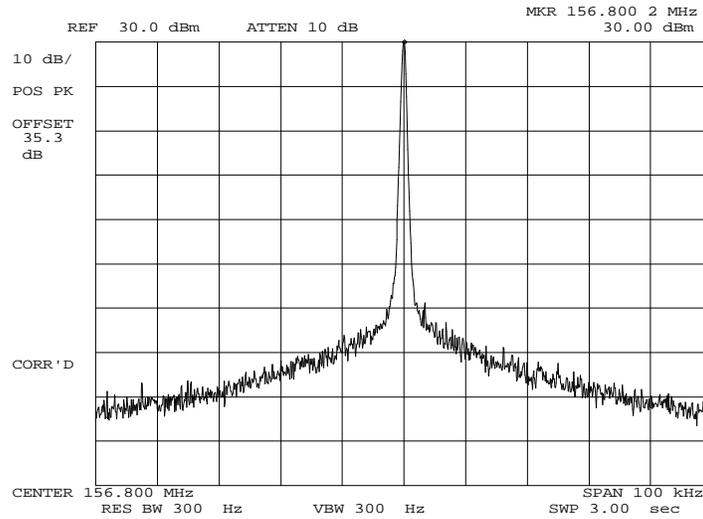


POWER: LOW
MODULATION: NONE

SUPERVISED BY:


William H. Graff

PAGE NO. 18 of 39.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
g9950190: 1999-May-20 Thu 08:44:00
STATE: 1:Low Power

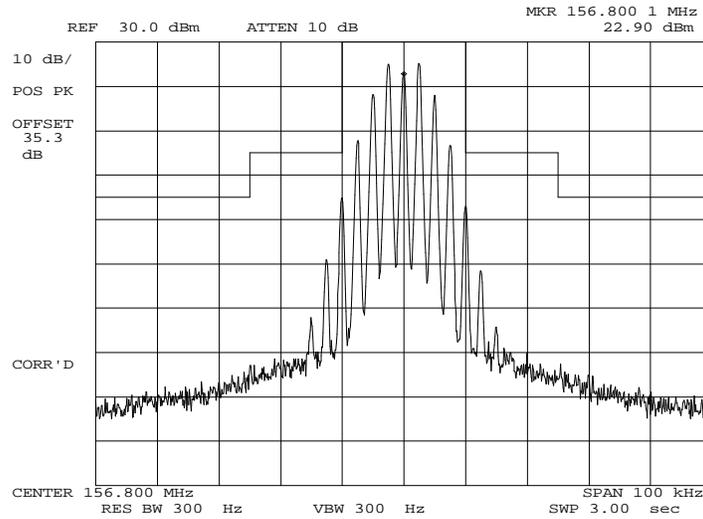


POWER: LOW
MODULATION: VOICE: 2500 Hz SINE WAVE
MASK: B, VHF/UHF 25kHz, w/LPF

SUPERVISED BY:


William H. Graff

PAGE NO. 19 of 39.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
g9950187: 1999-May-20 Thu 08:38:00
STATE: 2:High Power

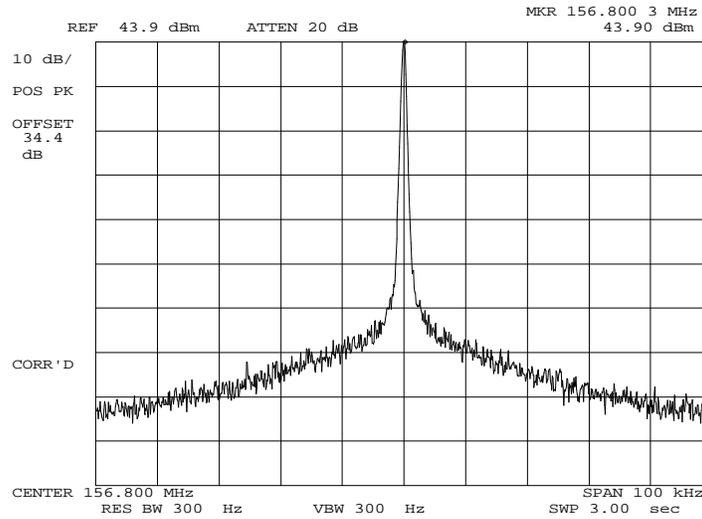


POWER: HIGH
MODULATION: NONE

SUPERVISED BY:


William H. Graff

PAGE NO. 20 of 39.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
g9950189: 1999-May-20 Thu 08:43:00
STATE: 2:High Power

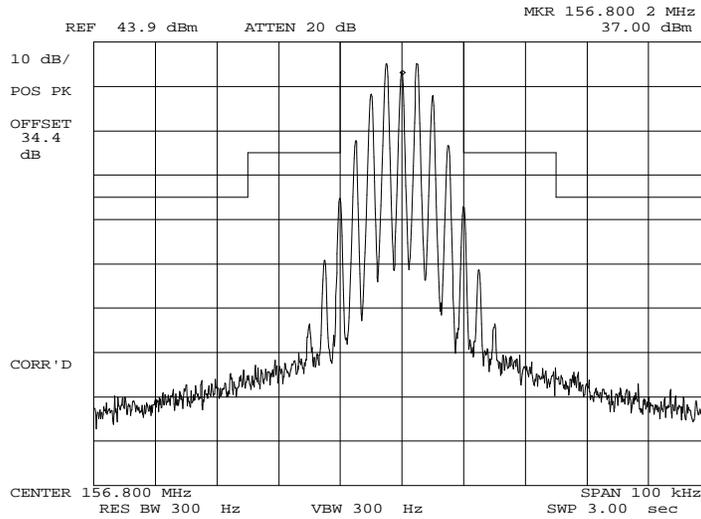

POWER: HIGH
MODULATION: VOICE: 2500 Hz SINE WAVE
MASK: B, VHF/UHF 25kHz, w/LPF

SUPERVISED BY:


William H. Graff

PAGE NO. 21 of 39.
NAME OF TEST: Spurious Emissions at Antenna Terminals
SPECIFICATION: 47 CFR 2.1051
GUIDE: TIA/EIA 603-1993
TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE

1. The emissions were measured for the worst case as follows:
 - (a): within a band of frequencies defined by the carrier frequency plus and minus one channel.
 - (b): from the lowest frequency generated in the EUT and to at least the 10th harmonic of the carrier frequency, or 40 GHz, whichever is lower.
2. The magnitude of spurious emissions that are attenuated more than 20 dB below the permissible value need not be specified.
3. MEASUREMENT RESULTS: ATTACHED FOR WORST CASE

FREQUENCY OF CARRIER, MHz	=	156.8
SPECTRUM SEARCHED, GHz	=	0 to 10 x F _c
MAXIMUM RESPONSE, Hz	=	2510
ALL OTHER EMISSIONS	=	= 20 dB BELOW LIMIT
LIMIT(S), dBc		
	-	(43+10xLOG P) = -43 (1 Watt)
	-	(43+10xLOG P) = -57 (25 Watts)

SUPERVISED BY:


 William H. Graff

PAGE NO. 22 of 39.

NAME OF TEST: Spurious Emissions at Antenna Terminals
 9950192: 1999-May-20 Thu 09:04:00
 STATE: 1:Low Power

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	LEVEL, dBm	LEVEL, dBc	MARGIN, dB
156.800000	313.595000	-39.5	-69.5	-26.5
156.800000	470.411000	-49	-79	-36
156.800000	627.106000	-49.5	-79.5	-36.5
156.800000	783.674000	-49.4	-79.4	-36.4
156.800000	940.813000	-48.4	-78.4	-35.4
156.800000	1097.582000	-45.2	-75.2	-32.2
156.800000	1254.410000	-49.3	-79.3	-36.3
156.800000	1411.492000	-49.5	-79.5	-36.5
156.800000	1568.451000	-48.9	-78.9	-35.9
156.800000	1724.394000	-49.2	-79.2	-36.2
156.800000	1881.676000	-47.7	-77.7	-34.7
156.800000	2037.930000	-48	-78	-35
156.800000	2194.964000	-48.4	-78.4	-35.4
156.800000	2352.191000	-46.8	-76.8	-33.8

PAGE NO. 23 of 39.

NAME OF TEST: Spurious Emissions at Antenna Terminals
 g9950191: 1999-May-20 Thu 08:59:00
 STATE: 2:High Power

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	LEVEL, dBm	LEVEL, dBc	MARGIN, dB
156.800000	313.594000	-39.2	-83.1	-26.2
156.800000	470.603000	-40.5	-84.4	-27.5
156.800000	626.777000	-39.6	-83.5	-26.6
156.800000	783.919000	-40.1	-84	-27.1
156.800000	940.671000	-39.8	-83.7	-26.8
156.800000	1097.280000	-40.2	-84.1	-27.2
156.800000	1254.876000	-39.5	-83.4	-26.5
156.800000	1411.476000	-39.2	-83.1	-26.2
156.800000	1568.308000	-39.1	-83	-26.1
156.800000	1724.593000	-39.4	-83.3	-26.4
156.800000	1881.662000	-39.8	-83.7	-26.8
156.800000	2038.066000	-38.3	-82.2	-25.3
156.800000	2195.403000	-38.8	-82.7	-25.8
156.800000	2351.938000	-38	-81.9	-25

PAGE NO. 24 of 39.
NAME OF TEST: Field Strength of Spurious Radiation
SPECIFICATION: 47 CFR 2.1053(a)
GUIDE: TIA/EIA 603-1993
TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE

1. A description of the measurement facilities was filed with the FCC and was found to be in compliance with the requirements of Section 15.38, by letter from the FCC dated March 3, 1997, FILE 31040/SIT. All pertinent changes will be reported to the Commission by up-date prior to March 2000.
2. At first, in order to locate all spurious frequencies and approximate amplitudes, and to determine proper equipment functioning, the test sample was set up at a distance of three meters from the test instrument. Valid spurious signals were determined by switching the power on and off.
3. In the field, the test sample was placed on a wooden turntable above ground at three (or thirty) meters away from the search antenna. Excess power leads were coiled near the power supply.

In order to obtain the maximum response at each spurious frequency, the turntable was rotated. Also, the search Antennas were raised and lowered vertically, and all cables were oriented. Excess power lead was coiled near the power supply.
4. A signal generator, connected with a non-radiating cable to a vertically polarized half-wave antenna (for each frequency involved) was substituted for the transmitter. The Search Antenna was raised and lowered to obtain maximum indicated.
5. The signal generator output was adjusted until a signal level indication equal to that from the transmitter was obtained.
6. Steps 4 and 5 were repeated, using a horizontally polarized half-wave antenna. The higher of the two observations was noted.
7. Power into the half-wave antenna was calculated from the characteristic impedance of the line, and the voltage output from the signal generator.

PAGE NO. 25 of 39.
NAME OF TEST: Field Strength of Spurious Radiation
SPECIFICATION: 47 CFR 2.1053(a)
GUIDE: TIA/EIA 603-1993
TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE (CONT.)

8. The level of each spurious radiation with reference to the transmitter power in dB, was calculated from:

$$\text{SPURIOUS LEVEL, dB} = 10 \text{ LOG (Calculated Spurious Power)} \\ \frac{[\text{From Para. 7}]}{\text{TX Power (Wattmeter)}}$$


9. The worst case for all channels is shown.

10. Measurement summary:

FREQUENCY OF CARRIER, MHz = 156.8
 SPECTRUM SEARCHED, GHz = 0 to 10 x F_c
 ALL OTHER EMISSIONS = = 20 dB BELOW LIMIT
 LIMIT, dBc =
 -(43+10xLOG P) = -43 (1 Watt)
 -(43+10xLOG P) = -57 (25 Watts)

11. Measurement results: ATTACHED

RADIATED TEST SETUP

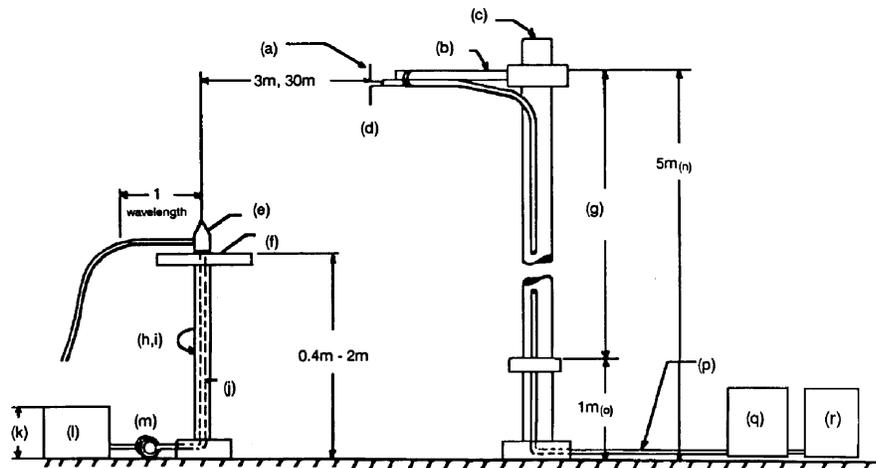

NOTES:

- (a) Search Antenna - Rotatable on boom
- (b) Non-metallic boom
- (c) Non-metallic mast
- (d) Adjustable horizontally
- (e) Equipment Under Test
- (f) Turntable
- (g) Boom adjustable in height.
- (h) External control cables routed horizontally at least one wavelength.
- (i) Rotatable
- (j) Cables routed through hollow turntable center
- (k) 30 cm or less
- (l) External power source
- (m) 10 cm diameter coil of excess cable
- (n) 25 cm (V), 1 m-7 m (V, H)
- (o) 25 cm from bottom end of 'V', 1m normally
- (p) Calibrated Cable at least 10m in length
- (q) Amplifier (optional)
- (r) Spectrum Analyzer

Asset	Description	s/n	Cycle	Last Cal
-------	-------------	-----	-------	----------

Per ANSI C63.4-1992, 10.1.4

TRANSDUCER

___	i00065	EMCO 3109B 100Hz-50MHz	2336	12 mo.	
___	i00033	Singer 94593-1 10kHz-32MHz	0219	12 mo.	
x	i00088	EMCO 3109-B 25MHz-300MHz	2336	12 mo.	Oct-98
x	i00089	Apral 2001 200MHz-1GHz	001500	12 mo.	Oct-98
x	i00103	EMCO 3115 1GHz-18GHz	9208-3925	12 mo.	Oct-98
___	i00085	EMCO 3116 10GHz-40GHz	2076	12 mo.	

AMPLIFIER

___	i00028	HP 8449A	2749A00121	12 mo.	Mar-99
-----	--------	----------	------------	--------	--------

SPECTRUM ANALYZER

___	i00029	HP 8563E	3213A00104	12 mo.	Aug-98
x	i00033	HP 85462A	3625A00357	12 mo.	Dec-98
___	i00048	HP 8566B	2511AD1467	6 mo.	Dec-98

PAGE NO. 27 of 39.

NAME OF TEST: Field Strength of Spurious Radiation

ALL OTHER EMISSIONS = = 20 dB BELOW LIMIT

EMISSION, MHz/HARMONIC	SPURIOUS LEVEL, dBc	
	Low	High
2nd to 10th	<-65	<-80

SUPERVISED BY:



William H. Graff


PAGE NO. 28 of 39.
NAME OF TEST: Frequency Stability (Temperature Variation)
SPECIFICATION: 47 CFR 2.1055(a)(1)
GUIDE: TIA/EIA 603-1993
TEST CONDITIONS: As Indicated
TEST EQUIPMENT: As per previous page

MEASUREMENT PROCEDURE

1. The EUT and test equipment were set up as shown on the following page.
2. With all power removed, the temperature was decreased to -30°C and permitted to stabilize for three hours. Power was applied and the maximum change in frequency was noted within one minute.
3. With power OFF, the temperature was raised in 10°C steps. The sample was permitted to stabilize at each step for at least one-half hour. Power was applied and the maximum frequency change was noted within one minute.
4. The temperature tests were performed for the worst case.
5. MEASUREMENT RESULTS: ATTACHED

TRANSMITTER TEST SET-UP

- TEST A. OPERATIONAL STABILITY
- TEST B. CARRIER FREQUENCY STABILITY
- TEST C. OPERATIONAL PERFORMANCE STABILITY
- TEST D. HUMIDITY
- TEST E. VIBRATION
- TEST F. ENVIRONMENTAL TEMPERATURE
- TEST G. FREQUENCY STABILITY: TEMPERATURE VARIATION
- TEST H. FREQUENCY STABILITY: VOLTAGE VARIATION

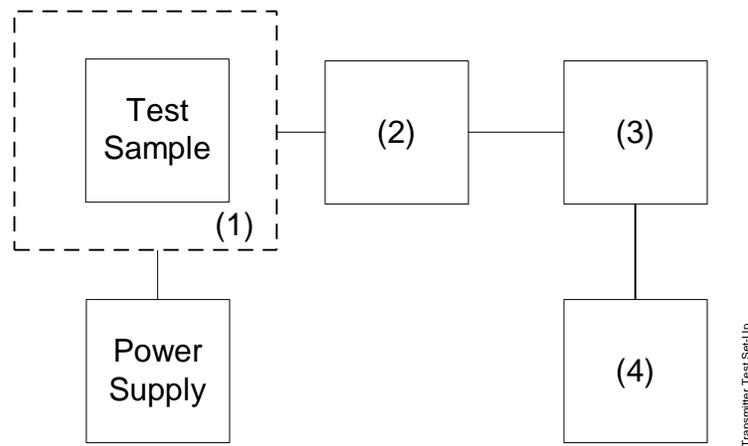


Transmitter Test Set-Up

	Asset	Description	s/n
(1)	<u>TEMPERATURE, HUMIDITY, VIBRATION</u>		
<u>x</u>	i00027	Tenny Temp. Chamber	9083-765-234
---	i00	Weber Humidity Chamber	
---	i00	L.A.B. RVH 18-100	
(2)	<u>COAXIAL ATTENUATOR</u>		
---	i00122	NARDA 766-10	7802
---	i00123	NARDA 766-10	7802A
<u>x</u>	i00113	SIERRA 661A-3D	1059
---	i00069	BIRD 8329 (30 dB)	10066
(3)	<u>R.F. POWER</u>		
---	i00014	HP 435A POWER METER	1733A05839
<u>x</u>	i00039	HP 436A POWER METER	2709A26776
<u>x</u>	i00020	HP 8901A POWER MODE	2105A01087
(4)	<u>FREQUENCY COUNTER</u>		
---	i00042	HP 5383A	1628A00959
<u>x</u>	i00019	HP 5334B	2704A00347
<u>x</u>	i00020	HP 8901A	2105A01087

PAGE NO. 30 of 39.

NAME OF TEST: Frequency Stability (Temperature Variation)
g9950184: 1999-May-20 Thu 11:32:00
STATE: 0:General

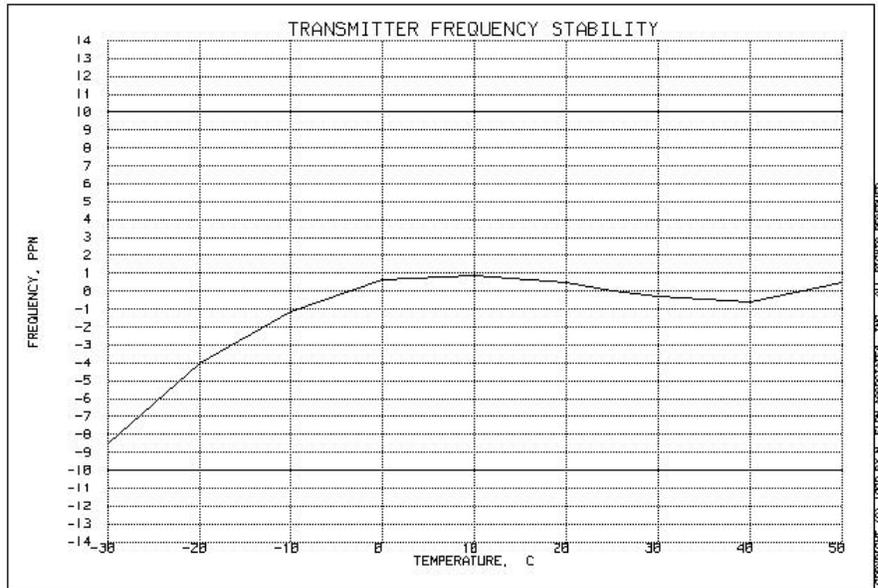

SUPERVISED BY:


William H. Graff

PAGE NO. 31 of 39.
NAME OF TEST: Frequency Stability (Voltage Variation)
SPECIFICATION: 47 CFR 2.1055(b)(1)
GUIDE: TIA/EIA 603-1993
TEST EQUIPMENT: As per previous page

MEASUREMENT PROCEDURE

1. The EUT was placed in a temperature chamber at 25±5°C and connected as for "Frequency Stability - Temperature Variation" test.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.

RESULTS: Frequency Stability (Voltage Variation)
g9950186: 1999-May-20 Thu 08:08:15
STATE: 0:General

LIMIT, ppm = 5
LIMIT, Hz = 784
BATTERY END POINT (Voltage) = 9.5

<u>% of STV</u>	<u>Voltage</u>	<u>Frequency, MHz</u>	<u>Change, Hz</u>	<u>Change, ppm</u>
85	11.73	156.800010	10	0.06
100	13.8	156.800000	0	0.00
115	15.87	156.800000	0	0.00
69	9.5	156.800000	0	0.00

SUPERVISED BY:


William H. Graff

PAGE NO. 32 of 39.
NAME OF TEST: User Controls
SPECIFICATION: 47 CFR 80.203(b)
GUIDE: TIA/EIA 603-1993
TEST EQUIPMENT:

STATEMENT

The external controls of the maritime station transmitter capable of operation in the 156-162 MHz band only provides for selection of maritime channels for which the maritime station is authorized. This transmitter is not capable of being programmed by station operators using external controls to transmit on channels other than those programmed by the manufacturer, service or maintenance personal.

The EUT fully complies with the requirements of 47 CFR 80.203 (b).

PAGE NO. 33 of 39.
NAME OF TEST: Automatic Deactivation (Time-Out Timer)
SPECIFICATION: 47 CFR 80.203(c)
GUIDE: TIA/EIA 603-1993
TEST EQUIPMENT: As per previous page

(c) All VHF ship station transmitters that are either manufactured in or imported into the United States, on or after August 1, 1993, or are installed on or after August 1, 1994, must be equipped with an automatic timing device that deactivates the transmitter and reverts the transmitter to the receive mode after an uninterrupted transmission period of five minutes, plus or minus 10 per cent. Additionally, such transmitters must have a device that indicates when the automatic timer has deactivated the transmitter. VHF ship station transmitters initially installed before August 1, 1994, are authorized for use indefinitely at the same maritime station. VHF handheld, portable transmitters are not required to comply with the requirements in paragraph © of this section except when used as described in 80.141.

THE TRANSMITTER MEETS THESE REQUIREMENTS

PAGE NO. 34 of 39.
NAME OF TEST: Power Output Over Time
SPECIFICATION: 47 CFR 80.959(c)(1)(2)&(3)
GUIDE: TIA/EIA 603-1993
TEST EQUIPMENT: As per previous page

MEASUREMENT PROCEDURE

1. The EUT was connected to a resistive coaxial attenuator of normal load impedance, and the unmodulated output power was measured by means of an R. F. Power meter.
2. Measurement accuracy is $\pm 3\%$.
3. The transmitter was operated continuously.
4. Measurements summary:

<u>TIME, Min.</u>	<u>SUPPLY VOLTAGE, vdc</u>	<u>R.F. Power Output, Watts</u>
0	13.8	25
10	13.8	25

Measurement Results: Attached


SUPERVISED BY:


 William H. Graff

PAGE NO. 35 of 39.

NAME OF TEST: Power Output Over Time

RF POWER VS TIME
 ICOM, IC-M45A
 1999-MAY-20, 09:15

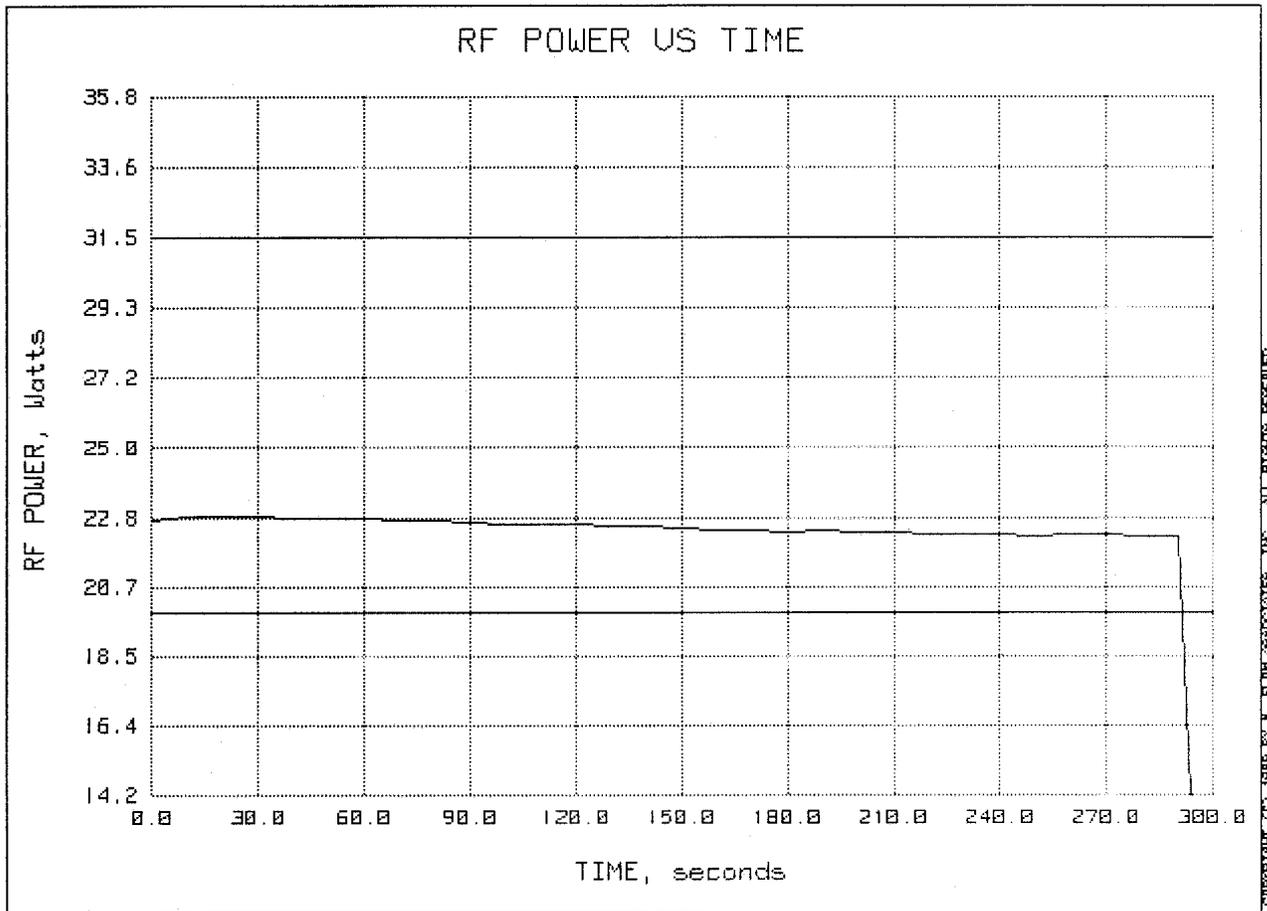

COPYRIGHT © 1999 BY W. FLOYD ASSOCIATES, INC. ALL RIGHTS RESERVED.

NOMINAL, Watts	= 25
UPPER LIMIT, dB	= 1.0
UPPER LIMIT, Watts	= 31.5
LOWER LIMIT, dB	= 1.0
LOWER LIMIT, Watts	= 19.9

PAGE NO. 36 of 39.

NAME OF TEST: Subpart T - G3E Emissions

SPECIFICATION: 47 CFR 80.956(a) & (b)

GUIDE: TIA/EIA 603-1993

TEST EQUIPMENT: As per previous page

MEASUREMENT PROCEDURE

1. Each VHF R/T installation must be capable of transmitting and receiving G3E emissions.

MEASUREMENT RESULTS

NOMINAL, MHz	CHANNEL	R. F. POWER, WATTS	
		LO	HI
156.300	06	1	25
156.550	11	1	25
156.600	12	1	25
156.650	13* Mobile Only	1	**1/25
156.700	14	1	25
156.750	15	1	25
156.800	16	1	25
156.850	17* Mobile Only	1	**1/25
156.875	67* Mobile Only	1	**1/25

*Automatic switching to low power.

**High power with manual over-ride, see attached manual.

THE TRANSMITTER AND RECEIVER MEET THESE REQUIREMENTS.

SUPERVISED BY:


William H. Graff

PAGE NO. 37 of 39.
NAME OF TEST: Subpart T - G3E Emissions
SPECIFICATION: 47 CFR 80.956(a) & (b)
GUIDE: TIA/EIA 603-1993
TEST EQUIPMENT: As per previous page

- (a) The transmitter must be capable of transmission of G3E emissions on the required frequencies.
- (b) The transmitter must deliver a carrier power of between 10 Watts and 25 Watts into 50Ω when operated with its rated supply voltage.

The transmitter must be capable of readily reducing the power to 1 watt or less

THE TRANSMITTER MEETS THESE REQUIREMENTS

SUPERVISED BY:


William H. Graff

PAGE NO. 38 of 39.
NAME OF TEST: Subpart T - G3E Emissions
SPECIFICATION: 47 CFR 80.961(a) & (b)
GUIDE: TIA/EIA 603-1993
TEST EQUIPMENT: As per previous page

MEASUREMENT RESULTS

- (a) The receiver is capable of reception of G3E emissions on the required frequencies.
- (b) The sensitivity of the receiver at 20 dB SINAD is better than:

SENSITIVITY, dBm = -106.8

SENSITIVITY, μ V = 1.02

SUPERVISED BY:


William H. Graff

PAGE NO. 39 of 39.

NAME OF TEST: Necessary Bandwidth and Emission Bandwidth

SPECIFICATION: 47 CFR 2.202(g)

MODULATION = 16K0G3E

NECESSARY BANDWIDTH CALCULATION:

MAXIMUM MODULATION (M), kHz	= 3
MAXIMUM DEVIATION (D), kHz	= 5
CONSTANT FACTOR (K)	= 1
NECESSARY BANDWIDTH (B _N), kHz	= (2 x M) + (2 x D x K)
	= 16.0

SUPERVISED BY:



William H. Graff

TESTIMONIAL
AND
STATEMENT OF CERTIFICATION

THIS IS TO CERTIFY THAT:

1. THAT the application was prepared either by, or under the direct supervision of, the undersigned.
2. THAT the technical data supplied with the application was taken under my direction and supervision.
3. THAT the data was obtained on representative units, randomly selected.
4. THAT, to the best of my knowledge and belief, the facts set forth in the application and accompanying technical data are true and correct.

CERTIFYING ENGINEER:


William H. Graff