



RADIO TEST REPORT

Test Report No.: 29IE0120-YK-01-A

Applicant : PIONEER CORPORATION

Type of Equipment : Multi-Media AVN Navigation Server System
with BT

Model No. : AVIC-Z110BT

FCC ID : AJDK026

Test regulation : FCC Part15 Subpart C: 2009


Test result : Complied

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the limits of the above regulation.
4. The test results in this test report are traceable to the national or international standards.

Date of test: April 28, 30 and May 7, 2009

Tested by: 
Akira Sato

Tested by:  & 
Fumiaki Matsuo & Takahiro Suzuki

Approved by: 
Toyokazu Imamura
Assistant Manager of Yamakita EMC Lab.

UL Japan, Inc.

Yamakita EMC Lab.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011 Facsimile: +81 465 77 2112

MF060b (09.01.08)

Table of Contents	Page
1 Applicant information	3
2 Equipment under test (E.U.T.)	3
3 Test specification, procedures and results	4
4 System test configuration	6
5 Carrier frequency separation	9
6 20dB bandwidth & Occupied bandwidth (99%)	9
7 Number of hopping frequency	9
8 Dwell time	9
9 Maximum peak output power	9
10 Out of band emissions (Antenna port conducted)	9
11 Out of band emissions (Radiated)	10
 <u>Contents of Appendixes</u>	 11
APPENDIX 1: Photographs of test setup	12
APPENDIX 2: Test data	14
APPENDIX 3: Test instruments	78

1 Applicant information

Company Name : PIONEER CORPORATION
Address : 25-1 Nishi-machi, Yamada-aza, Kawagoe-shi, Saitama, 350-8555, JAPAN
Telephone Number : +81 49 228 6341
Facsimile Number : +81 49 228 6497
Contact Person : Tetsuya Higuchi

2 Equipment under test (E.U.T.)

2.1 Identification of E.U.T.

Type of Equipment : Multi-Media AVN Navigation Server System with BT
Model No. : AVIC-Z110BT
Serial No. : Refer to 4.2 in this report.
Rating : DC14.4V
Country of Mass-production : Thailand
Receipt Date of Sample : April 28, 2009
Condition of EUT : Production prototype
(Not for Sale: This sample is equivalent to mass-produced items.)
Modification of EUT : No modification by the test lab.

2.2 Product description

Model: AVIC-Z110BT (referred to as the EUT in this report) is a Multi-Media AVN Navigation Server System with BT.

Equipment type : Transceiver
Frequency of operation : 2402-2480MHz
Clock frequency : System microcomputer: 15MHz, CD Mechanism: 27MHz
FM/AM Tuner: 39.9MHz (1st: 10.7MHz, 2nd: 700kHz), Bluetooth: 26MHz
CPU: 12MHz, 32.768kHz (42MHz, 24.576MHz, 33.23MHz, 33.3MHz)
GPS: 16.367677MHz
DC-DC Converter 1: 480kHz/ 500kHz
DC-DC Converter 2: 2.25MHz
DC-DC Converter 3: 1.93MHz
DC-DC Converter 4: 780kHz/ 635kHz
DC-DC Converter 5: 450kHz/ 400kHz
DC-DC Converter 6: 500kHz/ 430kHz
DC-DC Converter 7: 2.31MHz
DC-DC Converter 8: 384.61kHz, 405.4054kHz
Bandwidth & channel spacing : 79MHz & 1MHz
Type of modulation : FHSS
Antenna model & type : AMD0302-ST01, $\lambda/4$ type (made by Mitsubishi Material)
Antenna gain with cable loss : +1.6dBi
Antenna connector type : Micro coaxial
ITU code : F1D
Operation temperature range : -40 to +85 deg.C.

FCC Part15.31 (e)

The equipment provides the Bluetooth transmitter with stable power supply (DC3.3 V), therefore, the equipment complies power supply regulation.

FCC Part15.203 Antenna requirement

The equipment and its antenna comply with this requirement since this antenna is built in the equipment and it cannot be replaced by end users.

UL Japan, Inc.

Yamakita EMC Lab.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011 Facsimile: +81 465 77 2112

3 Test specification, procedures and results

3.1 Test specification

Test specification : FCC Part 15 Subpart C: 2009, final revised on February 27, 2009
Title : FCC 47CFR Part15 Radio Frequency Device Subpart C Intentional Radiators
Section 15.207 Conducted limits
Section 15.209 Radiated emission limits, general requirements
Section 15.247 Operation within the bands 902-928MHz, 2400-2483.5MHz,
and 5725-5850MHz

* The revision on February 27, 2009 does not influence the test specification applied to the EUT.

The EUT complies with FCC Part 15 Subpart B: 2009, final revised on February 27, 2009. The test has been performed by the customer.

3.2 Procedures & Results

Item	Test Procedure	Specification	Remarks	Deviation	Worst Margin	Results
Conducted emission	ANSI C63.4:2003 7. AC powerline conducted emission measurements	FCC Section 15.207	-	N/A *1)	N/A	N/A
Carrier frequency separation	FCC Public Notice DA 00-705 & ANSI C63.4:2003 13. Measurement of intentional radiators	FCC Section15.247 (a)(1)	Conducted	N/A	*See data.	Complied
20dB bandwidth	FCC Public Notice DA 00-705 & ANSI C63.4:2003 13. Measurement of intentional radiators	FCC Section15.247 (a)(1)	Conducted	N/A		Complied
Number of hopping frequency	FCC Public Notice DA 00-705 & ANSI C63.4:2003 13. Measurement of intentional radiators	FCC Section15.247 (a)(1)(iii)	Conducted	N/A		Complied
Dwell time	FCC Public Notice DA 00-705 & ANSI C63.4:2003 13. Measurement of intentional radiators	FCC Section15.247 (a)(1)(iii)	Conducted	N/A		Complied
Maximum peak output power	FCC Public Notice DA 00-705 & ANSI C63.4:2003 13. Measurement of intentional radiators	FCC Section15.247 (b)(1)	Conducted	N/A		Complied
Band edge compliance & Spurious emission	FCC Public Notice DA 00-705 & ANSI C63.4:2003 13. Measurement of intentional radiators	FCC Section15.247 (d) Section15.209	Conducted/ Radiated	N/A	3.6dB (12400.00MHz, AV, Vertical, Tx 2480MHz, DH5)	Complied

Note: UL Japan's EMI Work Procedures No.QPM05 and QPM15.

3.3 Addition to standard

Item	Test Procedure	Specification	Remarks	Worst Margin	Results
Occupied bandwidth (99%)	ANSI C63.4:2003 13. Measurement of intentional radiators RSS-Gen 4.6.1	RSS-Gen 4.6.1	Conducted	-	Complied

* Other than above, no addition, exclusion nor deviation has been made from the standard.

UL Japan, Inc.

Yamakita EMC Lab.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011 Facsimile: +81 465 77 2112

3.4 Uncertainty

The following uncertainties have been calculated to provide a confidence level of 95% using a coverage factor k=2.

	No.1 open site (±)	No.2 open site (±)	No.1 anechoic chamber (±)
Radiated emission (3m)			
<30MHz	2.4 dB	2.4 dB	2.7 dB
30-300MHz	4.3 dB	4.3 dB	4.6 dB
300-1000MHz	4.3 dB	4.3 dB	4.5 dB
1GHz<	5.7 dB	5.8 dB	5.7 dB

Antenna port conducted test	(±)
Below 1GHz	0.4dB
1GHz and above	0.7dB

Radiated emission test

The data listed in this report meets the limits unless the uncertainty is taken into consideration.

3.5 Test location

UL Japan, Inc. Yamakita EMC Lab.

907, Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken 258-0124 JAPAN

Telephone number : +81 465 77 1011

Facsimile number : +81 465 77 2112

JAB Accreditation No. : RTL02610

No. 1 test site has been fully described in a report submitted to FCC office, and accepted on July 23, 2008 (Registration No.: 95486).

IC Registration No. : 2973B-1

No. 2 test site has been fully described in a report submitted to FCC office, and accepted on February 27, 2008 (Registration No.: 466226).

IC Registration No. : 2973B-3

No. 1 anechoic chamber has been fully described in a report submitted to FCC office, and accepted on October 22, 2008 (Registration No.: 95967).

IC Registration No. : 2973B-2

Test room	Width x Depth x Height (m)	Test room	Width x Depth x Height (m)
No.1 shielded room	8.0 x 5.0 x 2.5	No.1 Semi-anechoic chamber	10.0 x 7.5 x 5.7
No.2 shielded room	5.0 x 4.0 x 2.5		
No.3 shielded room	4.0 x 5.0 x 2.7		

Open test site	Maximum measurement distance
No.1 open test site	30m
No.2 open test site	10m

UL Japan, Inc.

Yamakita EMC Lab.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011 Facsimile: +81 465 77 2112

4 System test configuration

4.1 Justification

The system was configured in typical fashion (as a customer would normally use it) for testing.

Test item	Operating mode	Tested frequency
Conducted emission	Transmitting (DH5/3DH5), Payload: PRBS9	2402MHz, 2441MHz, 2480MHz
	Receiving	2441MHz
Carrier frequency separation	Transmitting Hopping ON (DH5/3DH5)/Inquiry, Payload: PRBS9	-
20dB bandwidth	Transmitting Hopping OFF (DH5/3DH5)/Inquiry, Payload: PRBS9	2402MHz, 2441MHz, 2480MHz
Number of hopping frequency	Transmitting Hopping ON (DH5/3DH5)/Inquiry, Payload: PRBS9	-
Dwell time	Transmitting (Hopping ON) -DH1 -DH3 -DH5 -3DH1 -3DH3 -3DH5	-
	-Inquiry	
Maximum peak output power	Transmitting Hopping OFF (DH5/3DH5)/Inquiry, Payload: PRBS9 -DH5 -2DH5 -3DH5	2402MHz, 2441MHz, 2480MHz
Spurious emission & Band edge compliance (Conducted) (Radiated)	Transmitting (DH5/3DH5), Payload: PRBS9 -Hopping ON/Inquiry -Hopping OFF	Spurious emission: 2402MHz, 2441MHz, 2480MHz Band edge compliance: 2402MHz, 2480MHz
	Transmitting (DH5/3DH5), Payload: PRBS9	
99% occupied bandwidth	Transmitting (DH5/3DH5), Payload: PRBS9 -Hopping ON -Hopping OFF	2402MHz, 2441MHz, 2480MHz

*As a result of preliminary test, the formal test was performed with the above modes, which had the maximum payload (except Dwell time test)

*Remarks: Test was not performed at AFH mode, because the decrease of number of channel (min: 20ch) at AFH mode does not influence on the output power and bandwidth of the EUT.

However, the limit level 125mW of AFH mode was used for the test.


UL Japan, Inc.

Yamakita EMC Lab.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011 Facsimile: +81 465 77 2112

4.2 Configuration and peripherals

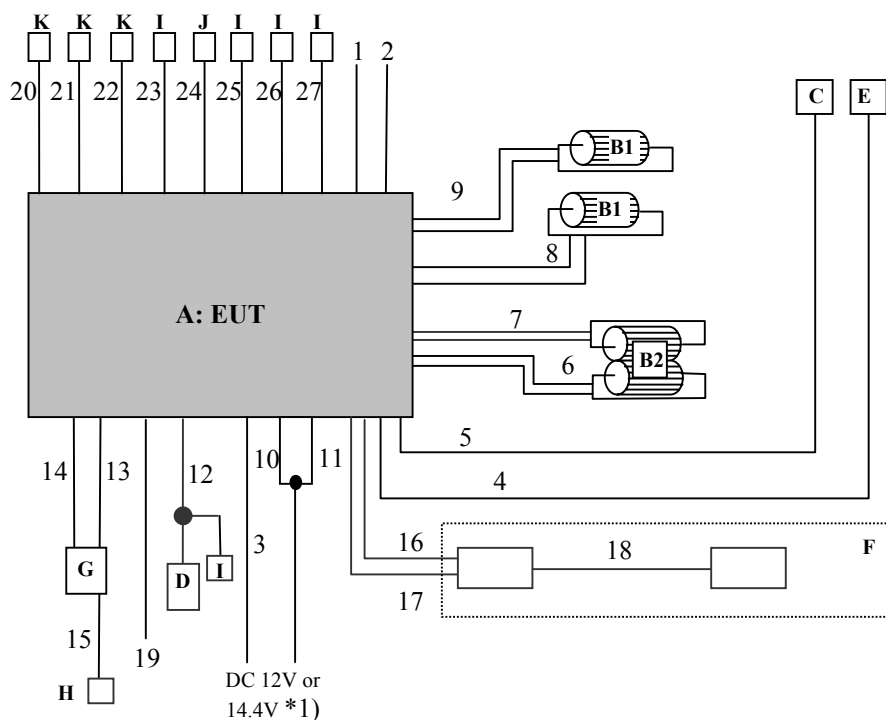

* Test data was taken under worse case conditions.

Description of EUT and support equipment

No.	Item	Model number	Serial number	Manufacturer	Remarks
A	Multi-Media AVN Navigation Server System With BT	AVIC-Z110BT	*2)	PIONEER	EUT
B1	Speaker dummy load	RHF100	-	-	-
B2	Speaker dummy load	RHA100N	-	-	-
C	MIC	CMP1083-A	-	PIONEER	-
D	USB memory	DTI	030207	Data Traveler	-
E	GPS Antenna	CXE2705-A	-	-	-
F	Wired Remote Controller	CD-MR80D	07200808C	PIONEER	-
G	MSN Tuner Unit	MDT10	37	-	-
H	75 ohm terminator	CT01-BP	-	TME	-
I	75 ohm terminator	-	-	-	-
J	1k ohm terminator	-	-	-	-
K	15k ohm terminator	-	-	-	-

*1) DC power supply (Model No.: PAN35-10A) was used for DC input.

*2) Radiated emission test: TPIC000037, Antenna port conducted test: TPIC000038

UL Japan, Inc.

Yamakita EMC Lab.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

List of cables used *3)

No.	Name	Length (m)	Shield		Remark
			Cable	Connector	
1	Mute cable	0.25	Unshielded	Unshielded	-
2	System Remote Control cable	0.3	Unshielded	Unshielded	-
3	GND cable	1.0	Unshielded	Unshielded	-
4	GPS antenna cable	5.0	Shielded	Shielded	-
5	MIC cable	4.0	Shielded	Shielded	-
6	Front speaker cable (L) (+, -)	0.15	Unshielded	Unshielded	-
7	Front speaker cable (R) (+, -)	0.15	Unshielded	Unshielded	-
8	Rear speaker cable (L) (+, -)	0.15	Unshielded	Unshielded	-
9	Rear speaker cable (R) (+, -)	0.15	Unshielded	Unshielded	-
10	+ Battery cable	0.25	Unshielded	Unshielded	-
11	ACC cable	0.15	Unshielded	Unshielded	-
12	USB cable	2.0	Shielded	Shielded	-
13	MSN Tuner Unit cable (For FM antenna tuner)	0.3	Shielded	Shielded	-
14	MSN Tuner Unit cable (For VICS)	1.0	Shielded	Shielded	-
15	Antenna cable	0.3	Shielded	Shielded	-
16	CD-MR80D cable	1.4	Shielded	Shielded	-
17	CD-MR80D cable	1.5	Shielded	Shielded	-
18	CD-MR80D cable	0.15	Shielded	Shielded	-
19	ILL Cable	0.15	Unshielded	Unshielded	-
20	Subwoofer Output Cable (2P)	0.25	Shielded	Shielded	-
21	Rear Output Cable (2P)	0.3	Shielded	Shielded	-
22	Front Output Cable (2P)	0.3	Shielded	Shielded	-
23	Rear View Camera IN Cable	0.2	Shielded	Shielded	-
24	Audio Input Cable (2P)	0.2	Shielded	Shielded	-
25	Video Input Cable	0.2	Shielded	Shielded	-
26	Rear Monitor Output Cable (2P)	0.15	Shielded	Shielded	-
27	Rear Monitor Output Cable	0.15	Shielded	Shielded	-

*3) All cables used for the measurement are exclusive use or marketed.

UL Japan, Inc.

Yamakita EMC Lab.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011 Facsimile: +81 465 77 2112

5 Carrier frequency separation

Test procedure

The carrier frequency separation was measured with a spectrum analyzer connected to the antenna port.

Summary of the test results: Pass

6 20dB bandwidth & Occupied bandwidth (99%)

Test procedure

The bandwidth was measured with a spectrum analyzer connected to the antenna port.

The channel separation in Hopping mode and Inquiry mode was separated by 25kHz and 2/3 of the 20dB bandwidth.

Summary of the test results: Pass

7 Number of hopping frequency

Test procedure

The Number of Hopping Frequency was measured with a spectrum analyzer connected to the antenna port.

Summary of the test results: Pass

8 Dwell time

Test procedure

The Dwell time was measured with a spectrum analyzer connected to the antenna port.

Summary of the test results: Pass

9 Maximum peak output power

Test procedure

The Maximum Peak Output Power was measured with a power meter connected to the antenna port.

Summary of the test results: Pass

10 Out of band emissions (Antenna port conducted)

Test procedure

The Out of Band Emissions was measured with a spectrum analyzer connected to the antenna port.

In any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator confirmed 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on a conducted measurement.

Summary of the test results: Pass

UL Japan, Inc.

Yamakita EMC Lab.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011 Facsimile: +81 465 77 2112

11 Out of band emissions (Radiated)

11.1 Operating environment

The test was carried out in No.1 anechoic chamber.

11.2 Test configuration

EUT was placed on a urethane platform of nominal size, 1.0m by 0.8m, raised 80cm above the conducting ground plane to prevent the reflection influence. Size of 0.5m by 0.5m pallet was also used for the support equipment. The configuration was set in accordance with ANSI C63.4: 2003. Photographs of the set up are shown in Appendix 1.

11.3 Test conditions

Frequency range : 30MHz - 26GHz
Test distance : 3m

11.4 Test procedure

The Radiated Electric Field Strength intensity has been measured with a ground plane and at a distance of 3m. The measuring antenna height was varied between 1 and 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.

The measurements were performed for both vertical and horizontal antenna polarization.

Measurements were performed with QP, PK, and AV detector.

The radiated emission measurements were made with the following detector function of the test receiver.

Frequency	Below 1GHz	Above 1GHz
Instrument used	Test Receiver	Spectrum Analyzer
Detector IF Bandwidth	QP: BW 120kHz	PK: RBW: 1MHz/VBW: 1MHz, AV RBW: 1MHz/VBW: 300Hz (See data) *1)
Measuring antenna	Biconical (30-300MHz) Logperiodic (300MHz-1GHz)	Horn

*1) When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

The EUT was tested in the direction normally used.

11.5 Band edge

Band edge level at 2390MHz and 2483.5MHz is below the limits of FCC 15.209 and band edge level at 2400MHz is below the 20dBc. Refer to the test data.

11.6 Results

Summary of the test results : Pass *No noise was detected above the 5th order harmonics.

UL Japan, Inc.

Yamakita EMC Lab.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011 Facsimile: +81 465 77 2112

APPENDIX 1: Photographs of test setup

Page 12 - 13 : Radiated emission

APPENDIX 2: Test data

Page 14 : Carrier frequency separation
Page 15 - 17 : 20dB bandwidth
Page 18 - 22 : Number of hopping frequency
Page 23 - 36 : Dwell time
Page 37 : Maximum peak output power
Page 38 - 55 : Out of band emissions (Antenna port conducted)
Page 56 - 73 : Out of band emissions (Radiated)
Page 74 : Duty cycle
Page 75 - 77 : Occupied bandwidth

APPENDIX 3: Test instruments

Page 78 : Test instruments

UL Japan, Inc.

Yamakita EMC Lab.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011 Facsimile: +81 465 77 2112